


BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

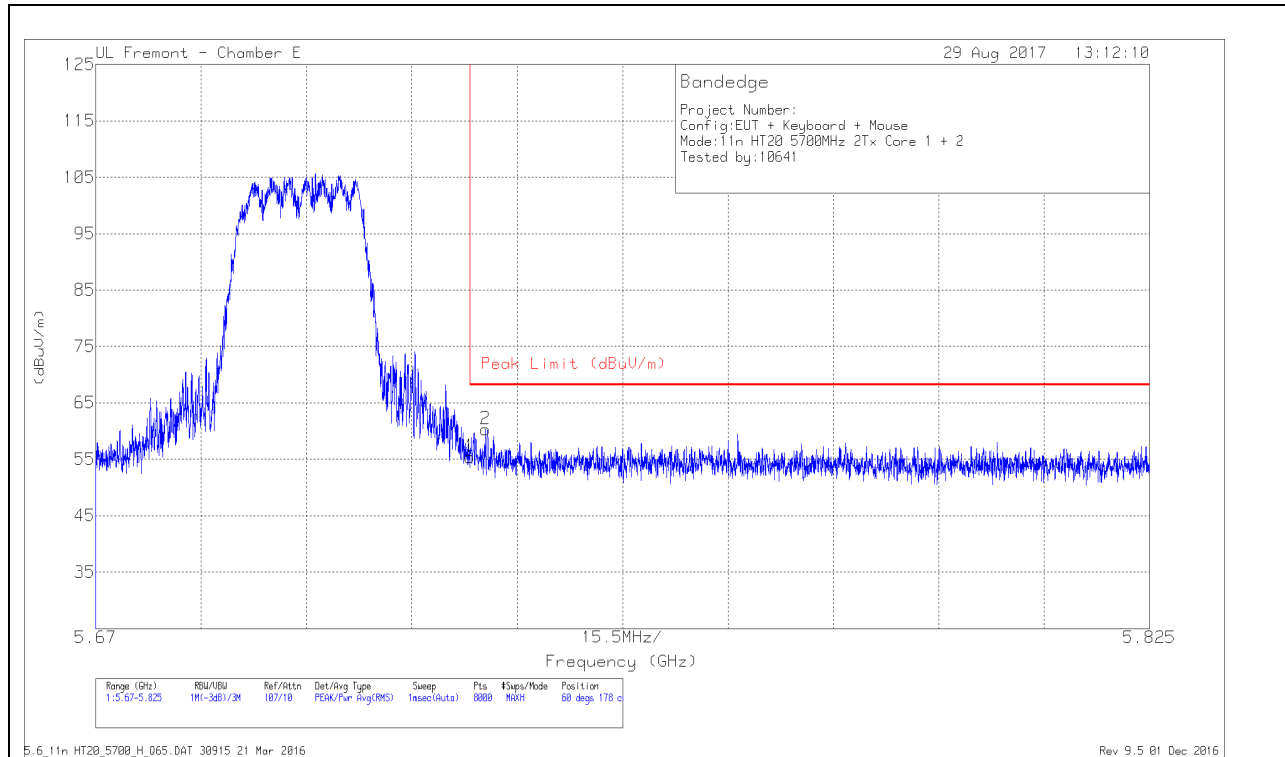

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fl tr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.83	Pk	35.1	-19.5	55.43	68.2	-12.77	60	178	H
2	5.727	44.68	Pk	35.1	-19.5	60.28	68.2	-7.92	60	178	H

Pk - Peak detector

VERTICAL RESULT

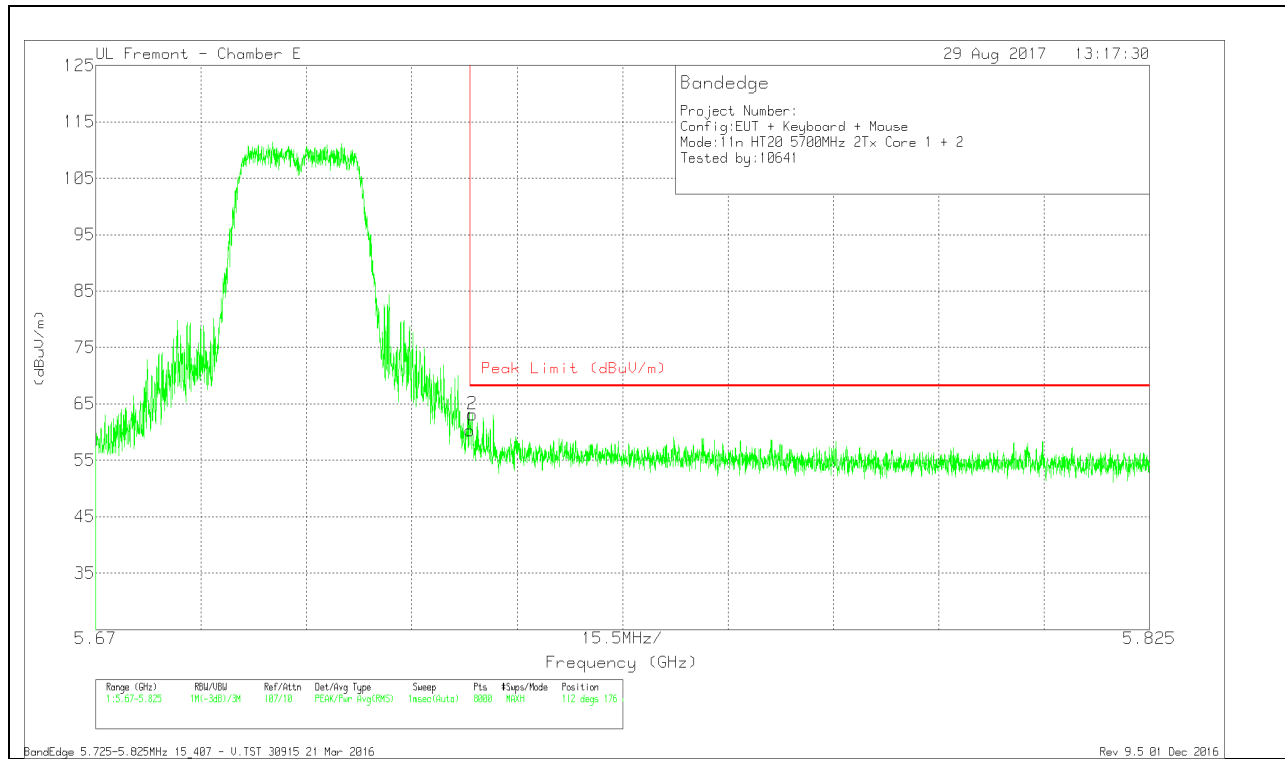


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fl tr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.69	Pk	35.1	-19.5	60.29	68.2	-7.91	112	176	V
2	5.725	47.52	Pk	35.1	-19.5	63.12	68.2	-5.08	112	176	V

Pk - Peak detector

2TX Antenna WF3 + Antenna WF2 SDM Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

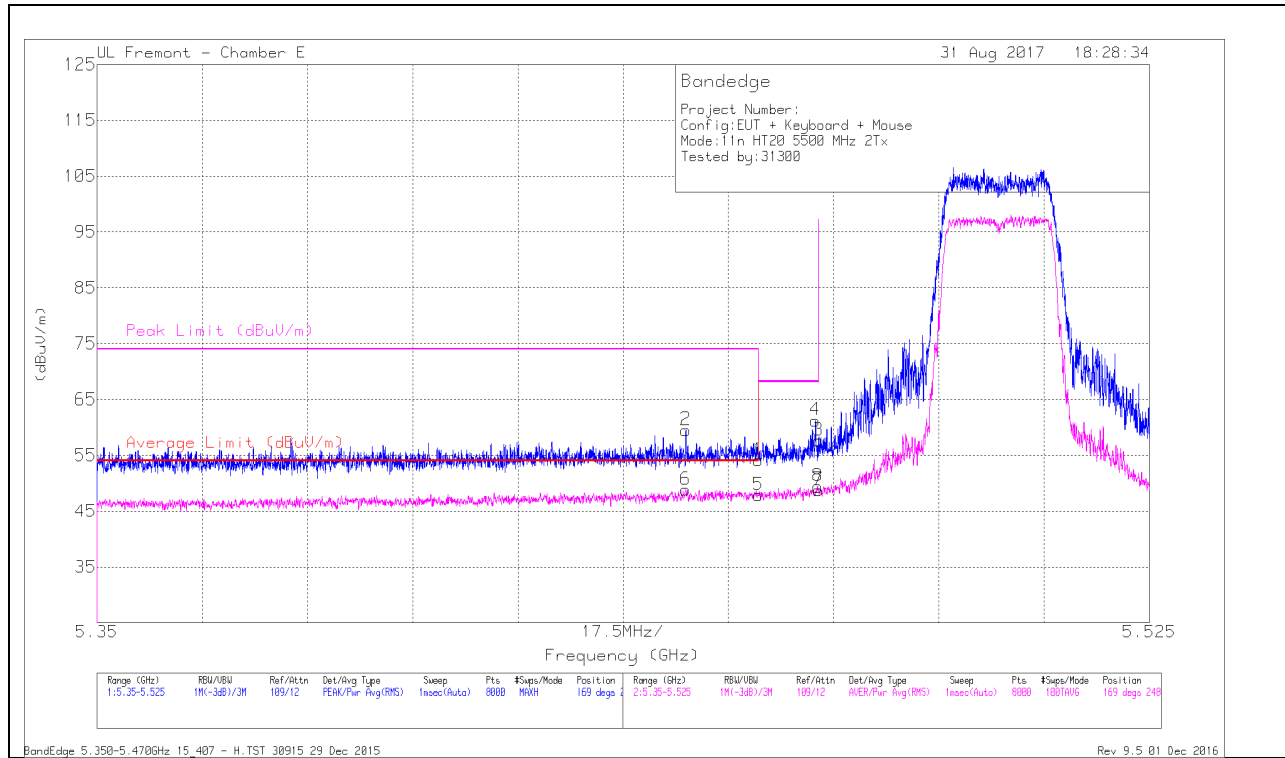


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.9	Pk	35.1	-18.9	0	54.1	-	-	74	-19.9	169	248	H
2	* 5.448	43.34	Pk	35.1	-18.9	0	59.54	-	-	74	-14.46	169	248	H
5	* 5.46	31.46	RMS	35.1	-18.9	.23	47.89	54	-6.11	-	-	169	248	H
6	* 5.448	32.41	RMS	35.1	-18.9	.23	48.84	54	-5.16	-	-	169	248	H
4	5.469	45.06	Pk	35.1	-18.9	0	61.26	-	-	68.2	-6.94	169	248	H
3	5.47	41.45	Pk	35.1	-18.9	0	57.65	-	-	68.2	-10.55	169	248	H
7	5.47	32.37	RMS	35.1	-18.9	.23	48.8	-	-	-	-	169	248	H
8	5.47	32.99	RMS	35.1	-18.9	.23	49.42	-	-	-	-	169	248	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

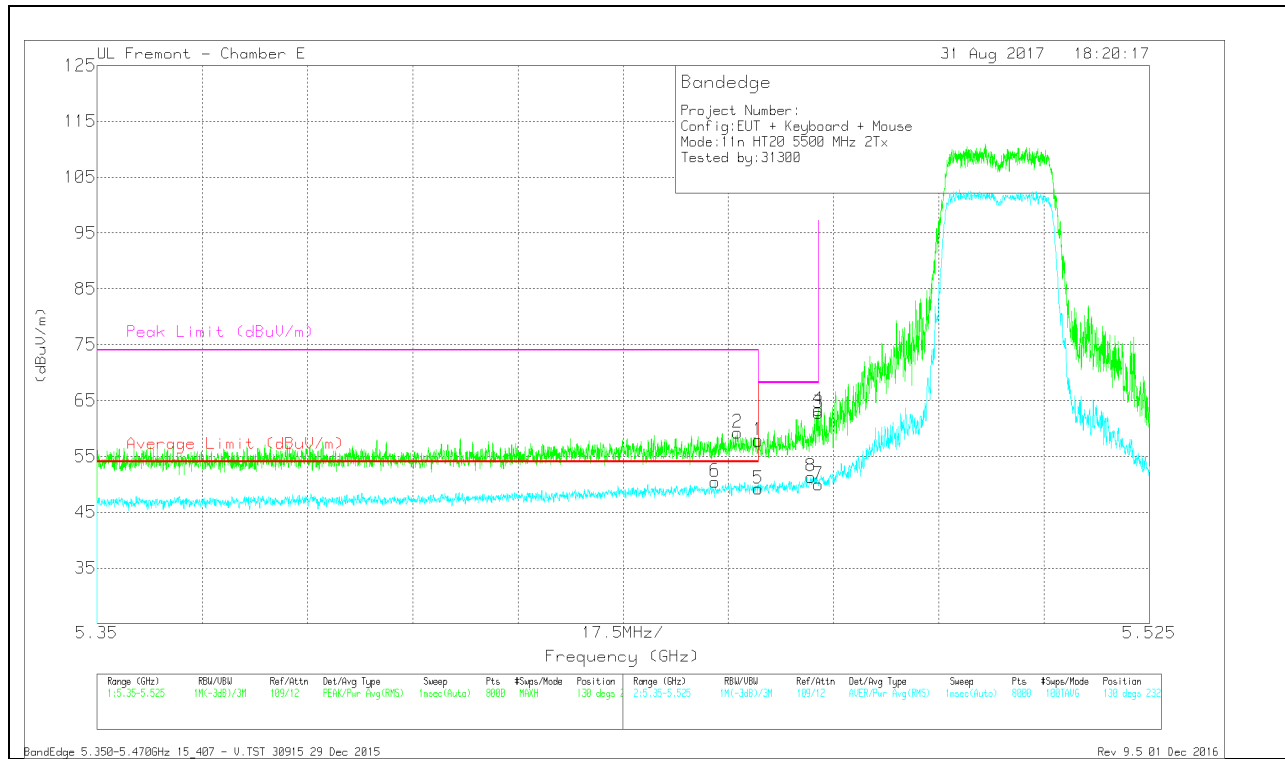


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.66	Pk	35.1	-18.9	0	57.86	-	-	74	-16.14	130	232	V
2	* 5.457	43.06	Pk	35.1	-18.9	0	59.26	-	-	74	-14.74	130	232	V
5	* 5.46	32.79	RMS	35.1	-18.9	.23	49.22	54	-4.78	-	-	130	232	V
6	* 5.453	34.05	RMS	35.1	-18.9	.23	50.48	54	-3.52	-	-	130	232	V
8	5.469	34.93	RMS	35.1	-18.9	.23	51.36	-	-	-	-	130	232	V
3	5.47	46.58	Pk	35.1	-18.9	0	62.78	-	-	68.2	-5.42	130	232	V
4	5.47	47.15	Pk	35.1	-18.9	0	63.35	-	-	68.2	-4.85	130	232	V
7	5.47	33.53	RMS	35.1	-18.9	.23	49.96	-	-	-	-	130	232	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

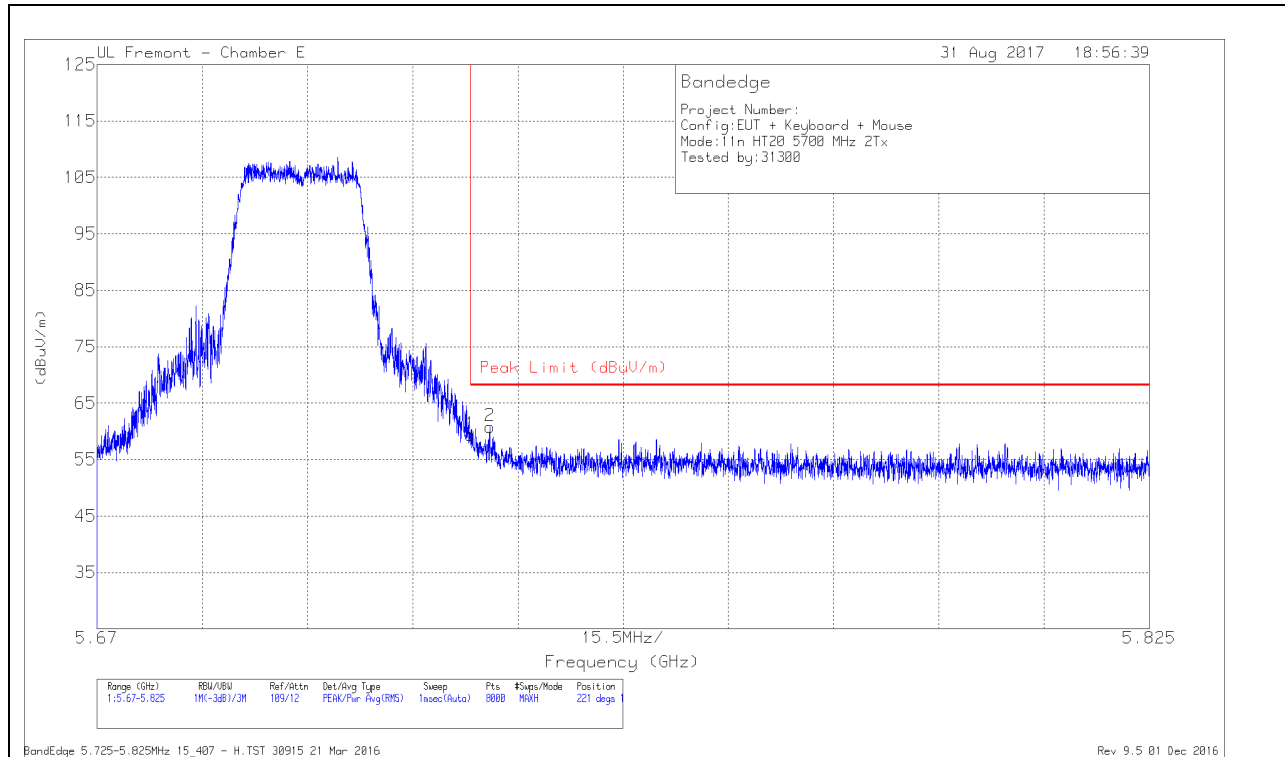

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.42	Pk	35.1	-19.1	0	59.42	68.2	-8.78	221	190	H
2	5.728	44.86	Pk	35.1	-19.1	0	60.86	68.2	-7.34	221	190	H

Pk - Peak detector

VERTICAL RESULT

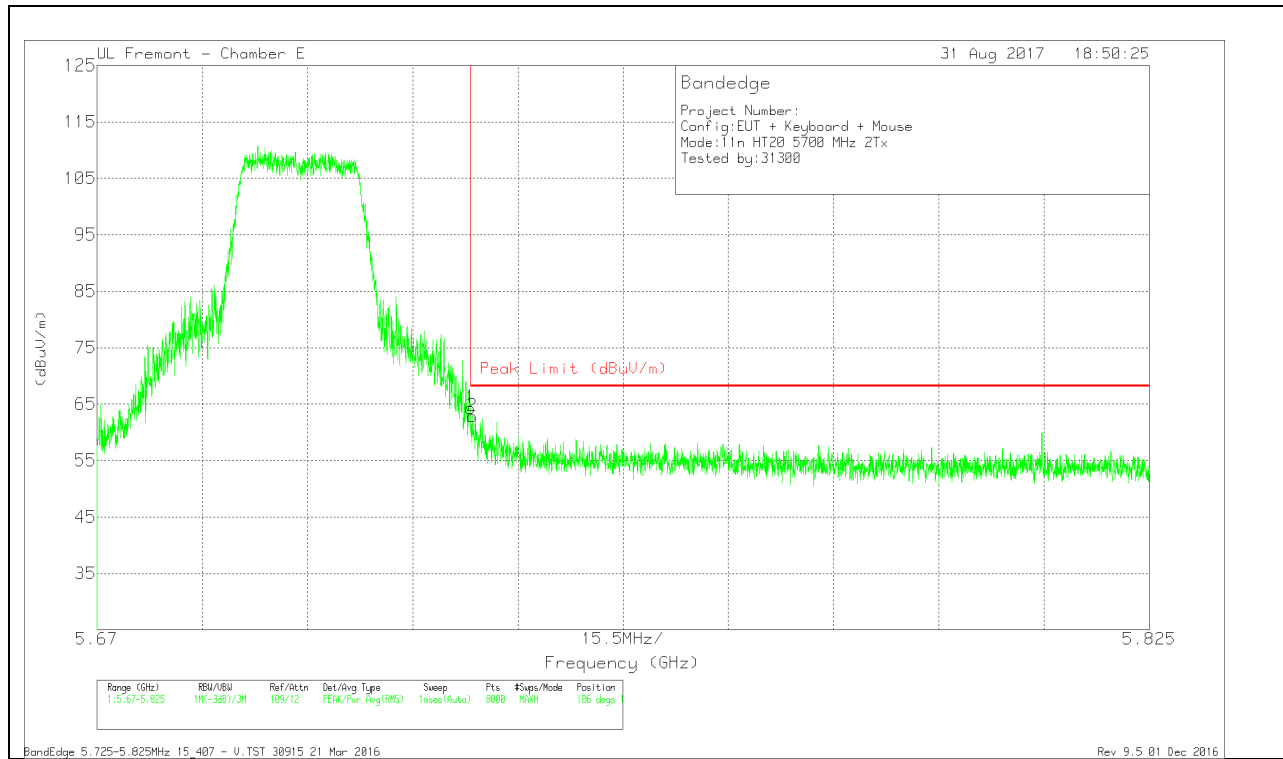


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	48.32	PK	35.1	-19.1	0	64.32	68.2	-3.88	106	196	V
2	5.725	46.85	PK	35.1	-19.1	0	62.85	68.2	-5.35	106	196	V

Pk - Peak detector

2TX Antenna WF3 + Antenna WF2 BF Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

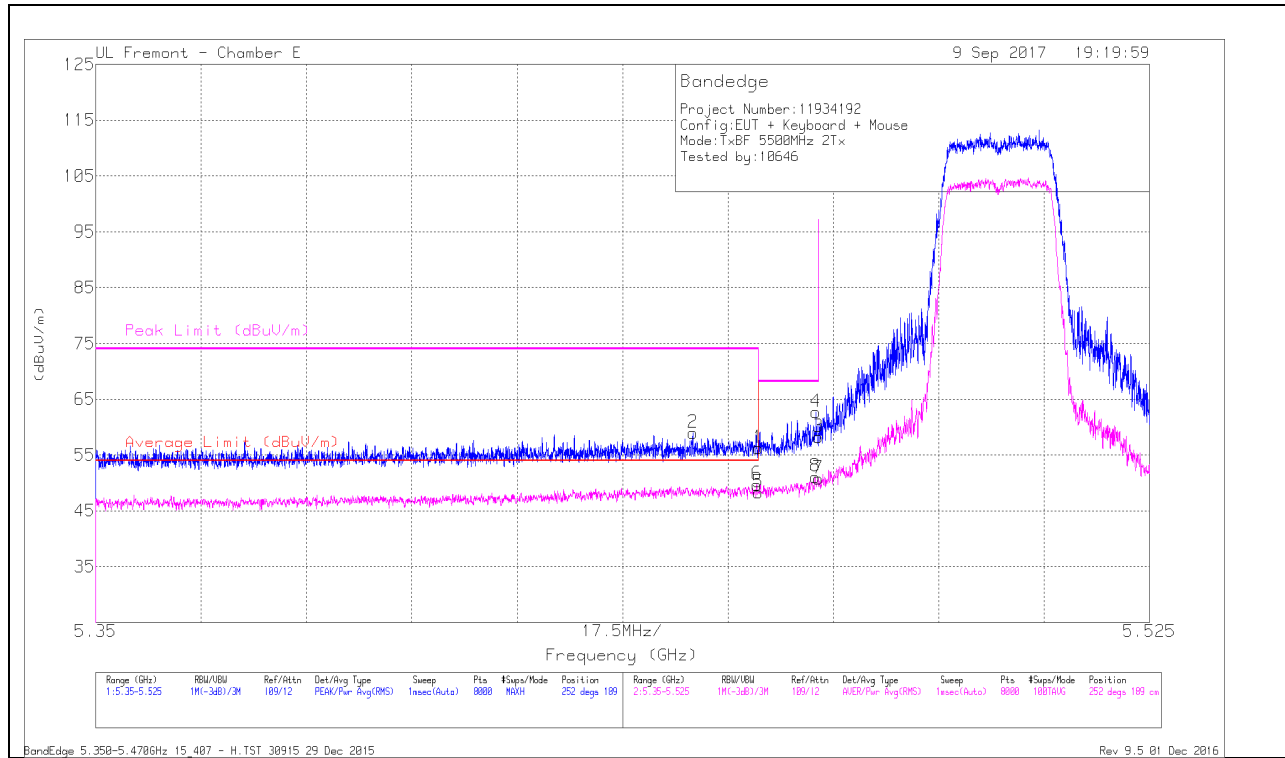


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40	Pk	35.1	-18.9	0	56.2	-	-	74	-17.8	252	189	H
2	* 5.449	42.76	Pk	35.1	-18.9	0	58.96	-	-	74	-15.04	252	189	H
5	* 5.46	31.81	RMS	35.1	-18.9	.12	48.13	54	-5.87	-	-	252	189	H
6	* 5.46	33.28	RMS	35.1	-18.9	.12	49.60	54	-4.40	-	-	252	189	H
8	5.469	34.65	RMS	35.1	-18.9	.12	50.97	54	-3.03	-	-	252	189	H
3	5.47	42	Pk	35.1	-18.9	0	58.2	-	-	68.2	-10	252	189	H
4	5.47	46.54	Pk	35.1	-18.9	0	62.74	-	-	68.2	-5.46	252	189	H
7	5.47	34.36	RMS	35.1	-18.9	.12	50.68	54	-3.32	-	-	252	189	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

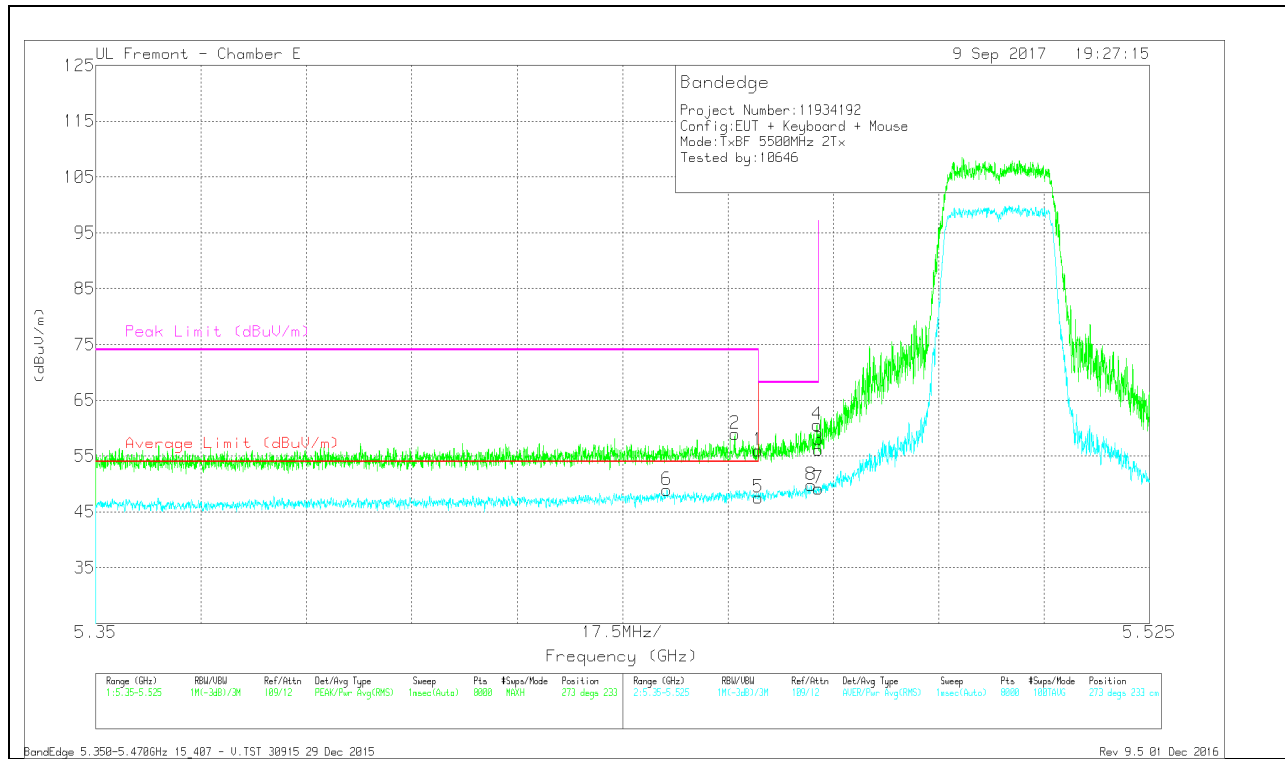


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.77	Pk	35.1	-18.9	0	55.97	-	-	74	-18.03	273	233	V
2	* 5.456	42.73	Pk	35.1	-18.9	0	58.93	-	-	74	-15.07	273	233	V
5	* 5.46	31.11	RMS	35.1	-18.9	.12	47.43	54	-6.57	-	-	273	233	V
6	* 5.445	32.51	RMS	35.1	-18.9	.12	48.83	54	-5.17	-	-	273	233	V
8	5.469	33.32	RMS	35.1	-18.9	.12	49.64	54	-4.36	-	-	273	233	V
3	5.47	39.95	Pk	35.1	-18.9	0	56.15	-	-	68.2	-12.05	273	233	V
4	5.47	44.39	Pk	35.1	-18.9	0	60.59	-	-	68.2	-7.61	273	233	V
7	5.47	32.7	RMS	35.1	-18.9	.12	49.02	54	-4.98	-	-	273	233	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

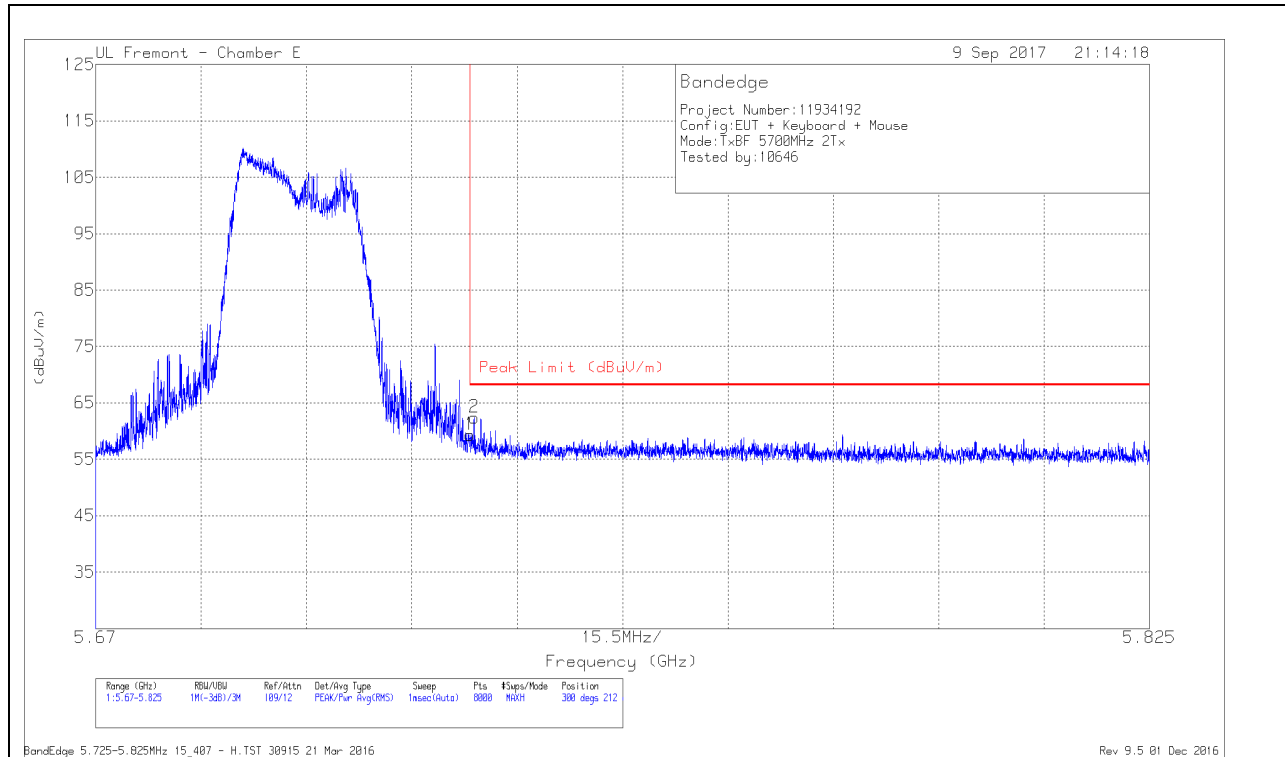

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.34	Pk	35.1	-19.1	0	59.34	68.2	-8.86	300	212	H
2	5.726	46.36	Pk	35.1	-19.1	0	62.36	68.2	-5.84	300	212	H

Pk - Peak detector

VERTICAL RESULT

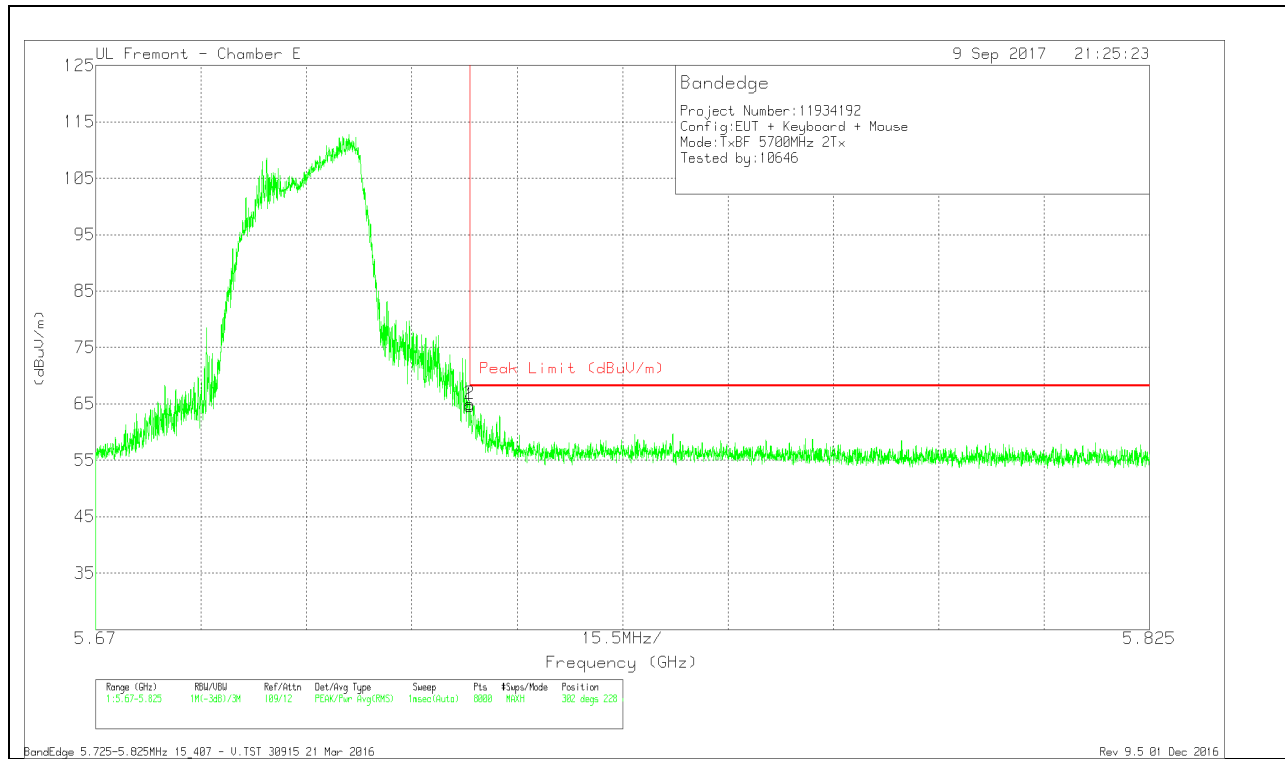


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	48.67	Pk	35.1	-19.1	0	64.67	68.2	-3.53	302	228	V
2	5.725	48.97	Pk	35.1	-19.1	0	64.97	68.2	-3.23	302	228	V

Pk - Peak detector

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 CDD Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

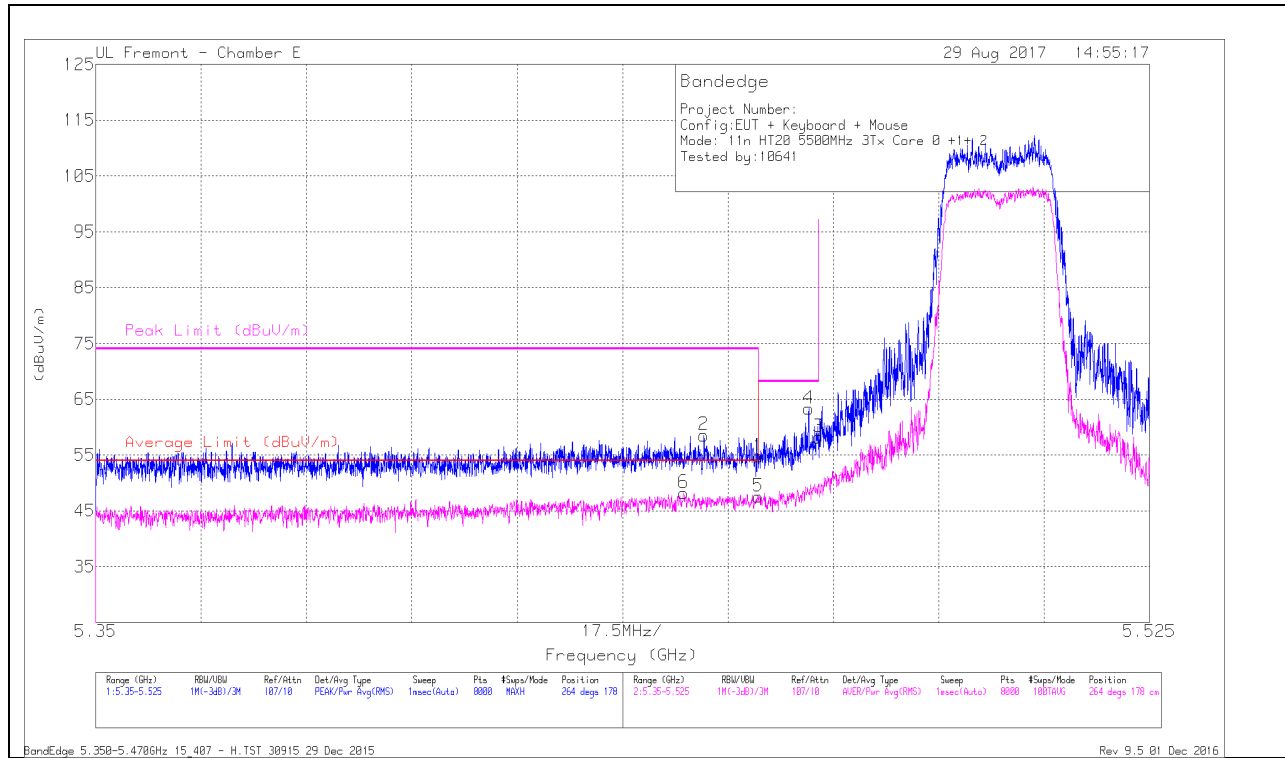


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.448	33.01	RMS	35.1	-20.1	-23	48.24	54	-5.76	-	-	264	178	H
2	* 5.451	43.55	Pk	35.1	-20.1	0	58.55	-	-	74	-15.45	264	178	H
1	* 5.46	39.65	Pk	35.1	-20	0	54.75	-	-	74	-19.25	264	178	H
5	* 5.46	32.25	RMS	35.1	-20	-23	47.58	54	-6.42	-	-	264	178	H
4	5.468	48.17	Pk	35.1	-19.9	0	63.37	-	-	68.2	-4.83	264	178	H
3	5.47	42.98	Pk	35.1	-19.9	0	58.18	-	-	68.2	-10.02	264	178	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

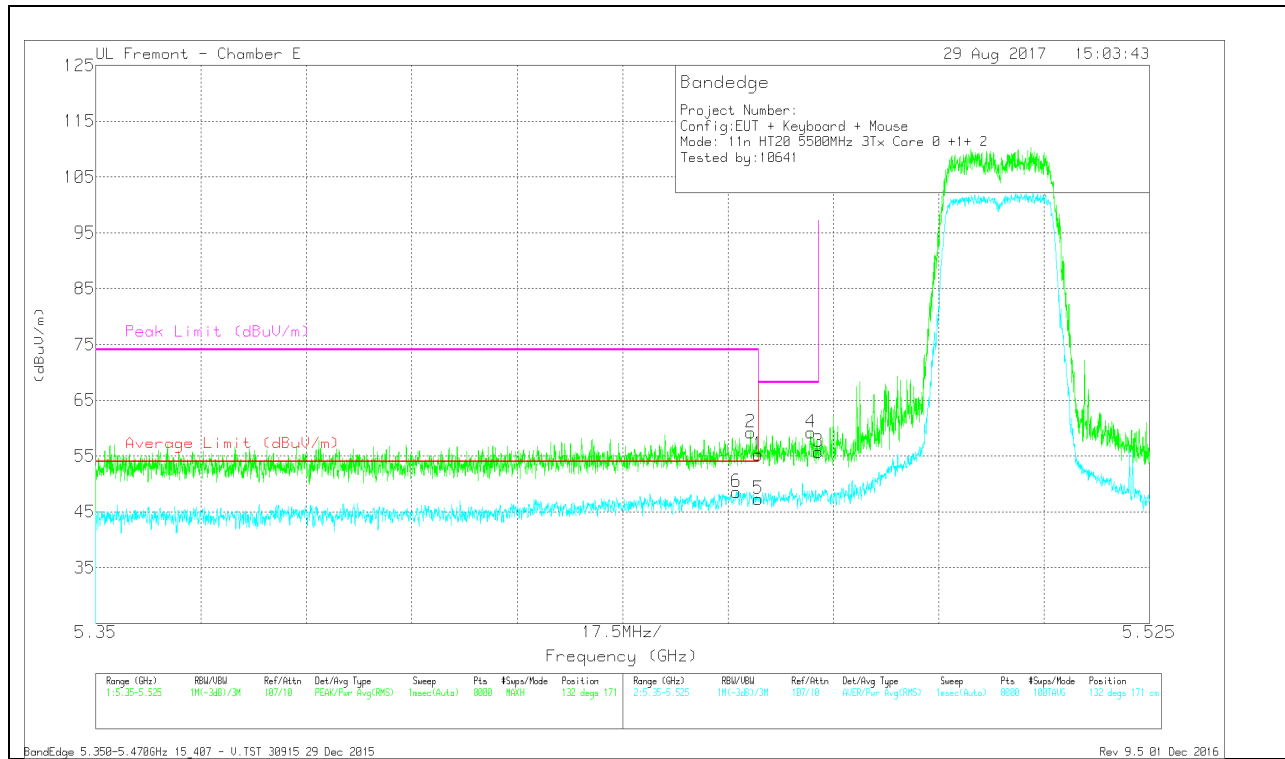


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.456	33.27	RMS	35.1	-20	.23	48.6	54	-5.4	-	-	132	171	V
2	* 5.459	44.08	Pk	35.1	-20	0	59.18	-	-	74	-14.82	132	171	V
1	* 5.46	40.19	Pk	35.1	-20	0	55.29	-	-	74	-18.71	132	171	V
5	* 5.46	31.97	RMS	35.1	-20	.23	47.3	54	-6.7	-	-	132	171	V
4	5.469	44.06	Pk	35.1	-19.9	0	59.26	-	-	68.2	-8.94	132	171	V
3	5.47	40.61	Pk	35.1	-19.9	0	55.81	-	-	68.2	-12.39	132	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

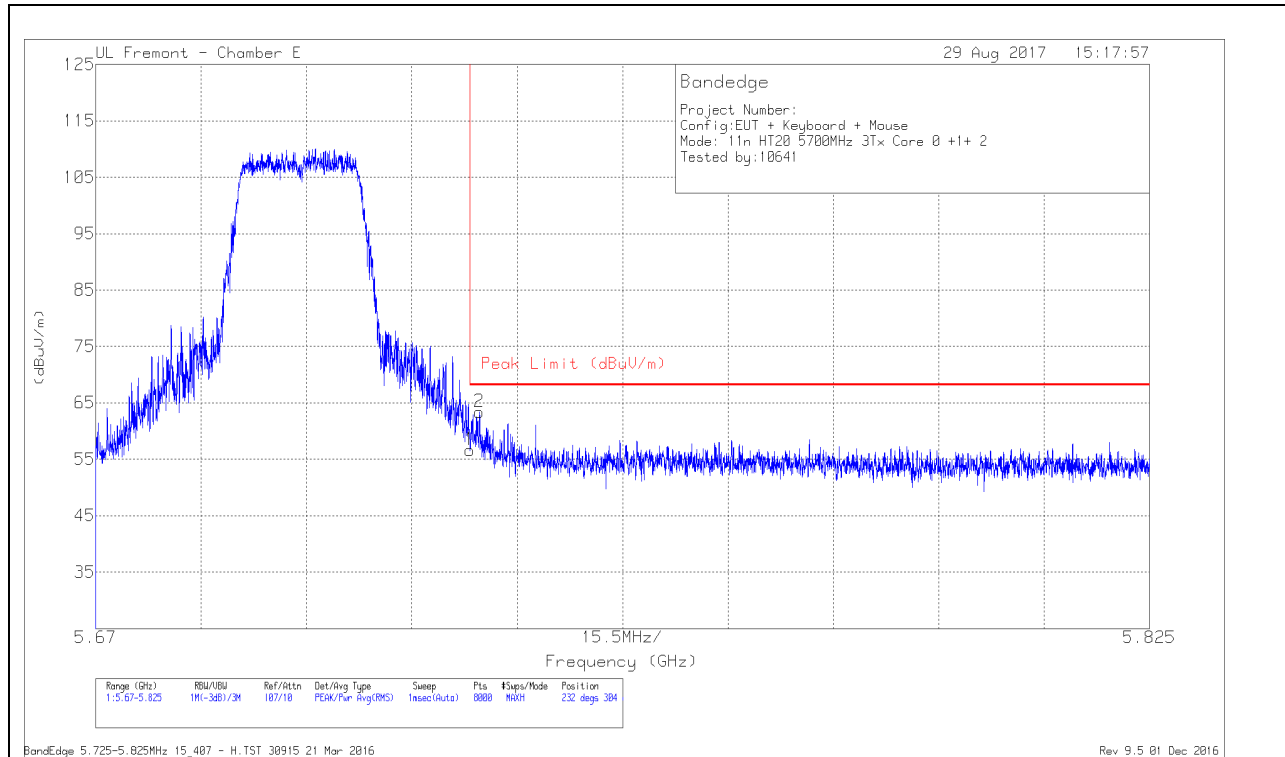

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.08	Pk	35.1	-19.5	0	56.68	68.2	-11.52	232	304	H
2	5.726	47.76	Pk	35.1	-19.5	0	63.36	68.2	-4.84	232	304	H

Pk - Peak detector

VERTICAL RESULT

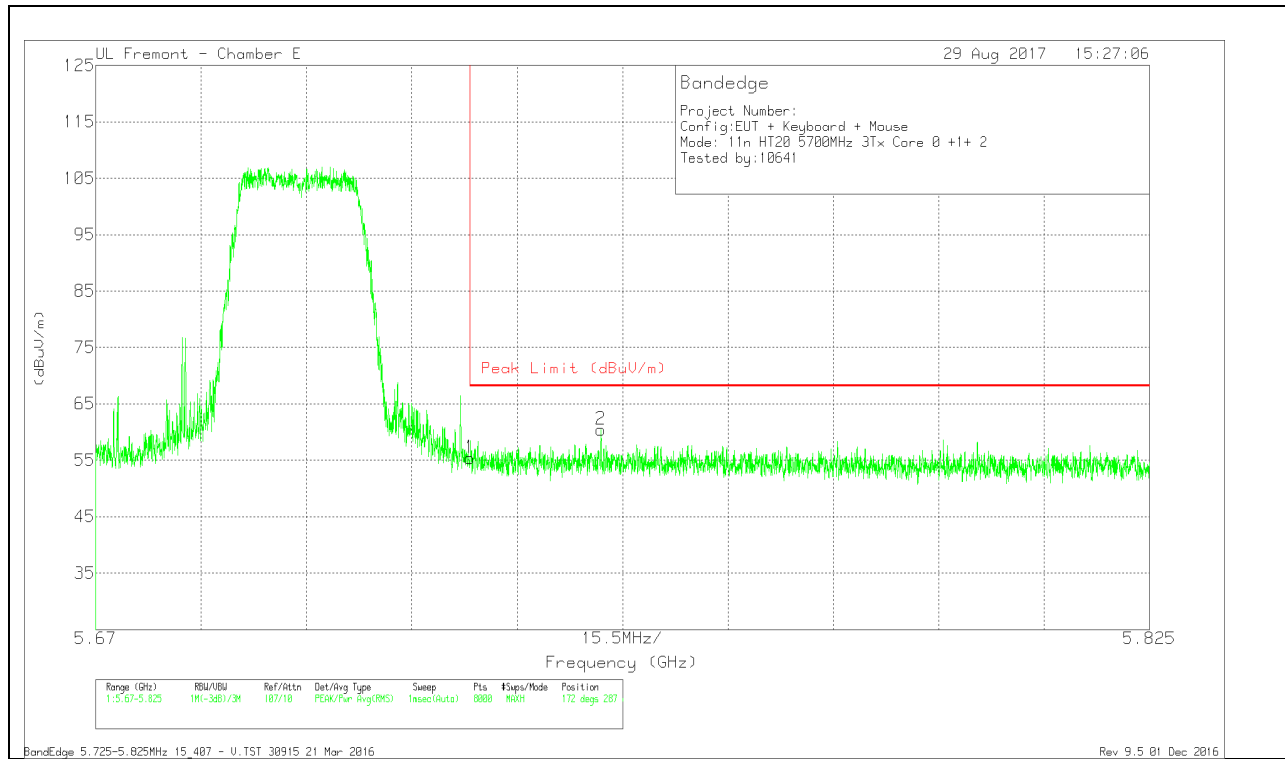


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.84	PK	35.1	-19.5	0	55.44	68.2	-12.76	172	287	V
2	5.744	44.79	PK	35.2	-19.5	0	60.49	68.2	-7.71	172	287	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

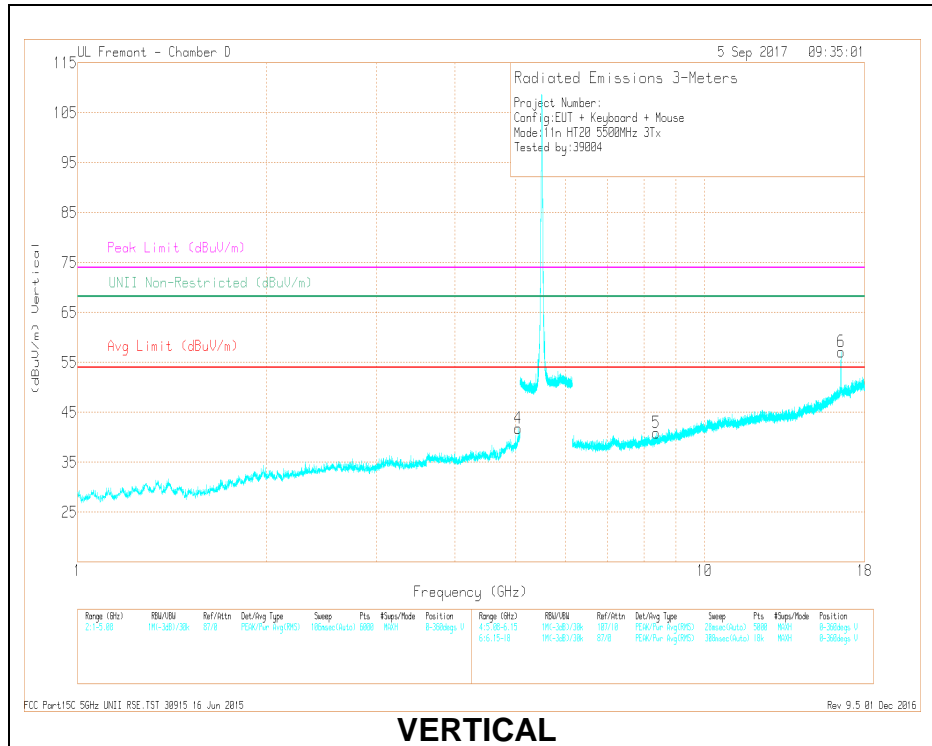

VERTICAL

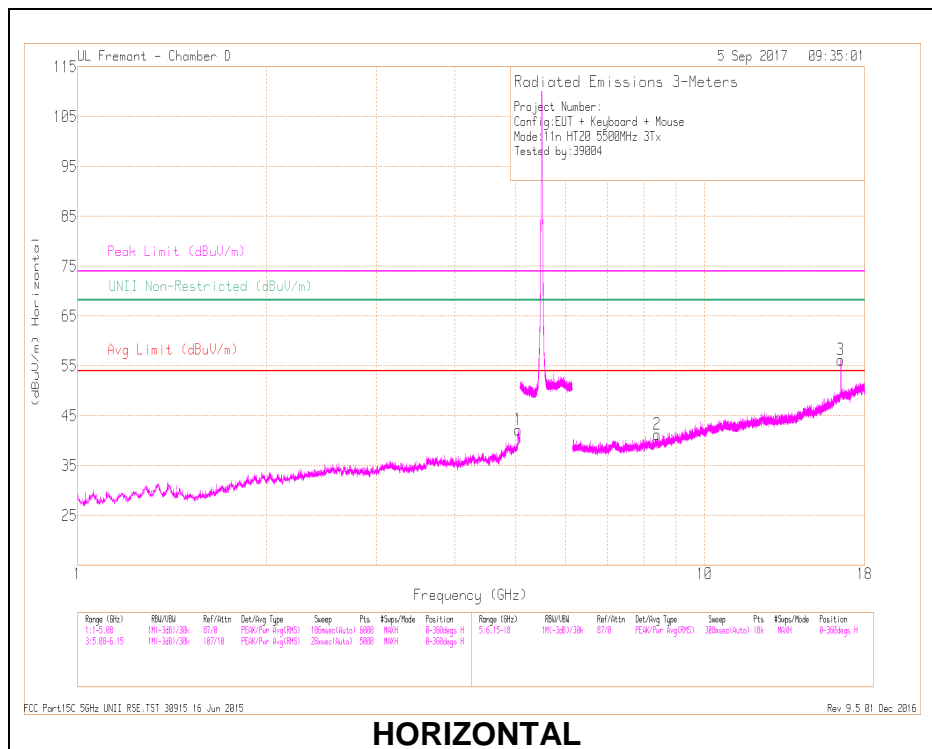

HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.042	41.04	PK-U	34.1	-25.7	0	49.44	-	-	74	-24.56	-	-	234	208	H
	* 5.042	31.42	ADR	34.1	-25.7	.23	40.05	54	-13.95	-	-	-	-	234	208	H
4	* 5.041	41.25	PK-U	34.1	-25.7	0	49.65	-	-	74	-24.35	-	-	233	200	V
	* 5.042	31.29	ADR	34.1	-25.7	.23	39.92	54	-14.08	-	-	-	-	233	200	V
2	* 8.408	36.01	PK-U	35.7	-23.9	0	47.81	-	-	74	-26.19	-	-	311	257	H
	* 8.407	23.62	ADR	35.7	-23.9	.23	35.65	54	-18.35	-	-	-	-	311	257	H
5	* 8.376	35.33	PK-U	35.7	-23.7	0	47.33	-	-	74	-26.67	-	-	174	119	V
	* 8.377	23.6	ADR	35.7	-23.6	.23	35.93	54	-18.07	-	-	-	-	174	119	V
3	16.492	40.73	PK-U	41.6	-18.3	0	64.03	-	-	-	-	68.2	-4.17	210	101	H
6	16.499	41.78	PK-U	41.6	-18.2	0	65.18	-	-	-	-	68.2	-3.02	233	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

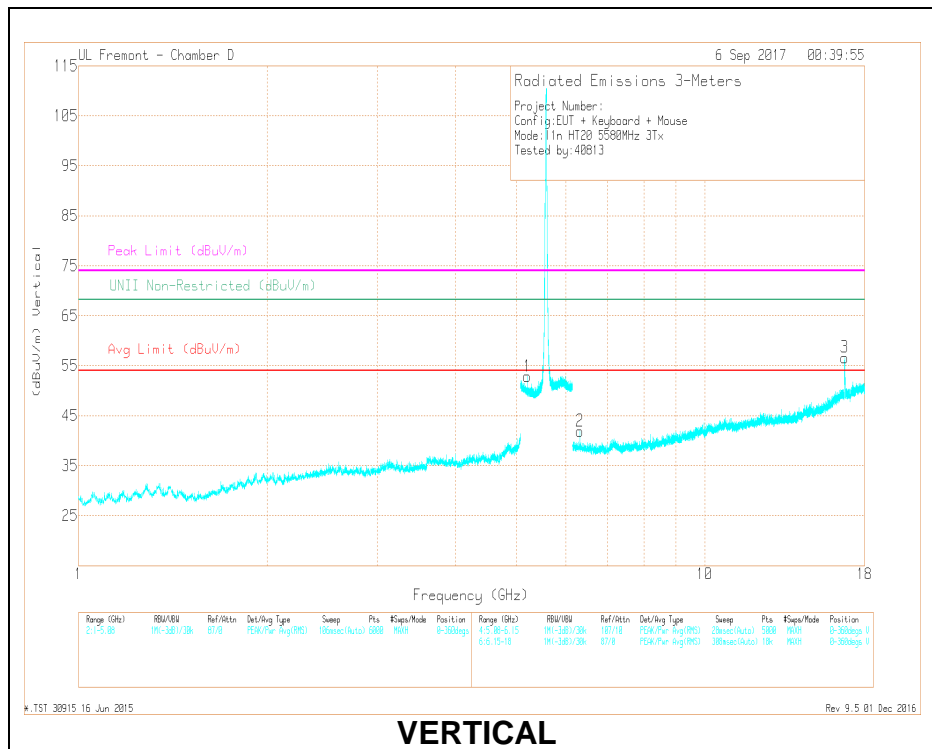

VERTICAL

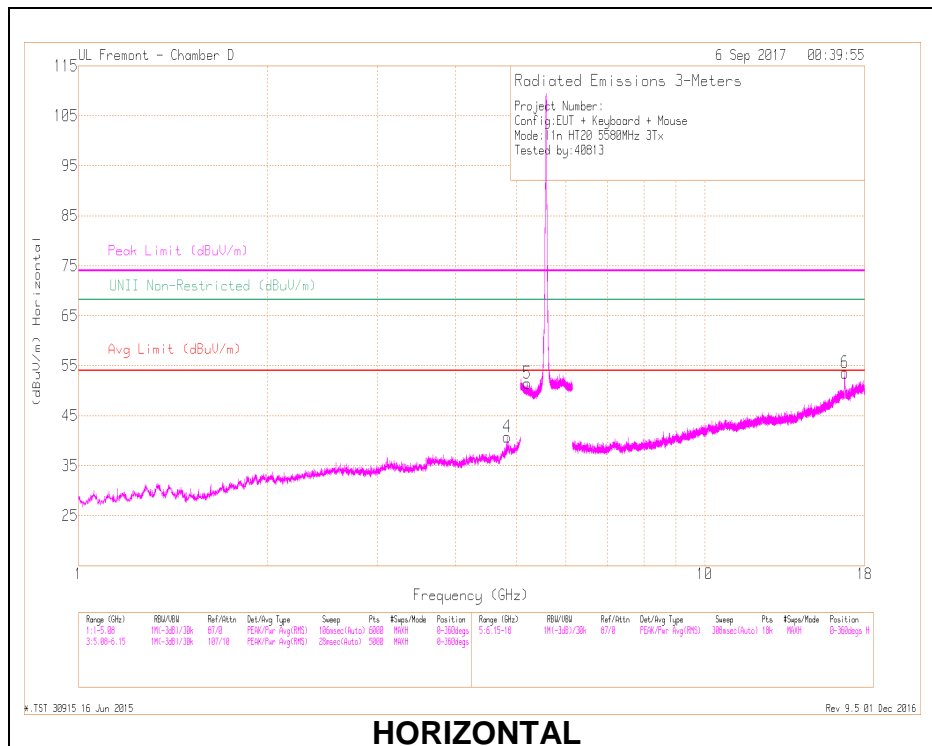

HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 4.824	39.1	PK-U	34	-27	0	46.1	-	-	74	-27.9	-	-	231	197	H
	* 4.836	29.36	ADR	34	-26.4	.23	37.19	54	-16.81	-	-	-	-	231	197	H
5	5.201	41.9	PK-U	34.2	-18.3	0	57.8	-	-	-	-	68.2	-10.4	250	199	H
1	5.208	42.87	PK-U	34.2	-18.2	0	58.87	-	-	-	-	68.2	-9.33	222	203	V
2	6.324	37.84	PK-U	35.4	-25.8	0	47.44	-	-	-	-	68.2	-20.76	219	171	V
3	16.736	41.94	PK-U	41.7	-18.3	0	65.34	-	-	-	-	68.2	-2.86	234	126	V
6	16.739	39.29	PK-U	41.7	-18.3	0	62.69	-	-	-	-	68.2	-5.51	212	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

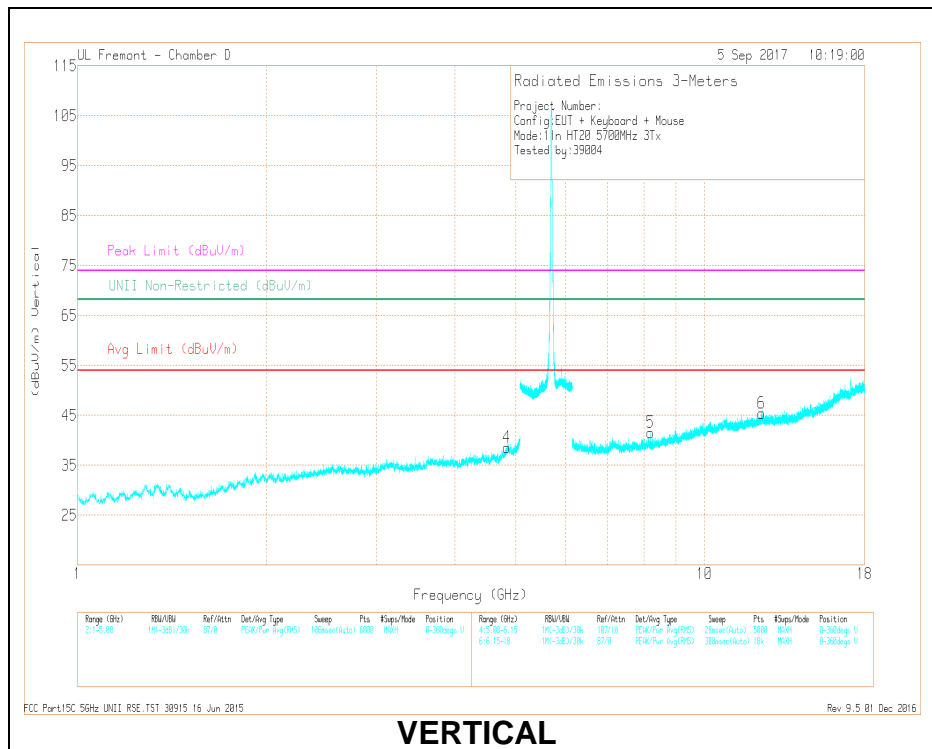

VERTICAL

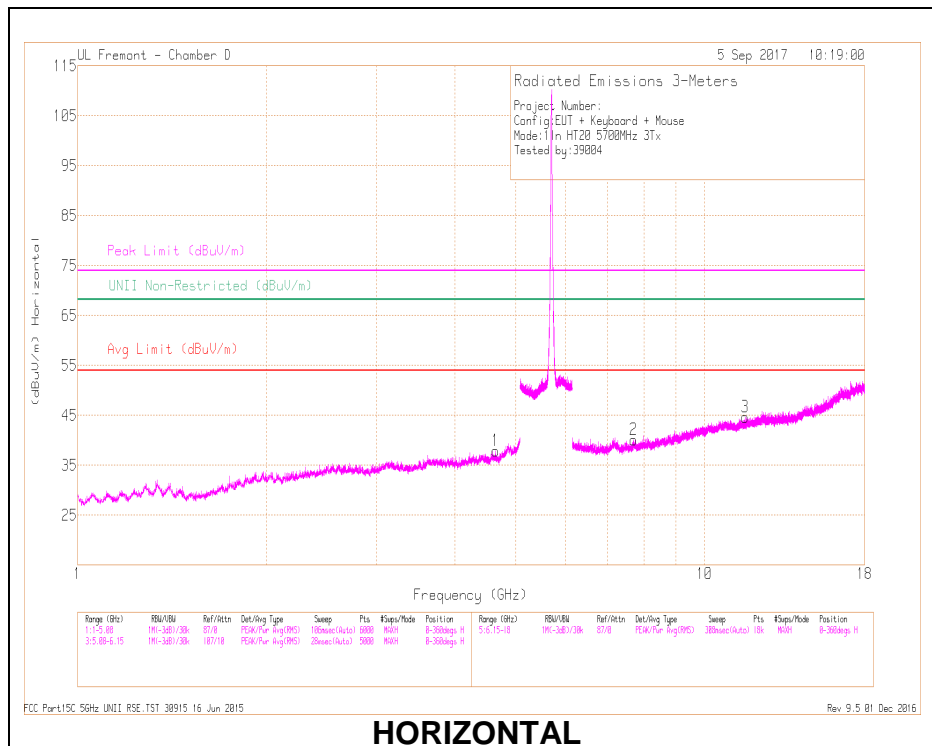

HORIZONTAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.645	38.31	PK-U	33.8	-27.3	0	44.81	-	-	74	-29.19	-	-	201	210	H
	* 4.644	27.12	ADR	33.8	-27.3	.23	33.85	54	-20.15	-	-	-	-	201	210	H
4	* 4.841	36.84	PK-U	34	-26.2	0	44.64	-	-	74	-29.36	-	-	91	197	V
	* 4.843	25.6	ADR	34	-26.1	.23	33.73	54	-20.27	-	-	-	-	91	197	V
2	* 7.71	35.65	PK-U	35.6	-24.2	0	47.05	-	-	74	-26.95	-	-	21	323	H
	* 7.708	23.88	ADR	35.6	-24.2	.23	35.51	54	-18.49	-	-	-	-	21	323	H
3	* 11.614	34.29	PK-U	38.1	-21.3	0	51.09	-	-	74	-22.91	-	-	274	259	H
	* 11.614	22.32	ADR	38.1	-21.2	.23	39.45	54	-14.55	-	-	-	-	274	259	H
5	* 8.204	35.65	PK-U	35.7	-24.5	0	46.85	-	-	74	-27.15	-	-	171	354	V
	* 8.207	23.87	ADR	35.7	-24.5	.23	35.3	54	-18.7	-	-	-	-	171	354	V
6	* 12.334	34.96	PK-U	38.8	-21.3	0	52.46	-	-	74	-21.54	-	-	3	399	V
	* 12.331	22.85	ADR	38.8	-21.5	.23	40.38	54	-13.62	-	-	-	-	3	399	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

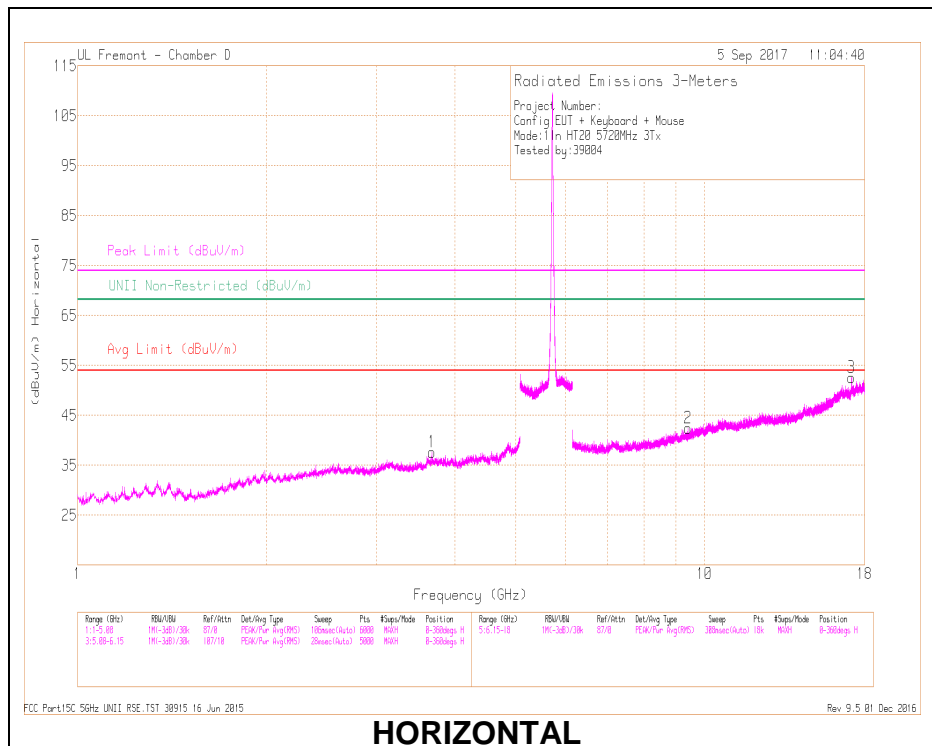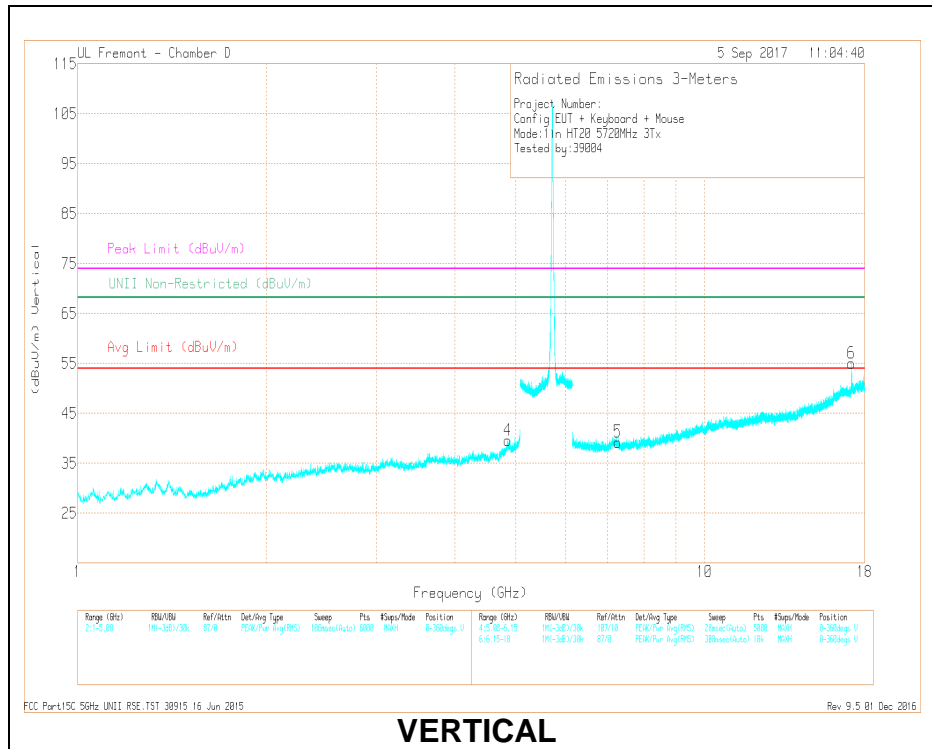

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.672	38.17	PK-U	33.1	-29.2	0	42.07	-	-	74	-31.93	-	-	202	114	H
	* 3.672	26.86	ADR	33.1	-29.2	.23	30.99	54	-23.01	-	-	-	-	202	114	H
4	* 4.852	37.42	PK-U	34	-25.8	0	45.62	-	-	74	-28.38	-	-	238	377	V
	* 4.854	25.61	ADR	34	-25.8	.23	34.04	54	-19.96	-	-	-	-	238	377	V
2	* 9.409	34.11	PK-U	36.3	-22	0	48.41	-	-	74	-25.59	-	-	99	223	H
	* 9.408	22.48	ADR	36.3	-22	.23	37.01	54	-16.99	-	-	-	-	99	223	H
5	* 7.272	35.93	PK-U	35.5	-24.8	0	46.63	-	-	74	-27.37	-	-	325	162	V
	* 7.275	24.5	ADR	35.5	-24.8	.23	35.43	54	-18.57	-	-	-	-	325	162	V
6	17.161	37.31	PK-U	41.4	-17.3	0	61.41	-	-	-	-	68.2	-6.79	211	107	V
3	17.164	37.53	PK-U	41.4	-17.3	0	61.63	-	-	-	-	68.2	-6.57	187	242	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 SDM Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

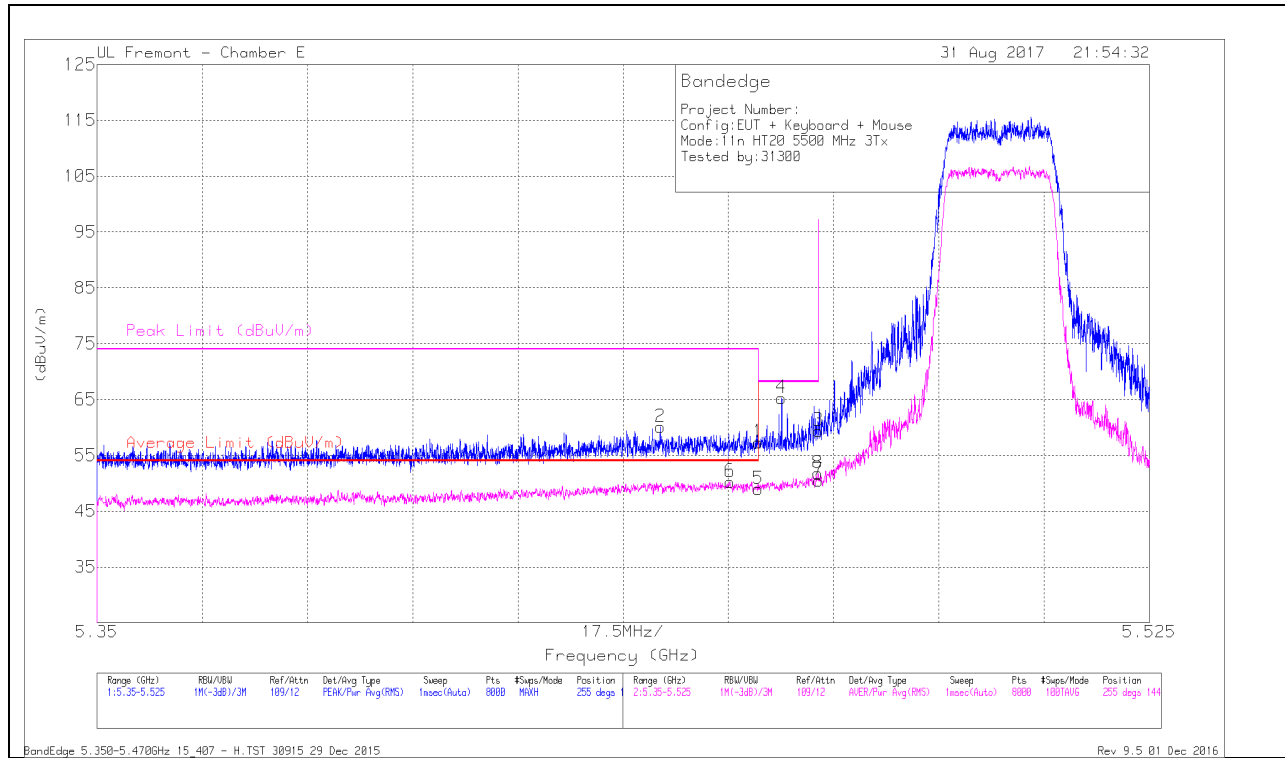


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.444	43.89	Pk	35.1	-18.9	0	60.09	-	-	74	-13.91	255	144	H
6	* 5.455	33.82	RMS	35.1	-18.9	.26	50.28	54	-3.72	-	-	255	144	H
1	* 5.46	41.13	Pk	35.1	-18.9	0	57.33	-	-	74	-16.67	255	144	H
5	* 5.46	32.55	RMS	35.1	-18.9	.26	49.01	54	-4.99	-	-	255	144	H
4	5.464	49.08	Pk	35.1	-18.9	0	65.28	-	-	68.2	-2.92	255	144	H
3	5.47	43.21	Pk	35.1	-18.9	0	59.41	-	-	68.2	-8.79	255	144	H
7	5.47	34.06	RMS	35.1	-18.9	.26	50.52	-	-	-	-	255	144	H
8	5.47	35.36	RMS	35.1	-18.9	.26	51.82	-	-	-	-	255	144	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

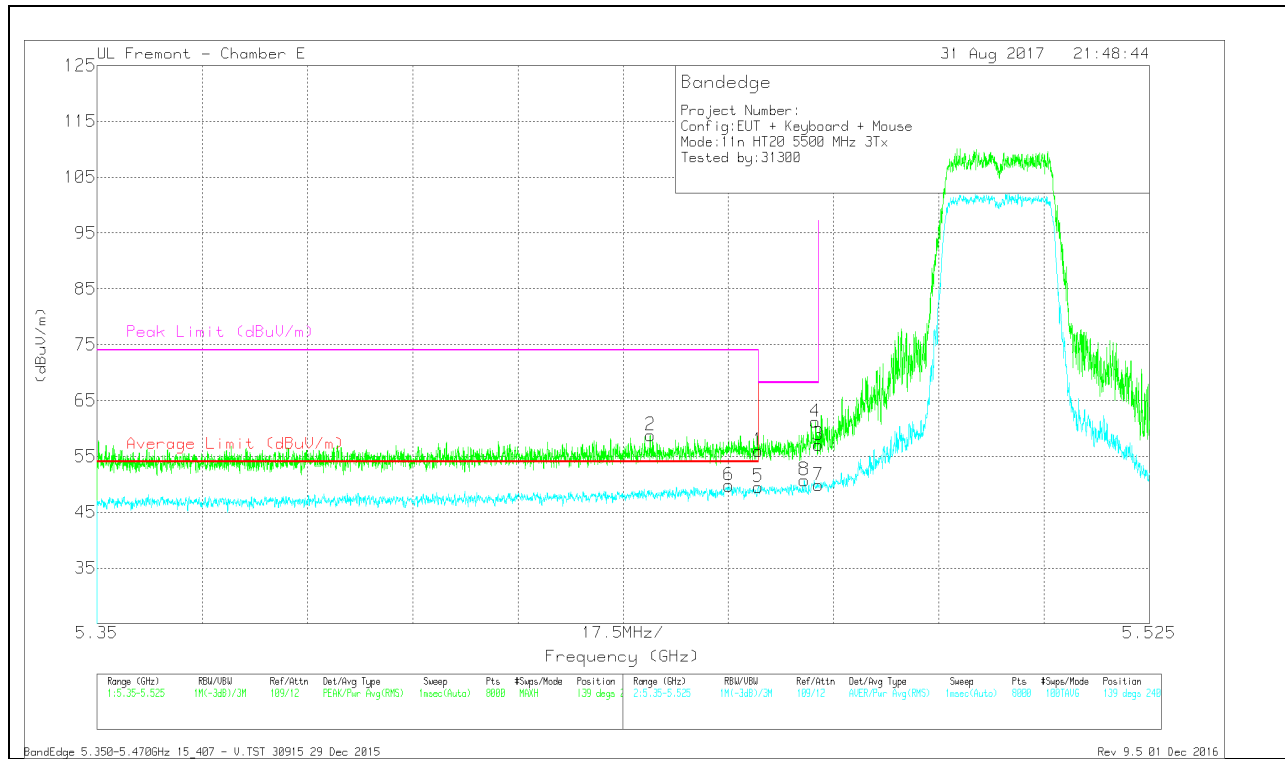


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.442	42.57	Pk	35.1	-18.9	0	58.77	-	-	74	-15.23	139	240	V
6	* 5.455	33.36	RMS	35.1	-18.9	.26	49.82	54	-4.18	-	-	139	240	V
1	* 5.46	39.8	Pk	35.1	-18.9	0	56	-	-	74	-18	139	240	V
5	* 5.46	33.08	RMS	35.1	-18.9	.26	49.54	54	-4.46	-	-	139	240	V
8	5.468	34.3	RMS	35.1	-18.9	.26	50.76	-	-	-	-	139	240	V
4	5.469	45	Pk	35.1	-18.9	0	61.2	-	-	68.2	-7	139	240	V
3	5.47	40.86	Pk	35.1	-18.9	0	57.06	-	-	68.2	-11.14	139	240	V
7	5.47	33.42	RMS	35.1	-18.9	.26	49.88	-	-	-	-	139	240	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

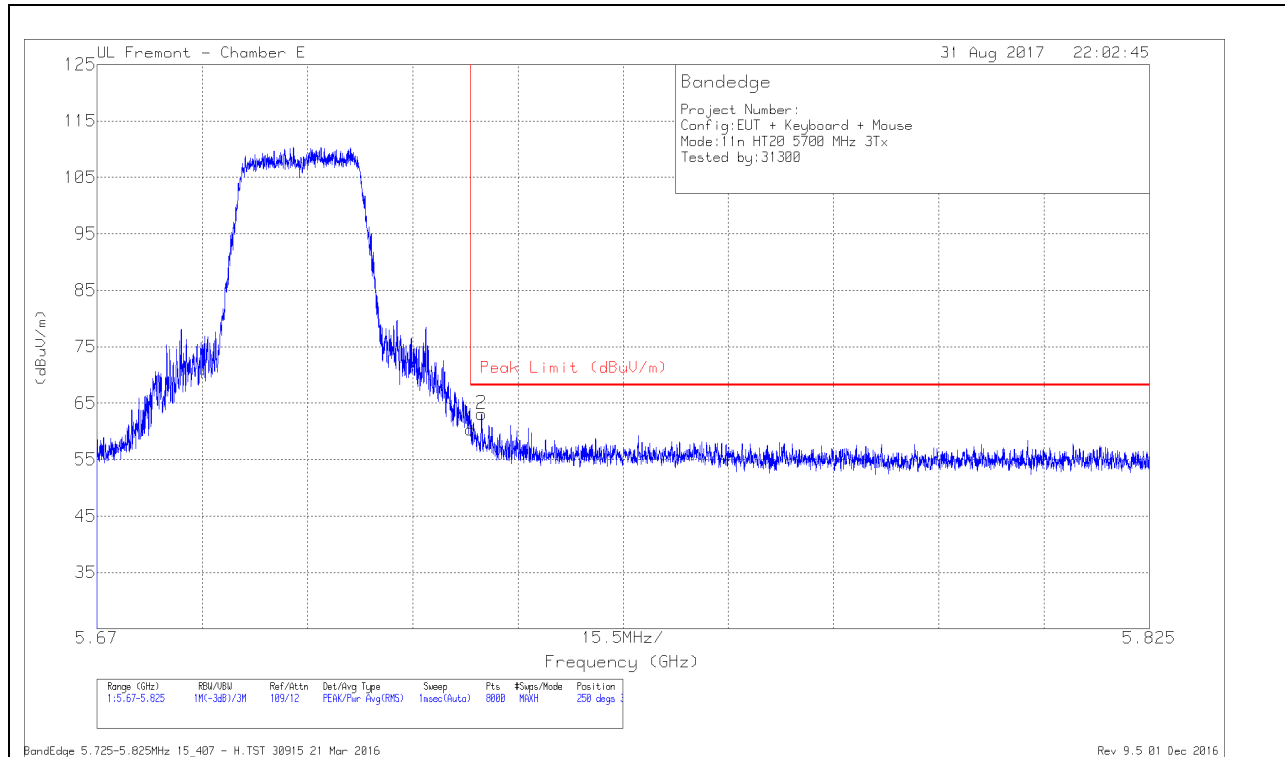

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.35	Pk	35.1	-19.1	0	60.35	68.2	-7.85	250	384	H
2	5.727	47.13	Pk	35.1	-19.1	0	63.13	68.2	-5.07	250	384	H

Pk - Peak detector

VERTICAL RESULT

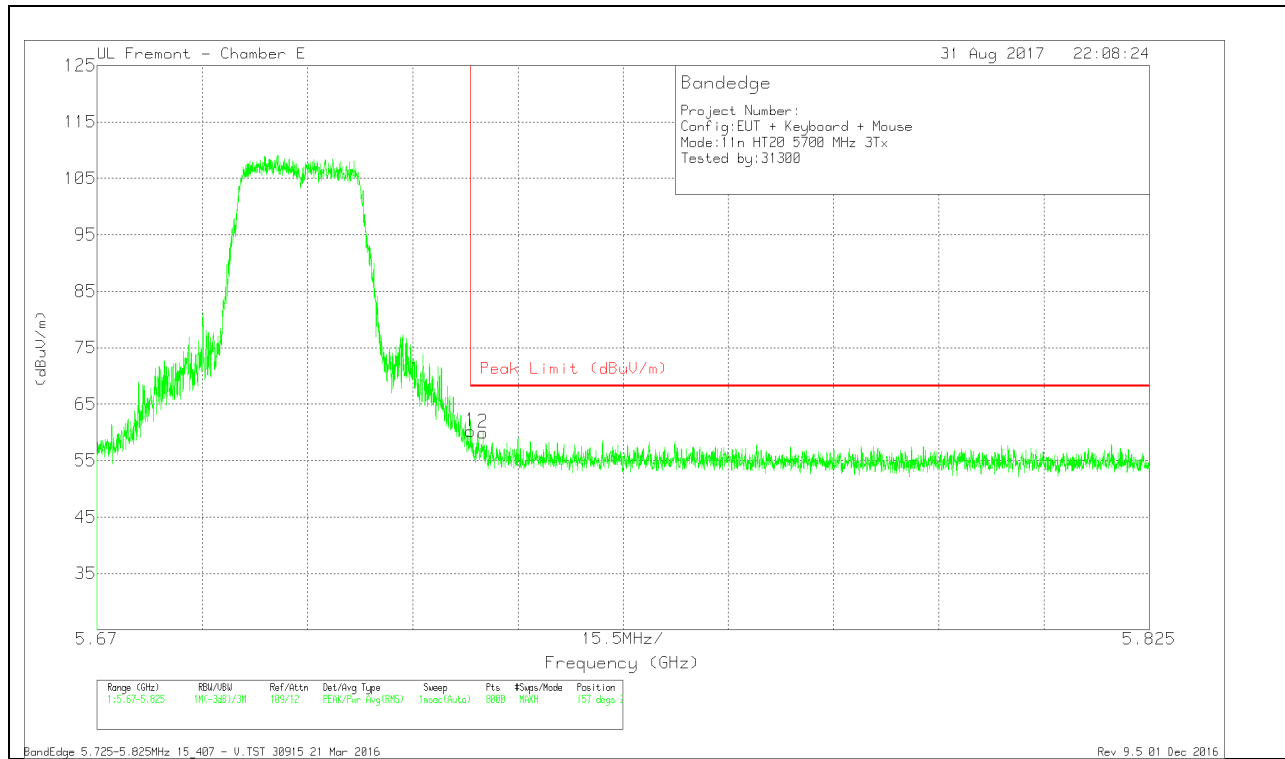


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.23	PK	35.1	-19.1	0	60.23	68.2	-7.97	157	295	V
2	5.727	43.98	PK	35.1	-19.1	0	59.98	68.2	-8.22	157	295	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

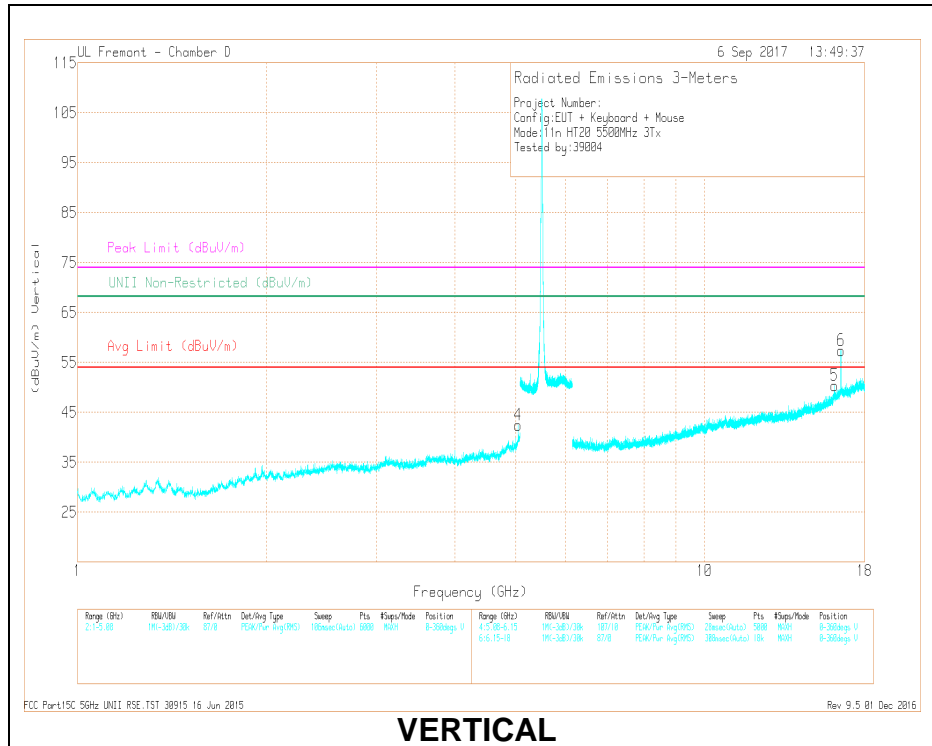

VERTICAL

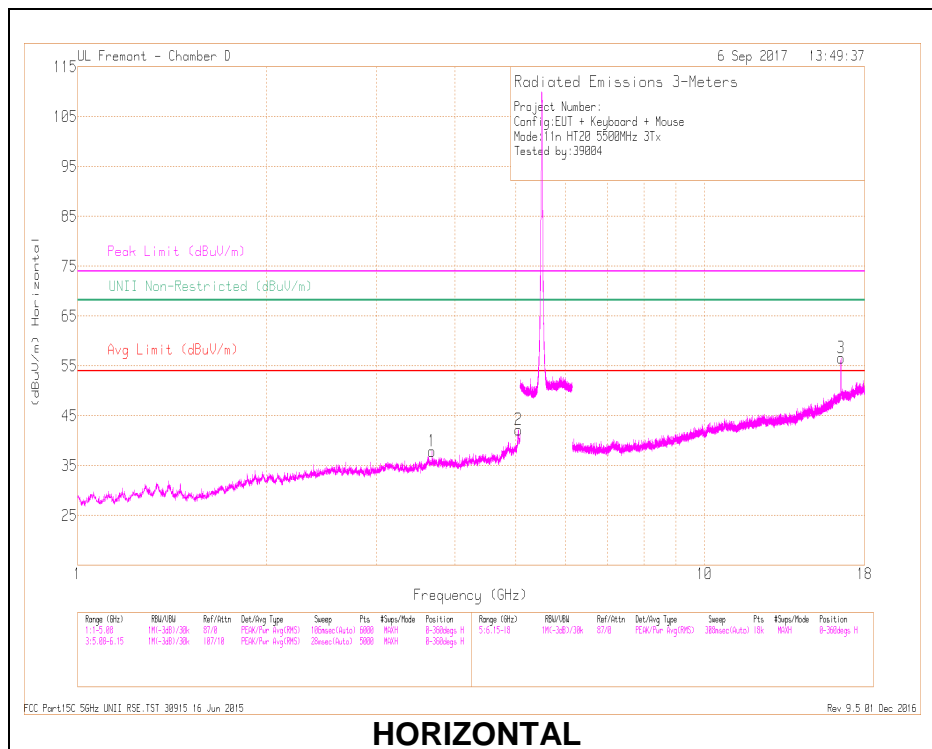

HORIZONTAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.671	38.12	PK-U	33.1	-29.2	0	42.02	-	-	74	-31.98	-	-	315	222	H
	* 3.674	26.79	ADR	33.1	-29.2	.26	30.95	54	-23.05	-	-	-	-	315	222	H
2	* 5.045	40.11	PK-U	34.1	-25.6	0	48.61	-	-	74	-25.39	-	-	45	286	H
	* 5.048	28.17	ADR	34.1	-25.6	.26	36.93	54	-17.07	-	-	-	-	45	286	H
4	* 5.042	40.37	PK-U	34.1	-25.7	0	48.77	-	-	74	-25.23	-	-	253	225	V
	* 5.042	30.96	ADR	34.1	-25.7	.26	39.62	54	-14.38	-	-	-	-	253	225	V
5	* 16.128	34.2	PK-U	41.1	-19.1	0	56.2	-	-	74	-17.8	-	-	159	362	V
	* 16.129	22.67	ADR	41.1	-19.1	.26	44.93	54	-9.07	-	-	-	-	159	362	V
3	16.5	37.87	PK-U	41.6	-18.2	0	61.27	-	-	-	-	68.2	-6.93	178	256	H
6	16.501	35.22	PK-U	41.6	-18.2	0	58.62	-	-	-	-	68.2	-9.58	156	242	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

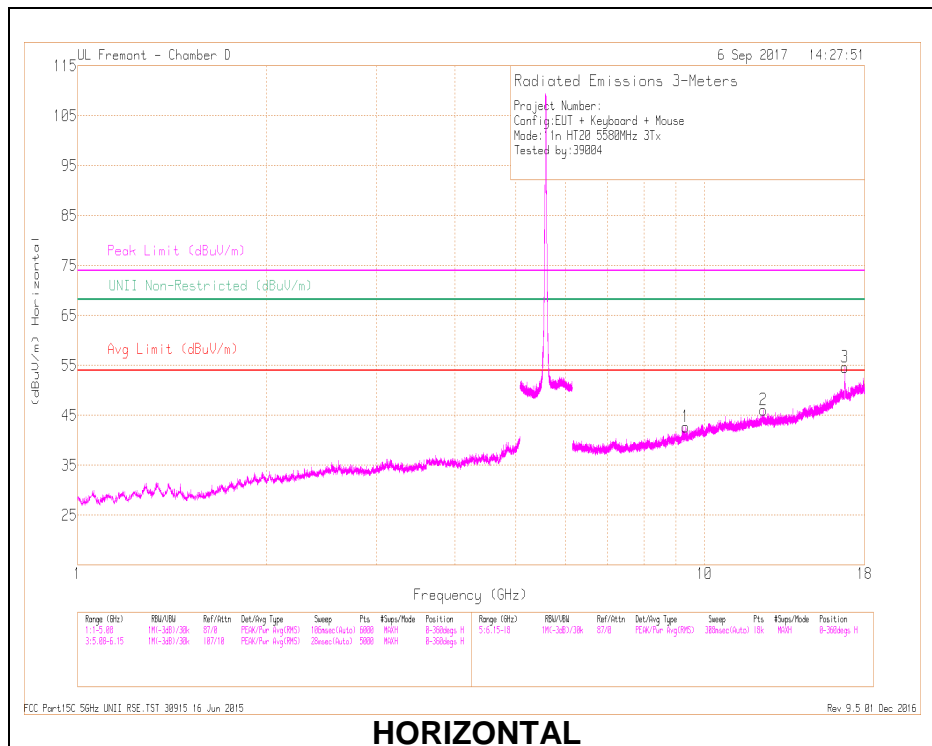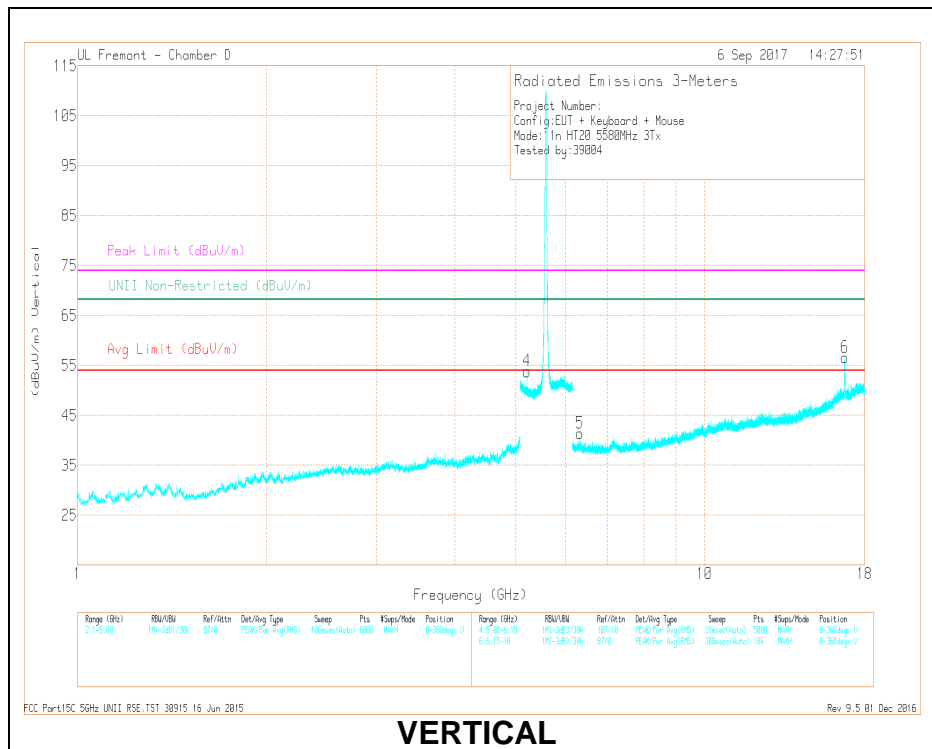

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 9.328	34.63	PK-U	36.3	-22	0	48.93	-	-	74	-25.07	-	-	214	397	H
	* 9.331	22.68	ADR	36.3	-22	.26	37.24	54	-16.76	-	-	-	-	214	397	H
2	* 12.405	34.51	PK-U	38.9	-21	0	52.41	-	-	74	-21.59	-	-	115	233	H
	* 12.406	22.59	ADR	38.9	-21	.26	40.75	54	-13.25	-	-	-	-	115	233	H
4	5.206	41.88	PK-U	34.2	-18.2	0	57.88	-	-	-	-	68.2	-10.32	90	216	V
5	6.324	38.6	PK-U	35.4	-25.8	0	48.2	-	-	-	-	68.2	-20	219	121	V
3	16.731	33.55	PK-U	41.7	-18.4	0	56.85	-	-	-	-	68.2	-11.35	60	274	H
6	16.742	33.92	PK-U	41.7	-18.3	0	57.32	-	-	-	-	68.2	-10.88	197	124	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

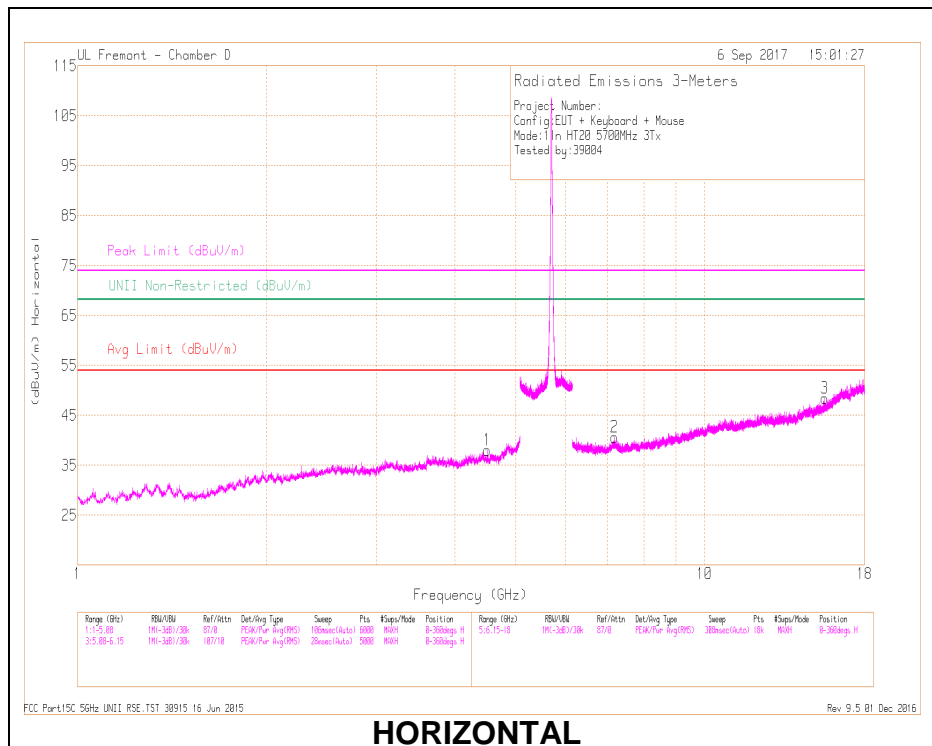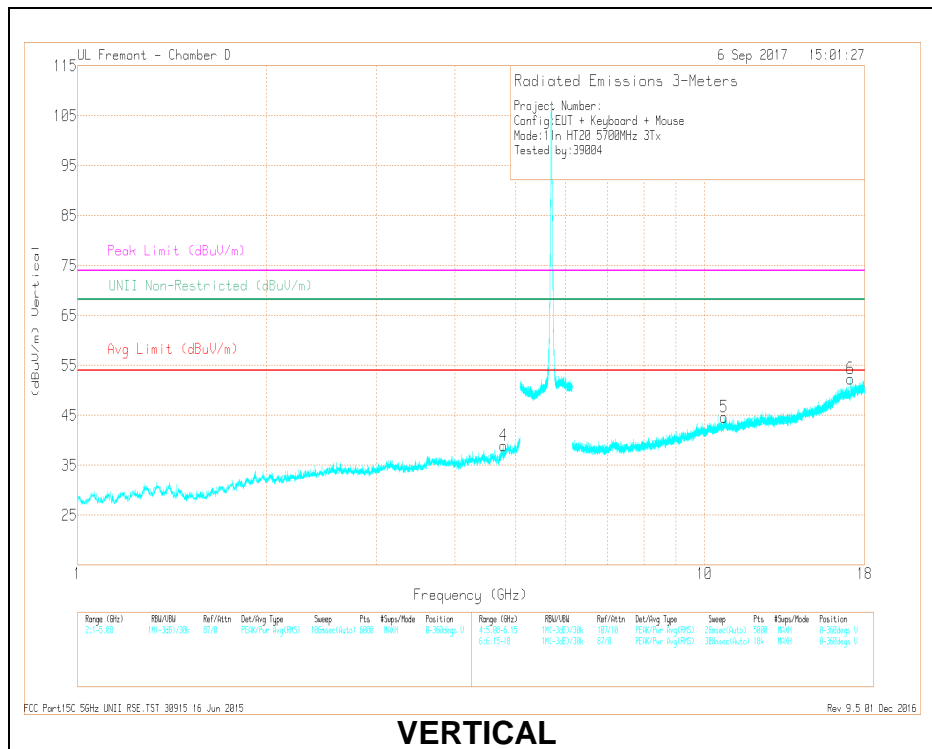

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.783	38.52	PK-U	33.9	-27.6	0	44.82	-	-	74	-29.18	-	-	242	308	V
	* 4.784	26.86	ADR	33.9	-27.6	.26	33.42	54	-20.58	-	-	-	-	242	308	V
4	* 15.544	35.02	PK-U	40.3	-20.6	0	54.72	-	-	74	-19.28	-	-	125	284	H
	* 15.542	22.94	ADR	40.3	-20.6	.26	42.9	54	-11.1	-	-	-	-	125	284	H
5	* 10.737	34.73	PK-U	37.9	-21.1	0	51.53	-	-	74	-22.47	-	-	95	290	V
	* 10.737	22.23	ADR	37.9	-21.1	.26	39.29	54	-14.71	-	-	-	-	95	290	V
1	4.5	38.73	PK-U	33.6	-28.5	0	43.83	-	-	-	-	68.2	-24.37	35	204	H
2	7.188	35.7	PK-U	35.5	-23.8	0	47.4	-	-	-	-	68.2	-20.8	105	254	H
6	17.103	35.24	PK-U	41.4	-17.9	0	58.74	-	-	-	-	68.2	-9.46	221	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

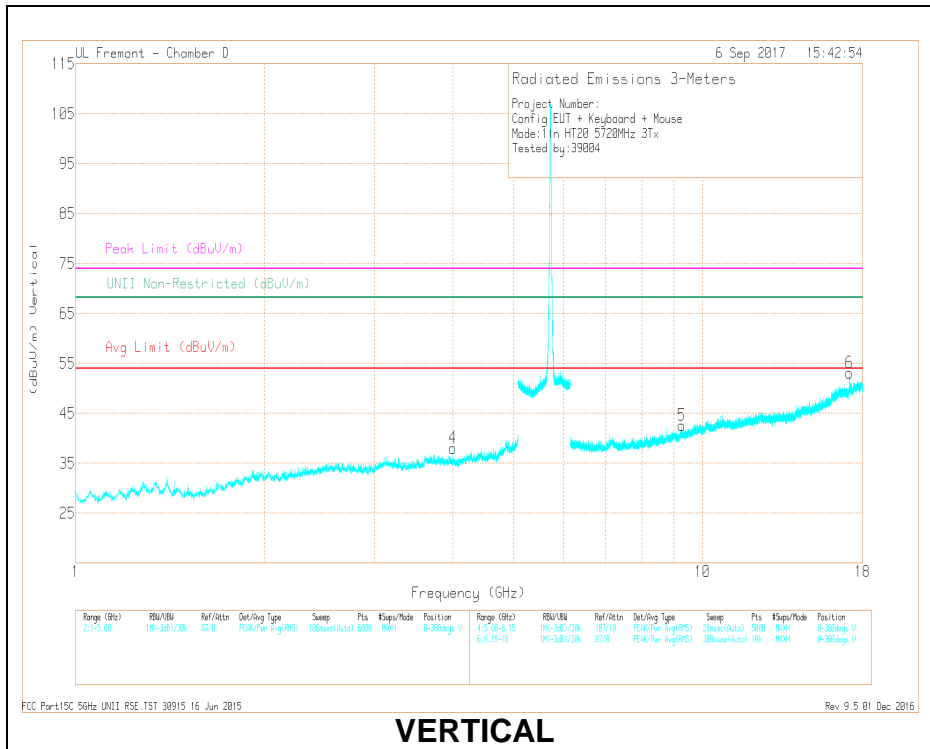

VERTICAL

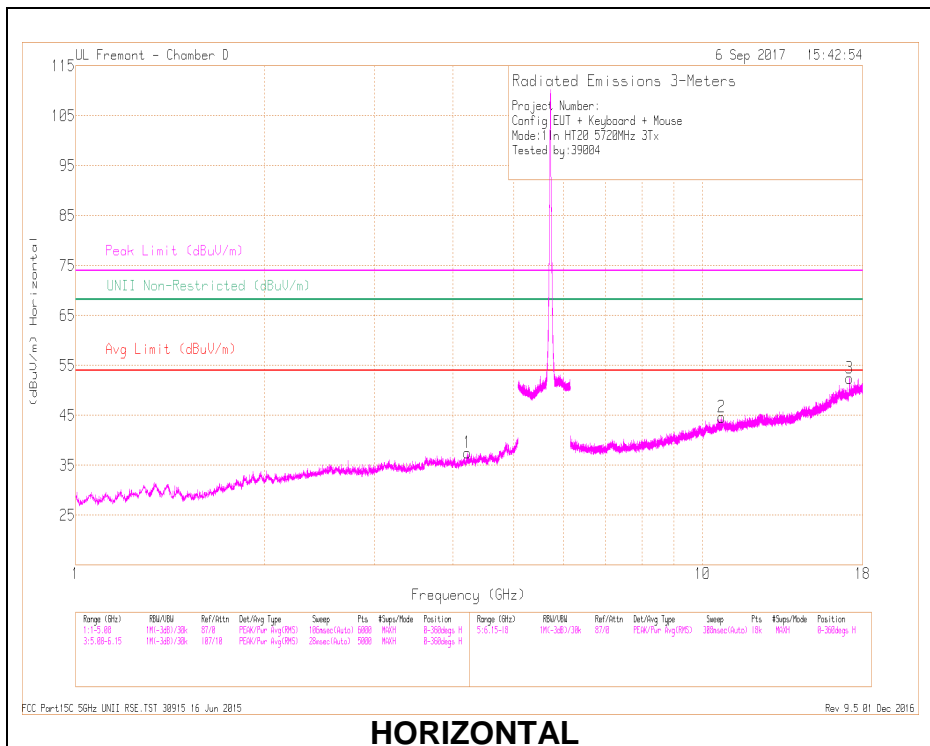

HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.216	38.16	PK-U	33.3	-27.8	0	43.66	-	-	74	-30.34	-	-	128	306	H
	* 4.217	26.1	ADR	33.3	-27.8	.26	31.86	54	-22.14	-	-	-	-	128	306	H
4	* 4	38.66	PK-U	33.4	-28.2	0	43.86	-	-	74	-30.14	-	-	252	102	V
	* 4	27.8	ADR	33.4	-28.2	.26	33.26	54	-20.74	-	-	-	-	252	102	V
2	* 10.732	34.06	PK-U	37.9	-21.2	0	50.76	-	-	74	-23.24	-	-	256	185	H
	* 10.73	22.33	ADR	37.9	-21.3	.26	39.19	54	-14.81	-	-	-	-	256	185	H
5	9.274	34.46	PK-U	36.2	-21.5	0	49.16	-	-	-	-	68.2	-19.04	91	134	V
3	17.158	37.6	PK-U	41.4	-17.4	0	61.6	-	-	-	-	68.2	-6.6	222	115	V
6	17.159	34.95	PK-U	41.4	-17.4	0	58.95	-	-	-	-	68.2	-9.25	177	325	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 BF Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

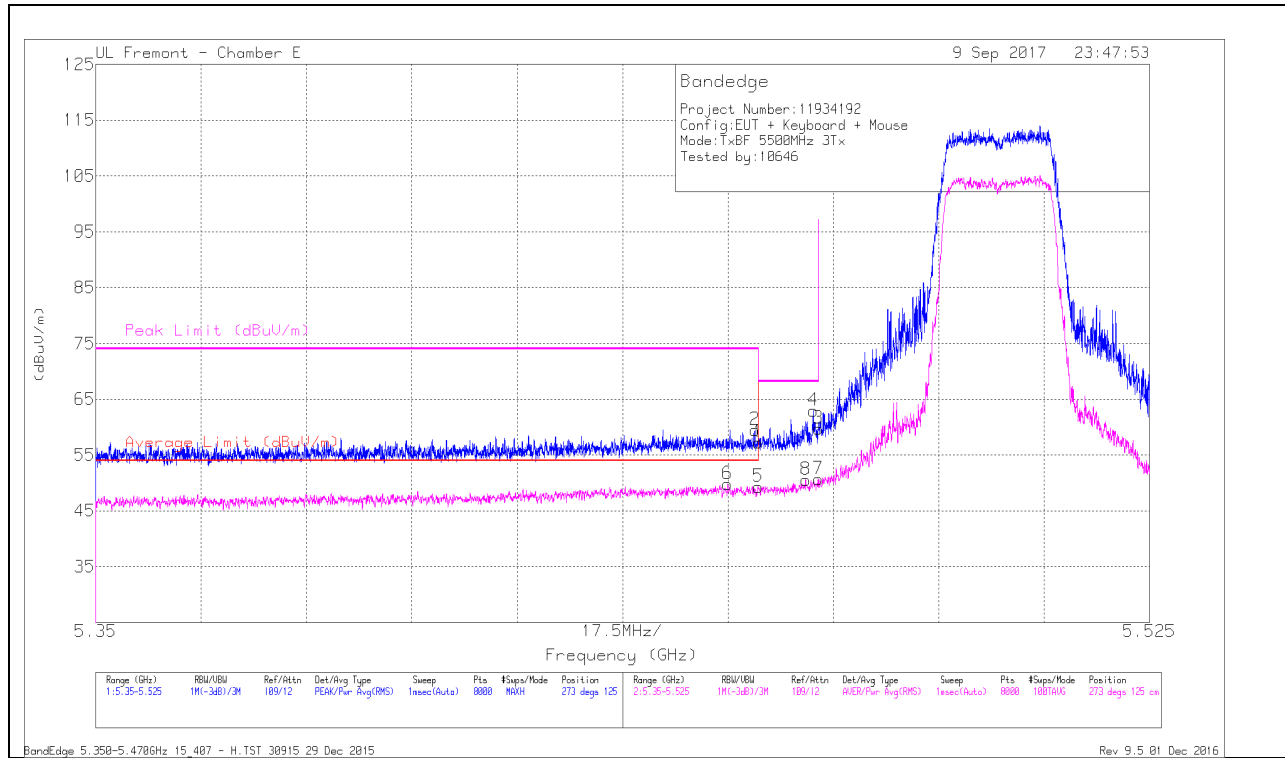


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.08	Pk	35.1	-18.9	0	57.28	-	-	74	-16.72	273	125	H
2	* 5.459	43.3	Pk	35.1	-18.9	0	59.5	-	-	74	-14.5	273	125	H
5	* 5.46	32.84	RMS	35.1	-18.9	.12	49.31	54	-4.84	-	-	273	125	H
6	* 5.455	33.28	RMS	35.1	-18.9	.12	49.75	54	-4.40	-	-	273	125	H
8	5.468	34.12	RMS	35.1	-18.9	.12	50.59	-	-	-	-	273	125	H
4	5.469	46.7	Pk	35.1	-18.9	0	62.9	-	-	68.2	-5.3	273	125	H
3	5.47	43.5	Pk	35.1	-18.9	0	59.7	-	-	68.2	-8.5	273	125	H
7	5.47	34.23	RMS	35.1	-18.9	.12	50.7	-	-	-	-	273	125	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

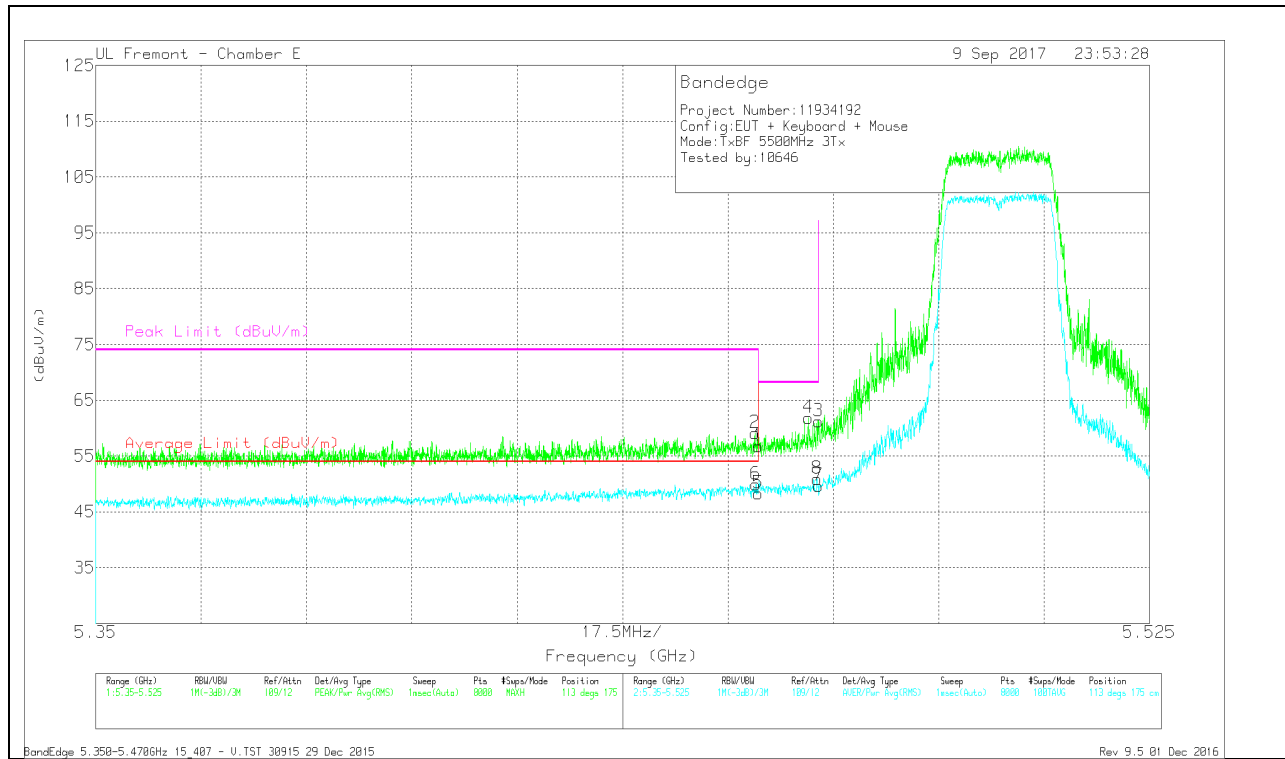


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.52	Pk	35.1	-18.9	0	56.72	-	-	74	-17.28	113	175	V
2	* 5.459	42.87	Pk	35.1	-18.9	0	59.07	-	-	74	-14.93	113	175	V
5	* 5.46	31.81	RMS	35.1	-18.9	.12	48.28	54	-5.87	-	-	113	175	V
6	* 5.46	33.43	RMS	35.1	-18.9	.12	49.9	54	-4.25	-	-	113	175	V
4	5.468	45.67	Pk	35.1	-18.9	0	61.87	-	-	68.2	-6.33	113	175	V
3	5.47	45.04	Pk	35.1	-18.9	0	61.24	-	-	68.2	-6.96	113	175	V
7	5.47	33.22	RMS	35.1	-18.9	.12	49.69	-	-	-	-	113	175	V
8	5.47	34.45	RMS	35.1	-18.9	.12	50.92	-	-	-	-	113	175	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

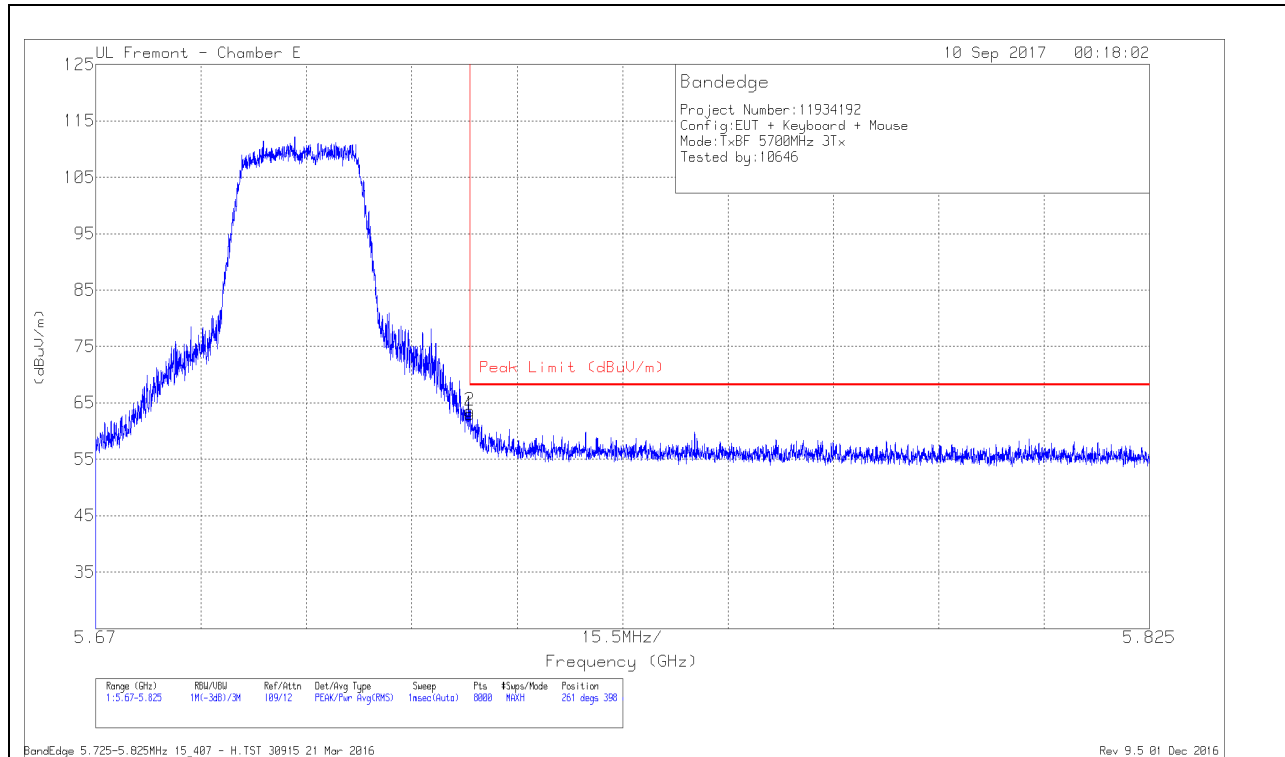

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	47.04	Pk	35.1	-19.1	0	63.04	68.2	-5.16	261	398	H
2	5.725	47.62	Pk	35.1	-19.1	0	63.62	68.2	-4.58	261	398	H

Pk - Peak detector

VERTICAL RESULT

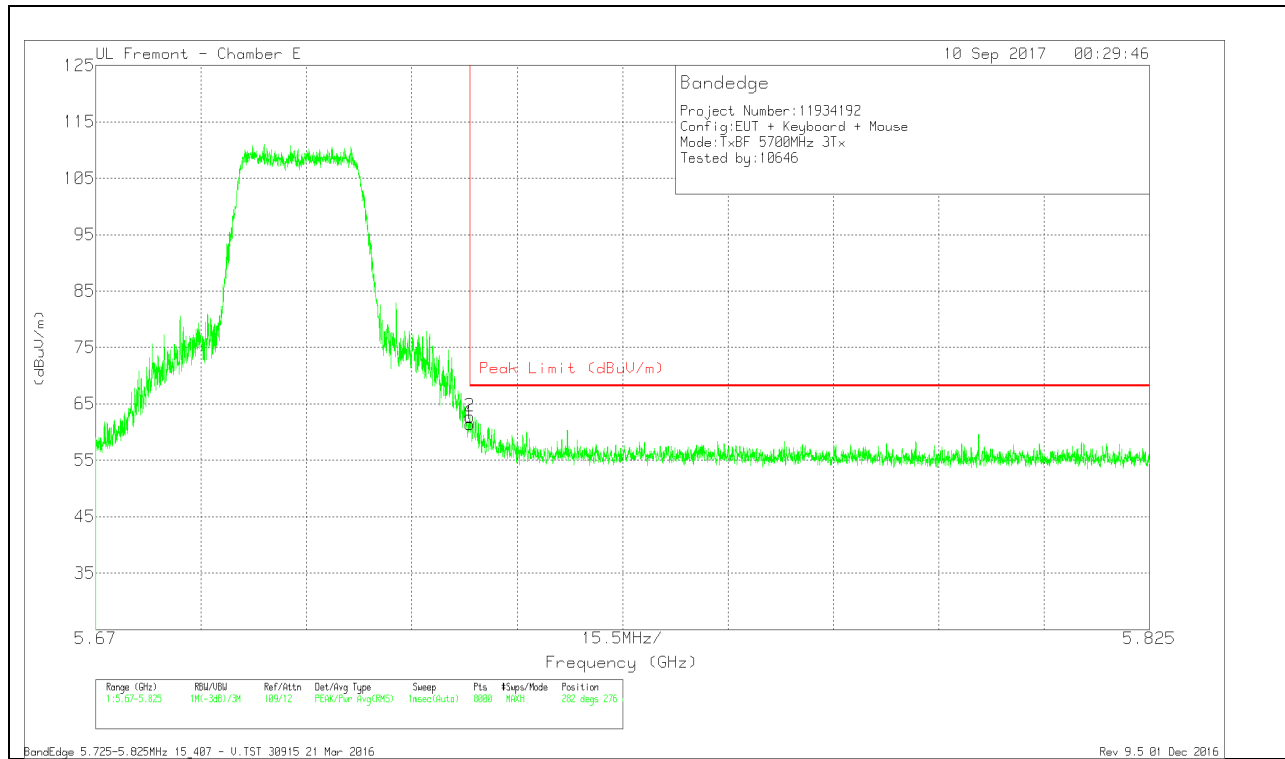


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.41	Pk	35.1	-19.1	0	61.41	68.2	-6.79	282	276	V
2	5.725	46.77	Pk	35.1	-19.1	0	62.77	68.2	-5.43	282	276	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

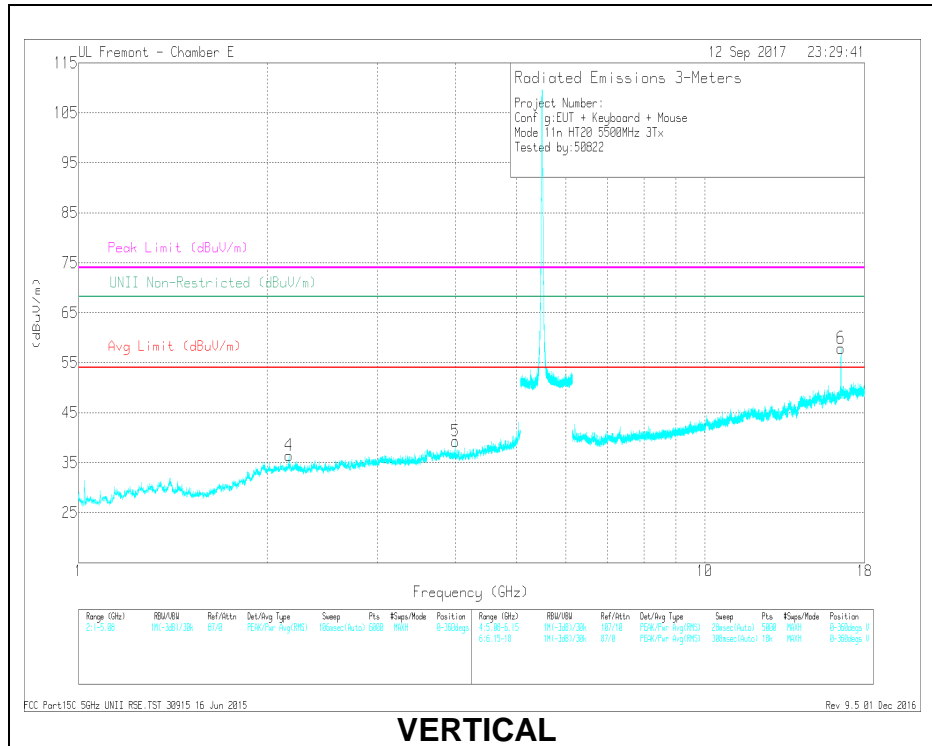

VERTICAL

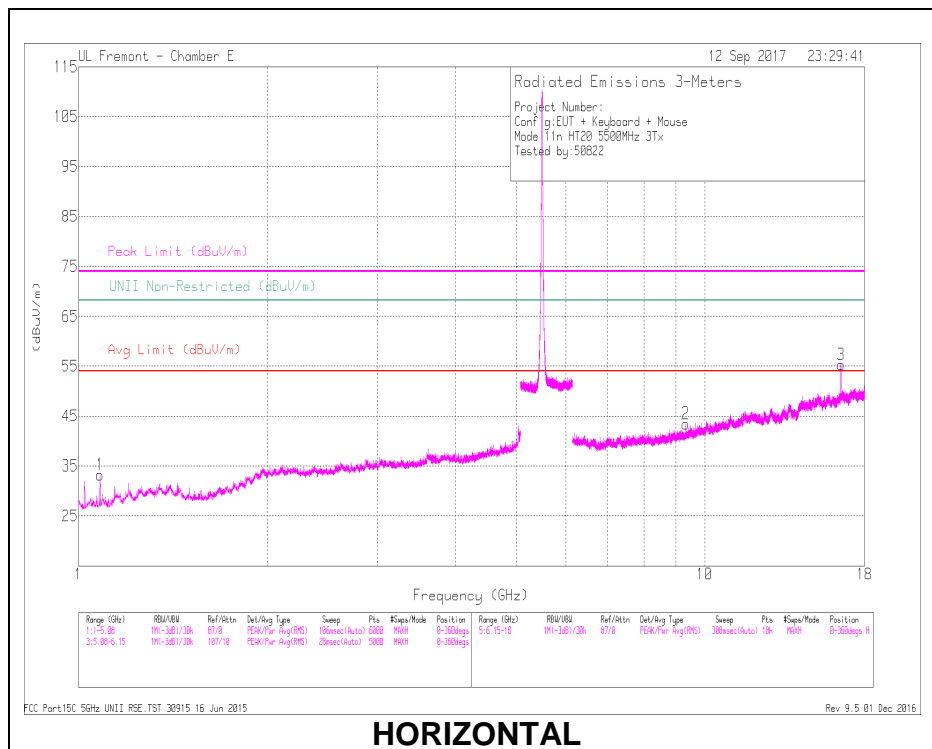


HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.083	48.34	PK-U	26.4	-35.7	0	39.04	-	-	74	-34.96	-	-	24	101	H
	* 1.083	41	ADR	26.4	-35.7	.12	31.82	54	-22.18	-	-	-	-	24	101	H
5	* 4	43.21	PK-U	33.7	-29.5	0	47.41	-	-	74	-26.59	-	-	168	194	V
	* 4	34.29	ADR	33.7	-29.5	.12	38.61	54	-15.39	-	-	-	-	168	194	V
2	* 9.324	37.58	PK-U	37.2	-25.3	0	49.48	-	-	74	-24.52	-	-	349	361	H
	* 9.326	25.84	ADR	37.2	-25.3	.12	37.86	54	-16.14	-	-	-	-	349	361	H
4	2.167	42.68	PK-U	32.1	-32.3	0	42.48	-	-	-	-	68.2	-25.72	79	222	V
6	16.499	40.13	PK-U	41.1	-21.1	0	60.13	-	-	-	-	68.2	-8.07	156	262	V
3	16.502	39.96	PK-U	41.2	-21.1	0	60.06	-	-	-	-	68.2	-8.14	128	351	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

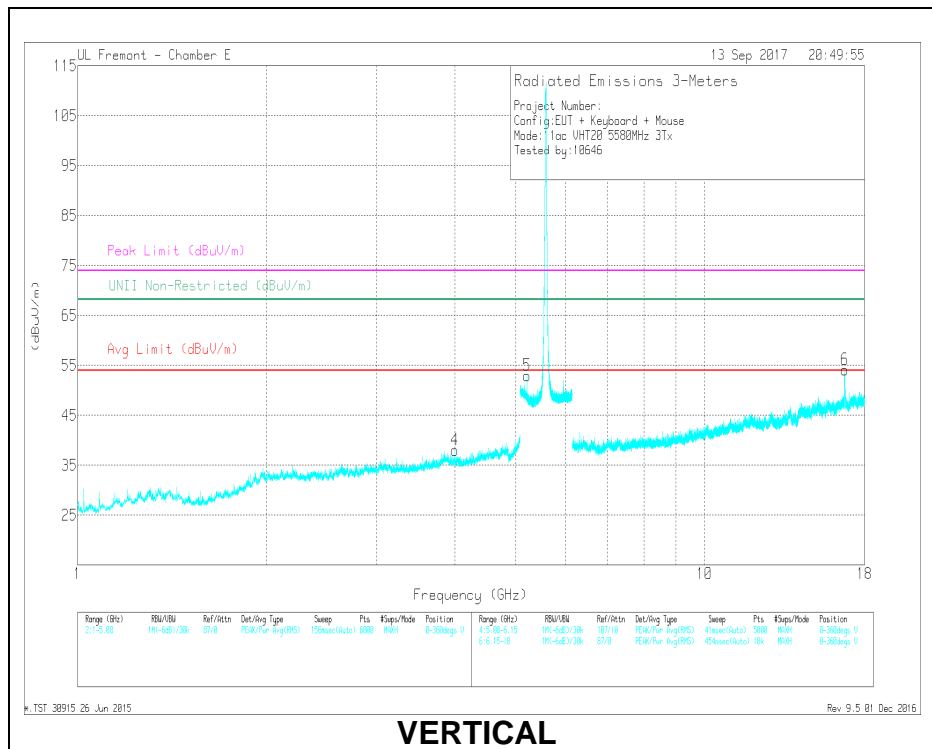

VERTICAL

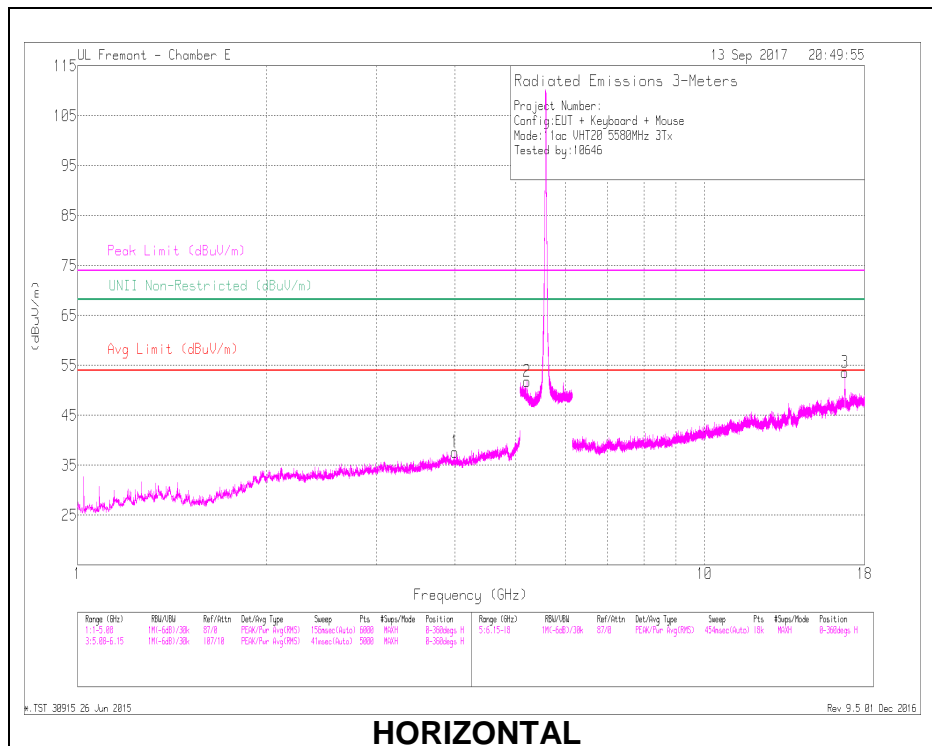


HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4	40.05	PK-U	33.7	-29.5	0	44.25	-	-	74	-29.75	-	-	90	101	H
	* 4	30.55	ADR	33.7	-29.5	.12	34.87	54	-19.13	-	-	-	-	90	101	H
4	* 4	42.63	PK-U	33.7	-29.5	0	46.83	-	-	74	-27.17	-	-	323	201	V
	* 4	32.17	ADR	33.7	-29.5	.12	36.49	54	-17.51	-	-	-	-	323	201	V
2	5.208	41.2	PK-U	34.9	-18.6	0	57.5	-	-	-	-	68.2	-10.7	356	179	H
5	5.208	43.1	PK-U	34.9	-18.6	0	59.4	-	-	-	-	68.2	-8.8	141	265	V
6	16.731	44.06	PK-U	41.7	-22.5	0	63.26	-	-	-	-	68.2	-4.94	205	257	V
3	16.741	42.6	PK-U	41.7	-22.3	0	62	-	-	-	-	68.2	-6.2	134	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

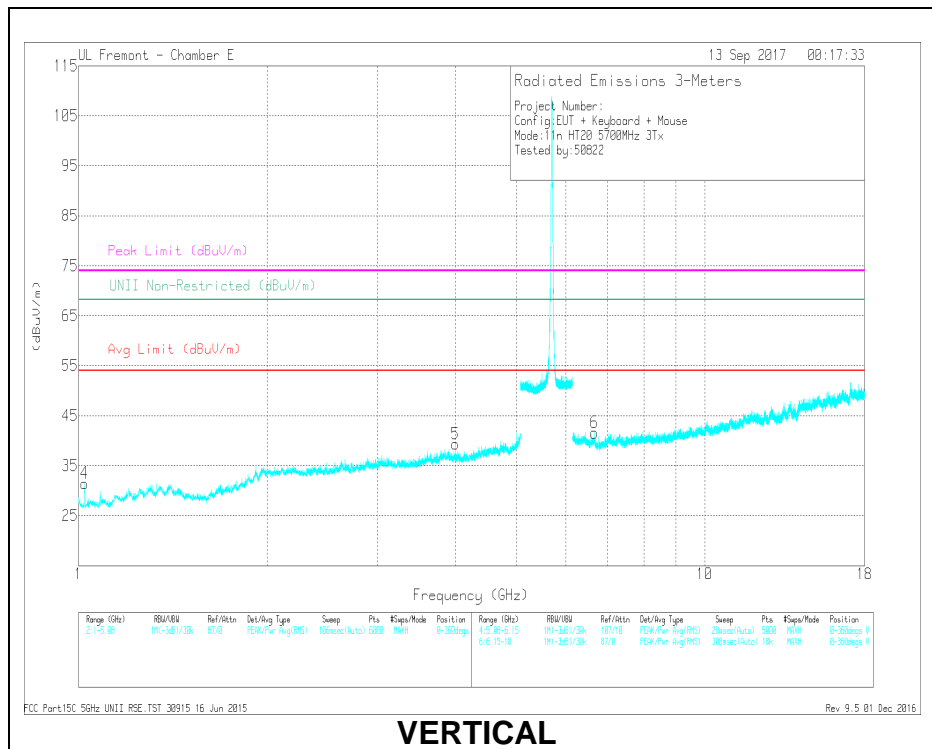

VERTICAL

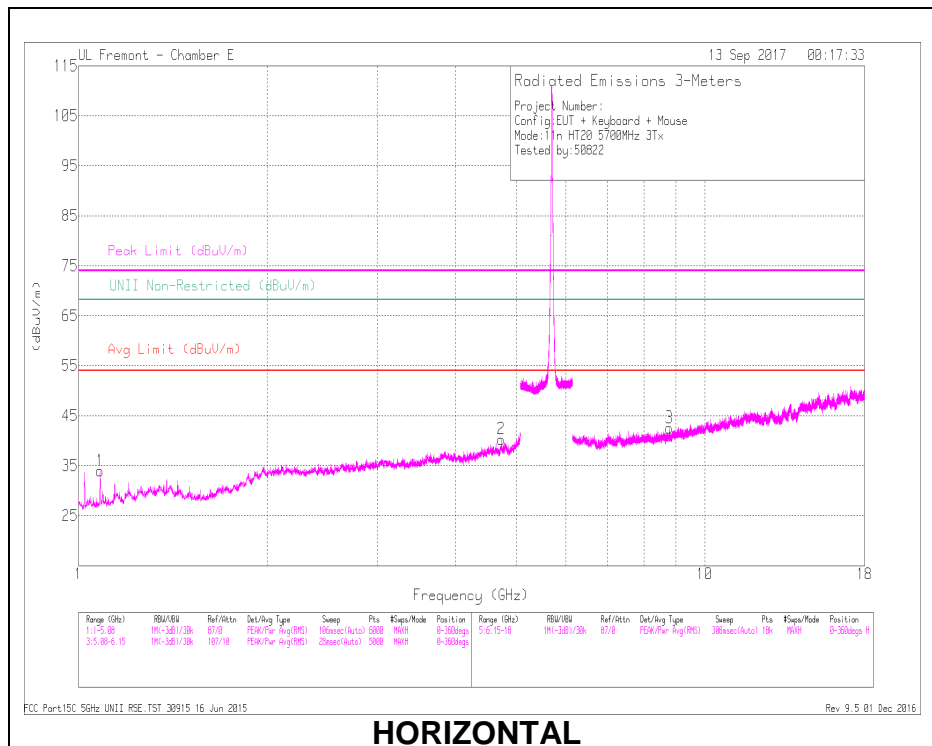

HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.083	46.61	PK-U	26.4	-35.7	0	37.31	-	-	74	-36.69	-	-	26	355	H
	* 1.083	36.27	ADR	26.4	-35.7	.12	27.09	54	-26.91	-	-	-	-	26	355	H
2	* 4.731	40.53	PK-U	34.4	-28.4	0	46.53	-	-	74	-27.47	-	-	352	270	H
	* 4.73	28.79	ADR	34.4	-28.4	.12	34.91	54	-19.09	-	-	-	-	352	270	H
4	* 1.023	46.38	PK-U	26.5	-35.8	0	37.08	-	-	74	-36.92	-	-	42	200	V
	* 1.023	34.93	ADR	26.5	-35.8	.12	25.75	54	-28.25	-	-	-	-	42	200	V
5	* 4	42.55	PK-U	33.7	-29.5	0	46.75	-	-	74	-27.25	-	-	169	295	V
	* 4	32.19	ADR	33.7	-29.5	.12	36.51	54	-17.49	-	-	-	-	169	295	V
6	6.667	38.82	PK-U	35.9	-26.6	0	48.12	-	-	-	-	68.2	-20.08	321	398	V
3	8.773	38.25	PK-U	36.7	-26	0	48.95	-	-	-	-	68.2	-19.25	255	322	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

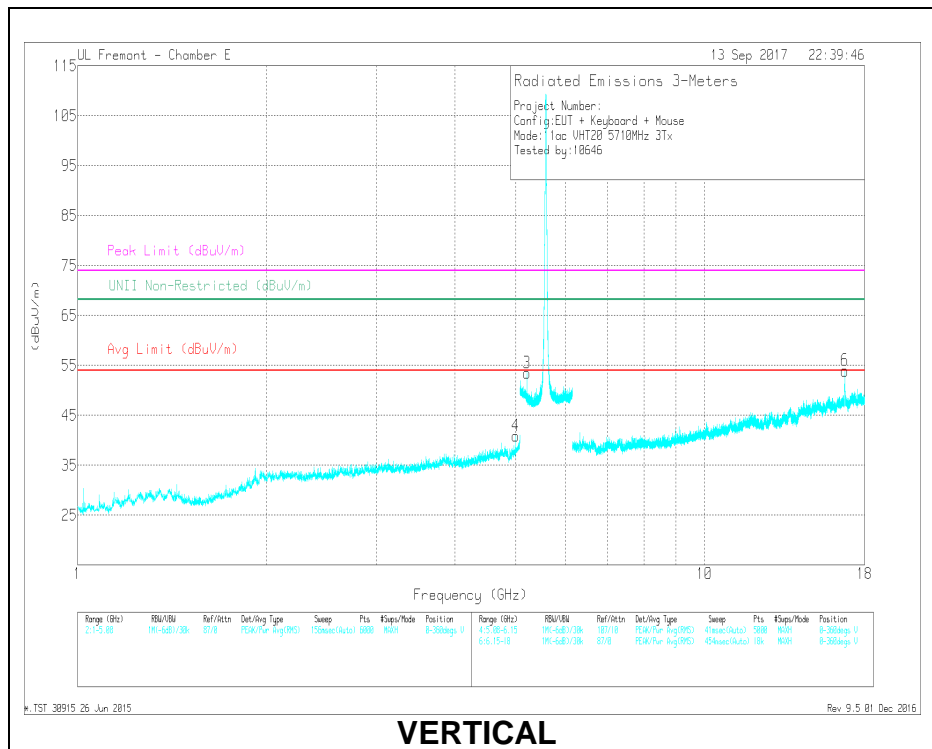

VERTICAL

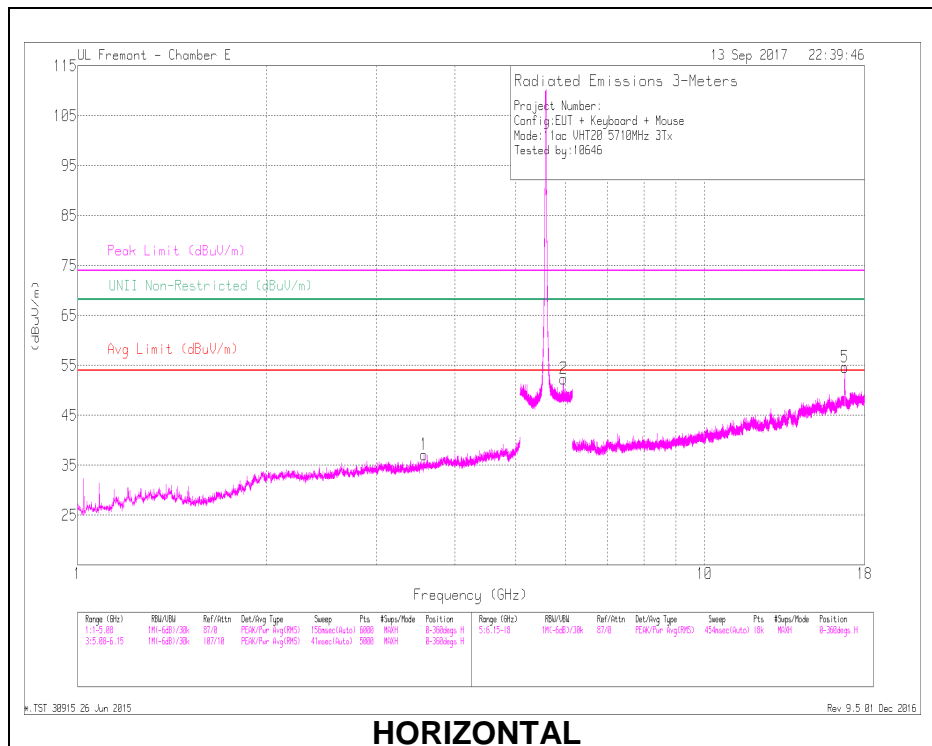

HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.569	38.87	PK-U	33.3	-30	0	42.17	-	-	74	-31.83	-	-	330	188	H
	* 3.567	26.96	ADR	33.3	-30	.12	30.38	54	-23.62	-	-	-	-	330	188	H
4	* 5	40.92	PK-U	34.5	-28.4	0	47.02	-	-	74	-26.98	-	-	111	159	V
	* 5	31.39	ADR	34.5	-28.4	.12	37.61	54	-16.39	-	-	-	-	111	159	V
3	5.208	42.98	PK-U	34.9	-18.6	0	59.28	-	-	-	-	68.2	-8.92	168	271	V
2	5.952	41.34	PK-U	35.3	-18.8	0	57.84	-	-	-	-	68.2	-10.36	287	202	H
5	16.737	42.35	PK-U	41.7	-22.4	0	61.65	-	-	-	-	68.2	-6.55	211	214	V
6	16.739	42.23	PK-U	41.7	-22.3	0	61.63	-	-	-	-	68.2	-6.57	132	130	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

5.1.8. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND

1TX Antenna WF4

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

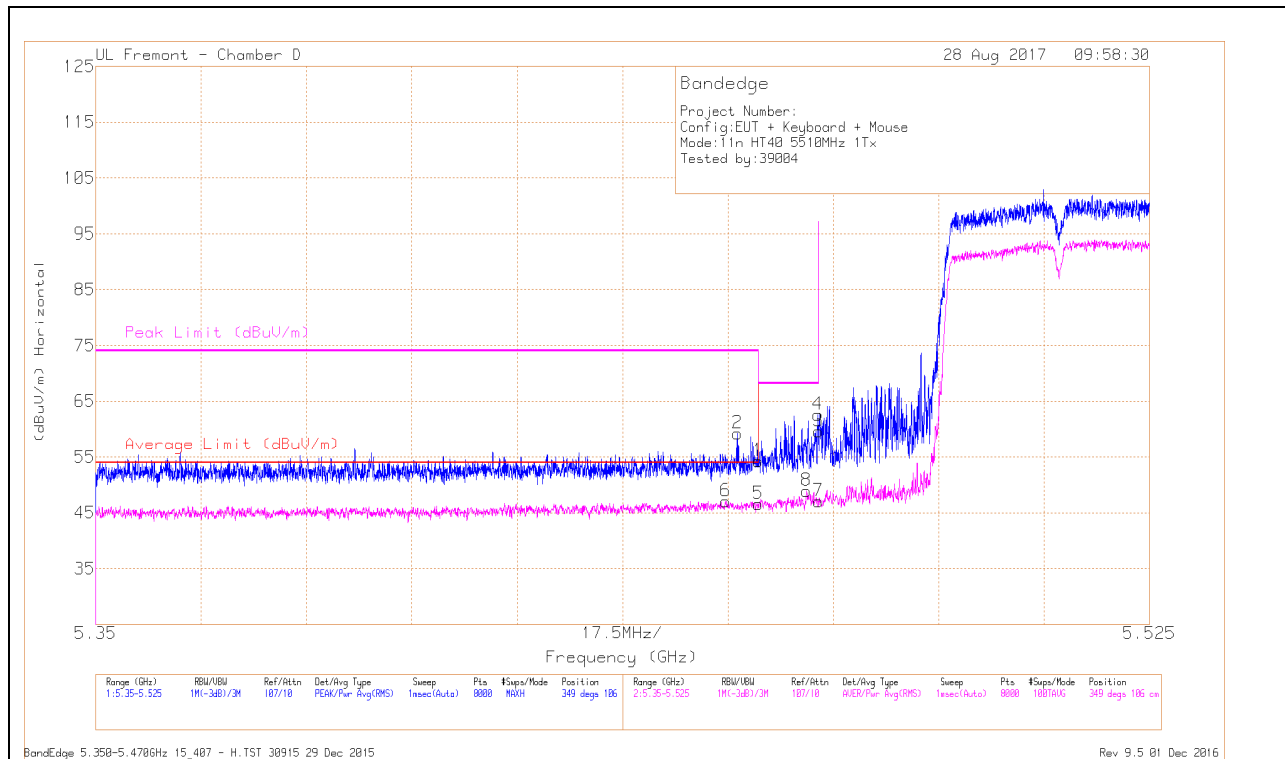

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT711 (dB/m)	Amp/C bl/Filtr/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.79	Pk	34.4	-17.9	0	54.29	-	-	74	-19.71	349	106	H
2	* 5.457	42.82	Pk	34.4	-18	0	59.22	-	-	74	-14.78	349	106	H
5	* 5.46	29.93	RMS	34.4	-17.9	.09	46.52	54	-7.48	-	-	349	106	H
6	* 5.455	30.59	RMS	34.4	-18	.09	47.08	54	-6.92	-	-	349	106	H
8	5.468	32.32	RMS	34.4	-17.9	.09	48.91	-	-	-	-	349	106	H
3	5.47	43.1	Pk	34.4	-17.9	0	59.6	-	-	68.2	-8.6	349	106	H
4	5.47	46.05	Pk	34.4	-17.9	0	62.55	-	-	68.2	-5.65	349	106	H
7	5.47	30.44	RMS	34.4	-17.9	.09	47.03	-	-	-	-	349	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

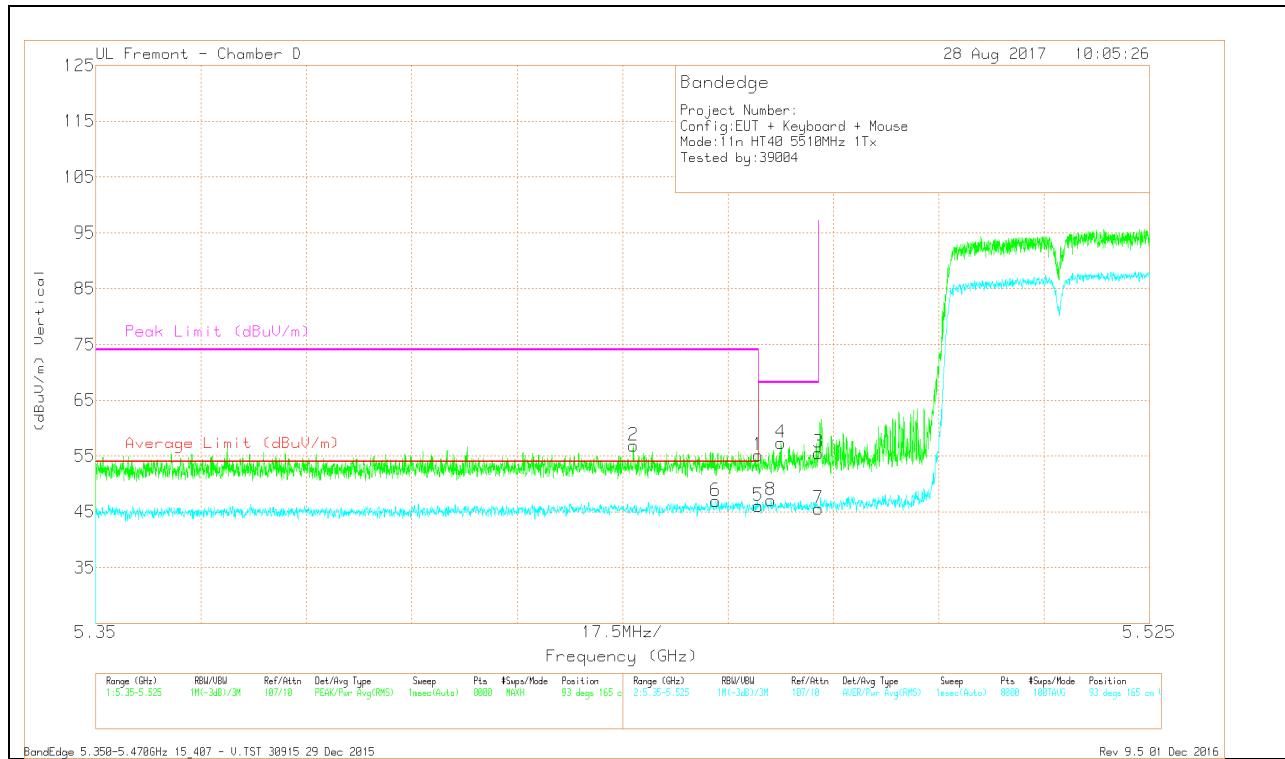


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.68	Pk	34.4	-17.9	0	55.18	-	-	74	-18.82	93	165	V
2	* 5.439	40.56	Pk	34.4	-18.1	0	56.86	-	-	74	-17.14	93	165	V
5	* 5.46	29.47	RMS	34.4	-17.9	.09	46.06	54	-7.94	-	-	93	165	V
6	* 5.453	30.42	RMS	34.4	-18	.09	46.91	54	-7.09	-	-	93	165	V
8	5.462	30.49	RMS	34.4	-17.9	.09	47.08	-	-	-	-	93	165	V
4	5.464	40.92	Pk	34.4	-17.9	0	57.42	-	-	68.2	-10.78	93	165	V
3	5.47	39.07	Pk	34.4	-17.9	0	55.57	-	-	68.2	-12.63	93	165	V
7	5.47	29	RMS	34.4	-17.9	.09	45.59	-	-	-	-	93	165	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

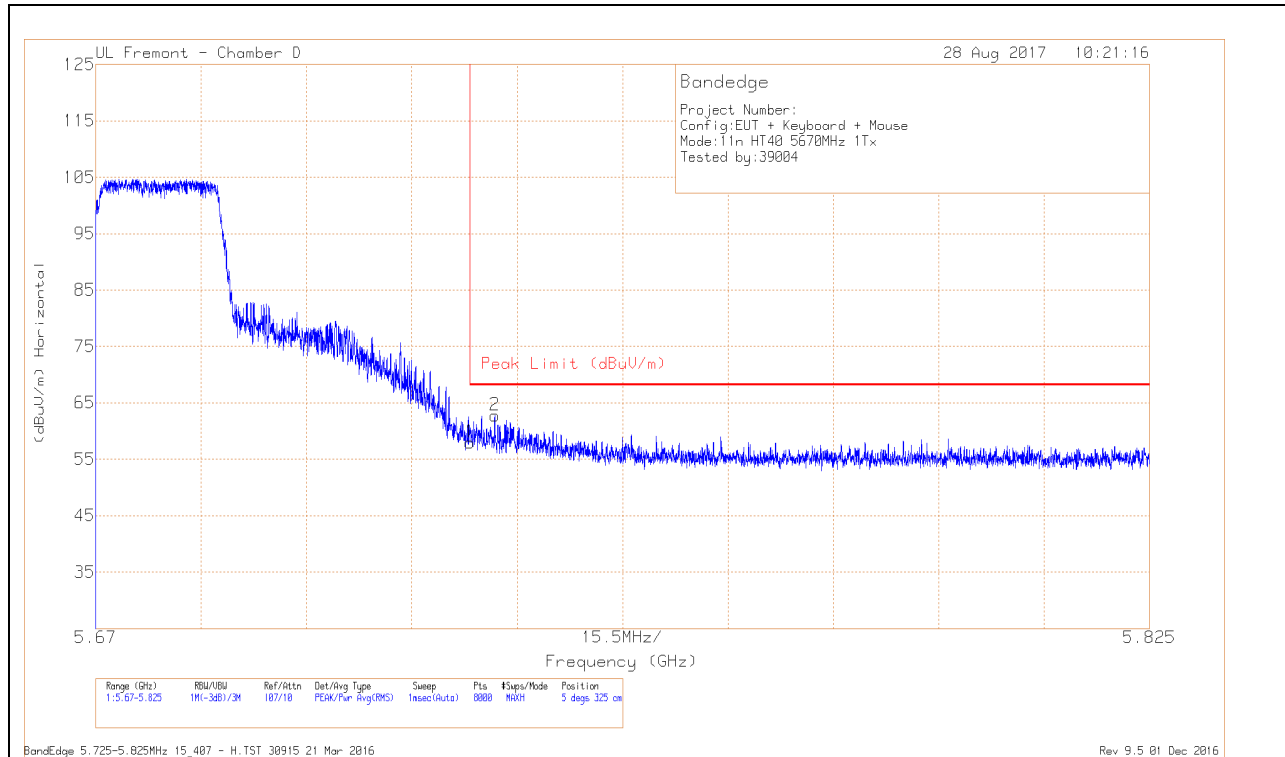

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.71	Pk	34.8	-17.5	0	58.01	68.2	-10.19	5	325	H
2	5.729	45.6	Pk	34.8	-17.6	0	62.8	68.2	-5.4	5	325	H

Pk - Peak detector

VERTICAL RESULT

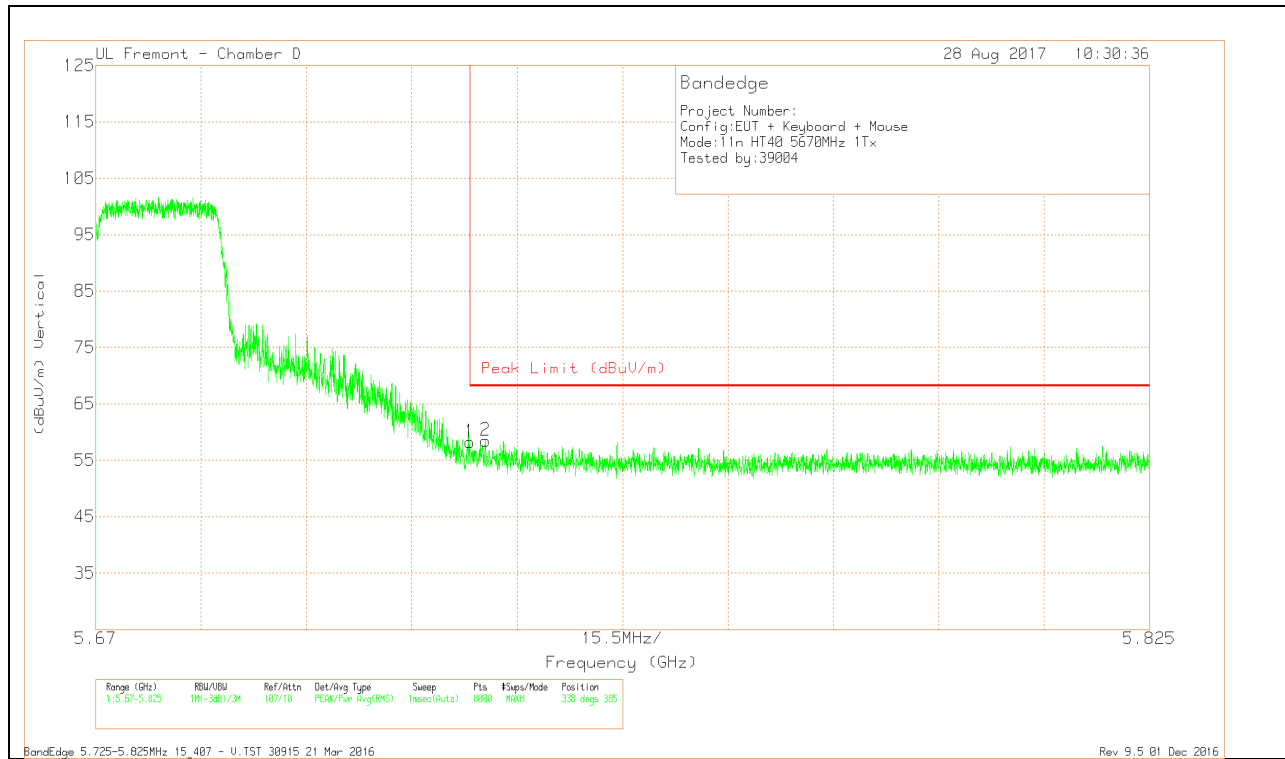


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.88	Pk	34.8	-17.5	0	58.18	68.2	-10.02	338	385	V
2	5.727	41.31	Pk	34.8	-17.6	0	58.51	68.2	-9.69	338	385	V

Pk - Peak detector

1TX Antenna WF3

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

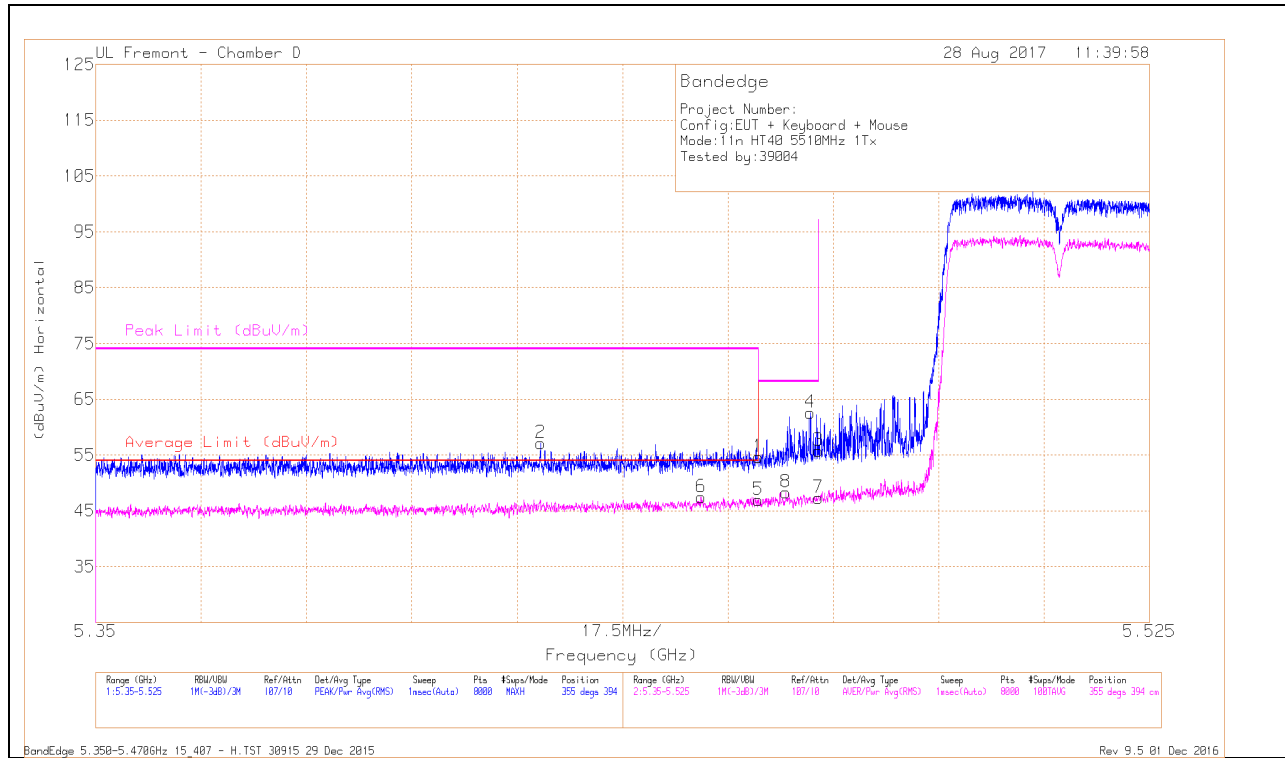


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.1	Pk	34.4	-17.9	0	54.6	-	-	74	-19.4	355	394	H
2	* 5.424	40.98	Pk	34.3	-18.2	0	57.08	-	-	74	-16.92	355	394	H
5	* 5.46	30.32	RMS	34.4	-17.9	.09	46.91	54	-7.09	-	-	355	394	H
6	* 5.451	31.1	RMS	34.4	-18.1	.09	47.49	54	-6.51	-	-	355	394	H
8	5.465	31.74	RMS	34.4	-17.9	.09	48.33	-	-	-	-	355	394	H
4	5.469	46.08	Pk	34.4	-17.9	0	62.58	-	-	68.2	-5.62	355	394	H
3	5.47	39.2	Pk	34.4	-17.9	0	55.7	-	-	68.2	-12.5	355	394	H
7	5.47	30.72	RMS	34.4	-17.9	.09	47.31	-	-	-	-	355	394	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

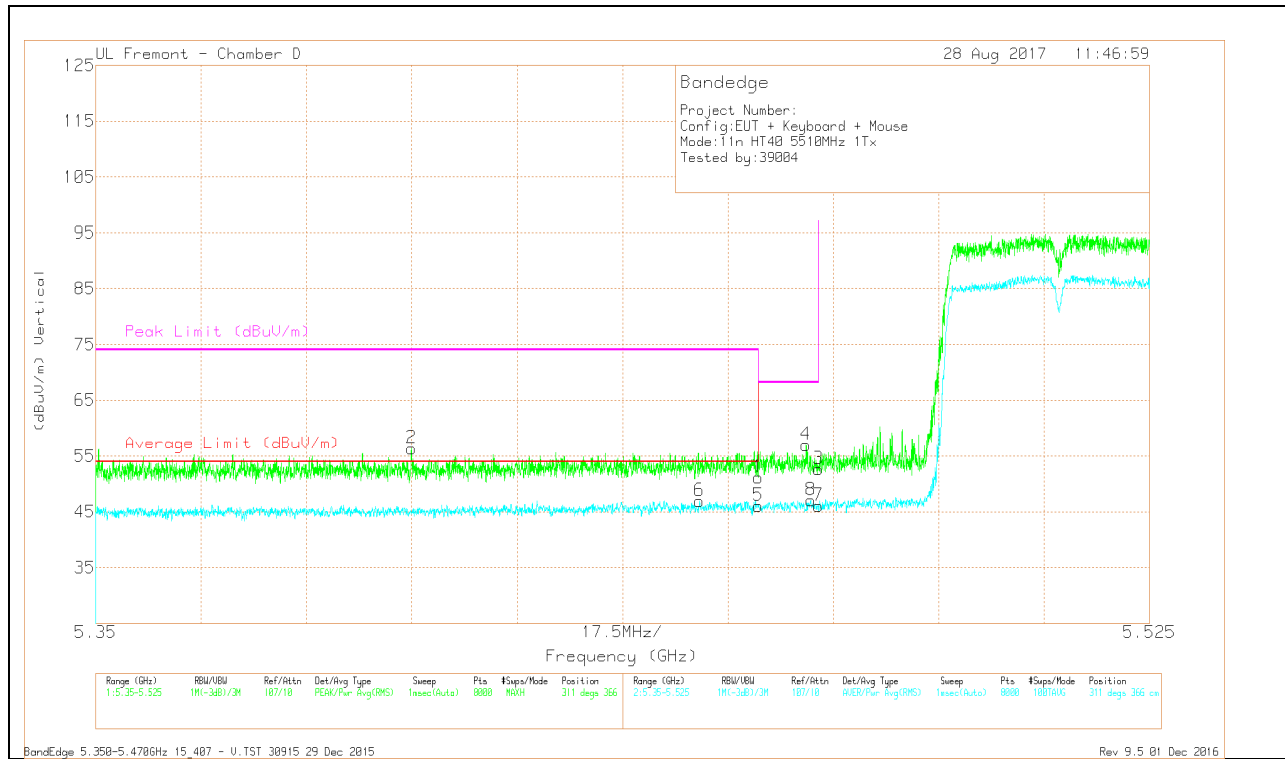


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	34.67	Pk	34.4	-17.9	0	51.17	-	-	74	-22.83	311	366	V
2	* 5.402	40.38	Pk	34.3	-18.3	0	56.38	-	-	74	-17.62	311	366	V
5	* 5.46	29.46	RMS	34.4	-17.9	.09	46.05	54	-7.95	-	-	311	366	V
6	* 5.45	30.58	RMS	34.4	-18.1	.09	46.97	54	-7.03	-	-	311	366	V
4	5.468	40.48	Pk	34.4	-17.9	0	56.98	-	-	68.2	-11.22	311	366	V
8	5.469	30.42	RMS	34.4	-17.9	.09	47.01	-	-	-	-	311	366	V
3	5.47	36.14	Pk	34.4	-17.9	0	52.64	-	-	68.2	-15.56	311	366	V
7	5.47	29.51	RMS	34.4	-17.9	.09	46.1	-	-	-	-	311	366	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

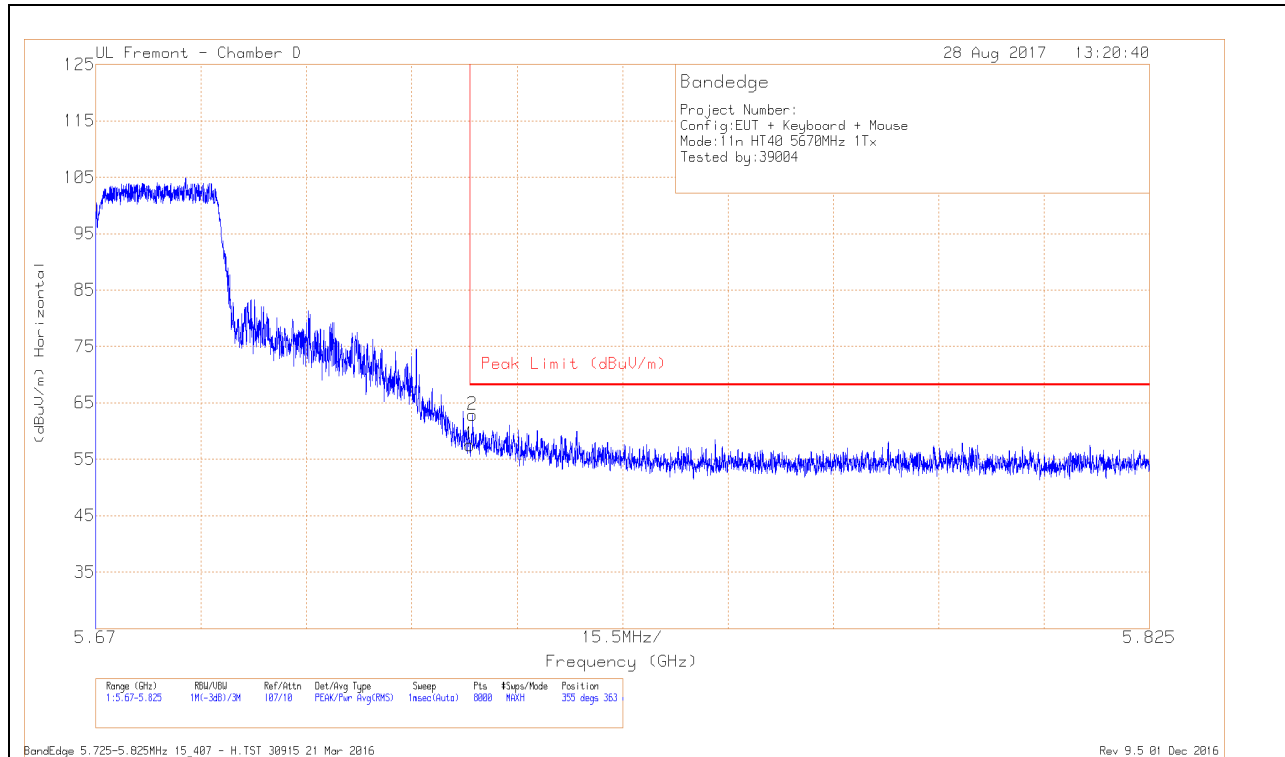

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.25	Pk	34.8	-17.5	0	57.55	68.2	-10.65	355	363	H
2	5.725	45.61	Pk	34.8	-17.5	0	62.91	68.2	-5.29	355	363	H

Pk - Peak detector

VERTICAL RESULT

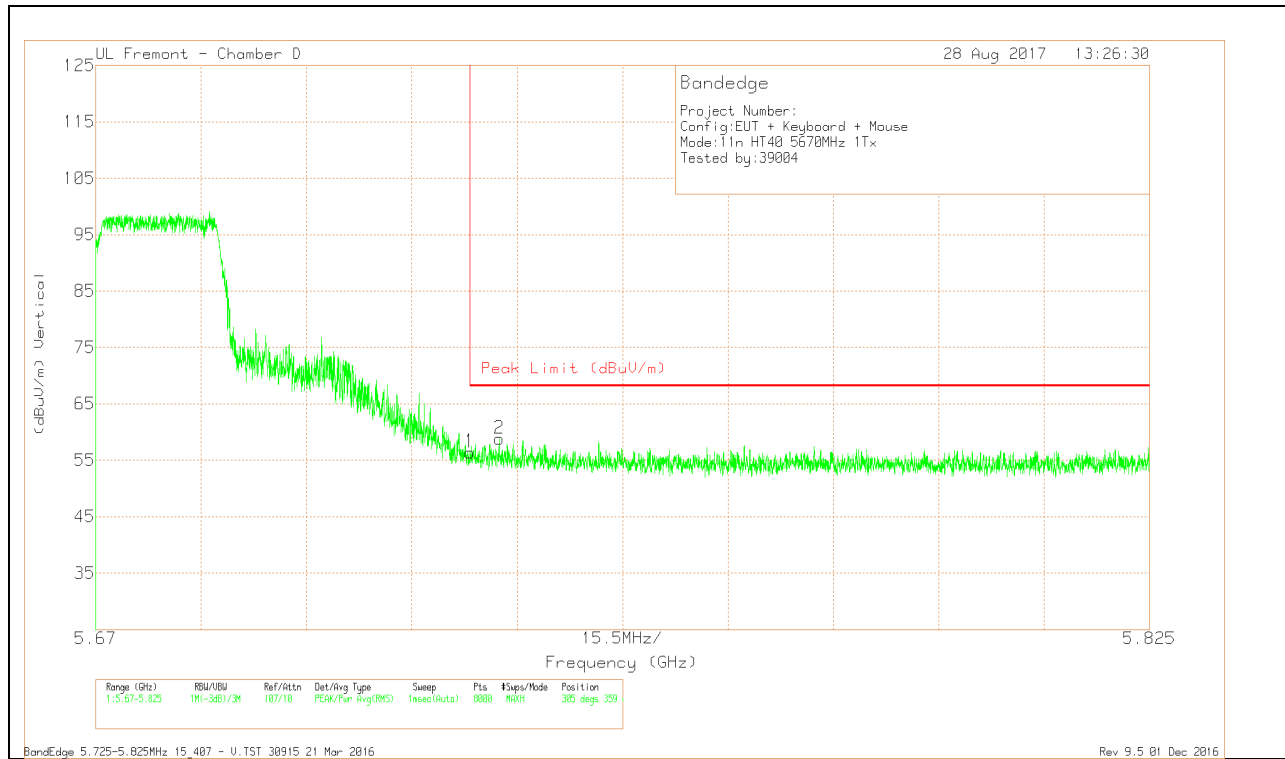


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.14	Pk	34.8	-17.5	0	56.44	68.2	-11.76	305	359	V
2	5.729	41.58	Pk	34.8	-17.5	0	58.88	68.2	-9.32	305	359	V

Pk - Peak detector

1TX Antenna WF2

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

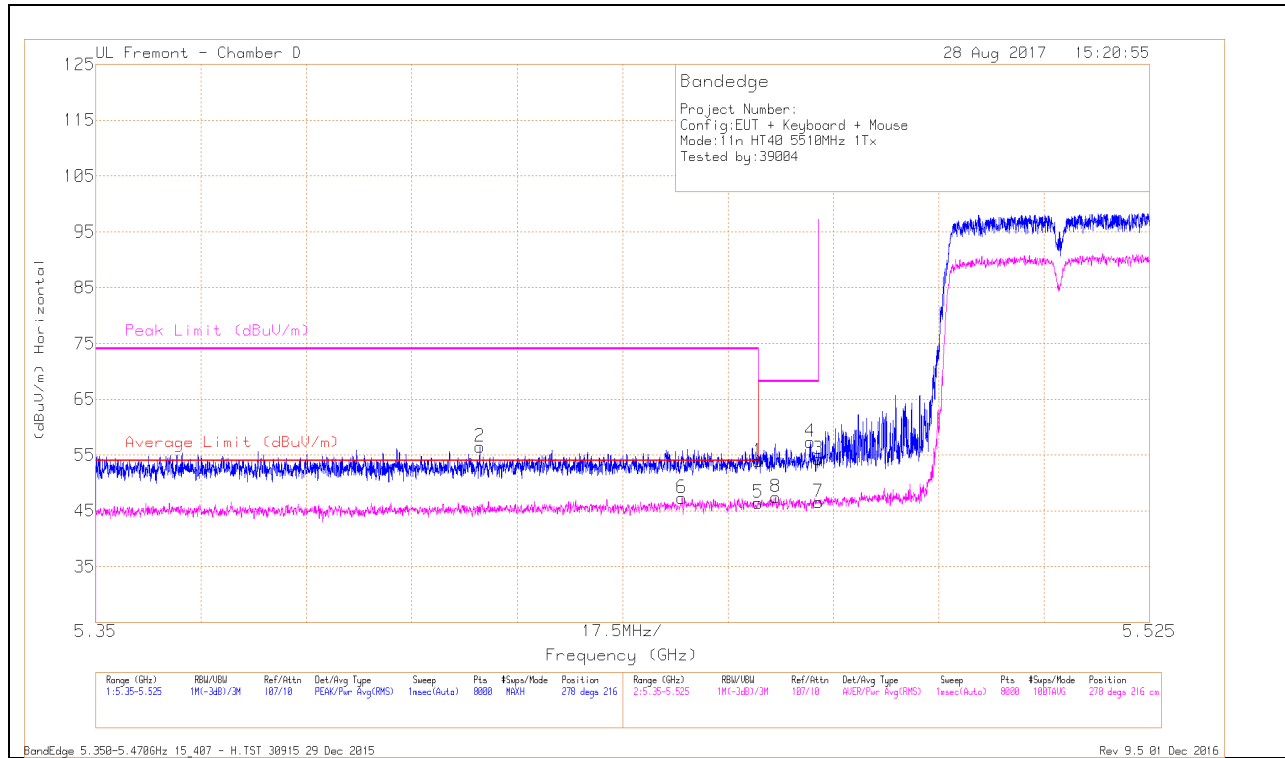


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.4	Pk	34.4	-17.9	0	53.9	-	-	74	-20.1	278	216	H
2	* 5.414	40.4	Pk	34.3	-18.2	0	56.5	-	-	74	-17.5	278	216	H
5	* 5.46	29.82	RMS	34.4	-17.9	.09	46.41	54	-7.59	-	-	278	216	H
6	* 5.447	30.97	RMS	34.4	-18.1	.09	47.36	54	-6.64	-	-	278	216	H
8	5.463	30.88	RMS	34.4	-17.9	.09	47.47	-	-	-	-	278	216	H
4	5.469	40.84	Pk	34.4	-17.9	0	57.34	-	-	68.2	-10.86	278	216	H
3	5.47	37.79	Pk	34.4	-17.9	0	54.29	-	-	68.2	-13.91	278	216	H
7	5.47	29.95	RMS	34.4	-17.9	.09	46.54	-	-	-	-	278	216	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

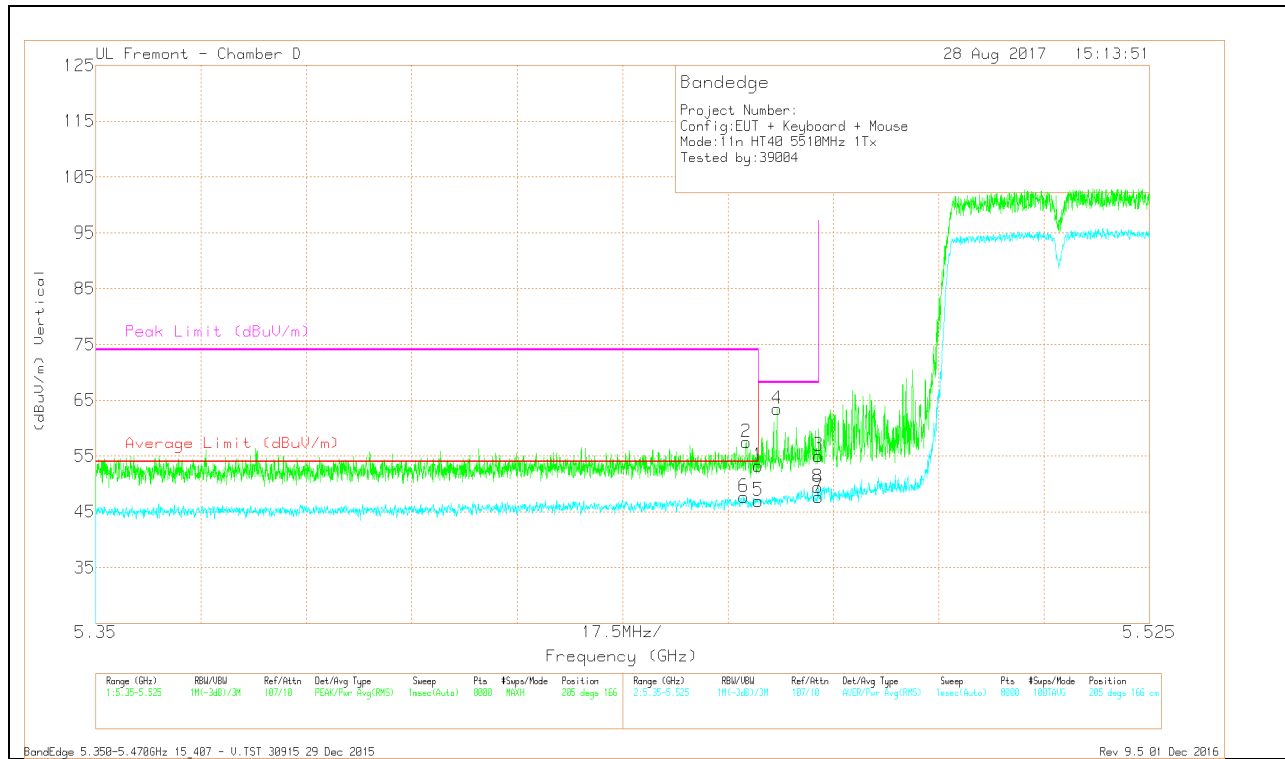


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	36.73	Pk	34.4	-17.9	0	53.23	-	-	74	-20.77	205	166	V
2	* 5.458	41.07	Pk	34.4	-18	0	57.47	-	-	74	-16.53	205	166	V
5	* 5.46	30.41	RMS	34.4	-17.9	.09	47	54	-7	-	-	205	166	V
6	* 5.458	31.15	RMS	34.4	-18	.09	47.64	54	-6.36	-	-	205	166	V
4	5.463	46.94	Pk	34.4	-17.9	0	63.44	-	-	68.2	-4.76	205	166	V
3	5.47	38.57	Pk	34.4	-17.9	0	55.07	-	-	68.2	-13.13	205	166	V
7	5.47	31.05	RMS	34.4	-17.9	.09	47.64	-	-	-	-	205	166	V
8	5.47	32.79	RMS	34.4	-17.9	.09	49.38	-	-	-	-	205	166	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

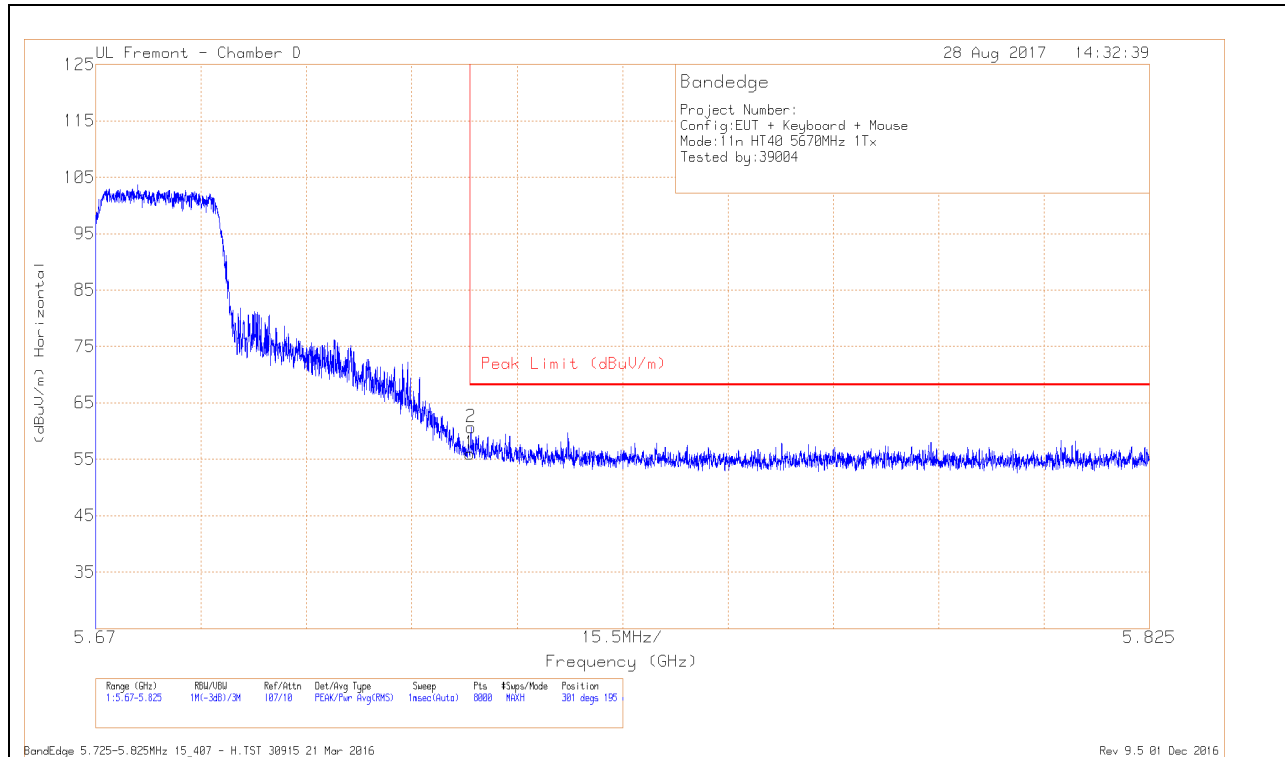

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.72	Pk	34.8	-17.5	0	56.02	68.2	-12.18	301	195	H
2	5.725	43.39	Pk	34.8	-17.5	0	60.69	68.2	-7.51	301	195	H

Pk - Peak detector

VERTICAL RESULT

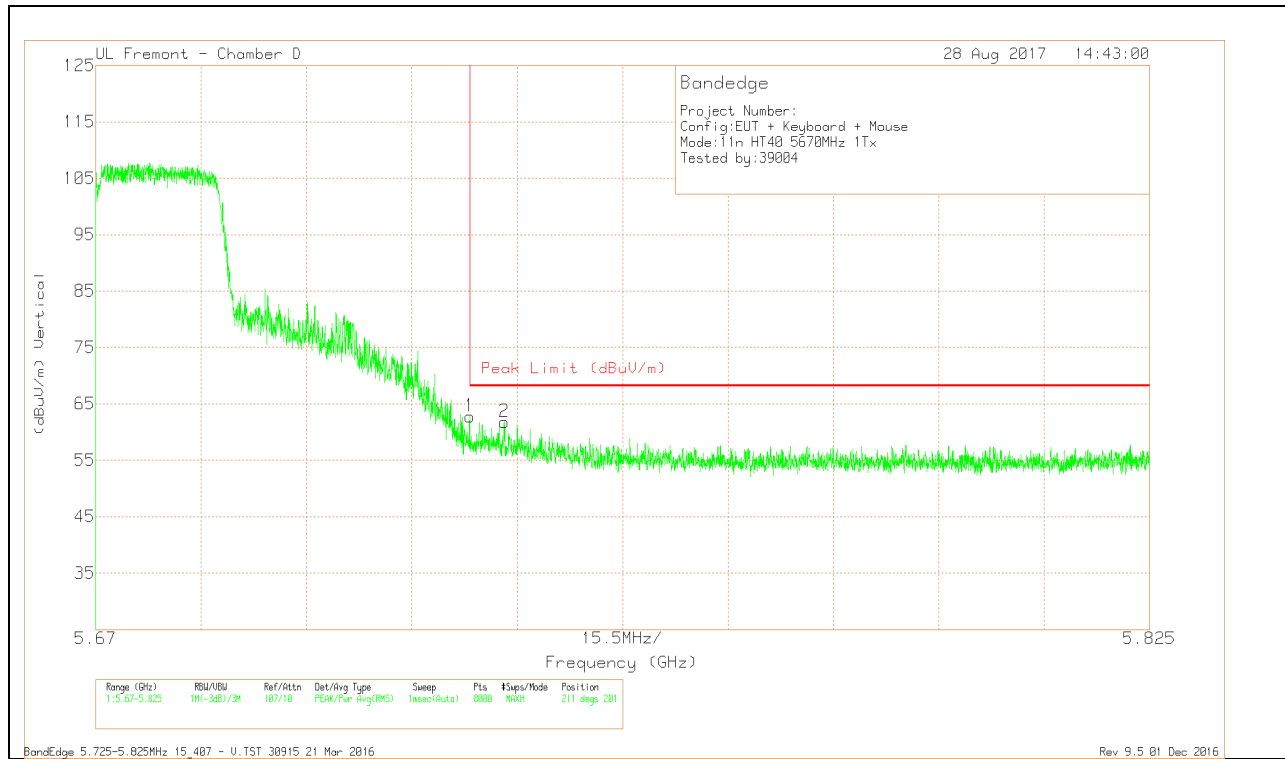


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.42	Pk	34.8	-17.5	0	62.72	68.2	-5.48	211	201	V
2	5.73	44.52	Pk	34.8	-17.5	0	61.82	68.2	-6.38	211	201	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF3 CDD Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

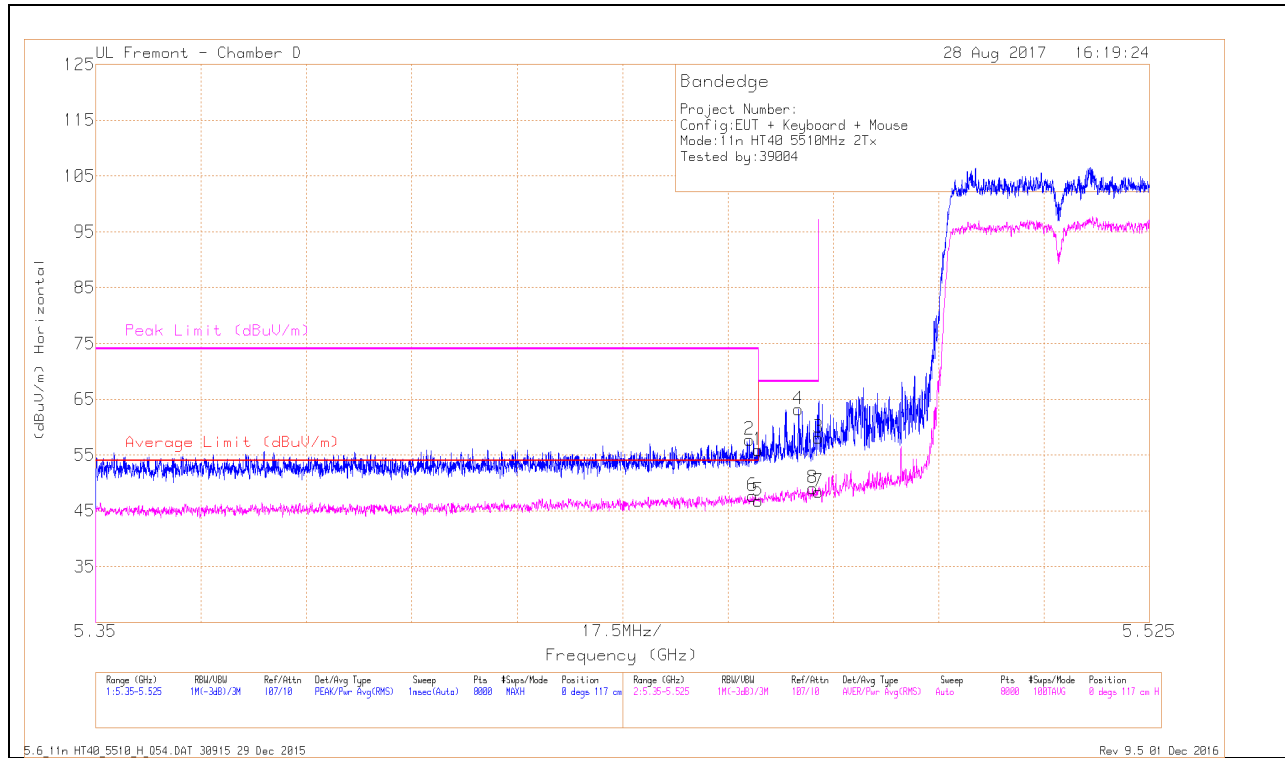


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.42	Pk	34.4	-17.9	0	55.92	-	-	74	-18.08	0	117	H
2	* 5.459	41.32	Pk	34.4	-18	0	57.72	-	-	74	-16.28	0	117	H
5	* 5.46	30.23	RMS	34.4	-17.9	.18	46.91	54	-7.09	-	-	0	117	H
6	* 5.459	31.16	RMS	34.4	-18	.18	47.74	54	-6.26	-	-	0	117	H
4	5.467	46.76	Pk	34.4	-17.9	0	63.26	-	-	68.2	-4.94	0	117	H
8	5.469	32.51	RMS	34.4	-17.9	.18	49.19	-	-	-	-	0	117	H
3	5.47	41.65	Pk	34.4	-17.9	0	58.15	-	-	68.2	-10.05	0	117	H
7	5.47	31.88	RMS	34.4	-17.9	.18	48.56	-	-	-	-	0	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

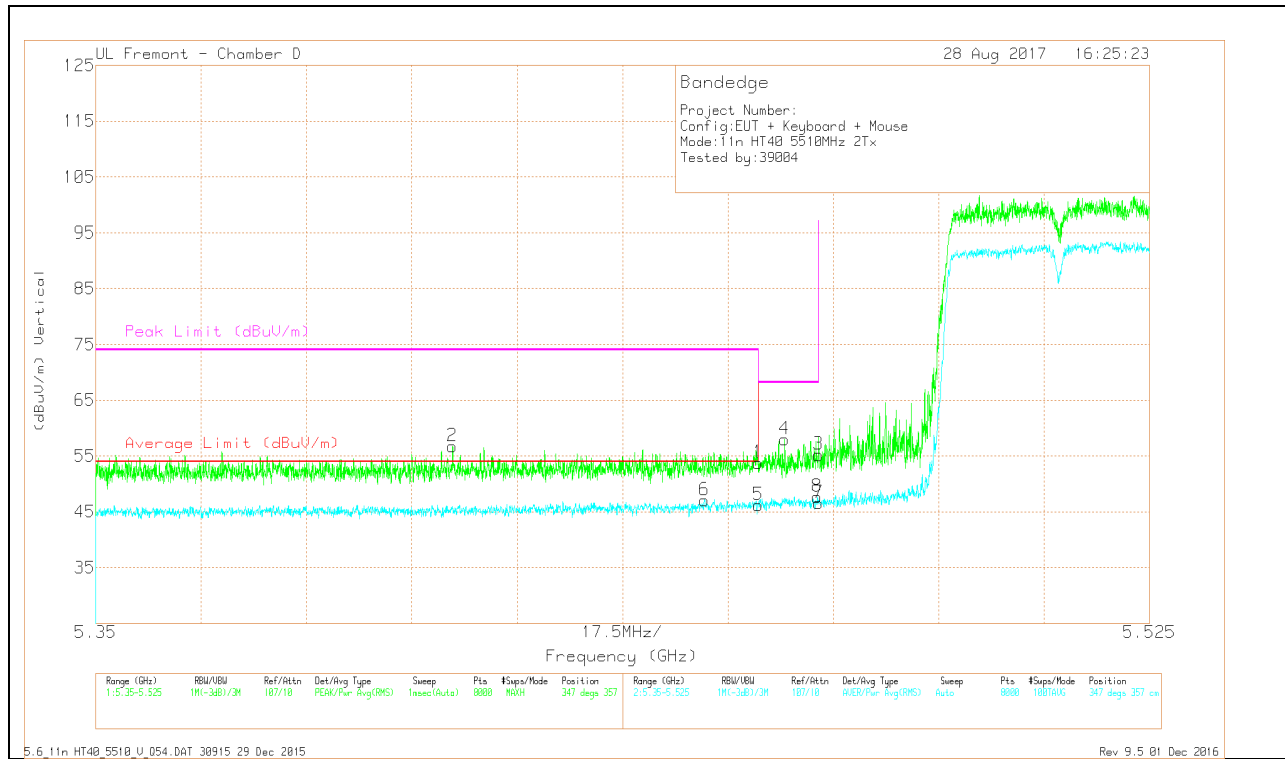


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.32	Pk	34.4	-17.9	0	53.82	-	-	74	-20.18	347	357	V
2	* 5.409	40.71	Pk	34.3	-18.3	0	56.71	-	-	74	-17.29	347	357	V
5	* 5.46	29.63	RMS	34.4	-17.9	.18	46.31	54	-7.69	-	-	347	357	V
6	* 5.451	30.61	RMS	34.4	-18	.18	47.19	54	-6.81	-	-	347	357	V
4	5.464	41.52	Pk	34.4	-17.9	0	58.02	-	-	68.2	-10.18	347	357	V
3	5.47	38.7	Pk	34.4	-17.9	0	55.2	-	-	68.2	-13	347	357	V
7	5.47	29.95	RMS	34.4	-17.9	.18	46.63	-	-	-	-	347	357	V
8	5.47	31.04	RMS	34.4	-17.9	.18	47.72	-	-	-	-	347	357	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

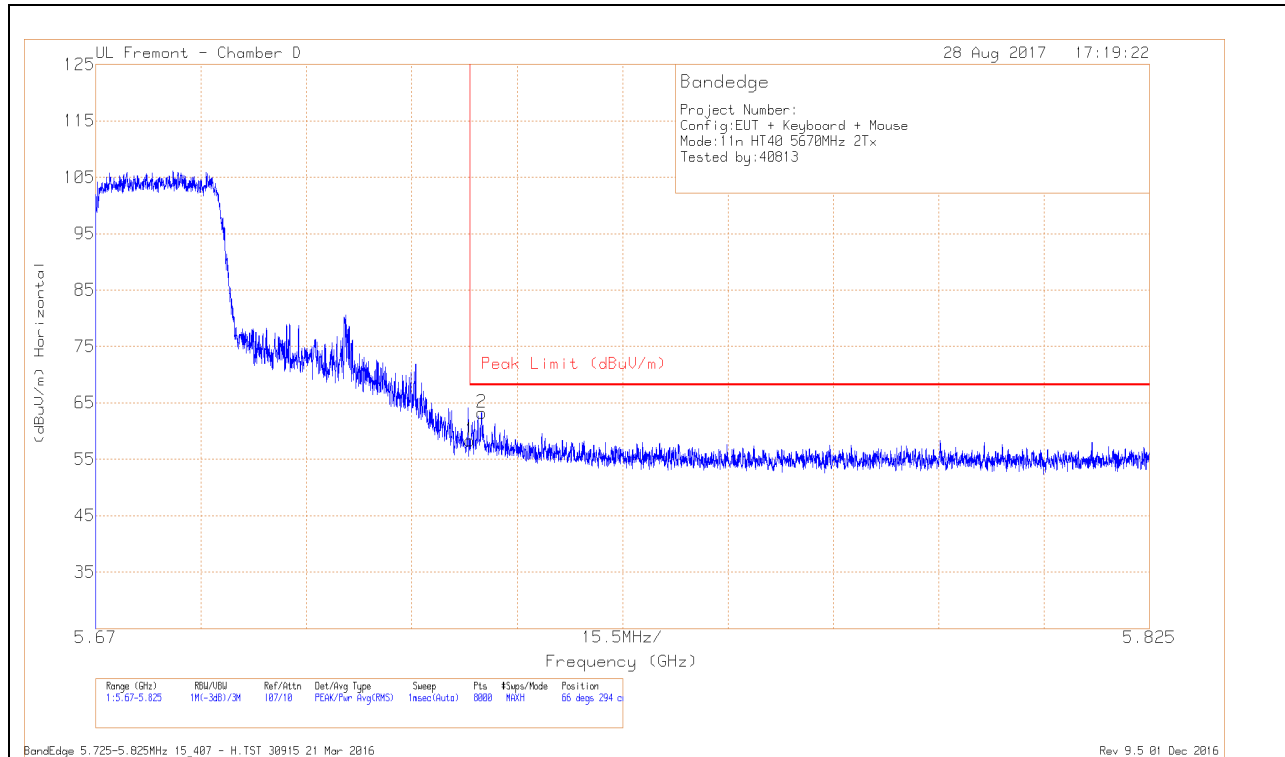

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.01	Pk	34.8	-17.5	0	58.31	68.2	-9.89	66	294	H
2	5.727	45.95	Pk	34.8	-17.5	0	63.25	68.2	-4.95	66	294	H

Pk - Peak detector

VERTICAL RESULT

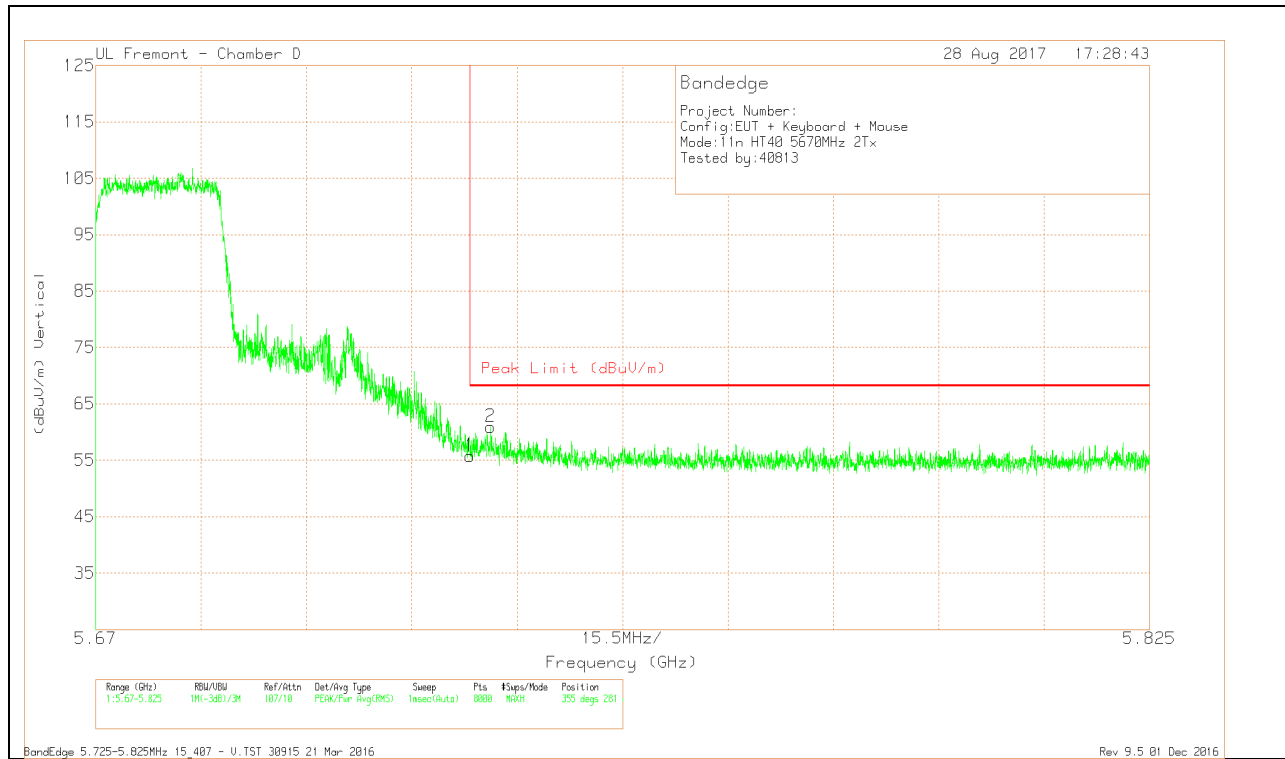


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.51	PK	34.8	-17.5	0	55.81	68.2	-12.39	355	281	V
2	5.728	43.77	PK	34.8	-17.6	0	60.97	68.2	-7.23	355	281	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF3 SDM Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

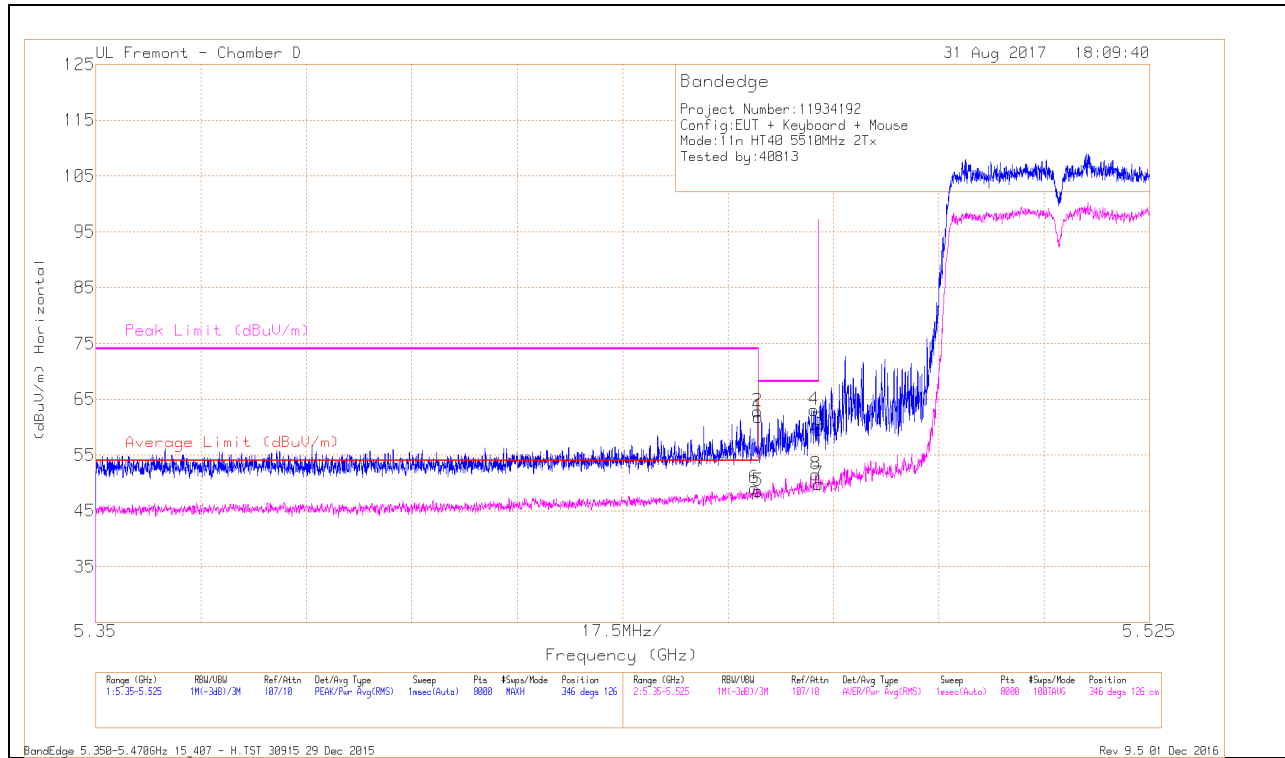


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	45.34	Pk	34.4	-17.9	0	61.84	-	-	74	-12.16	346	126	H
2	* 5.46	46.33	Pk	34.4	-17.9	0	62.83	-	-	74	-11.17	346	126	H
5	* 5.46	31.86	RMS	34.4	-17.9	.29	48.65	54	-5.35	-	-	346	126	H
6	* 5.459	32.5	RMS	34.4	-18	.29	49.19	54	-4.81	-	-	346	126	H
4	5.469	46.63	Pk	34.4	-17.9	0	63.13	-	-	68.2	-5.07	346	126	H
3	5.47	42.93	Pk	34.4	-17.9	0	59.43	-	-	68.2	-8.77	346	126	H
7	5.47	33.13	RMS	34.4	-17.9	.29	49.8	54	-4.2	-	-	346	126	H
8	5.47	34.82	RMS	34.4	-17.9	.29	51.49	54	-2.51	-	-	346	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

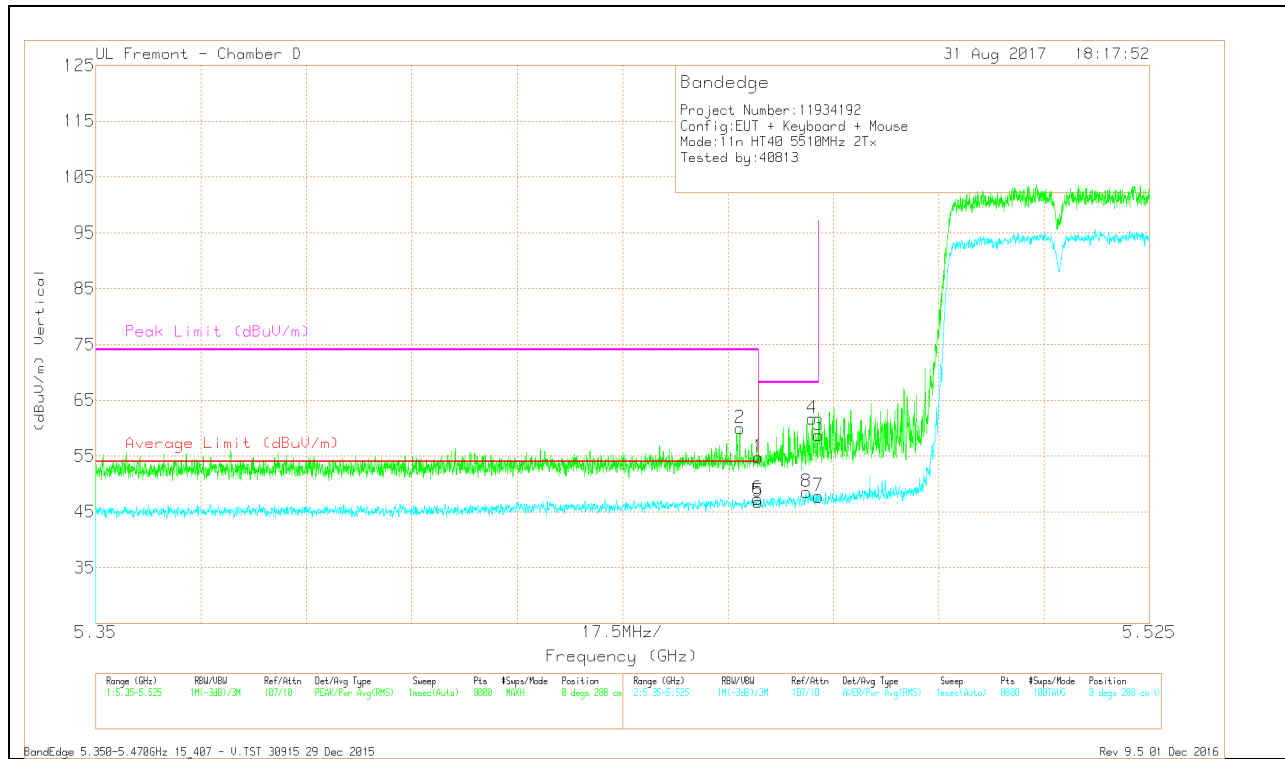


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.27	Pk	34.4	-17.9	0	54.77	-	-	74	-19.23	0	288	V
2	* 5.457	43.56	Pk	34.4	-18	0	59.96	-	-	74	-14.04	0	288	V
5	* 5.46	30.14	RMS	34.4	-17.9	.29	46.96	54	-7.04	-	-	0	288	V
6	* 5.46	30.63	RMS	34.4	-17.9	.29	47.42	54	-6.58	-	-	0	288	V
8	5.468	31.83	RMS	34.4	-17.9	.29	48.62	54	-5.38	-	-	0	288	V
4	5.469	45.27	Pk	34.4	-17.9	0	61.77	-	-	68.2	-6.43	0	288	V
3	5.47	42.19	Pk	34.4	-17.9	0	58.69	-	-	68.2	-9.51	0	288	V
7	5.47	31.08	RMS	34.4	-17.9	.29	47.87	54	-6.13	-	-	0	288	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

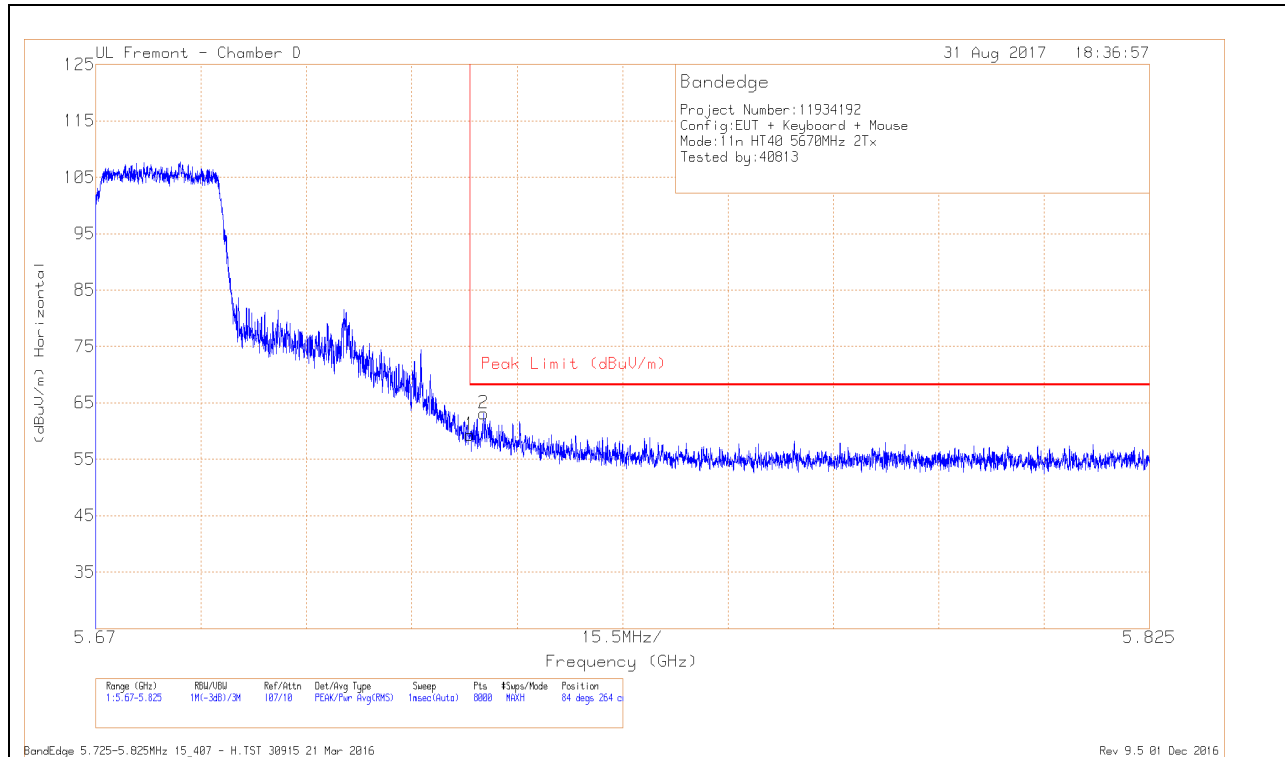

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.99	Pk	34.8	-17.5	0	59.29	68.2	-8.91	84	264	H
2	5.727	45.81	Pk	34.8	-17.5	0	63.11	68.2	-5.09	84	264	H

Pk - Peak detector

VERTICAL RESULT

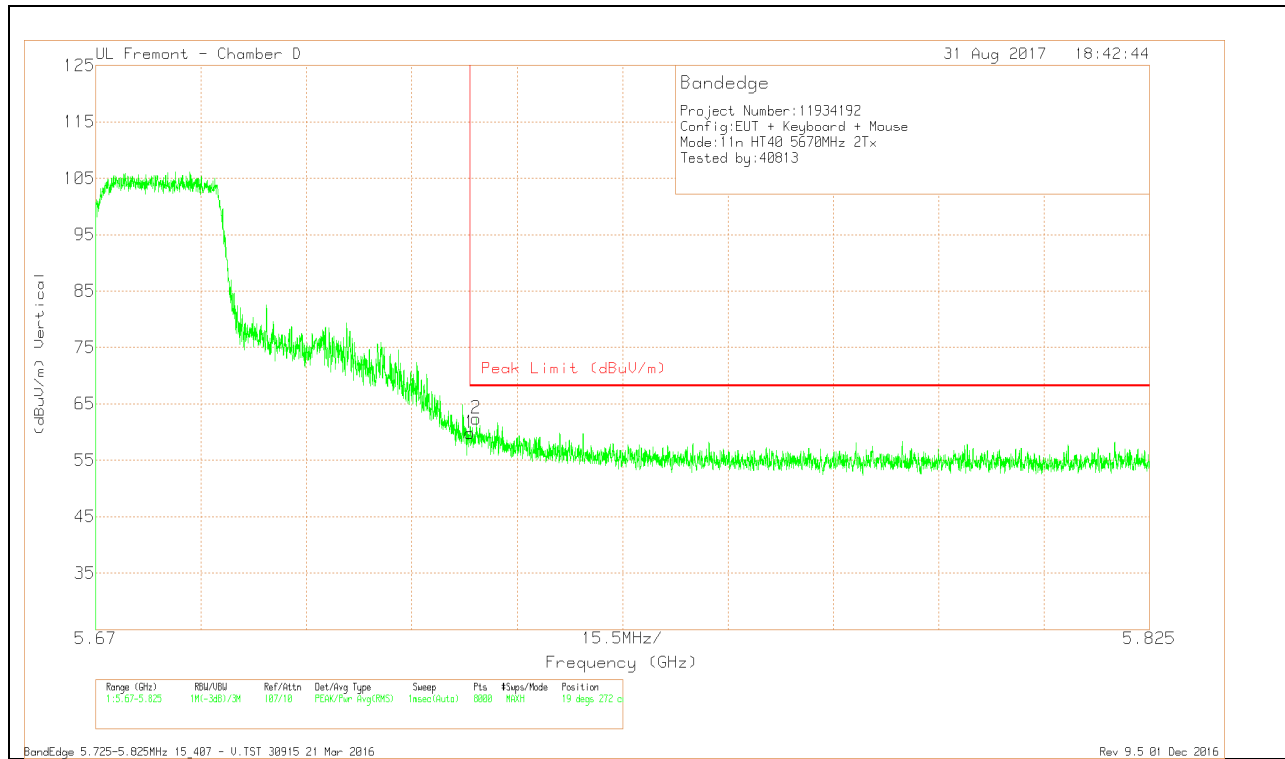


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.53	PK	34.8	-17.5	0	59.83	68.2	-8.37	19	272	V
2	5.726	45.14	PK	34.8	-17.5	0	62.44	68.2	-5.76	19	272	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF3 BF Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

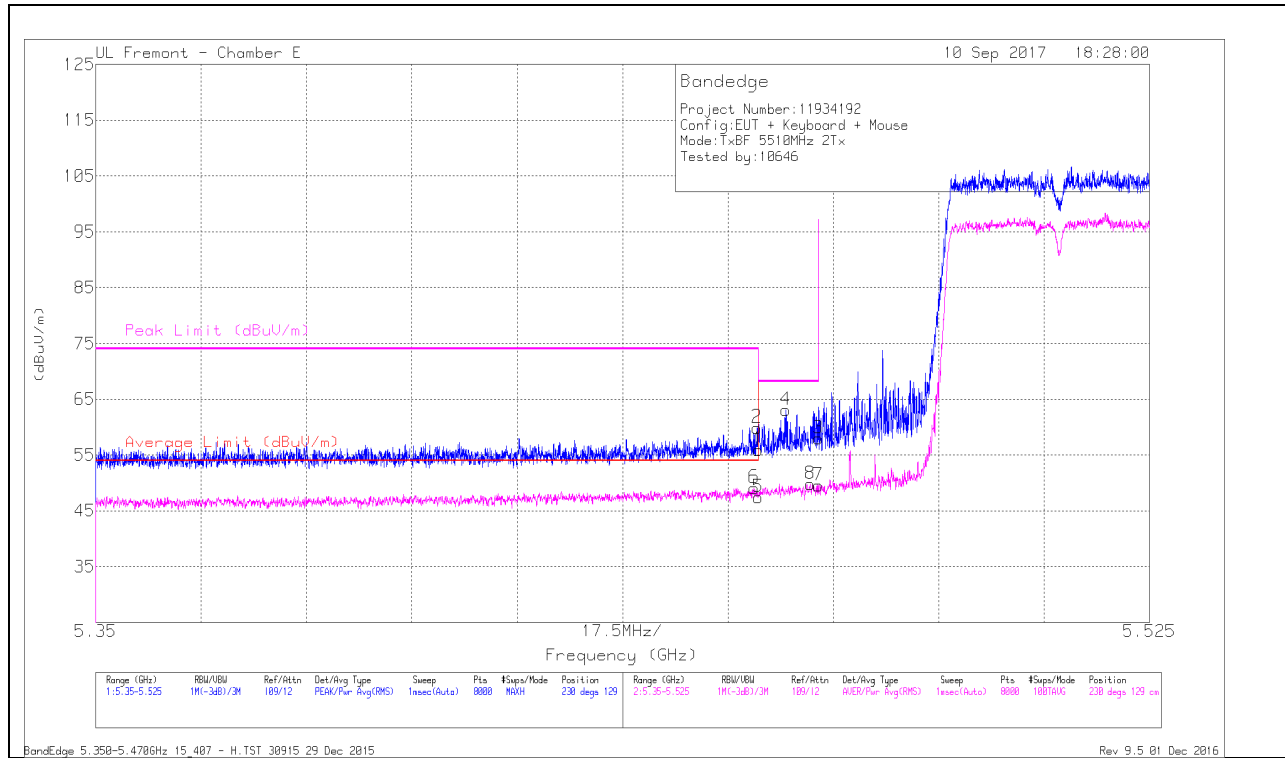


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.74	Pk	35.1	-18.9	0	55.94	-	-	74	-18.06	230	129	H
2	* 5.46	43.71	Pk	35.1	-18.9	0	59.91	-	-	74	-14.09	230	129	H
5	* 5.46	31	RMS	35.1	-18.9	.11	47.31	54	-6.69	-	-	230	129	H
6	* 5.459	32.65	RMS	35.1	-18.9	.11	48.96	54	-5.04	-	-	230	129	H
4	5.465	46.89	Pk	35.1	-18.9	0	63.09	-	-	68.2	-5.11	230	129	H
8	5.469	33.36	RMS	35.1	-18.9	.11	49.67	54	-4.43	-	-	230	129	H
3	5.47	41.74	Pk	35.1	-18.9	0	57.94	-	-	68.2	-10.26	230	129	H
7	5.47	33.07	RMS	35.1	-18.9	.11	49.42	54	-4.58	-	-	230	129	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

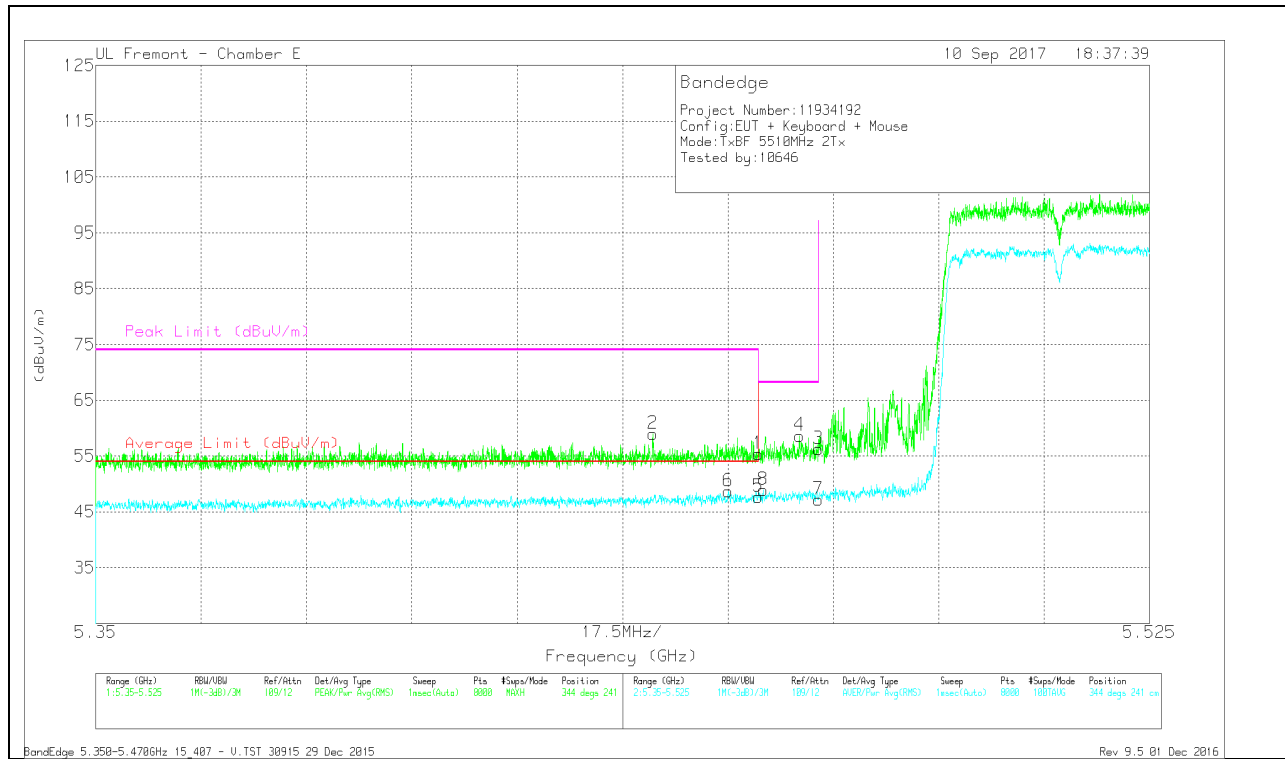


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.443	42.73	Pk	35.1	-18.9	0	58.93	-	-	74	-15.07	344	241	V
6	* 5.455	32.19	RMS	35.1	-18.9	.11	48.5	54	-5.5	-	-	344	241	V
1	* 5.46	39.22	Pk	35.1	-18.9	0	55.42	-	-	74	-18.58	344	241	V
5	* 5.46	31.21	RMS	35.1	-18.9	.11	47.52	54	-6.48	-	-	344	241	V
8	5.461	32.52	RMS	35.1	-18.9	.11	48.83	54	-5.17	-	-	344	241	V
4	5.467	42.47	Pk	35.1	-18.9	0	58.67	-	-	68.2	-9.53	344	241	V
3	5.47	40	Pk	35.1	-18.9	0	56.2	-	-	68.2	-12	344	241	V
7	5.47	30.69	RMS	35.1	-18.9	.11	47	54	-7	-	-	344	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

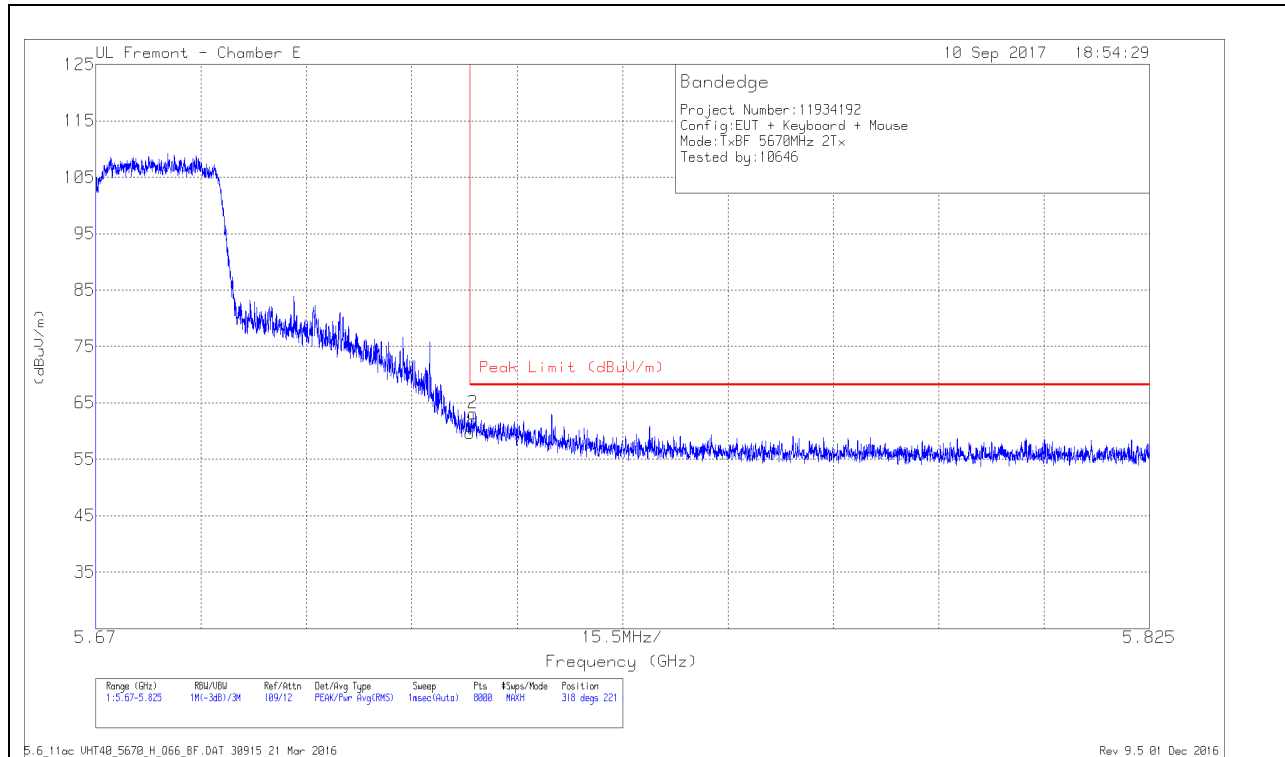

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.7	PK	35.1	-19.1	0	59.7	68.2	-8.5	318	221	H
2	5.725	47.17	PK	35.1	-19.1	0	63.17	68.2	-5.03	318	221	H

Pk - Peak detector

VERTICAL RESULT

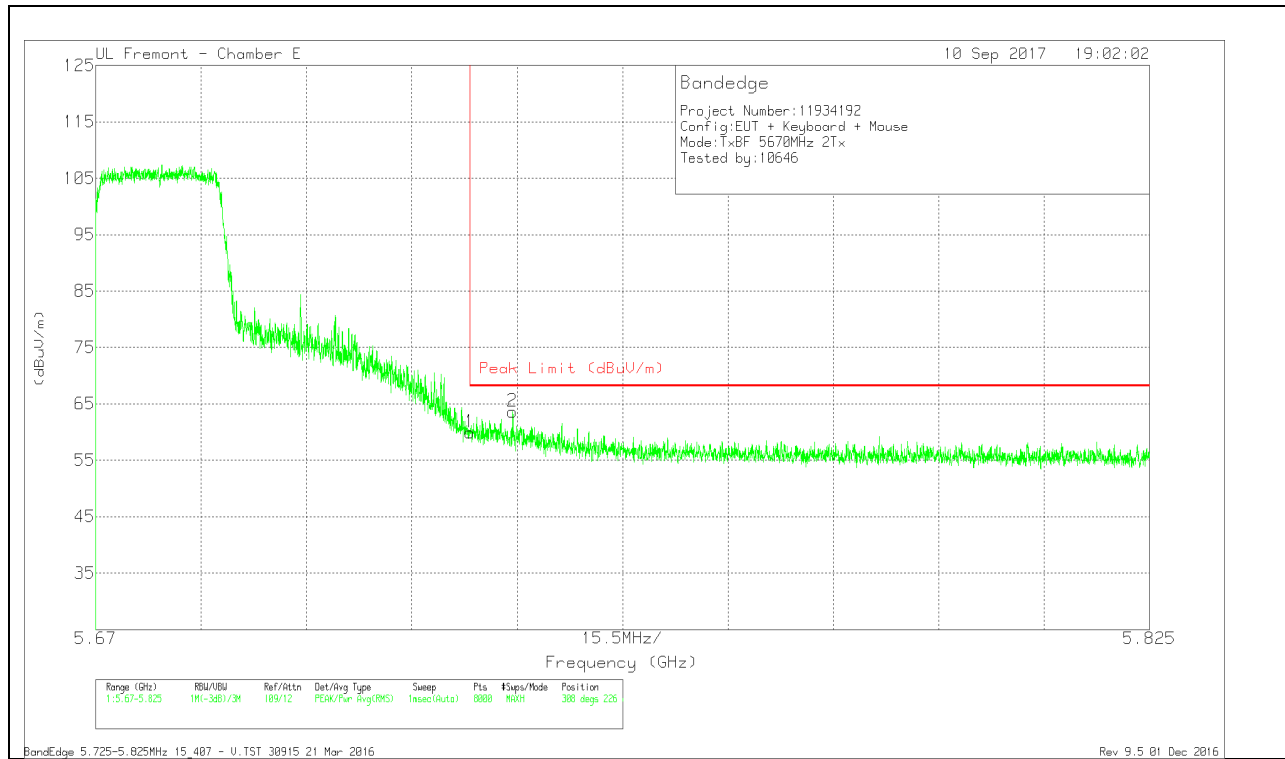


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fl tr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.89	Pk	35.1	-19.1	59.89	68.2	-8.31	308	226	V
2	5.731	47.61	Pk	35.1	-19.1	63.61	68.2	-4.59	308	226	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF2 CDD Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

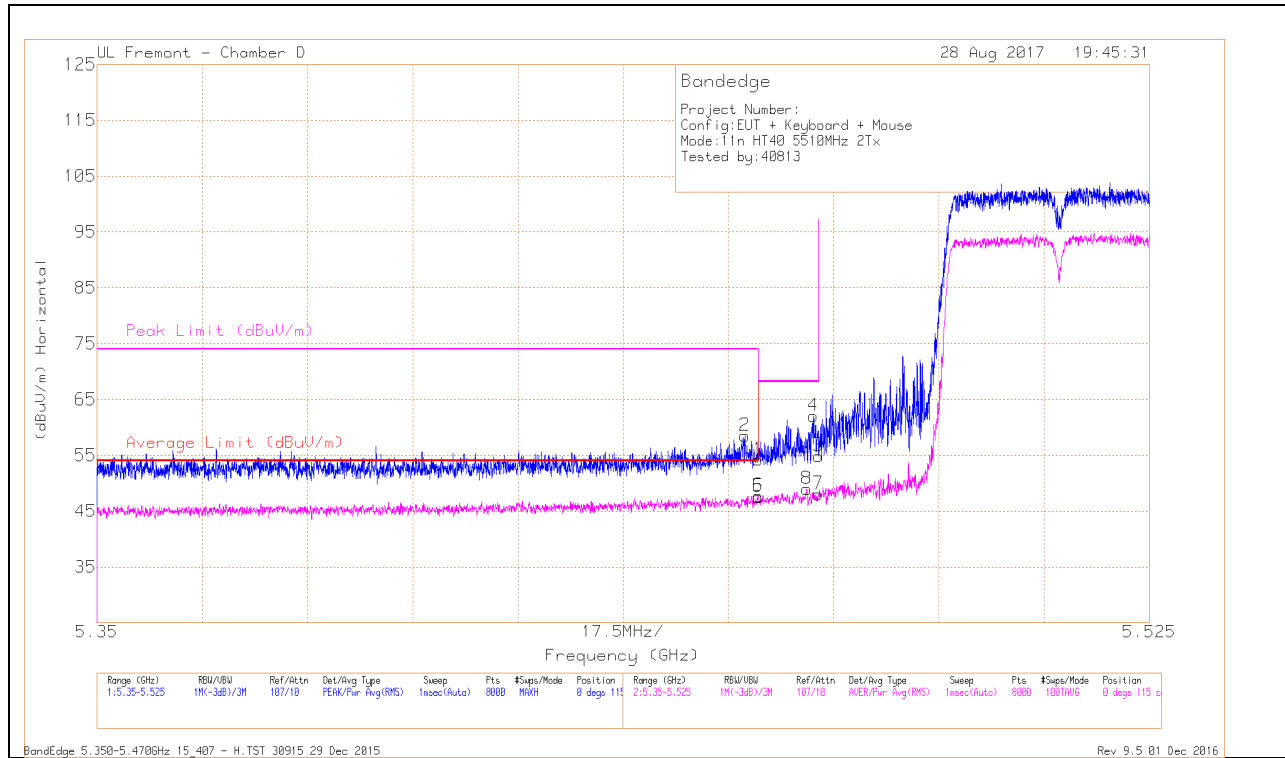


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.73	Pk	34.4	-17.9	0	54.23	-	-	74	-19.77	0	115	H
2	* 5.458	42.08	Pk	34.4	-18	0	58.48	-	-	74	-15.52	0	115	H
5	* 5.46	30.85	RMS	34.4	-17.9	.18	47.53	54	-6.47	-	-	0	115	H
6	* 5.46	31.03	RMS	34.4	-17.9	.18	47.71	54	-6.29	-	-	0	115	H
8	5.468	32.29	RMS	34.4	-17.9	.18	48.97	54	-5.03	-	-	0	115	H
4	5.469	45.53	Pk	34.4	-17.9	0	62.03	-	-	68.2	-6.17	0	115	H
3	5.47	38.36	Pk	34.4	-17.9	0	54.86	-	-	68.2	-13.34	0	115	H
7	5.47	31.35	RMS	34.4	-17.9	.18	48.03	54	-5.97	-	-	0	115	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

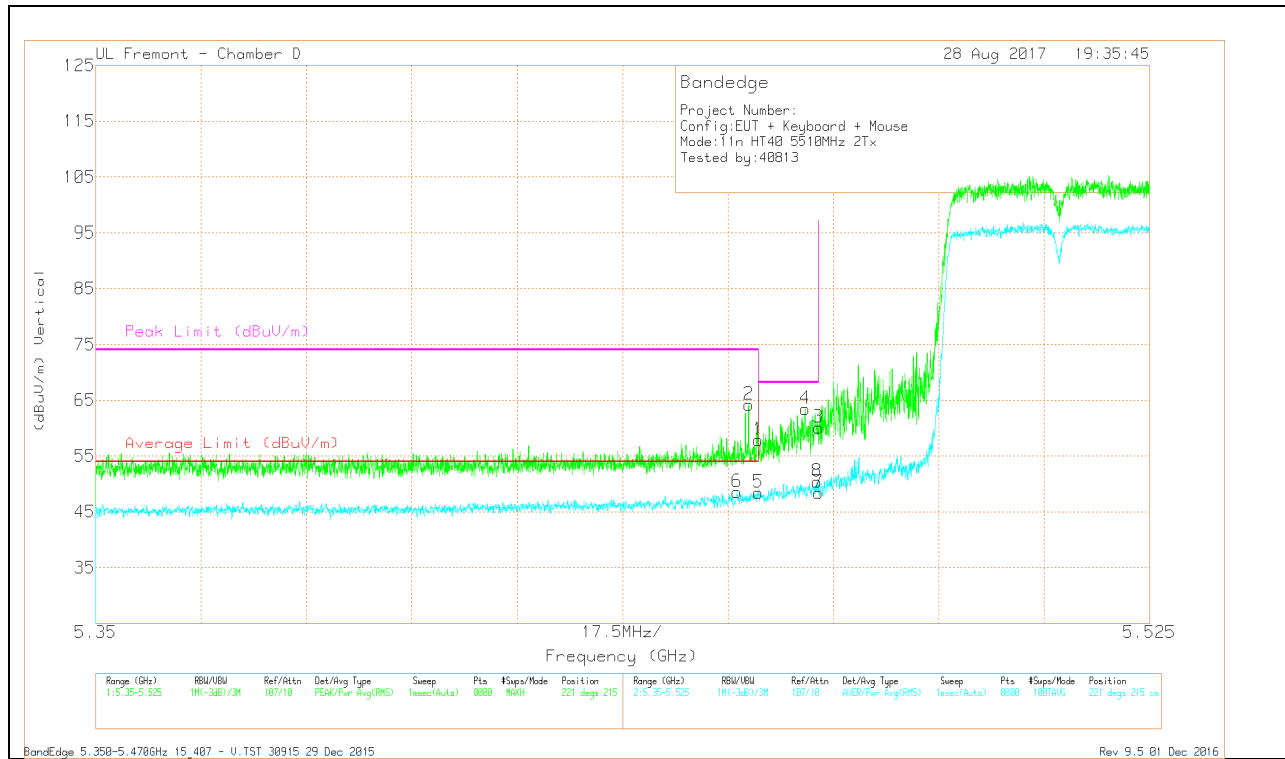


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.35	Pk	34.4	-17.9	0	57.85	-	-	74	-16.15	221	215	V
2	* 5.458	47.78	Pk	34.4	-18	0	64.18	-	-	74	-9.82	221	215	V
5	* 5.46	31.7	RMS	34.4	-17.9	.18	48.38	54	-5.62	-	-	221	215	V
6	* 5.457	32.02	RMS	34.4	-18	.18	48.6	54	-5.4	-	-	221	215	V
4	5.468	46.99	Pk	34.4	-17.9	0	63.49	-	-	68.2	-4.71	221	215	V
3	5.47	43.57	Pk	34.4	-17.9	0	60.07	-	-	68.2	-8.13	221	215	V
7	5.47	31.7	RMS	34.4	-17.9	.18	48.38	54	-5.62	-	-	221	215	V
8	5.47	33.75	RMS	34.4	-17.9	.18	50.43	54	-3.57	-	-	221	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

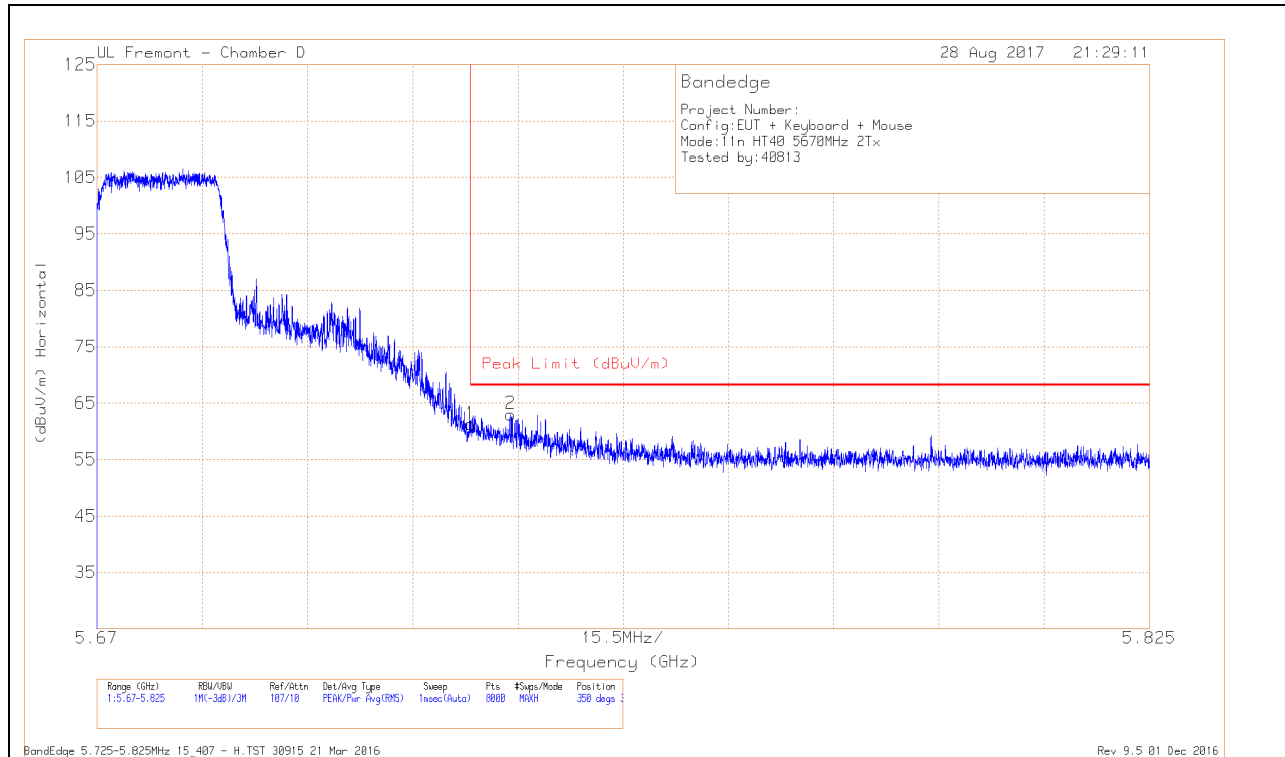

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.96	Pk	34.8	-17.5	0	61.26	68.2	-6.94	350	323	H
2	5.731	45.73	Pk	34.8	-17.5	0	63.03	68.2	-5.17	350	323	H

Pk - Peak detector

VERTICAL RESULT

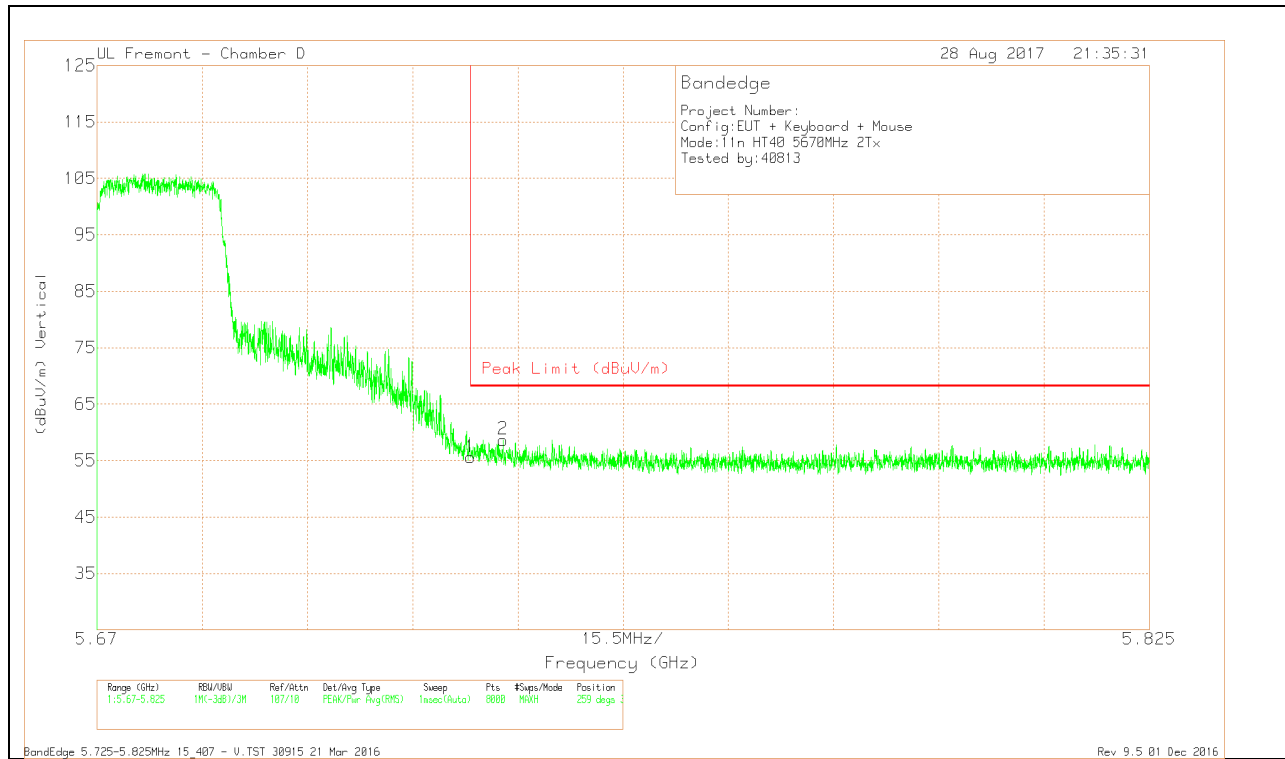


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.28	Pk	34.8	-17.5	0	55.58	68.2	-12.62	259	343	V
2	5.73	41.38	Pk	34.8	-17.5	0	58.68	68.2	-9.52	259	343	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF2 SDM Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

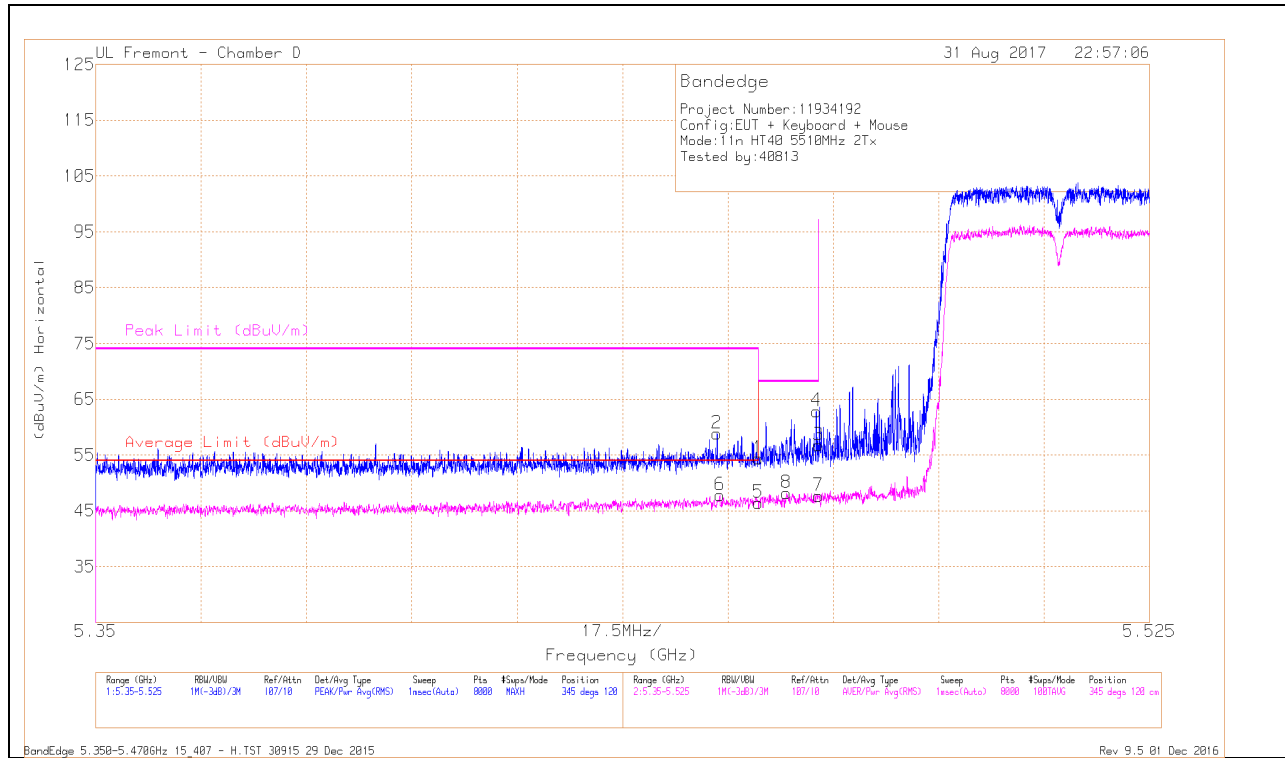


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.84	Pk	34.4	-17.9	0	54.34	-	-	74	-19.66	345	120	H
2	* 5.453	42.43	Pk	34.4	-18	0	58.83	-	-	74	-15.17	345	120	H
5	* 5.46	29.74	RMS	34.4	-17.9	.29	46.53	54	-7.47	-	-	345	120	H
6	* 5.454	31.29	RMS	34.4	-18	.29	47.98	54	-6.02	-	-	345	120	H
8	5.465	31.46	RMS	34.4	-17.9	.29	48.25	-	-	-	-	345	120	H
3	5.47	40.25	Pk	34.4	-17.9	0	56.75	-	-	68.2	-11.45	345	120	H
4	5.47	46.39	Pk	34.4	-17.9	0	62.89	-	-	68.2	-5.31	345	120	H
7	5.47	31.03	RMS	34.4	-17.9	.29	47.82	54	-6.18	-	-	345	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

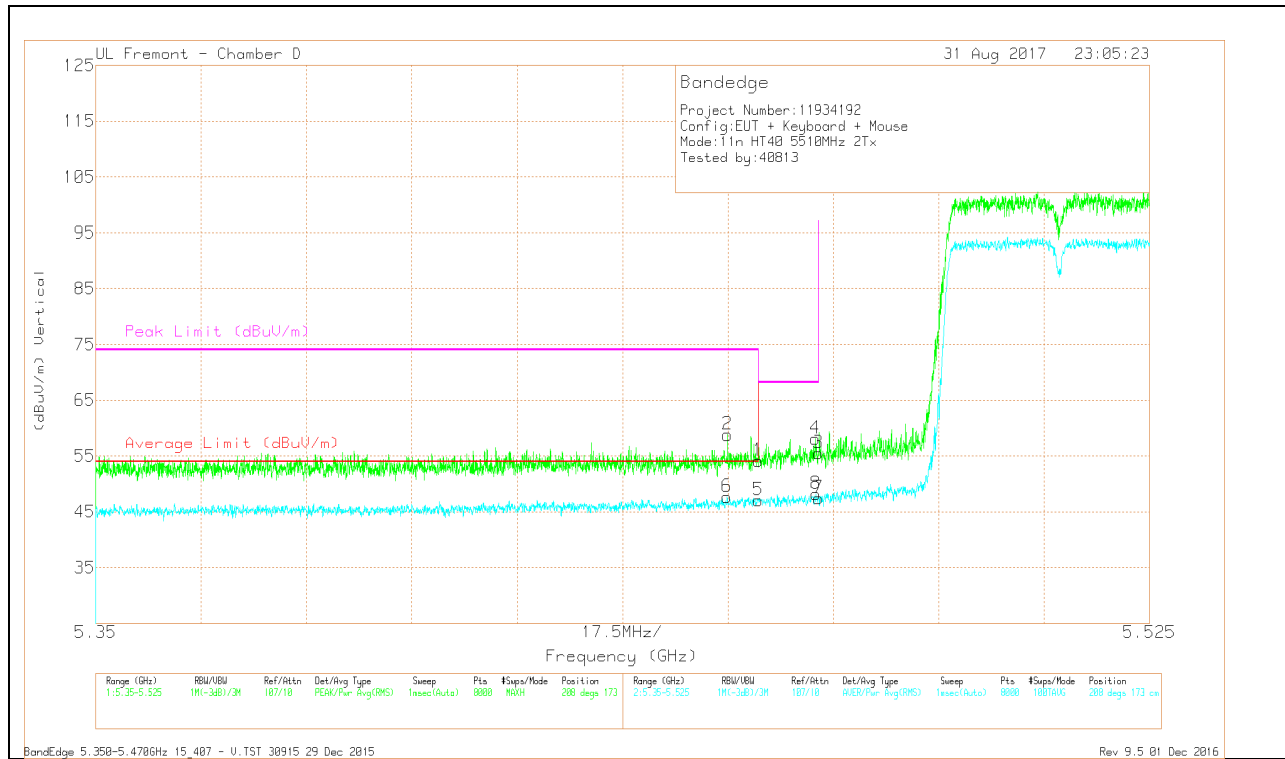


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.65	Pk	34.4	-17.9	0	54.15	-	-	74	-19.85	208	173	V
2	* 5.455	42.4	Pk	34.4	-18	0	58.8	-	-	74	-15.2	208	173	V
5	* 5.46	30.36	RMS	34.4	-17.9	.29	47.15	54	-6.85	-	-	208	173	V
6	* 5.455	31.1	RMS	34.4	-18	.29	47.79	54	-6.21	-	-	208	173	V
4	5.469	41.6	Pk	34.4	-17.9	0	58.1	-	-	68.2	-10.1	208	173	V
3	5.47	39.04	Pk	34.4	-17.9	0	55.54	-	-	68.2	-12.66	208	173	V
7	5.47	30.71	RMS	34.4	-17.9	.29	47.5	54	-6.5	-	-	208	173	V
8	5.47	31.49	RMS	34.4	-17.9	.29	48.28	54	-5.72	-	-	208	173	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

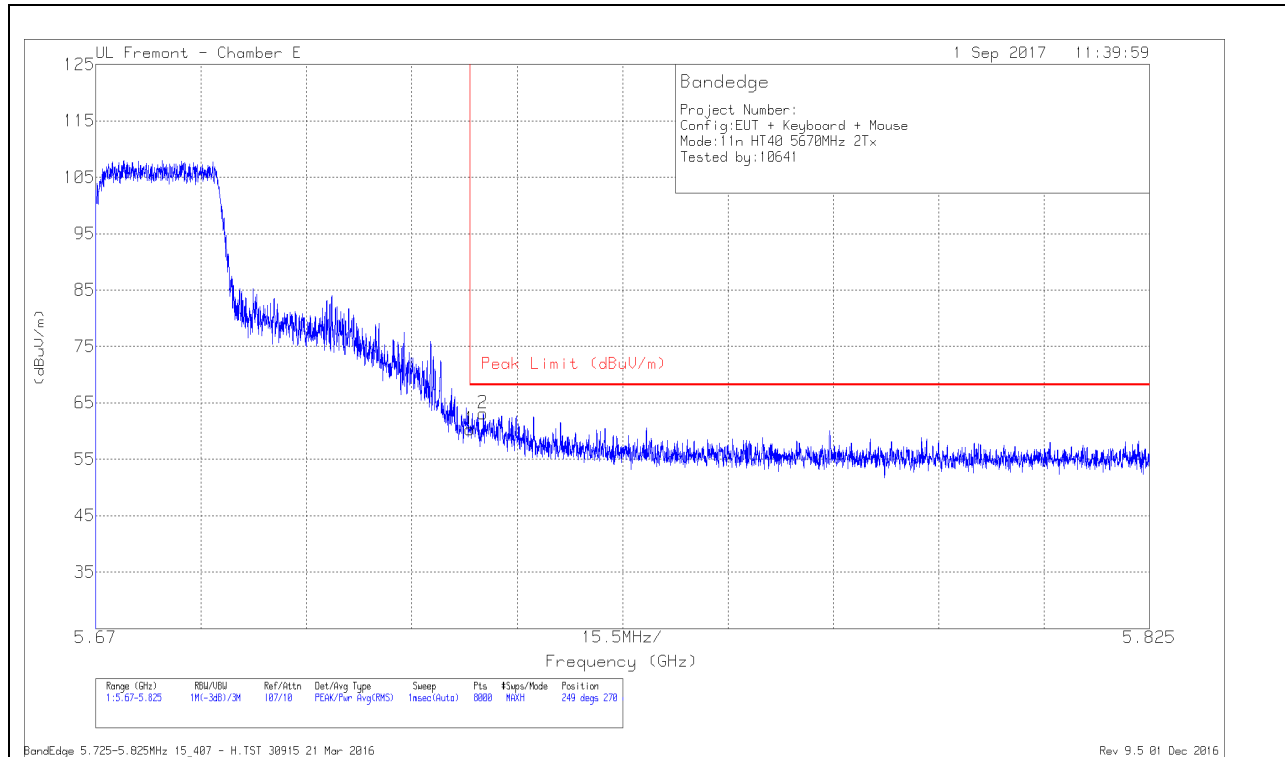

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.76	PK	35.1	-19.5	0	60.36	68.2	-7.84	249	270	H
2	5.727	47.51	PK	35.1	-19.5	0	63.11	68.2	-5.09	249	270	H

Pk - Peak detector

VERTICAL RESULT

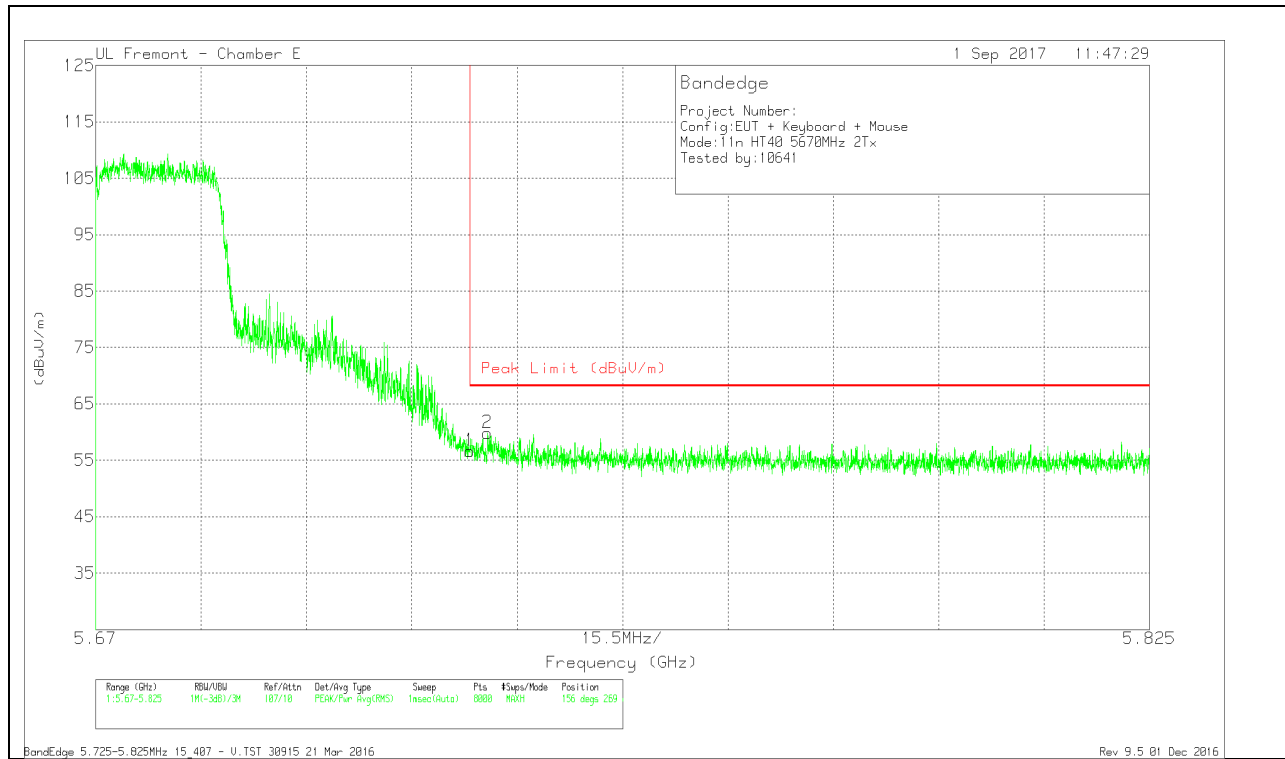


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.98	PK	35.1	-19.5	0	56.58	68.2	-11.62	156	269	V
2	5.728	44.19	PK	35.1	-19.5	0	59.79	68.2	-8.41	156	269	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF2 BF Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

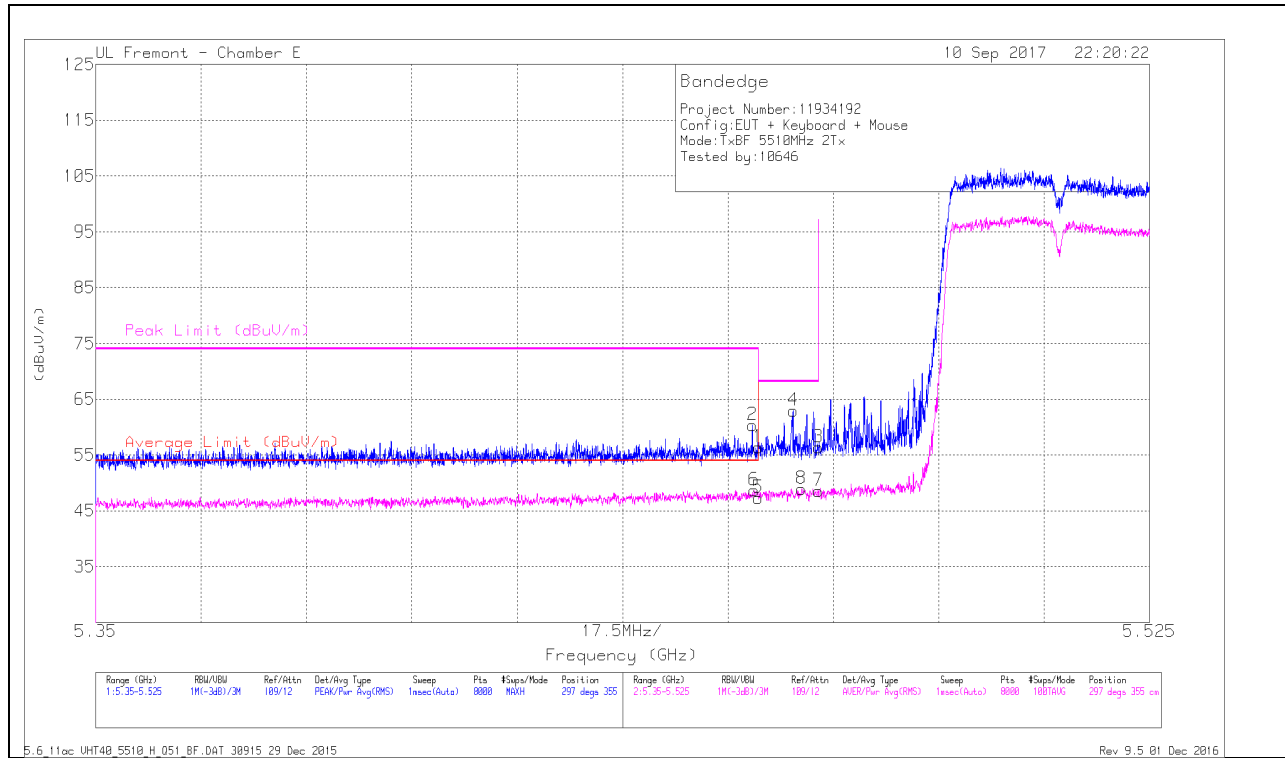


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.459	44.14	Pk	35.1	-18.9	0	60.34	-	-	74	-13.66	297	355	H
6	* 5.459	32.22	RMS	35.1	-18.9	.11	48.57	54	-5.43	-	-	297	355	H
1	* 5.46	40.22	Pk	35.1	-18.9	0	56.42	-	-	74	-17.58	297	355	H
5	* 5.46	30.88	RMS	35.1	-18.9	.11	47.23	54	-6.77	-	-	297	355	H
4	5.466	46.71	Pk	35.1	-18.9	0	62.91	-	-	68.2	-5.29	297	355	H
8	5.467	32.52	RMS	35.1	-18.9	.11	48.87	54	-5.13	-	-	297	355	H
3	5.47	40.17	Pk	35.1	-18.9	0	56.37	-	-	68.2	-11.83	297	355	H
7	5.47	32.15	RMS	35.1	-18.9	.11	48.5	54	-5.5	-	-	297	355	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

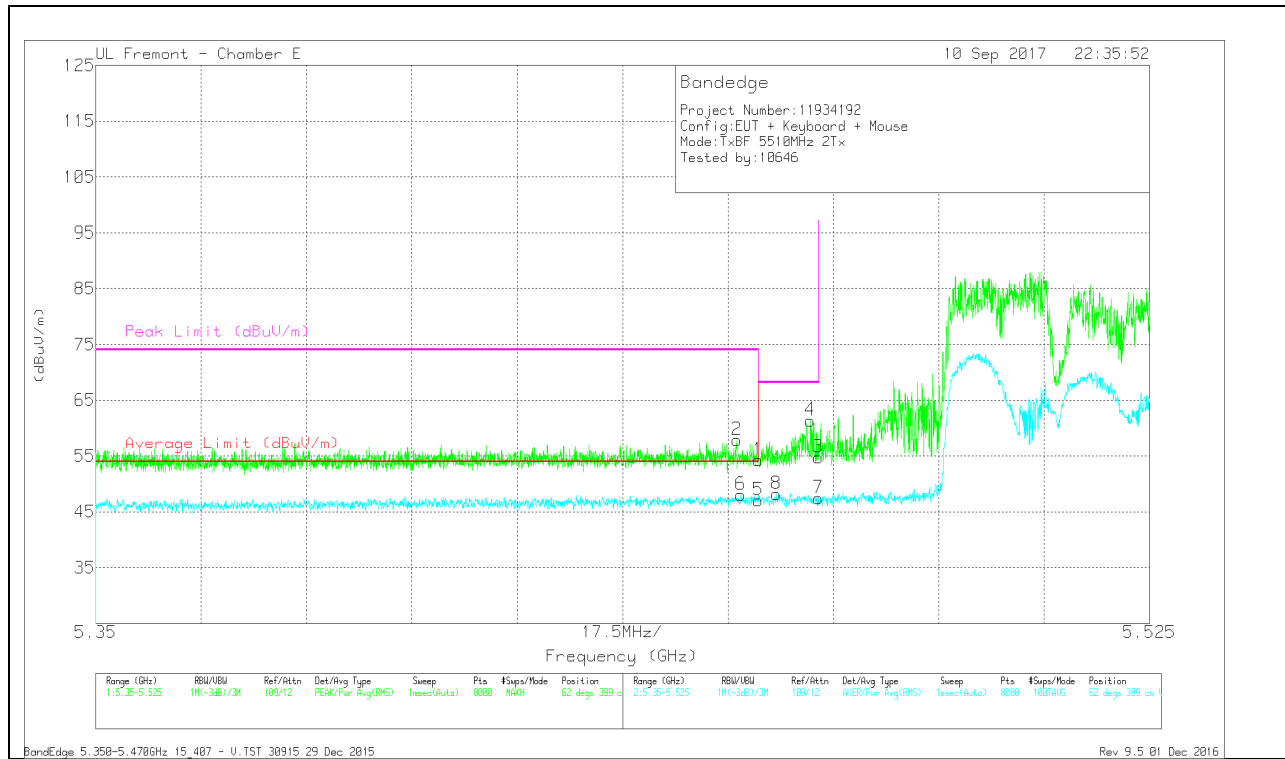


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.456	41.61	Pk	35.1	-18.9	0	57.81	-	-	74	-16.19	62	399	V
6	* 5.457	31.64	RMS	35.1	-18.9	.11	47.99	54	-6.01	-	-	62	399	V
1	* 5.46	38.09	Pk	35.1	-18.9	0	54.29	-	-	74	-19.71	62	399	V
5	* 5.46	30.56	RMS	35.1	-18.9	.11	46.91	54	-7.09	-	-	62	399	V
8	5.463	31.73	RMS	35.1	-18.9	.11	48.08	54	-5.92	-	-	62	399	V
4	5.469	45.2	Pk	35.1	-18.9	0	61.4	-	-	68.2	-6.8	62	399	V
3	5.47	38.53	Pk	35.1	-18.9	0	54.73	-	-	68.2	-13.47	62	399	V
7	5.47	30.93	RMS	35.1	-18.9	.11	47.28	54	-6.72	-	-	62	399	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

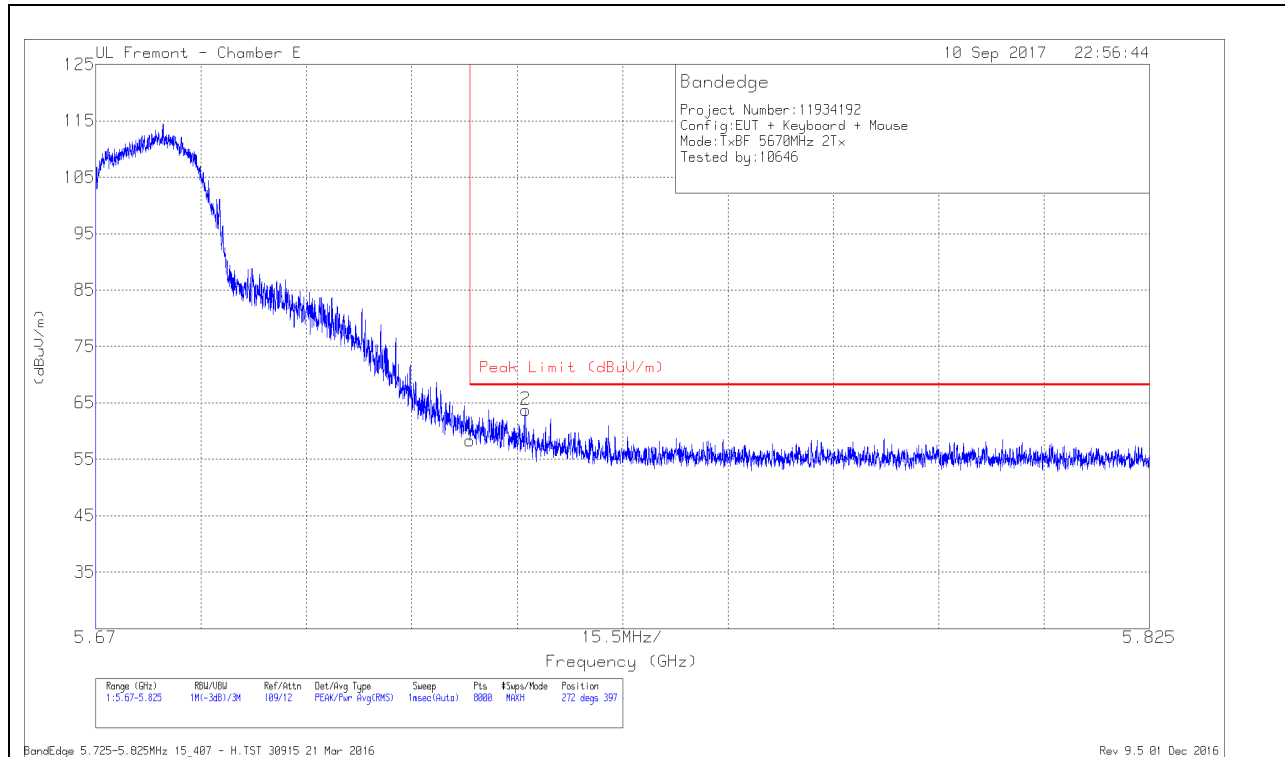

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.34	Pk	35.1	-19.1	0	58.34	68.2	-9.86	272	397	H
2	5.733	47.78	Pk	35.1	-19.1	0	63.78	68.2	-4.42	272	397	H

Pk - Peak detector

VERTICAL RESULT

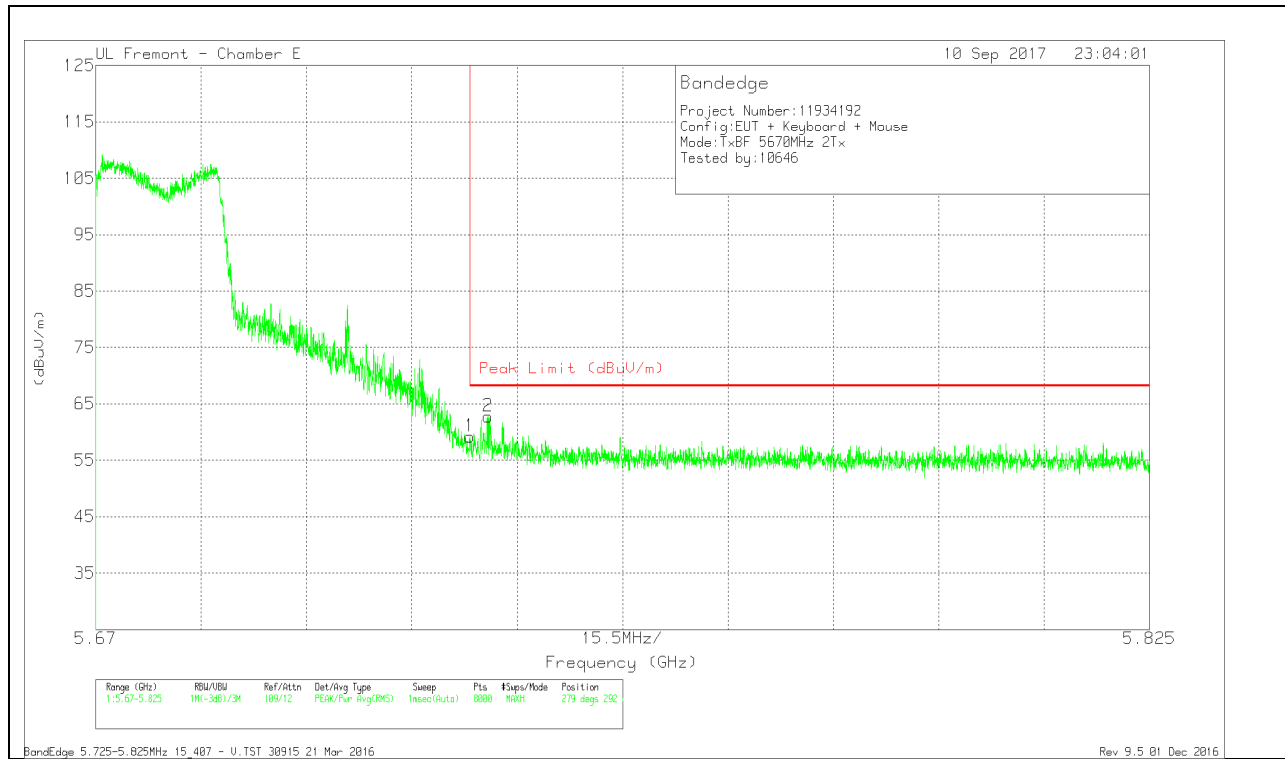


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.24	PK	35.1	-19.1	0	59.24	68.2	-8.96	279	292	V
2	5.728	46.78	PK	35.1	-19.1	0	62.78	68.2	-5.42	279	292	V

Pk - Peak detector

2TX Antenna WF3 + Antenna WF2 CDD Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

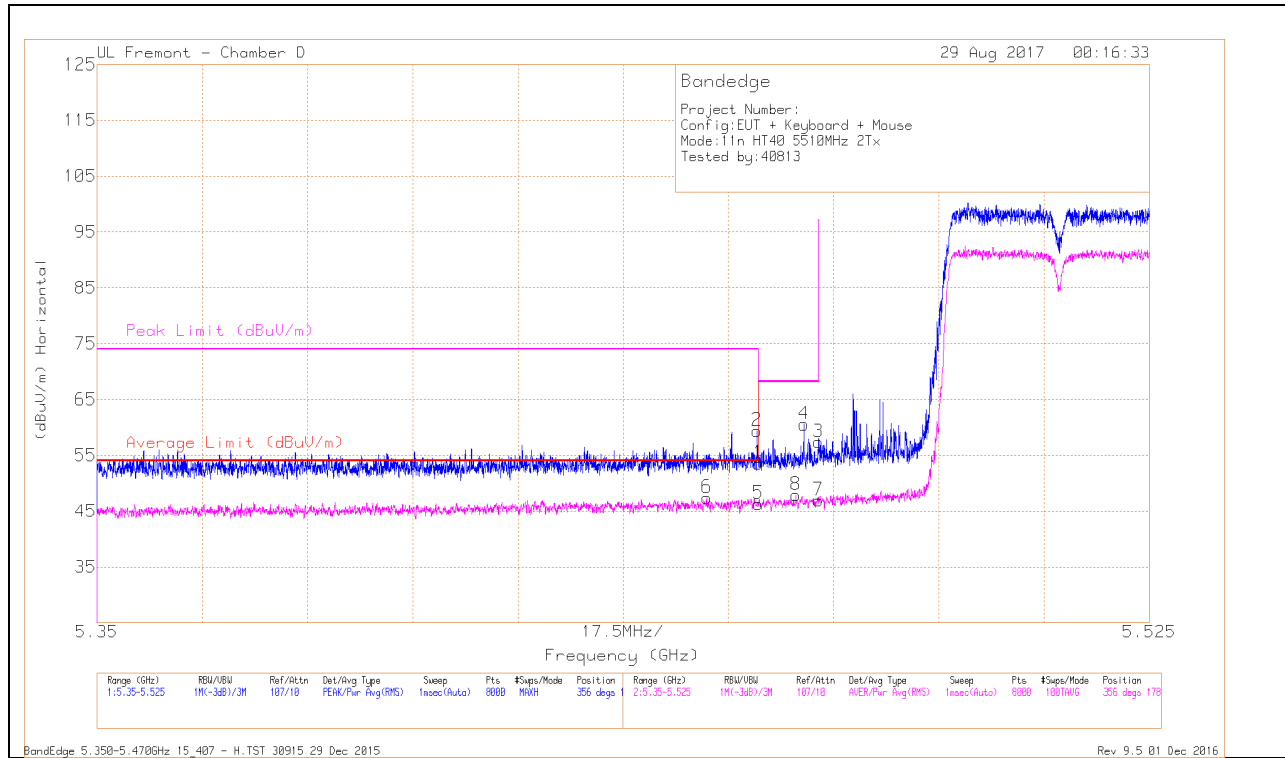


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.451	30.85	RMS	34.4	-18	-18	47.43	54	-6.57	-	-	356	178	H
1	* 5.46	37.05	Pk	34.4	-17.9	0	53.55	-	-	74	-20.45	356	178	H
2	* 5.46	42.9	Pk	34.4	-17.9	0	59.4	-	-	74	-14.6	356	178	H
5	* 5.46	29.65	RMS	34.4	-17.9	-18	46.33	54	-7.67	-	-	356	178	H
8	5.466	31.23	RMS	34.4	-17.9	-18	47.91	-	-	-	-	356	178	H
4	5.468	44.05	Pk	34.4	-17.9	0	60.55	-	-	68.2	-7.65	356	178	H
3	5.47	40.88	Pk	34.4	-17.9	0	57.38	-	-	68.2	-10.82	356	178	H
7	5.47	30.26	RMS	34.4	-17.9	-18	46.94	-	-	-	-	356	178	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

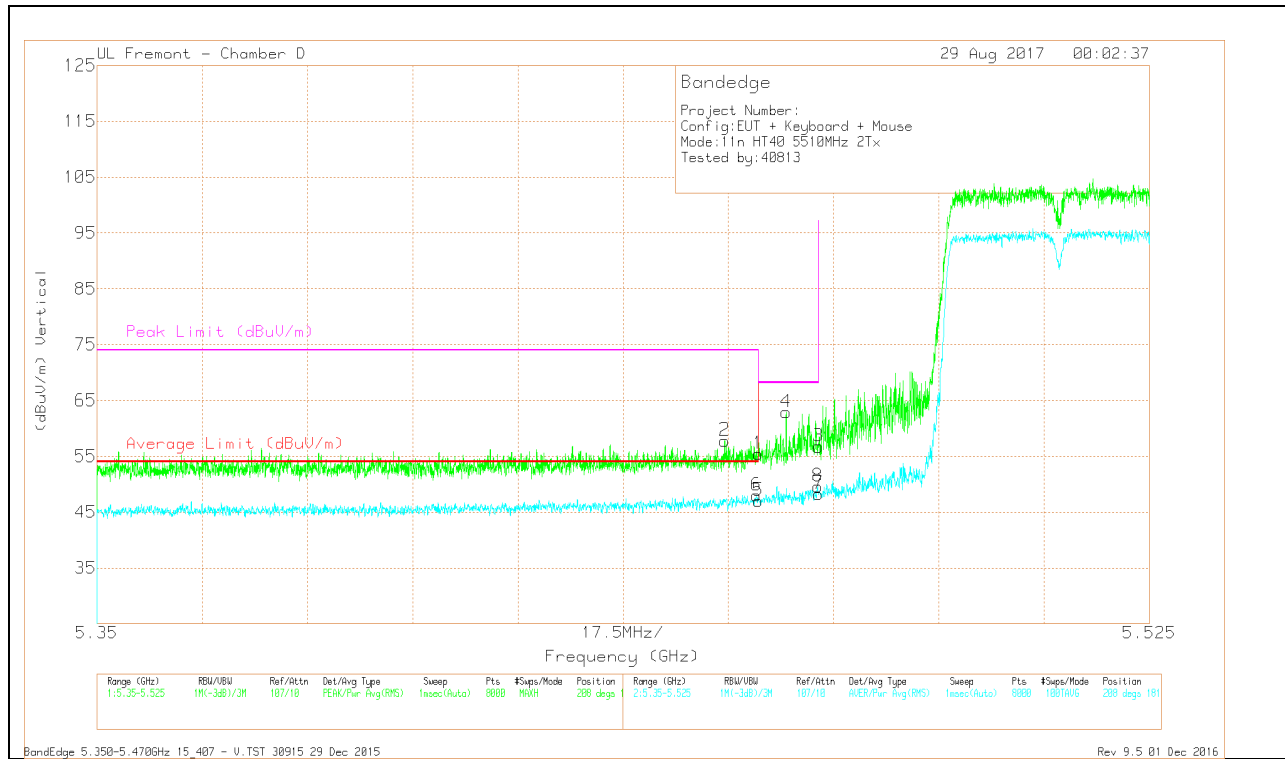


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.95	Pk	34.4	-17.9	0	55.45	-	-	74	-18.55	208	181	V
2	* 5.454	41.4	Pk	34.4	-18	0	57.8	-	-	74	-16.2	208	181	V
5	* 5.46	30.38	RMS	34.4	-17.9	.18	47.06	54	-6.94	-	-	208	181	V
6	* 5.46	31.4	RMS	34.4	-18	.18	47.98	54	-6.02	-	-	208	181	V
4	5.465	46.41	Pk	34.4	-17.9	0	62.91	-	-	68.2	-5.29	208	181	V
3	5.47	40.25	Pk	34.4	-17.9	0	56.75	-	-	68.2	-11.45	208	181	V
7	5.47	31.6	RMS	34.4	-17.9	.18	48.28	-	-	-	-	208	181	V
8	5.47	32.93	RMS	34.4	-17.9	.18	49.61	-	-	-	-	208	181	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

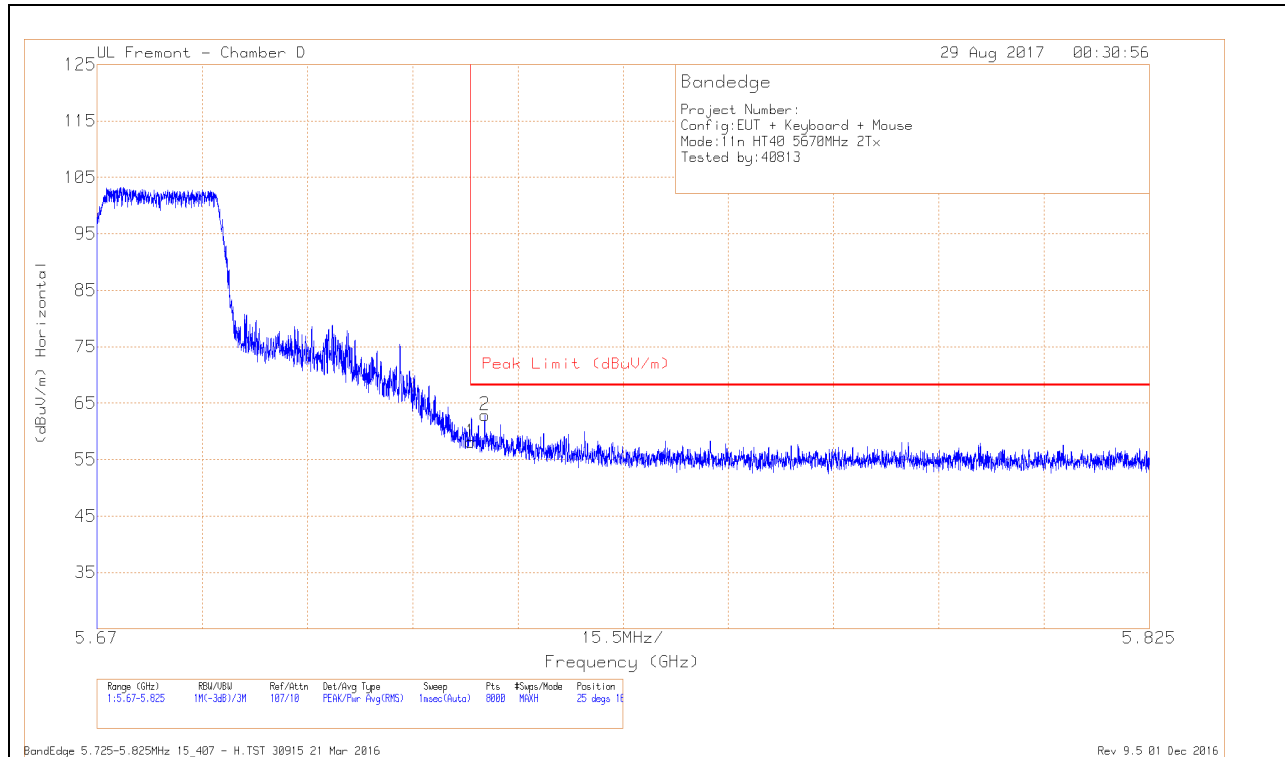

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.84	Pk	34.8	-17.5	0	58.14	68.2	-10.06	25	169	H
2	5.727	45.58	Pk	34.8	-17.5	0	62.88	68.2	-5.32	25	169	H

Pk - Peak detector

VERTICAL RESULT

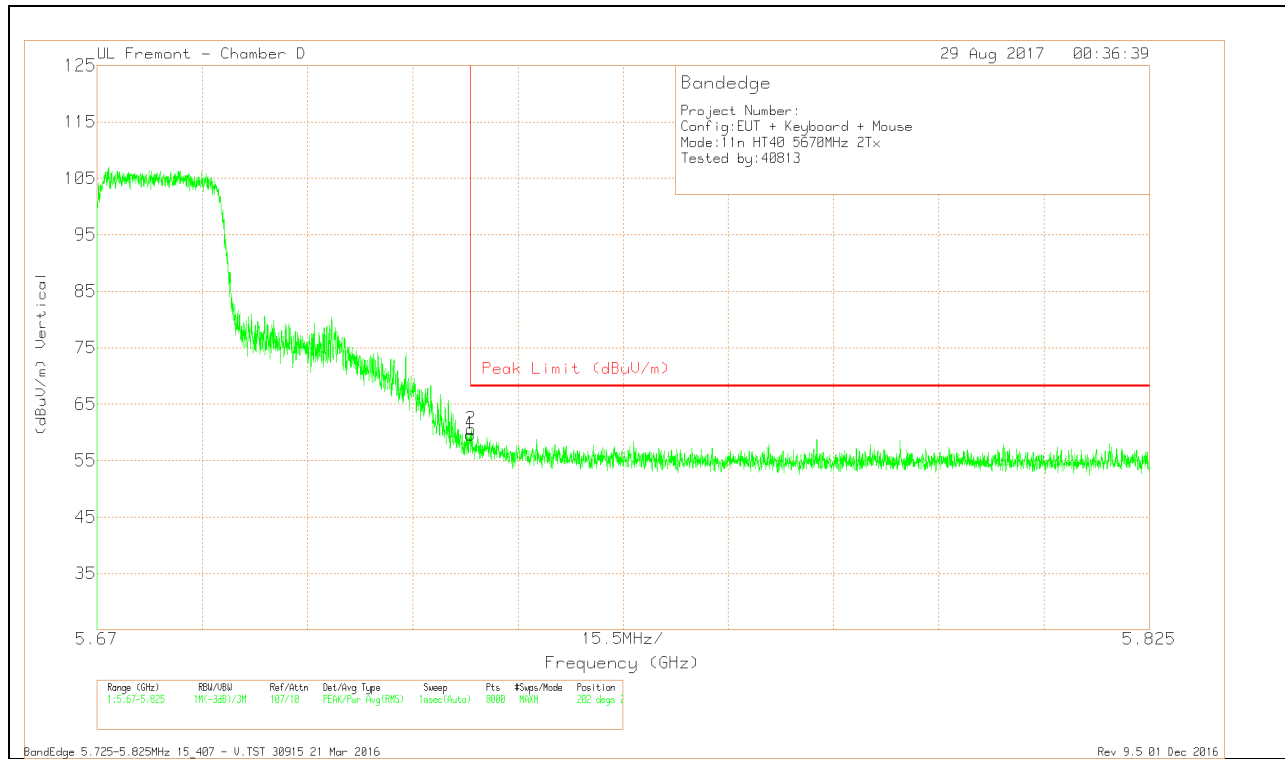


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.35	Pk	34.8	-17.5	0	59.65	68.2	-8.55	202	218	V
2	5.725	43.25	Pk	34.8	-17.5	0	60.55	68.2	-7.65	202	218	V

Pk - Peak detector

2TX Antenna WF3 + Antenna WF2 SDM Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

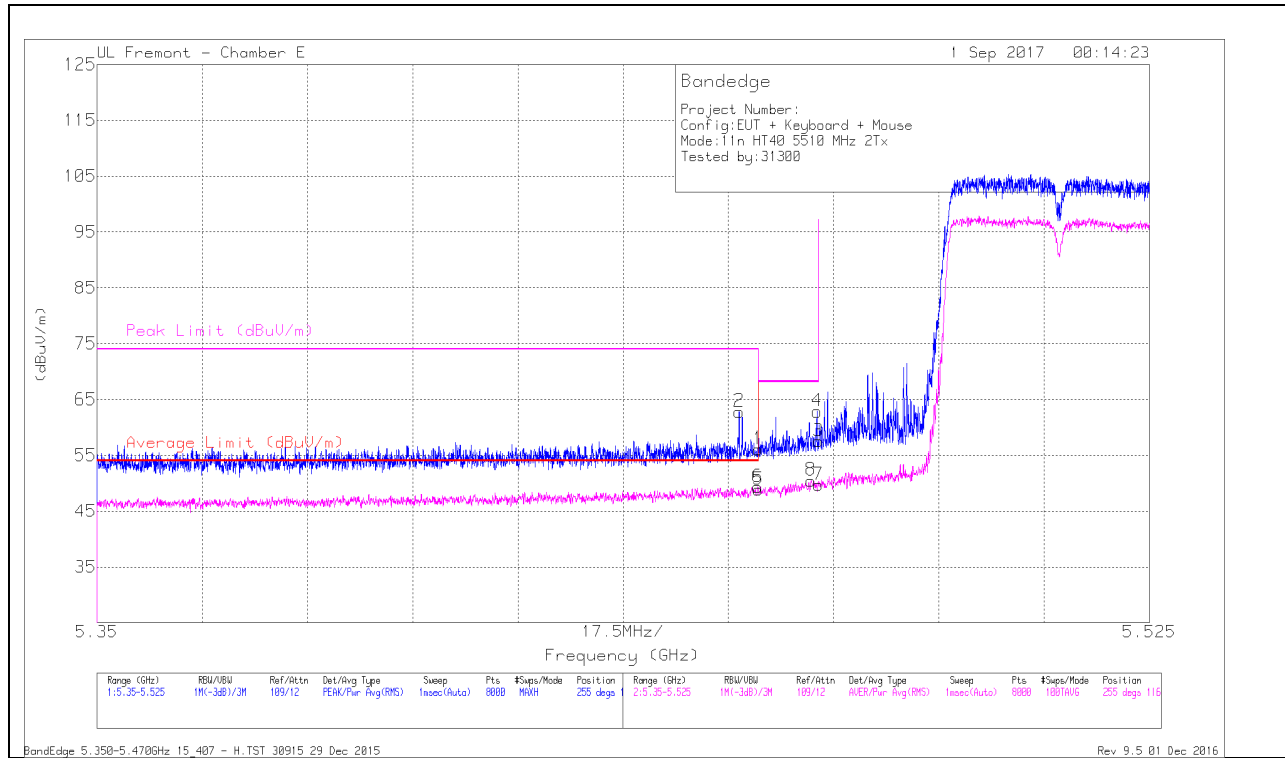


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.457	46.64	Pk	35.1	-18.9	0	62.84	-	-	74	-11.16	255	116	H
1	* 5.46	39.89	Pk	35.1	-18.9	0	56.09	-	-	74	-17.91	255	116	H
5	* 5.46	32.49	RMS	35.1	-18.9	.29	48.98	54	-5.02	-	-	255	116	H
6	* 5.46	32.96	RMS	35.1	-18.9	.29	49.45	54	-4.55	-	-	255	116	H
8	5.469	34.12	RMS	35.1	-18.9	.29	50.61	54	-3.39	-	-	255	116	H
3	5.47	41.31	Pk	35.1	-18.9	0	57.51	-	-	68.2	-10.69	255	116	H
4	5.47	46.67	Pk	35.1	-18.9	0	62.87	-	-	68.2	-5.33	255	116	H
7	5.47	33.32	RMS	35.1	-18.9	.29	49.81	54	-4.19	-	-	255	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

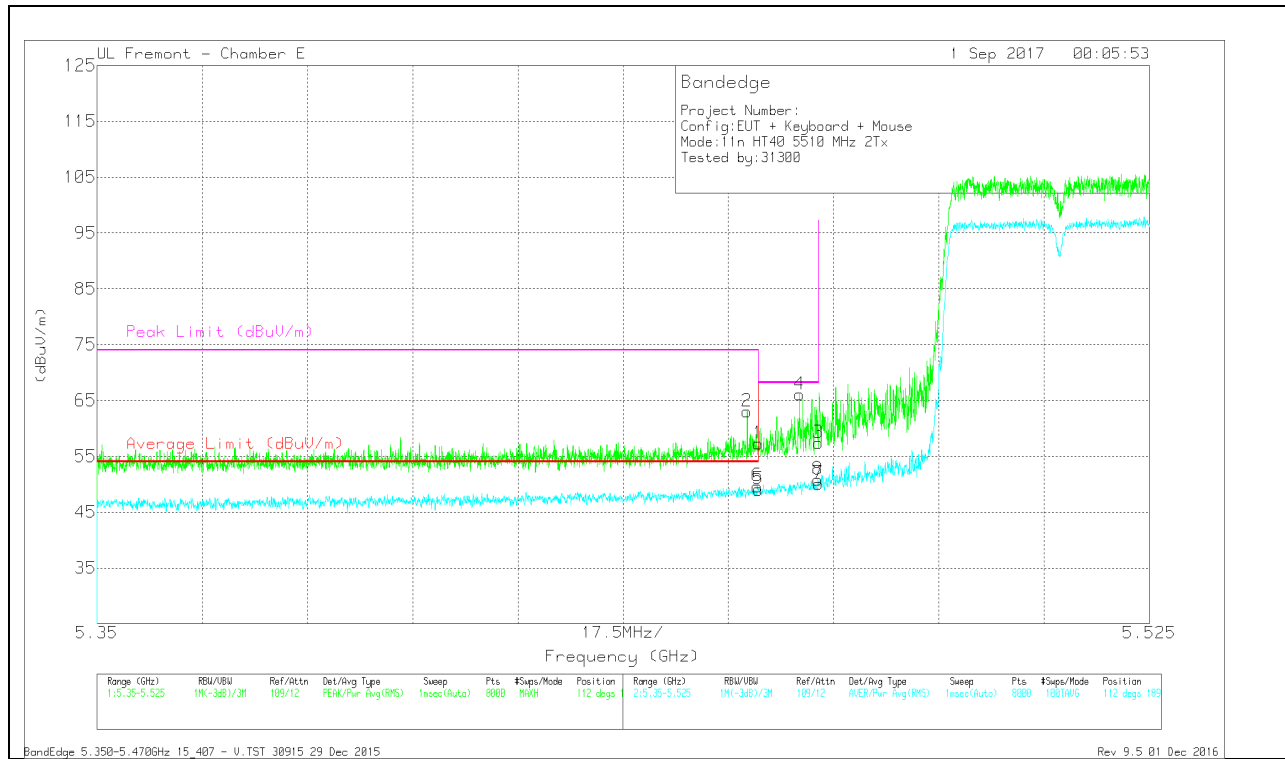


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.458	46.81	Pk	35.1	-18.9	0	63.01	-	-	74	-10.99	112	189	V
1	* 5.46	41.08	Pk	35.1	-18.9	0	57.28	-	-	74	-16.72	112	189	V
5	* 5.46	32.69	RMS	35.1	-18.9	.29	49.18	54	-4.82	-	-	112	189	V
6	* 5.46	33.27	RMS	35.1	-18.9	.29	49.76	54	-4.24	-	-	112	189	V
4	5.467	49.88	Pk	35.1	-18.9	0	66.08	-	-	68.2	-2.12	112	189	V
3	5.47	41.18	Pk	35.1	-18.9	0	57.38	-	-	68.2	-10.82	112	189	V
7	5.47	33.73	RMS	35.1	-18.9	.29	50.22	54	-3.78	-	-	112	189	V
8	5.47	34.45	RMS	35.1	-18.9	.29	50.94	54	-3.06	-	-	112	189	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

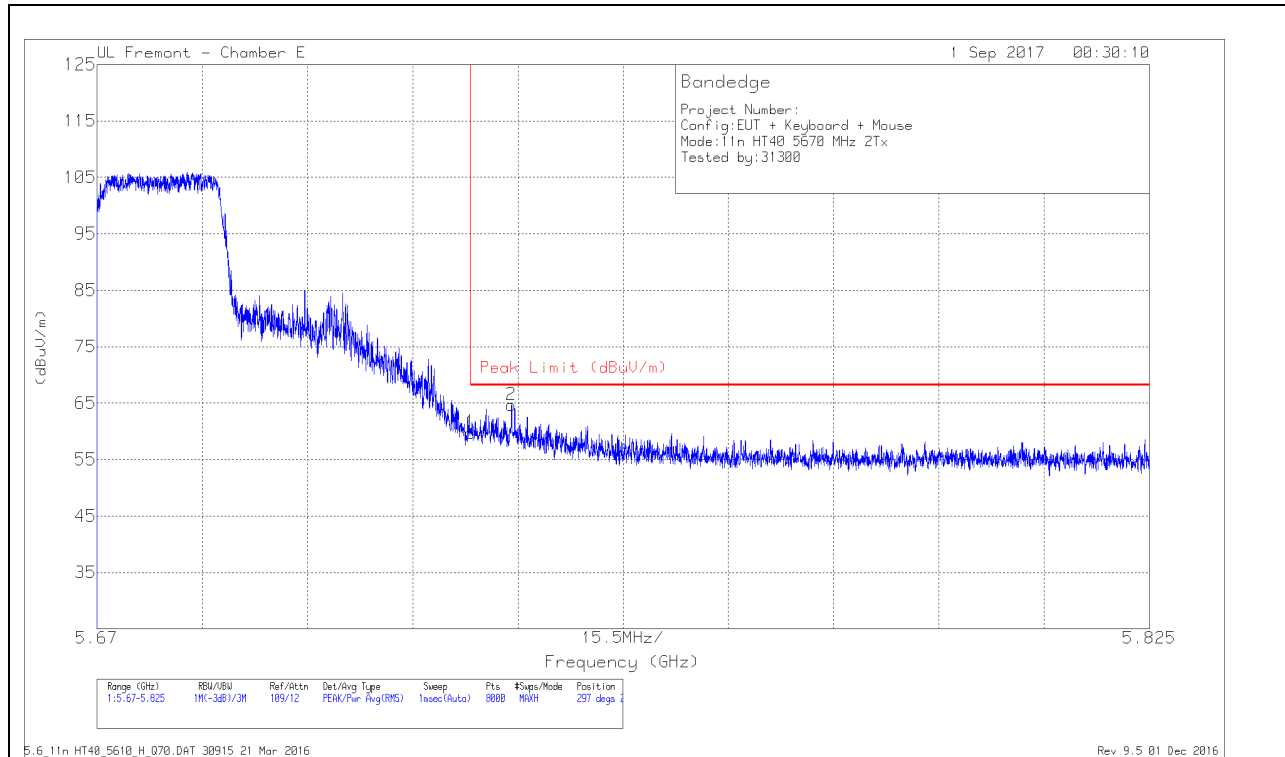

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.73	Pk	35.1	-19.1	0	59.73	68.2	-8.47	297	214	H
2	5.731	48.65	Pk	35.1	-19.1	0	64.65	68.2	-3.55	297	214	H

Pk - Peak detector

VERTICAL RESULT

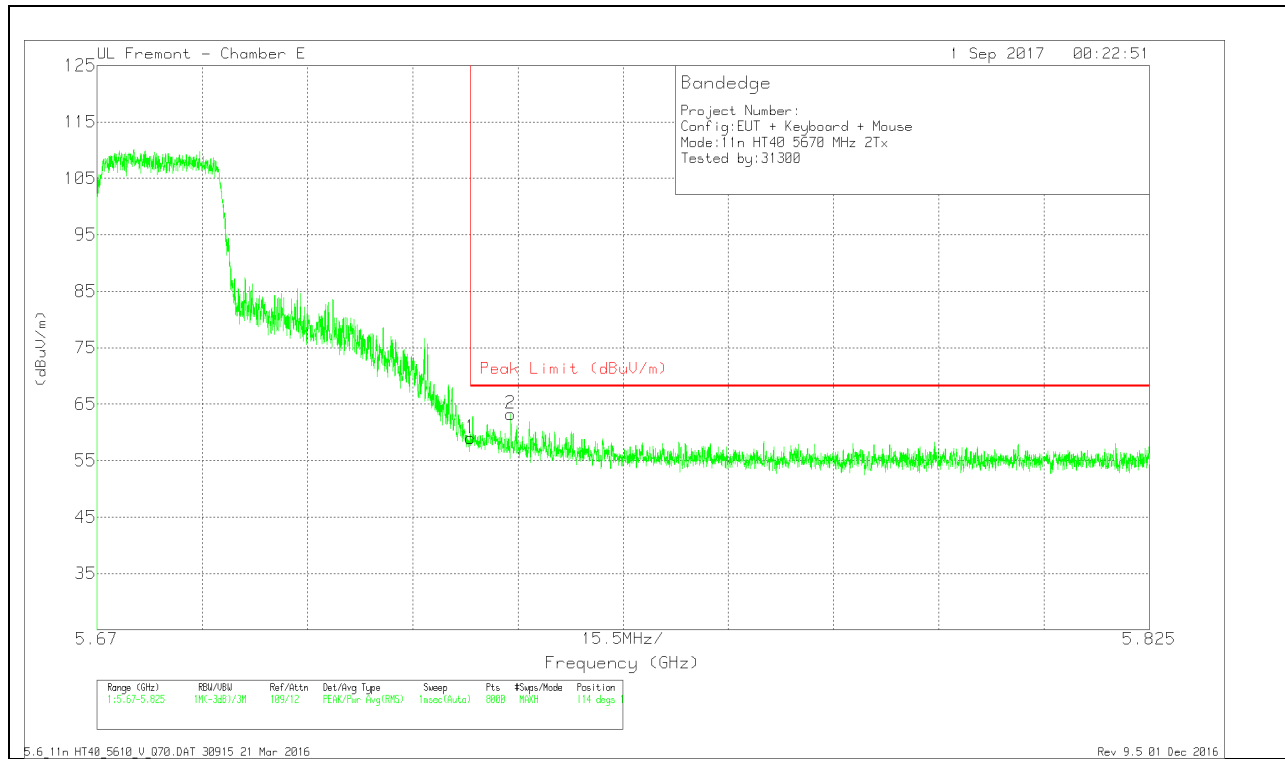


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.03	PK	35.1	-19.1	0	59.03	68.2	-9.17	114	161	V
2	5.731	47.28	PK	35.1	-19.1	0	63.28	68.2	-4.92	114	161	V

Pk - Peak detector

2TX Antenna WF3 + Antenna WF2 BF Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

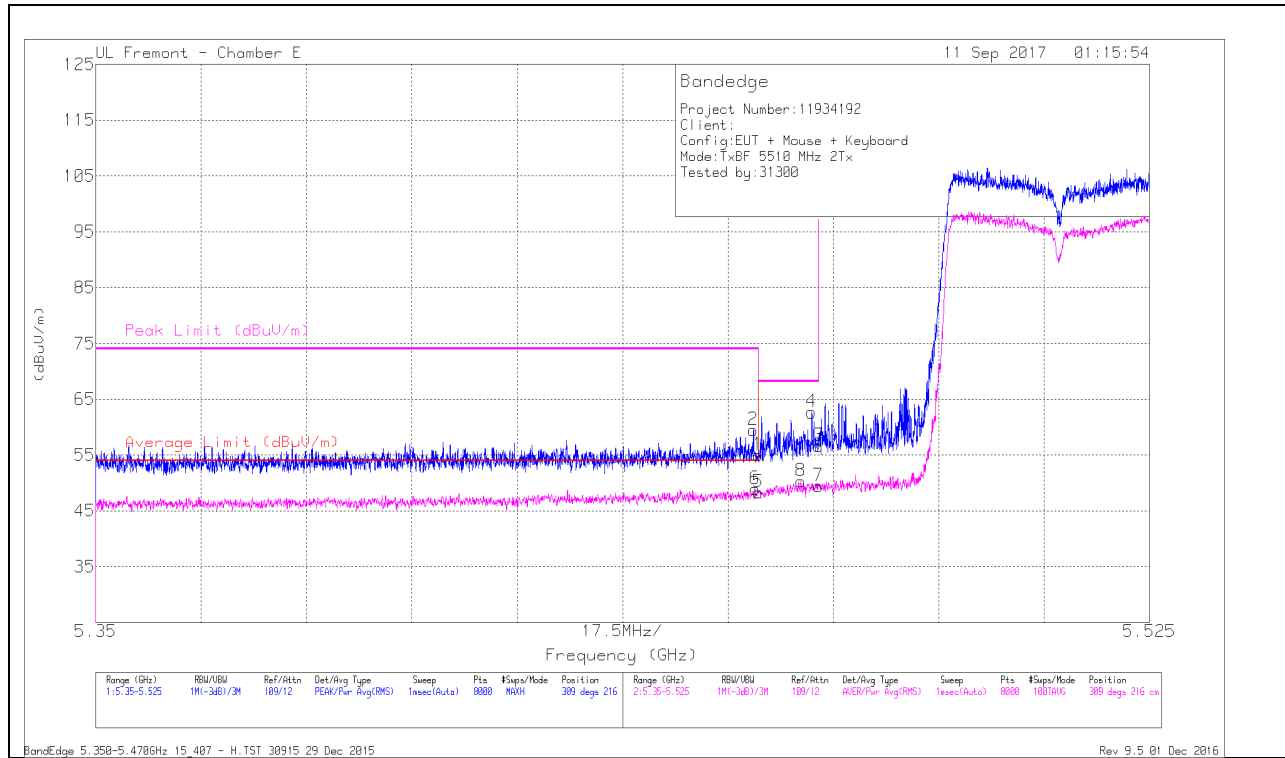


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.459	43.31	Pk	35.1	-18.9	0	59.51	-	-	74	-14.49	309	216	H
6	* 5.459	32.48	RMS	35.1	-18.9	.11	49.05	54	-5.17	-	-	309	216	H
1	* 5.46	38.84	Pk	35.1	-18.9	0	55.04	-	-	74	-18.96	309	216	H
5	* 5.46	31.87	RMS	35.1	-18.9	.11	48.44	54	-5.78	-	-	309	216	H
8	5.467	33.78	RMS	35.1	-18.9	.11	50.35	54	-3.65	-	-	309	216	H
4	5.469	46.45	Pk	35.1	-18.9	0	62.65	-	-	68.2	-5.55	309	216	H
3	5.47	40.38	Pk	35.1	-18.9	0	56.58	-	-	68.2	-11.62	309	216	H
7	5.47	32.93	RMS	35.1	-18.9	.11	49.5	54	-4.5	-	-	309	216	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

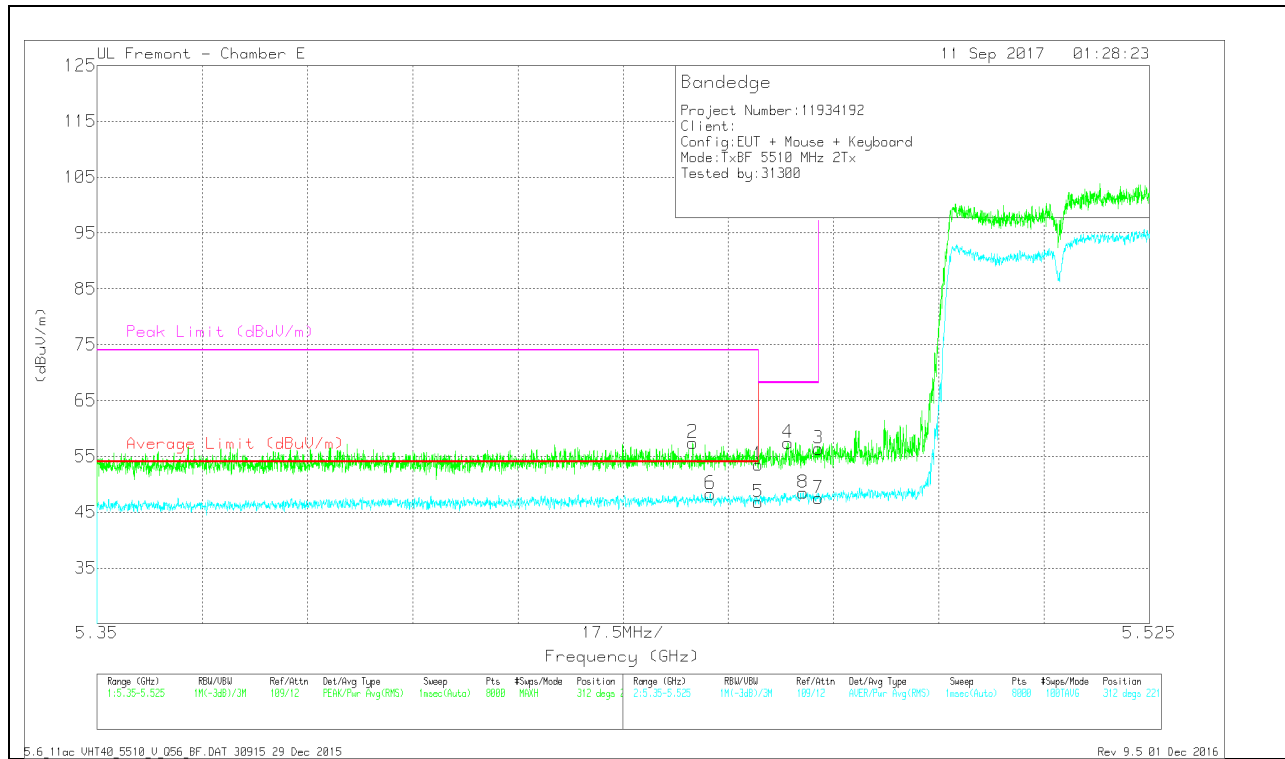


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.449	41.23	Pk	35.1	-18.9	0	57.43	-	-	74	-16.57	312	221	V
6	* 5.452	31.84	RMS	35.1	-18.9	.11	48.15	54	-5.85	-	-	312	221	V
1	* 5.46	37.32	Pk	35.1	-18.9	0	53.52	-	-	74	-20.48	312	221	V
5	* 5.46	30.33	RMS	35.1	-18.9	.11	46.64	54	-7.36	-	-	312	221	V
4	5.465	41.24	Pk	35.1	-18.9	0	57.44	-	-	68.2	-10.76	312	221	V
8	5.467	32.03	RMS	35.1	-18.9	.11	48.34	54	-5.66	-	-	312	221	V
3	5.47	40.18	Pk	35.1	-18.9	0	56.38	-	-	68.2	-11.82	312	221	V
7	5.47	31.04	RMS	35.1	-18.9	.11	47.35	54	-6.65	-	-	312	221	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

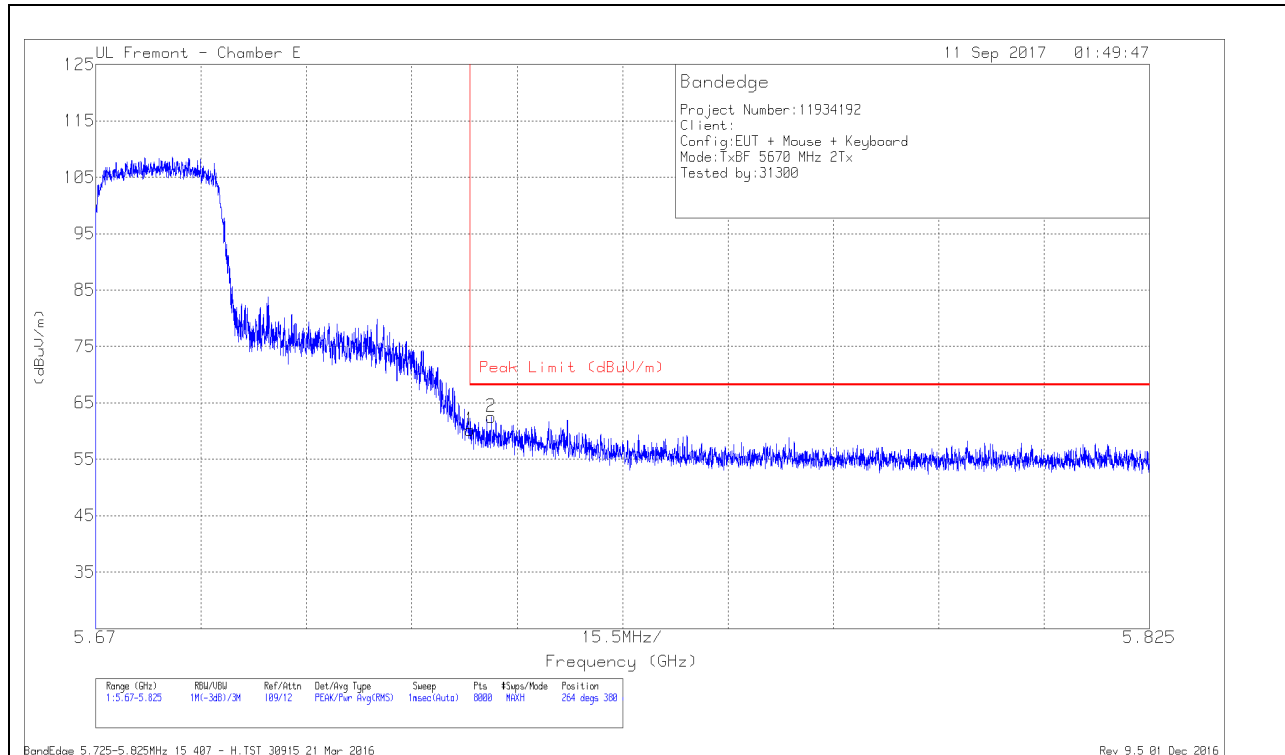

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.23	Pk	35.1	-19.1	0	60.23	68.2	-7.97	264	380	H
2	5.728	46.5	Pk	35.1	-19.1	0	62.5	68.2	-5.7	264	380	H

Pk - Peak detector

VERTICAL RESULT

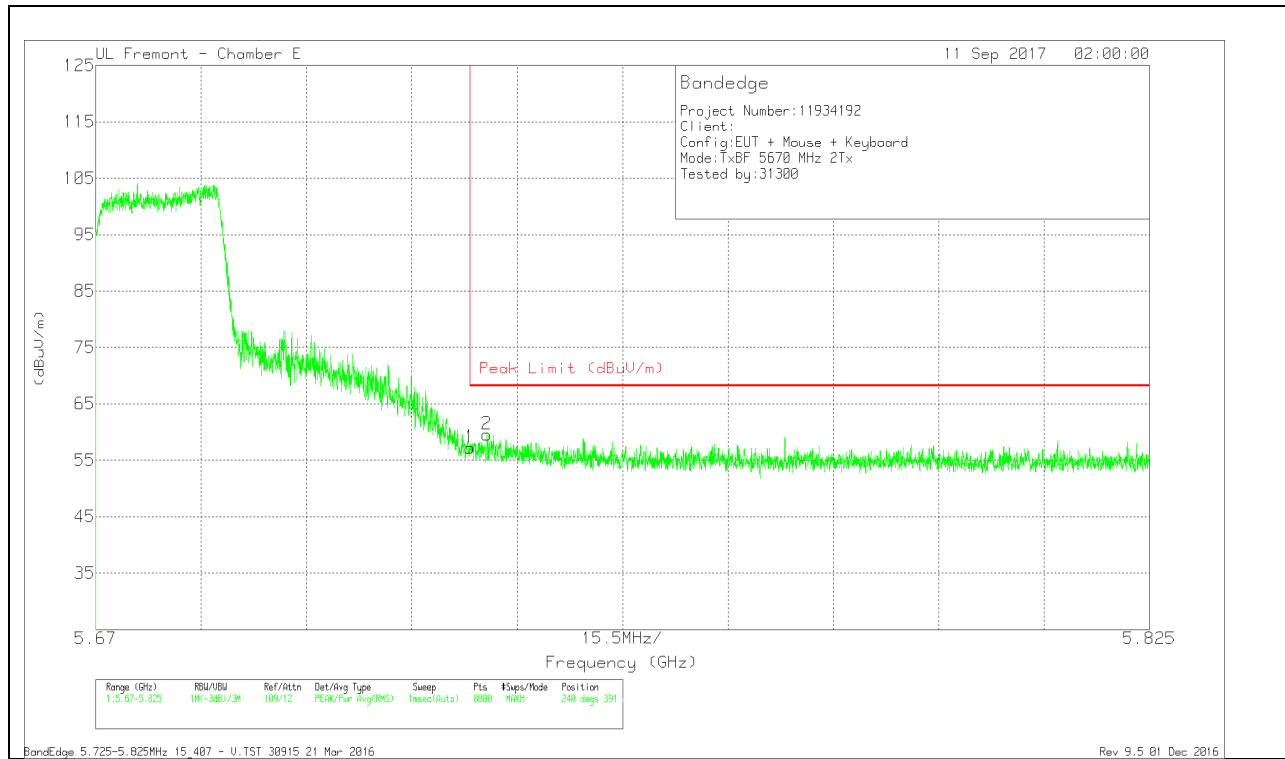


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.2	Pk	35.1	-19.1	0	57.2	68.2	-11	240	391	V
2	5.728	43.58	Pk	35.1	-19.1	0	59.58	68.2	-8.62	240	391	V

Pk - Peak detector

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 CDD Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

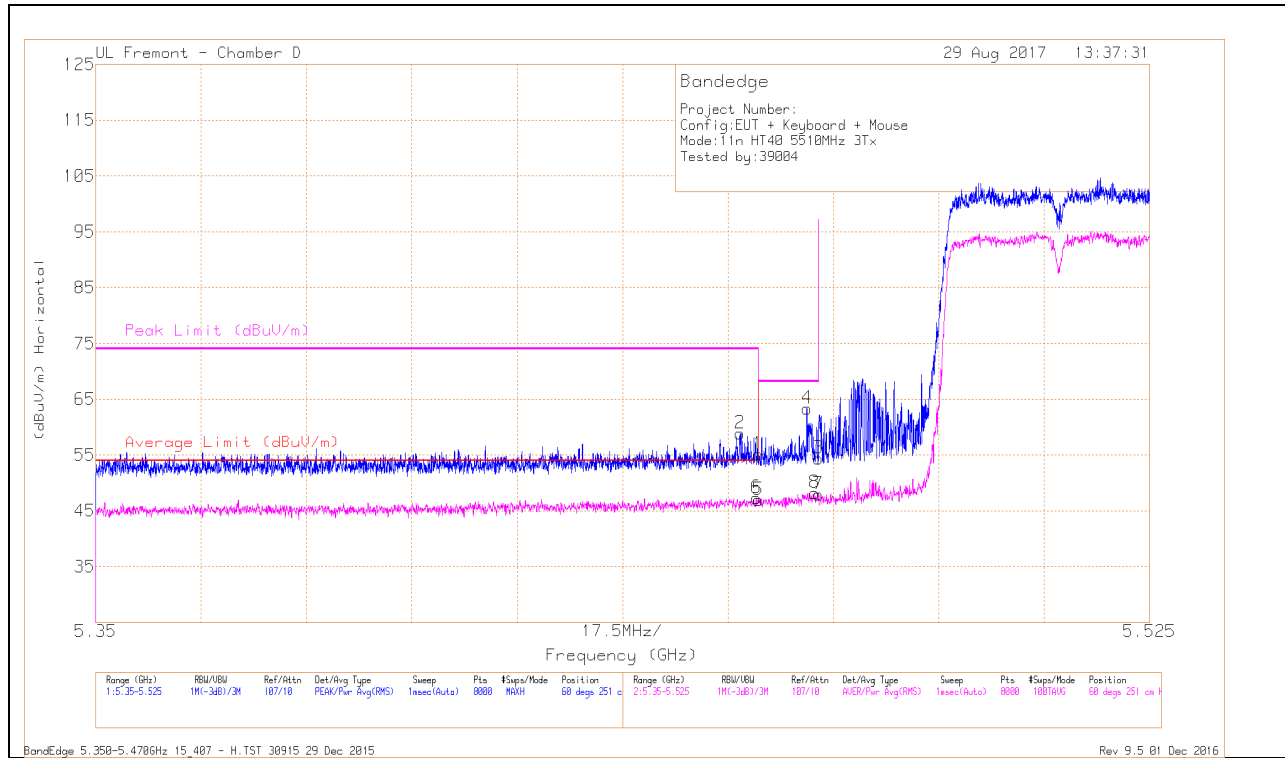


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.59	Pk	34.4	-17.9	0	55.09	-	-	74	-18.91	60	251	H
2	* 5.457	42.42	Pk	34.4	-18	0	58.82	-	-	74	-15.18	60	251	H
5	* 5.46	30.21	RMS	34.4	-17.9	.25	46.96	54	-7.04	-	-	60	251	H
6	* 5.46	30.52	RMS	34.4	-17.9	.25	47.27	54	-6.73	-	-	60	251	H
4	5.468	46.86	Pk	34.4	-17.9	0	63.36	-	-	68.2	-4.84	60	251	H
8	5.469	31.48	RMS	34.4	-17.9	.25	48.23	-	-	-	-	60	251	H
3	5.47	37.93	Pk	34.4	-17.9	0	54.43	-	-	68.2	-13.77	60	251	H
7	5.47	31.23	RMS	34.4	-17.9	.25	47.98	-	-	-	-	60	251	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

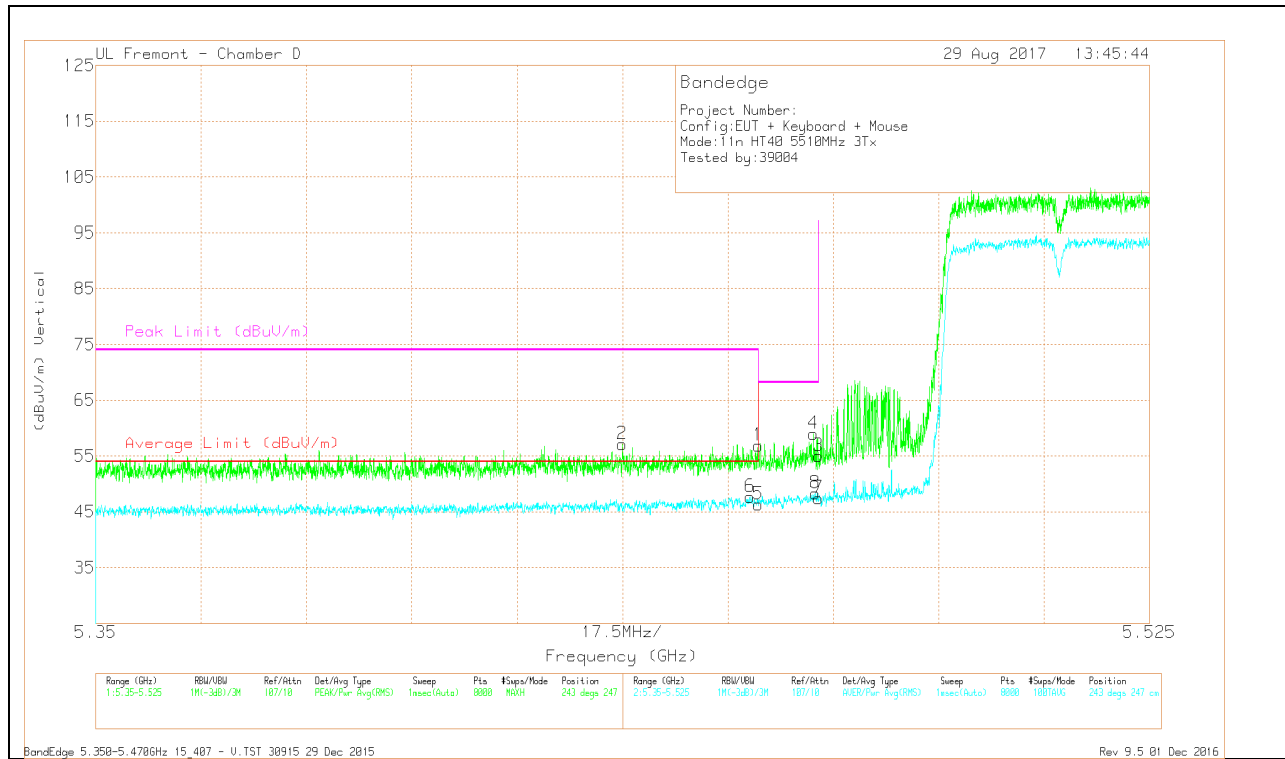


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.41	Pk	34.4	-17.9	0	56.91	-	-	74	-17.09	243	247	V
2	* 5.437	40.88	Pk	34.4	-18.2	0	57.08	-	-	74	-16.92	243	247	V
5	* 5.46	29.53	RMS	34.4	-17.9	.25	46.28	54	-7.72	-	-	243	247	V
6	* 5.459	31.02	RMS	34.4	-18	.25	47.67	54	-6.33	-	-	243	247	V
4	5.469	42.46	Pk	34.4	-17.9	0	58.96	-	-	68.2	-9.24	243	247	V
8	5.469	31.59	RMS	34.4	-17.9	.25	48.34	-	-	-	-	243	247	V
3	5.47	38.55	Pk	34.4	-17.9	0	55.05	-	-	68.2	-13.15	243	247	V
7	5.47	30.63	RMS	34.4	-17.9	.25	47.38	-	-	-	-	243	247	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

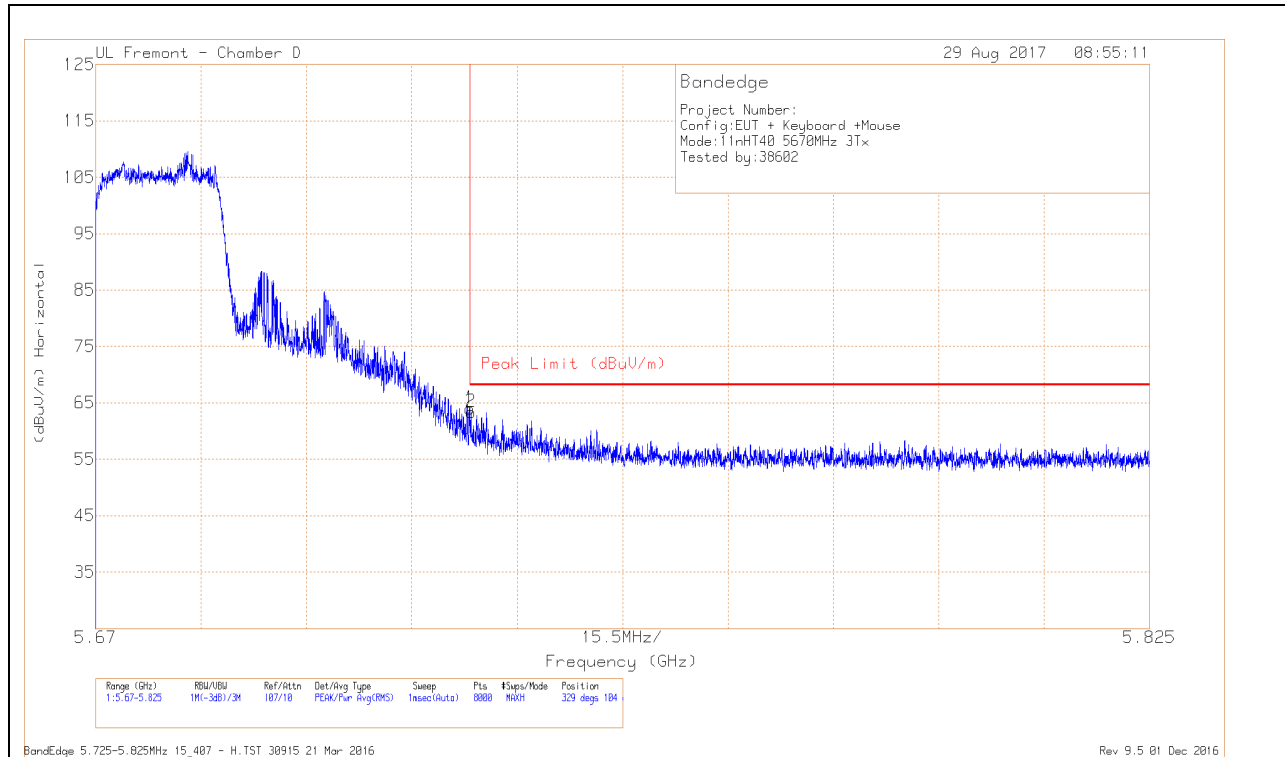

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.69	Pk	34.8	-17.5	0	63.99	68.2	-4.21	329	104	H
2	5.725	46.05	Pk	34.8	-17.5	0	63.35	68.2	-4.85	329	104	H

Pk - Peak detector

VERTICAL RESULT

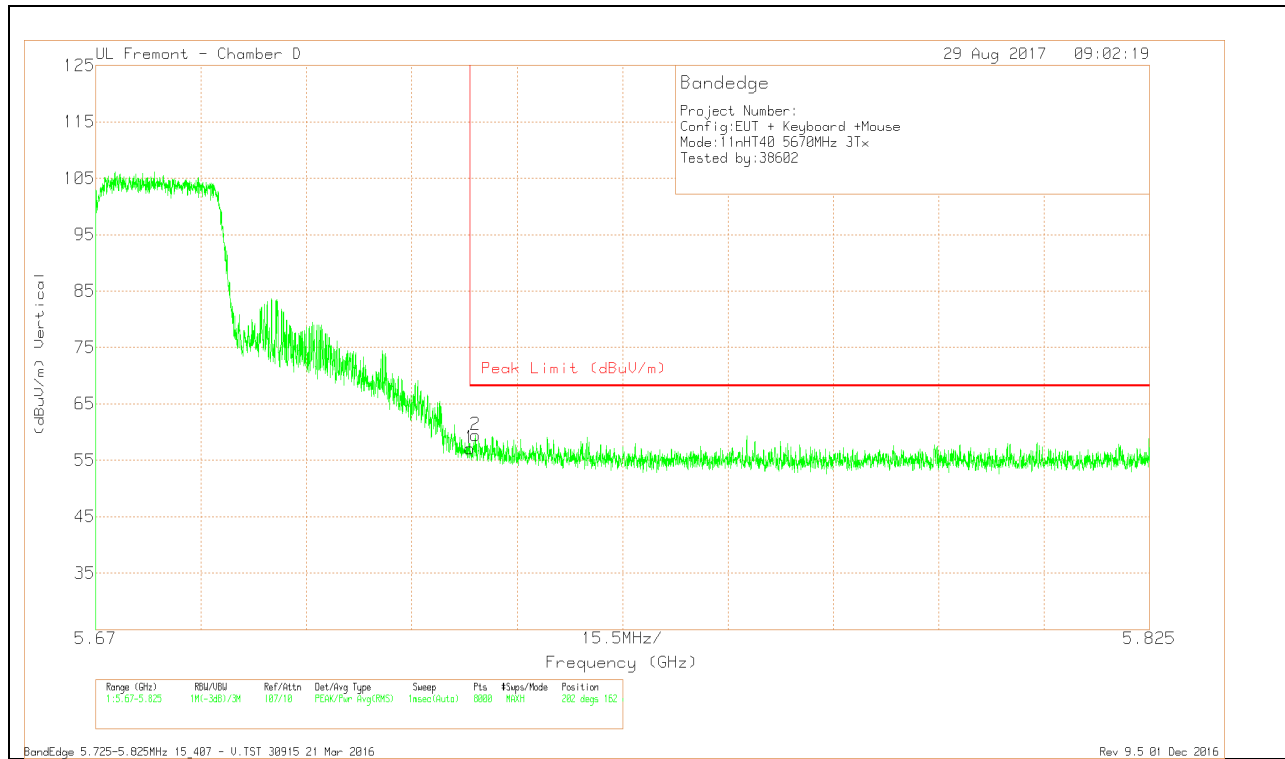


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.86	Pk	34.8	-17.5	0	57.16	68.2	-11.04	202	162	V
2	5.726	42.12	Pk	34.8	-17.5	0	59.42	68.2	-8.78	202	162	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

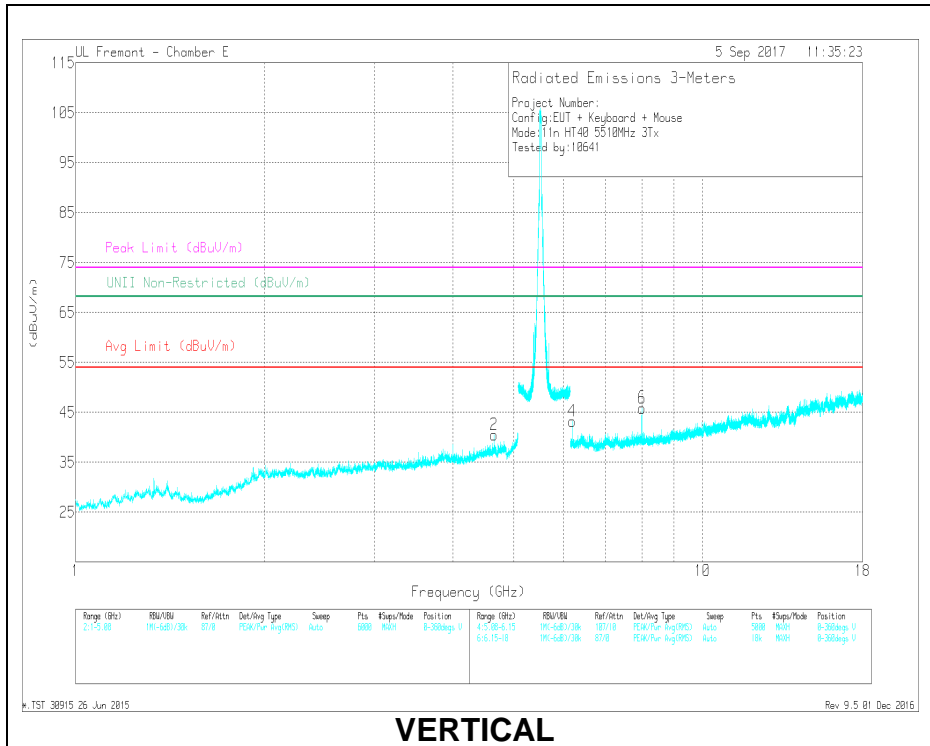

VERTICAL

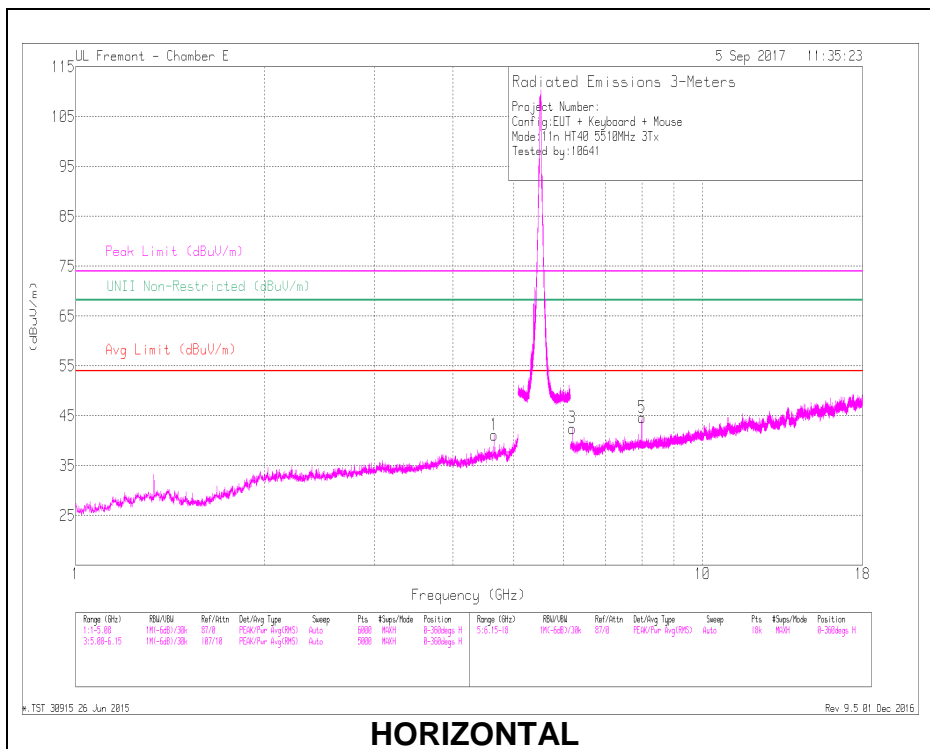


HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.649	42.96	PK-U	34.4	-29.6	0	47.76	-	-	74	-26.24	-	-	138	317	H
	* 4.649	35.71	ADR	34.4	-29.6	.25	40.76	54	-13.24	-	-	-	-	138	317	H
2	* 4.649	42.15	PK-U	34.4	-29.6	0	46.95	-	-	74	-27.05	-	-	155	171	V
	* 4.649	34.88	ADR	34.4	-29.6	.25	39.93	54	-14.07	-	-	-	-	155	171	V
3	6.199	40.53	PK-U	35.9	-27.6	0	48.83	-	-	-	-	68.2	-19.37	216	164	H
4	6.199	40.82	PK-U	35.9	-27.6	0	49.12	-	-	-	-	68.2	-19.08	125	210	V
5	8	40.31	PK-U	36.5	-26.4	0	50.41	-	-	-	-	68.2	-17.79	206	206	H
6	8	40.82	PK-U	36.5	-26.4	0	50.92	-	-	-	-	68.2	-17.28	178	205	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

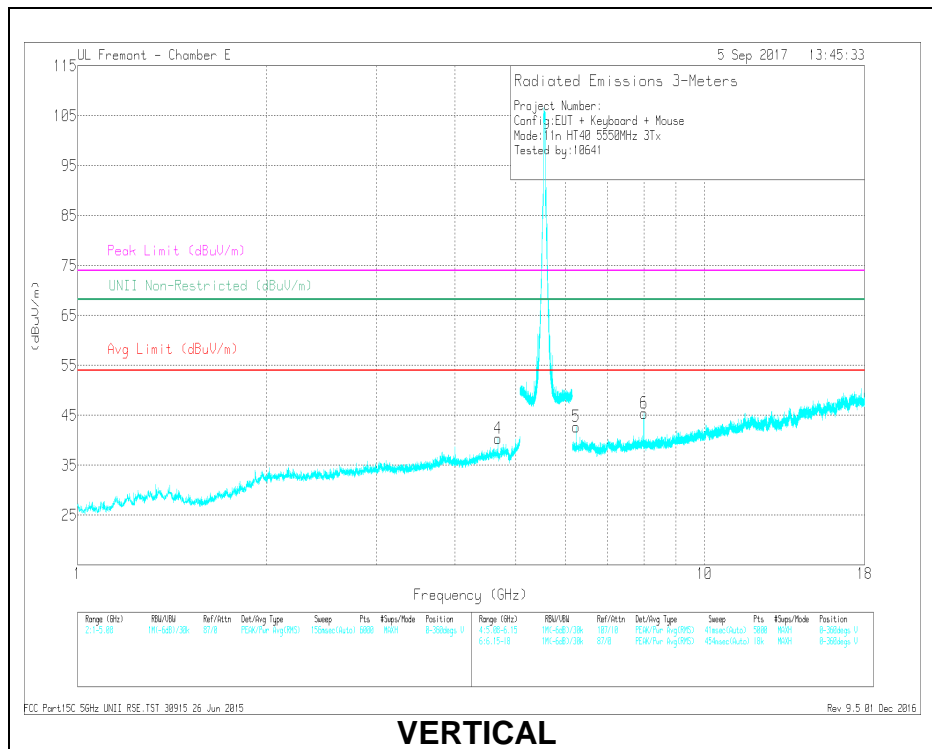

VERTICAL

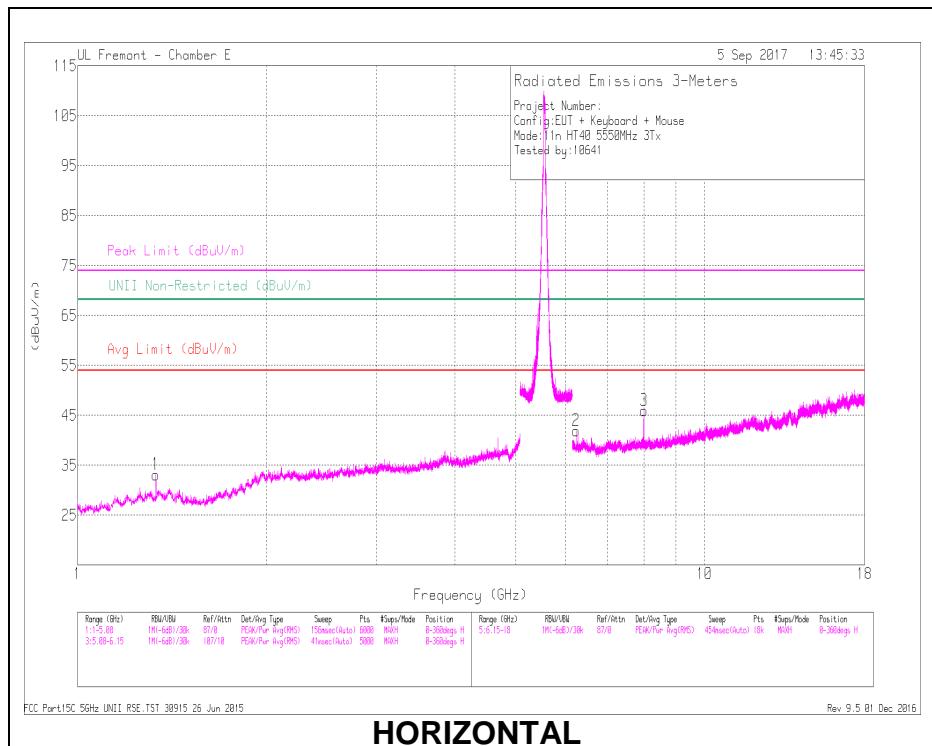



HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.333	44.5	PK-U	28.9	-35	0	38.4	-	-	74	-35.6	-	-	129	303	H
	* 1.333	32.5	ADR	28.9	-35	.25	26.65	54	-27.35	-	-	-	-	129	303	H
4	* 4.683	41.06	PK-U	34.4	-29.3	0	46.16	-	-	74	-27.84	-	-	360	199	V
	* 4.683	31.91	ADR	34.4	-29.3	.25	37.26	54	-16.74	-	-	-	-	360	199	V
2	6.244	40.01	PK-U	35.9	-28	0	47.91	-	-	-	-	68.2	-20.29	301	199	H
5	6.244	40.6	PK-U	35.9	-28	0	48.5	-	-	-	-	68.2	-19.7	144	204	V
3	8	39.28	PK-U	36.5	-26.4	0	49.38	-	-	-	-	68.2	-18.82	201	306	H
6	8	40.58	PK-U	36.5	-26.4	0	50.68	-	-	-	-	68.2	-17.52	178	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

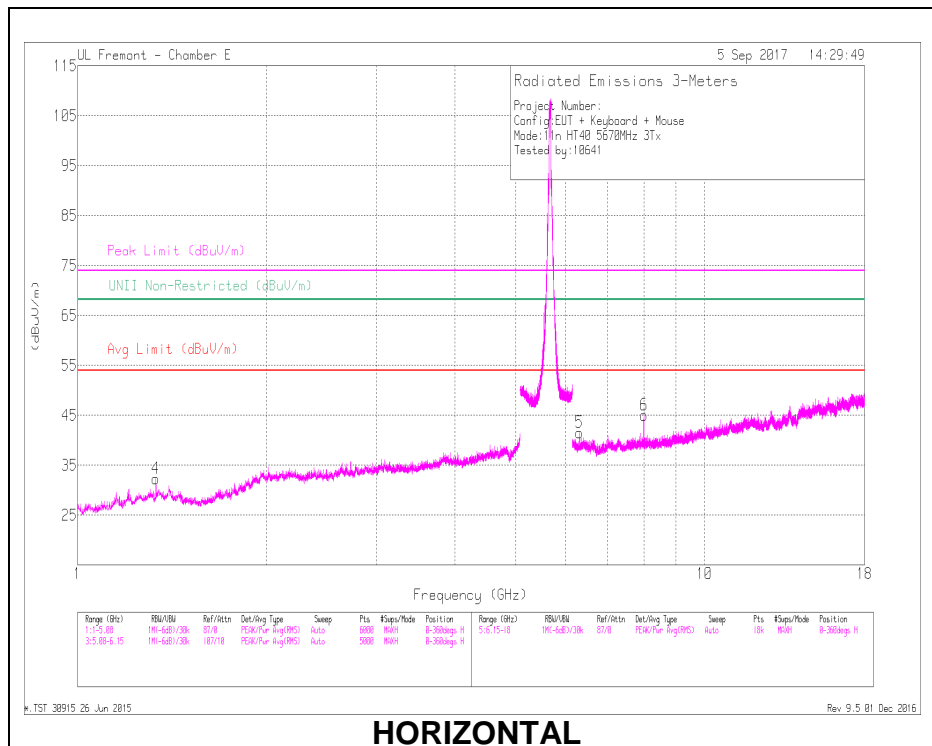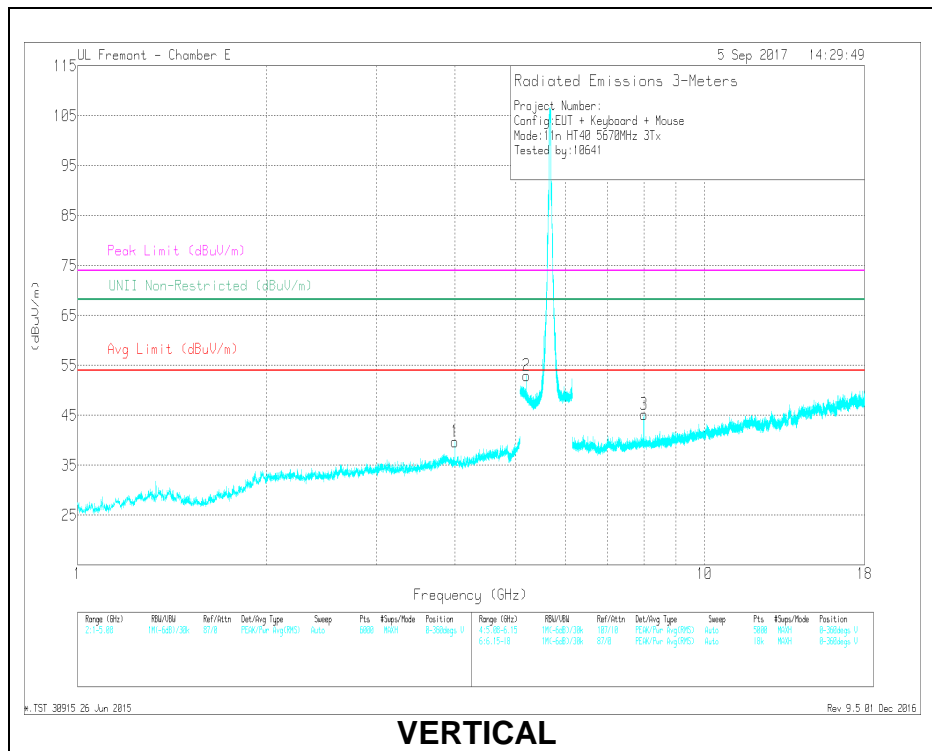

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 1.333	44.3	PK-U	28.9	-35	0	38.2	-	-	74	-35.8	-	-	188	103	H
	* 1.333	32.17	ADR	28.9	-35	.25	26.32	54	-27.68	-	-	-	-	188	103	H
1	* 4	39.82	PK-U	33.7	-29.5	0	44.02	-	-	74	-29.98	-	-	292	366	V
	* 4	28.31	ADR	33.7	-29.5	.25	32.76	54	-21.24	-	-	-	-	292	366	V
2	5.197	42.85	PK-U	34.8	-18.5	0	59.15	-	-	-	-	68.2	-9.05	129	256	V
5	6.319	38.93	PK-U	36	-28.2	0	46.73	-	-	-	-	68.2	-21.47	0	170	H
6	8	40.85	PK-U	36.5	-26.4	0	50.95	-	-	-	-	68.2	-17.25	211	334	H
3	8	39.44	PK-U	36.5	-26.4	0	49.54	-	-	-	-	68.2	-18.66	159	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

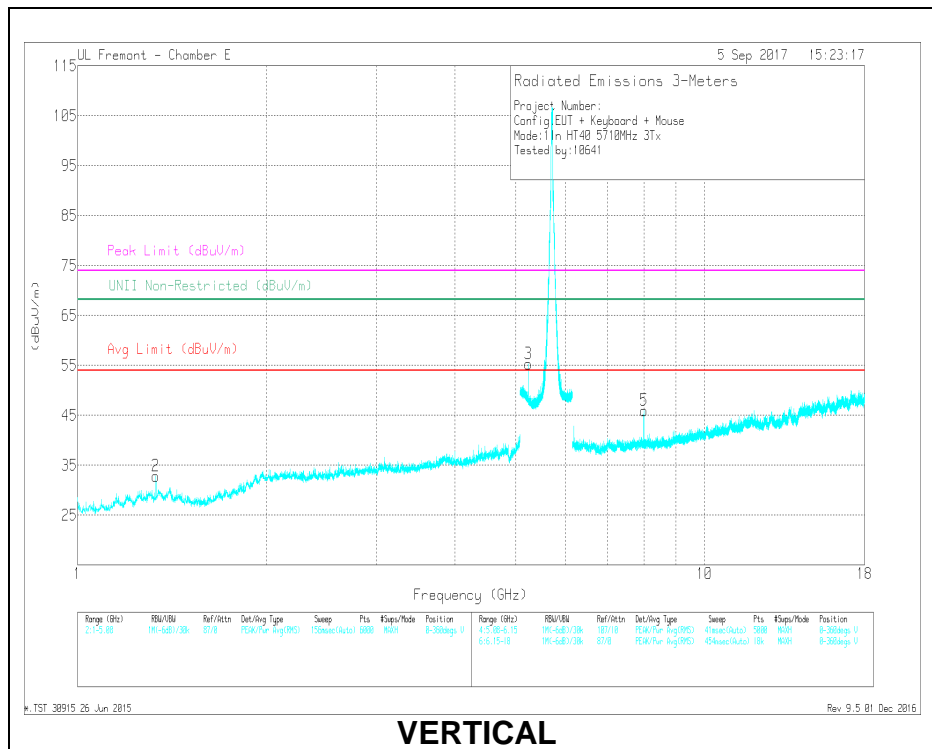

VERTICAL

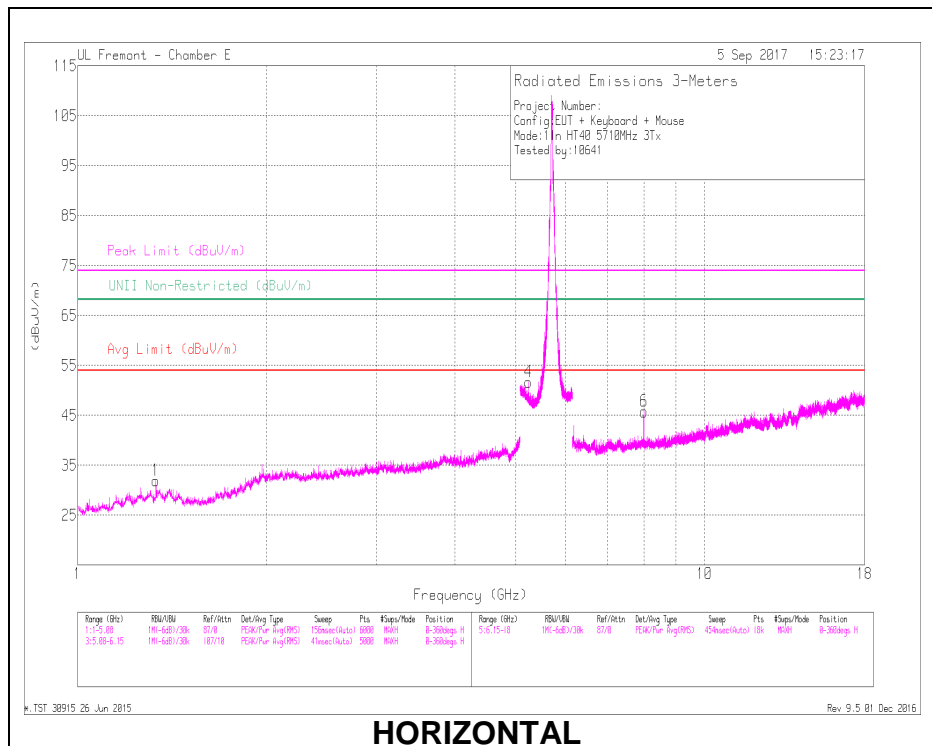

HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.333	44.51	PK-U	28.9	-35	0	38.41	-	-	74	-35.59	-	-	201	107	H
	* 1.333	32.25	ADR	28.9	-35	.25	26.4	54	-27.6	-	-	-	-	201	107	H
2	* 1.334	44.89	PK-U	28.9	-35	0	38.79	-	-	74	-35.21	-	-	113	251	V
	* 1.333	33.21	ADR	28.9	-35	.25	27.36	54	-26.64	-	-	-	-	113	251	V
4	5.234	40.86	PK-U	34.9	-18.7	0	57.06	-	-	-	-	68.2	-11.14	220	107	H
3	5.234	43.44	PK-U	34.9	-18.7	0	59.64	-	-	-	-	68.2	-8.56	128	248	V
6	8	40.47	PK-U	36.5	-26.4	0	50.57	-	-	-	-	68.2	-17.63	207	196	H
5	8	38.59	PK-U	36.5	-26.4	0	48.69	-	-	-	-	68.2	-19.51	156	258	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 SDM Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

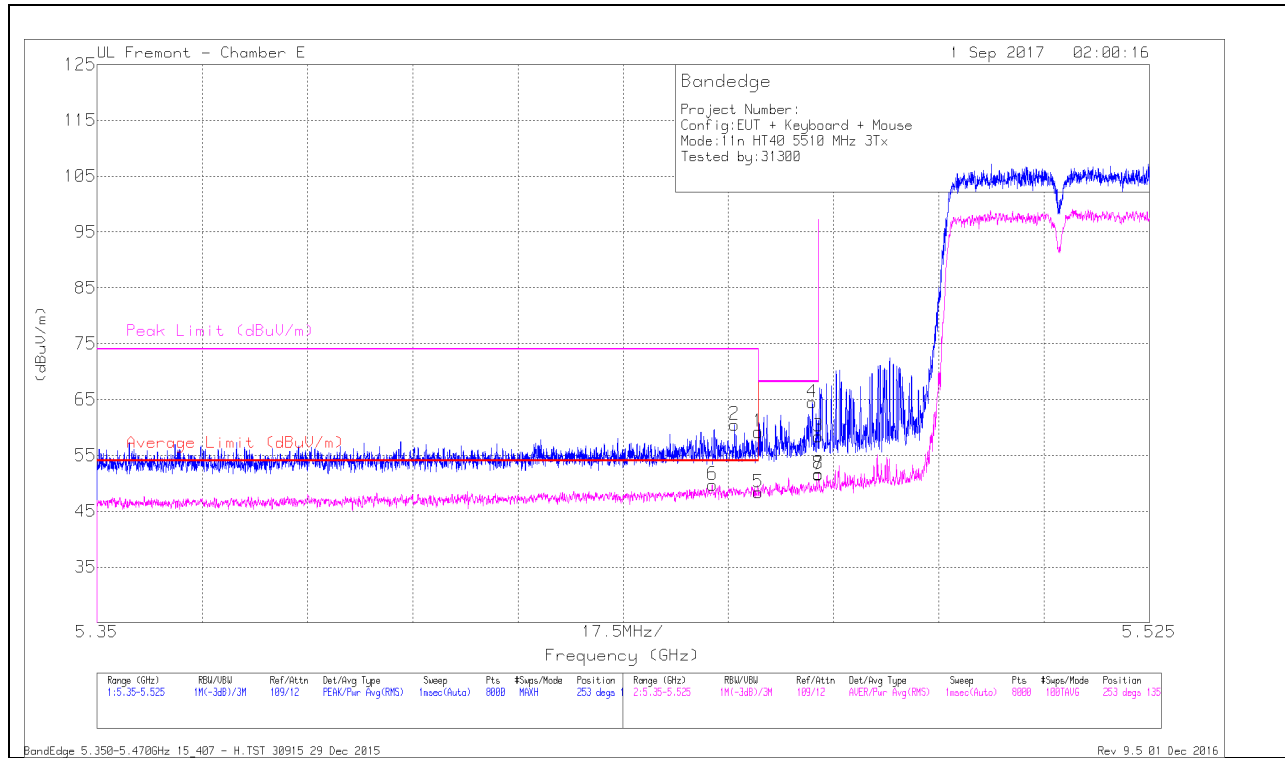


Marker	Frequen- cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.452	33.31	RMS	35.1	-18.9	.17	49.68	54	-4.32	-	-	253	135	H
2	* 5.456	44.3	Pk	35.1	-18.9	0	60.5	-	-	74	-13.5	253	135	H
1	* 5.46	43	Pk	35.1	-18.9	0	59.2	-	-	74	-14.8	253	135	H
5	* 5.46	31.93	RMS	35.1	-18.9	.17	48.25	54	-5.75	-	-	253	135	H
4	5.469	48.27	Pk	35.1	-18.9	0	64.47	-	-	68.2	-3.73	253	135	H
3	5.47	42.2	Pk	35.1	-18.9	0	58.4	-	-	68.2	-9.8	253	135	H
7	5.47	35.12	RMS	35.1	-18.9	.17	51.49	-	-	-	-	253	135	H
8	5.47	35.24	RMS	35.1	-18.9	.17	51.56	-	-	-	-	253	135	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

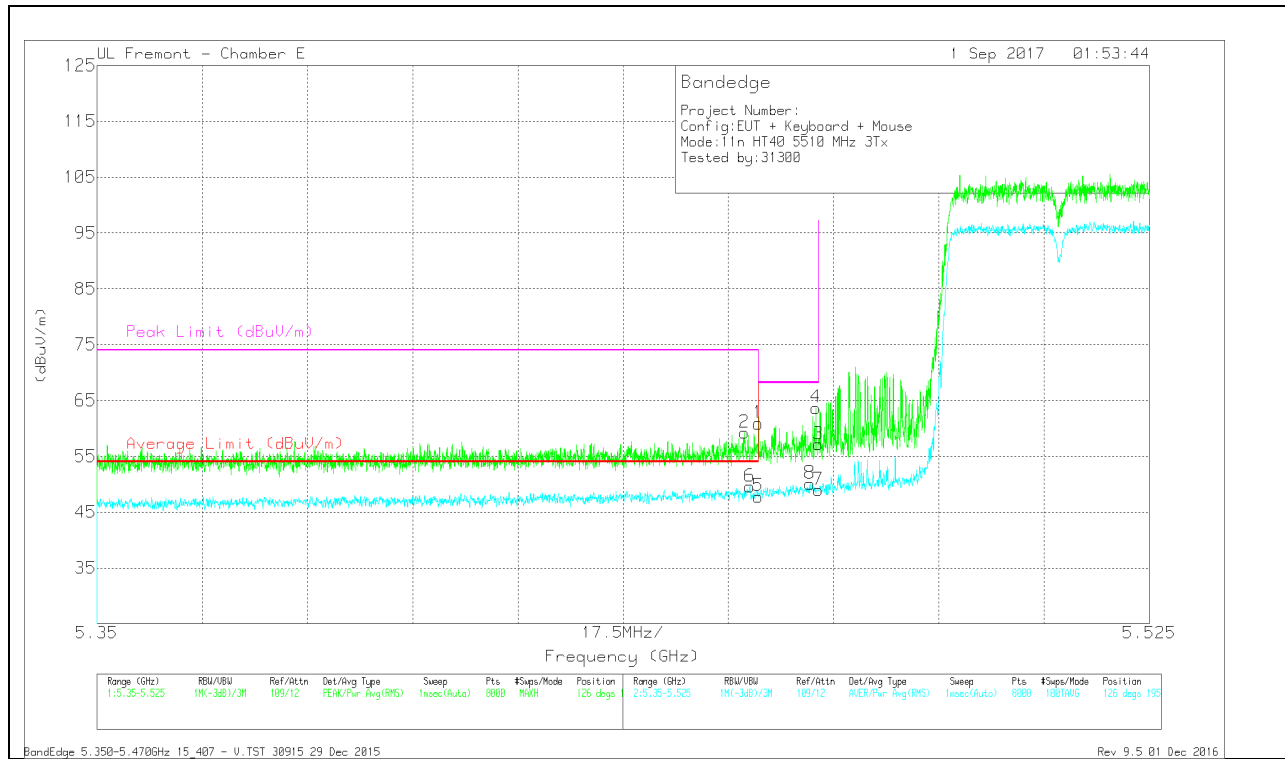


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.458	43.04	Pk	35.1	-18.9	0	59.24	-	-	74	-14.76	126	195	V
6	* 5.459	33.12	RMS	35.1	-18.9	.17	49.49	54	-4.51	-	-	126	195	V
1	* 5.46	44.7	Pk	35.1	-18.9	0	60.9	-	-	74	-13.1	126	195	V
5	* 5.46	31.37	RMS	35.1	-18.9	.17	47.69	54	-6.31	-	-	126	195	V
8	5.469	33.65	RMS	35.1	-18.9	.17	50.02	-	-	-	-	126	195	V
3	5.47	40.94	Pk	35.1	-18.9	0	57.14	-	-	68.2	-11.06	126	195	V
4	5.47	47.5	Pk	35.1	-18.9	0	63.7	-	-	68.2	-4.5	126	195	V
7	5.47	32.54	RMS	35.1	-18.9	.17	48.91	-	-	-	-	126	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

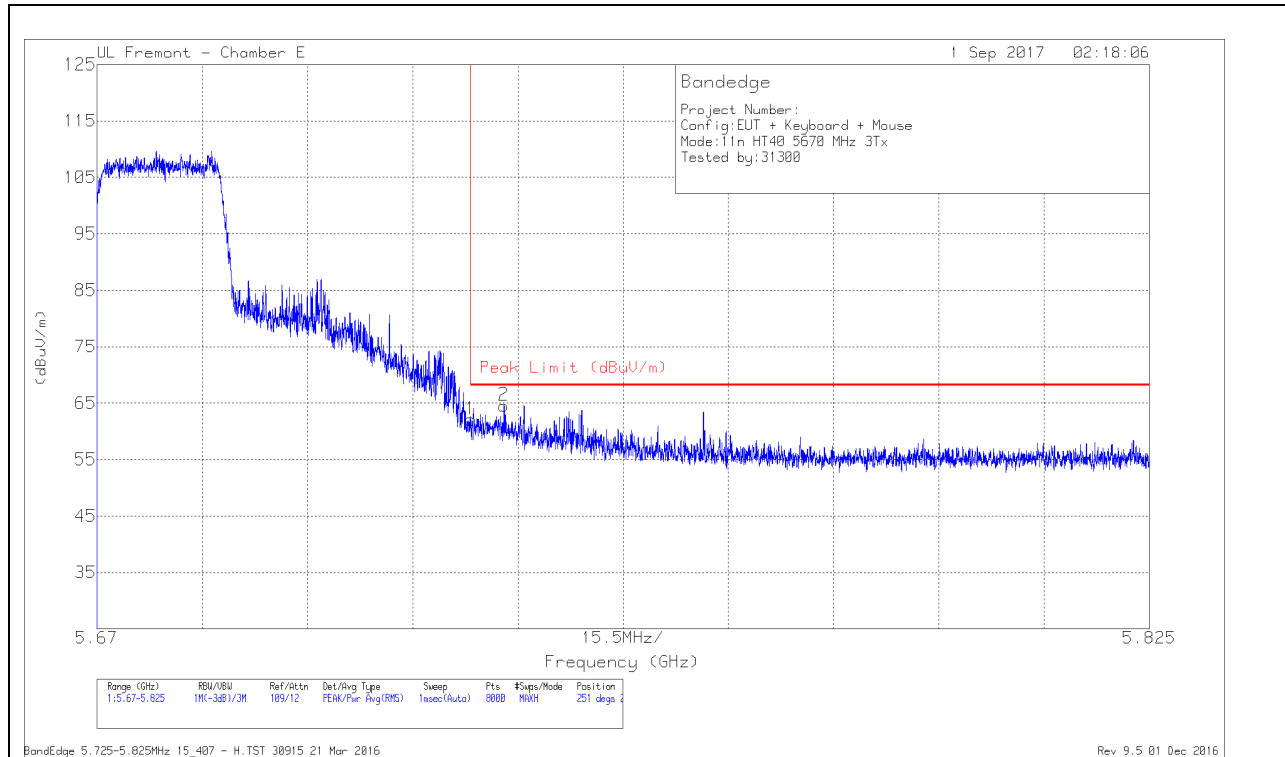

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.09	PK	35.1	-19.1	0	62.09	68.2	-6.11	251	241	H
2	5.73	48.6	PK	35.1	-19.1	0	64.6	68.2	-3.6	251	241	H

Pk - Peak detector

VERTICAL RESULT

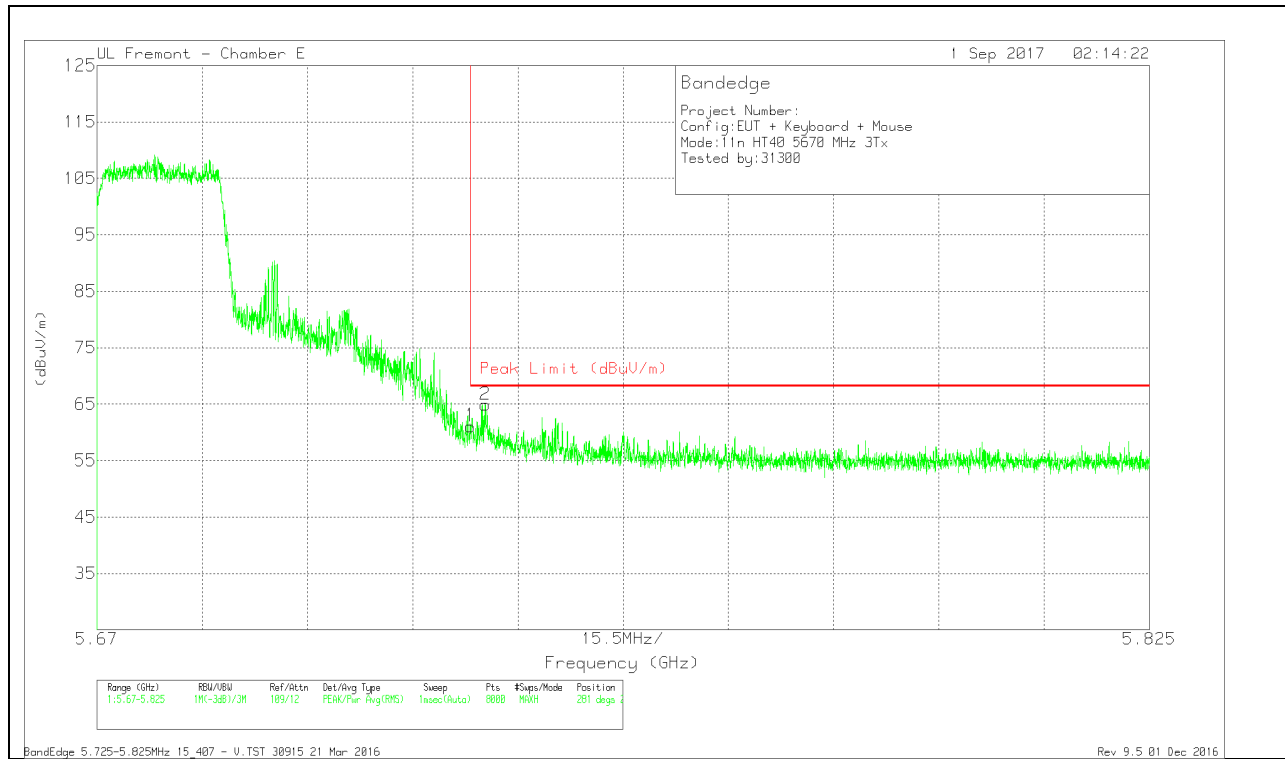


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.09	PK	35.1	-19.1	0	61.09	68.2	-7.11	281	281	V
2	5.727	48.92	PK	35.1	-19.1	0	64.92	68.2	-3.28	281	281	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

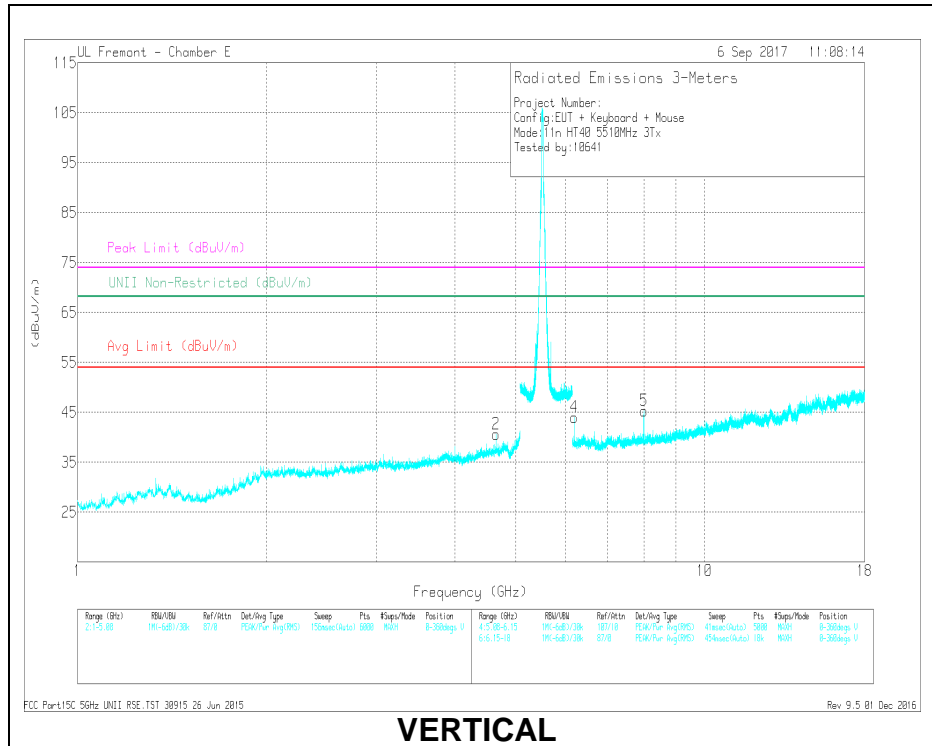

VERTICAL

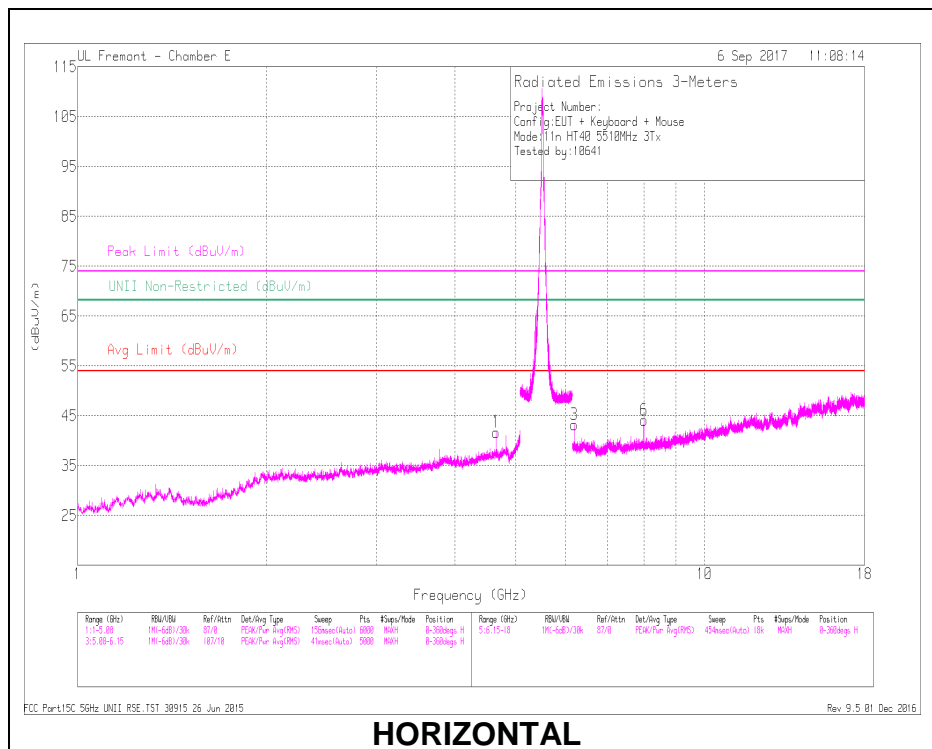


HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.649	42.94	PK-U	34.4	-29.6	0	47.74	-	-	74	-26.26	-	-	140	199	H
	* 4.649	35.73	ADR	34.4	-29.6	.17	40.70	54	-13.30	-	-	-	-	140	199	H
2	* 4.649	42.15	PK-U	34.4	-29.6	0	46.95	-	-	74	-27.05	-	-	155	169	V
	* 4.649	33.83	ADR	34.4	-29.6	.17	38.80	54	-15.20	-	-	-	-	155	169	V
3	6.199	40.95	PK-U	35.9	-27.6	0	49.25	-	-	-	-	68.2	-18.95	214	136	H
4	6.199	41.29	PK-U	35.9	-27.6	0	49.59	-	-	-	-	68.2	-18.61	139	159	V
6	8	40.05	PK-U	36.5	-26.4	0	50.15	-	-	-	-	68.2	-18.05	224	398	H
5	8	40.52	PK-U	36.5	-26.4	0	50.62	-	-	-	-	68.2	-17.58	109	389	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

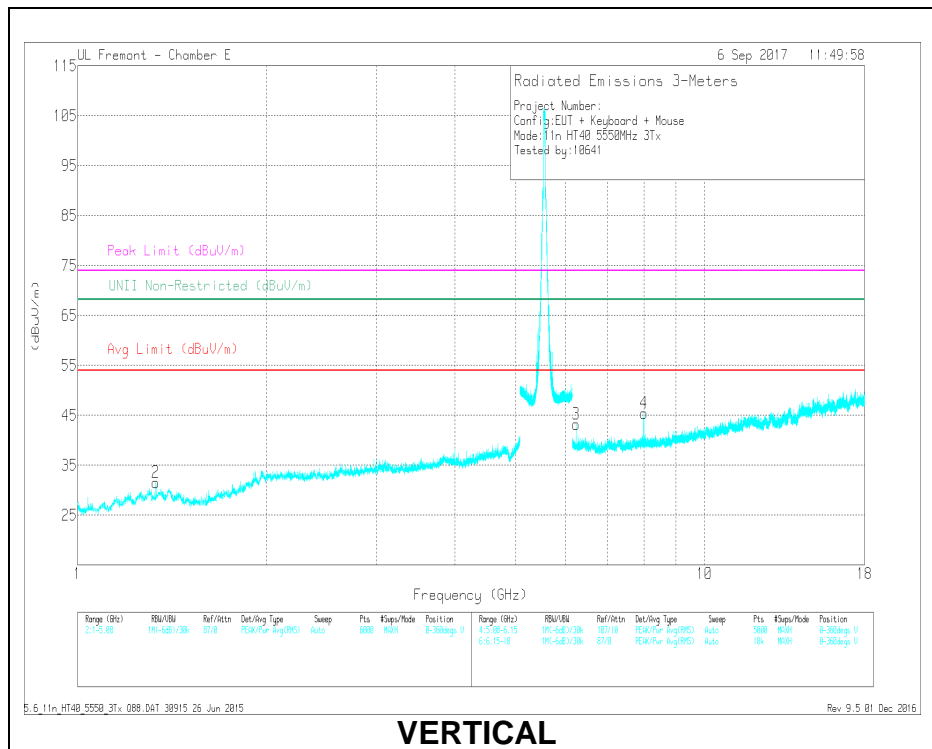

VERTICAL

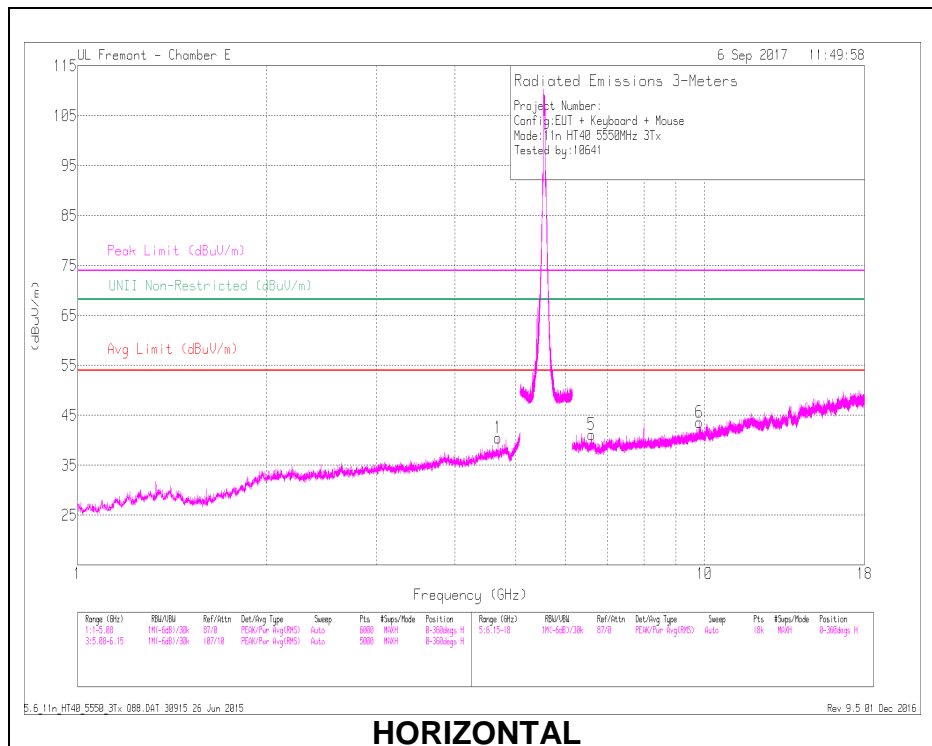

HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.683	42.3	PK-U	34.4	-29.3	0	47.4	-	-	74	-26.6	-	-	131	274	H
	* 4.683	33.83	ADR	34.4	-29.3	.17	39.10	54	-14.90	-	-	-	-	131	274	H
2	* 1.333	45.98	PK-U	28.9	-35	0	39.88	-	-	74	-34.12	-	-	140	225	V
	* 1.333	32.14	ADR	28.9	-35	.17	26.21	54	-27.79	-	-	-	-	140	225	V
3	6.244	40.76	PK-U	35.9	-28	0	48.66	-	-	-	-	68.2	-19.54	128	173	V
5	6.598	38.48	PK-U	35.9	-27	0	47.38	-	-	-	-	68.2	-20.82	262	120	H
4	8	40.85	PK-U	36.5	-26.4	0	50.95	-	-	-	-	68.2	-17.25	329	200	V
6	9.808	34.59	PK-U	37.5	-24.2	0	47.89	-	-	-	-	68.2	-20.31	221	357	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

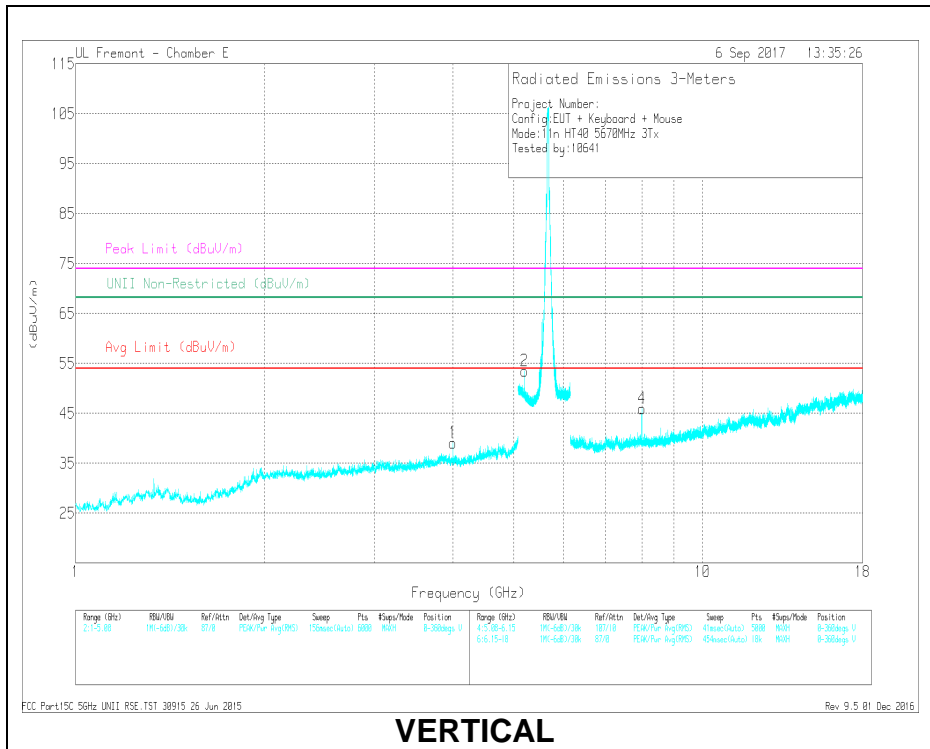

VERTICAL

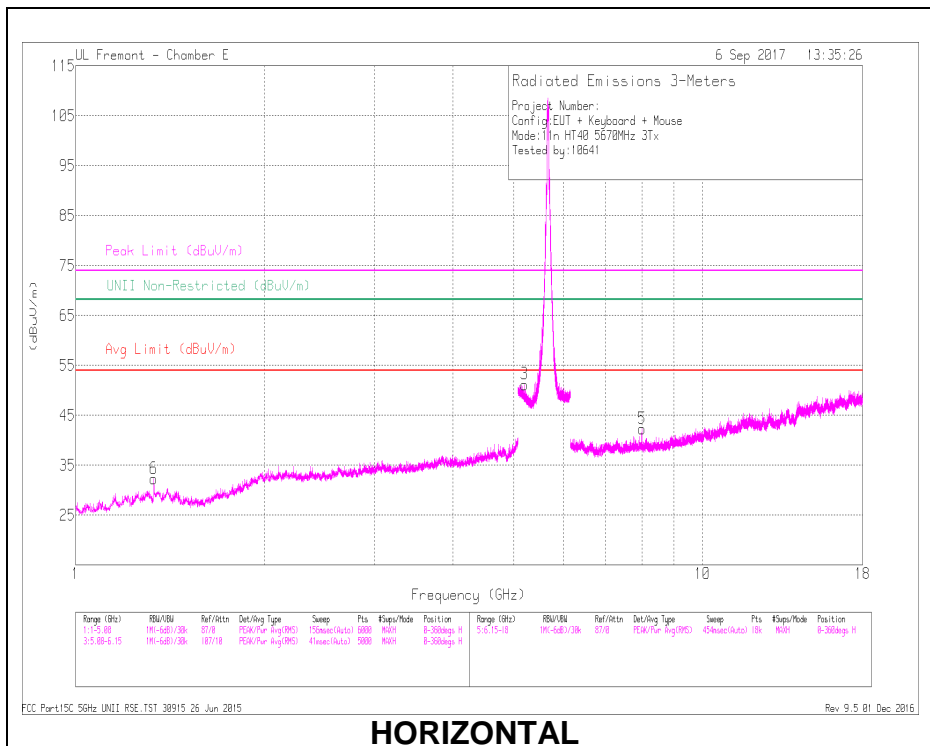



HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 1.333	43.52	PK-U	28.9	-35	0	37.42	-	-	74	-36.58	-	-	166	129	H
	* 1.333	31.54	ADR	28.9	-35	.17	25.61	54	-28.39	-	-	-	-	166	129	H
1	* 4	40.77	PK-U	33.7	-29.5	0	44.97	-	-	74	-29.03	-	-	322	353	V
	* 4	28.96	ADR	33.7	-29.5	.17	33.33	54	-20.67	-	-	-	-	322	353	V
3	5.197	42.94	PK-U	34.8	-18.5	0	59.24	-	-	-	-	68.2	-8.96	130	206	V
2	5.198	40.86	PK-U	34.8	-18.5	0	57.16	-	-	-	-	68.2	-11.04	61	268	H
5	8	39.66	PK-U	36.5	-26.4	0	49.76	-	-	-	-	68.2	-18.44	198	159	H
4	8	39.47	PK-U	36.5	-26.4	0	49.57	-	-	-	-	68.2	-18.63	337	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

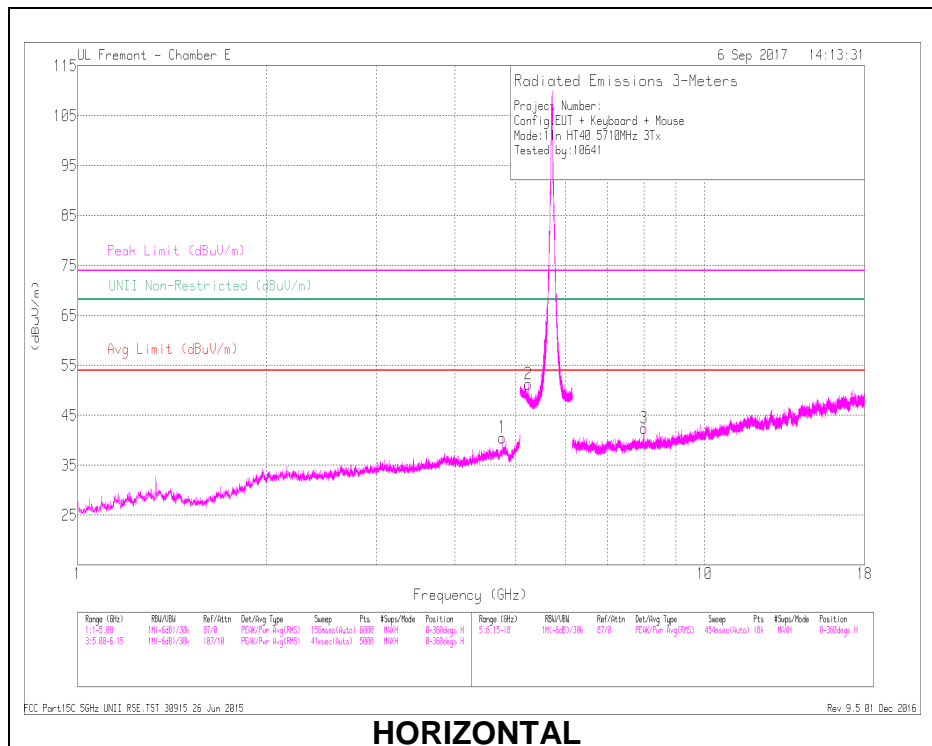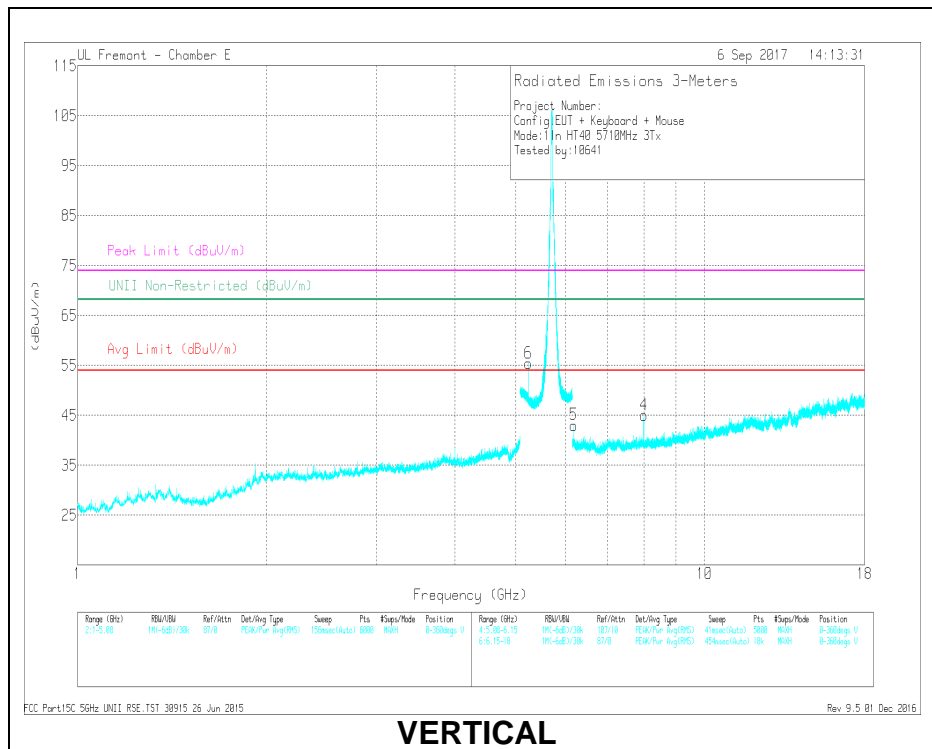

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.758	40.46	PK-U	34.4	-29	0	45.86	-	-	74	-28.14	-	-	135	227	H
	* 4.758	32.15	ADR	34.4	-29	.17	37.72	54	-16.28	-	-	-	-	135	227	H
2	5.234	41.25	PK-U	34.9	-18.7	0	57.45	-	-	-	-	68.2	-10.75	75	204	H
6	5.234	43.15	PK-U	34.9	-18.7	0	59.35	-	-	-	-	68.2	-8.85	113	229	V
5	6.186	40.74	PK-U	35.8	-27.6	0	48.94	-	-	-	-	68.2	-19.26	130	162	V
3	8	39.79	PK-U	36.5	-26.4	0	49.89	-	-	-	-	68.2	-18.31	86	200	H
4	8	40.85	PK-U	36.5	-26.4	0	50.95	-	-	-	-	68.2	-17.25	330	204	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 BF Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

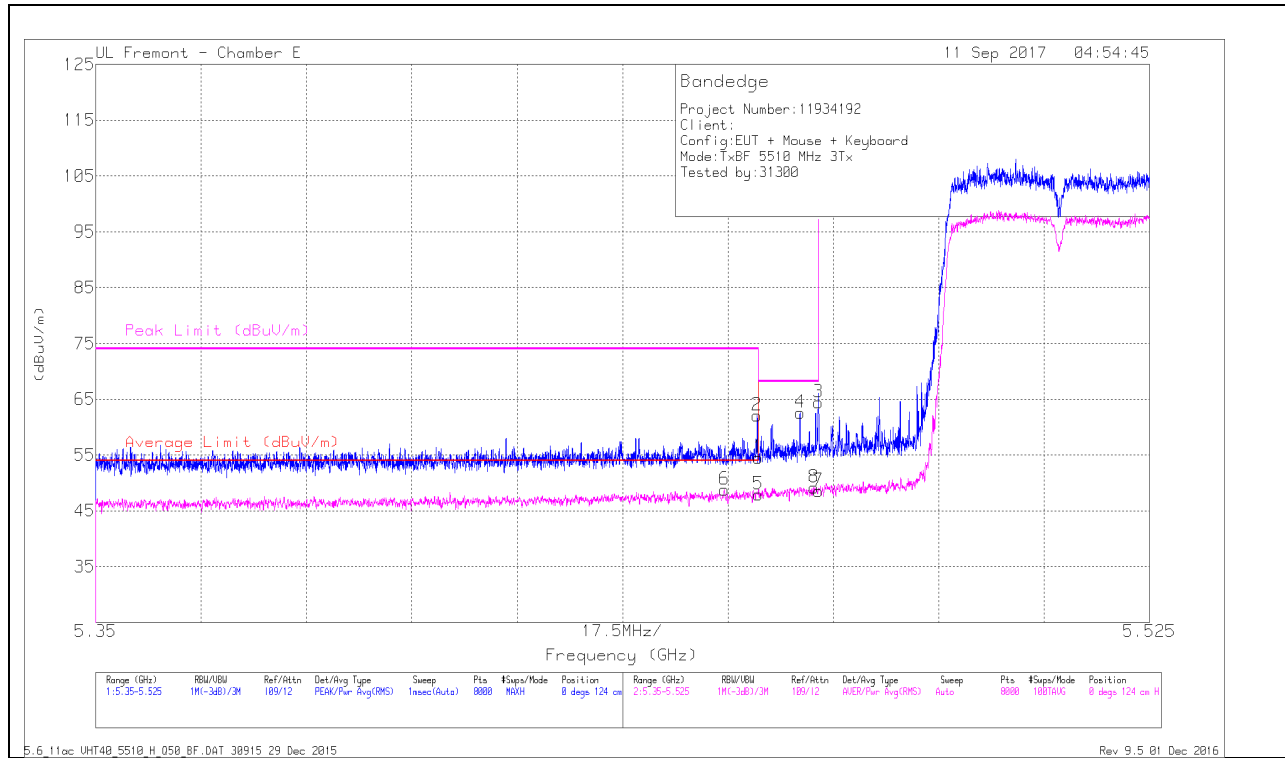


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.37	Pk	35.1	-18.9	0	54.57	-	-	74	-19.43	0	124	H
2	* 5.46	45.89	Pk	35.1	-18.9	0	62.09	-	-	74	-11.91	0	124	H
5	* 5.46	31.47	RMS	35.1	-18.9	.35	47.93	54	-5.98	-	-	0	124	H
6	* 5.454	32.33	RMS	35.1	-18.9	.35	48.79	54	-5.12	-	-	0	124	H
4	5.467	46.35	Pk	35.1	-18.9	0	62.55	-	-	68.2	-5.65	0	124	H
8	5.469	32.76	RMS	35.1	-18.9	.35	49.22	-	-	-	-	0	124	H
3	5.47	48.3	Pk	35.1	-18.9	0	64.5	-	-	68.2	-3.7	0	124	H
7	5.47	32.14	RMS	35.1	-18.9	.35	48.6	-	-	-	-	0	124	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

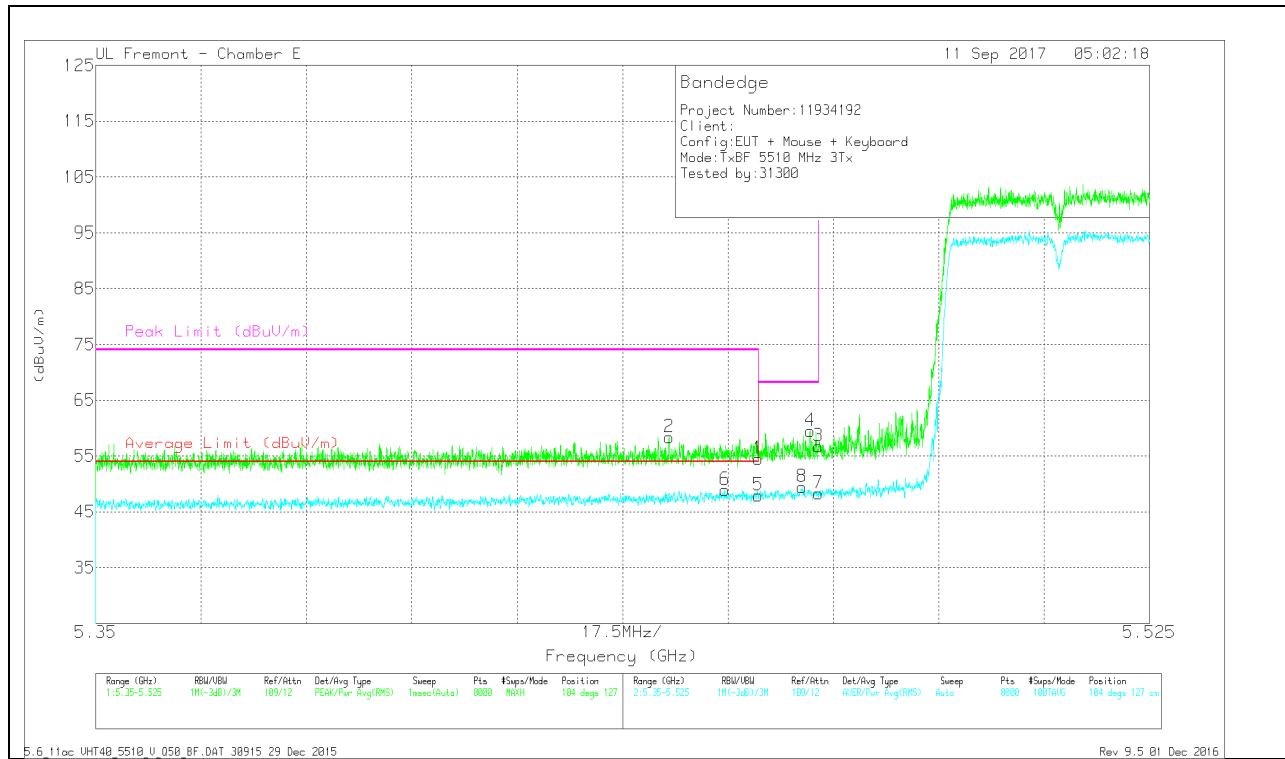


Marker	Frequen- cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.445	42.21	Pk	35.1	-18.9	0	58.41	-	-	74	-15.59	104	127	V
6	* 5.454	32.47	RMS	35.1	-18.9	.35	48.93	54	-4.98	-	-	104	127	V
1	* 5.46	38.36	Pk	35.1	-18.9	0	54.56	-	-	74	-19.44	104	127	V
5	* 5.46	31.45	RMS	35.1	-18.9	.35	47.91	54	-5.98	-	-	104	127	V
8	5.467	32.93	RMS	35.1	-18.9	.35	49.39	-	-	-	-	104	127	V
4	5.469	43.26	Pk	35.1	-18.9	0	59.46	-	-	68.2	-8.74	104	127	V
3	5.47	40.59	Pk	35.1	-18.9	0	56.79	-	-	68.2	-11.41	104	127	V
7	5.47	31.86	RMS	35.1	-18.9	.35	48.32	-	-	-	-	104	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

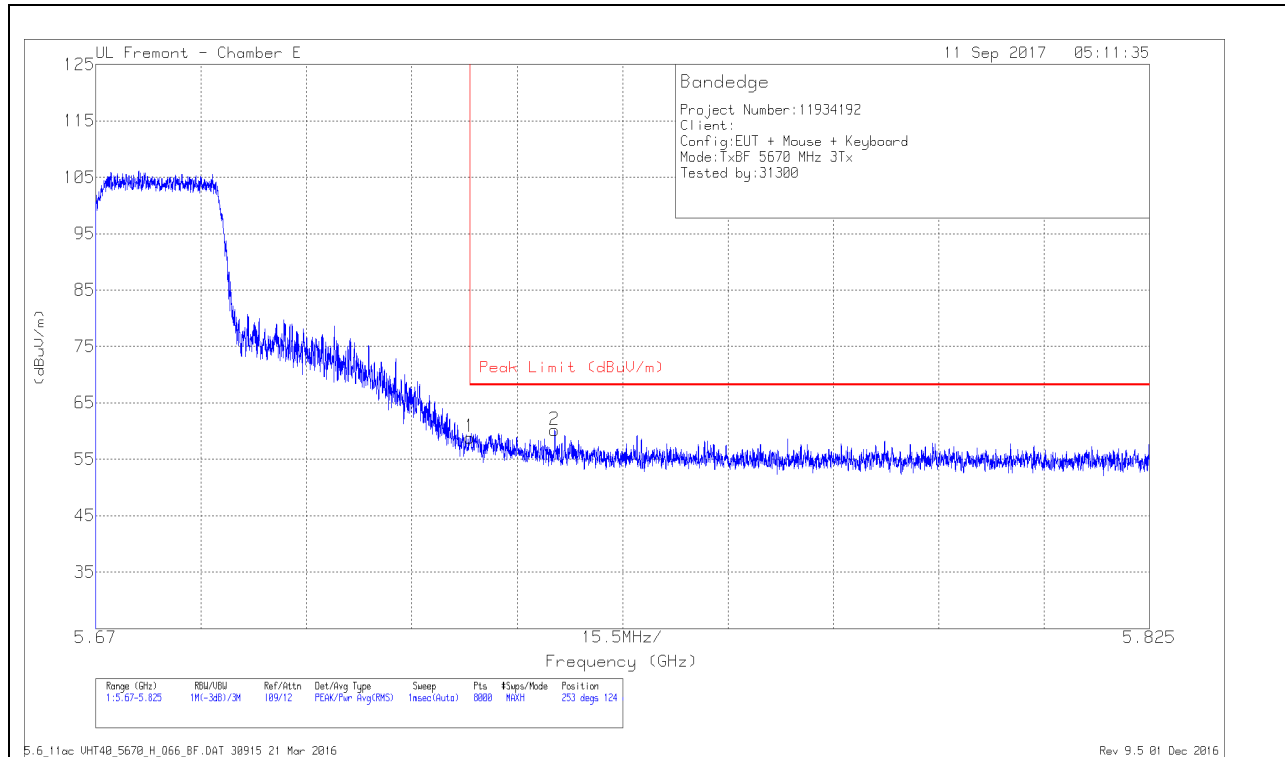

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.9	Pk	35.1	-19.1	0	58.9	68.2	-9.3	253	124	H
2	5.738	44.18	Pk	35.1	-19.1	0	60.18	68.2	-8.02	253	124	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

VERTICAL RESULT

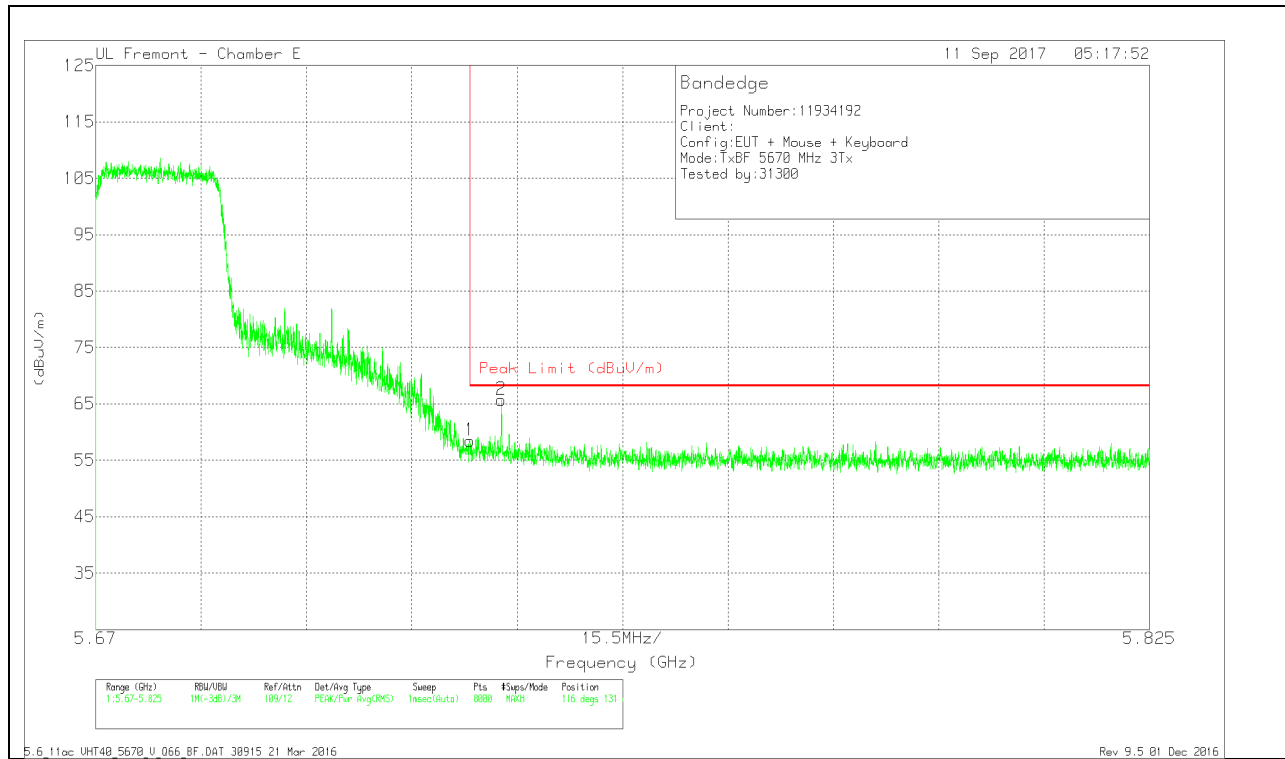


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.5	PK	35.1	-19.1	0	58.5	68.2	-9.7	116	131	V
2	5.73	49.66	PK	35.1	-19.1	0	65.66	68.2	-2.54	116	131	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

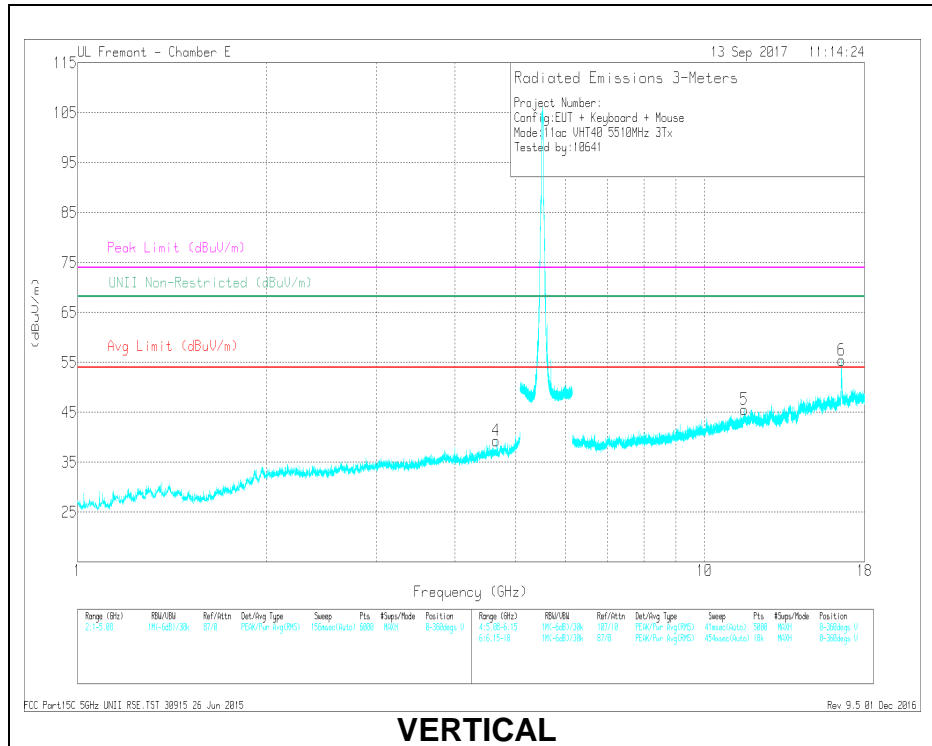

VERTICAL

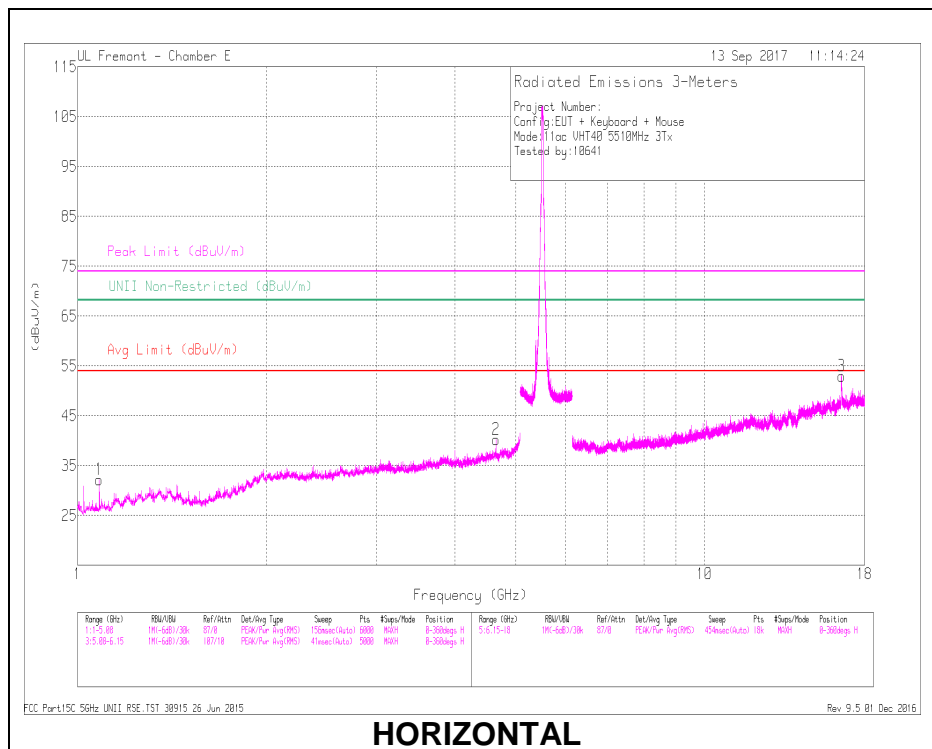

HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.083	47.33	PK-U	26.4	-35.7	0	38.03	-	-	74	-35.97	-	-	93	260	H
	* 1.083	40.48	ADR	26.4	-35.7	.35	31.53	54	-22.47	-	-	-	-	93	260	H
2	* 4.649	41.8	PK-U	34.4	-29.7	0	46.5	-	-	74	-27.5	-	-	125	207	H
	* 4.649	33.21	ADR	34.4	-29.6	.35	38.36	54	-15.64	-	-	-	-	125	207	H
4	* 4.649	41.65	PK-U	34.4	-29.6	0	46.45	-	-	74	-27.55	-	-	164	239	V
	* 4.649	33.48	ADR	34.4	-29.6	.35	38.63	54	-15.37	-	-	-	-	164	239	V
5	* 11.569	33.95	PK-U	38.7	-22.1	0	50.55	-	-	74	-23.45	-	-	0	331	V
	* 11.57	22.19	ADR	38.7	-22	.35	39.24	54	-14.76	-	-	-	-	0	331	V
6	16.535	42.3	PK-U	41.4	-20.7	0	63	-	-	-	-	68.2	-5.2	150	148	V
3	16.541	39.77	PK-U	41.5	-20.7	0	60.57	-	-	-	-	68.2	-7.63	132	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

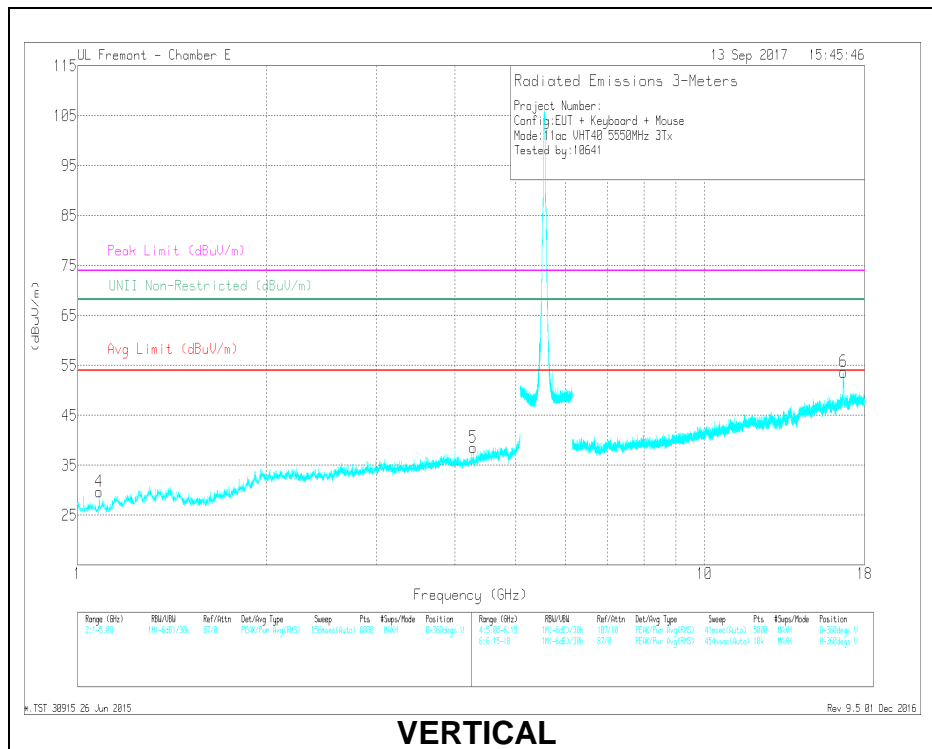

VERTICAL

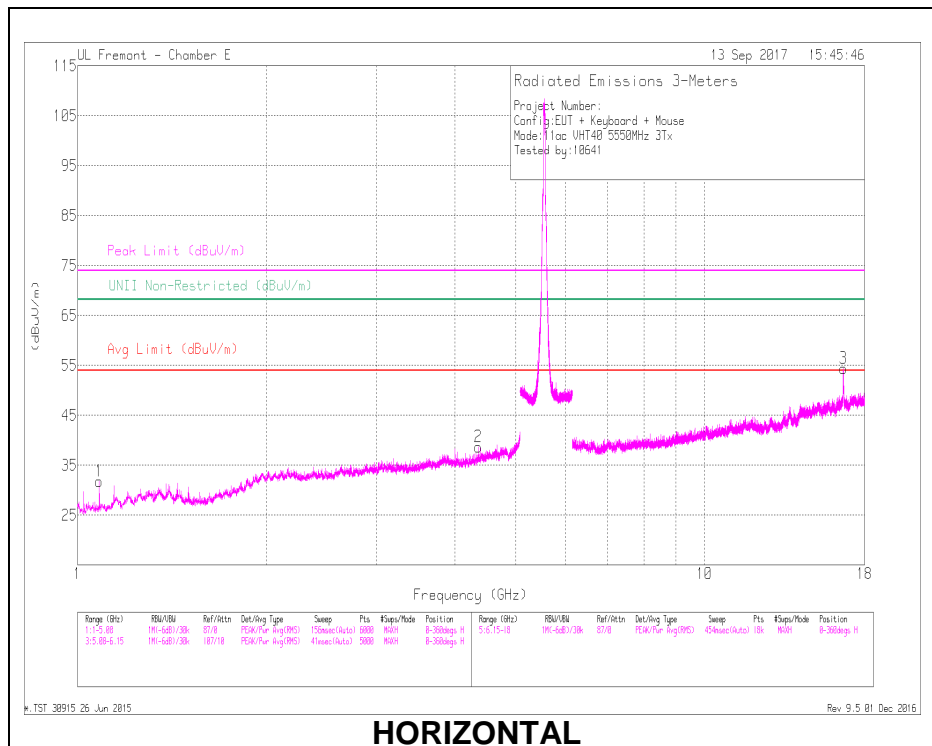

HORIZONTAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.083	46.4	PK-U	26.4	-35.7	0	37.1	-	-	74	-36.9	-	-	88	135	H
	* 1.083	39.24	ADR	26.4	-35.7	.35	30.29	54	-24.05	-	-	-	-	88	135	H
2	* 4.353	39.3	PK-U	34	-29.7	0	43.6	-	-	74	-30.4	-	-	272	109	H
	* 4.356	27.97	ADR	34	-29.6	.35	32.72	54	-21.62	-	-	-	-	272	109	H
4	* 1.083	45.25	PK-U	26.4	-35.7	0	35.95	-	-	74	-38.05	-	-	307	146	V
	* 1.083	36.52	ADR	26.4	-35.7	.35	27.57	54	-26.77	-	-	-	-	307	146	V
5	* 4.275	38.86	PK-U	33.9	-29.5	0	43.26	-	-	74	-30.74	-	-	52	300	V
	* 4.273	27.7	ADR	33.9	-29.5	.35	32.45	54	-21.89	-	-	-	-	52	300	V
6	16.645	41.77	PK-U	41.8	-21.4	0	62.17	-	-	-	-	68.2	-6.03	131	114	H
3	16.645	42.65	PK-U	41.8	-21.4	0	63.05	-	-	-	-	68.2	-5.15	203	229	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

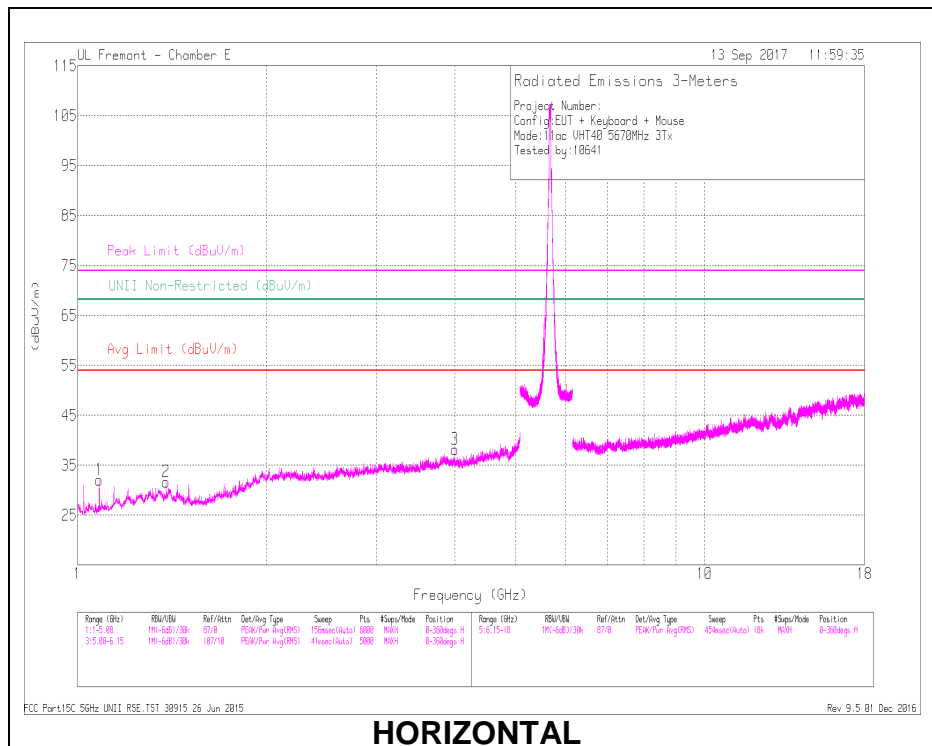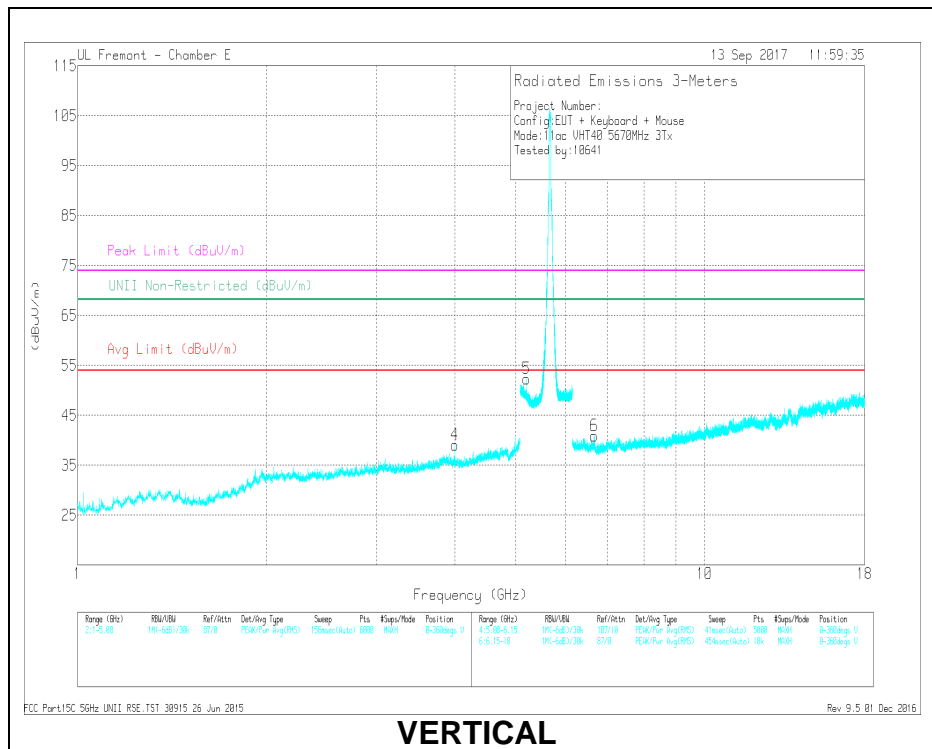

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.083	47.09	PK-U	26.4	-35.7	0	37.79	-	-	74	-36.21	-	-	86	182	H
	* 1.083	41.17	ADR	26.4	-35.7	.35	32.22	54	-21.78	-	-	-	-	86	182	H
3	* 4	41.07	PK-U	33.7	-29.5	0	45.27	-	-	74	-28.73	-	-	212	102	H
	* 4	31.33	ADR	33.7	-29.5	.35	35.88	54	-18.12	-	-	-	-	212	102	H
2	* 1.383	43.36	PK-U	28.8	-34.4	0	37.76	-	-	74	-36.24	-	-	242	147	H
	* 1.384	33.48	ADR	28.8	-34.4	.35	28.23	54	-25.77	-	-	-	-	242	147	H
4	* 4	39.96	PK-U	33.7	-29.5	0	44.16	-	-	74	-29.84	-	-	292	364	V
	* 4	31.01	ADR	33.7	-29.5	.35	35.56	54	-18.44	-	-	-	-	292	364	V
5	5.197	42.37	PK-U	34.8	-18.5	0	58.67	-	-	-	-	68.2	-9.53	163	202	V
6	6.667	37.62	PK-U	35.9	-26.6	0	46.92	-	-	-	-	68.2	-21.28	306	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

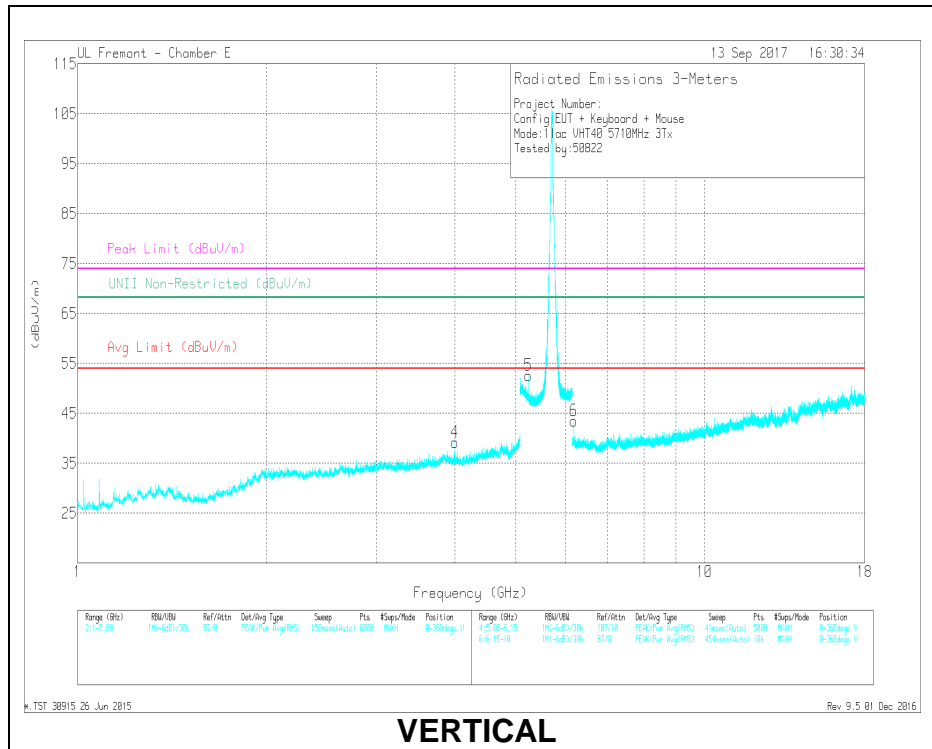

VERTICAL

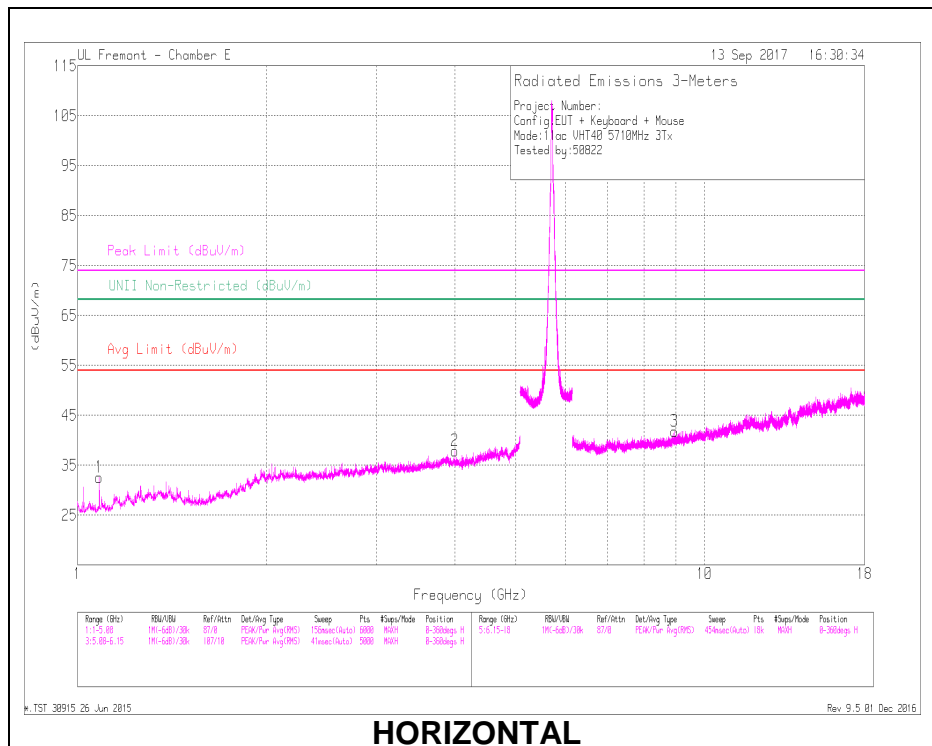

HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.083	46.22	PK-U	26.4	-35.7	0	36.92	-	-	74	-37.08	-	-	39	199	H
	* 1.083	38.7	ADR	26.4	-35.7	.35	29.75	54	-24.25	-	-	-	-	39	199	H
2	* 4	41.03	PK-U	33.7	-29.5	0	45.23	-	-	74	-28.77	-	-	91	104	H
	* 4	31.03	ADR	33.7	-29.5	.35	35.58	54	-18.42	-	-	-	-	91	104	H
4	* 4	41.22	PK-U	33.7	-29.5	0	45.42	-	-	74	-28.58	-	-	323	204	V
	* 4	33.87	ADR	33.7	-29.5	.35	38.42	54	-15.58	-	-	-	-	323	204	V
5	5.234	42.7	PK-U	34.9	-18.7	0	58.9	-	-	-	-	68.2	-9.3	133	267	V
6	6.186	41.52	PK-U	35.8	-27.6	0	49.72	-	-	-	-	68.2	-18.48	120	257	V
3	8.949	36.27	PK-U	36.9	-25.6	0	47.57	-	-	-	-	68.2	-20.63	7	348	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

5.1.9. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

1TX Antenna WF4

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

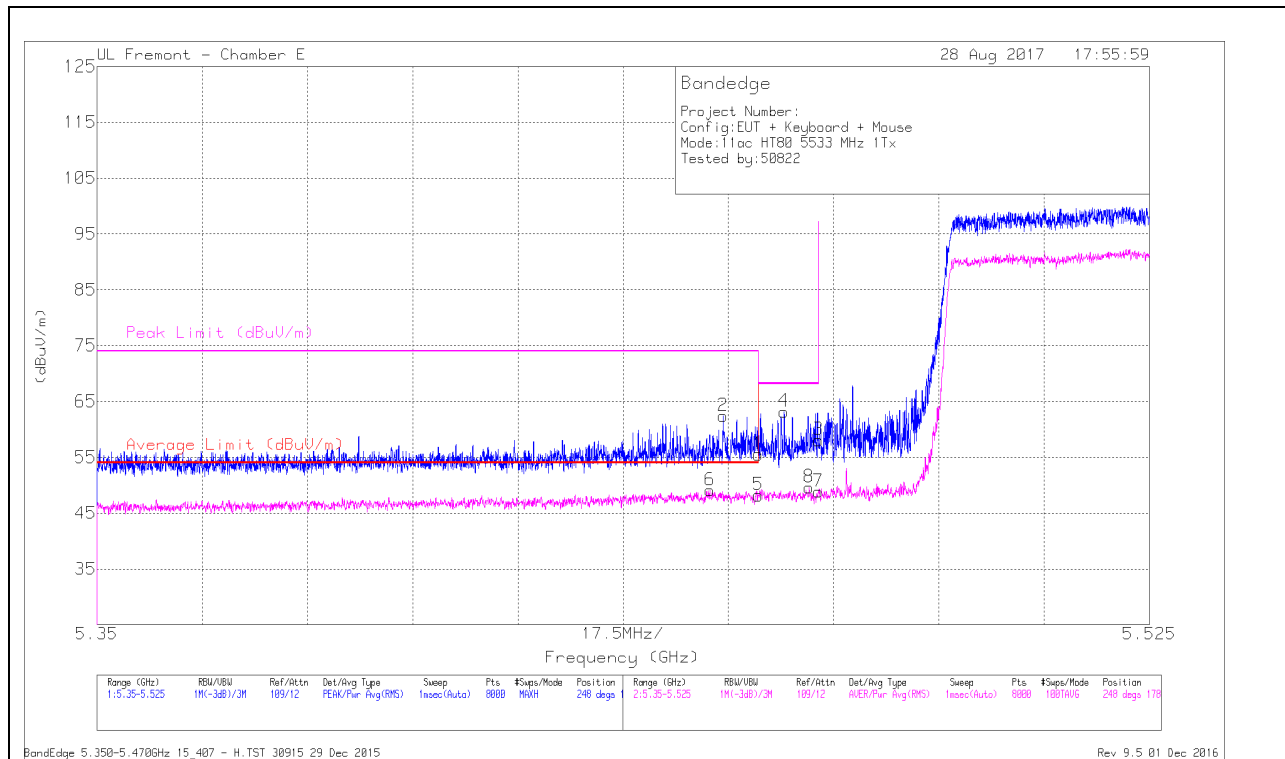

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.34	Pk	35.1	-18.9	0	55.54	-	-	74	-18.46	248	178	H
2	* 5.454	46.22	Pk	35.1	-18.9	0	62.42	-	-	74	-11.58	248	178	H
5	* 5.46	32.01	RMS	35.1	-18.9	.2	48.01	54	-5.99	-	-	248	178	H
6	* 5.452	32.91	RMS	35.1	-18.9	.2	48.91	54	-5.09	-	-	248	178	H
4	5.464	47	Pk	35.1	-18.9	0	63.2	-	-	68.2	-5	248	178	H
8	5.468	33.41	RMS	35.1	-18.9	0	49.61	-	-	-	-	248	178	H
3	5.47	41.89	Pk	35.1	-18.9	0	58.09	-	-	68.2	-10.11	248	178	H
7	5.47	32.63	RMS	35.1	-18.9	0	48.83	-	-	-	-	248	178	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

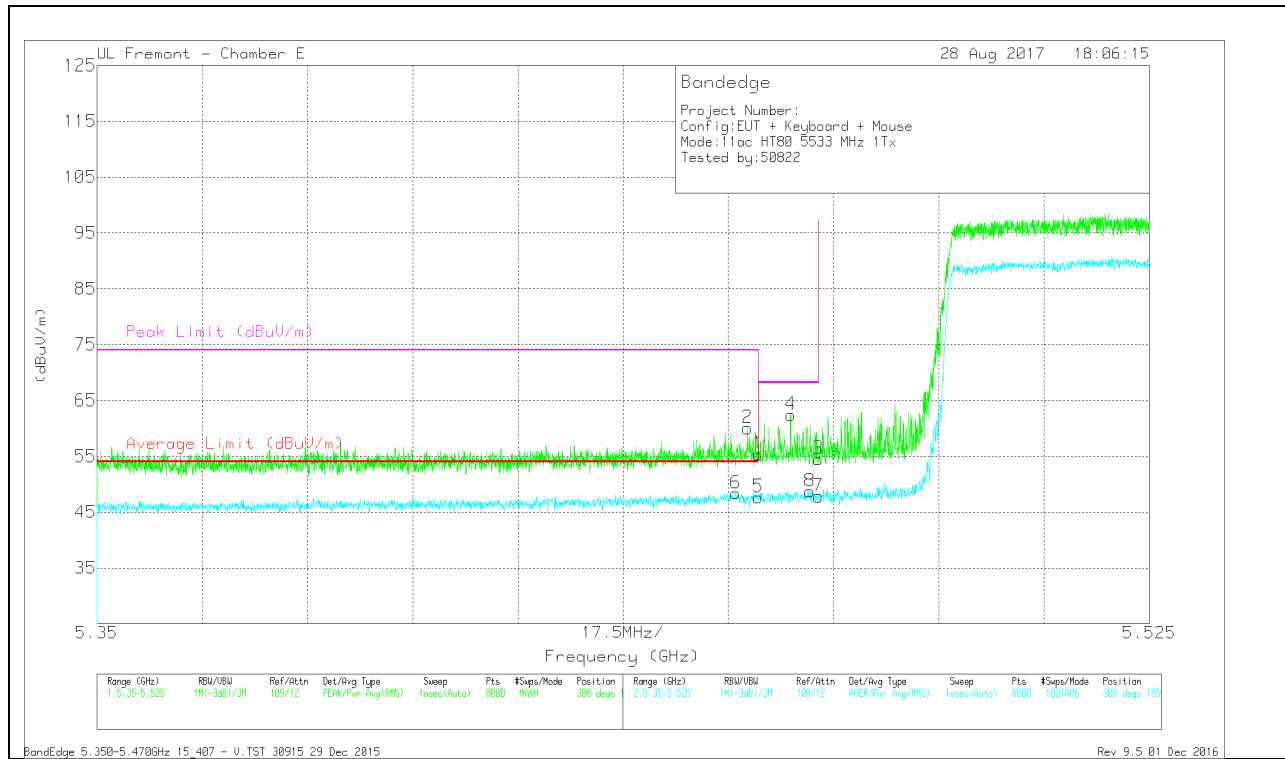


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.19	Pk	35.1	-18.9	0	55.39	-	-	74	-18.61	308	189	V
2	* 5.458	43.86	Pk	35.1	-18.9	0	60.06	-	-	74	-13.94	308	189	V
5	* 5.46	31.47	RMS	35.1	-18.9	.2	47.47	54	-6.53	-	-	308	189	V
6	* 5.456	32.15	RMS	35.1	-18.9	.2	48.15	54	-5.85	-	-	308	189	V
4	5.465	46.26	Pk	35.1	-18.9	0	62.46	-	-	68.2	-5.74	308	189	V
8	5.469	32.55	RMS	35.1	-18.9	0	48.75	-	-	-	-	308	189	V
3	5.47	38.3	Pk	35.1	-18.9	0	54.5	-	-	68.2	-13.7	308	189	V
7	5.47	31.63	RMS	35.1	-18.9	0	47.83	-	-	-	-	308	189	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

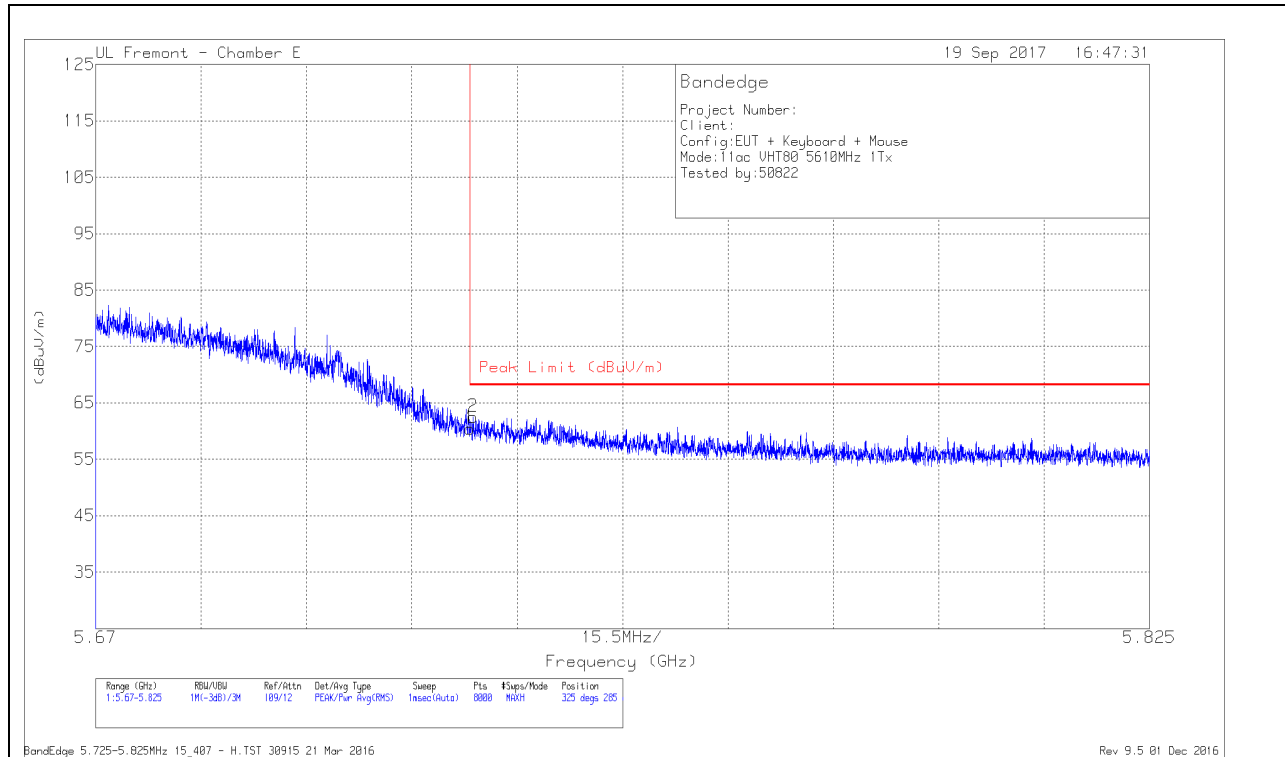

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.48	Pk	35.1	-19.1	0	60.48	68.2	-7.72	325	285	H
2	5.725	46.57	Pk	35.1	-19.1	0	62.57	68.2	-5.63	325	285	H

Pk - Peak detector

VERTICAL RESULT

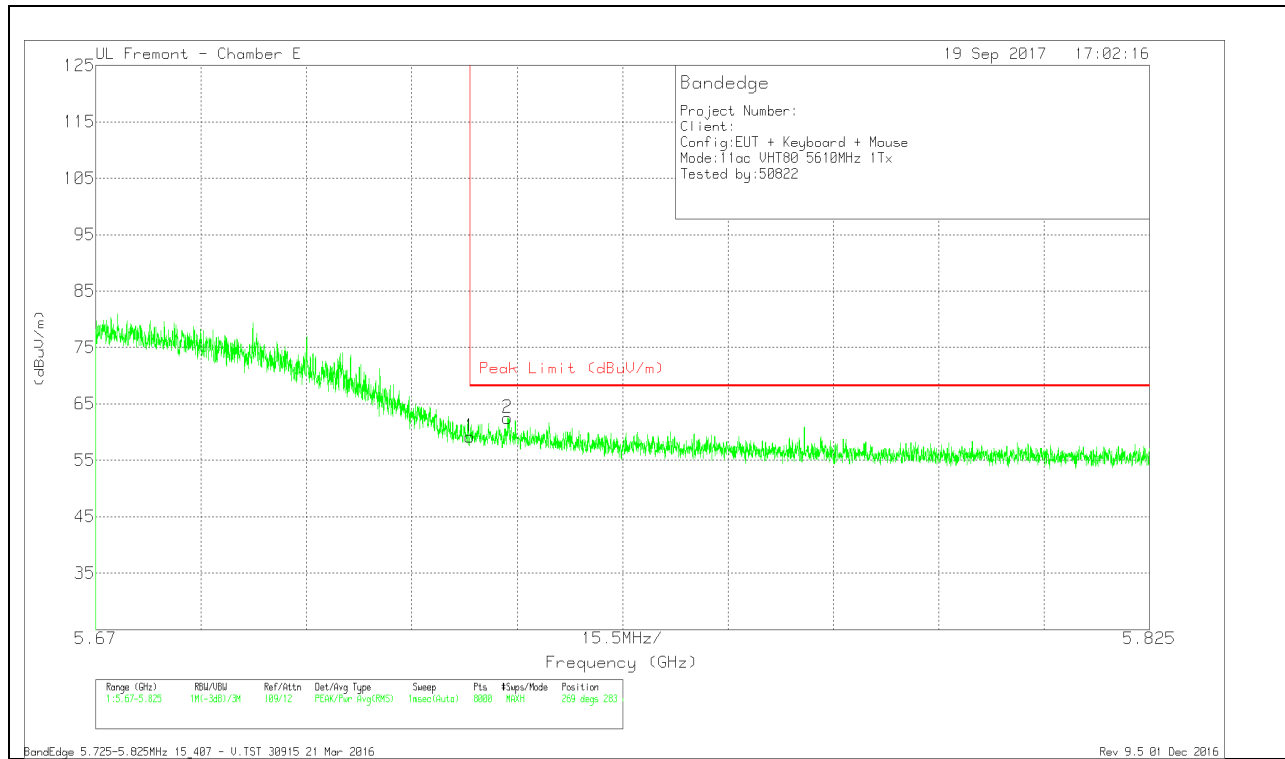


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.25	PK	35.1	-19.1	0	59.25	68.2	-8.95	269	283	V
2	5.731	46.49	PK	35.1	-19.1	0	62.49	68.2	-5.71	269	283	V

Pk - Peak detector

1TX Antenna WF3

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

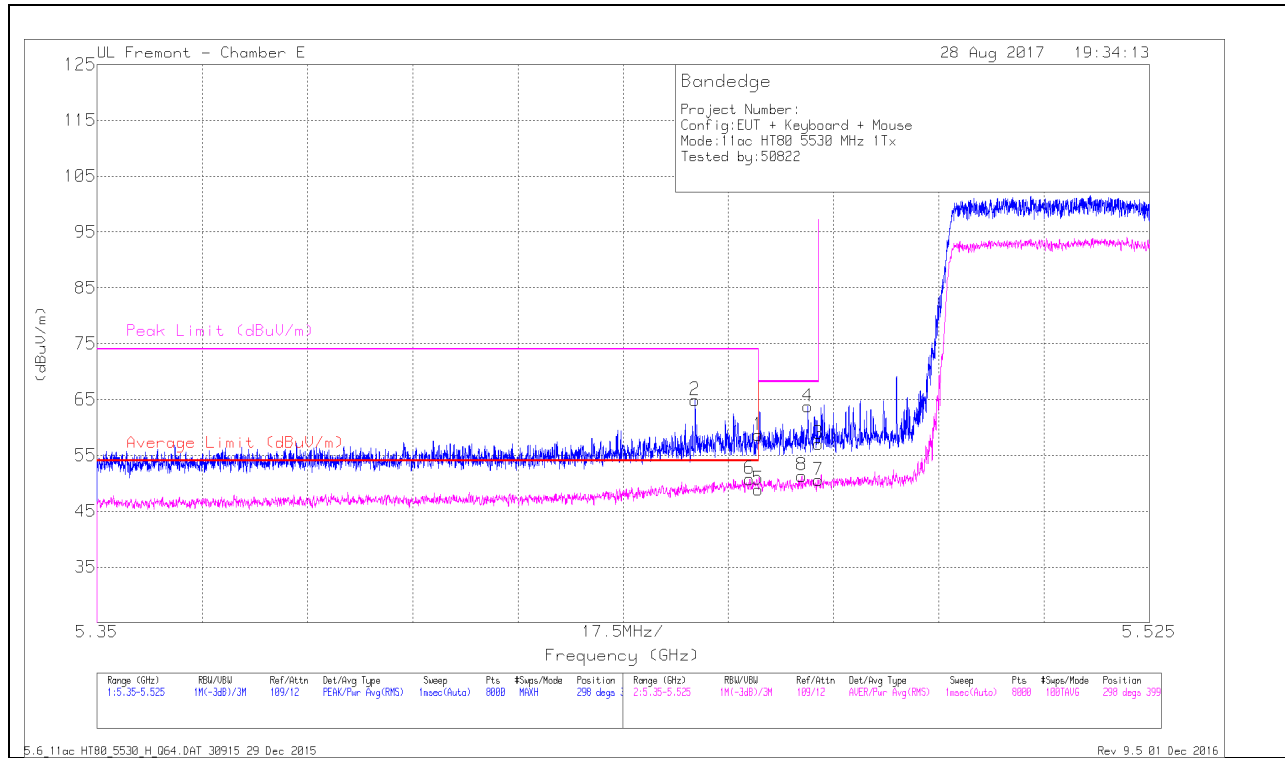


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.41	Pk	35.1	-18.9	0	58.61	-	-	74	-15.39	298	399	H
2	* 5.449	48.68	Pk	35.1	-18.9	0	64.88	-	-	74	-9.12	298	399	H
5	* 5.46	32.5	RMS	35.1	-18.9	.2	48.9	54	-5.1	-	-	298	399	H
6	* 5.459	34.36	RMS	35.1	-18.9	.2	50.76	54	-3.24	-	-	298	399	H
8	5.467	34.96	RMS	35.1	-18.9	.2	51.36	-	-	-	-	298	399	H
4	5.468	47.56	Pk	35.1	-18.9	0	63.76	-	-	68.2	-4.44	298	399	H
3	5.47	40.86	Pk	35.1	-18.9	0	57.06	-	-	68.2	-11.14	298	399	H
7	5.47	34.15	RMS	35.1	-18.9	.2	50.55	-	-	-	-	298	399	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

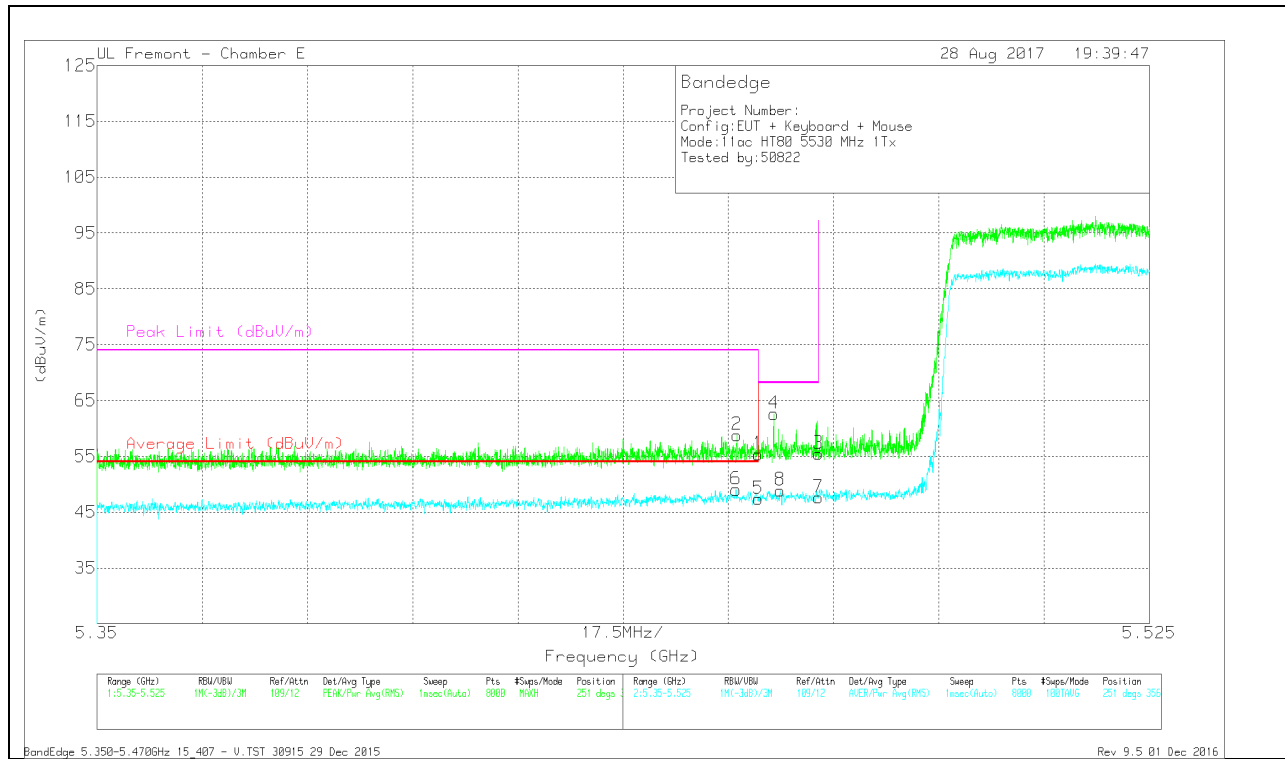


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.16	Pk	35.1	-18.9	0	55.36	-	-	74	-18.64	251	356	V
2	* 5.456	42.62	Pk	35.1	-18.9	0	58.82	-	-	74	-15.18	251	356	V
5	* 5.46	31.16	RMS	35.1	-18.9	.2	47.16	54	-6.84	-	-	251	356	V
6	* 5.456	32.85	RMS	35.1	-18.9	.2	48.85	54	-5.15	-	-	251	356	V
4	5.463	46.41	Pk	35.1	-18.9	0	62.61	-	-	68.2	-5.59	251	356	V
8	5.464	32.7	RMS	35.1	-18.9	0	48.9	-	-	-	-	251	356	V
3	5.47	39.28	Pk	35.1	-18.9	0	55.48	-	-	68.2	-12.72	251	356	V
7	5.47	31.43	RMS	35.1	-18.9	0	47.63	-	-	-	-	251	356	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

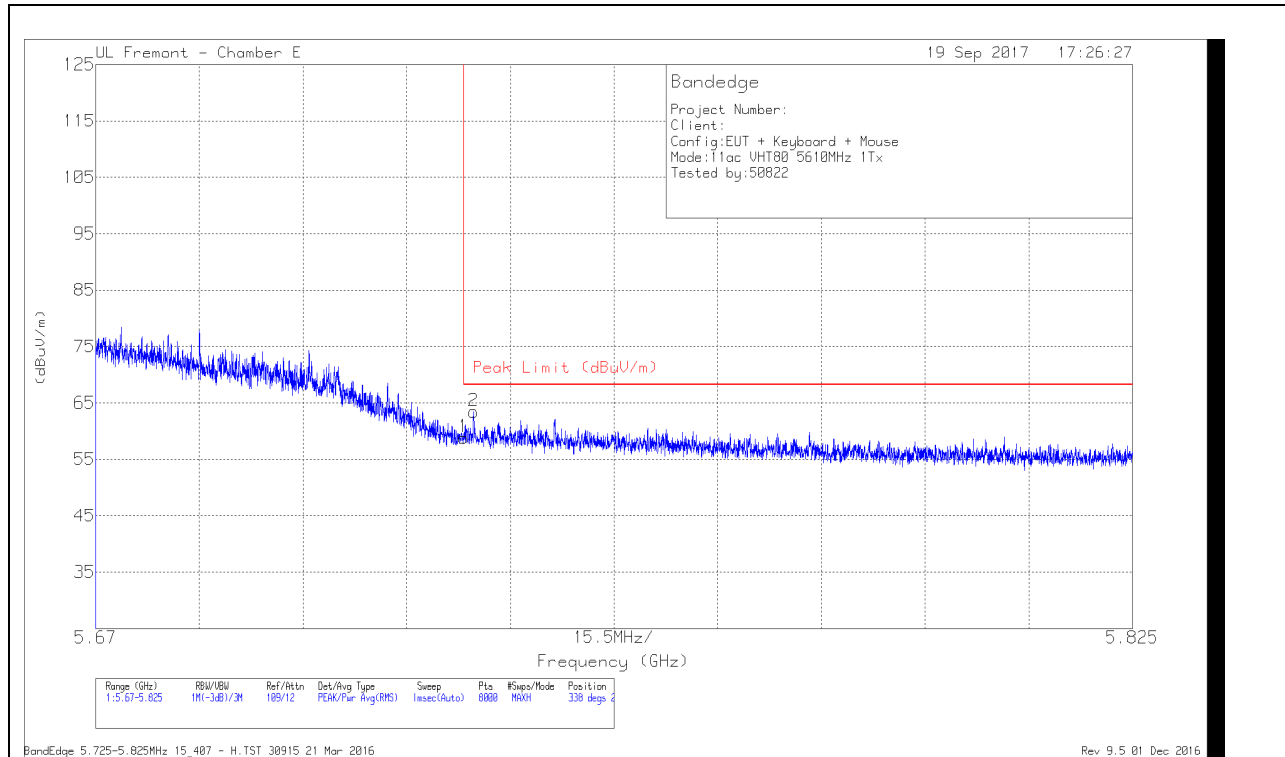

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.88	Pk	35.1	-19.1	0	58.88	68.2	-9.32	338	263	H
2	5.727	47.48	Pk	35.1	-19.1	0	63.48	68.2	-4.72	338	263	H

Pk - Peak detector

VERTICAL RESULT

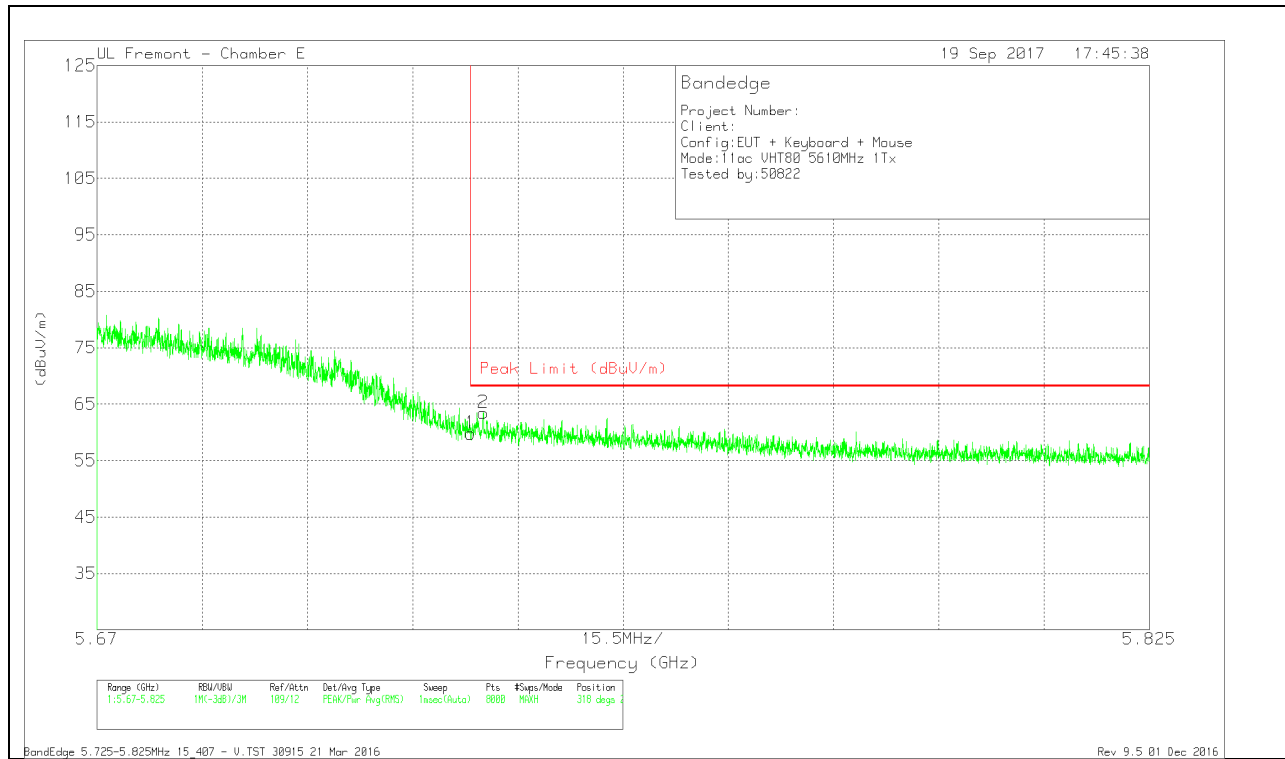


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.8	PK	35.1	-19.1	0	59.8	68.2	-8.4	318	222	V
2	5.727	47.47	PK	35.1	-19.1	0	63.47	68.2	-4.73	318	222	V

Pk - Peak detector

1TX Antenna WF2

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

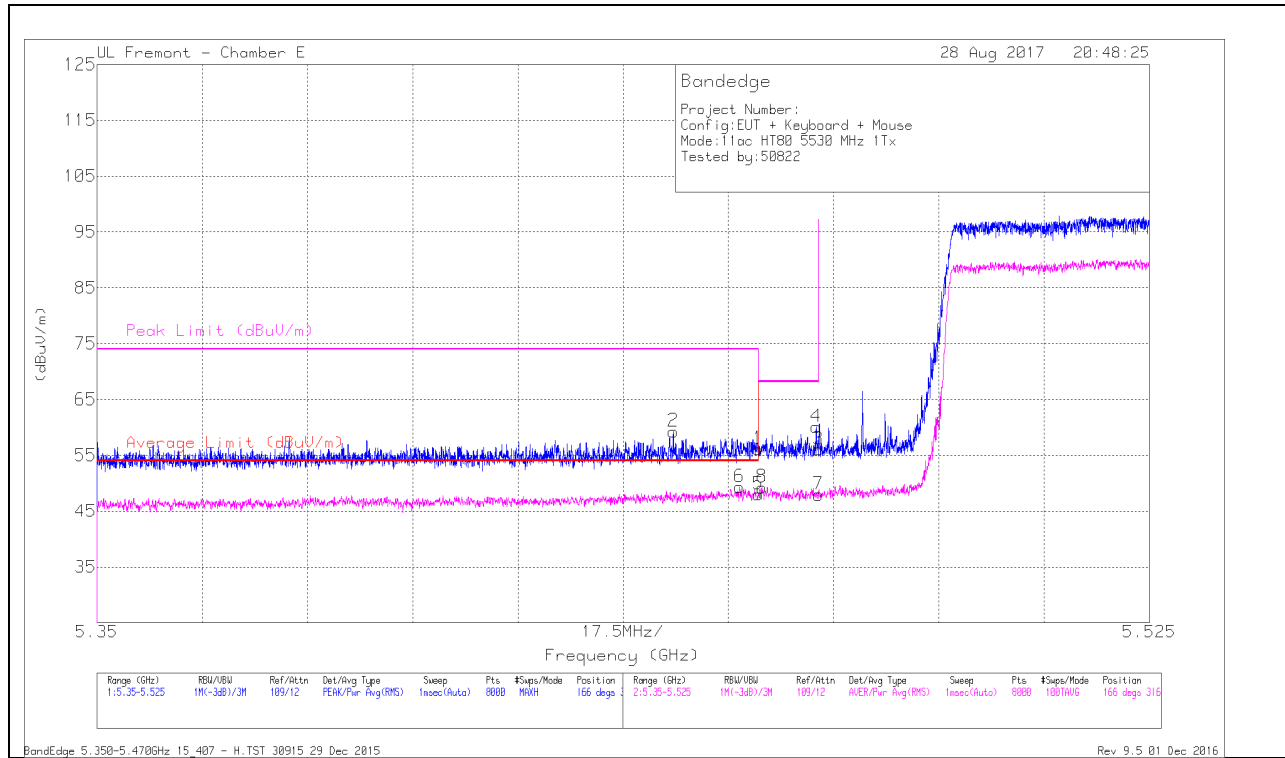


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.91	Pk	35.1	-18.9	0	56.11	-	-	74	-17.89	166	316	H
2	* 5.446	43.09	Pk	35.1	-18.9	0	59.29	-	-	74	-14.71	166	316	H
5	* 5.46	31.81	RMS	35.1	-18.9	.2	47.81	54	-6.19	-	-	166	316	H
6	* 5.457	33.12	RMS	35.1	-18.9	.2	49.12	54	-4.88	-	-	166	316	H
8	5.461	33.07	RMS	35.1	-18.9	0	49.27	-	-	-	-	166	316	H
3	5.47	39.86	Pk	35.1	-18.9	0	56.06	-	-	68.2	-12.14	166	316	H
4	5.47	43.9	Pk	35.1	-18.9	0	60.1	-	-	68.2	-8.1	166	316	H
7	5.47	31.76	RMS	35.1	-18.9	0	47.96	-	-	-	-	166	316	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

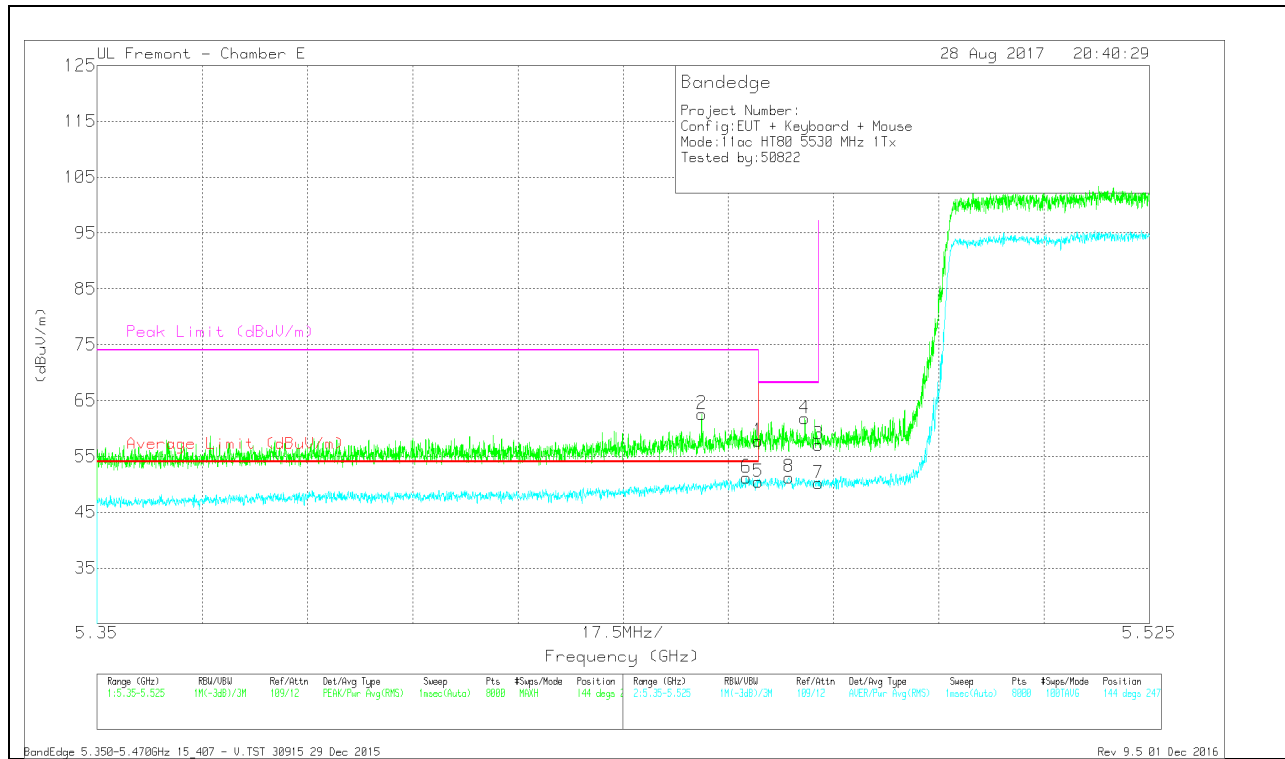


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.57	Pk	35.1	-18.9	0	57.77	-	-	74	-16.23	144	247	V
2	* 5.451	46.38	Pk	35.1	-18.9	0	62.58	-	-	74	-11.42	144	247	V
5	* 5.46	34.04	RMS	35.1	-18.9	.2	50.44	54	-3.56	-	-	144	247	V
6	* 5.458	34.8	RMS	35.1	-18.9	.2	51.2	54	-2.8	-	-	144	247	V
8	5.465	34.84	RMS	35.1	-18.9	.2	51.24	-	-	-	-	144	247	V
4	5.468	45.58	Pk	35.1	-18.9	0	61.78	-	-	68.2	-6.42	144	247	V
3	5.47	40.91	Pk	35.1	-18.9	0	57.11	-	-	68.2	-11.09	144	247	V
7	5.47	33.8	RMS	35.1	-18.9	.2	50.2	-	-	-	-	144	247	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

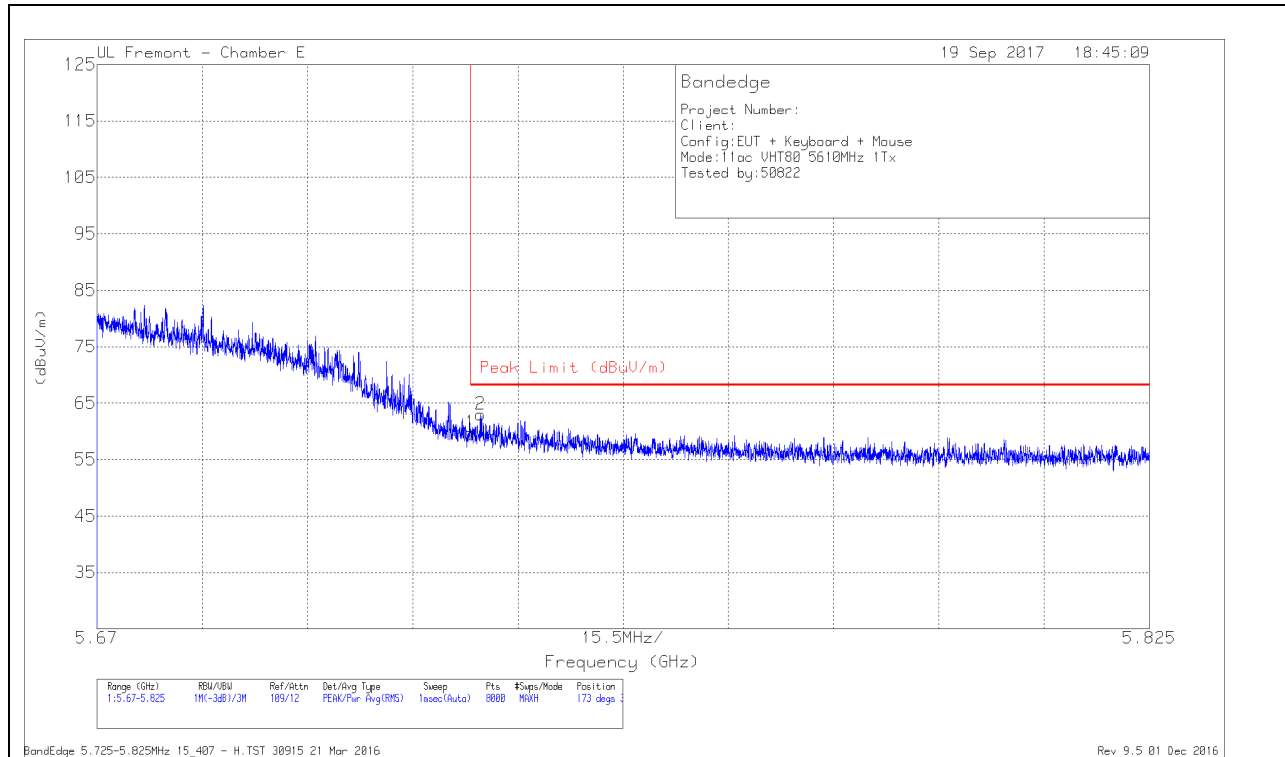

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.68	PK	35.1	-19.1	0	59.68	68.2	-8.52	173	320	H
2	5.726	46.95	PK	35.1	-19.1	0	62.95	68.2	-5.25	173	320	H

Pk - Peak detector

VERTICAL RESULT

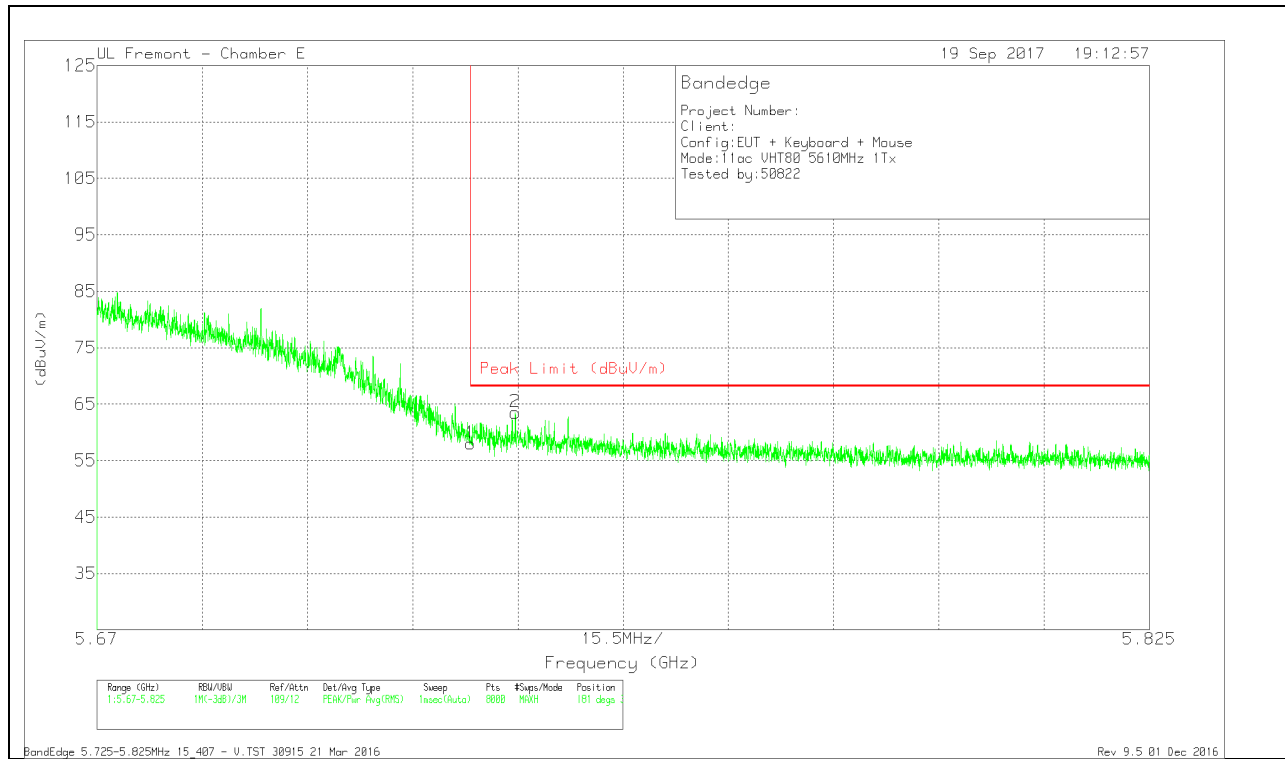


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.03	PK	35.1	-19.1	0	58.03	68.2	-10.17	181	310	V
2	5.732	47.53	PK	35.1	-19.1	0	63.53	68.2	-4.67	181	310	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF3 CDD Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

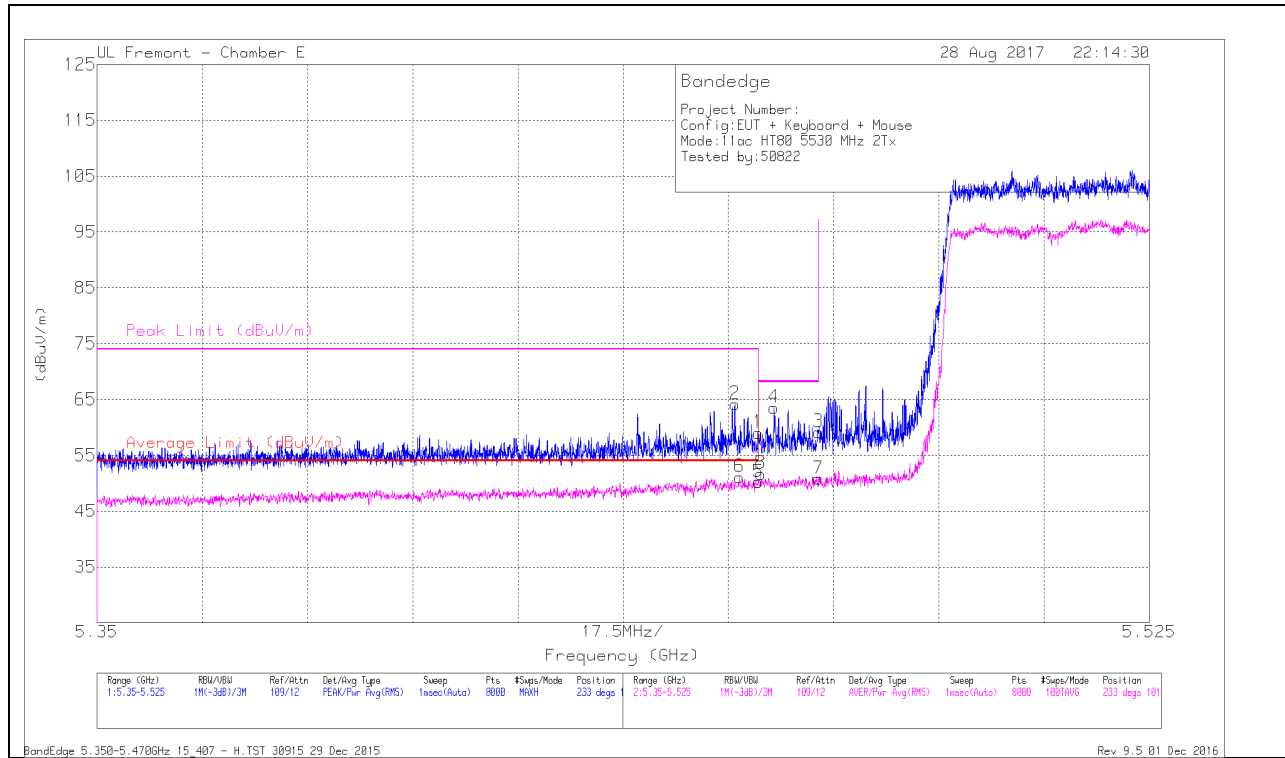


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.83	Pk	35.1	-18.9	0	59.03	-	-	74	-14.97	233	101	H
2	* 5.456	47.97	Pk	35.1	-18.9	0	64.17	-	-	74	-9.83	233	101	H
5	* 5.46	33.65	RMS	35.1	-18.9	.33	50.18	54	-3.82	-	-	233	101	H
6	* 5.457	34.59	RMS	35.1	-18.9	.33	51.12	54	-2.88	-	-	233	101	H
8	5.46	35.18	RMS	35.1	-18.9	.33	51.71	-	-	-	-	233	101	H
4	5.463	47.34	Pk	35.1	-18.9	0	63.54	-	-	68.2	-4.66	233	101	H
3	5.47	42.96	Pk	35.1	-18.9	0	59.16	-	-	68.2	-9.04	233	101	H
7	5.47	34.29	RMS	35.1	-18.9	.33	50.82	-	-	-	-	233	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

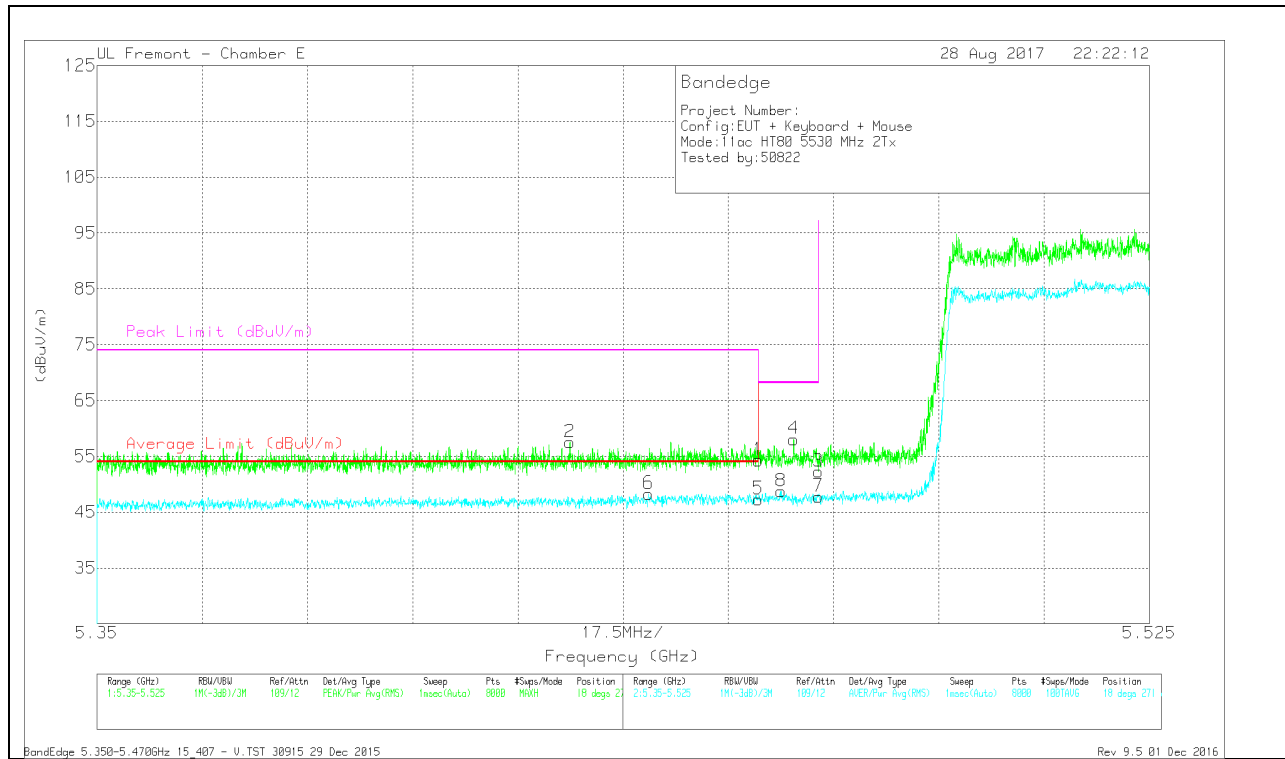


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.11	Pk	35.1	-18.9	0	54.31	-	-	74	-19.69	18	271	V
2	* 5.429	41.4	Pk	35.1	-19	0	57.5	-	-	74	-16.5	18	271	V
5	* 5.46	30.78	RMS	35.1	-18.9	.33	47.31	54	-6.69	-	-	18	271	V
6	* 5.442	31.76	RMS	35.1	-18.9	.33	48.29	54	-5.71	-	-	18	271	V
8	5.464	32.21	RMS	35.1	-18.9	.33	48.74	-	-	-	-	18	271	V
4	5.466	41.88	Pk	35.1	-18.9	0	58.08	-	-	68.2	-10.12	18	271	V
3	5.47	36.07	Pk	35.1	-18.9	0	52.27	-	-	68.2	-15.93	18	271	V
7	5.47	31.25	RMS	35.1	-18.9	.33	47.78	-	-	-	-	18	271	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

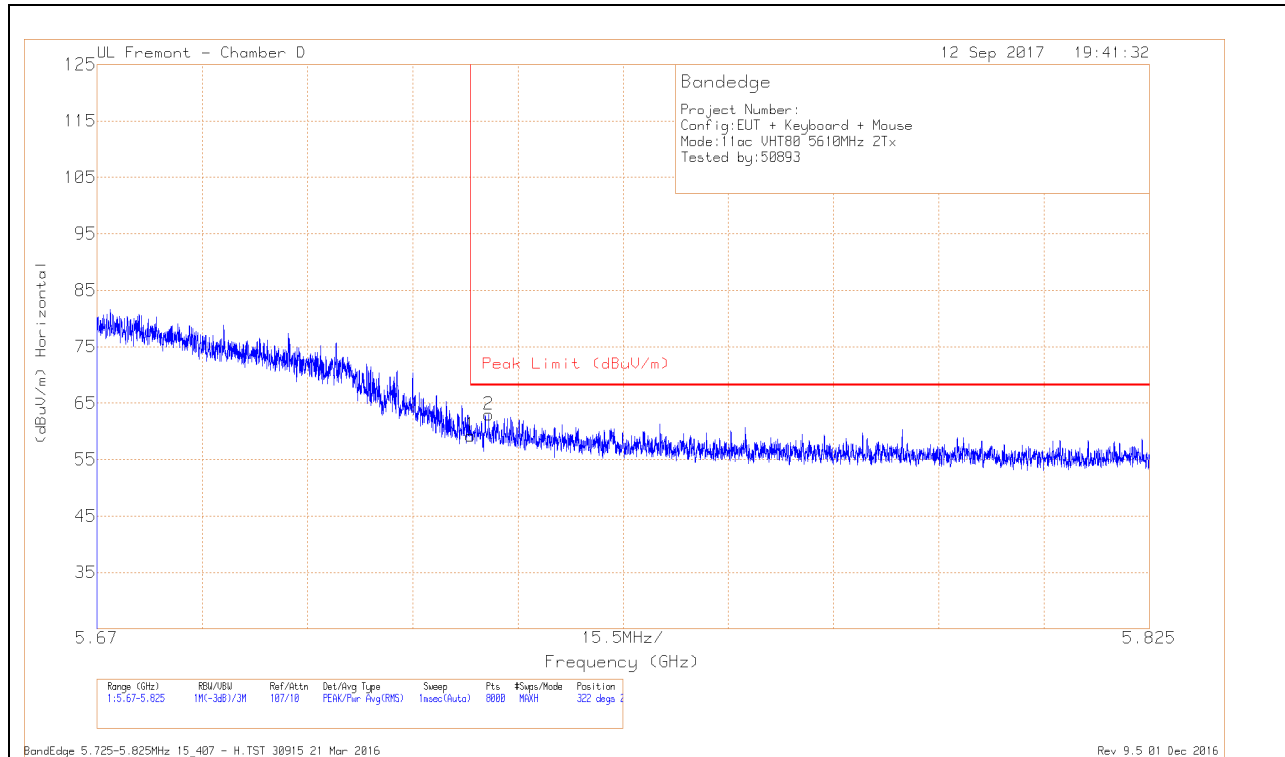

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.98	Pk	34.8	-17.5	0	59.28	68.2	-8.92	322	293	H
2	5.728	45.78	Pk	34.8	-17.6	0	62.98	68.2	-5.22	322	293	H

Pk - Peak detector

VERTICAL RESULT




Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.21	Pk	34.8	-17.5	0	59.51	68.2	-8.69	0	288	V
2	5.746	46.18	Pk	34.8	-17.5	0	63.48	68.2	-4.72	0	288	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF3 SDM Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

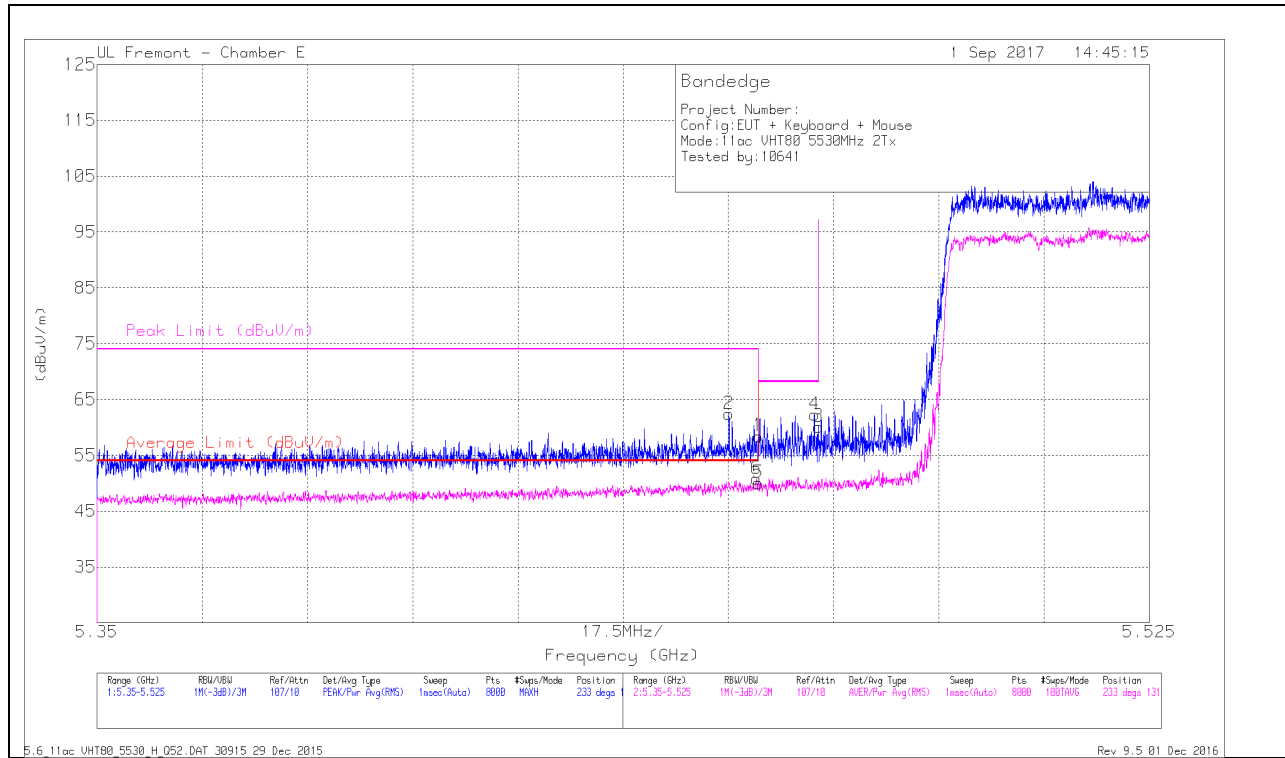


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.455	47.29	Pk	35.1	-20	0	62.39	-	-	74	-11.61	233	131	H
1	* 5.46	43.33	Pk	35.1	-20	0	58.43	-	-	74	-15.57	233	131	H
5	* 5.46	34.57	RMS	35.1	-20	.34	50.01	54	-3.99	-	-	233	131	H
6	* 5.46	35.33	RMS	35.1	-20	.34	50.77	54	-3.23	-	-	233	131	H
4	5.469	47.1	Pk	35.1	-19.9	0	62.3	-	-	68.2	-5.9	233	131	H
3	5.47	44.94	Pk	35.1	-19.9	0	60.14	-	-	68.2	-8.06	233	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

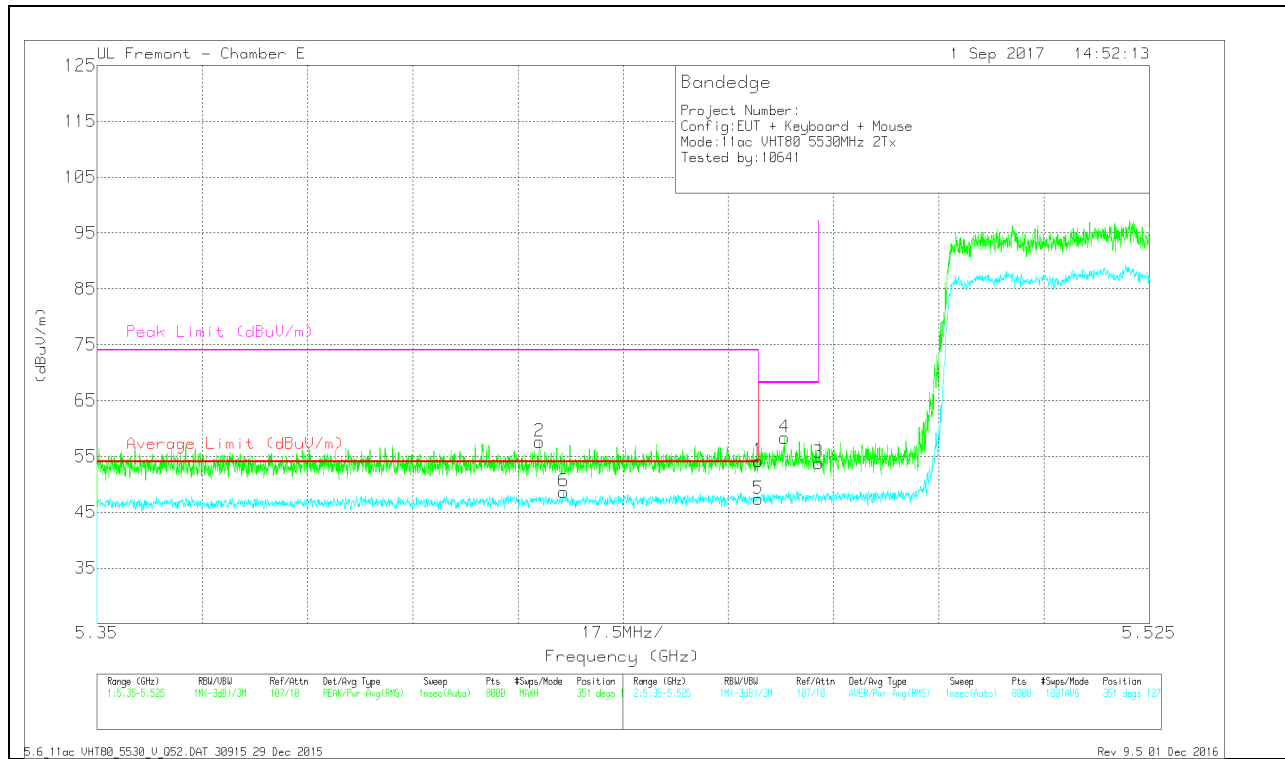


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.424	42.61	Pk	35.1	-20.1	0	57.61	-	-	74	-16.39	351	127	V
6	* 5.428	33.29	RMS	35.1	-20.1	.34	48.63	54	-5.37	-	-	351	127	V
1	* 5.46	39.04	Pk	35.1	-20	0	54.14	-	-	74	-19.86	351	127	V
5	* 5.46	31.88	RMS	35.1	-20	.34	47.32	54	-6.68	-	-	351	127	V
4	5.464	43.24	Pk	35.1	-20	0	58.34	-	-	68.2	-9.86	351	127	V
3	5.47	38.6	Pk	35.1	-19.9	0	53.8	-	-	68.2	-14.4	351	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

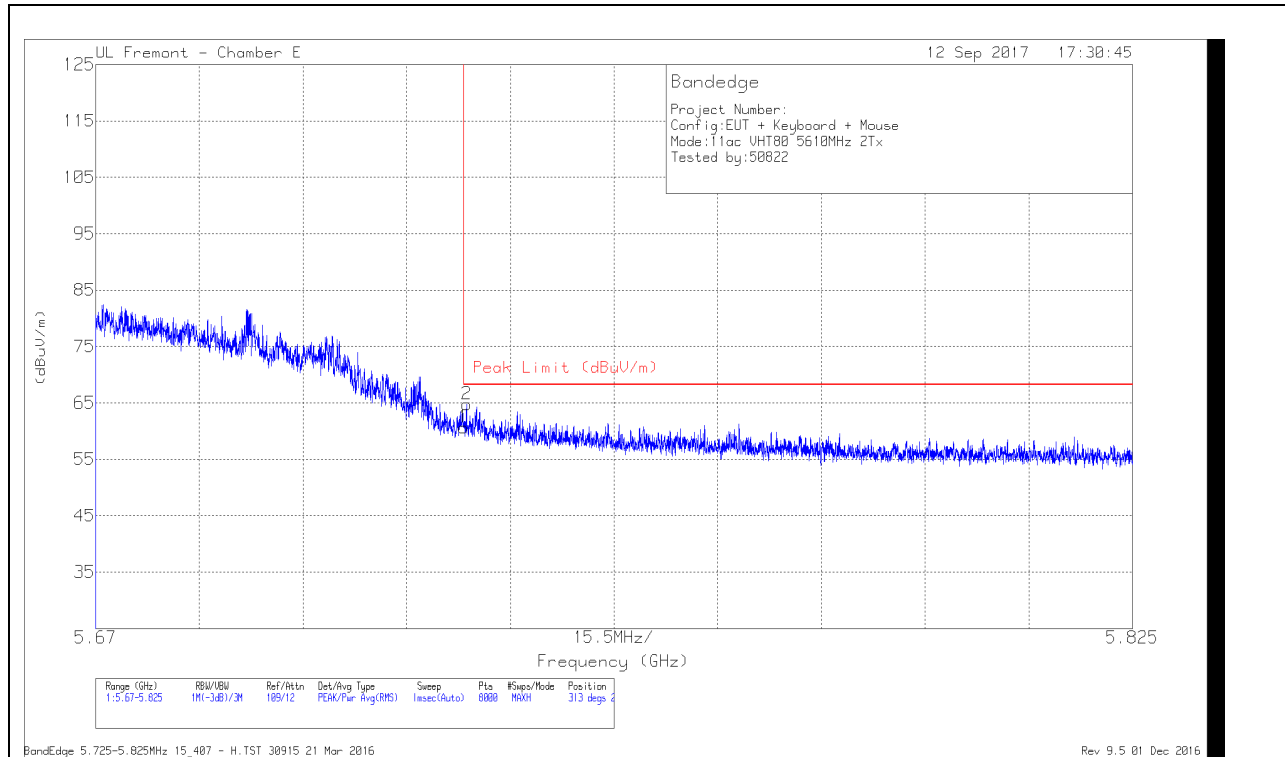

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.63	PK	35.1	-19.1	0	60.63	68.2	-7.57	313	285	H
2	5.725	48.73	PK	35.1	-19.1	0	64.73	68.2	-3.47	313	285	H

Pk - Peak detector

VERTICAL RESULT

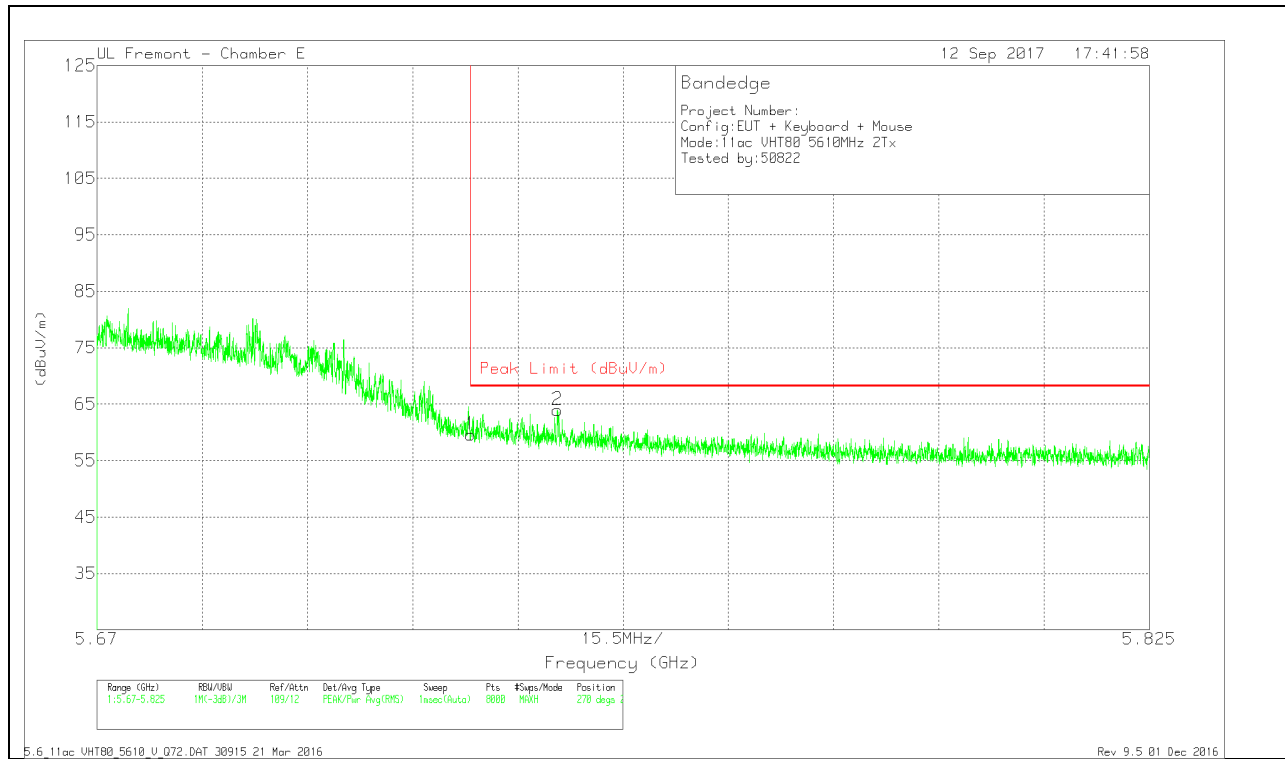

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.61	PK	35.1	-19.1	0	59.61	68.2	-8.59	270	280	V
2	5.738	47.96	PK	35.1	-19.1	0	63.96	68.2	-4.24	270	280	V

Pk - Peak detector