





**BUREAU  
VERITAS**

# Test Report

## Bureau Veritas Consumer Product Services

Report No	EW0277-1 Issue 2
Client	Amazon.com Services LLC
Address	300 Riverpark Drive North Reading, MA 01864
Phone	(978) 276-2815
Items tested	SRBRS ELF Badge Module
FCC ID	2AEZR-SRBRSE LFR1
IC	10244A-SRBRSE LFR1
HVIN	600-02357-001
PMN	SRBRS ELF Badge Module
FRN	0024656845
Equipment Type	Part 15 Low Power Transmitter Below 1705kHz
Equipment Code	DCD
Standards	CFR Title 47 FCC Part 15.209, RSS-210 Issue 10 Section 7.3
Test Dates	July 5, 2022 through July 30, 2022
Results	As detailed within this report
Prepared by	 Bryan Valcourt – EMC Test Engineer
Authorized by	 Yunus Faziloglu – Wireless Manager
Issue Date	<u>2022-11-14</u>
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 21 of this report.

Bureau Veritas Consumer Product Services is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



**Bureau Veritas Consumer Product Services**  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



**Contents**

Contents .....2  
Product Tested - Configuration Documentation .....3  
Summary and Test Methodology .....4  
Compliance Statement .....5  
Modifications Required for Compliance .....5  
Testing Notes .....5  
Test Results .....6  
RADIATED EMISSIONS.....6  
Occupied Bandwidth.....19  
Measurement Uncertainty.....20  
Conditions Of Testing .....21  
Document Revision History .....23

Form Final Report REV 2-16-07 (DW)



**Product Tested - Configuration Documentation**

EUT Configuration											
Work Order: W0277 Company: Amazon.com Services LLC Company Address: 300 River Park Drive North Reading, MA, 01864 Contact: Dao Keopadith Person Present: Yes											
<b>EUT:</b>			<b>MN</b>	<b>PN</b>	<b>SN</b>						
SRBRS ELF Badge				600-02357-001 REV 04	27X214511253						
EUT Description: SRBRS ELF Badge EUT Max Frequency: 5800MHz EUT Min Frequency: 0.125MHz EUT ISM Frequency: N/A											
<b>Support Equipment:</b>			<b>MN</b>	<b>SN</b>							
Interconnecting Cable J1				690-01528							
<b>EUT Ports:</b>											
Port Label	Port Type	No. of ports	No. Populated	Cable Type	Shielded	Ferrites	Length	Max Length	In/Out NEBS Type	Unpopulated Reason	
Interconnecting Port J1	Other	1	1	Other	Yes	No	1m	1m	Indoor		
USB	USB	1	0	USB	Yes	No	3M	5m	Indoor	Diagnostics only port	
<b>Software / Operating Mode Description:</b>											
Instal battery into EUT, plug in cable J1. On switch turn to left for one second, then turn to right. Then sensor on cable with vibrate and beep.											
<b>Performance Criteria:</b>											
This will only be Emissions, no Performance Criteria.											

Note: This product contains also a 925MHz Transmitter and a certified 5GHz (5180-5825MHz) transmitter module, FCC ID: XF6-RS9113DB



**Summary and Test Methodology**

On July 5, 2022 through July 12, 2022 we tested the SRBRS ELF Badge Module for compliance with the following requirements:

CFR Title 47 FCC Part 15.209, RSS-210 Issue 10 Section 7.3

EUT transmits at 125kHz. Emissions were maximized by rotating the device around 3 orthogonal planes. EUT has an integral antenna.

Radiated emission testing was performed according to the procedures specified in ANSI C63.10-2013 and RSS-Gen Issue 5.

AC mains conducted emission testing was not required because the EUT is battery powered.

EUT operating voltage is 15VDC.

The following bandwidths were used during radiated spurious emissions testing.

<b>Frequency</b>	<b>RBW</b>	<b>VBW</b>
0.009-0.15MHz	200Hz	1kHz
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	300kHz
1-10GHz	1MHz	3MHz

We found that the product met the above limits. The test sample was received in good condition.



**Compliance Statement**

RSS-GEN	RSP-100	RSS 210	Part 15	Comments
6.4			15.15(b)	There are no controls accessible to the user that varies the output power.
	3.1		15.19	The label is shown in the label exhibit.
	3.2		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3.2			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13.2			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
6.13.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
6.8			15.203	The antenna for this device is an internal tuned ferrite core.
8.10 8.9		7.3	15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	Not applicable since EUT is battery powered.
6.7				99% emissions bandwidth plot is provided.

**Modifications Required for Compliance**

None

**Testing Notes**

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency 137.158KHz resulted in a level of 69.3dBuV/m, which is equivalent to  $69.3 - 51.5 = 17.8\text{dBuA/m}$ , which has the same margin, -35.6 dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.



**Test Results**

**RADIATED EMISSIONS**


Radiated Emissions Table															
Date: 06-Jul-22		7-Jul-22		Company: Amazon.com Services LLC				Work Order: W0277							
Engineer: Bryan Valcourt				EUT Desc: SRBRS ELF Badge				EUT Operating Voltage/Frequency: 15VDC							
Temp: 22.9°, 23.7°				Humidity: 50.8%, 52.6%				Pressure: 1010, 1007 mBar							
Frequency Ran: 125kHz Fundamental								Measurement Distance: 3 m							
Notes: Peak readings. Average limit is calculated as Adjusted Reading - DCCF. $DCCF = 20 \cdot \log(16.24/100) = -15.79$												EUT Max Freq:			
Antenna Polarization (0° - 90°)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading	Adjusted Average Reading (dBµV/m)	FCC15.209							
								Peak Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Average Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)		
X-Axis															
Parallel	0.125	71.1	0.0	50.1	0.0	121.20	105.41	125.7	-4.5	Pass	105.7	-0.3	Pass		
Perpendicular	0.125	66.6	0.0	50.1	0.0	116.70	100.91	125.7	-9.0	Pass	105.7	-4.8	Pass		
Parallel to Floor	0.125	59.6	0.0	50.1	0.0	109.70	93.91	125.7	-16.0	Pass	105.7	-11.8	Pass		
Y-Axis															
Parallel	0.125	39.3	0.0	50.1	0.0	89.40	73.61	125.7	-36.3	Pass	105.7	-32.1	Pass		
Perpendicular	0.125	37.8	0.0	50.1	0.0	87.90	72.11	125.7	-37.8	Pass	105.7	-33.6	Pass		
Parallel to Floor	0.125	58.3	0.0	50.1	0.0	108.40	92.61	125.7	-17.3	Pass	105.7	-13.1	Pass		
Z-Axis															
Parallel	0.125	69.7	0.0	50.1	0.0	119.80	104.01	125.7	-5.9	Pass	105.7	-1.7	Pass		
Perpendicular	0.125	66.7	0.0	50.1	0.0	116.80	101.01	125.7	-8.9	Pass	105.7	-4.7	Pass		
Parallel to Floor	0.125	59.3	0.0	50.1	0.0	109.40	93.61	125.7	-16.3	Pass	105.7	-12.1	Pass		
<b>Table Result:</b> 'orst Margin				-0.3db Parallel				<b>Worst Axis:</b> X-Axis							
Test Site: EMI Chamber 1				Cable 1: Asset #2681				Cable 2: Asset #2580				Cable 3: Asset #2464			
Analyzer: MXE 1170725				Preamp: None				Antenna: Lg Loop Asset #0067				Preselector: ---			
CSsoft Radiated Emissions Calculator v 1.017.222															
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor															
Copyright Curtis-Straus LLC 2008															

Bureau Veritas Consumer Product Services Inc. Radiated Emissions, Electric Field, 3m Measurement Top Peaks Parallel 9-150kHz Notes: Normal Mode	Work Order - W0277 EUT Power Input - 15VDC Test Site - Chamber 1 Conditions - 23.7°C; 52.6%RH; 1007mBar Test Engineer - Bryan Valcourt Date of Test - 7/7/2022
---	---

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBµV/m)	Lim: FCC_pt15_20 9_dBµV/m (dBµV/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
0.064032	33.1	23.5	56.6	111.5	-54.9	PASS		165
0.077512	28.6	22.3	50.9	109.8	-59	PASS		345
0.091073	34.2	21.6	55.8	108.4	-52.6	PASS		30
0.137158	48.7	20.6	69.3	104.9	-35.6	PASS	-35.6	0
0.148037	34	20.5	54.5	104.2	-49.7	PASS		120

X Axis 9-150kHz Parallel Data Table



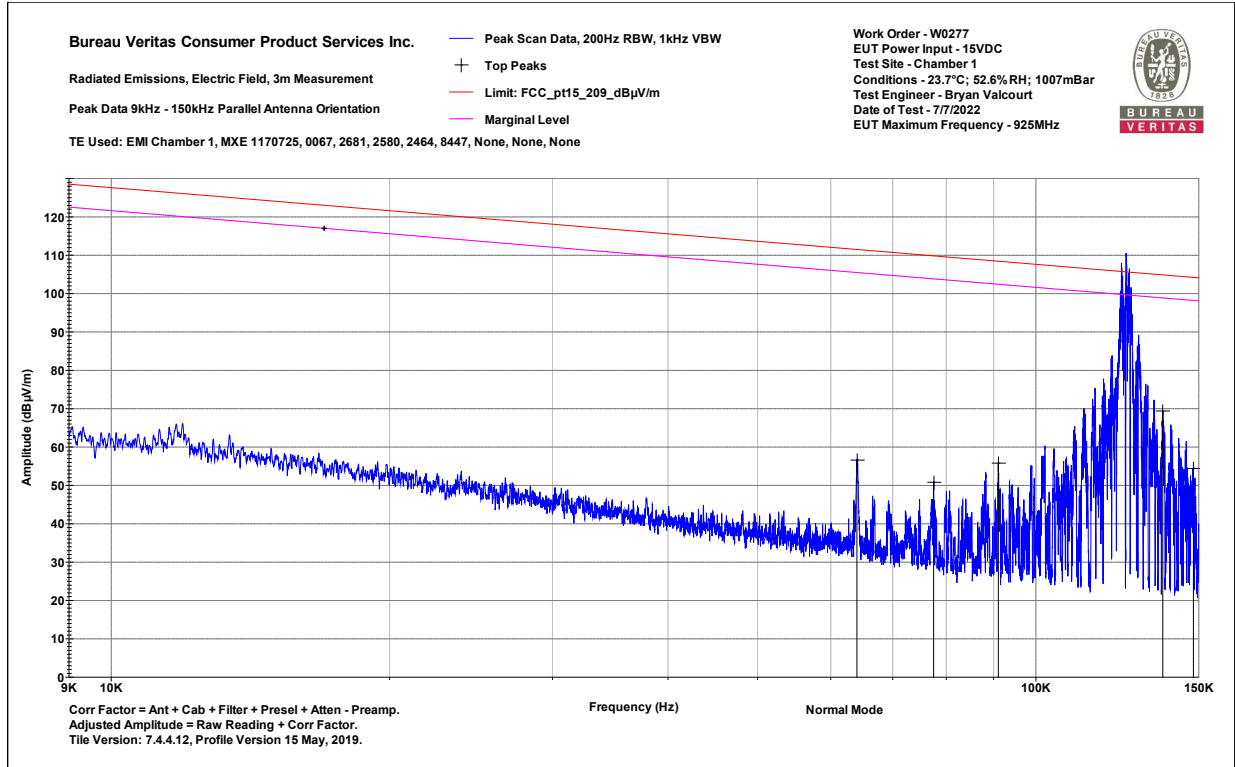


X Axis 9-150kHz Parallel Plot

<p>Bureau Veritas Consumer Product Services Inc.                  Radiated Emissions, Electric Field, 3m Measurement                  Top Peaks Perpendicular 9-150kHz                  Notes:                  Normal Mode</p>	<p>Work Order - W0277                  EUT Power Input - 15VDC                  Test Site - Chamber 1                  Conditions - 23.7°C; 52.6%RH; 1007mBar                  Test Engineer - Bryan Valcourt                  Date of Test - 7/7/2022</p>
---	--

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBµV/m)	Lim: FCC_pt15_209_dBµV/m (dBµV/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
0.015461	30.2	35.1	65.4	123.8	-58.5	PASS		165
0.028028	20.7	30.5	51.2	118.7	-67.4	PASS		210
0.064142	31.1	23.5	54.6	111.5	-56.8	PASS		345
0.137373	45.4	20.6	66	104.9	-38.9	PASS	-38.9	90
0.148146	35.4	20.5	55.9	104.2	-48.3	PASS		285

X Axis 9-150kHz Perpendicular Data Table



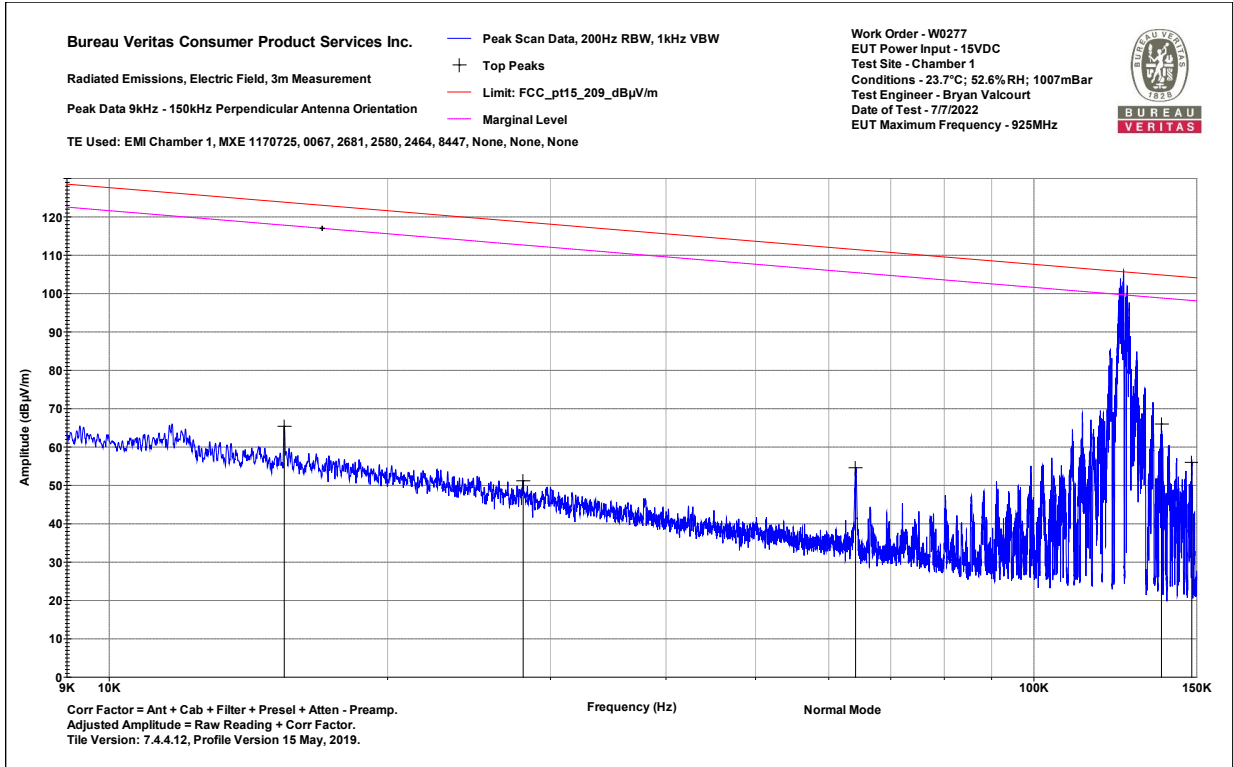

X Axis 9-150kHz Perpendicular Plot

Bureau Veritas Consumer Product Services Inc.  
 Radiated Emissions Magnetic Field 3m Distance  
 Top Peaks Parallel 150-1000kHz  
 Notes:  
 Normal Mode


Work Order - W0277  
 EUT Power Input - 15VDC  
 Test Site - Chamber 1  
 Conditions - 23.8°C; 53.3%RH; 1007mBar  
 Test Engineer - Bryan Valcourt  
 Date of Test - 7/8/2022

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/s)	Adjusted Peak Amplitude (dBµV/m)	Lim: FCC_pt15_20 9_dBµV/m (dBµV/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
0.375	53.5	19.2	72.7	96.1	-23.5	PASS		15
0.497	27.8	19.1	46.9	73.7	-26.8	PASS		270
0.631	44.5	19.1	63.6	71.6	-8	PASS	-8	15
0.789	36.7	19.1	55.8	69.7	-13.9	PASS		240
0.874	35.4	19.1	54.5	68.8	-14.2	PASS		180
0.982	28.5	19.1	47.6	67.8	-20.1	PASS		255

X Axis 150kHz-1MHz Parallel Data Table





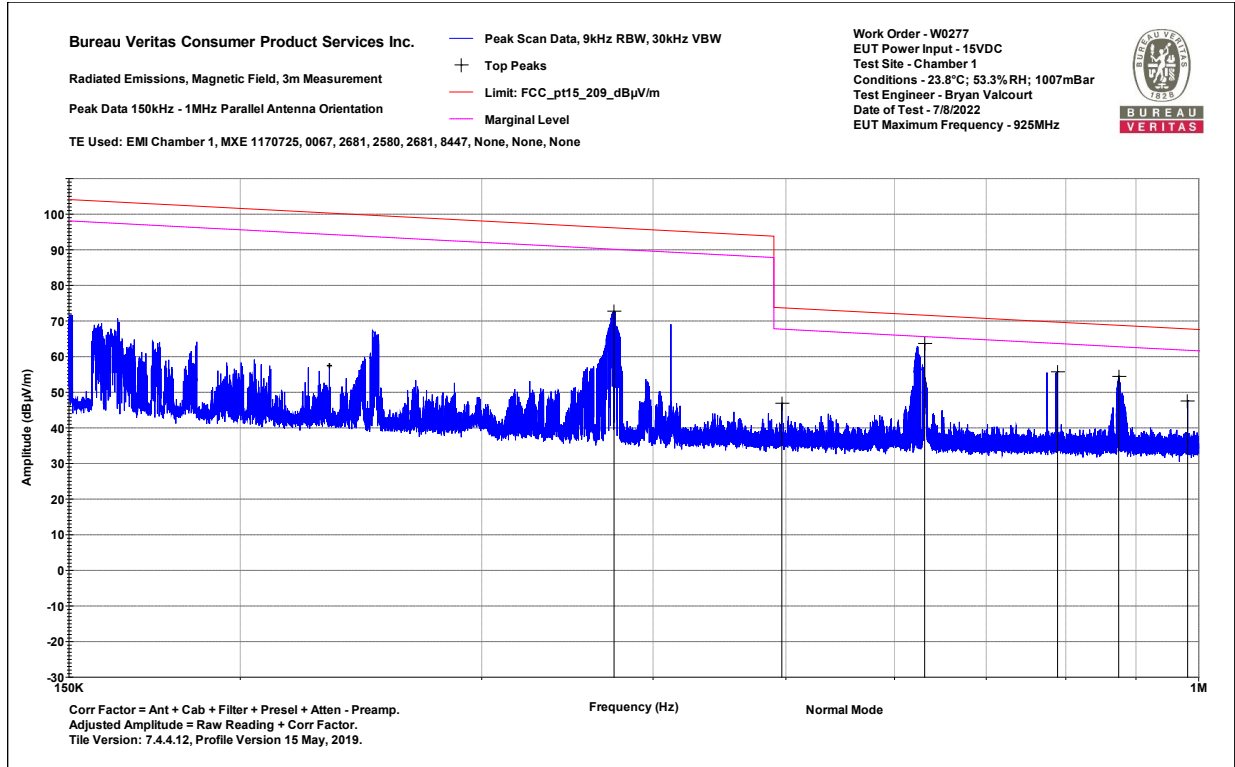

X Axis 150kHz-1MHz Parallel Plot


Bureau Veritas Consumer Product Services Inc.  
 Radiated Emissions Magnetic Field 3m Distance  
 Top Peaks Perpendicular 150-1000kHz  
 Notes:  
 Normal Mode

Work Order - W0277  
 EUT Power Input - 15VDC  
 Test Site - Chamber 1  
 Conditions - 23.8°C; 53.3%RH; 1007mBar  
 Test Engineer - Bryan Valcourt  
 Date of Test - 7/8/2022

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/s)	Adjusted Peak Amplitude (dBµV/m)	Lim: FCC_pt15_20 9_dBµV/m (dBµV/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
0.205	64.5	19.9	84.4	101.4	-17	PASS		90
0.374	47.6	19.2	66.7	96.1	-29.4	PASS		255
0.547	43	19.1	62.1	72.9	-10.8	PASS	-10.8	315
0.649	38.8	19.1	57.9	71.4	-13.5	PASS		45
0.869	33.2	19.1	52.3	68.8	-16.6	PASS		60
0.988	19.7	19.1	38.8	67.7	-28.9	PASS		165

X Axis 150kHz-1MHz Perpendicular Data Table



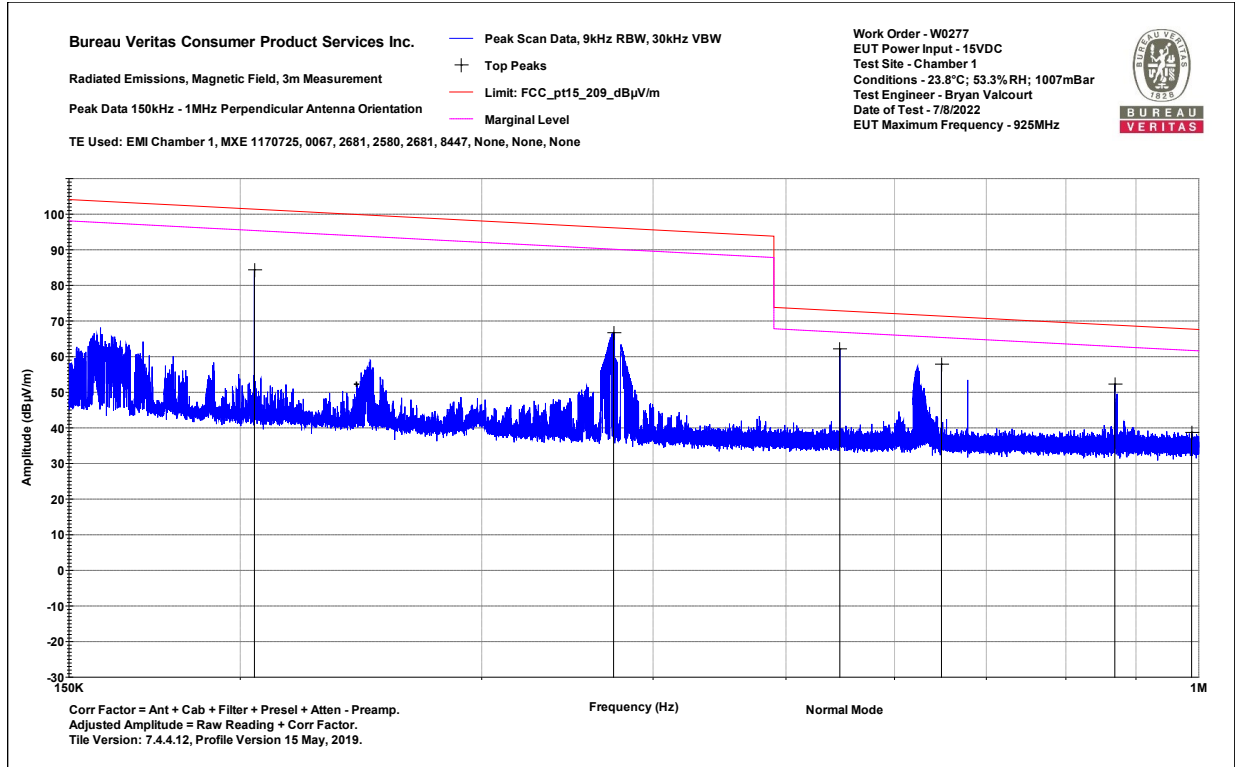

X Axis 150kHz-1MHz Perpendicular Plot


**Bureau Veritas Consumer Product Services Inc.**  
 Radiated Emissions Magnetic Field 3m Distance  
 Top Peaks Parallel 1-30MHz  
 Notes:  
 Normal Mode

Work Order - W0277  
 EUT Power Input - 15VDC  
 Test Site - Chamber 1  
 Conditions - 23.8°C; 53.3%RH; 1007mBar  
 Test Engineer - Bryan Valcourt  
 Date of Test - 7/8/2022

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/s)	Adjusted Peak Amplitude (dBµV/m)	Lim: FCC_pt15_209_dBµV/m (dBµV/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
1.125	23.9	27.2	51.1	66.6	-15.5	PASS	-15.5	330
2.267	17.3	21	38.3	69.5	-31.2	PASS		285
5.775	26.9	13.4	40.3	69.5	-29.2	PASS		0
19.91	37.2	8.9	46.1	69.5	-23.5	PASS		75
27.753	33.5	8.3	41.8	69.5	-27.7	PASS		150
30	15.7	7.9	23.6	40	-16.4	PASS		15

X Axis 1-30MHz Parallel Data Table



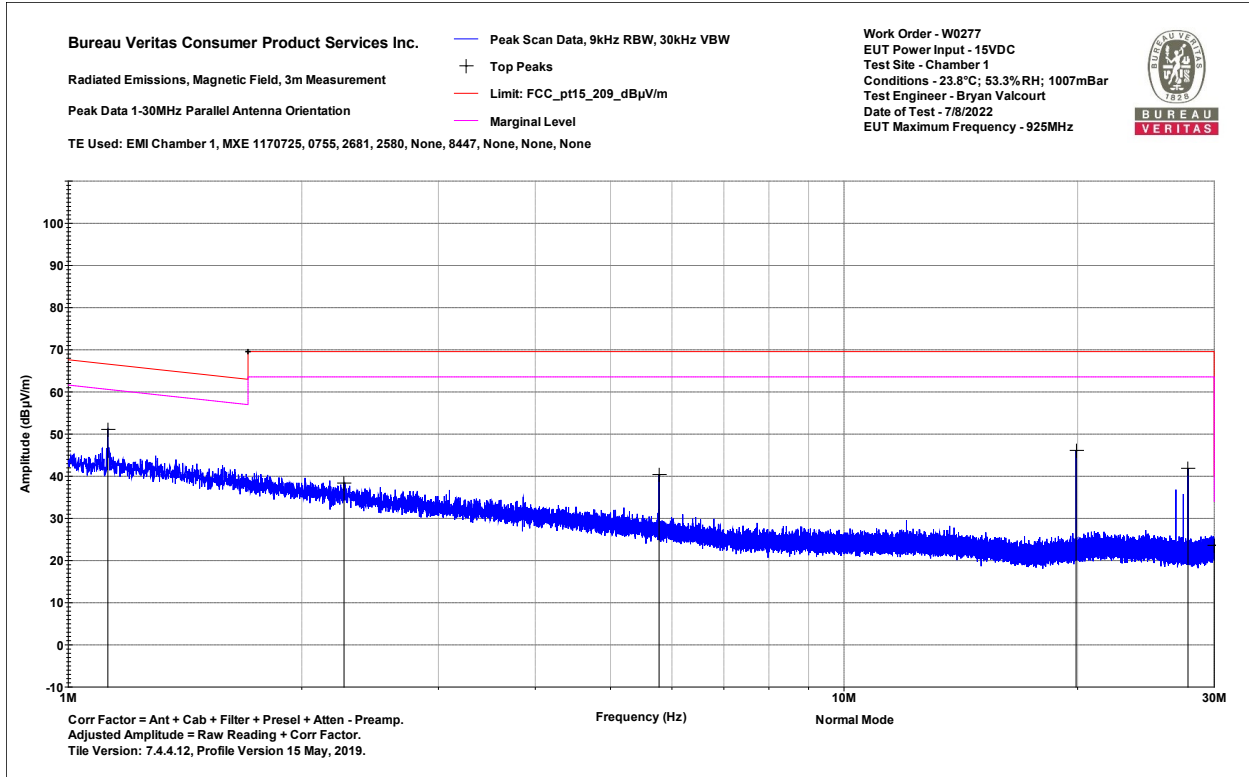


X Axis 1-30MHz Parallel Plot

Bureau Veritas Consumer Product Services Inc.  
 Radiated Emissions Magnetic Field 3m Distance  
 Top Peaks Perpendicular 1-30MHz  
 Notes:  
 Normal Mode

Work Order - W0277  
 EUT Power Input - 15VDC  
 Test Site - Chamber 1  
 Conditions - 23.8°C; 53.3%RH; 1007mBar  
 Test Engineer - Bryan Valcourt  
 Date of Test - 7/8/2022

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/s)	Adjusted Peak Amplitude (dBµV/m)	Lim: FCC_pt15_209_dBµV/m (dBµV/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
1.176	19.2	26.9	46	66.2	-20.2	PASS		225
1.779	18	23.2	41.3	69.5	-28.3	PASS		0
2.429	17.5	20.5	38	69.5	-31.5	PASS		105
3.25	17.3	18	35.3	69.5	-34.3	PASS		75
29.274	35.5	8	43.5	69.5	-26	PASS		90
30	14.6	7.9	22.5	40	-17.5	PASS	-17.5	240

X Axis 1-30MHz Perpendicular Data Table

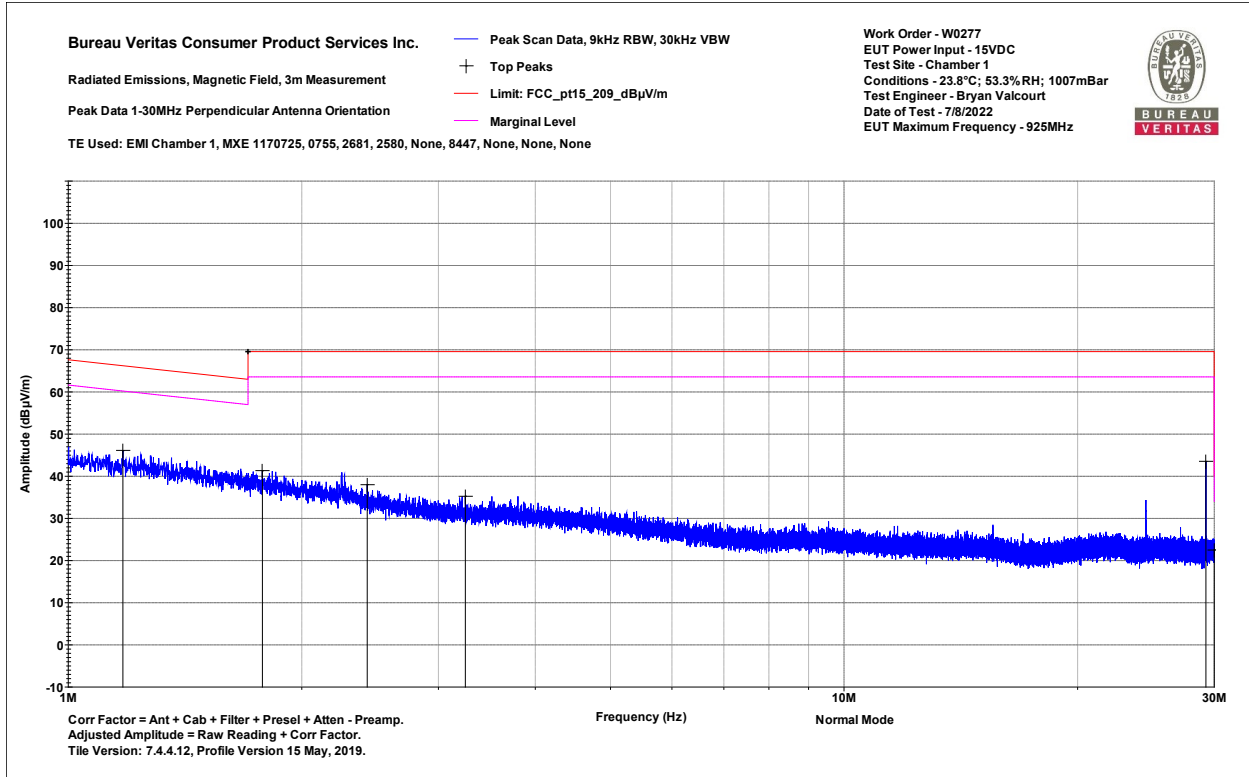

X Axis 1-30MHz Perpendicular Plot

Radiated Emissions Table												
Date: 30-Sep-22			Company: Amazon.com Services LLC				Work Order: W0277					
Engineer: Matthew McCarthy			EUT Desc: SRBRS ELF Badge				EUT Operating Voltage/Frequency: 15VDC					
Temp: 20.5°C			Humidity: 54%				Pressure: 1021mBar					
Frequency Range: 925 Band Edge						Measurement Distance: 3 m						
Notes: TX power set 10						EUT Max Freq: 925MHz						
Antenna Polarization (H/V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	---			FCC Class B		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
<b>Table Result:</b> Pass by -6.9 dB <b>Worst Freq:</b> 928.0 MHz												
Test Site: EMI Chamber 1			Cable 1: Asset #2583			Cable 2: Asset #2610			Cable 3: Asset #2474			
Analyzer: Asset #2093			Preamp: Asset #8447F			Antenna: Red-Brown			Preselector: ---			
CSsoft Radiated Emissions Calculator v 1.017.222						Copyright Curtis-Straus LLC 2000						
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor												


Radiated Measurements in 925MHz Range, Without Filter

Bureau Veritas Consumer Product Services Inc.  
 Radiated Emissions Electric Field 3m Distance  
 30-1000MHz Vertical Data  
 Notes:  
 Normal Mode

Work Order - W0277  
 EUT Power Input - 15VDC  
 Test Site - Chamber 1  
 Conditions - 23.7°C; 47.0%RH; 1006mBar  
 Test Engineer - Bryan Valcourt  
 Date of Test - 7/11/2022

Frequency (MHz)	Raw QP Reading (dBµV)	Correction Factor (dB/m)	Adjusted QP Amplitude (dBµV/m)	Lim1: FCC_pt15_20 9 (dBµV/m)	Margin to Lim1 (dB)	Test Results Lim1 (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
96.663	36.9	-12.3	24.6	43.5	-18.9	PASS		253	101
97.915	29.3	-11.9	17.4	43.5	-26.1	PASS		179	181
98.495	42.1	-11.7	30.4	43.5	-13.1	PASS		119	65
98.463	40.2	-11.7	28.5	43.5	-15	PASS		161	329
99.556	42.3	-11.4	31	43.5	-12.5	PASS	-12.5	103	195
100.94	34.9	-11	24	43.5	-19.5	PASS		233	197
131.593	27.3	-7.1	20.1	43.5	-23.4	PASS		376	47
135.955	25.6	-7.4	18.3	43.5	-25.2	PASS		187	8

X Axis 30-1000MHz Vertical Data Table

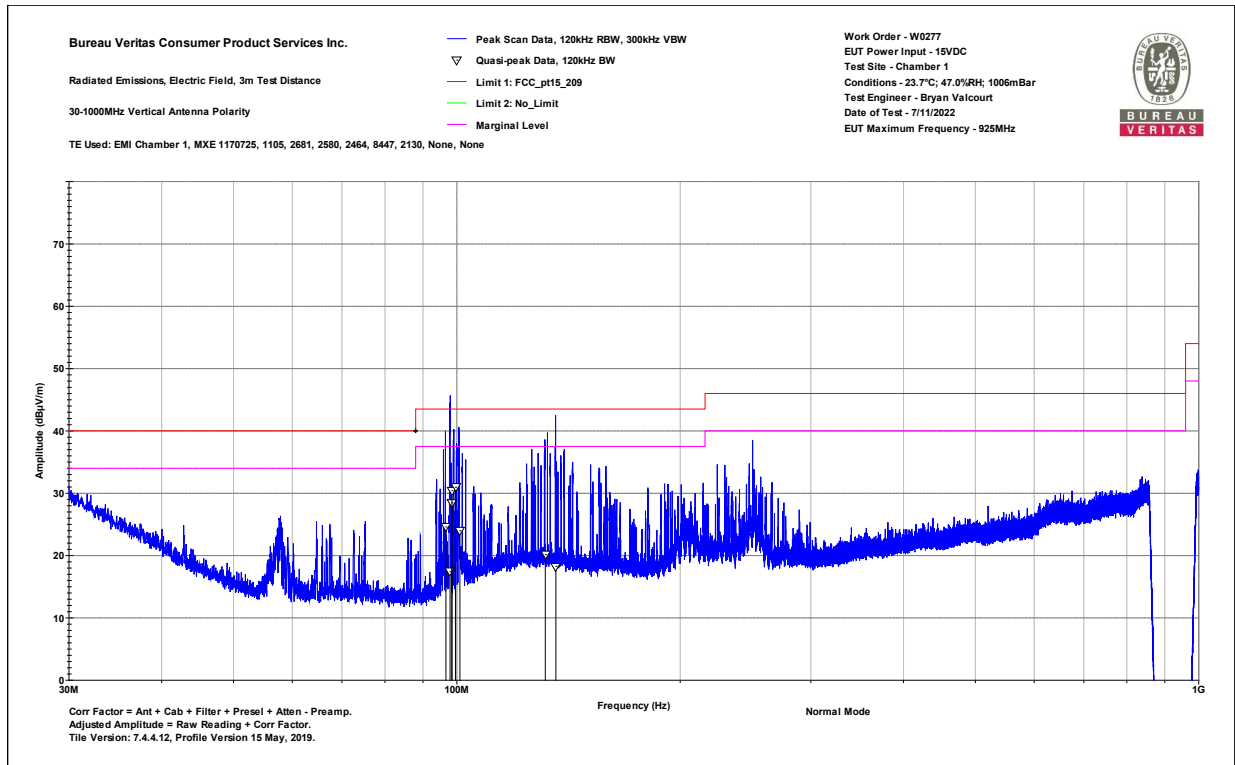


X Axis 30-1000MHz Vertical Plot

Bureau Veritas Consumer Product Services Inc.  
 Radiated Emissions Electric Field 3m Distance  
 30-1000MHz Horizontal Data  
 Notes:  
 Normal Mode

Work Order - W0277  
 EUT Power Input - 15VDC  
 Test Site - Chamber 1  
 Conditions - 23.7°C; 47.0%RH; 1006mBar  
 Test Engineer - Bryan Valcourt  
 Date of Test - 7/11/2022

Frequency (MHz)	Raw QP Reading (dBµV)	Correction Factor (dB/m)	Adjusted QP Amplitude (dBµV/m)	Lim1: FCC_pt15_209 (dBµV/m)	Margin to Lim1 (dB)	Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
127.7	37.5	-7.1	30.4	43.5	-13.1	PASS		202	16
132.977	36.8	-7.1	29.7	43.5	-13.8	PASS		142	309
133.74	40.5	-7.2	33.3	43.5	-10.2	PASS	-10.2	123	21
134.428	38.2	-7.2	31	43.5	-12.5	PASS		188	328
134.893	28.6	-7.3	21.3	43.5	-22.2	PASS		389	338
143.61	37.9	-7.9	30	43.5	-13.5	PASS		323	215
145.94	29.5	-8.1	21.4	43.5	-22.1	PASS		379	66

X Axis 30-1000MHz Horizontal Data Table

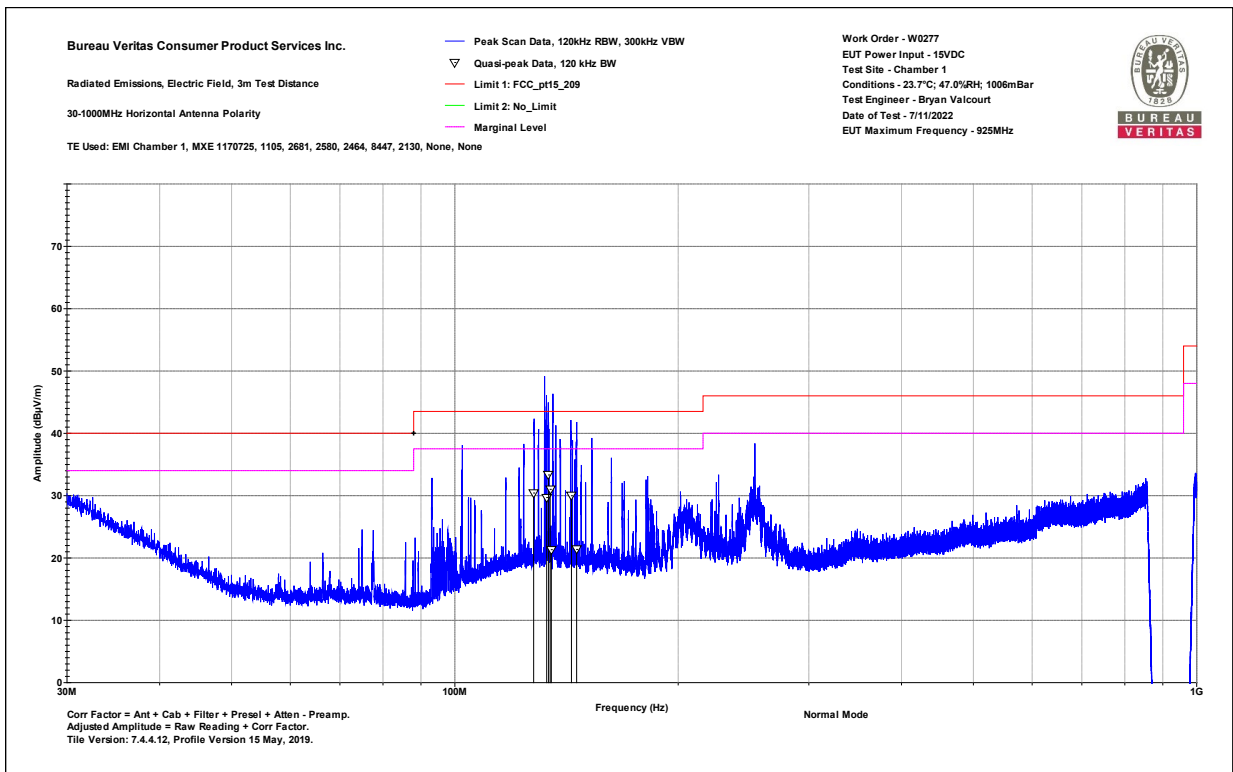


X Axis 30-1000MHz Horizontal Plot



Bureau Veritas Consumer Product Services Inc. Radiated Emissions Electric Field 3m Distance 1-6GHz Vertical Data Notes: Normal Mode	Work Order - W0277 EUT Power Input - 15VDC Test Site - Chamber 1 Conditions - 23.7°C; 47.0%RH; 1006mBar Test Engineer - Bryan Valcourt Date of Test - 7/11/2022
---	--

Frequency (MHz)	Raw Peak Reading (dBµV)	Raw Avg Reading (dBµV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBµV/m)	Pk Lim: FCC_pt15_20_9_Peak (dBµV/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dBµV/m)	Av Lim: FCC_pt15_20_9_Average (dBµV/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1851.1	44.4	35.8	-11.9	32.4	74	-41.6	PASS		23.9	54	-30.1	PASS		112	243
1878.9	45.1	36.2	-11.7	33.3	74	-40.7	PASS		24.4	54	-29.6	PASS		125	24
5177.3	45.6	36.2	-2.8	42.8	74	-31.2	PASS		33.4	54	-20.6	PASS		225	3
5643.7	44.9	36	-1.5	43.4	74	-30.6	PASS	-30.6	34.5	54	-19.5	PASS	-19.5	275	127

X Axis 1-6GHz Vertical Data Table

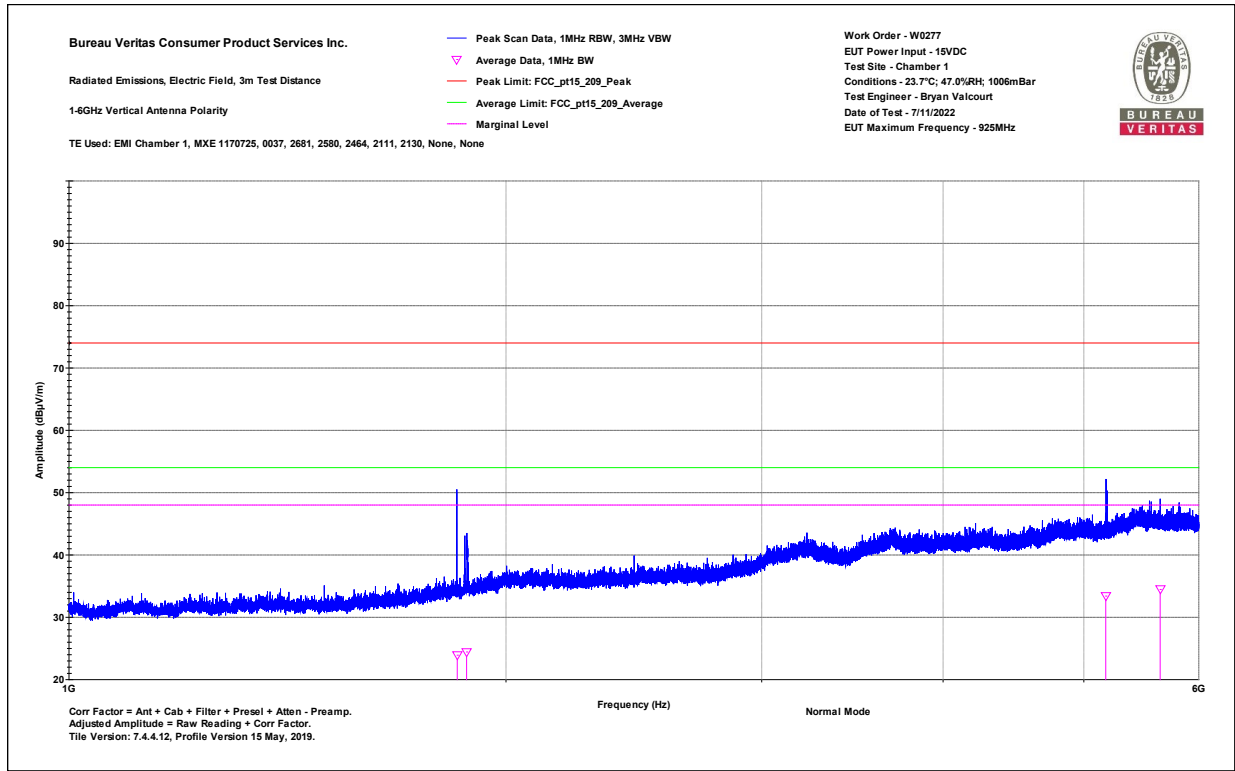


X Axis 1-6GHz Vertical Plot

Bureau Veritas Consumer Product Services Inc. Radiated Emissions Electric Field 3m Distance 1-6GHz Horizontal Data Notes: Normal Mode	Work Order - W0277 EUT Power Input - 15VDC Test Site - Chamber 1 Conditions - 23.7°C; 47.0%RH; 1006mBar Test Engineer - Bryan Valcourt Date of Test - 7/11/2022
---	--

Frequency (MHz)	Raw Peak Reading (dBµV)	Raw Avg Reading (dBµV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBµV/m)	Pk Lim: FCC_pt15_20_9_Peak (dBµV/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dBµV/m)	Av Lim: FCC_pt15_20_9_Average (dBµV/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Average Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1852	43.8	35.3	-11.9	31.9	74	-42.1	PASS		23.4	54	-30.6	PASS		213	250
2774.3	45.3	36.1	-10.3	35	74	-39	PASS		25.8	54	-28.2	PASS		125	22
5548.6	46.7	36.4	-1.3	45.4	74	-28.6	PASS	-28.6	35.2	54	-18.8	PASS	-18.8	125	42

X Axis 1-6GHz Horizontal Data Table



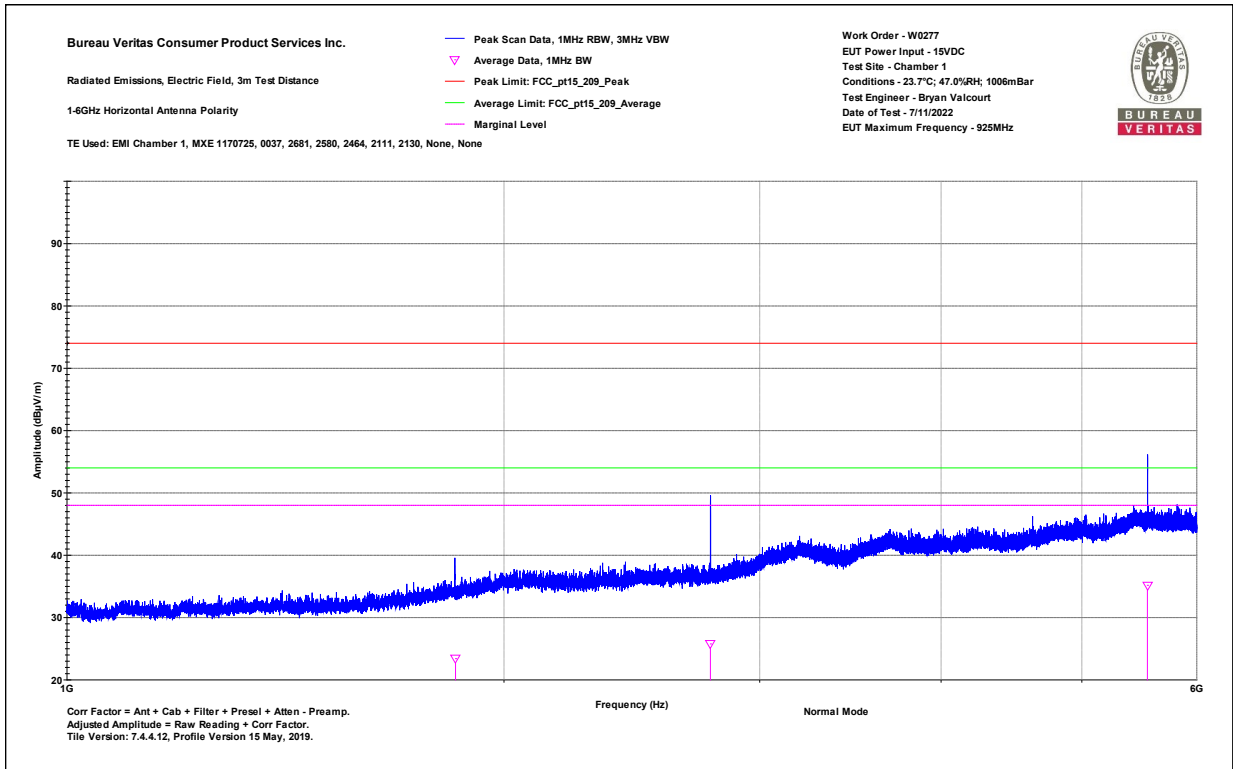

X Axis 1-6GHz Horizontal Plot



Rev. 7/5/2022

Spectrum Analyzers / Receivers / Preselectors									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Rental MXE EMI Receiver(1170725)	20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I	2/3/2023	2/3/2022	
2093 MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	3/7/2023	3/7/2022	
Radiated Emissions Sites									
	FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on	
EMI Chamber 1	719150	2762A-6	A-0015	30-1000MHz	1685	I	12/6/2022	12/6/2020	
EMI Chamber 1	719150	2762A-6	A-0015	30-1000MHz	1685	I	12/6/2022	12/6/2020	
EMI Chamber 1	719150	2762A-6	A-0015	1-18GHz	1685	I	12/8/2022	12/8/2020	
Preamps / Couplers Attenuators / Filters									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
8447F Rental PA	9KHz-1.3GHz	84477F	HP	3113A05395		II	10/18/2022	10/18/2021	
2111 HF Preamp	0.5-18GHz	PAM-118A	COM-POWER	551063	2111	II	10/26/2022	10/26/2021	
2130 BRF	9KHz-10GHz	BRM18770	Micro-Tronics	1	2130	II	1/21/2023	1/21/2022	
Antennas									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Small Loop	10kHz-30MHz	PLA-130/A	ARA	1024	755	I	8/25/2022	8/25/2020	
Large Loop	20Hz-5MHz	6511	EMCO	9704-1154	67	I	8/21/2022	8/21/2020	
Red-White Bilog	30-2000MHz	JB1	Sunol	A091604-1	1105	I	10/25/2023	11/25/2021	
Yellow Horn	1-18GHz	3115	EMCO	9608-4898	37	I	10/20/2022	10/20/2020	
Red-Brown Bilog	30-2000MHz	JB1	Sunol	A0032406	1218	I	4/28/2023	4/28/2021	
Meteorological Meters/Chambers									
		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	11/23/2022	11/23/2020	
Asset #2653		1235C97	Control Company	200435382	2653	I	7/23/2022	7/23/2020	
Cables									
	Range		Mfr			Cat	Calibration Due	Calibrated on	
Asset #2464	9KHz-18GHz		MegaPhase			II	11/9/2022	11/9/2021	
Asset #2580	9KHz-18GHz		Pasternack			II	1/21/2023	1/21/2022	
Asset #2681	9KHz-18GHz		Pasternack			II	1/21/2023	1/21/2022	
Asset #2583	9KHz-18GHz		Pasternack			II	2/17/2023	2/17/2022	
Asset #2610	9KHz-18GHz		Pasternack			II	3/16/2023	3/16/2022	
Asset #2474	9KHz-18GHz		MegaPhase			II	11/9/2022	11/9/2021	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Test Equipment Used



BUREAU VERITAS

Bureau Veritas Consumer Product Services  
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



### Duty-Cycle Correction Factor

A duty cycle of 16.24% was measured and provided by the applicant in the operational description.

$$\text{DCCF} = 20 \cdot \text{LOG}(16.24/100) = -15.79\text{dB}$$



BUREAU  
VERITAS

**Bureau Veritas Consumer Product Services**  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828




### Occupied Bandwidth

#### REQUIREMENT

When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is its 99% emission bandwidth, as calculated or measured. [RSS-GEN Issue 5 Section 6.7]

#### RESULTS:

The plot below was generated using a peak max hold detector.

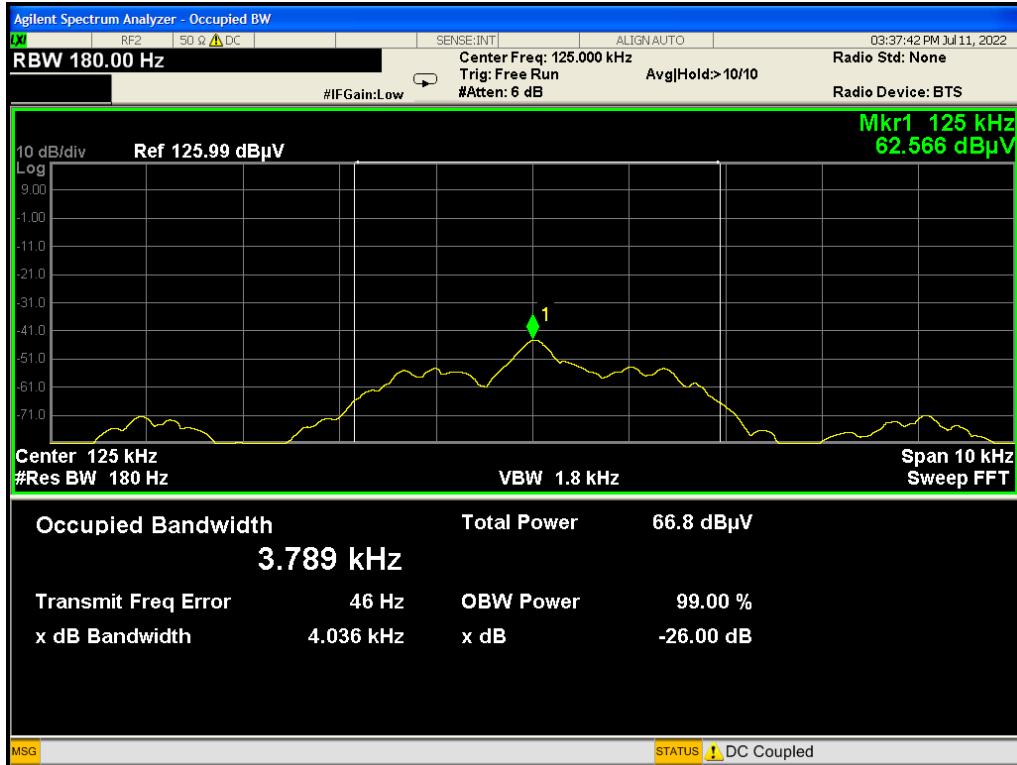

Occupied Bandwidth 125kHz radio X-Axis Worst Case

### Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results. Values for measurement uncertainty are calculated per ETSI TR 100 028 (2001). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz)		
NIST	5.6dB	N/A
CISPR	4.6dB	5.2dB (Ucisprr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions		
NIST	3.9dB	N/A
CISPR	3.6dB	3.6dB (Ucisprr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	$3.23 \times 10^{-8}$	$1 \times 10^{-7}$
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



## Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS," "MTL," "ACTS," "MTL-ACTS" and "CURTIS-STRAUS" (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only where such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST



BUREAU  
VERITAS

Bureau Veritas Consumer Product Services

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 21 of 23

ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.

14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

Rev.160009121(2)\_#684340 v13CS



BUREAU  
VERITAS

**Bureau Veritas Consumer Product Services**

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 22 of 23

**Document Revision History**

Issue No.	Summary of Changes	Date Issued	Prepared by	Approved by
1	Original Release	2022-08-11	BV	YF
2	Add tables and plots for radiated emissions 30MHz-6GHz (p12-p16); Update Test Equipment Used table with equipment used for 30MHz-6GHz radiated emissions (p17); Update test dates due to adding radiated emissions test data above (p1); Add Document Revision History table (p23); Update RBW and VBW table due to adding radiated emissions tests above (p4); Add note in Occupied Bandwidth section to specify that peak max hold detector was used (p19); Remove DCCF plot (provided by applicant) and add statement to refer to operational description (p18);	2022-11-14	HX	YF

END OF REPORT