NEW IMAGE™ CCT LED V2 CEILING FAN





Installation Locations:

Coastal, indoor and outdoor locations. The fan is also suitable for installation in a pergola or outside in a sheltered area, protected from wind.

Recommended Height:

There should be at least 2.1m between the lowest point of the fan blades and the floor.

Motor:

156mm x 10mm DC motor

Made with high grade copper windings and silicone steel stator. Bearings are sealed to ensure quiet operation and long life.

Top Canopy & Downrod:

Materials: ABS Polymer & Aluminium

Product Range:

NIL2105 - White with White Blades

NIL2106 - Matt Black with Matt Black Blades NIL2107 - Matt Black with Koa Blades

Blades:

Sizes: 1320mm (52") Materials: Polymer Blades

Blade Pitch: 14.5°

Extra Information:

Introduced into the HPI range in 2022

9 speed remote controller

Reversible

Airflow CMH:

14,425 on High Speed (Speed 9)

Warranty*:

- 2 years in-home warranty on all electric components (control modules, remote control system, lighting and accessory wall control)
- 3 years standard "in home" warranty
- 3 years extended warranty on motor only (excluding labour)

Standard Canopy Cover:

Suitable for flat ceilings

Light Fitting:

18W CCT LED light (dimmable)

Colour Temperatures:

3000K, 4000K, 6000K

Weight Including Packaging:

Complete fan: 8.8kg

Packaging Dimensions (CM):

Complete Fan: 61.7L x 28.2W x 31.5H

Accessories (Supplied separately):

Down Rod 26mm diameter (includes wire harness)

DC2480 - 91cm White Downrod DC2481 - 91cm Black Downrod DC2482 - 91cm B/Alum Downrod DC2490 - 180cm White Downrod DC2491 - 180cm Black Downrod DC2492 - 180cm B/Alum Downrod

38° Ceiling Kit* (for pitched ceilings)

080 - Ceiling Kit White 38

082 - Ceiling Kit Painted Silver 38°

083 - Ceiling Kit Black 38°

009 - T-Hook for ceiling roses


DCWC240 - 240V DC Wall Controller

WIFIM099 - Smart WiFi Module

PIXIEM098 - Pixie HPI Ceiling Fan Module

*For full warranty details please see Hunter Pacific International's website www.hunterpacific.com.au

	Speed 1	Speed 2	Speed 3	Speed 4	Speed 5	Speed 6	Speed 7	Speed 8	Speed 9
RPMS	75	92	135	175	187	200	210	220	225
WATTS	2.7	3.8	9.6	12.6	15.4	18.1	21.5	23.5	26.3

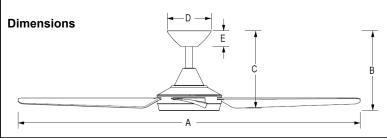

Α	В	С	D	Е	
1520mm	330mm	300mm	160mm	60mm	