



# SAR TEST REPORT

No. I16Z42015-SEM01

For

TCL Communication Ltd.

HSUPA/HSDPA/UMTS Quad Band/GSM Quad Band/LTE Tri  
Band/CDMA EVDO Tri Band mobile phone

Model Name: 4044T

With

Hardware Version: 03

Software Version: A4J

FCC ID: 2ACCJN010

Issued Date: 2016-12-22



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT  
No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China 100191  
Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504  
Email: [ctl\\_terminals@catr.cn](mailto:ctl_terminals@catr.cn), website: [www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Issue Date</b>	<b>Description</b>
I16Z42015-SEM01	Rev.0	2016-12-22	Initial creation of test report

## TABLE OF CONTENT

<b>1 TEST LABORATORY .....</b>	<b>5</b>
1.1 TESTING LOCATION .....	5
1.2 TESTING ENVIRONMENT.....	5
1.3 PROJECT DATA .....	5
1.4 SIGNATURE.....	5
<b>2 STATEMENT OF COMPLIANCE .....</b>	<b>6</b>
<b>3 CLIENT INFORMATION .....</b>	<b>8</b>
3.1 APPLICANT INFORMATION .....	8
3.2 MANUFACTURER INFORMATION .....	8
<b>4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>9</b>
4.1 ABOUT EUT .....	9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	9
<b>5 TEST METHODOLOGY .....</b>	<b>10</b>
5.1 APPLICABLE LIMIT REGULATIONS .....	10
5.2 APPLICABLE MEASUREMENT STANDARDS.....	10
<b>6 SPECIFIC ABSORPTION RATE (SAR).....</b>	<b>11</b>
6.1 INTRODUCTION.....	11
6.2 SAR DEFINITION.....	11
<b>7 TISSUE SIMULATING LIQUIDS .....</b>	<b>12</b>
7.1 TARGETS FOR TISSUE SIMULATING LIQUID .....	12
7.2 DIELECTRIC PERFORMANCE.....	12
<b>8 SYSTEM VERIFICATION .....</b>	<b>18</b>
8.1 SYSTEM SETUP .....	18
8.2 SYSTEM VERIFICATION.....	19
<b>9 MEASUREMENT PROCEDURES .....</b>	<b>20</b>
9.1 TESTS TO BE PERFORMED .....	20
9.2 GENERAL MEASUREMENT PROCEDURE.....	22
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR .....	23
9.4 SAR MEASUREMENT FOR LTE.....	24
9.5 BLUETOOTH & Wi-Fi MEASUREMENT PROCEDURES FOR SAR .....	26
9.6 POWER DRIFT.....	26
<b>10 AREA SCAN BASED 1-G SAR.....</b>	<b>27</b>
10.1 REQUIREMENT OF KDB.....	27
10.2 FAST SAR ALGORITHMS .....	27
<b>11 CONDUCTED OUTPUT POWER.....</b>	<b>28</b>

11.1 MANUFACTURING TOLERANCE .....	28
11.2 HOTSPOT .....	33
11.3 GSM MEASUREMENT RESULT .....	41
11.4 WCDMA MEASUREMENT RESULT.....	42
11.5 CDMA MEASUREMENT RESULT .....	43
11.6 LTE MEASUREMENT RESULT .....	44
11.7 WI-FI AND BT MEASUREMENT RESULT .....	53
<b>12 SIMULTANEOUS TX SAR CONSIDERATIONS.....</b>	<b>54</b>
12.1 INTRODUCTION.....	54
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES .....	54
12.3 SAR MEASUREMENT POSITIONS .....	55
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS .....	55
<b>13 EVALUATION OF SIMULTANEOUS.....</b>	<b>56</b>
<b>14 SAR TEST RESULT .....</b>	<b>57</b>
14.1 SAR RESULTS FOR FAST SAR.....	57
14.2 SAR RESULTS FOR STANDARD PROCEDURE.....	71
14.3 WLAN EVALUATION.....	77
<b>15 SAR MEASUREMENT VARIABILITY.....</b>	<b>80</b>
<b>16 MEASUREMENT UNCERTAINTY .....</b>	<b>83</b>
<b>17 MAIN TEST INSTRUMENTS.....</b>	<b>87</b>
<b>ANNEX A GRAPH RESULTS.....</b>	<b>88</b>
<b>ANNEX B SYSTEM VERIFICATION RESULTS .....</b>	<b>154</b>
<b>ANNEX C SAR MEASUREMENT SETUP .....</b>	<b>169</b>
<b>ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM .....</b>	<b>175</b>
<b>ANNEX E EQUIVALENT MEDIA RECIPES.....</b>	<b>178</b>
<b>ANNEX F SYSTEM VALIDATION .....</b>	<b>179</b>
<b>ANNEX G PROBE CALIBRATION CERTIFICATE.....</b>	<b>180</b>
<b>ANNEX H DIPOLE CALIBRATION CERTIFICATE .....</b>	<b>191</b>
<b>ANNEX I ACCREDITATION CERTIFICATE.....</b>	<b>231</b>

## 1 Test Laboratory

### 1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

### 1.2 Testing Environment

Temperature:	18°C~25 °C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg

### 1.3 Project Data


Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	November 15, 2016
Testing End Date:	November 20, 2016

### 1.4 Signature




Lin Xiaojun

(Prepared this test report)



Qi Dianyuan

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

## 2 Statement of Compliance

The maximum results found during testing for TCL Communication Ltd. HSUPA/HSDPA/UMTS Quad Band/GSM Quad Band/LTE Tri Band/CDMA EVDO Tri Band mobile phone for 4044T are as follows:

**Table 2.1: Highest Reported SAR (1g)**

Exposure Configuration	Technology Band	Highest Reported SAR 1g (W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	0.76	PCE
	GSM 1900	0.22	
	UMTS FDD 5	0.95	
	UMTS FDD 4	0.36	
	UMTS FDD 2	0.67	
	CDMA BC0	1.21	
	CDMA BC1	0.59	
	CDMA BC10	1.06	
	LTE Band 25	0.48	
	LTE Band 26	0.54	
	LTE Band 41	0.24	
	WLAN 2.4 GHz	0.35	DTS
	Bluetooth	0.02	
Hotspot (Separation Distance 10mm)	GSM 850	0.95	PCE
	GSM 1900	1.17	
	UMTS FDD 5	0.63	
	UMTS FDD 4	1.16	
	UMTS FDD 2	1.00	
	CDMA BC0	0.95	
	CDMA BC1	1.20	
	CDMA BC10	0.74	
	LTE Band 25	1.11	
	LTE Band 26	0.93	
	LTE Band 41	0.54	
	WLAN 2.4 GHz	0.20	DTS
	Bluetooth	<0.01	
Body-worn (Separation Distance 15mm)	UMTS FDD 5	0.58	PCE
	UMTS FDD 4	1.40	
	UMTS FDD 2	0.90	
	CDMA BC0	1.07	
	CDMA BC1	1.19	
	CDMA BC10	1.22	
	LTE Band 25	0.89	
	LTE Band 26	0.71	
	WLAN 2.4 GHz	0.12	DTS

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm for hotspot on and 15mm for hotspot off and speech between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of (**Table 2.1**), and the values are: **1.40 W/kg (1g)**.

**Table 2.2: The sum of reported SAR values for main antenna and WLAN**

	Position	Main antenna	WLAN	Sum
<b>Maximum reported SAR value for Head</b>	Right hand, Touch cheek	1.21	0.35	<b>1.56</b>
<b>Maximum reported SAR value for Body</b>	Rear closed 10mm	1.20	0.12	<b>1.32</b>
	Rear open 10mm	1.17	0.20	<b>1.37</b>
	Rear open 15mm	1.40	0.12	<b>1.52</b>

**Table 2.3 The sum of reported SAR values for other antenna and Bluetooth**

	Position	other antenna	BT	Sum
<b>Highest reported SAR value for Head</b>	Right hand, Touch cheek	1.21	0.02	<b>1.23</b>
<b>Highest reported SAR value for Body</b>	Rear closed 10mm	1.20	<0.01	<b>1.20</b>
	Rear open 15mm	1.40	<0.01	<b>1.40</b>

Note: The head SAR of BT is required to test, so we also measure the body SAR of BT.

According to the above tables, the highest sum of reported SAR values is **1.56 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

## 3 Client Information

### 3.1 Applicant Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Zhizhou Gong
Email:	zhizhou.gong@tcl.com
Telephone:	+86 21 51798260
Fax:	+86 21 61460602

### 3.2 Manufacturer Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Zhizhou Gong
Email:	zhizhou.gong@tcl.com
Telephone:	+86 21 51798260
Fax:	+86 21 61460602

## 4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

### 4.1 About EUT

Description:	HSUPA/HSDPA/UMTS Quad Band/GSM Quad Band/LTE Tri Band/CDMA EVDO Tri Band mobile phone
Model Name:	4044T
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/1700/1900/2100 CDMA BC0/1/10, LTE Band 25/26/41, BT, Wi-Fi
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850) 1850.2 – 1910 MHz (GSM 1900) 826.4–846.6 MHz (WCDMA850 Band V) 1712.4 – 1752.6 MHz (WCDMA 1700 Band IV) 1852.4–1907.6 MHz (WCDMA1900 Band II) 824.7 – 848.31 MHz (CDMA BC0) 1851.25 – 1908.75 MHz (CDMA BC1) 817.9 – 823.1 MHz (CDMA BC10) 1850.7 – 1914.3 MHz (LTE Band25) 814.7 – 848.3 MHz (LTE Band26) 2498.5 – 2687.5 MHz (LTE Band41) 2412 – 2462 MHz (Wi-Fi 2.4G)
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)

### 4.2 Internal Identification of EUT used during the test

EUT ID*	MEID	HW Version	SW Version
EUT1	35957107010674	03	A4J
EUT2	35957107010604	03	A4J
EUT3	35957107010670	03	A4J
EUT4	35957107010773	03	A4J

\*EUT ID: is used to identify the test sample in the lab internally.

**Note:** It is performed to test SAR with the EUT1&2&3 and conducted power with the EUT 4&5.

### 4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	Tli013C1	/	BYD

\*AE ID: is used to identify the test sample in the lab internally.

## 5 TEST METHODOLOGY

### 5.1 Applicable Limit Regulations

**ANSI C95.1–1992:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2 Applicable Measurement Standards

**IEEE 1528–2013:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

**KDB447498 D01: General RF Exposure Guidance v06:** Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

**KDB648474 D04 Handset SAR v01r03:** SAR Evaluation Considerations for Wireless Handsets.

**KDB941225 D01 SAR test for 3G devices v03r01:** SAR Measurement Procedures for 3G Devices

**KDB941225 D05 SAR for LTE Devices v02r05:** SAR Evaluation Considerations for LTE Devices

**KDB941225 D06 Hotspot Mode SAR v02r01:** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

**KDB248227 D01 802.11 Wi-Fi SAR v02r02:** SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

**KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04:** SAR Measurement Requirements for 100 MHz to 6 GHz.

**KDB865664 D02 RF Exposure Reporting v01r02:** RF Exposure Compliance Reporting and Documentation Considerations

## 6 Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left( \frac{\delta T}{\delta t} \right)$$

Where:  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of tissue and  $E$  is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 7 Tissue Simulating Liquids

### 7.1 Targets for tissue simulating liquid

**Table 7.1: Targets for tissue simulating liquid**


Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon$ )	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1750	Head	1.37	1.30~1.44	40.08	38.1~42.1
1750	Body	1.49	1.42~1.56	53.4	50.7~56.1
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3
2600	Head	1.96	1.86~2.06	39.01	37.06~40.96
2600	Body	2.16	2.05~2.27	52.5	49.9~55.1

### 7.2 Dielectric Performance

**Table 7.2: Dielectric Performance of Tissue Simulating Liquid**

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity $\epsilon$	Drift (%)	Conductivity $\sigma$ (S/m)	Drift (%)
2016-11-16	Head	835 MHz	41.01	-1.18	0.924	2.67
	Body	835 MHz	56.03	1.50	0.941	-2.99
2016-11-17	Head	835 MHz	40.84	-1.59	0.932	3.56
	Body	835 MHz	56.11	1.65	0.947	-2.37
2016-11-20	Head	1750 MHz	39.43	-1.62	1.356	-1.02
	Body	1750 MHz	54.01	1.14	1.525	2.35
2016-11-18	Head	1900 MHz	41.15	2.88	1.417	1.21
	Body	1900 MHz	53.73	0.81	1.497	-1.51
2016-11-19	Head	1900 MHz	41.05	2.62	1.426	1.86
	Body	1900 MHz	53.82	0.98	1.488	-2.11
2016-11-15	Head	2450 MHz	39.66	1.17	1.815	0.83
	Body	2450 MHz	52.76	0.11	1.977	1.38
2016-11-20	Head	2600 MHz	38.26	-1.92	1.947	-0.66
	Body	2600 MHz	51.49	-1.92	2.12	-1.85

Note: The liquid temperature is 22.0 °C

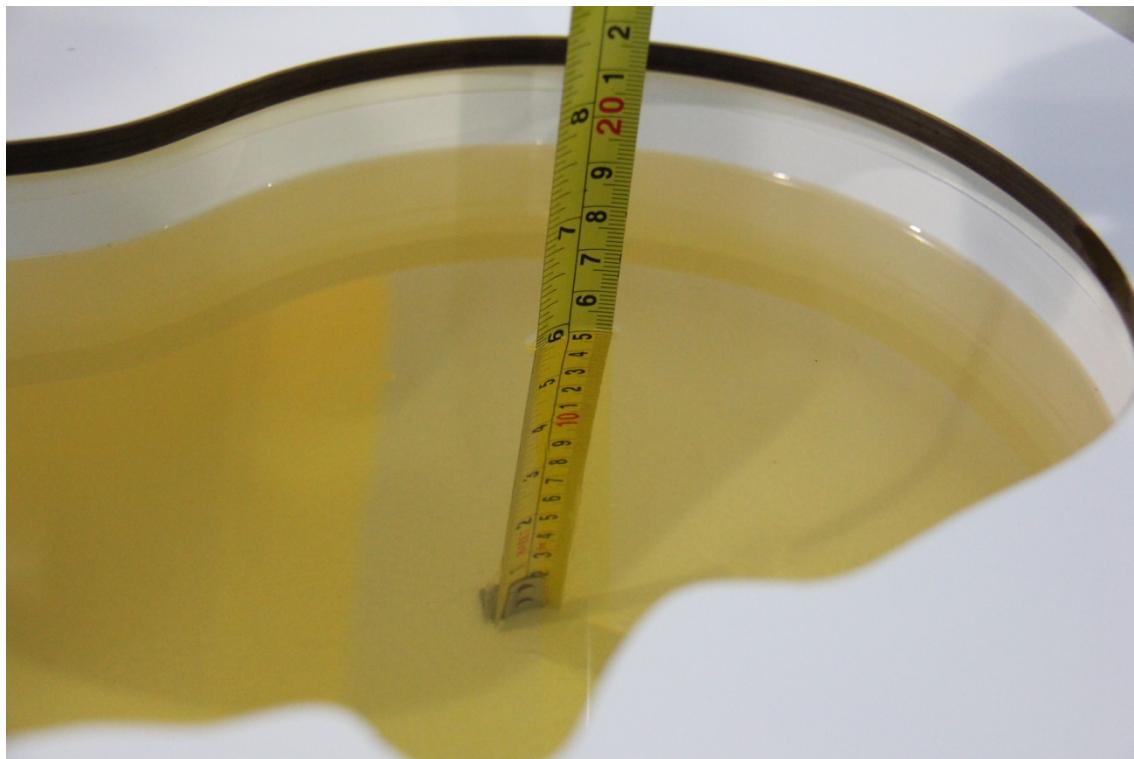


**Picture 7-1: Liquid depth in the Head Phantom (835 MHz)**




**Picture 7-2: Liquid depth in the Flat Phantom (835 MHz)**



Picture 7-3: Liquid depth in the Head Phantom (1750 MHz)

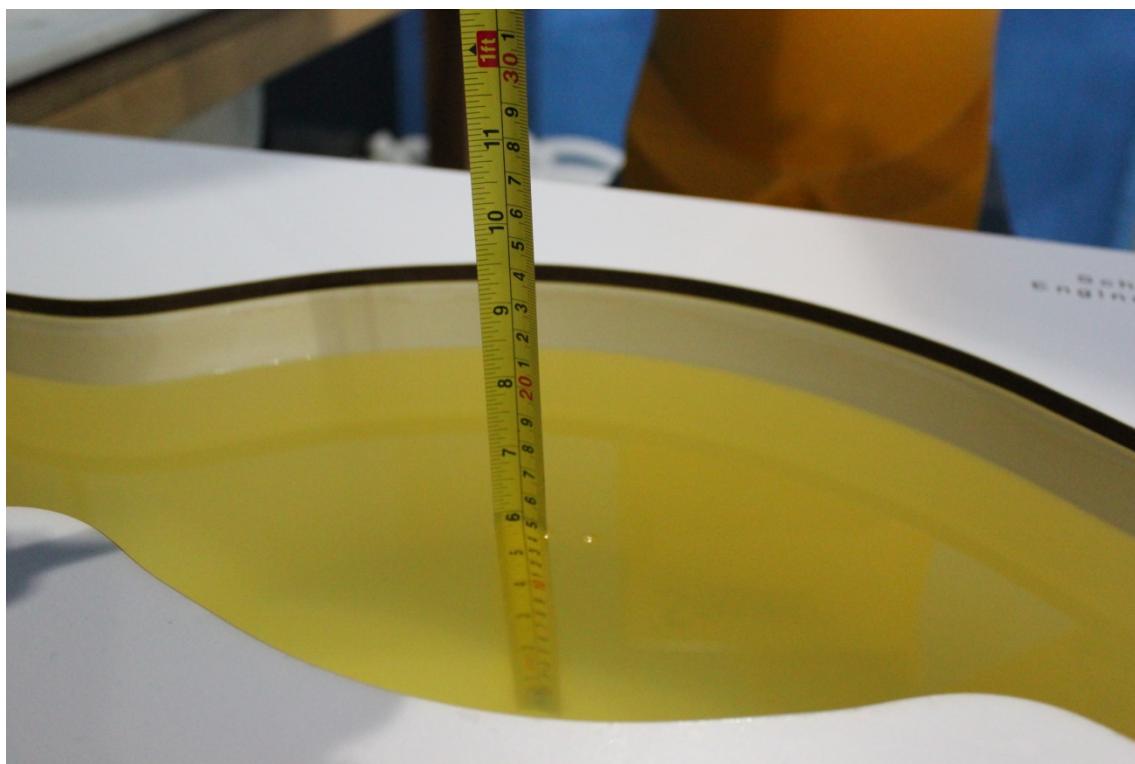

Picture 7-4 Liquid depth in the Flat Phantom (1750MHz)

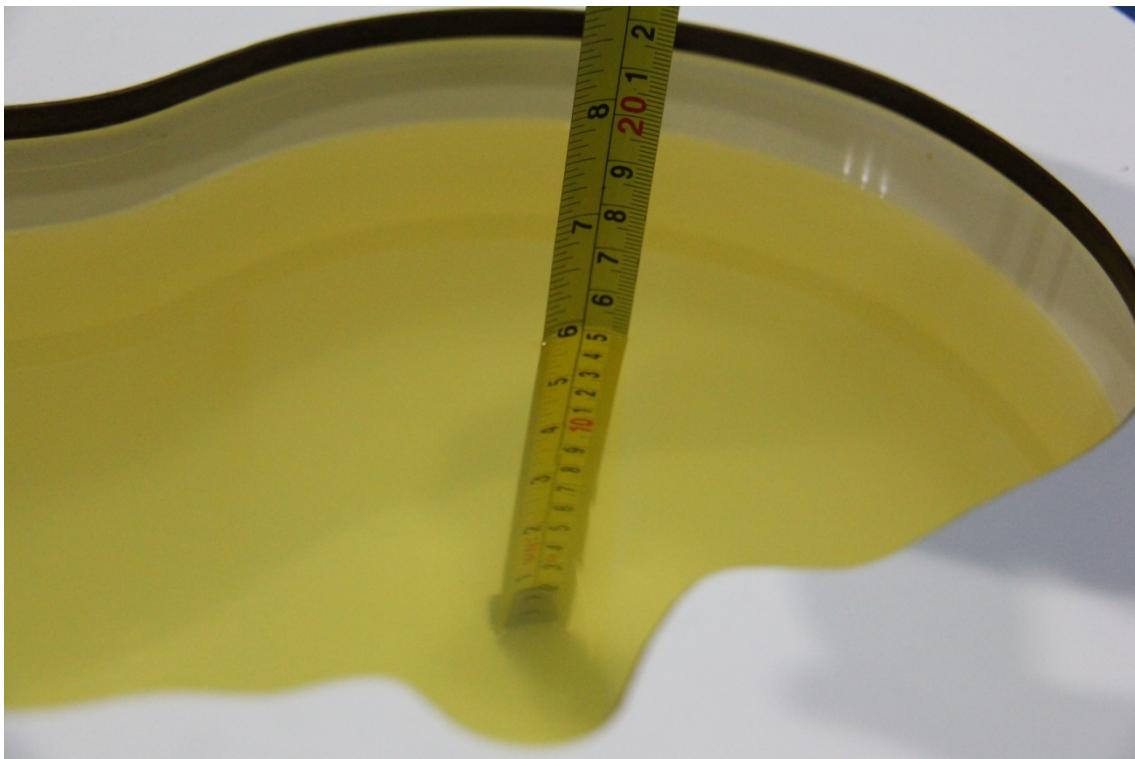


Picture 7-5: Liquid depth in the Head Phantom (1900 MHz)




Picture 7-6 Liquid depth in the Flat Phantom (1900MHz)




**Picture 7-7 Liquid depth in the Head Phantom (2450MHz)**

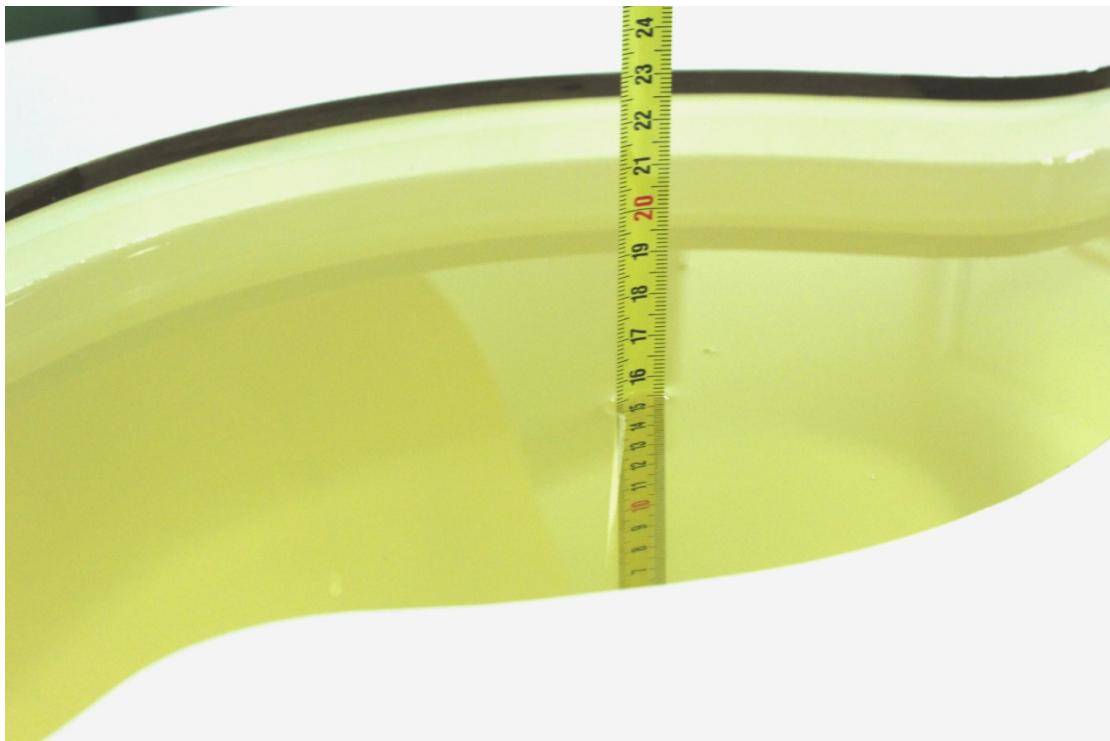

**Picture 7-8 Liquid depth in the Flat Phantom (2450MHz)**

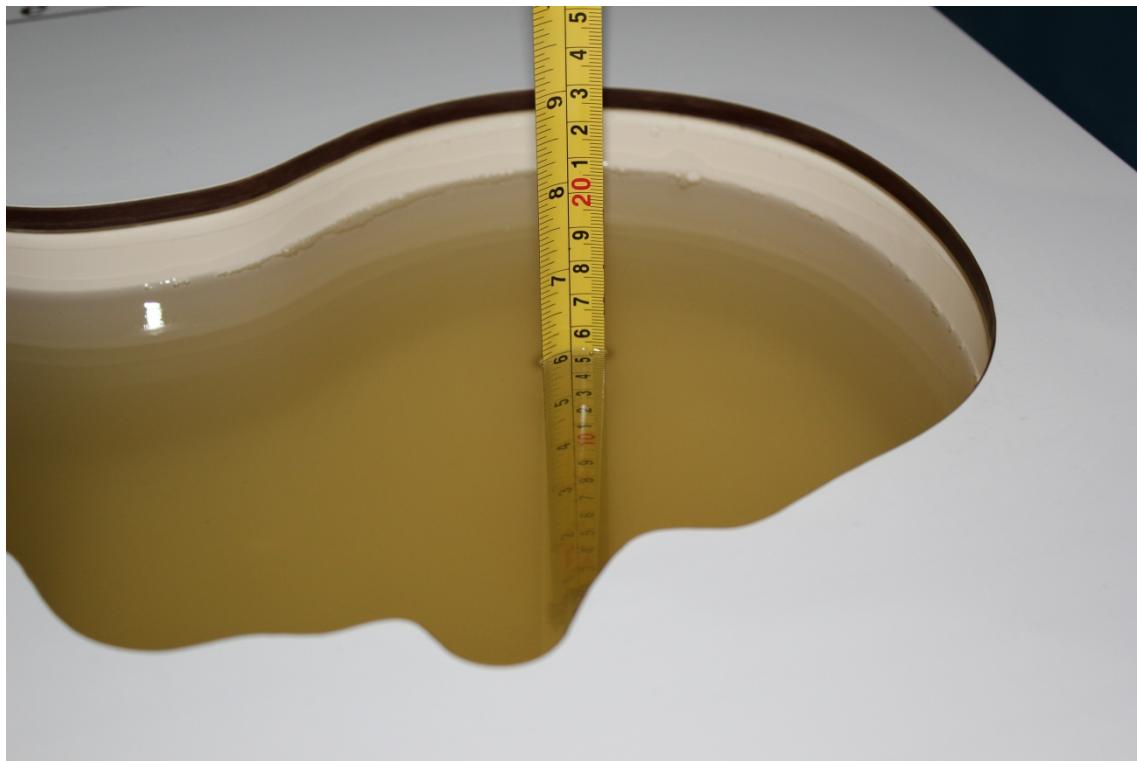

**Picture 7-9 Liquid depth in the Head Phantom (2600 MHz Head)**

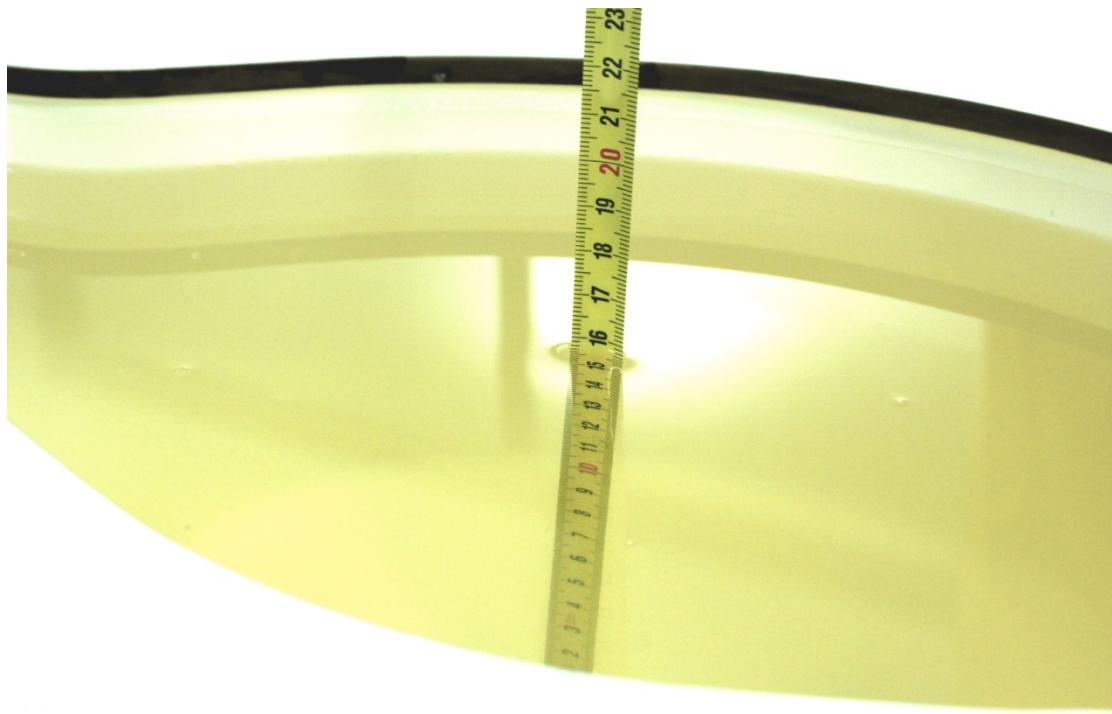


**Picture 7-10 Liquid depth in the Flat Phantom (2600MHz)**

## 8 System verification

### 8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

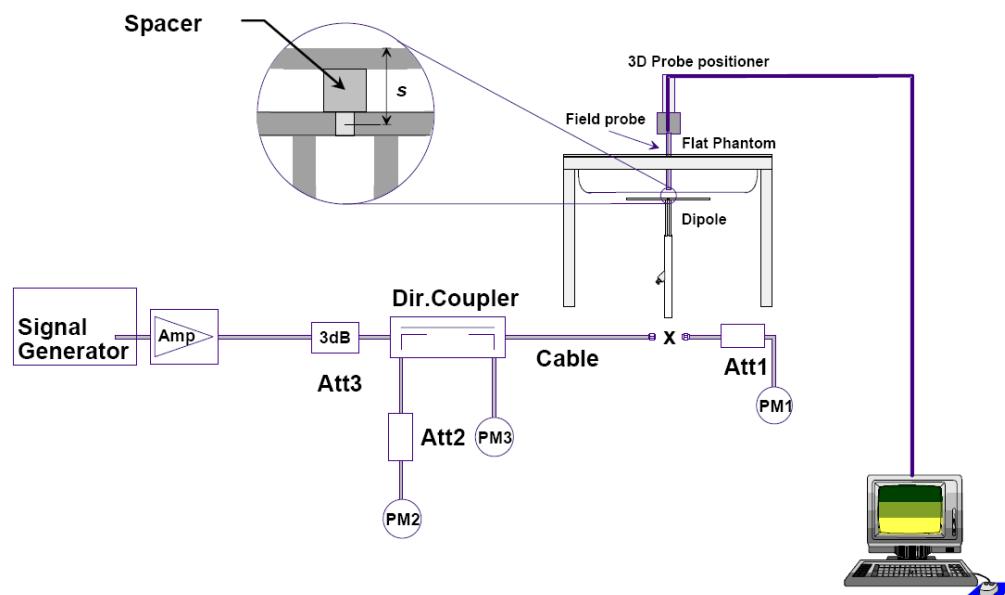

**Picture 8.1 System Setup for System Evaluation**



**Picture 8.2 Photo of Dipole Setup**

## 8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

**Table 8.1: System Verification of Head**

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2016-11-16	835 MHz	6.18	9.44	6.20	9.56	0.32%	1.27%
2016-11-17	835 MHz	6.18	9.44	6.00	9.24	-2.91%	-2.12%
2016-11-20	1750 MHz	19.50	36.80	18.9	35.9	-2.97%	-2.39%
2016-11-18	1900 MHz	21.20	40.70	21.4	40.8	0.75%	0.25%
2016-11-19	1900 MHz	21.20	40.70	21.0	40.4	-0.75%	-0.74%
2016-11-15	2450 MHz	24.60	52.80	24.64	52.92	0.16%	0.23%
2016-11-20	2600 MHz	25.20	56.70	25.5	57.6	1.11%	1.59%

**Table 8.2: System Verification of Body**

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2016-11-16	835 MHz	6.36	9.69	6.28	9.64	-1.26%	-0.52%
2016-11-17	835 MHz	6.36	9.69	6.12	9.48	-3.77%	-2.17%
2016-11-20	1750 MHz	19.60	37.00	19.80	37.32	1.02%	0.86%
2016-11-18	1900 MHz	21.30	40.10	21.52	40.80	1.03%	1.75%
2016-11-19	1900 MHz	21.30	40.10	21.76	41.20	2.16%	2.74%
2016-11-15	2450 MHz	24.10	51.20	24.24	51.32	0.58%	0.23%
2016-11-20	2600 MHz	24.80	55.30	25.32	57.20	2.10%	3.44%

## 9 Measurement Procedures

### 9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


**Step 1:** The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band ( $f_c$ ) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

**Step 2:** For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

**Step 3:** Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

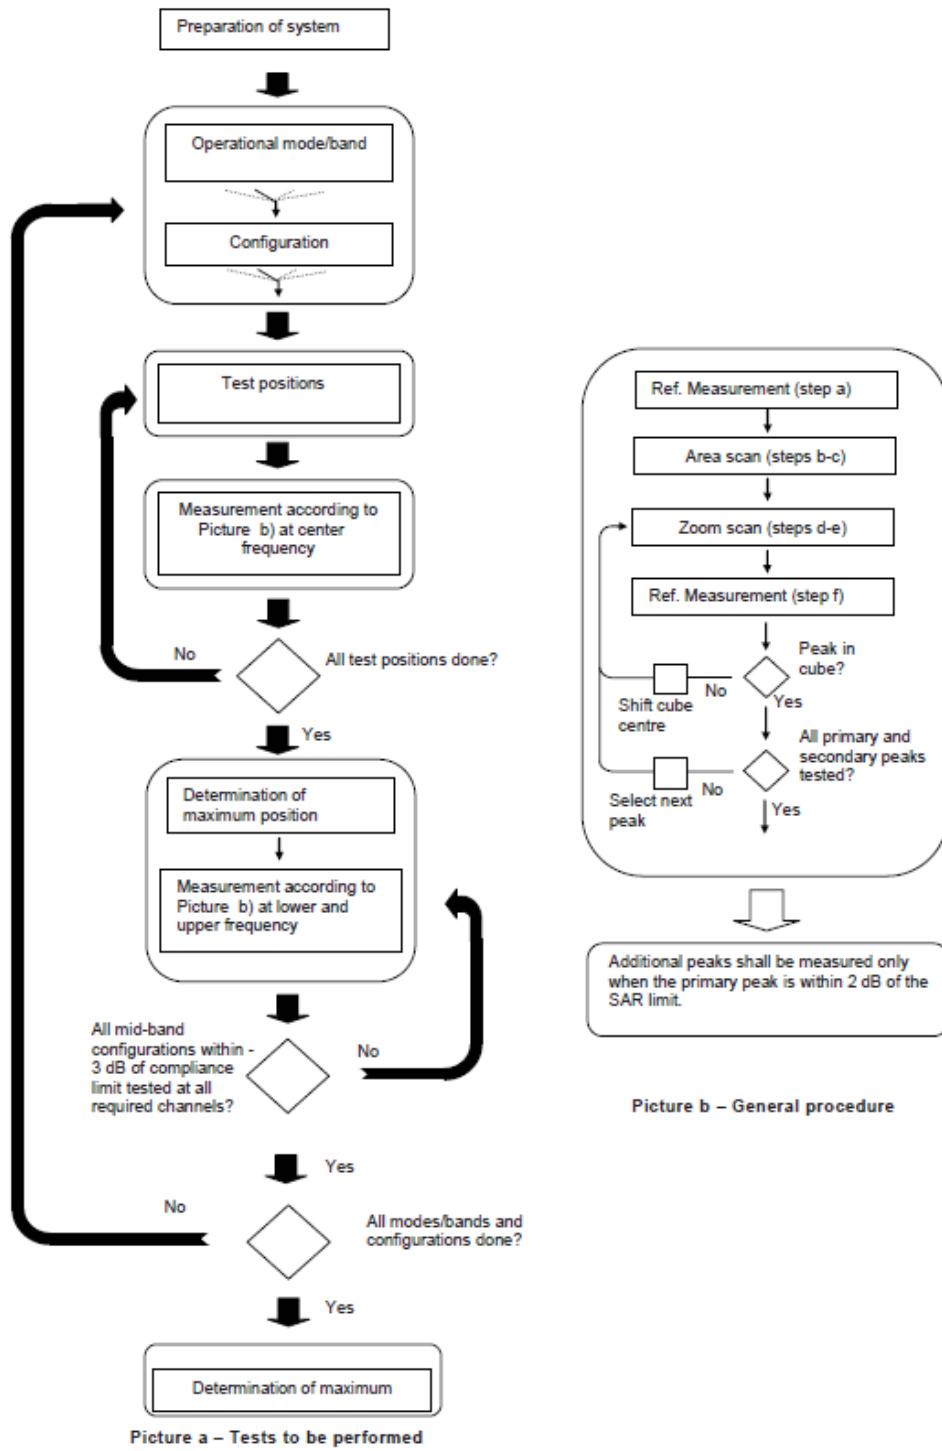

Picture a – Tests to be performed

Picture 9.1 Block diagram of the tests to be performed

## 9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

		$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid  $\Delta z_{\text{Zoom}}(1): \text{between } 1^{\text{st}}$ two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$ , $\leq 8 \text{ mm}$ , $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

### 9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

#### For Release 5 HSDPA Data Devices:

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

#### For Release 6 HSPA Data Devices

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

#### For Release 8

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

## 9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Rchwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

### 1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8 \text{ W/kg}$ , testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45 \text{ W/kg}$ , SAR is required for all three RB offset configurations for that required test channel.

### 2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

### 3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq 0.8 \text{ W/kg}$ . Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45 \text{ W/kg}$ , the remaining required test channels must also be tested.

### TDD test:

TDD testing is performed using guidance from FCC KDB 941225 D05 v02r05 and the SAR test guidance provided in April 2013 TCB works hop notes. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211.

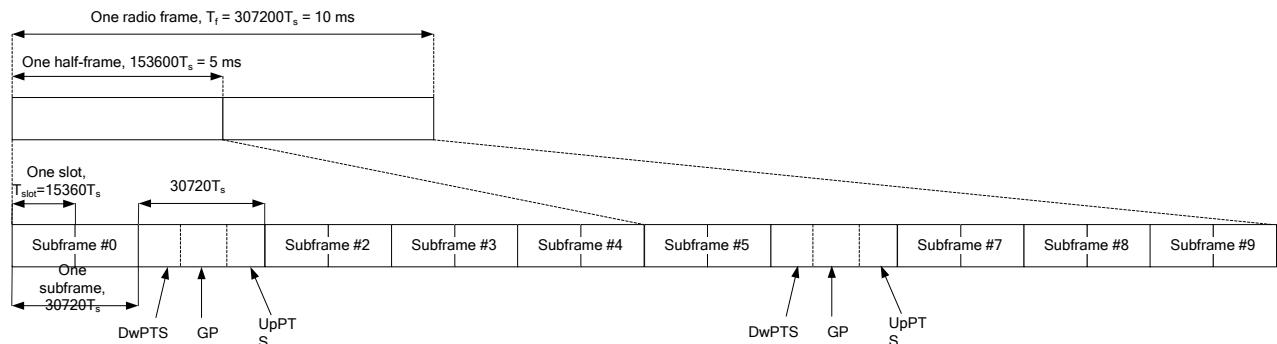


Figure 9.2: Frame structure type 2 (for 5 ms switch-point periodicity)

**Table 9.1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)**

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	2192 $\cdot T_s$	2560 $\cdot T_s$	$7680 \cdot T_s$	2192 $\cdot T_s$	2560 $\cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	4384 $\cdot T_s$	5120 $\cdot T_s$	$20480 \cdot T_s$	4384 $\cdot T_s$	5120 $\cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

**Table 9.2: Uplink-downlink configurations**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Duty factor is calculated by:

$$\text{Duty factor} = \text{uplink frame} * 6 + \text{UpPTS} * 2 / \text{one frame length}$$

$$= (30720 \cdot T_s * 6 + 5120 \cdot T_s * 2) / 307200 \cdot T_s$$

$$= 0.633$$

According to the KDB 447498 D01, SAR should be evaluated at more than 3 frequencies for devices supporting transmit bands wider than 100MHz. Oct.2014 FCC-TCB conference notes (Dec. 2014 rev.) specifies the 5 test channels to use for 3GPP band 41 SAR evaluation.

## 9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

## 9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

## 10 Area Scan Based 1-g SAR

### 10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is  $\leq 1.2 \text{ W/kg}$ , a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

### 10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

## 11 Conducted Output Power

When WLAN Hotspot mode is activated (AP ON), the conducted output power will be reduced for WCDMA 850/1700/1900, CDMA BC0/1/10 and LTE band 25/26. When WLAN Hotspot mode is deactivated (AP OFF), the RF output power level return to their normal RF power level.

### 11.1 Manufacturing tolerance

**When the hotspot mode is ON:**

**Table 11.1: WCDMA**

WCDMA 850 CS			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	22	22	22
Tune-up (dBm)	22.7	22.7	22.7
HSUPA (sub-test 1/4)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	20.5	20.5	20.5
Tune-up (dBm)	21.2	21.2	21.2
HSUPA (sub-test 2/3)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	19.5	19.5	19.5
Tune-up (dBm)	20.2	20.2	20.2
HSUPA (sub-test 5)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	22	22	22
Tune-up (dBm)	22.7	22.7	22.7
DC-HSDPA (sub-test 1~4)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	20.5	20.5	20.5
Tune-up (dBm)	21.2	21.2	21.2
WCDMA 1700 CS			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	19.8	19.8	19.8
Tune-up (dBm)	20.5	20.5	20.5
HSUPA (sub-test 1/4/5)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	19	19	19
Tune-up (dBm)	19.7	19.7	19.7
HSUPA (sub-test 2/3)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	18	18	18
Tune-up (dBm)	18.7	18.7	18.7

DC-HSDPA (sub-test 1~4)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	19	19	19
Tune-up (dBm)	19.7	19.7	19.7
WCDMA 1900 CS			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	20.5	20.5	20.5
Tune-up (dBm)	21.2	21.2	21.2
HSUPA (sub-test 1/4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19	19	19
Tune-up (dBm)	19.7	19.7	19.7
HSUPA (sub-test 2/3)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	18	18	18
Tune-up (dBm)	18.7	18.7	18.7
HSUPA (sub-test 5)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19.5	19.5	19.5
Tune-up (dBm)	20.2	20.2	20.2
DC-HSDPA (sub-test 1~4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19	19	19
Tune-up (dBm)	19.7	19.7	19.7

**Table 11.2: CDMA**

CDMA BC0			
Channel	Channel 777	Channel 384	Channel 1013
Target (dBm)	23.1	23.1	23.1
Tune-up (dBm)	23.8	23.8	23.8
CDMA BC1			
Channel	Channel 1175	Channel 600	Channel 25
Target (dBm)	19.7	19.7	19.7
Tune-up (dBm)	20.4	20.4	20.4
CDMA BC10			
Channel	Channel 684	Channel 580	Channel 476
Target (dBm)	21.8	21.8	21.8
Tune-up (dBm)	22.5	22.5	22.5

**Table 11.3: LTE**

Mode	Target (dBm)	Tune-up (dBm)
LTE Band 25	20.5	21.2
LTE Band 26	22	22.7

**Note: When the hotspot mode is ON, MPR settings doesn't work.**

When the hotspot mode is OFF:

**Table 11.4: GSM Speech**

GSM 850			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	32.5	32.5	32.5
Tune-up (dBm)	33.2	33.2	33.2
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	29	29	29
Tune-up (dBm)	29.7	29.7	29.7

**Table 11.5: GPRS and EGPRS**

GSM 850 GPRS/EGPRS (GMSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	32	32	32
	Tune-up (dBm)	32.7	32.7	32.7
2 Txslots	Target (dBm)	30.5	30.5	30.5
	Tune-up (dBm)	31.2	31.2	31.2
3 Txslots	Target (dBm)	28.5	28.5	28.5
	Tune-up (dBm)	29.2	29.2	29.2
4 Txslots	Target (dBm)	26.5	26.5	26.5
	Tune-up (dBm)	27.2	27.2	27.2
GSM 850 EGPRS (8PSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	27	27	27
	Tune-up (dBm)	27.7	27.7	27.7
2 Txslots	Target (dBm)	25	25	25
	Tune-up (dBm)	25.7	25.7	25.7
3 Txslots	Target (dBm)	23	23	23
	Tune-up (dBm)	23.7	23.7	23.7
4 Txslots	Target (dBm)	21.5	21.5	21.5
	Tune-up (dBm)	22.2	22.2	22.2
GSM 1900 GPRS/EGPRS (GMSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	29	29	29
	Tune-up (dBm)	29.7	29.7	29.7
2 Txslots	Target (dBm)	27	27	27
	Tune-up (dBm)	27.7	27.7	27.7
3 Txslots	Target (dBm)	25	25	25
	Tune-up (dBm)	25.7	25.7	25.7
4 Txslots	Target (dBm)	23	23	23
	Tune-up (dBm)	23.7	23.7	23.7

GSM 1900 EGPRS (8PSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	25.3	25.3	25.3
	Tune-up (dBm)	26	26	26
2 Txslots	Target (dBm)	23.8	23.8	23.8
	Tune-up (dBm)	24.5	24.5	24.5
3 Txslots	Target (dBm)	21.3	21.3	21.3
	Tune-up (dBm)	22	22	22
4 Txslots	Target (dBm)	19.3	19.3	19.3
	Tune-up (dBm)	20	20	20

**Table 11.6: WCDMA**

WCDMA 850 CS				
Channel	Channel 4233	Channel 4182	Channel 4132	
Target (dBm)	23.5	23.5	23.5	
Tune-up (dBm)	24.2	24.2	24.2	
HSUPA (sub-test 1/4)				
Channel	Channel 4233	Channel 4182	Channel 4132	
Target (dBm)	22	22	22	
Tune-up (dBm)	22.7	22.7	22.7	
HSUPA (sub-test 2/3)				
Channel	Channel 4233	Channel 4182	Channel 4132	
Target (dBm)	21	21	21	
Tune-up (dBm)	21.7	21.7	21.7	
HSUPA (sub-test 5)				
Channel	Channel 4233	Channel 4182	Channel 4132	
Target (dBm)	22.5	22.5	22.5	
Tune-up (dBm)	23.2	23.2	23.2	
DC-HSDPA (sub-test 1~4)				
Channel	Channel 4233	Channel 4182	Channel 4132	
Target (dBm)	22	22	22	
Tune-up (dBm)	22.7	22.7	22.7	
WCDMA 1700 CS				
Channel	Channel 1513	Channel 1412	Channel 1312	
Target (dBm)	23.5	23.5	23.5	
Tune-up (dBm)	24.2	24.2	24.2	
HSUPA (sub-test 1/4)				
Channel	Channel 1513	Channel 1412	Channel 1312	
Target (dBm)	22	22	22	
Tune-up (dBm)	22.7	22.7	22.7	
HSUPA (sub-test 2/3)				
Channel	Channel 1513	Channel 1412	Channel 1312	
Target (dBm)	21	21	21	
Tune-up (dBm)	21.7	21.7	21.7	

HSUPA (sub-test 5)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	22.5	22.5	22.5
Tune-up (dBm)	23.2	23.2	23.2
DC-HSDPA (sub-test 1~4)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	22	22	22
Tune-up (dBm)	22.7	22.7	22.7
WCDMA 1900 CS			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	23.5	23.5	23.5
Tune-up (dBm)	24.2	24.2	24.2
HSUPA (sub-test 1/4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	22	22	22
Tune-up (dBm)	22.7	22.7	22.7
HSUPA (sub-test 2/3)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	21	21	21
Tune-up (dBm)	21.7	21.7	21.7
HSUPA (sub-test 5)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	22.5	22.5	22.5
Tune-up (dBm)	23.2	23.2	23.2
DC-HSDPA (sub-test 1~4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	22	22	22
Tune-up (dBm)	22.7	22.7	22.7

**Table 11.7: CDMA**

CDMA BC0			
Channel	Channel 777	Channel 384	Channel 1013
Target (dBm)	24	24	24
Tune-up (dBm)	24.7	24.7	24.7
CDMA BC1			
Channel	Channel 1175	Channel 600	Channel 25
Target (dBm)	23.8	23.8	23.8
Tune-up (dBm)	24.5	24.5	24.5
CDMA BC10			
Channel	Channel 684	Channel 580	Channel 476
Target (dBm)	24.3	24.3	24.3
Tune-up (dBm)	25.0	25.0	25.0

**Table 11.8: LTE**

Mode	Target (dBm)	Tune-up (dBm)
LTE Band 25	23.5	24.2
LTE Band 26	23.5	24.2
LTE Band 41	23.5	24.2

**LTE MPR will follow up 3GPP setting as below:**

Modulation	Channel bandwidth / Transmission bandwidth (NRB)						MPR (dB)
	1.4MHz	3.0MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

**Table 11.9: Bluetooth**

Mode	Target (dBm)	Tune-up (dBm)
EDR	9	11

**Table 11.10: WiFi**

Mode	Target (dBm)	Tune-up (dBm)
802.11 b	17	19
802.11 g 6Mbps~36Mbps	14	16
802.11 g 48Mbps~54Mbps	13	15
802.11 n-20M, MCS0~MCS4	12	14
802.11 n-20M, MCS5~MCS7	11	13

## 11.2 Hotspot

The conducted power is normal for all bands except WCDMA 850/1700/1900, CDMA BC0/1/10 and LTE band 25/26. There is power reduction enabled for WCDMA 850/1700/1900, CDMA BC0/1/10 and LTE band 25/26. The power reduction is enabled when the user enables hotspot mode via the manufacturer software. The tables below show the measured powers with hotspot.

**Table 11.11: The conducted Power for WCDMA**

Item	band	FDDV result		
	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	1	21.62	21.82	21.77
HSUPA	1	20.25	20.41	20.55
	2	19.55	19.71	19.25
	3	19.17	19.30	18.95
	4	20.10	20.17	20.16
	5	20.70	20.90	20.82
DC-HSDPA	1	20.17	20.15	20.29
	2	20.15	20.13	20.25
	3	20.11	21.17	20.21
	4	20.15	20.21	20.22

Item	band	FDDIV result		
	ARFCN	1513 (1752.6MHz)	1412 (1732.4MHz)	1312 (1712.4MHz)
WCDMA	\	20.31	20.25	20.44
HSUPA	1	18.84	18.85	18.48
	2	18.24	18.12	17.87
	3	17.84	17.84	17.52
	4	18.67	18.51	18.70
	5	19.17	19.12	19.21
DC-HSDPA	1	18.69	18.83	18.93
	2	18.66	18.81	18.89
	3	18.67	18.78	18.83
	4	18.64	18.81	18.85
Item	band	FDDII result		
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	\	20.37	20.33	20.04
HSUPA	1	19.03	18.93	18.95
	2	18.30	18.30	17.65
	3	17.94	17.93	17.86
	4	18.78	18.84	18.50
	5	19.29	19.36	19.00
DC-HSDPA	1	18.97	18.99	18.53
	2	18.93	18.97	18.55
	3	18.99	18.89	18.58
	4	19.01	18.81	18.56

Table 11.12: The conducted power measurement results for CDMA

CDMA BC0	Conducted Power (dBm)		
	Channel 777 (848.31MHz)	Channel 384 (836.52MHz)	Channel 1013 (824.7MHz)
SO55/RC3	23.38	23.10	23.58
SO55/RC1	22.97	23.09	23.28
SO32/RC3(FCH only)	23.10	23.21	23.40
SO32/RC3(FCH+SCH <sub>n</sub> )	22.89	23.20	23.42
EVDO Rev.0	22.82	23.17	23.42
EVDO Rev.A	22.76	23.07	23.04
CDMA BC1	Conducted Power (dBm)		
	Channel 1175 (1908.75MHz)	Channel 600 (1880MHz)	Channel 25 (1851.25MHz)
SO55/RC3	19.86	19.99	19.97
SO55/RC1	20.08	20.19	20.13
SO32/RC3(FCH only)	20.24	19.98	20.06
SO32/RC3(FCH+SCH <sub>n</sub> )	20.26	19.94	20.07
EVDO Rev.0	20.03	20.21	20.16
EVDO Rev.A	20.07	20.16	20.25

CDMA BC10	Conducted Power (dBm)		
	Channel 684 (823.1MHz)	Channel 580 (820.5MHz)	Channel 476 (817.9MHz)
SO55/RC3	22.05	22.39	22.17
SO55/RC1	22.06	22.16	22.32
SO32/RC3(FCH only)	22.09	22.26	22.24
SO32/RC3(FCH+SCH <sub>n</sub> )	22.15	22.23	22.30
EVDO Rev.0	22.10	21.86	22.32
EVDO Rev.A	21.40	22.00	22.03

**Table 11.13: The conducted Power for LTE**

Band 25							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
				Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	1914.3	21.2	19.52	0	19.46	0
		1882.5	21.2	19.80	0	19.79	0
		1850.7	21.2	19.76	0	19.92	0
	1RB Middle (3)	1914.3	21.2	19.79	0	19.82	0
		1882.5	21.2	19.86	0	19.98	0
		1850.7	21.2	19.98	0	19.81	0
	1RB Low (0)	1914.3	21.2	19.86	0	19.98	0
		1882.5	21.2	19.89	0	19.74	0
		1850.7	21.2	19.75	0	19.34	0
	3RB High (3)	1914.3	21.2	19.65	0	19.93	0
		1882.5	21.2	19.68	0	19.95	0
		1850.7	21.2	19.62	0	19.92	0
	3RB Middle (1)	1914.3	21.2	19.95	0	19.98	0
		1882.5	21.2	19.77	0	19.89	0
		1850.7	21.2	19.83	0	19.84	0
	3RB Low (0)	1914.3	21.2	19.82	0	19.92	0
		1882.5	21.2	19.78	0	20.07	0
		1850.7	21.2	19.72	0	19.86	0
	6RB (0)	1914.3	21.2	19.67	0	19.76	0
		1882.5	21.2	19.73	0	19.75	0
		1850.7	21.2	19.70	0	19.64	0
3 MHz	1RB High (14)	1913.5	21.2	19.49	0	19.73	0
		1882.5	21.2	19.64	0	19.83	0
		1851.5	21.2	19.87	0	19.89	0
	1RB Middle (7)	1913.5	21.2	19.68	0	19.86	0
		1882.5	21.2	19.62	0	19.93	0
		1851.5	21.2	19.66	0	20.19	0
	1RB	1913.5	21.2	19.81	0	19.70	0

	Low (0)	1882.5	21.2	19.64	0	19.87	0
		1851.5	21.2	19.72	0	20.26	0
	8RB High (7)	1913.5	21.2	19.72	0	19.96	0
		1882.5	21.2	19.69	0	19.71	0
		1851.5	21.2	19.84	0	19.65	0
		1913.5	21.2	19.79	0	19.88	0
	8RB Middle (4)	1882.5	21.2	19.81	0	19.66	0
		1851.5	21.2	19.72	0	19.60	0
		1913.5	21.2	19.79	0	20.02	0
	8RB Low (0)	1882.5	21.2	19.85	0	19.63	0
		1851.5	21.2	19.69	0	19.67	0
		1913.5	21.2	19.82	0	19.86	0
	15RB (0)	1882.5	21.2	19.76	0	19.84	0
		1851.5	21.2	19.62	0	19.61	0
		1913.5	21.2	19.34	0	19.27	0
5 MHz	1RB High (24)	1882.5	21.2	19.76	0	19.34	0
		1852.5	21.2	19.56	0	19.31	0
		1912.5	21.2	19.41	0	19.27	0
	1RB Middle (12)	1882.5	21.2	19.55	0	19.40	0
		1852.5	21.2	19.42	0	19.44	0
		1912.5	21.2	19.54	0	19.39	0
	1RB Low (0)	1882.5	21.2	19.62	0	19.45	0
		1852.5	21.2	19.65	0	19.36	0
		1912.5	21.2	19.73	0	19.77	0
	12RB High (13)	1882.5	21.2	19.72	0	19.79	0
		1852.5	21.2	19.82	0	19.62	0
		1912.5	21.2	19.76	0	19.73	0
	12RB Middle (6)	1882.5	21.2	19.78	0	19.81	0
		1852.5	21.2	19.72	0	19.75	0
		1912.5	21.2	19.75	0	19.76	0
	12RB Low (0)	1882.5	21.2	19.81	0	19.93	0
		1852.5	21.2	19.69	0	19.75	0
		1912.5	21.2	19.80	0	19.84	0
10 MHz	25RB (0)	1882.5	21.2	19.80	0	19.95	0
		1852.5	21.2	19.78	0	19.87	0
		1912.5	21.2	19.86	0	19.86	0
	1RB High (49)	1882.5	21.2	19.64	0	19.91	0
		1855	21.2	19.92	0	19.93	0
	1RB Middle (24)	1910	21.2	20.08	0	19.88	0
		1882.5	21.2	20.05	0	20.55	0
	1RB	1855	21.2	19.75	0	20.05	0

	Low (0)	1882.5	21.2	19.97	0	19.96	0
		1855	21.2	19.75	0	20.16	0
	25RB High (25)	1910	21.2	19.78	0	19.77	0
		1882.5	21.2	19.73	0	19.72	0
		1855	21.2	19.78	0	19.76	0
		1910	21.2	19.84	0	19.85	0
	25RB Middle (12)	1882.5	21.2	19.87	0	19.85	0
		1855	21.2	19.81	0	19.71	0
		1910	21.2	19.84	0	19.80	0
	25RB Low (0)	1882.5	21.2	19.84	0	19.89	0
		1855	21.2	19.73	0	19.68	0
		1910	21.2	19.78	0	19.87	0
15 MHz	50RB (0)	1882.5	21.2	19.85	0	19.88	0
		1855	21.2	19.83	0	19.89	0
	1RB High (74)	1907.5	21.2	19.71	0	19.86	0
		1882.5	21.2	19.69	0	19.75	0
		1857.5	21.2	19.87	0	20.10	0
	1RB Middle (37)	1907.5	21.2	19.79	0	19.83	0
		1882.5	21.2	19.69	0	19.81	0
		1857.5	21.2	19.86	0	19.85	0
	1RB Low (0)	1907.5	21.2	19.89	0	20.21	0
		1882.5	21.2	19.94	0	20.20	0
		1857.5	21.2	19.78	0	19.94	0
	36RB High (38)	1907.5	21.2	19.78	0	19.84	0
		1882.5	21.2	19.78	0	19.88	0
		1857.5	21.2	19.88	0	19.78	0
	36RB Middle (19)	1907.5	21.2	19.90	0	19.90	0
		1882.5	21.2	19.92	0	19.93	0
		1857.5	21.2	19.82	0	19.89	0
	36RB Low (0)	1907.5	21.2	19.87	0	19.95	0
		1882.5	21.2	20.03	0	20.07	0
		1857.5	21.2	19.82	0	19.86	0
	75RB (0)	1907.5	21.2	19.86	0	19.87	0
		1882.5	21.2	19.89	0	19.91	0
		1857.5	21.2	19.92	0	19.98	0
20 MHz	1RB High (99)	1905	21.2	19.65	0	19.34	0
		1882.5	21.2	19.67	0	20.06	0
		1860	21.2	19.99	0	20.02	0
	1RB Middle (50)	1905	21.2	19.72	0	20.07	0
		1882.5	21.2	19.69	0	20.22	0
		1860	21.2	19.98	0	20.21	0
	1RB Low (0)	1905	21.2	19.83	0	20.02	0
		1882.5	21.2	19.82	0	20.25	0

		1860	21.2	19.97	0	20.28	0
50RB High (50)	1905	21.2	19.71	0	19.79	0	
	1882.5	21.2	19.72	0	19.71	0	
	1860	21.2	19.79	0	19.77	0	
	1905	21.2	19.81	0	19.85	0	
50RB Middle (25)	1882.5	21.2	19.73	0	19.77	0	
	1860	21.2	19.85	0	19.79	0	
	1905	21.2	19.85	0	19.91	0	
50RB Low (0)	1882.5	21.2	19.89	0	19.87	0	
	1860	21.2	19.86	0	19.94	0	
	1905	21.2	19.83	0	19.91	0	
100RB (0)	1882.5	21.2	19.84	0	19.90	0	
	1860	21.2	19.86	0	19.94	0	

## Band 26

Bandwidth (MHz)	RB allocation RB offset (Start RB)	Frequency (MHz)	Max. Target Power (dBm)	QPSK		0	
				Actual output power (dBm)	0	Actual output power (dBm)	0
1.4 MHz	1RB High (5)	848.3	22.7	20.86	0	21.20	0
		831.5	22.7	21.07	0	21.01	0
		814.7	22.7	21.02	0	21.37	0
	1RB Middle (3)	848.3	22.7	21.21	0	21.42	0
		831.5	22.7	21.04	0	21.01	0
		814.7	22.7	21.41	0	22.00	0
	1RB Low (0)	848.3	22.7	21.32	0	21.50	0
		831.5	22.7	21.02	0	20.92	0
		814.7	22.7	21.39	0	21.68	0
	3RB High (3)	848.3	22.7	21.13	0	21.34	0
		831.5	22.7	21.12	0	20.80	0
		814.7	22.7	21.11	0	21.23	0
	3RB Middle (1)	848.3	22.7	21.30	0	21.33	0
		831.5	22.7	21.13	0	21.33	0
		814.7	22.7	21.24	0	21.09	0
	3RB Low (0)	848.3	22.7	21.24	0	21.39	0
		831.5	22.7	21.26	0	20.98	0
		814.7	22.7	21.25	0	21.02	0
	6RB (0)	848.3	22.7	21.16	0	21.23	0
		831.5	22.7	21.08	0	21.05	0
		814.7	22.7	21.21	0	21.27	0
3 MHz	1RB High (14)	847.5	22.7	20.81	0	21.53	0
		831.5	22.7	20.92	0	21.29	0
		815.5	22.7	21.18	0	21.62	0
	1RB	847.5	22.7	21.27	0	21.63	0

	Middle (7)	831.5	22.7	20.91	0	21.13	0
		815.5	22.7	21.35	0	21.54	0
	1RB Low (0)	847.5	22.7	21.40	0	21.61	0
		831.5	22.7	21.13	0	21.11	0
		815.5	22.7	21.24	0	21.97	0
		847.5	22.7	21.13	0	21.42	0
	8RB High (7)	831.5	22.7	21.07	0	21.03	0
		815.5	22.7	21.15	0	21.39	0
		847.5	22.7	21.24	0	21.33	0
	8RB Middle (4)	831.5	22.7	21.19	0	21.06	0
		815.5	22.7	21.24	0	21.16	0
		847.5	22.7	21.26	0	21.08	0
	8RB Low (0)	831.5	22.7	21.10	0	21.02	0
		815.5	22.7	21.32	0	21.06	0
		847.5	22.7	21.22	0	21.25	0
	15RB (0)	831.5	22.7	21.18	0	21.09	0
		815.5	22.7	21.33	0	21.18	0
		846.5	22.7	20.91	0	21.28	0
5 MHz	1RB High (24)	831.5	22.7	21.05	0	20.82	0
		816.5	22.7	21.20	0	21.42	0
		846.5	22.7	21.31	0	21.01	0
	1RB Middle (12)	831.5	22.7	20.76	0	20.78	0
		816.5	22.7	21.14	0	21.08	0
		846.5	22.7	21.32	0	21.43	0
	1RB Low (0)	831.5	22.7	20.89	0	20.71	0
		816.5	22.7	21.35	0	21.36	0
		846.5	22.7	21.12	0	21.09	0
	12RB High (13)	831.5	22.7	21.07	0	21.05	0
		816.5	22.7	21.14	0	21.14	0
		846.5	22.7	21.21	0	21.07	0
	12RB Middle (6)	831.5	22.7	21.18	0	21.10	0
		816.5	22.7	21.27	0	21.15	0
		846.5	22.7	21.20	0	21.10	0
	12RB Low (0)	831.5	22.7	21.20	0	21.02	0
		816.5	22.7	21.27	0	21.16	0
		846.5	22.7	21.23	0	21.13	0
10 MHz	1RB High (49)	831.5	22.7	21.22	0	21.13	0
		816.5	22.7	21.31	0	21.25	0
		844	22.7	21.12	0	21.56	0
	1RB	831.5	22.7	20.92	0	21.20	0
		820	22.7	20.95	0	20.75	0
		844	22.7	21.33	0	21.32	0

	Middle (24)	831.5	22.7	21.09	0	21.36	0
		820	22.7	21.19	0	21.23	0
	1RB Low (0)	844	22.7	21.32	0	21.39	0
		831.5	22.7	21.24	0	21.32	0
		820	22.7	21.15	0	20.78	0
	25RB High (25)	844	22.7	21.17	0	21.00	0
		831.5	22.7	21.13	0	21.09	0
		820	22.7	21.12	0	21.07	0
	25RB Middle (12)	844	22.7	21.23	0	21.09	0
		831.5	22.7	21.11	0	21.15	0
		820	22.7	21.27	0	21.17	0
	25RB Low (0)	844	22.7	21.18	0	21.17	0
		831.5	22.7	21.18	0	21.22	0
		820	22.7	21.28	0	21.18	0
	50RB (0)	844	22.7	21.23	0	21.25	0
		831.5	22.7	21.25	0	21.20	0
		820	22.7	21.26	0	21.27	0
15 MHz	1RB High (74)	841.5	22.7	20.96	0	21.25	0
		831.5	22.7	21.17	0	21.36	0
		822.5	22.7	21.18	0	21.32	0
	1RB Middle (37)	841.5	22.7	20.95	0	21.23	0
		831.5	22.7	21.15	0	21.80	0
		822.5	22.7	21.03	0	21.62	0
	1RB Low (0)	841.5	22.7	21.36	0	21.43	0
		831.5	22.7	21.27	0	22.01	0
		822.5	22.7	21.45	0	21.35	0
	36RB High (38)	841.5	22.7	21.11	0	21.21	0
		831.5	22.7	21.14	0	21.08	0
		822.5	22.7	21.07	0	21.11	0
	36RB Middle (19)	841.5	22.7	21.32	0	21.01	0
		831.5	22.7	21.11	0	21.16	0
		822.5	22.7	21.10	0	21.25	0
	36RB Low (0)	841.5	22.7	21.20	0	20.96	0
		831.5	22.7	21.16	0	21.23	0
		822.5	22.7	21.29	0	21.27	0
	75RB (0)	841.5	22.7	21.17	0	21.30	0
		831.5	22.7	21.10	0	21.19	0
		822.5	22.7	21.25	0	21.17	0

### 11.3 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

**Table 11.14: The conducted power measurement results for GSM850/1900**

GSM 850MHz	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.44	32.40	32.32
GSM 1900MHz	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	28.36	28.61	28.67

**Table 11.15: The conducted power measurement results for GPRS and EGPRS**

GSM 850 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.45	32.39	32.30	-9.03dB	23.42	23.36	23.27
<b>2 Txslots</b>	30.77	30.71	30.66	-6.02dB	<b>24.75</b>	<b>24.69</b>	<b>24.64</b>
3Txslots	28.52	28.45	28.40	-4.26dB	24.26	24.19	24.14
4 Txslots	26.51	26.49	26.48	-3.01dB	23.50	23.48	23.47
GSM 850 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.41	32.36	32.27	-9.03dB	23.38	23.33	23.24
<b>2 Txslots</b>	30.76	30.70	30.63	-6.02dB	<b>24.74</b>	<b>24.68</b>	<b>24.61</b>
3Txslots	28.59	28.44	28.39	-4.26dB	24.33	24.18	24.13
4 Txslots	26.47	26.46	26.43	-3.01dB	23.46	23.45	23.42
GSM 850 EGPRS (8PSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	26.82	26.79	26.82	-9.03dB	17.79	17.76	17.79
2 Txslots	25.13	25.13	25.18	-6.02dB	19.11	19.11	19.16
3Txslots	22.96	22.96	22.95	-4.26dB	18.70	18.70	18.69
4 Txslots	21.53	21.52	21.48	-3.01dB	18.52	18.51	18.47
PCS1900 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	28.39	28.62	28.66	-9.03dB	19.36	19.59	19.63
<b>2 Txslots</b>	26.88	26.88	27.01	-6.02dB	<b>20.86</b>	<b>20.86</b>	<b>20.99</b>
3Txslots	24.55	24.54	24.75	-4.26dB	20.29	20.28	20.49
4 Txslots	22.58	22.62	22.57	-3.01dB	19.57	19.61	19.56
PCS1900 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	28.41	28.42	28.35	-9.03dB	19.38	19.39	19.32
<b>2 Txslots</b>	26.72	26.69	26.78	-6.02dB	<b>20.70</b>	<b>20.67</b>	<b>20.76</b>
3Txslots	24.38	24.63	24.53	-4.26dB	20.12	20.37	20.27
4 Txslots	22.44	22.43	22.30	-3.01dB	19.43	19.42	19.29

PCS1900 EGPRS (8PSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	25.68	25.63	25.64	-9.03dB	16.65	16.60	16.61
2 Txslots	23.58	23.59	23.61	-6.02dB	17.56	17.57	17.59
3Txslots	21.42	21.44	21.42	-4.26dB	17.16	17.18	17.16
4 Txslots	19.15	19.21	19.21	-3.01dB	16.14	16.20	16.20

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**According to the conducted power as above, the body measurements are performed with 2Txslot for GPRS and EGPRS.**

#### 11.4 WCDMA Measurement result

Table 11.16: The conducted Power for WCDMA

Item	band	FDDV result		
	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	\	23.20	23.29	23.27
HSUPA	1	22.02	22.21	21.76
	2	21.32	21.50	21.12
	3	20.95	21.13	20.80
	4	21.84	21.98	21.93
	5	22.31	22.46	22.44
DC-HSDPA	1	22.02	21.99	22.02
	2	22.01	21.05	22.03
	3	21.98	21.94	22.02
	4	21.99	21.98	22.04
Item	band	FDDIV result		
	ARFCN	1513 (1752.6MHz)	1412 (1732.4MHz)	1312 (1712.4MHz)
WCDMA	\	23.23	23.30	23.41
HSUPA	1	22.22	22.15	22.25
	2	21.50	21.03	21.19
	3	21.18	21.45	20.88
	4	22.06	22.02	22.00
	5	22.41	22.40	22.57
DC-HSDPA	1	21.86	21.86	22.03
	2	21.88	21.88	21.99
	3	21.84	21.85	21.97
	4	21.83	21.83	21.96

Item	band	FDDII result		
		ARFCN	9538 (1907.6MHz)	9400 (1880MHz)
WCDMA	\	23.84	23.72	23.52
HSUPA	1	22.48	22.54	22.31
	2	21.33	21.45	21.06
	3	20.97	21.09	21.22
	4	22.23	22.20	21.76
	5	22.72	22.77	22.37
DC-HSDPA	1	22.34	22.33	21.95
	2	22.35	22.32	21.97
	3	22.31	22.27	21.95
	4	22.32	22.25	21.92

## 11.5 CDMA Measurement result

Table 11.17: The conducted power measurement results for CDMA

CDMA BC0	Conducted Power (dBm)		
	Channel 777 (848.31MHz)	Channel 384 (836.52MHz)	Channel 1013 (824.7MHz)
SO55/RC3	23.88	23.93	24.33
SO55/RC1	23.79	23.82	24.02
SO32/RC3(FCH only)	24.18	24.20	24.34
SO32/RC3(FCH+SCH <sub>n</sub> )	24.12	24.12	24.24
EVDO Rev.0	23.87	23.91	24.09
EVDO Rev.A	23.73	23.84	24.01
CDMA BC1	Conducted Power (dBm)		
	Channel 1175 (1908.75MHz)	Channel 600 (1880MHz)	Channel 25 (1851.25MHz)
SO55/RC3	24.30	24.14	24.08
SO55/RC1	24.25	23.98	23.91
SO32/RC3(FCH only)	24.25	24.12	23.98
SO32/RC3(FCH+SCH <sub>n</sub> )	24.27	24.00	24.00
EVDO Rev.0	24.45	24.07	23.86
EVDO Rev.A	24.01	23.95	23.98
CDMA BC10	Conducted Power (dBm)		
	Channel 684 (823.1MHz)	Channel 580 (820.5MHz)	Channel 476 (817.9MHz)
SO55/RC3	24.63	24.72	24.65
SO55/RC1	24.06	24.32	24.69
SO32/RC3(FCH only)	24.37	24.60	24.54
SO32/RC3(FCH+SCH <sub>n</sub> )	24.45	24.63	24.60
EVDO Rev.0	23.87	24.07	24.05
EVDO Rev.A	23.98	24.06	24.03

## 11.6 LTE Measurement result

Table 11.18: The conducted Power for LTE

Band 25							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
				Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	1914.3	24.2	23.26	0	22.56	1
		1882.5	24.2	23.56	0	22.79	1
		1850.7	24.2	23.50	0	23.20	1
	1RB Middle (3)	1914.3	24.2	23.45	0	22.53	1
		1882.5	24.2	23.68	0	22.87	1
		1850.7	24.2	23.44	0	22.61	1
	1RB Low (0)	1914.3	24.2	23.51	0	22.64	1
		1882.5	24.2	23.55	0	22.86	1
		1850.7	24.2	23.35	0	23.03	1
	3RB High (3)	1914.3	24.2	23.54	0	22.77	1
		1882.5	24.2	23.48	0	22.66	1
		1850.7	24.2	23.57	0	22.62	1
	3RB Middle (1)	1914.3	24.2	23.62	0	22.75	1
		1882.5	24.2	23.54	0	22.78	1
		1850.7	24.2	23.60	0	22.67	1
	3RB Low (0)	1914.3	24.2	23.63	0	22.79	1
		1882.5	24.2	23.65	0	22.89	1
		1850.7	24.2	23.40	0	22.57	1
	6RB (0)	1914.3	24.2	22.57	1	21.54	2
		1882.5	24.2	22.51	1	21.71	2
		1850.7	24.2	22.46	1	21.57	2
3 MHz	1RB High (14)	1913.5	24.2	23.40	0	22.50	1
		1882.5	24.2	23.36	0	22.61	1
		1851.5	24.2	23.70	0	23.20	1
	1RB Middle (7)	1913.5	24.2	23.42	0	22.78	1
		1882.5	24.2	23.39	0	22.50	1
		1851.5	24.2	23.49	0	22.62	1
	1RB Low (0)	1913.5	24.2	23.44	0	22.55	1
		1882.5	24.2	23.54	0	22.72	1
		1851.5	24.2	23.41	0	23.01	1
	8RB High (7)	1913.5	24.2	22.45	1	21.54	2
		1882.5	24.2	22.45	1	21.70	2
		1851.5	24.2	22.49	1	21.45	2
	8RB Middle (4)	1913.5	24.2	22.47	1	21.55	2
		1882.5	24.2	22.41	1	21.42	2
		1851.5	24.2	22.45	1	21.49	2

5 MHz	8RB Low (0)	1913.5	24.2	22.57	1	21.46	2
		1882.5	24.2	22.59	1	21.46	2
		1851.5	24.2	22.49	1	21.55	2
	15RB (0)	1913.5	24.2	22.63	1	21.55	2
		1882.5	24.2	22.54	1	21.61	2
		1851.5	24.2	22.53	1	21.50	2
	1RB High (24)	1912.5	24.2	23.15	0	22.20	1
		1882.5	24.2	23.14	0	21.80	1
		1852.5	24.2	23.34	0	21.76	1
	1RB Middle (12)	1912.5	24.2	23.22	0	21.67	1
		1882.5	24.2	23.22	0	21.61	1
		1852.5	24.2	23.43	0	21.65	1
	1RB Low (0)	1912.5	24.2	23.46	0	21.75	1
		1882.5	24.2	23.32	0	21.76	1
		1852.5	24.2	23.40	0	22.27	1
	12RB High (13)	1912.5	24.2	22.47	1	21.64	2
		1882.5	24.2	22.47	1	21.66	2
		1852.5	24.2	22.55	1	21.59	2
	12RB Middle (6)	1912.5	24.2	22.54	1	21.58	2
		1882.5	24.2	22.53	1	21.56	2
		1852.5	24.2	22.54	1	21.45	2
	12RB Low (0)	1912.5	24.2	22.54	1	21.59	2
		1882.5	24.2	22.56	1	21.63	2
		1852.5	24.2	22.52	1	21.48	2
	25RB (0)	1912.5	24.2	22.52	1	21.61	2
		1882.5	24.2	22.53	1	21.71	2
		1852.5	24.2	22.50	1	21.55	2
10 MHz	1RB High (49)	1910	24.2	23.52	0	22.70	1
		1882.5	24.2	23.58	0	22.68	1
		1855	24.2	23.54	0	22.77	1
	1RB Middle (24)	1910	24.2	23.78	0	22.93	1
		1882.5	24.2	23.60	0	22.68	1
		1855	24.2	23.63	0	22.83	1
	1RB Low (0)	1910	24.2	23.75	0	23.01	1
		1882.5	24.2	23.68	0	22.79	1
		1855	24.2	23.66	0	23.00	1
	25RB High (25)	1910	24.2	22.49	1	21.46	2
		1882.5	24.2	22.48	1	21.56	2
		1855	24.2	22.63	1	21.56	2
	25RB Middle (12)	1910	24.2	22.56	1	21.52	2
		1882.5	24.2	22.54	1	21.66	2
		1855	24.2	22.66	1	21.64	2

	25RB Low (0)	1910	24.2	22.60	1	21.72	2
		1882.5	24.2	22.56	1	21.70	2
		1855	24.2	22.57	1	21.64	2
	50RB (0)	1910	24.2	22.62	1	21.69	2
		1882.5	24.2	22.66	1	21.77	2
		1855	24.2	22.61	1	21.73	2
	1RB High (74)	1907.5	24.2	23.54	0	22.72	1
		1882.5	24.2	23.54	0	22.78	1
		1857.5	24.2	23.63	0	22.63	1
	1RB Middle (37)	1907.5	24.2	23.52	0	22.58	1
		1882.5	24.2	23.41	0	22.59	1
		1857.5	24.2	23.62	0	22.91	1
15 MHz	1RB Low (0)	1907.5	24.2	23.68	0	22.88	1
		1882.5	24.2	23.77	0	23.19	1
		1857.5	24.2	23.65	0	22.76	1
	36RB High (38)	1907.5	24.2	22.46	1	21.56	2
		1882.5	24.2	22.47	1	21.58	2
		1857.5	24.2	22.55	1	21.61	2
	36RB Middle (19)	1907.5	24.2	22.51	1	21.66	2
		1882.5	24.2	22.50	1	21.71	2
		1857.5	24.2	22.61	1	21.74	2
	36RB Low (0)	1907.5	24.2	22.58	1	21.66	2
		1882.5	24.2	22.68	1	21.74	2
		1857.5	24.2	22.59	1	21.64	2
	75RB (0)	1907.5	24.2	22.56	1	21.64	2
		1882.5	24.2	22.57	1	21.60	2
		1857.5	24.2	22.60	1	21.72	2
20 MHz	1RB High (99)	1905	24.2	23.55	0	22.61	1
		1882.5	24.2	23.53	0	22.86	1
		1860	24.2	23.87	0	22.83	1
	1RB Middle (50)	1905	24.2	23.65	0	22.77	1
		1882.5	24.2	23.66	0	22.75	1
		1860	24.2	23.78	0	23.13	1
	1RB Low (0)	1905	24.2	23.97	0	23.18	1
		1882.5	24.2	23.93	0	23.11	1
		1860	24.2	23.89	0	22.94	1
	50RB High (50)	1905	24.2	22.50	1	21.62	2
		1882.5	24.2	22.51	1	21.70	2
		1860	24.2	22.67	1	21.76	2
	50RB Middle (25)	1905	24.2	22.52	1	21.69	2
		1882.5	24.2	22.58	1	21.71	2
		1860	24.2	22.63	1	21.69	2

	50RB Low (0)	1905	24.2	22.60	1	21.65	2
		1882.5	24.2	22.70	1	21.86	2
		1860	24.2	22.67	1	21.75	2
	100RB (0)	1905	24.2	22.59	1	21.72	2
		1882.5	24.2	22.60	1	21.78	2
		1860	24.2	22.61	1	21.71	2
Band 26							
Bandwidth (MHz)	RB allocation RB offset (Start RB)	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
				Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	848.3	24.2	23.18	0	22.30	1
		831.5	24.2	23.45	0	23.11	1
		814.7	24.2	23.27	0	22.58	1
	1RB Middle (3)	848.3	24.2	23.26	0	23.00	1
		831.5	24.2	23.69	0	23.13	1
		814.7	24.2	23.56	0	23.18	1
	1RB Low (0)	848.3	24.2	23.39	0	23.00	1
		831.5	24.2	23.43	0	22.69	1
		814.7	24.2	23.73	0	23.05	1
	3RB High (3)	848.3	24.2	23.47	0	22.58	1
		831.5	24.2	23.46	0	22.25	1
		814.7	24.2	23.62	0	22.56	1
	3RB Middle (1)	848.3	24.2	23.76	0	22.74	1
		831.5	24.2	23.63	0	22.61	1
		814.7	24.2	23.60	0	22.73	1
	3RB Low (0)	848.3	24.2	23.57	0	22.85	1
		831.5	24.2	23.62	0	22.72	1
		814.7	24.2	23.60	0	22.63	1
	6RB (0)	848.3	24.2	22.52	1	21.55	2
		831.5	24.2	22.56	1	21.75	2
		814.7	24.2	22.55	1	21.55	2
3 MHz	1RB High (14)	847.5	24.2	23.46	0	22.51	1
		831.5	24.2	23.32	0	22.61	1
		815.5	24.2	23.60	0	22.97	1
	1RB Middle (7)	847.5	24.2	23.61	0	22.83	1
		831.5	24.2	23.40	0	22.53	1
		815.5	24.2	23.82	0	23.12	1
	1RB Low (0)	847.5	24.2	23.70	0	23.13	1
		831.5	24.2	23.52	0	22.56	1
		815.5	24.2	23.86	0	23.19	1
	8RB High (7)	847.5	24.2	22.46	1	21.37	2
		831.5	24.2	22.43	1	21.45	2
		815.5	24.2	22.52	1	21.77	2

	8RB Middle (4)	847.5	24.2	22.48	1	21.66	2
		831.5	24.2	22.42	1	21.37	2
		815.5	24.2	22.64	1	21.50	2
	8RB Low (0)	847.5	24.2	22.47	1	21.59	2
		831.5	24.2	22.51	1	21.36	2
		815.5	24.2	22.61	1	21.59	2
	15RB (0)	847.5	24.2	22.56	1	21.66	2
		831.5	24.2	22.51	1	21.49	2
		815.5	24.2	22.67	1	21.63	2
5 MHz	1RB High (24)	846.5	24.2	23.36	0	22.68	1
		831.5	24.2	23.18	0	22.16	1
		816.5	24.2	23.63	0	22.82	1
	1RB Middle (12)	846.5	24.2	23.68	0	22.79	1
		831.5	24.2	23.22	0	22.18	1
		816.5	24.2	23.57	0	22.78	1
	1RB Low (0)	846.5	24.2	23.65	0	22.74	1
		831.5	24.2	23.33	0	21.87	1
		816.5	24.2	23.75	0	22.83	1
	12RB High (13)	846.5	24.2	22.50	1	21.46	2
		831.5	24.2	22.47	1	21.41	2
		816.5	24.2	22.54	1	21.53	2
	12RB Middle (6)	846.5	24.2	22.44	1	21.58	2
		831.5	24.2	22.42	1	21.63	2
		816.5	24.2	22.54	1	21.53	2
	12RB Low (0)	846.5	24.2	22.55	1	21.54	2
		831.5	24.2	22.49	1	21.61	2
		816.5	24.2	22.60	1	21.59	2
	25RB (0)	846.5	24.2	22.54	1	21.60	2
		831.5	24.2	22.49	1	21.72	2
		816.5	24.2	22.61	1	21.65	2
10 MHz	1RB High (49)	844	24.2	23.58	0	22.95	1
		831.5	24.2	23.54	0	22.96	1
		820	24.2	23.39	0	22.46	1
	1RB Middle (24)	844	24.2	23.72	0	22.85	1
		831.5	24.2	23.84	0	22.98	1
		820	24.2	23.85	0	22.47	1
	1RB Low (0)	844	24.2	23.75	0	23.15	1
		831.5	24.2	23.71	0	23.14	1
		820	24.2	23.69	0	22.56	1
	25RB High (25)	844	24.2	22.49	1	21.59	2
		831.5	24.2	22.52	1	21.54	2
		820	24.2	22.60	1	21.46	2

	25RB Middle (12)	844	24.2	22.66	1	21.64	2
		831.5	24.2	22.50	1	21.55	2
		820	24.2	22.66	1	21.70	2
	25RB Low (0)	844	24.2	22.57	1	21.61	2
		831.5	24.2	22.51	1	21.65	2
		820	24.2	22.66	1	21.59	2
	50RB (0)	844	24.2	22.64	1	21.61	2
		831.5	24.2	22.57	1	21.62	2
		820	24.2	22.64	1	21.69	2
15 MHz	1RB High (74)	841.5	24.2	23.49	0	23.11	1
		831.5	24.2	23.52	0	22.59	1
		822.5	24.2	23.42	0	22.66	1
	1RB Middle (37)	841.5	24.2	23.58	0	22.70	1
		831.5	24.2	23.50	0	22.65	1
		822.5	24.2	23.39	0	22.99	1
	1RB Low (0)	841.5	24.2	23.60	0	22.55	1
		831.5	24.2	23.62	0	22.66	1
		822.5	24.2	23.71	0	22.90	1
	36RB High (38)	841.5	24.2	22.46	1	21.59	2
		831.5	24.2	22.43	1	21.54	2
		822.5	24.2	22.44	1	21.52	2
	36RB Middle (19)	841.5	24.2	22.49	1	21.53	2
		831.5	24.2	22.48	1	21.53	2
		822.5	24.2	22.46	1	21.57	2
	36RB Low (0)	841.5	24.2	22.50	1	21.37	2
		831.5	24.2	22.55	1	21.58	2
		822.5	24.2	22.59	1	21.60	2
	75RB (0)	841.5	24.2	22.66	1	21.60	2
		831.5	24.2	22.50	1	21.59	2
		822.5	24.2	22.58	1	21.64	2
Band 41							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
				RB offset (Start RB)	Actual output power (dBm)	MPR	Actual output power (dBm)
5 MHz	1RB High (24)	2687.5	24.2	23.09	0	22.55	1
		2640.3	24.2	23.05	0	22.19	1
		2593	24.2	22.72	0	21.86	1
		2545.8	24.2	23.14	0	22.14	1
		2498.5	24.2	22.73	0	21.89	1
	1RB Middle (12)	2687.5	24.2	23.48	0	22.65	1
		2640.3	24.2	23.10	0	22.45	1
		2593	24.2	23.08	0	22.24	1
		2545.8	24.2	23.19	0	22.20	1

	1RB Low (0)	2498.5	24.2	22.91	0	21.91	1
		2687.5	24.2	23.29	0	22.55	1
		2640.3	24.2	23.23	0	22.50	1
		2593	24.2	23.00	0	22.27	1
		2545.8	24.2	23.16	0	22.22	1
		2498.5	24.2	23.15	0	22.17	1
12RB High (13)	12RB High (13)	2687.5	24.2	22.50	1	21.33	2
		2640.3	24.2	22.14	1	21.19	2
		2593	24.2	21.91	1	20.98	2
		2545.8	24.2	22.22	1	21.28	2
		2498.5	24.2	21.93	1	20.80	2
12RB Middle (6)	12RB Middle (6)	2687.5	24.2	22.53	1	21.40	2
		2640.3	24.2	22.25	1	21.24	2
		2593	24.2	21.92	1	21.07	2
		2545.8	24.2	22.10	1	21.14	2
		2498.5	24.2	21.98	1	20.86	2
12RB Low (0)	12RB Low (0)	2687.5	24.2	22.55	1	21.32	2
		2640.3	24.2	22.27	1	21.26	2
		2593	24.2	21.94	1	20.98	2
		2545.8	24.2	22.24	1	21.31	2
		2498.5	24.2	21.90	1	20.79	2
25RB (0)	25RB (0)	2687.5	24.2	22.50	1	21.61	2
		2640.3	24.2	22.17	1	21.25	2
		2593	24.2	22.06	1	21.11	2
		2545.8	24.2	22.29	1	21.16	2
		2498.5	24.2	21.92	1	20.98	2
10 MHz	1RB High (49)	2685	24.2	23.44	0	22.34	1
		2639	24.2	23.53	0	22.36	1
		2593	24.2	22.95	0	21.89	1
		2547	24.2	23.32	0	22.25	1
		2501	24.2	22.94	0	21.86	1
	1RB Middle (24)	2685	24.2	23.55	0	22.11	1
		2639	24.2	23.40	0	22.55	1
		2593	24.2	22.93	0	21.97	1
		2547	24.2	23.30	0	22.38	1
		2501	24.2	22.88	0	21.92	1
	1RB Low (0)	2685	24.2	23.55	0	22.17	1
		2639	24.2	23.50	0	22.52	1
		2593	24.2	23.01	0	21.91	1
		2547	24.2	23.36	0	22.20	1
		2501	24.2	23.07	0	22.00	1

	25RB High (25)	2685	24.2	22.44	1	21.62	2
		2639	24.2	22.13	1	21.20	2
		2593	24.2	21.96	1	20.92	2
		2547	24.2	22.32	1	21.35	2
		2501	24.2	21.89	1	20.92	2
	25RB Middle (12)	2685	24.2	22.59	1	21.59	2
		2639	24.2	22.15	1	21.19	2
		2593	24.2	21.94	1	21.02	2
		2547	24.2	22.18	1	21.16	2
		2501	24.2	21.86	1	20.91	2
	25RB Low (0)	2685	24.2	22.52	1	21.52	2
		2639	24.2	22.27	1	21.28	2
		2593	24.2	21.93	1	20.98	2
		2547	24.2	22.34	1	21.40	2
		2501	24.2	22.04	1	21.08	2
	50RB (0)	2685	24.2	22.50	1	21.40	2
		2639	24.2	22.24	1	21.20	2
		2593	24.2	22.00	1	21.05	2
		2547	24.2	22.26	1	21.19	2
		2501	24.2	21.97	1	20.94	2
15 MHz	1RB High (74)	2682.5	24.2	23.76	0	22.68	1
		2637.8	24.2	23.43	0	22.42	1
		2593	24.2	22.86	0	22.12	1
		2548.3	24.2	23.35	0	22.75	1
		2503.5	24.2	23.26	0	22.22	1
	1RB Middle (37)	2682.5	24.2	23.70	0	22.54	1
		2637.8	24.2	23.34	0	22.35	1
		2593	24.2	23.24	0	22.50	1
		2548.3	24.2	23.03	0	22.32	1
		2503.5	24.2	23.41	0	22.28	1
	1RB Low (0)	2682.5	24.2	23.84	0	22.79	1
		2637.8	24.2	23.50	0	22.48	1
		2593	24.2	23.32	0	22.26	1
		2548.3	24.2	23.24	0	22.44	1
		2503.5	24.2	23.46	0	22.36	1
	36RB High (38)	2682.5	24.2	22.55	1	21.38	2
		2637.8	24.2	22.17	1	21.25	2
		2593	24.2	22.04	1	21.04	2
		2548.3	24.2	22.26	1	21.31	2
		2503.5	24.2	22.04	1	20.97	2
	36RB Middle (19)	2682.5	24.2	22.50	1	21.32	2
		2637.8	24.2	22.13	1	21.16	2

		2593	24.2	22.08	1	21.06	2
		2548.3	24.2	22.20	1	21.18	2
		2503.5	24.2	22.12	1	21.08	2
36RB Low (0)	36RB Low (0)	2682.5	24.2	22.61	1	21.40	2
		2637.8	24.2	22.25	1	21.32	2
		2593	24.2	22.13	1	21.11	2
		2548.3	24.2	22.30	1	21.38	2
		2503.5	24.2	22.09	1	21.03	2
75RB (0)	75RB (0)	2682.5	24.2	22.51	1	21.54	2
		2637.8	24.2	22.18	1	21.23	2
		2593	24.2	22.06	1	21.13	2
		2548.3	24.2	22.29	1	21.22	2
		2503.5	24.2	22.12	1	21.41	2
20 MHz	1RB High (99)	2680	24.2	23.85	0	22.53	1
		2636.5	24.2	23.36	0	22.15	1
		2593	24.2	23.40	0	22.74	1
		2549.5	24.2	23.40	0	22.56	1
		2506	24.2	23.37	0	22.25	1
	1RB Middle (50)	2680	24.2	23.99	0	22.57	1
		2636.5	24.2	23.75	0	22.51	1
		2593	24.2	23.40	0	22.80	1
		2549.5	24.2	23.51	0	22.69	1
		2506	24.2	23.62	0	22.32	1
	1RB Low (0)	2680	24.2	24.00	0	22.85	1
		2636.5	24.2	23.73	0	22.66	1
		2593	24.2	23.44	0	22.49	1
		2549.5	24.2	23.70	0	22.78	1
		2506	24.2	23.61	0	22.32	1
	50RB High (50)	2680	24.2	22.56	1	21.51	2
		2636.5	24.2	22.18	1	21.27	2
		2593	24.2	22.03	1	21.11	2
		2549.5	24.2	22.31	1	21.37	2
		2506	24.2	22.09	1	21.15	2
	50RB Middle (25)	2680	24.2	22.61	1	21.50	2
		2636.5	24.2	22.22	1	21.30	2
		2593	24.2	22.12	1	21.12	2
		2549.5	24.2	22.24	1	21.31	2
		2506	24.2	22.11	1	21.15	2
	50RB Low (0)	2680	24.2	22.71	1	21.62	2
		2636.5	24.2	22.32	1	21.33	2
		2593	24.2	22.17	1	21.17	2

100RB (0)	2549.5	24.2	22.35	1	21.39	2
	2506	24.2	22.15	1	21.21	2
	2680	24.2	22.63	1	21.63	2
	2636.5	24.2	22.21	1	21.09	2
	2593	24.2	22.22	1	21.19	2
	2549.5	24.2	22.30	1	21.27	2
	2506	24.2	22.10	1	21.17	2

## 11.7 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)		
	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78 (2480MHz)
GFSK	9.95	10.70	10.15
EDR2M-4_DQPSK	10.00	10.67	10.13
EDR3M-8DPSK	9.78	10.35	9.95

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	18.09	/	/	/
6	18.65	18.33	18.15	17.90
11	17.14	/	/	/

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	15.17	/	/	/	/	/	/	/
6	15.68	15.56	15.35	15.04	14.70	14.20	13.73	13.56
11	14.22	/	/	/	/	/	/	/

802.11n (dBm) - HT20 (2.4G)


Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	13.45	/	/	/	/	/	/	/
6	13.83	13.50	13.12	12.80	12.35	11.92	11.72	11.52
11	12.25	/	/	/	/	/	/	/

## 12 Simultaneous TX SAR Considerations

### 12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

### 12.2 Transmit Antenna Separation Distances

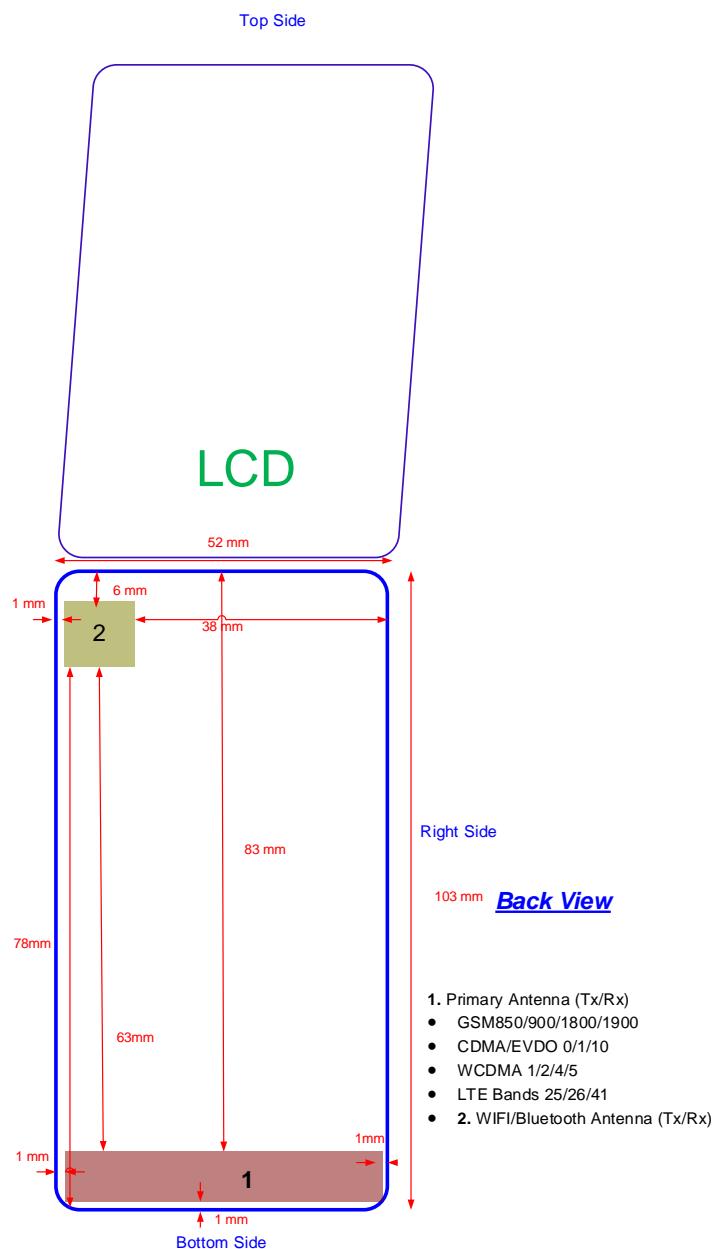

Picture 12.1 Antenna Locations

## 12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

## 12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

**Table 12.1: Standalone SAR test exclusion considerations**

Band/Mode	F(GHz)	Position	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	11	12.59	No
		Body	19.20	11	12.59	Yes
2.4GHz WLAN 802.11 b	2.45	Head	9.58	19	79.43	No
		Body	19.17	19	79.43	No

## 13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WLAN

	Position	Main antenna	WLAN	Sum
<b>Maximum reported SAR value for Head</b>	Right hand, Touch cheek	1.21	0.35	<b>1.56</b>
<b>Maximum reported SAR value for Body</b>	Rear closed 10mm	1.20	0.12	<b>1.32</b>
	Rear open 10mm	1.17	0.20	<b>1.37</b>
	Rear open 15mm	1.40	0.12	<b>1.52</b>

Table 13.2 The sum of reported SAR values for other antenna and Bluetooth

	Position	other antenna	BT	Sum
<b>Highest reported SAR value for Head</b>	Right hand, Touch cheek	1.21	0.02	<b>1.23</b>
<b>Highest reported SAR value for Body</b>	Rear closed 10mm	1.20	<0.01	<b>1.20</b>
	Rear open 15mm	1.40	<0.01	<b>1.40</b>

Note: The head SAR of BT is required to test, so we also measure the body SAR of BT.

### Conclusion:

According to the above tables, the sum of reported SAR values is < 1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

## 14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom. The distance is 10mm or 15mm and just applied to the condition of body worn accessory.

It is performed 10mm for normal bands and AP ON, 15mm for AP OFF measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or > 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where  $P_{\text{Target}}$  is the power of manufacturing upper limit;

$P_{\text{Measured}}$  is the measured power in chapter 11.

**Table 14.1: Duty Cycle**

Duty Cycle	
Speech for GSM850/1900	1:8.3
GPRS&EGPRS	1:4
WCDMA & LTE & CDMA	1:1

### 14.1 SAR results for Fast SAR

**Table 14.1-1: SAR Values (GSM 850 MHz Band - Head)**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.6	190	Left	Touch	/	32.40	33.2	0.360	<b>0.43</b>	0.509	<b>0.61</b>	0.05
836.6	190	Left	Tilt	/	32.40	33.2	0.183	<b>0.22</b>	0.252	<b>0.30</b>	-0.01
848.8	251	Right	Touch	/	32.44	33.2	0.394	<b>0.47</b>	0.586	<b>0.70</b>	0.04
836.6	190	Right	Touch	Fig.1	32.40	33.2	0.406	<b>0.49</b>	0.636	<b>0.76</b>	0.04
824.2	128	Right	Touch	/	32.32	33.2	0.416	<b>0.51</b>	0.616	<b>0.75</b>	0.02
836.6	190	Right	Tilt	/	32.40	33.2	0.205	<b>0.25</b>	0.288	<b>0.35</b>	-0.06

**Table 14.1-2: SAR Values (GSM 850 MHz Band - Body)**

Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5 °C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
848.8	251	GPRS (2)	Front closed	/	30.71	31.2	0.180	<b>0.20</b>	0.258	<b>0.29</b>	0.05
848.8	251	GPRS (2)	Rear closed	/	30.77	31.2	0.430	<b>0.48</b>	0.718	<b>0.79</b>	-0.09
836.6	190	GPRS (2)	Rear closed	/	30.71	31.2	0.504	<b>0.56</b>	0.814	<b>0.91</b>	-0.03
824.2	128	GPRS (2)	Rear closed	Fig.2	30.66	31.2	0.610	<b>0.69</b>	0.840	<b>0.95</b>	-0.10
836.6	190	GPRS (2)	Left closed	/	30.71	31.2	0.161	<b>0.18</b>	0.250	<b>0.28</b>	-0.01
836.6	190	GPRS (2)	Right closed	/	30.71	31.2	0.333	<b>0.37</b>	0.522	<b>0.58</b>	0.11
836.6	190	GPRS (2)	Bottom closed	/	30.71	31.2	0.033	<b>0.04</b>	0.055	<b>0.06</b>	0.09
836.6	190	GPRS (2)	Top closed	/	30.71	31.2	0.030	<b>0.03</b>	0.051	<b>0.06</b>	-0.16
836.6	190	GPRS (2)	Rear open	/	30.71	31.2	0.264	<b>0.30</b>	0.453	<b>0.51</b>	0.02
836.6	190	GPRS (2)	Left open	/	30.71	31.2	0.133	<b>0.15</b>	0.198	<b>0.22</b>	-0.11
836.6	190	GPRS (2)	Right open	/	30.71	31.2	0.292	<b>0.33</b>	0.433	<b>0.48</b>	0.03
836.6	190	GPRS (2)	Bottom open	/	30.71	31.2	0.055	<b>0.06</b>	0.094	<b>0.10</b>	0.18
824.2	128	EGPRS (2)	Rear closed	/	30.63	31.2	0.525	<b>0.60</b>	0.825	<b>0.94</b>	0.01

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.1-3: SAR Values (GSM 1900 MHz Band - Head)**

Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1909.8	810	Left	Touch	/	28.36	29.7	0.097	<b>0.13</b>	0.165	<b>0.22</b>	-0.02
1880	661	Left	Touch	Fig.3	28.61	29.7	0.101	<b>0.13</b>	0.169	<b>0.22</b>	-0.17
1850.2	512	Left	Touch	/	28.67	29.7	0.096	<b>0.12</b>	0.158	<b>0.20</b>	0.06
1880	661	Left	Tilt	/	28.61	29.7	0.015	<b>0.02</b>	0.026	<b>0.03</b>	0.07
1880	661	Right	Touch	/	28.61	29.7	0.047	<b>0.06</b>	0.088	<b>0.11</b>	0.05
1880	661	Right	Tilt	/	28.61	29.7	0.014	<b>0.02</b>	0.026	<b>0.03</b>	0.05

**Table 14.1-4: SAR Values (GSM 1900 MHz Band - Body)**

Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5 °C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	661	GPRS (2)	Front closed	/	26.88	27.7	0.097	<b>0.12</b>	0.166	<b>0.20</b>	0.08
1909.8	810	GPRS (2)	Rear closed	/	26.88	27.7	0.444	<b>0.54</b>	0.811	<b>0.98</b>	-0.11
1880	661	GPRS (2)	Rear closed	/	26.88	27.7	0.511	<b>0.62</b>	0.933	<b>1.13</b>	0.1



No. I16Z42015-SEM01

Page 59 of 231

1850.2	512	GPRS (2)	Rear closed	/	27.01	27.7	0.496	<b>0.58</b>	0.913	<b>1.07</b>	0.04
1880	661	GPRS (2)	Left closed	/	26.88	27.7	0.146	<b>0.18</b>	0.242	<b>0.29</b>	0.17
1880	661	GPRS (2)	Right closed	/	26.88	27.7	0.075	<b>0.09</b>	0.125	<b>0.15</b>	-0.09
1880	661	GPRS (2)	Bottom closed	/	26.88	27.7	0.224	<b>0.27</b>	0.401	<b>0.48</b>	0.11
1880	661	GPRS (2)	Top closed	/	26.88	27.7	0.039	<b>0.05</b>	0.065	<b>0.08</b>	0.02
1909.8	810	GPRS (2)	Rear open	/	26.88	27.7	0.496	<b>0.60</b>	0.910	<b>1.10</b>	-0.06
1880	661	GPRS (2)	Rear open	Fig.4	26.88	27.7	0.566	<b>0.68</b>	0.972	<b>1.17</b>	-0.19
1850.2	512	GPRS (2)	Rear open	/	27.01	27.7	0.545	<b>0.64</b>	0.954	<b>1.12</b>	0.08
1880	661	GPRS (2)	Left open	/	26.88	27.7	0.186	<b>0.22</b>	0.305	<b>0.37</b>	-0.06
1880	661	GPRS (2)	Right open	/	26.88	27.7	0.082	<b>0.10</b>	0.135	<b>0.16</b>	-0.12
1880	661	GPRS (2)	Bottom open	/	26.88	27.7	0.232	<b>0.28</b>	0.422	<b>0.51</b>	0.09
1880	661	EGPRS (2)	Rear open	/	26.69	27.7	0.523	<b>0.66</b>	0.897	<b>1.13</b>	0.14

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.1-5: SAR Values (WCDMA 850 MHz Band - Head)**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
846.6	4233	Left	Touch	/	23.27	24.2	0.463	<b>0.57</b>	0.702	<b>0.87</b>	0.08
836.4	4182	Left	Touch	/	23.29	24.2	0.448	<b>0.55</b>	0.679	<b>0.84</b>	0.04
826.4	4132	Left	Touch	/	23.20	24.2	0.436	<b>0.55</b>	0.662	<b>0.83</b>	-0.05
836.4	4182	Left	Tilt	/	23.29	24.2	0.264	<b>0.33</b>	0.382	<b>0.47</b>	0.02
846.6	4233	Right	Touch	Fig.5	23.27	24.2	0.486	<b>0.60</b>	0.769	<b>0.95</b>	0.19
836.4	4182	Right	Touch	/	23.29	24.2	0.473	<b>0.58</b>	0.746	<b>0.92</b>	-0.07
826.4	4132	Right	Touch	/	23.20	24.2	0.459	<b>0.58</b>	0.725	<b>0.91</b>	-0.10
836.4	4182	Right	Tilt	/	23.29	24.2	0.299	<b>0.37</b>	0.441	<b>0.54</b>	-0.01

**Table 14.1-6: SAR Values (WCDMA 850 MHz Band - Body) – AP OFF**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.4	4182	Front closed	/	23.29	24.2	0.067	<b>0.08</b>	0.096	<b>0.12</b>	-0.01
846.6	4233	Rear closed	/	23.27	24.2	0.246	<b>0.30</b>	0.366	<b>0.45</b>	0.07
836.4	4182	Rear closed	/	23.29	24.2	0.263	<b>0.32</b>	0.386	<b>0.48</b>	0.16
826.4	4132	Rear closed	Fig.6	23.20	24.2	0.339	<b>0.43</b>	0.461	<b>0.58</b>	0.08
836.4	4182	Rear open	/	23.29	24.2	0.152	<b>0.19</b>	0.244	<b>0.30</b>	-0.06

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.1-7: SAR Values (WCDMA 850 MHz Band - Body) – AP ON**

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.9 °C		Liquid Temperature: 22.5 °C		
MHz	Ch.									Power Drift (dB)
836.4	4182	Front closed	/	21.82	22.7	0.098	<b>0.12</b>	0.140	<b>0.17</b>	0.16
846.6	4233	Rear closed	/	21.77	22.7	0.273	<b>0.34</b>	0.409	<b>0.51</b>	0.11
836.4	4182	Rear closed	/	21.82	22.7	0.301	<b>0.37</b>	0.444	<b>0.54</b>	0.03
826.4	4132	Rear closed	Fig.7	21.62	22.7	0.364	<b>0.47</b>	0.494	<b>0.63</b>	-0.02
836.4	4182	Left closed		21.82	22.7	0.106	<b>0.13</b>	0.161	<b>0.20</b>	-0.01
836.4	4182	Right closed		21.82	22.7	0.234	<b>0.29</b>	0.364	<b>0.45</b>	0.12
836.4	4182	Bottom closed		21.82	22.7	0.022	<b>0.03</b>	0.035	<b>0.04</b>	0.04
836.4	4182	Top closed		21.82	22.7	0.029	<b>0.04</b>	0.054	<b>0.07</b>	0.08
836.4	4182	Rear open	/	21.82	22.7	0.226	<b>0.28</b>	0.382	<b>0.47</b>	-0.18
836.4	4182	Left open	/	21.82	22.7	0.065	<b>0.08</b>	0.096	<b>0.12</b>	-0.01
836.4	4182	Right open	/	21.82	22.7	0.154	<b>0.19</b>	0.226	<b>0.28</b>	0.09
836.4	4182	Bottom open	/	21.82	22.7	0.029	<b>0.04</b>	0.048	<b>0.06</b>	-0.11

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.1-8: SAR Values (WCDMA 1700 MHz Band - Head)**

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.9 °C		Liquid Temperature: 22.5 °C		
MHz	Ch.										Power Drift (dB)
1752.6	1513	Left	Touch	Fig.8	23.41	24.2	0.194	<b>0.23</b>	0.296	<b>0.36</b>	0.12
1732.4	1412	Left	Touch	/	23.30	24.2	0.164	<b>0.20</b>	0.252	<b>0.31</b>	0.08
1712.4	1312	Left	Touch	/	23.23	24.2	0.120	<b>0.15</b>	0.178	<b>0.22</b>	-0.01
1732.4	1412	Left	Tilt	/	23.30	24.2	0.035	<b>0.04</b>	0.050	<b>0.06</b>	0.11
1732.4	1412	Right	Touch	/	23.30	24.2	0.146	<b>0.18</b>	0.206	<b>0.25</b>	0.09
1732.4	1412	Right	Tilt	/	23.30	24.2	0.026	<b>0.03</b>	0.034	<b>0.04</b>	0.04

**Table 14.1-9: SAR Values (WCDMA 1700 MHz Band - Body) – AP OFF**

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.9 °C		Liquid Temperature: 22.5 °C		
MHz	Ch.									
1732.4	1412	Front closed	/	23.30	24.2	0.150	<b>0.18</b>	0.245	<b>0.30</b>	0.09
1752.6	1513	Rear closed	/	23.41	24.2	0.625	<b>0.75</b>	1.04	<b>1.25</b>	-0.12
1732.4	1412	Rear closed	/	23.30	24.2	0.568	<b>0.70</b>	0.957	<b>1.18</b>	-0.12
1712.4	1312	Rear closed	/	23.23	24.2	0.426	<b>0.53</b>	0.714	<b>0.89</b>	-0.04
1752.6	1513	Rear open	Fig.9	23.41	24.2	0.734	<b>0.88</b>	1.17	<b>1.40</b>	0.02
1732.4	1412	Rear open	/	23.30	24.2	0.604	<b>0.74</b>	1.02	<b>1.25</b>	0.19
1712.4	1312	Rear open	/	23.23	24.2	0.499	<b>0.62</b>	0.840	<b>1.05</b>	-0.08

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.1-10: SAR Values (WCDMA 1700 MHz Band - Body) – AP ON**

		Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C					
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1732.4	1412	Front closed	/	20.25	20.5	0.102	<b>0.11</b>	0.158	<b>0.17</b>	0.02
1752.6	1513	Rear closed	Fig.10	20.44	20.5	0.663	<b>0.67</b>	1.14	<b>1.16</b>	-0.05
1732.4	1412	Rear closed	/	20.25	20.5	0.624	<b>0.66</b>	1.06	<b>1.12</b>	-0.06
1712.4	1312	Rear closed	/	20.31	20.5	0.538	<b>0.56</b>	0.935	<b>0.98</b>	-0.07
1732.4	1412	Left closed	/	20.25	20.5	0.152	<b>0.16</b>	0.247	<b>0.26</b>	0.10
1732.4	1412	Right closed	/	20.25	20.5	0.081	<b>0.09</b>	0.133	<b>0.14</b>	-0.15
1732.4	1412	Bottom closed	/	20.25	20.5	0.212	<b>0.22</b>	0.370	<b>0.39</b>	-0.02
1732.4	1412	Top closed	/	20.25	20.5	0.026	<b>0.03</b>	0.042	<b>0.04</b>	0.01
1752.6	1513	Rear open	/	20.44	20.5	0.611	<b>0.62</b>	0.997	<b>1.01</b>	-0.18
1732.4	1412	Rear open	/	20.25	20.5	0.567	<b>0.60</b>	0.935	<b>0.99</b>	0.04
1712.4	1312	Rear open	/	20.31	20.5	0.461	<b>0.48</b>	0.755	<b>0.79</b>	0.08
1732.4	1412	Left open		20.25	20.5	0.188	<b>0.20</b>	0.305	<b>0.32</b>	-0.18
1732.4	1412	Right open		20.25	20.5	0.108	<b>0.11</b>	0.166	<b>0.18</b>	-0.01
1732.4	1412	Bottom open		20.25	20.5	0.195	<b>0.21</b>	0.338	<b>0.36</b>	0.03

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.1-11: SAR Values (WCDMA 1900 MHz Band - Head)**

		Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C						
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1907.6	9538	Left	Touch	/	23.52	24.2	0.352	<b>0.41</b>	0.575	<b>0.67</b>	0.12
1880	9400	Left	Touch	Fig.11	23.72	24.2	0.375	<b>0.42</b>	0.603	<b>0.67</b>	-0.08
1852.4	9262	Left	Touch	/	23.84	24.2	0.311	<b>0.34</b>	0.544	<b>0.59</b>	-0.11
1880	9400	Left	Tilt	/	23.72	24.2	0.104	<b>0.12</b>	0.159	<b>0.18</b>	0.10
1880	9400	Right	Touch	/	23.72	24.2	0.215	<b>0.24</b>	0.393	<b>0.44</b>	0.09
1880	9400	Right	Tilt	/	23.72	24.2	0.070	<b>0.08</b>	0.108	<b>0.12</b>	0.06

**Table 14.1-12: SAR Values (WCDMA 1900 MHz Band - Body) – AP OFF**

		Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C						
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	9400	Front closed	/	23.72	24.2	0.103	<b>0.12</b>	0.166	<b>0.19</b>	0.11	
1880	9400	Rear closed	/	23.72	24.2	0.398	<b>0.44</b>	0.692	<b>0.77</b>	0.06	
1907.6	9538	Rear open	Fig.12	23.52	24.2	0.475	<b>0.56</b>	0.770	<b>0.90</b>	-0.13	
1880	9400	Rear open	/	23.72	24.2	0.426	<b>0.48</b>	0.740	<b>0.83</b>	-0.09	
1852.4	9262	Rear open	/	23.84	24.2	0.423	<b>0.46</b>	0.692	<b>0.75</b>	-0.09	

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.1-13: SAR Values (WCDMA 1900 MHz Band - Body) – AP ON**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	9400	Front closed	/	20.33	21.2	0.087	<b>0.11</b>	0.146	<b>0.18</b>	0.11
1907.6	9538	Rear closed	/	20.14	21.2	0.375	<b>0.48</b>	0.686	<b>0.88</b>	0.02
1880	9400	Rear closed	/	20.33	21.2	0.400	<b>0.49</b>	0.725	<b>0.89</b>	0.10
1852.4	9262	Rear closed	/	20.37	21.2	0.439	<b>0.53</b>	0.753	<b>0.91</b>	0.05
1880	9400	Left closed	/	20.33	21.2	0.136	<b>0.17</b>	0.239	<b>0.29</b>	0.11
1880	9400	Right closed	/	20.33	21.2	0.052	<b>0.06</b>	0.089	<b>0.11</b>	0.19
1880	9400	Bottom closed	/	20.33	21.2	0.095	<b>0.12</b>	0.173	<b>0.21</b>	0.06
1880	9400	Top closed	/	20.33	21.2	0.018	<b>0.02</b>	0.030	<b>0.04</b>	-0.17
1907.6	9538	Rear open	/	20.14	21.2	0.444	<b>0.57</b>	0.779	<b>0.99</b>	-0.06
1880	9400	Rear open	/	20.33	21.2	0.480	<b>0.59</b>	0.805	<b>0.98</b>	0.04
1852.4	9262	Rear open	Fig.13	20.37	21.2	0.501	<b>0.61</b>	0.829	<b>1.00</b>	-0.16
1880	9400	Left open	/	20.33	21.2	0.143	<b>0.17</b>	0.249	<b>0.30</b>	-0.05
1880	9400	Right open	/	20.33	21.2	0.075	<b>0.09</b>	0.126	<b>0.15</b>	0.04
1880	9400	Bottom open	/	20.33	21.2	0.116	<b>0.14</b>	0.206	<b>0.25</b>	-0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.1-14: SAR Values (CDMA BC0 - Head)**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
848.31	777	Left	Touch	/	23.88	24.7	0.445	<b>0.54</b>	0.648	<b>0.78</b>	0.04
836.52	384	Left	Touch	/	23.93	24.7	0.499	<b>0.60</b>	0.727	<b>0.87</b>	-0.02
824.7	1013	Left	Touch	/	24.33	24.7	0.426	<b>0.46</b>	0.621	<b>0.68</b>	0.03
836.52	384	Left	Tilt	/	23.93	24.7	0.254	<b>0.30</b>	0.398	<b>0.48</b>	-0.03
848.31	777	Right	Touch	/	23.88	24.7	0.564	<b>0.68</b>	0.900	<b>1.09</b>	-0.04
836.52	384	Right	Touch	Fig.14	23.93	24.7	0.649	<b>0.77</b>	1.01	<b>1.21</b>	0.04
824.7	1013	Right	Touch	/	24.33	24.7	0.545	<b>0.59</b>	0.863	<b>0.94</b>	-0.16
836.52	384	Right	Tilt	/	23.93	24.7	0.263	<b>0.31</b>	0.380	<b>0.45</b>	0.03

**Table 14.1-15: SAR Values (CDMA BC0 - Body) – AP OFF**

			Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.			(dBm)	(dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
836.52	384	Front closed	/	24.20	24.7	0.147	<b>0.16</b>	0.221	<b>0.25</b>	0.12
848.31	777	Rear closed	/	24.18	24.7	0.586	<b>0.66</b>	0.890	<b>1.00</b>	-0.01
836.52	384	Rear closed	/	24.20	24.7	0.571	<b>0.64</b>	0.844	<b>0.95</b>	0.19
824.7	1013	Rear closed	Fig.15	24.34	24.7	0.725	<b>0.79</b>	0.989	<b>1.07</b>	0.04
836.52	384	Rear open	/	24.20	24.7	0.297	<b>0.33</b>	0.512	<b>0.57</b>	0.09

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.1-16: SAR Values (CDMA BC0 - Body) – AP ON**

			Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.			(dBm)	(dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
836.52	384	Front closed	/	23.21	23.8	0.142	<b>0.16</b>	0.208	<b>0.24</b>	-0.02
848.31	777	Rear closed	/	23.10	23.8	0.374	<b>0.44</b>	0.728	<b>0.86</b>	0.19
836.52	384	Rear closed	Fig.16	23.21	23.8	0.593	<b>0.68</b>	0.826	<b>0.95</b>	0.05
824.7	1013	Rear closed	/	23.40	23.8	0.398	<b>0.44</b>	0.612	<b>0.67</b>	-0.02
836.52	384	Left closed	/	23.21	23.8	0.135	<b>0.15</b>	0.206	<b>0.24</b>	0.15
836.52	384	Right closed	/	23.21	23.8	0.320	<b>0.37</b>	0.508	<b>0.58</b>	0.01
836.52	384	Bottom closed	/	23.21	23.8	0.033	<b>0.04</b>	0.054	<b>0.06</b>	0.19
836.52	384	Top closed	/	23.21	23.8	0.037	<b>0.04</b>	0.065	<b>0.07</b>	0.09
836.52	384	Rear open	/	23.21	23.8	0.378	<b>0.43</b>	0.677	<b>0.78</b>	-0.02
836.52	384	Left open	/	23.21	23.8	0.108	<b>0.12</b>	0.161	<b>0.18</b>	0.01
836.52	384	Right open	/	23.21	23.8	0.253	<b>0.29</b>	0.381	<b>0.44</b>	-0.12
836.52	384	Bottom open	/	23.21	23.8	0.060	<b>0.07</b>	0.103	<b>0.12</b>	-0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.1-17: SAR Values (CDMA BC1 - Head)**

			Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.				(dBm)	(dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
1908.75	1175	Left	Touch	Fig.17	24.30	24.5	0.296	<b>0.31</b>	0.566	<b>0.59</b>	-0.01
1880	600	Left	Touch	/	24.14	24.5	0.275	<b>0.30</b>	0.508	<b>0.55</b>	0.06
1851.25	25	Left	Touch	/	24.08	24.5	0.269	<b>0.30</b>	0.480	<b>0.53</b>	0.17
1880	600	Left	Tilt	/	24.14	24.5	0.066	<b>0.07</b>	0.109	<b>0.12</b>	-0.02
1880	600	Right	Touch	/	24.14	24.5	0.140	<b>0.15</b>	0.281	<b>0.31</b>	0.12
1880	600	Right	Tilt	/	24.14	24.5	0.048	<b>0.05</b>	0.083	<b>0.09</b>	0.03

**Table 14.1-18: SAR Values (CDMA BC1 - Body) – AP OFF**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	600	Front closed	/	24.12	24.5	0.151	<b>0.17</b>	0.247	<b>0.27</b>	0.09
1908.75	1175	Rear closed	/	24.25	24.5	0.595	<b>0.63</b>	1.03	<b>1.09</b>	-0.05
1880	600	Rear closed	/	24.12	24.5	0.624	<b>0.68</b>	1.08	<b>1.18</b>	-0.16
1851.25	25	Rear closed	/	23.98	24.5	0.567	<b>0.64</b>	0.973	<b>1.10</b>	-0.10
1880	600	Rear open	Fig.18	24.25	24.5	0.666	<b>0.71</b>	1.12	<b>1.19</b>	0.08
1880	600	Rear open	/	24.12	24.5	0.626	<b>0.68</b>	1.09	<b>1.19</b>	-0.10
1880	600	Rear open	/	23.98	24.5	0.544	<b>0.61</b>	0.914	<b>1.03</b>	-0.02

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.1-19: SAR Values (CDMA BC1 - Body) – AP ON**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	600	Front closed	/	19.98	20.4	0.132	<b>0.15</b>	0.199	<b>0.22</b>	0.01
1908.75	1175	Rear closed	/	20.24	20.4	0.580	<b>0.60</b>	0.988	<b>1.03</b>	-0.05
1880	600	Rear closed	Fig.19	19.98	20.4	0.640	<b>0.70</b>	1.09	<b>1.20</b>	-0.02
1851.25	25	Rear closed	/	20.06	20.4	0.583	<b>0.63</b>	1.01	<b>1.09</b>	-0.19
1880	600	Left closed	/	19.98	20.4	0.187	<b>0.21</b>	0.285	<b>0.31</b>	0.11
1880	600	Right closed	/	19.98	20.4	0.082	<b>0.09</b>	0.123	<b>0.14</b>	0.08
1880	600	Bottom closed	/	19.98	20.4	0.221	<b>0.24</b>	0.364	<b>0.40</b>	-0.12
1880	600	Top closed	/	19.98	20.4	0.047	<b>0.05</b>	0.071	<b>0.08</b>	0.06
1908.75	1175	Rear open	/	20.24	20.4	0.550	<b>0.57</b>	0.907	<b>0.94</b>	0.03
1880	600	Rear open	/	19.98	20.4	0.639	<b>0.70</b>	0.998	<b>1.10</b>	-0.10
1851.25	25	Rear open	/	20.06	20.4	0.637	<b>0.69</b>	0.942	<b>1.02</b>	0.08
1880	600	Left open	/	19.98	20.4	0.213	<b>0.23</b>	0.329	<b>0.36</b>	-0.14
1880	600	Right open	/	19.98	20.4	0.128	<b>0.14</b>	0.189	<b>0.21</b>	0.11
1880	600	Bottom open	/	19.98	20.4	0.258	<b>0.28</b>	0.437	<b>0.48</b>	-0.11

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.1-20: SAR Values (CDMA BC10 - Head)**

Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C								
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
820.5	580	Left	Touch	/	24.72	25	0.503	<b>0.54</b>	0.733	<b>0.78</b>	0.03
820.5	580	Left	Tilt	/	24.72	25	0.249	<b>0.27</b>	0.358	<b>0.38</b>	0.09
823.1	684	Right	Touch	/	24.63	25	0.596	<b>0.65</b>	0.954	<b>1.04</b>	-0.03
820.5	580	Right	Touch	Fig.20	24.72	25	0.638	<b>0.68</b>	0.993	<b>1.06</b>	0.06
817.9	476	Right	Touch	/	24.65	25	0.600	<b>0.65</b>	0.968	<b>1.05</b>	-0.02
820.5	580	Right	Tilt	/	24.72	25	0.251	<b>0.27</b>	0.362	<b>0.39</b>	-0.04

**Table 14.1-21: SAR Values (CDMA BC10 - Body) – AP OFF**

Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C								
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.										
820.5	580	Front closed	/	24.60	25	0.235	<b>0.26</b>	0.337	<b>0.37</b>	0.09	
823.1	684	Rear closed	/	24.37	25	0.710	<b>0.82</b>	1.04	<b>1.20</b>	-0.02	
820.5	580	Rear closed	/	24.60	25	0.728	<b>0.80</b>	1.06	<b>1.16</b>	-0.01	
817.9	476	Rear closed	Fig.21	24.54	25	0.805	<b>0.89</b>	1.10	<b>1.22</b>	-0.12	
820.5	580	Rear open	/	24.60	25	0.309	<b>0.34</b>	0.461	<b>0.51</b>	0.04	

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.1-22: SAR Values (CDMA BC10 - Body) – AP ON**

Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C								
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.										
820.5	580	Front closed	/	22.26	22.5	0.131	<b>0.14</b>	0.188	<b>0.20</b>	-0.11	
823.1	684	Rear closed	/	22.09	22.5	0.237	<b>0.26</b>	0.413	<b>0.45</b>	0.10	
820.5	580	Rear closed	Fig.22	22.26	22.5	0.513	<b>0.54</b>	0.702	<b>0.74</b>	0.08	
817.9	476	Rear closed	/	22.24	22.5	0.222	<b>0.24</b>	0.385	<b>0.41</b>	0.04	
820.5	580	Left closed	/	22.26	22.5	0.139	<b>0.15</b>	0.215	<b>0.23</b>	0.12	
820.5	580	Right closed	/	22.26	22.5	0.272	<b>0.29</b>	0.432	<b>0.46</b>	-0.01	
820.5	580	Bottom closed	/	22.26	22.5	0.031	<b>0.03</b>	0.049	<b>0.05</b>	0.11	
820.5	580	Top closed	/	22.26	22.5	0.015	<b>0.02</b>	0.024	<b>0.03</b>	0.12	
820.5	580	Rear open	/	22.26	22.5	0.228	<b>0.24</b>	0.407	<b>0.43</b>	0.02	
820.5	580	Left open	/	22.26	22.5	0.078	<b>0.08</b>	0.118	<b>0.12</b>	-0.01	
820.5	580	Right open	/	22.26	22.5	0.182	<b>0.19</b>	0.279	<b>0.29</b>	0.01	
820.5	580	Bottom open	/	22.26	22.5	0.035	<b>0.04</b>	0.057	<b>0.06</b>	-0.08	

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.1-23: SAR Values (LTE Band25 - Head)**

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
1905	26590	1RB_Low	Left	Touch	Fig.23	23.97	24.2	0.273	<b>0.29</b>	0.458	<b>0.48</b>	0.08
1905	26590	1RB_Low	Left	Tilt	/	23.97	24.2	0.064	<b>0.07</b>	0.097	<b>0.10</b>	0.11
1905	26590	1RB_Low	Right	Touch	/	23.97	24.2	0.156	<b>0.16</b>	0.280	<b>0.29</b>	-0.02
1905	26590	1RB_Low	Right	Tilt	/	23.97	24.2	0.045	<b>0.05</b>	0.070	<b>0.07</b>	0.16
1882.5	26365	50RB_Low	Left	Touch	/	22.70	23.2	0.201	<b>0.22</b>	0.324	<b>0.36</b>	0.09
1882.5	26365	50RB_Low	Left	Tilt	/	22.70	23.2	0.046	<b>0.05</b>	0.068	<b>0.08</b>	0.01
1882.5	26365	50RB_Low	Right	Touch	/	22.70	23.2	0.149	<b>0.17</b>	0.258	<b>0.29</b>	0.04
1882.5	26365	50RB_Low	Right	Tilt	/	22.70	23.2	0.045	<b>0.05</b>	0.069	<b>0.08</b>	0.14

Note1: The LTE mode is QPSK\_20MHz.

**Table 14.1-24: SAR Values (LTE Band25 - Body) – AP OFF**

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.											
1905	26590	1RB_Low	Front closed	/	23.97	24.2	0.091	<b>0.10</b>	0.149	<b>0.16</b>	0.13	
1905	26590	1RB_Low	Rear closed	/	23.97	24.2	0.414	<b>0.44</b>	0.698	<b>0.74</b>	-0.01	
1905	26590	1RB_Low	Rear open	/	23.97	24.2	0.487	<b>0.51</b>	0.806	<b>0.85</b>	-0.18	
1882.5	26365	1RB_Low	Rear open	Fig.24	23.93	24.2	0.506	<b>0.54</b>	0.832	<b>0.89</b>	-0.08	
1860	26140	1RB_Low	Rear open	/	23.89	24.2	0.504	<b>0.54</b>	0.809	<b>0.87</b>	-0.09	
1882.5	26365	50RB_Low	Front closed	/	22.70	23.2	0.087	<b>0.10</b>	0.144	<b>0.16</b>	-0.06	
1882.5	26365	50RB_Low	Rear closed	/	22.70	23.2	0.347	<b>0.39</b>	0.599	<b>0.67</b>	-0.07	
1882.5	26365	50RB_Low	Rear open	/	22.70	23.2	0.402	<b>0.45</b>	0.689	<b>0.77</b>	-0.05	
1860	26140	100RB	Rear open	/	22.61	23.2	0.376	<b>0.43</b>	0.606	<b>0.69</b>	0.03	

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK\_20MHz.

**Table 14.1-25: SAR Values (LTE Band25 - Body) – AP ON**

Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5 °C											
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1860	26140	1RB_High	Front closed	/	19.99	21.2	0.098	<b>0.13</b>	0.163	<b>0.22</b>	0.01
1905	26590	1RB_Low	Rear closed	Fig.25	19.83	21.2	0.460	<b>0.63</b>	0.807	<b>1.11</b>	-0.02
1882.5	26365	1RB_Low	Rear closed	/	19.82	21.2	0.442	<b>0.61</b>	0.804	<b>1.10</b>	0.15
1860	26140	1RB_High	Rear closed	/	19.99	21.2	0.453	<b>0.60</b>	0.788	<b>1.04</b>	0.01
1860	26140	1RB_High	Left closed	/	19.99	21.2	0.123	<b>0.16</b>	0.209	<b>0.28</b>	0.19
1860	26140	1RB_High	Right closed	/	19.99	21.2	0.062	<b>0.08</b>	0.106	<b>0.14</b>	0.09
1860	26140	1RB_High	Bottom closed	/	19.99	21.2	0.174	<b>0.23</b>	0.322	<b>0.43</b>	-0.02
1860	26140	1RB_High	Top closed	/	19.99	21.2	0.028	<b>0.04</b>	0.046	<b>0.06</b>	0.01
1905	26590	1RB_Low	Rear open	/	19.83	21.2	0.442	<b>0.61</b>	0.779	<b>1.07</b>	-0.03
1882.5	26365	1RB_Low	Rear open	/	19.82	21.2	0.797	<b>1.10</b>	0.797	<b>1.10</b>	0.02
1860	26140	1RB_High	Rear open	/	19.99	21.2	0.424	<b>0.56</b>	0.770	<b>1.02</b>	0.04
1860	26140	1RB_High	Left open	/	19.99	21.2	0.137	<b>0.18</b>	0.234	<b>0.31</b>	0.14
1860	26140	1RB_High	Right open	/	19.99	21.2	0.098	<b>0.13</b>	0.160	<b>0.21</b>	-0.13
1860	26140	1RB_High	Bottom open	/	19.99	21.2	0.151	<b>0.20</b>	0.268	<b>0.35</b>	-0.04
1882.5	26365	50RB_Low	Front closed	/	19.89	21.2	0.093	<b>0.13</b>	0.156	<b>0.21</b>	-0.01
1905	26590	50RB_Low	Rear closed	/	19.85	21.2	0.396	<b>0.54</b>	0.724	<b>0.99</b>	0.01
1882.5	26365	50RB_Low	Rear closed	/	19.89	21.2	0.422	<b>0.57</b>	0.788	<b>1.06</b>	0.10
1860	26140	50RB_Low	Rear closed	/	19.86	21.2	0.432	<b>0.59</b>	0.781	<b>1.06</b>	-0.05
1882.5	26365	50RB_Low	Left closed	/	19.89	21.2	0.125	<b>0.17</b>	0.213	<b>0.29</b>	-0.01
1882.5	26365	50RB_Low	Right closed	/	19.89	21.2	0.062	<b>0.08</b>	0.106	<b>0.14</b>	-0.01
1882.5	26365	50RB_Low	Bottom closed	/	19.89	21.2	0.177	<b>0.24</b>	0.327	<b>0.44</b>	0.02
1882.5	26365	50RB_Low	Top closed	/	19.89	21.2	0.029	<b>0.04</b>	0.047	<b>0.06</b>	-0.01
1905	26590	50RB_Low	Rear open	/	19.85	21.2	0.438	<b>0.60</b>	0.774	<b>1.06</b>	-0.13
1882.5	26365	50RB_Low	Rear open	/	19.89	21.2	0.418	<b>0.57</b>	0.766	<b>1.04</b>	-0.12
1860	26140	50RB_Low	Rear open	/	19.86	21.2	0.450	<b>0.61</b>	0.776	<b>1.06</b>	0.09
1882.5	26365	50RB_Low	Left open	/	19.89	21.2	0.123	<b>0.17</b>	0.228	<b>0.31</b>	0.02
1882.5	26365	50RB_Low	Right open	/	19.89	21.2	0.089	<b>0.12</b>	0.147	<b>0.20</b>	-0.04
1882.5	26365	50RB_Low	Bottom open	/	19.89	21.2	0.149	<b>0.20</b>	0.266	<b>0.36</b>	0.08
1860	26140	100RB	Rear closed	/	19.86	21.2	0.429	<b>0.58</b>	0.778	<b>1.06</b>	0.11
1860	26140	100RB	Rear open	/	19.86	21.2	0.450	<b>0.61</b>	0.779	<b>1.06</b>	0.14

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK\_20MHz.

**Table 14.1-26: SAR Values (LTE Band26 - Head)**

Ambient Temperature: 22.9 °C      Liquid Temperature: 22.5°C

Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
822.5	26775	1RB_Low	Left	Touch	/	23.71	24.2	0.220	<b>0.25</b>	0.320	<b>0.36</b>	0.03
822.5	26775	1RB_Low	Left	Tilt	/	23.71	24.2	0.139	<b>0.16</b>	0.196	<b>0.22</b>	0.01
822.5	26775	1RB_Low	Right	Touch	Fig.26	23.71	24.2	0.315	<b>0.35</b>	0.483	<b>0.54</b>	0.07
822.5	26775	1RB_Low	Right	Tilt	/	23.71	24.2	0.153	<b>0.17</b>	0.217	<b>0.24</b>	-0.04
822.5	26775	36RB_Low	Left	Touch	/	22.59	23.2	0.186	<b>0.21</b>	0.271	<b>0.31</b>	-0.01
822.5	26775	36RB_Low	Left	Tilt	/	22.59	23.2	0.118	<b>0.14</b>	0.166	<b>0.19</b>	-0.02
822.5	26775	36RB_Low	Right	Touch	/	22.59	23.2	0.248	<b>0.29</b>	0.386	<b>0.44</b>	0.04
822.5	26775	36RB_Low	Right	Tilt	/	22.59	23.2	0.128	<b>0.15</b>	0.182	<b>0.21</b>	0.01

Note1: The LTE mode is QPSK\_15MHz.

**Table 14.1-27: SAR Values (LTE Band26 - Body) – AP OFF**

Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
822.5	26775	1RB_Low	Front closed	/	23.71	24.2	0.135	<b>0.15</b>	0.190	<b>0.21</b>	-0.17
822.5	26775	1RB_Low	Rear closed	Fig.27	23.71	24.2	0.466	<b>0.52</b>	0.633	<b>0.71</b>	0.16
822.5	26775	1RB_Low	Rear open	/	23.71	24.2	0.172	<b>0.19</b>	0.255	<b>0.29</b>	0.03
822.5	26775	36RB_Low	Front closed	/	22.59	23.2	0.100	<b>0.12</b>	0.142	<b>0.16</b>	0.13
822.5	26775	36RB_Low	Rear closed	/	22.59	23.2	0.317	<b>0.36</b>	0.468	<b>0.54</b>	-0.02
822.5	26775	36RB_Low	Rear open	/	22.59	23.2	0.133	<b>0.15</b>	0.198	<b>0.23</b>	0.00

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK\_15MHz.

**Table 14.1-28: SAR Values (LTE Band26 - Body) – AP ON**

Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
822.5	26775	1RB_Low	Front closed	/	21.45	22.7	0.136	<b>0.18</b>	0.192	<b>0.26</b>	0.11
841.5	26965	1RB_Low	Rear closed	/	21.36	22.7	0.484	<b>0.66</b>	0.679	<b>0.92</b>	-0.07
831.5	26865	1RB_Low	Rear closed	/	21.27	22.7	0.503	<b>0.70</b>	0.665	<b>0.92</b>	0.04
822.5	26775	1RB_Low	Rear closed	Fig.28	21.45	22.7	0.510	<b>0.68</b>	0.696	<b>0.93</b>	-0.03
822.5	26775	1RB_Low	Left closed	/	21.45	22.7	0.163	<b>0.22</b>	0.254	<b>0.34</b>	-0.16
822.5	26775	1RB_Low	Right closed	/	21.45	22.7	0.279	<b>0.37</b>	0.442	<b>0.59</b>	0.12

822.5	26775	1RB_Low	Bottom closed	/	21.45	22.7	0.035	<b>0.05</b>	0.057	<b>0.08</b>	0.02
822.5	26775	1RB_Low	Top closed	/	21.45	22.7	0.024	<b>0.03</b>	0.041	<b>0.05</b>	-0.01
822.5	26775	1RB_Low	Rear open	/	21.45	22.7	0.200	<b>0.27</b>	0.355	<b>0.47</b>	-0.11
822.5	26775	1RB_Low	Left open	/	21.45	22.7	0.071	<b>0.09</b>	0.105	<b>0.14</b>	-0.06
822.5	26775	1RB_Low	Right open	/	21.45	22.7	0.181	<b>0.24</b>	0.276	<b>0.37</b>	-0.07
822.5	26775	1RB_Low	Bottom open	/	21.45	22.7	0.033	<b>0.04</b>	0.055	<b>0.07</b>	0.09
841.5	26965	36RB_Mid	Front closed	/	21.32	22.7	0.122	<b>0.17</b>	0.172	<b>0.24</b>	0.01
841.5	26965	36RB_Mid	Rear closed	/	21.32	22.7	0.417	<b>0.57</b>	0.637	<b>0.88</b>	-0.08
831.5	26865	36RB_Low	Rear closed	/	21.16	22.7	0.450	<b>0.64</b>	0.613	<b>0.87</b>	0.02
822.5	26775	36RB_Low	Rear closed	/	21.29	22.7	0.496	<b>0.69</b>	0.668	<b>0.92</b>	-0.01
841.5	26965	36RB_Mid	Left closed	/	21.32	22.7	0.145	<b>0.20</b>	0.227	<b>0.31</b>	-0.11
841.5	26965	36RB_Mid	Right closed	/	21.32	22.7	0.262	<b>0.36</b>	0.415	<b>0.57</b>	-0.11
841.5	26965	36RB_Mid	Bottom closed	/	21.32	22.7	0.033	<b>0.05</b>	0.054	<b>0.07</b>	0.10
841.5	26965	36RB_Mid	Top closed	/	21.32	22.7	0.023	<b>0.03</b>	0.040	<b>0.05</b>	-0.09
841.5	26965	36RB_Mid	Rear open	/	21.32	22.7	0.198	<b>0.27</b>	0.351	<b>0.48</b>	-0.16
841.5	26965	36RB_Mid	Left open	/	21.32	22.7	0.075	<b>0.10</b>	0.111	<b>0.15</b>	0.09
841.5	26965	36RB_Mid	Right open	/	21.32	22.7	0.188	<b>0.26</b>	0.288	<b>0.40</b>	0.01
841.5	26965	36RB_Mid	Bottom open	/	21.32	22.7	0.034	<b>0.05</b>	0.057	<b>0.08</b>	-0.09
822.5	26775	72RB	Rear closed	/	21.25	22.7	0.487	<b>0.68</b>	0.661	<b>0.92</b>	-0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK\_15MHz.

**Table 14.1-29: SAR Values (LTE Band41 - Head)**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C								
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
2680	41490	1RB_Low	Left	Touch	Fig.29	24.00	24.2	0.120	<b>0.13</b>	0.228	<b>0.24</b>	-0.08
2680	41490	1RB_Low	Left	Tilt	/	24.00	24.2	0.039	<b>0.04</b>	0.085	<b>0.09</b>	0.04
2680	41490	1RB_Low	Right	Touch	/	24.00	24.2	0.043	<b>0.05</b>	0.080	<b>0.08</b>	0.12
2680	41490	1RB_Low	Right	Tilt	/	24.00	24.2	0.022	<b>0.02</b>	0.041	<b>0.04</b>	-0.01
2680	41490	50RB_Low	Left	Touch	/	22.71	23.2	0.093	<b>0.10</b>	0.181	<b>0.20</b>	0.11
2680	41490	50RB_Low	Left	Tilt	/	22.71	23.2	0.031	<b>0.04</b>	0.067	<b>0.07</b>	0.09
2680	41490	50RB_Low	Right	Touch	/	22.71	23.2	0.032	<b>0.04</b>	0.058	<b>0.07</b>	-0.16
2680	41490	50RB_Low	Right	Tilt	/	22.71	23.2	0.017	<b>0.02</b>	0.031	<b>0.03</b>	0.02

Note1: The LTE mode is QPSK\_20MHz.

**Table 14.1-30: SAR Values (LTE Band41 - Body)**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2680	41490	1RB_Low	Front closed	/	24.00	24.2	0.048	<b>0.05</b>	0.091	<b>0.10</b>	-0.16
2680	41490	1RB_Low	Rear closed	/	24.00	24.2	0.139	<b>0.15</b>	0.286	<b>0.30</b>	-0.03
2680	41490	1RB_Low	Left closed	/	24.00	24.2	0.205	<b>0.21</b>	0.413	<b>0.43</b>	-0.07
2680	41490	1RB_Low	Right closed	/	24.00	24.2	0.023	<b>0.02</b>	0.046	<b>0.05</b>	-0.03
2680	41490	1RB_Low	Bottom closed	/	24.00	24.2	0.101	<b>0.11</b>	0.217	<b>0.23</b>	0.11
2680	41490	1RB_Low	Top closed	/	24.00	24.2	0.050	<b>0.05</b>	0.093	<b>0.10</b>	0.03
2680	41490	1RB_Low	Rear open	Fig.30	24.00	24.2	0.250	<b>0.26</b>	0.520	<b>0.54</b>	-0.01
2680	41490	1RB_Low	Left open	/	24.00	24.2	0.220	<b>0.23</b>	0.449	<b>0.47</b>	-0.17
2680	41490	1RB_Low	Right open	/	24.00	24.2	0.049	<b>0.05</b>	0.099	<b>0.10</b>	0.13
2680	41490	1RB_Low	Bottom open	/	24.00	24.2	0.095	<b>0.10</b>	0.020	<b>0.02</b>	0.04
2680	41490	50RB_Low	Front closed	/	22.71	23.2	0.038	<b>0.04</b>	0.072	<b>0.08</b>	0.09
2680	41490	50RB_Low	Rear closed	/	22.71	23.2	0.099	<b>0.11</b>	0.194	<b>0.22</b>	-0.05
2680	41490	50RB_Low	Left closed	/	22.71	23.2	0.149	<b>0.17</b>	0.300	<b>0.34</b>	-0.07
2680	41490	50RB_Low	Right closed	/	22.71	23.2	0.018	<b>0.02</b>	0.038	<b>0.04</b>	0.05
2680	41490	50RB_Low	Bottom closed	/	22.71	23.2	0.078	<b>0.09</b>	0.166	<b>0.19</b>	-0.12
2680	41490	50RB_Low	Top closed	/	22.71	23.2	0.037	<b>0.04</b>	0.069	<b>0.08</b>	0.12
2680	41490	50RB_Low	Rear open	/	22.71	23.2	0.172	<b>0.19</b>	0.344	<b>0.38</b>	0.18
2680	41490	50RB_Low	Left open	/	22.71	23.2	0.157	<b>0.18</b>	0.321	<b>0.36</b>	0.12
2680	41490	50RB_Low	Right open	/	22.71	23.2	0.035	<b>0.04</b>	0.070	<b>0.08</b>	0.05
2680	41490	50RB_Low	Bottom open	/	22.71	23.2	0.074	<b>0.08</b>	0.149	<b>0.17</b>	-0.11

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK\_20MHz.

**Table 14.1-31: SAR Values (Bluetooth - Head)**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2441	39	Left	Touch	/	10.70	11	0.002	<0.01	0.007	<b>0.01</b>	0.09
2441	39	Left	Tilt	/	10.70	11	0.001	<0.01	0.001	<0.01	0.04
2480	78	Right	Touch	/	10.15	11	0.003	<0.01	0.008	<b>0.01</b>	0.04
2441	39	Right	Touch	Fig.31	10.70	11	0.008	<b>0.01</b>	0.015	<b>0.02</b>	-0.06
2402	0	Right	Touch	/	9.95	11	0.005	<b>0.01</b>	0.010	<b>0.01</b>	0.09
2441	39	Right	Tilt	/	10.70	11	0.000	<0.01	0.000	<0.01	-0.07

## 14.2 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

**Table 14.2-1: SAR Values (GSM 850 MHz Band - Head)**

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.6	190	Right	Touch	Fig.1	32.40	33.2	0.406	0.49	0.636	0.76	0.04

**Table 14.2-2: SAR Values (GSM 850 MHz Band - Body)**

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
824.2	128	GPRS (2)	Rear closed	Fig.2	30.66	31.2	0.610	0.69	0.840	0.95	-0.10

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.2-3: SAR Values (GSM 1900 MHz Band - Head)**

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	661	Left	Touch	Fig.3	28.61	29.7	0.101	0.13	0.169	0.22	-0.17

**Table 14.2-4: SAR Values (GSM 1900 MHz Band - Body)**

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	661	GPRS (2)	Rear open	Fig.4	26.88	27.7	0.566	0.68	0.972	1.17	-0.19

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.2-5: SAR Values (WCDMA 850 MHz Band - Head)**

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
846.6	4233	Right	Touch	Fig.5	23.27	24.2	0.486	0.60	0.769	0.95	0.19

**Table 14.2-6: SAR Values (WCDMA 850 MHz Band - Body) – AP OFF**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
826.4	4132	Rear closed	Fig.6	23.20	24.2	0.339	0.43	0.461	0.58	0.08

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.2-7: SAR Values (WCDMA 850 MHz Band - Body) – AP ON**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
826.4	4132	Rear closed	Fig.7	21.62	22.7	0.364	0.47	0.494	0.63	-0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.2-8: SAR Values (WCDMA 1700 MHz Band - Head)**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1752.6	1513	Left	Touch	Fig.8	23.41	24.2	0.194	0.23	0.296	0.36	0.12

**Table 14.2-9: SAR Values (WCDMA 1700 MHz Band - Body) – AP OFF**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1752.6	1513	Rear open	Fig.9	23.41	24.2	0.734	0.88	1.17	1.40	0.02

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.2-10: SAR Values (WCDMA 1700 MHz Band - Body) – AP ON**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1752.6	1513	Rear closed	Fig.10	20.44	20.5	0.663	0.67	1.14	1.16	-0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.2-11: SAR Values (WCDMA 1900 MHz Band - Head)**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	9400	Left	Touch	Fig.11	23.72	24.2	0.375	0.42	0.603	0.67	-0.08

**Table 14.2-12: SAR Values (WCDMA 1900 MHz Band - Body) – AP OFF**

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1907.6	9538	Rear open	Fig.12	23.52	24.2	0.475	<b>0.56</b>	0.770	<b>0.90</b>	-0.13

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.2-13: SAR Values (WCDMA 1900 MHz Band - Body) – AP ON**

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1852.4	9262	Rear open	Fig.13	20.37	21.2	0.501	<b>0.61</b>	0.829	<b>1.00</b>	-0.16

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.2-14: SAR Values (CDMA BC0 - Head)**

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.52	384	Right	Touch	Fig.14	23.93	24.7	0.649	<b>0.77</b>	1.01	<b>1.21</b>	0.04

**Table 14.2-15: SAR Values (CDMA BC0 - Body) – AP OFF**

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
824.7	1013	Rear closed	Fig.15	24.34	24.7	0.725	<b>0.79</b>	0.989	<b>1.07</b>	0.04

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.2-16: SAR Values (CDMA BC0 - Body) – AP ON**

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.52	384	Rear closed	Fig.16	23.21	23.8	0.593	<b>0.68</b>	0.826	<b>0.95</b>	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.2-17: SAR Values (CDMA BC1 - Head)**

			Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1908.75	1175	Left	Touch	Fig.17	24.30	24.5	0.296	0.31	0.566	0.59	-0.01

**Table 14.2-18: SAR Values (CDMA BC1 - Body) – AP OFF**

			Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	600	Rear open	Fig.18	24.25	24.5	0.666	0.71	1.12	1.19	0.08	

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.2-19: SAR Values (CDMA BC1 - Body) – AP ON**

			Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	600	Rear closed	Fig.19	19.98	20.4	0.640	0.70	1.09	1.20	0.02	

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.2-20: SAR Values (CDMA BC10 - Head)**

			Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
820.5	580	Right	Touch	Fig.20	24.72	25	0.638	0.68	0.993	1.06	0.06

**Table 14.2-21: SAR Values (CDMA BC10 - Body) – AP OFF**

			Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
817.9	476	Rear closed	Fig.21	24.54	25	0.805	0.89	1.10	1.22	-0.12	

Note1: The distance between the EUT and the phantom bottom is 15mm.

**Table 14.2-22: SAR Values (CDMA BC10 - Body) – AP ON**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
820.5	580	Rear closed	Fig.22	22.26	22.5	0.513	<b>0.54</b>	0.702	<b>0.74</b>	0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.2-23: SAR Values (LTE Band25 - Head)**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C								
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
1905	26590	1RB_Low	Left	Touch	Fig.23	23.97	24.2	0.273	<b>0.29</b>	0.458	<b>0.48</b>	0.08

Note1: The LTE mode is QPSK\_20MHz.

**Table 14.2-24: SAR Values (LTE Band25 - Body) – AP OFF**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1882.5	26365	1RB_Low	Rear open	Fig.24	23.93	24.2	0.506	<b>0.54</b>	0.832	<b>0.89</b>	-0.08

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK\_20MHz.

**Table 14.1-25: SAR Values (LTE Band25 - Body) – AP ON**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1905	26590	1RB_Low	Rear closed	Fig.25	19.83	21.2	0.460	<b>0.63</b>	0.807	<b>1.11</b>	-0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK\_20MHz.

**Table 14.2-26: SAR Values (LTE Band26 - Head)**

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C								
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
822.5	26775	1RB_Low	Right	Touch	Fig.26	23.71	24.2	0.315	<b>0.35</b>	0.483	<b>0.54</b>	0.07

Note1: The LTE mode is QPSK\_15MHz.

**Table 14.2-27: SAR Values (LTE Band26 - Body) – AP OFF**

Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Liquid Temperature: 22.5°C				
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
822.5	26775	1RB_Low	Rear closed	Fig.27	23.71	24.2	0.466	0.52	0.633	0.71	0.16

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK\_15MHz.

**Table 14.2-28: SAR Values (LTE Band26 - Body) – AP ON**

Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Liquid Temperature: 22.5°C				
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
822.5	26775	1RB_Low	Rear closed	Fig.28	21.45	22.7	0.510	0.68	0.696	0.93	-0.03

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK\_15MHz.

**Table 14.2-29: SAR Values (LTE Band41 - Head)**

Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Liquid Temperature: 22.5°C				
MHz	Ch.							Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
2680	41490	1RB_Low	Left	Touch	Fig.29	24.00	24.2	0.120	0.13	0.228	0.24	-0.08

Note1: The LTE mode is QPSK\_20MHz.

**Table 14.2-30: SAR Values (LTE Band41 - Body)**

Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Liquid Temperature: 22.5°C				
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
2680	41490	1RB_Low	Rear open	Fig.30	24.00	24.2	0.250	0.26	0.520	0.54	-0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK\_20MHz.

**Table 14.2-31: SAR Values (Bluetooth - Head)**

Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Liquid Temperature: 22.5°C				
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
2441	39	Right	Touch	Fig.31	10.70	11	0.008	0.01	0.015	0.02	-0.06

### 14.3 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.

#### Head Evaluation

**Table 14.3-1: SAR Values (WLAN - Head) – 802.11b 1Mbps (Fast SAR)**

Ambient Temperature: 23.0 °C				Liquid Temperature: 22.5°C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2437	6	Left	Touch	/	18.65	19	0.078	<b>0.08</b>	0.194	<b>0.21</b>	0.13
2437	6	Left	Tilt	/	18.65	19	0.014	<b>0.01</b>	0.026	<b>0.03</b>	-0.17
2437	6	Right	Touch	/	18.65	19	0.169	<b>0.18</b>	0.326	<b>0.35</b>	0.13
2437	6	Right	Tilt	/	18.65	19	0.019	<b>0.02</b>	0.036	<b>0.04</b>	0.09

As shown above table, the initial test position for head is “Right Touch”. So the head SAR of WLAN is presented as below:

**Table 14.3-2: SAR Values (WLAN - Head) – 802.11b 1Mbps (Full SAR)**

Ambient Temperature: 23.0 °C				Liquid Temperature: 22.5°C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2437	6	Right	Touch	Fig.32	18.65	19	0.174	<b>0.19</b>	0.311	<b>0.34</b>	0.13

Note1: When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg.

Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

**Table 14.3-3: SAR Values (WLAN - Head) – 802.11b 1Mbps (Scaled Reported SAR)**

Frequency		Side	Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)
MHz	Ch.						
2437	6	Right	Touch	97.72%	100%	<b>0.34</b>	<b>0.35</b>

SAR is not required for OFDM because the 802.11b adjusted SAR  $\leq 1.2$  W/kg.

**Body Evaluation**
**Table 14.3-4: SAR Values (WLAN - Body) – 802.11b 1Mbps (Fast SAR)**

Ambient Temperature: 23.0 °C				Liquid Temperature: 22.5 °C					
Frequency		Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
2437	6	Front closed 10mm	18.65	19	0.034	<b>0.04</b>	0.065	<b>0.07</b>	0.06
2437	6	Rear closed 10mm	18.65	19	0.055	<b>0.06</b>	0.102	<b>0.11</b>	-0.11
2437	6	Right closed 10mm	18.65	19	0.035	<b>0.04</b>	0.071	<b>0.08</b>	0.05
2437	6	Top closed 10mm	18.65	19	0.026	<b>0.03</b>	0.050	<b>0.05</b>	0.17
2437	6	Rear open 10mm	18.65	19	0.096	<b>0.10</b>	0.179	<b>0.19</b>	0.07
2437	6	Right open 10mm	18.65	19	0.066	<b>0.07</b>	0.130	<b>0.14</b>	0.07
2437	6	Front closed 15mm	18.65	19	0.021	<b>0.02</b>	0.038	<b>0.04</b>	0.06
2437	6	Rear closed 15mm	18.65	19	0.034	<b>0.04</b>	0.060	<b>0.07</b>	-0.11
2437	6	Rear open 15mm	18.65	19	0.060	<b>0.06</b>	0.104	<b>0.11</b>	0.10

As shown above table, the initial test position for body is “Rear open 10mm”. So the body SAR of WLAN is presented as below:

**Table 14.3-5: SAR Values (WLAN - Body) – 802.11b 1Mbps (Full SAR)**

Ambient Temperature: 23.0 °C				Liquid Temperature: 22.5 °C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
2437	6	Rear open 10mm	Fig.33	18.65	19	0.097	<b>0.10</b>	0.176	<b>0.19</b>	0.07

Note1: When the reported SAR of the initial test position is  $> 0.4 \text{ W/kg}$ , SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8 \text{ W/kg}$ .


Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8 \text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is  $\leq 1.2 \text{ W/kg}$  or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

**Table 14.3-6: SAR Values (WLAN - Body) – 802.11b 1Mbps (Scaled Reported SAR)**

Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)
MHz	Ch.					
2437	6	Rear open 10mm	97.72%	100%	<b>0.19</b>	<b>0.20</b>
2437	6	Rear open 15mm	97.72%	100%	<b>0.11</b>	<b>0.12</b>
2437	6	Rear closed 10mm	97.72%	100%	<b>0.11</b>	<b>0.12</b>

SAR is not required for OFDM because the 802.11b adjusted SAR  $\leq 1.2 \text{ W/kg}$ .

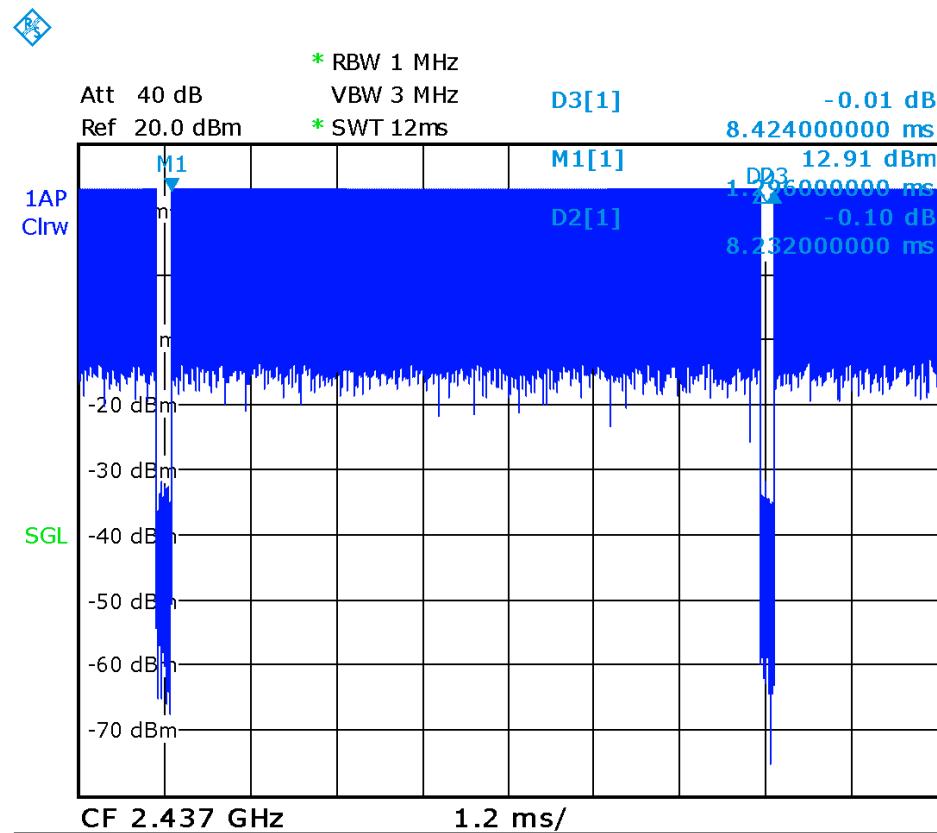

**Picture 14.1 The plot of duty factor for 802.11b**

## 15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

**Table 15.1: SAR Measurement Variability for Body GSM 850 (1g)**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
824.2	128	Rear closed	10	0.840	0.831	1.01	/

**Table 15.2: SAR Measurement Variability for Body GSM 1900 (1g)**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1880	661	Rear open	10	0.972	0.963	1.01	/

**Table 15.3: SAR Measurement Variability for Body WCDMA 1700 (1g) – AP OFF**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1742.6	1738	Rear open	15	1.17	1.16	1.01	/

**Table 15.4: SAR Measurement Variability for Body WCDMA 1700 (1g) – AP ON**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1742.6	1738	Rear closed	10	1.14	1.12	1.02	/

**Table 15.5: SAR Measurement Variability for Body WCDMA 1900 (1g) – AP ON**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1852.4	9662	Rear open	10	0.829	0.815	1.02	/

**Table 15.6: SAR Measurement Variability for Head CDMA BC0 (1g)**

Frequency		Side	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
836.5	384	Right	Touch	1.01	0.998	1.01	/

**Table 15.7: SAR Measurement Variability for Body CDMA BC0 (1g) – AP OFF**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
824.7	1013	Rear closed	15	0.989	0.976	1.01	/

**Table 15.8: SAR Measurement Variability for Body CDMA BC0 (1g) – AP ON**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
836.5	384	Rear closed	10	0.826	0.821	1.01	/

**Table 15.9: SAR Measurement Variability for Body CDMA BC1 (1g) – AP OFF**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1908.75	1175	Rear open	15	1.12	1.09	1.03	/

**Table 15.10: SAR Measurement Variability for Body CDMA BC1 (1g) – AP ON**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1880	600	Rear closed	10	1.09	1.08	1.01	/

**Table 15.11: SAR Measurement Variability for Head CDMA BC10 (1g)**

Frequency		Side	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
820.5	580	Right	Touch	0.993	0.987	1.01	/

**Table 15.12: SAR Measurement Variability for Body CDMA BC10 (1g) – AP OFF**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
817.9	476	Rear closed	15	1.10	1.09	1.01	/

**Table 15.13: SAR Measurement Variability for Body LTE Band 25 (1g) – AP OFF**

Frequency		Mode	Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.							
1882.5	26365	1RB_Low	Rear open	15	0.832	0.825	1.01	/

**Table 15.14: SAR Measurement Variability for Body LTE Band 25 (1g) – AP ON**

Frequency		Mode	Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.							
1905	26590	1RB_Low	Rear closed	10	0.807	0.798	1.01	/

## 16 Measurement Uncertainty

### 16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
<b>Measurement system</b>										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	$\infty$
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	$\infty$
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	$\infty$
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	$\infty$
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	$\infty$
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
<b>Test sample related</b>										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$
<b>Phantom and set-up</b>										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	$\infty$
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	$\infty$
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.25	9.12	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					18.5	18.2	

### 16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
-----	-------------------	------	-------------------	-----------------------	------	------------	-------------	----------------------	-----------------------	-------------------

#### Measurement system

1	Probe calibration	B	6.5	N	1	1	1	6.5	6.5	$\infty$
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	$\infty$
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	$\infty$
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	$\infty$
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	$\infty$
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$

#### Test sample related

14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$

#### Phantom and set-up

17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	$\infty$
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43

20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	$\infty$
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
	Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.8	10.7	257
	Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$						21.6	21.4	

### 16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedo m
<b>Measurement system</b>										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	$\infty$
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	$\infty$
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	$\infty$
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	$\infty$
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	$\infty$
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	$\infty$
<b>Test sample related</b>										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$

Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	$\infty$
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	$\infty$
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.1	9.95	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.2	19.9	

#### 16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
-----	-------------------	------	-------------------	-----------------------	------	---------	----------	----------------	-----------------	-------------------

#### Measurement system

1	Probe calibration	B	6.5	N	1	1	1	6.5	6.5	$\infty$
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	$\infty$
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	$\infty$
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	$\infty$
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	$\infty$
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	$\infty$

#### Test sample related

15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$
<b>Phantom and set-up</b>										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	$\infty$
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	$\infty$
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.3	13.2	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						26.6	26.4	

## 17 MAIN TEST INSTRUMENTS

**Table 17.1: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 26, 2016	One year
02	Power meter	NRVD	102196	March 03, 2016	One year
03	Power sensor	NRV-Z5	100596		
04	Signal Generator	E4438C	MY49071430	February 01, 2016	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
06	BTS	E5515C	MY50263375	January 30, 2016	One year
07	BTS	CMW500	129942	March 03, 2016	One year
08	E-field Probe	SPEAG EX3DV4	7307	February 19, 2016	One year
09	DAE	SPEAG DAE4	1331	January 21, 2016	One year
10	Dipole Validation Kit	SPEAG D835V2	4d069	July 20, 2016	One year
11	Dipole Validation Kit	SPEAG D1750V2	1003	July 21, 2016	One year
12	Dipole Validation Kit	SPEAG D1900V2	5d101	July 28, 2016	One year
13	Dipole Validation Kit	SPEAG D2450V2	853	July 25, 2016	One year
14	Dipole Validation Kit	SPEAG D2600V2	1012	July 25, 2016	One year

\*\*\*END OF REPORT BODY\*\*\*

## ANNEX A Graph Results

### 850 Right Cheek Middle

Date: 2016-11-16

Electronics: DAE4 Sn1331

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.925$  mho/m;  $\epsilon_r = 41.009$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN7307 ConvF(10.01, 10.01, 10.01)

**Area Scan (61x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.777 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.908 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.406 W/kg**

Maximum value of SAR (measured) = 0.774 W/kg


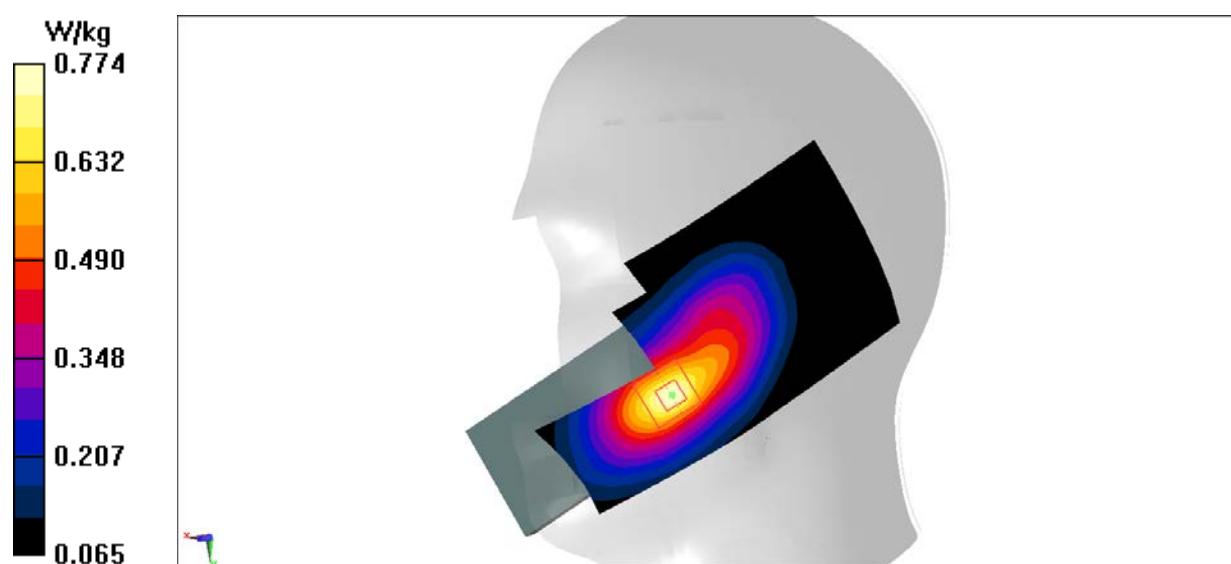


Fig.1 850MHz

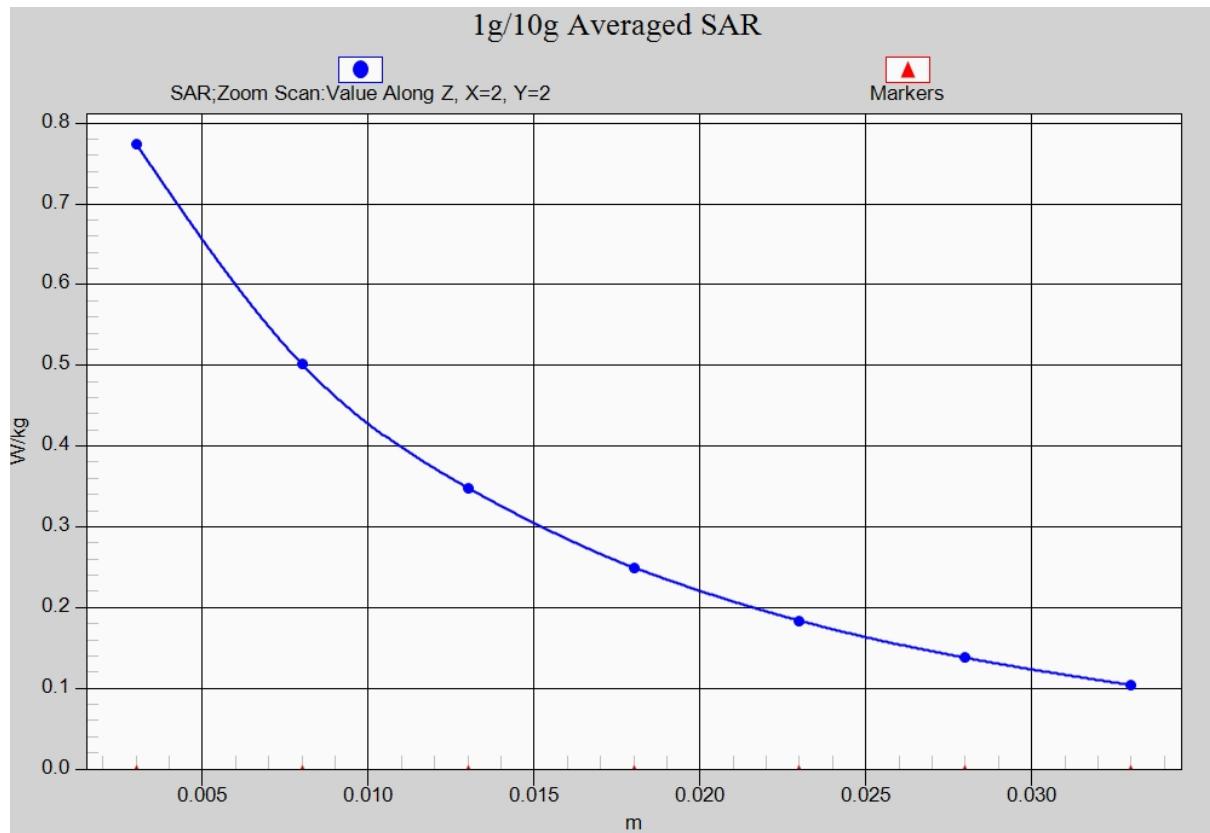

**Fig. 1-1 Z-Scan at power reference point (850 MHz)**

## 850 Body Rear closed Low

Date: 2016-11-16

Electronics: DAE4 Sn1331

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 825$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 56.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:4

Probe: EX3DV4 - SN7307 ConvF(9.83, 9.83, 9.83)

**Area Scan (121x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.927 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.12 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.840 W/kg; SAR(10 g) = 0.610 W/kg**

Maximum value of SAR (measured) = 0.923 W/kg


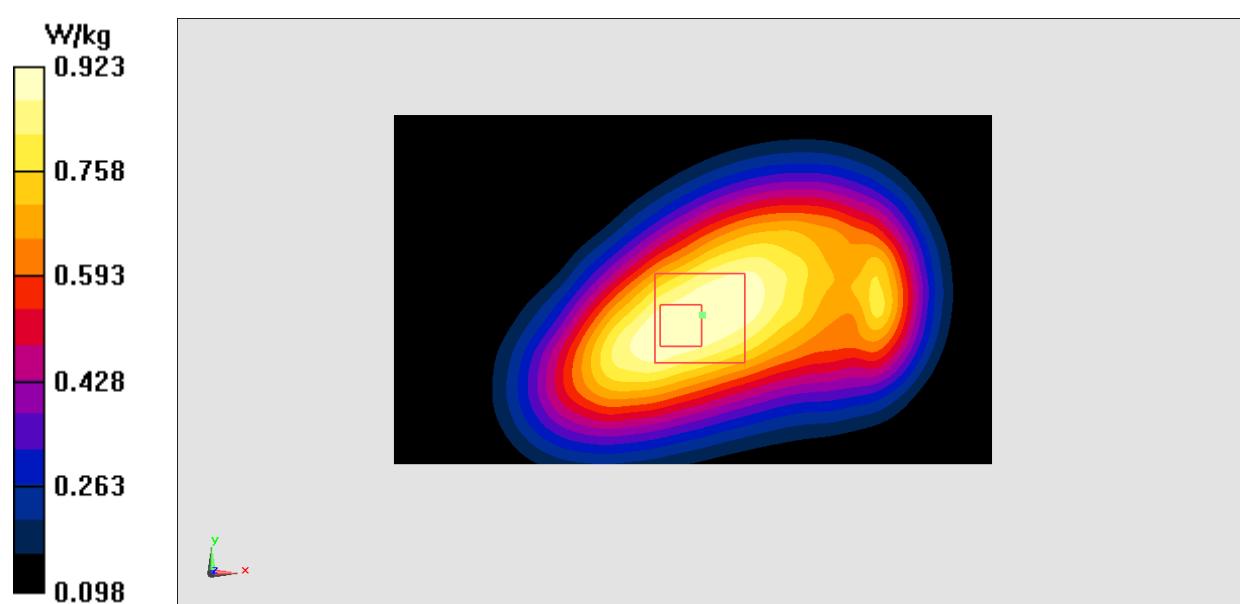


Fig.2 850 MHz

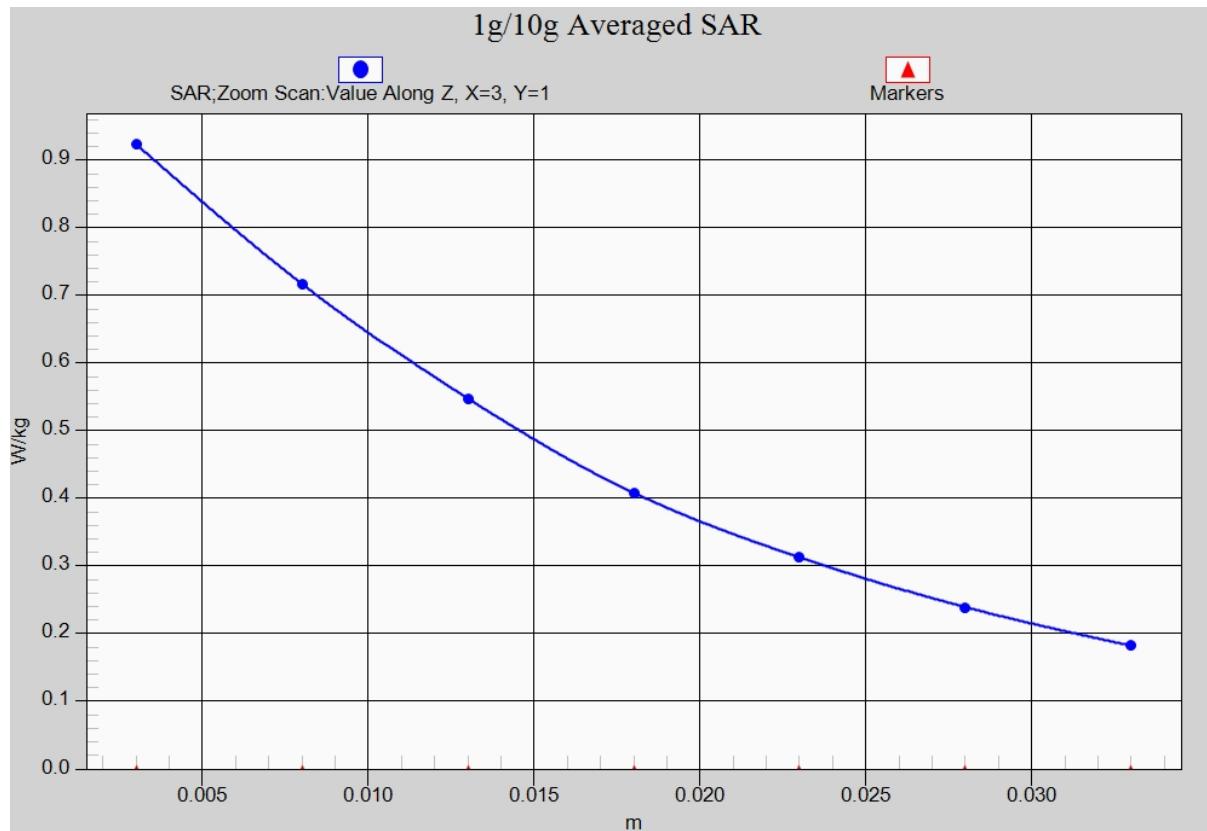

**Fig. 2-1 Z-Scan at power reference point (850 MHz)**

## 1900 Left Cheek Middle

Date: 2016-11-18

Electronics: DAE4 Sn1331

Medium: Head 1900 MHz

Medium parameters use:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.395 \text{ mho/m}$ ;  $\epsilon_r = 41.235$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.9^\circ\text{C}$  Liquid Temperature:  $22.5^\circ\text{C}$

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN7307 ConvF(8.10, 8.10, 8.10)

**Area Scan (61x151x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.202 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.451 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.253 W/kg

**SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.101 W/kg**

Maximum value of SAR (measured) = 0.198 W/kg

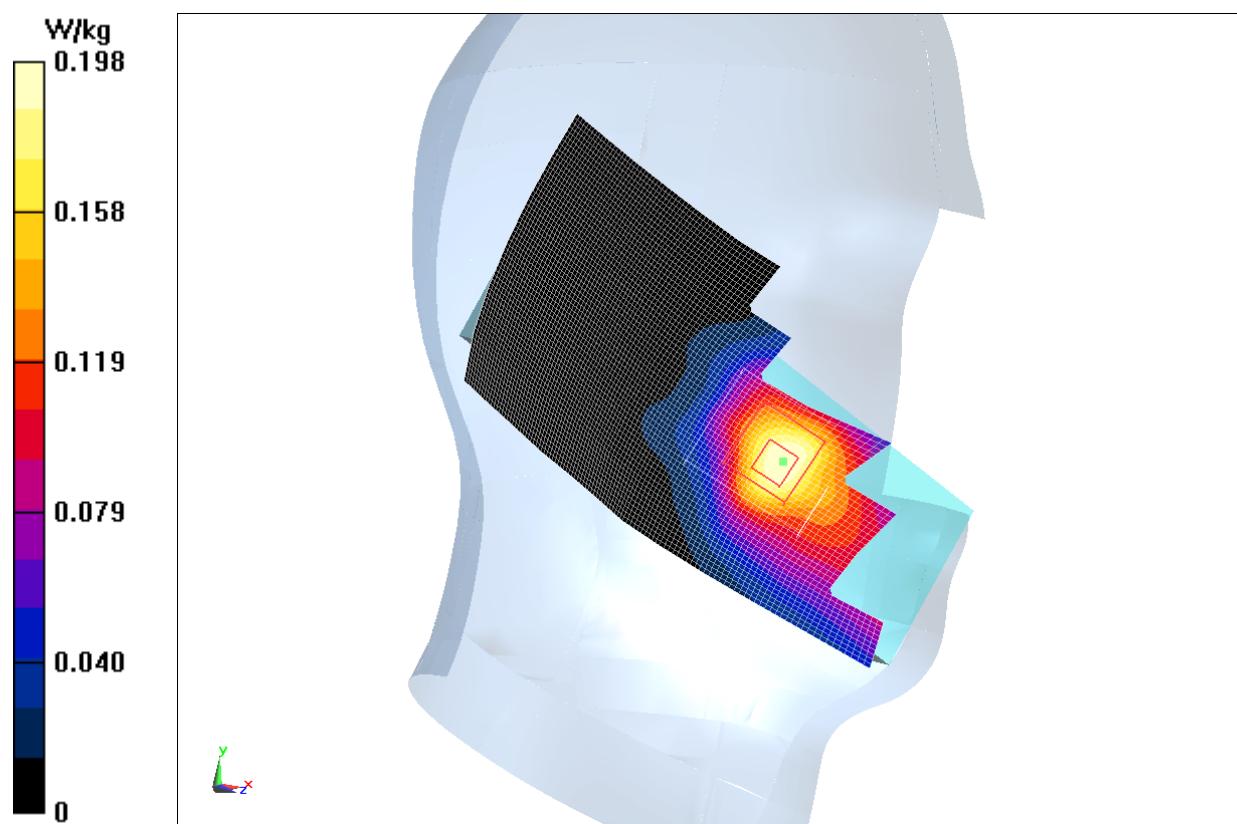

**Fig.3 1900 MHz**

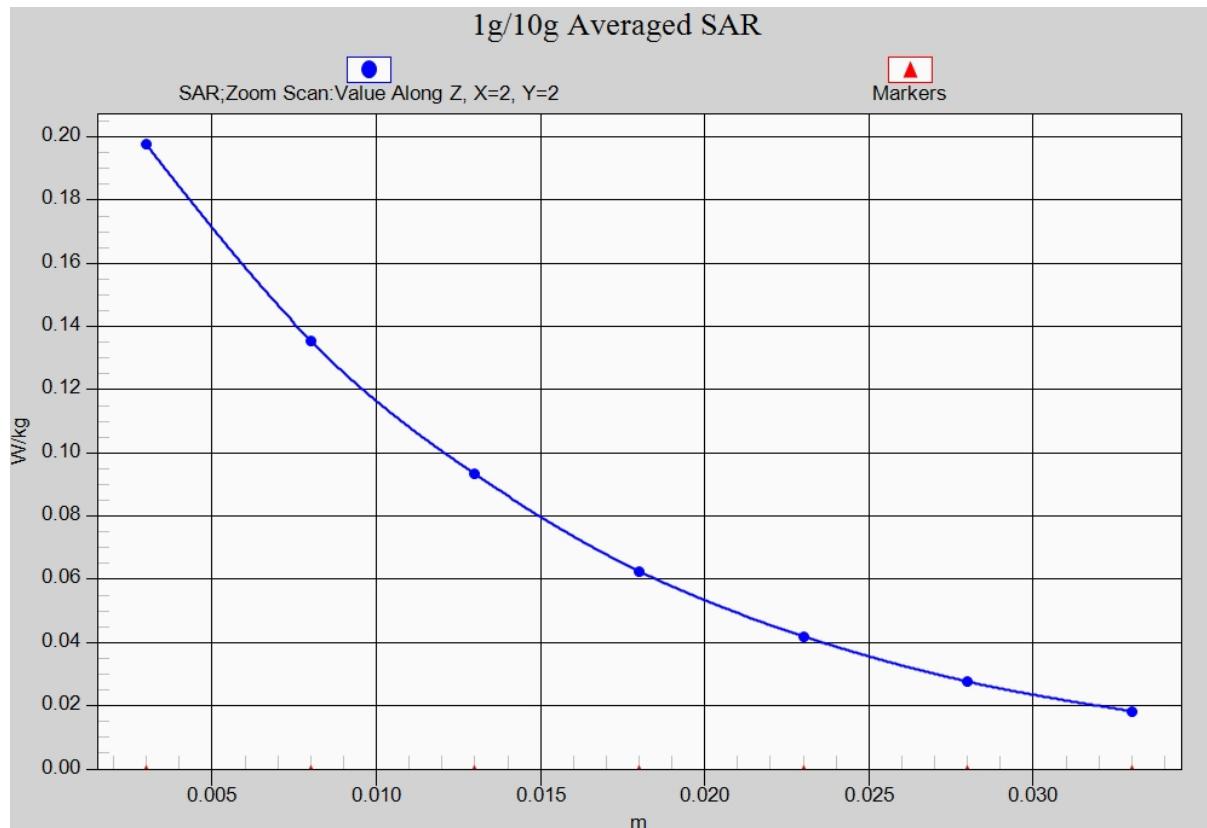


Fig. 3-1 Z-Scan at power reference point (1900 MHz)

## 1900 Body Rear open Middle

Date: 2016-11-18

Electronics: DAE4 Sn1331

Medium: Body 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.485$  mho/m;  $\epsilon_r = 54.471$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: EX3DV4 - SN7307 ConvF(7.67, 7.67, 7.67)

**Area Scan (91x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.21 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.37 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.972 W/kg; SAR(10 g) = 0.566 W/kg**

Maximum value of SAR (measured) = 1.15 W/kg

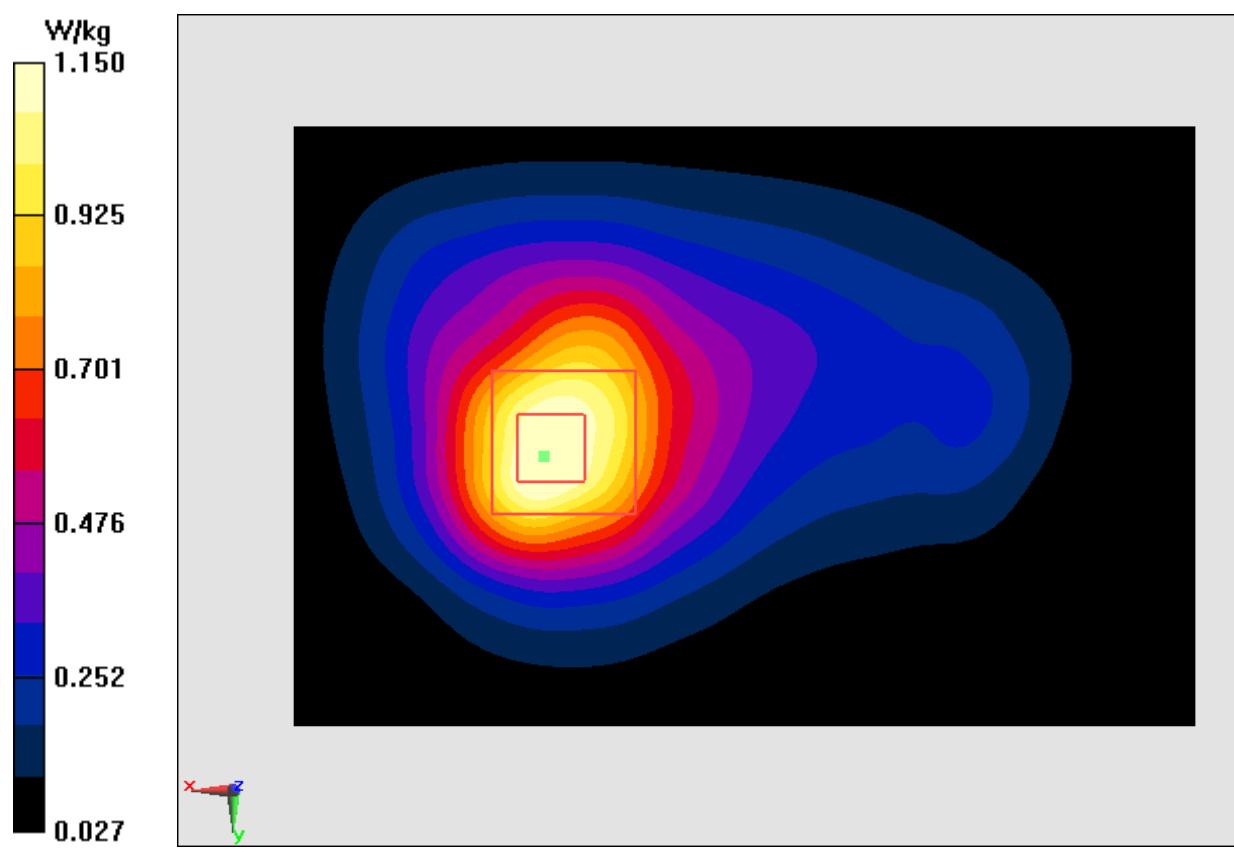

**Fig.4 1900 MHz**

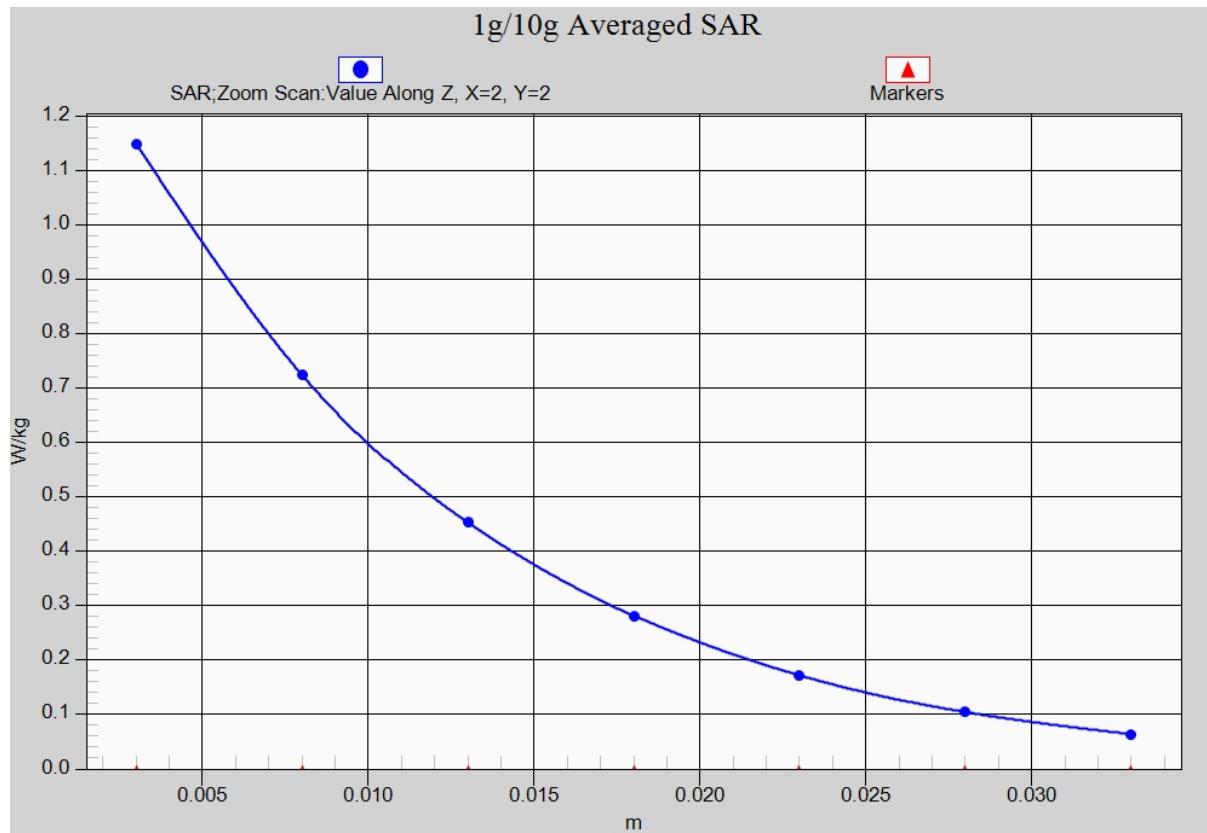


Fig.4-1 Z-Scan at power reference point (1900 MHz)

## WCDMA 850 Right Cheek High

Date: 2016-11-16

Electronics: DAE4 Sn1331

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.936$  mho/m;  $\epsilon_r = 40.848$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C      Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7307 ConvF(10.01, 10.01, 10.01)

**Area Scan (61x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.940 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.570 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.486 W/kg**

Maximum value of SAR (measured) = 0.914 W/kg

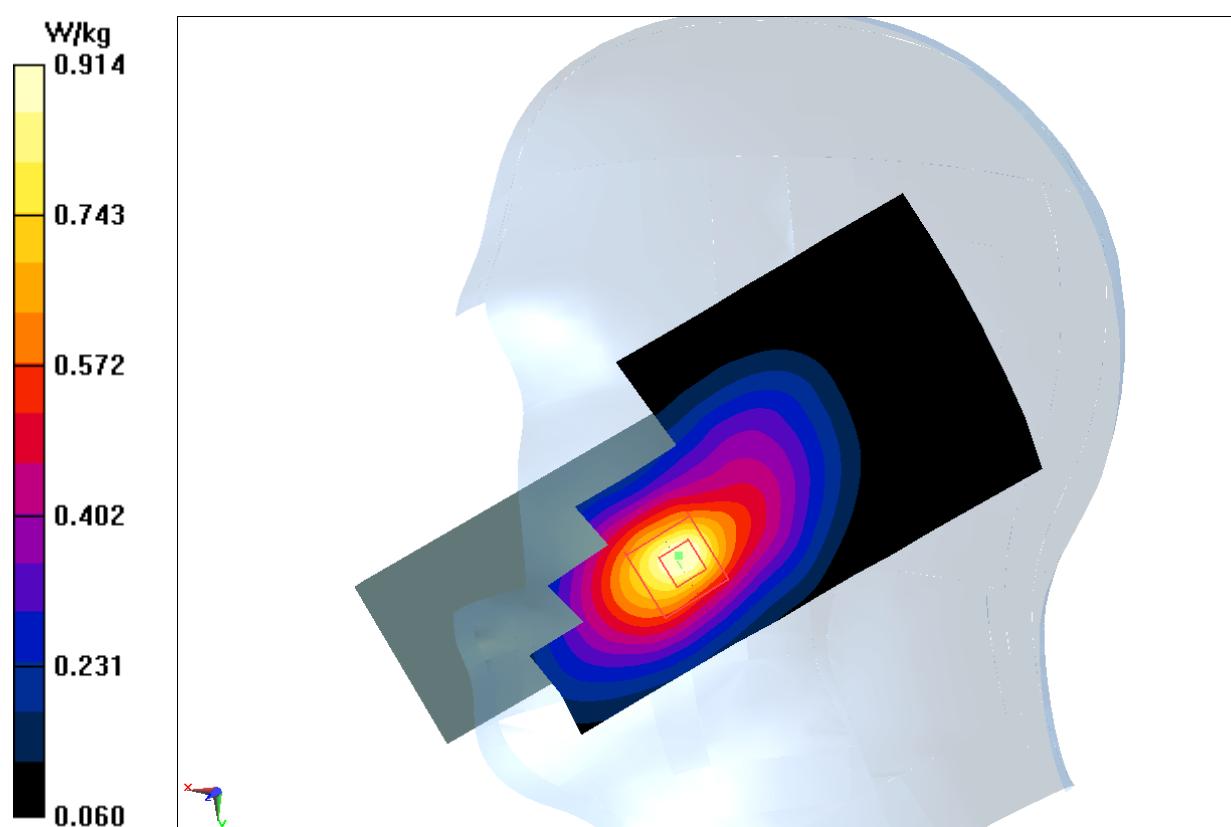

**Fig.5 WCDMA 850**

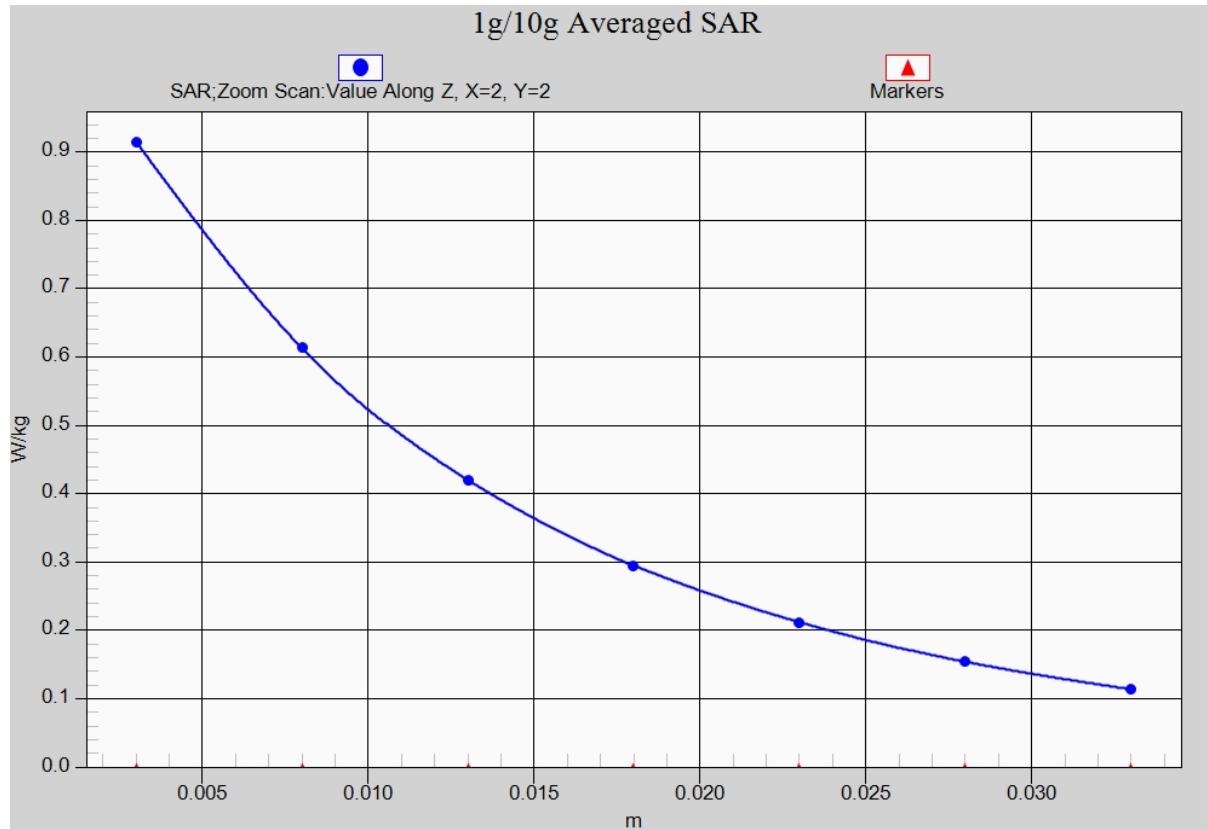


Fig. 5-1 Z-Scan at power reference point (WCDMA 850)

**WCDMA 850 Body Rear closed Low – AP OFF**

Date: 2016-11-16

Electronics: DAE4 Sn1331

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 56.079$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C      Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7307 ConvF(9.83, 9.83, 9.83)

**Area Scan (121x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.497 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.97 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.590 W/kg

**SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.339 W/kg**

Maximum value of SAR (measured) = 0.510 W/kg

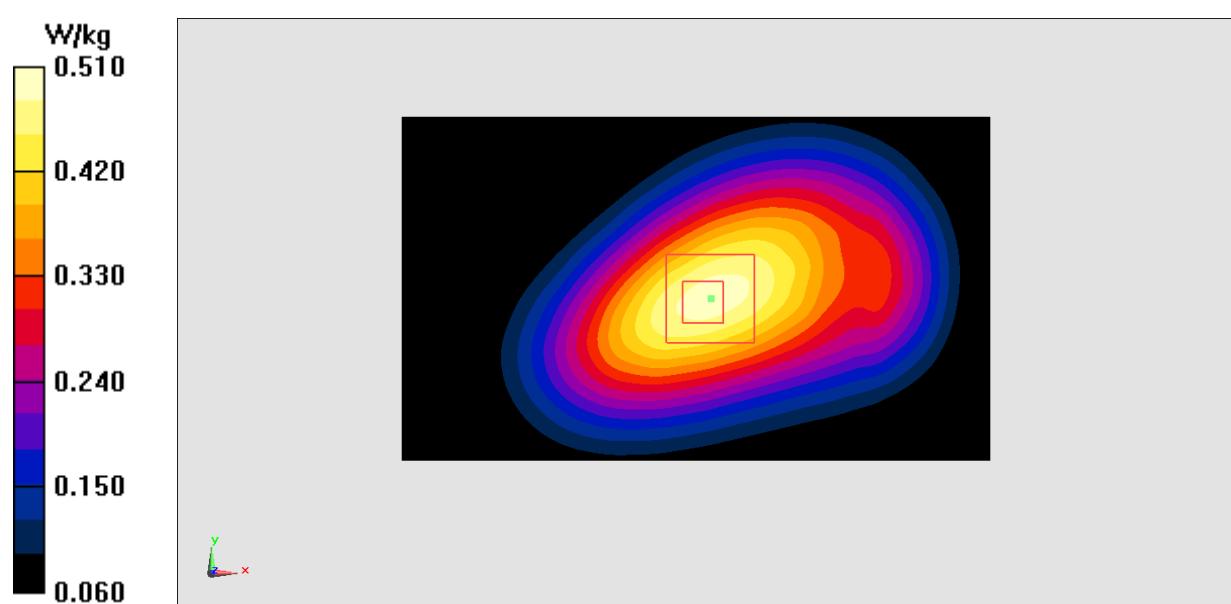**Fig.6 WCDMA 850**

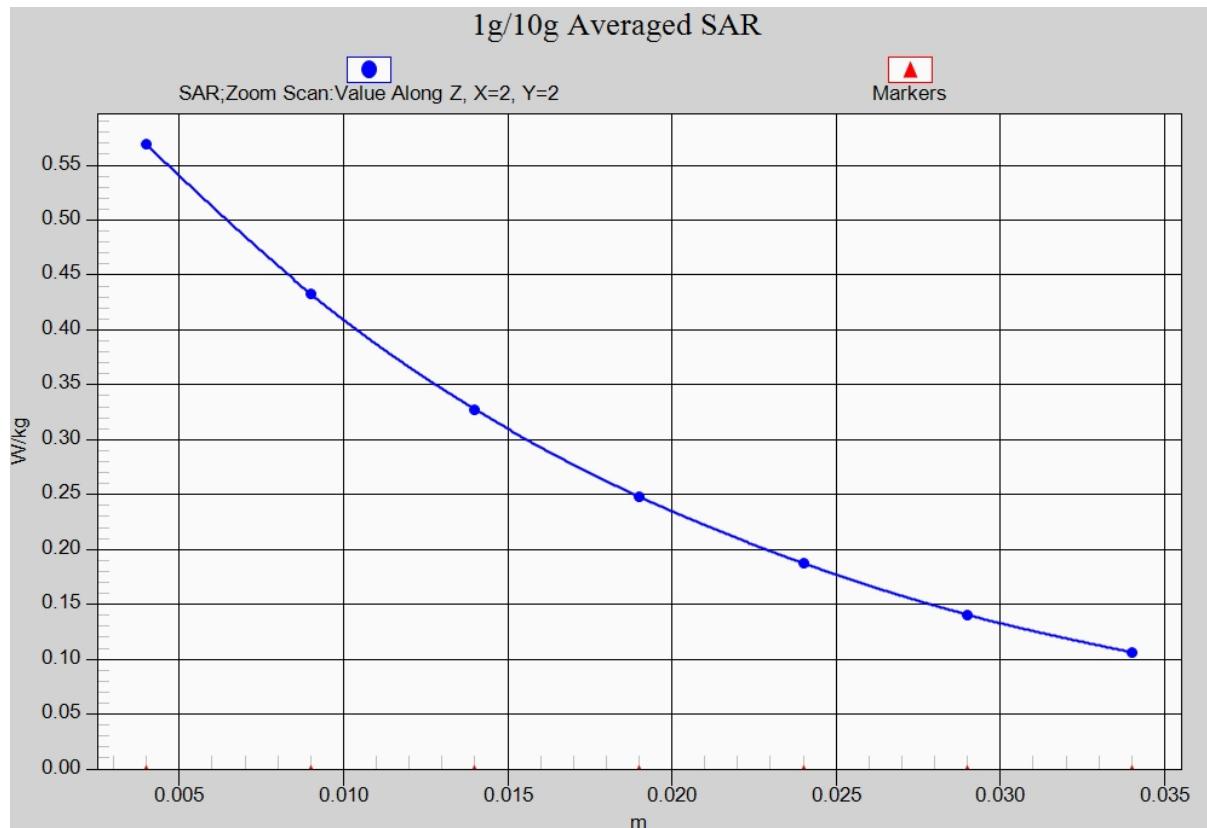


Fig. 6-1 Z-Scan at power reference point (WCDMA850)

**WCDMA 850 Body Rear closed Low – AP ON**

Date: 2016-11-16

Electronics: DAE4 Sn1331

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 56.079$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.9°C      Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7307 ConvF(9.83, 9.83, 9.83)

**Area Scan (121x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.540 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.80 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.625 W/kg

**SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.364 W/kg**

Maximum value of SAR (measured) = 0.544 W/kg

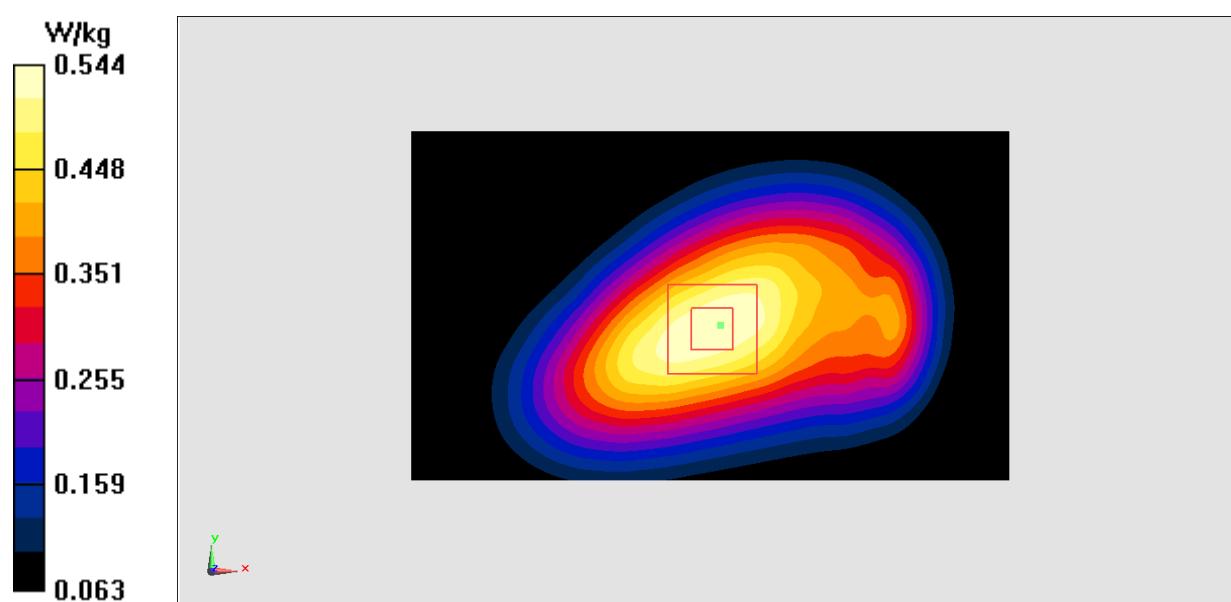**Fig.7 WCDMA 850**