




HP (100 Pack) PS/2 Mouse (QY775A6)

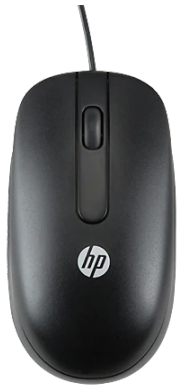

Overview

Glide over a variety of surfaces with speed and accuracy using the new HP PS/2 Mouse for the latest advancements in optical tracking technology.

Optical tracking - Get precision movement with a tracking system that works through light for less moving parts and greater durability than ball-based mice.

Left-handed or right-handed users can enjoy a contoured shape that suits either preference, with a wheel that also functions as a third button.

The optical sensor within the HP PS/2 2-Button Optical Scroll Mouse employs a resolution of approximately 800dpi.

A ball-free design reduces sticking and the need for constant cleaning.

Specifications

Minimum dimensions (W x D x H)	11.5 x 6.29 x 3.7 cm
Minimum dimensions (W x D x H)	4.53 x 2.48 x 1.46 in
Weight	100 g
Weight	3.53 oz
Pointing device	PS/2 Optical Mouse
Warranty	Your Option Limited Warranty is a one (1) year (HP Option Limited Warranty Period) parts replacement warranty on any HP-branded or Compaq-branded options (HP Options). If your HP Option is installed in an HP Hardware Product, HP may provide warranty service either for the HP Option Limited Warranty Period or the remaining Limited Warranty Period of the HP Hardware Product in which the HP Option is being installed, whichever period is the longer but not to exceed three (3) years from the date you purchased the HP Option.
What's in the box	HP PS/2 Mouse; Documentation

Additional specifications

Additional information about HP in the countries	http://www.hp.com/
Buttons	Two primary buttons and clickable scroll wheel
Cable length	180 cm
Cable length (imperial)	6 ft
Compatibility	The HP PS/2 Mouse is compatible with the HP 280 G2 MT; HP 285 (Pro) G2 MT; HP ProDesk 400 G2 SFF; HP ProDesk 400 G2.5 SFF; HP ProDesk 400 G2 MT; HP ProDesk 405 G2 MT; HP ProDesk 400 G3 SFF; HP ProDesk 400 G3 MT; HP ProDesk 400 G4 SFF; HP ProDesk 400 G4 MT; HP ProDesk 490 G3 MT; HP ProDesk 400 G2 DM (Mini); HP ProDesk 400 G3 DM (Mini); HP ProOne 400 G2 AIO Touch; HP ProOne 400 G2 AIO Non-Touch; HP ProOne 400 G3 AIO Touch; HP ProOne 400 G3 AIO Non-Touch; HP ProDesk 600 G2 MTW; HP ProDesk 600 G2 SFF; HP ProDesk 600 G2 Desktop Mini; HP ProDesk 600 G3 MTW; HP ProDesk 600 G3 SFF; HP ProDesk 600 G3 Desktop Mini; HP ProOne 600 G2 AIO 21.5" Touch; HP ProOne 600 G2 AIO 21.5" Non-Touch; HP ProOne 600 G3 AIO 21.5" Non-Touch; HP EliteDesk 705 G2 MT; HP EliteDesk 705 G3 MT; HP EliteDesk 705 G2 SFF; HP EliteDesk 705 G3 SFF; HP EliteOne 705 G2 AIO 23" Touch; HP EliteOne 705 G2 AIO 23" Non-Touch; HP EliteDesk 800 G2 TWR; HP EliteDesk 800 G2 SFF; HP EliteDesk 800 G2 35W Desktop Mini; HP EliteDesk 800 G2 65W Desktop Mini; HP EliteDesk 800 G3 TWR; HP EliteDesk 800 G3 SFF; HP EliteDesk 800 G3 35W Desktop Mini; HP EliteDesk 800 G3 65W Desktop Mini; HP Collaboration PC G2; HP EliteOne 800 G2 AIO 23" Touch; HP EliteOne 800 G2 AIO 23" Non-Touch; HP EliteOne 800 G3 AIO 23.8" NT; HP EliteOne 800 G3 AIO 23.8" Touch; HP RP5 Retail System, Model 5810
Connector description	PS/2
Operating temperature range	0 to 40°C
Photo (product photo, jpg, 190x170)	Accessories/QY775A6_190x170.jpg
Photo (product photo, jpg, 70x100)	Accessories/QY775A6_70x100.jpg
Product count per unit	1
Product subgroup	Mouse
Quickspec	http://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c04111375
Resolution	800 DPI
UNSPSC code	43211708

Disclaimer — Copyright

Actual product may vary from image shown.

© Copyright 2021 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements

accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Generated by Dynamic Collateral Tool – (ww-en) – Feb 12, 2021 4:46 PM UTC+0000