

INTERCHANGEABLE SERIES DOWNLIGHTS


New, high performance 5" and 6" LED module with a seamless acrylic lens, three color temperatures and over a dozen trim package options!

INTERCHANGEABLE SERIES DOWNLIGHTS

Save \$231 in energy costs alone over the 35,000 hours of life compared to incandescent equivalents (9.8 watt LED versus 65 watt incandescent, based on 12¢ per kilowatt hour). Save even more by eliminating 14 lamp replacements (2,500 hours average life for 65BR40 lamps versus 35,000 hours).

FEATURES

- 5" / 6" LED module features interchangeable trim package design – sold separately to optimize inventory allocation and investment
- Available in 2700K, 3000K and 4100K color temperatures
- Acrylic lens diffuses LED light evenly and has no visible fasteners
- Over a dozen trim packages available in 5" and 6" sizes
- Attached torsion springs secure assembled fixture to ceiling – also includes attached spring steel side clips for added retention
- Accessory mounting brackets available for non-bullhorn housings
- Each fixture includes E26 adaptor (GU24 adaptors available and sold separately for Title 24 compliance, see page 9)
- Energy Star pending
- Highly efficient Samsung LEDs with radial fin heat sink design produce up to 75 lumens per watt
- Suitable for wet locations
- Five year warranty

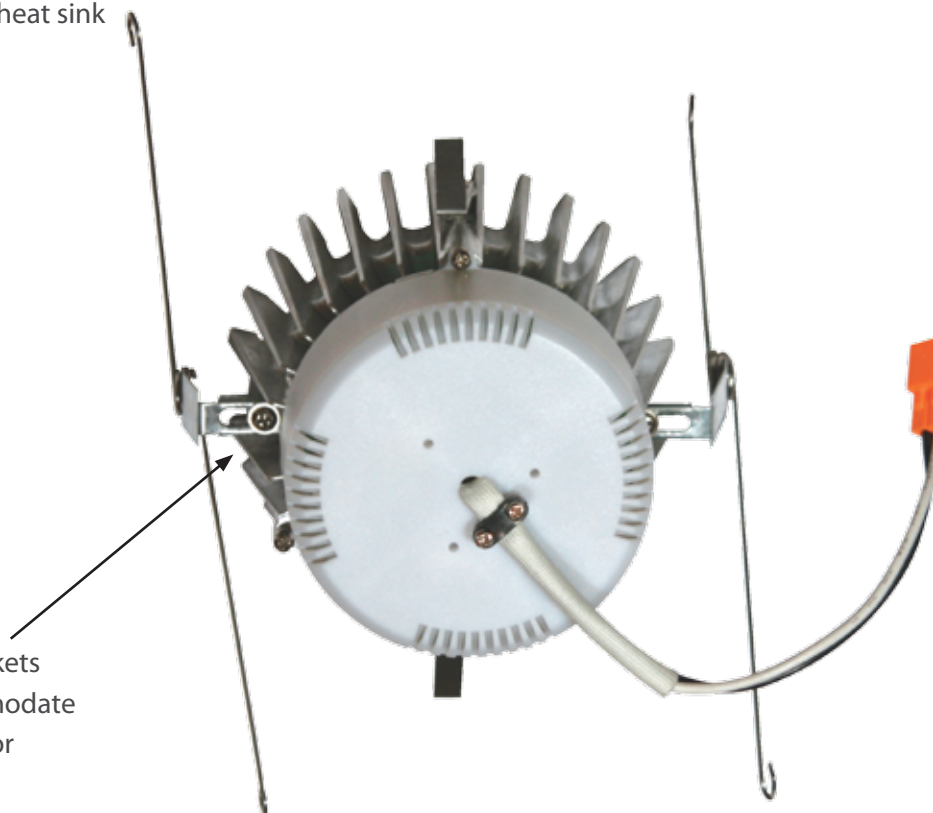

Torsion spring mounting brackets are field adjustable to accommodate 5" or 6" housings (factory set for 6" versions).

INTERCHANGEABLE SERIES DOWNLIGHTS

DARK BRONZE TRIM PACKAGES FOR 5" OR 6" HOUSINGS



Dark Bronze Baffle

X5-DBB-DB-X56

X6-DBB-DB-X56



Black Baffle

X5-BKB-DB-X56

X6-BKB-DB-X56



Satin Pearl Multiplier

X5-SPM-DB-X56

X6-SPM-DB-X56

SATIN ALUMINUM TRIM PACKAGES FOR 5" OR 6" HOUSINGS



Satin Aluminum Baffle

X5-ALB-AL-X56

X6-ALB-AL-X56



White Baffle

X5-WHB-AL-X56

X6-WHB-AL-X56



Black Baffle

X5-BKB-AL-X56

X6-BKB-AL-X56



White Multiplier

X5-WHM-AL-X56

X6-WHM-AL-X56



Black Multiplier

X5-BKM-AL-X56

X6-BKM-AL-X56

WHITE TRIM PACKAGES FOR 5" OR 6" HOUSINGS



White Baffle

X5-WHB-WH-X56

X6-WHB-WH-X56



Black Multiplier

X5-BKM-WH-X56

X6-BKM-WH-X56



Black Baffle

X5-BKB-WH-X56

X6-BKB-WH-X56



White Multiplier

X5-WHM-WH-X56

X6-WHM-WH-X56



Clear Silver Multiplier

X5-CSM-WH-X56

X6-CSM-WH-X56



Satin Pearl Multiplier

X5-SPM-WH-X56

X6-SPM-WH-X56

LIGHT MODULE

X56-E26

Interchangeable
LED light module for
5" and 6" housings

2700K = 2700K, Ultra Warm White
3000K = 3000K, Warm White
4100K = 4100K, Bright White



AL-GU24 (optional)
8" GU24 connector with
molex connection.
Required for Title 24
compliance. Replaces
screw-in socket connection.

TRIM PACKAGES

X5 = 5" Trim Package
X6 = 6" Trim Package

DBB-DB	BKB-AL	BKB-WH
BKB-DB	WHM-AL	WHM-WH
SPM-DB	BKM-AL	CSM-WH
ALB-AL	WHB-WH	SPM-WH
WHB-AL	BKM-WH	

See facing page for color combinations

X56

TECHNICAL SPECIFICATIONS

Voltage	120V AC, 60Hz operation
Construction	Samsung SMD 2323 LEDs with one piece molded acrylic lens, integrated aluminum heat sink with radial fins for convection, and attached LED driver with heavy-duty plastic housing
Mounting	Recess only, using torsion springs and spring steel side clips (included and attached). Accessory mounting brackets are included (not attached) for non-bullhorn housings; verify housing height compatibility including socket depth
Dimensions	X6 trim diameter (all styles) = 7-1/2"; X5 trim diameter (all styles) = 6-1/2"; visible trim height = 1/4"
Switching	On/Off wall switch or wall dimmer
Knockouts	N/A
Light output	X56-E26-2700K = 600 lumens, X56-E26-3000K = 650 lumens, X56-E26-4100K = 700 lumens
Wattage	X56-E26-2700K and X56-E26-3000K = 9.5 watts, X56-E26-4100K = 9.8 watts
LED Specs	Samsung, 35,000 hour rated life, 2700K, 3000K or 4100K, +80 CRI, 110° beam angle
Dimmers	Dimmable with most incandescent, CFL/LED and low voltage electronic dimmers
Diffuser	Opaque white acrylic lens
Packaging	Retail box, 6 per case



H

