

**United States** 

## **Element Washington DC LLC**

18855 Adams Court, Morgan Hill, CA 95037 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.element.com



## **PART 24 MEASUREMENT REPORT**

Applicant Name:Date of Testing:Apple Inc.4/6/2022 - 8/25/2022One Apple Park WayTest Site/Location:

Cupertino, CA 95014 Element Washington DC LLC. Morgan Hill, CA, USA

Test Report Serial No.: 1C2205090034-02.BCG

FCC ID: BCG-A2727
Applicant Name: Apple Inc.

Application Type: Certification Model: A2727
EUT Type: Watch

**FCC Classification:** PCS Licensed Transmitter Worn on Body (PCT)

FCC Rule Part: 24

**Test Procedure(s):** ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez

**Executive Vice President** 





FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 1 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 1 of 90



## TABLE OF CONTENTS

1.0	INTE	RODUCTION	4
	1.1	Scope	4
	1.2	Element Washington DC LLC Test Location	4
	1.3	Test Facility / Accreditations	4
2.0	PRC	DDUCT INFORMATION	5
	2.1	Equipment Description	5
	2.2	Device Capabilities	5
	2.3	Antenna Description	6
	2.4	Test Support Equipment	6
	2.5	Test Configuration	7
	2.6	Software and Firmware	7
	2.7	EMI Suppression Device(s)/Modifications	7
3.0	DES	SCRIPTION OF TESTS	8
	3.1	Evaluation Procedure	8
	3.2	Radiated Spurious Emissions	8
4.0	MEA	ASUREMENT UNCERTAINTY	9
5.0	TES	ST EQUIPMENT CALIBRATION DATA	10
6.0	SAM	IPLE CALCULATIONS	11
7.0	TES	ST RESULTS	12
	7.1	Summary	12
	7.2	Occupied Bandwidth	13
	7.3	Spurious and Harmonic Emissions at Antenna Terminal	21
	7.4	Band Edge Emissions at Antenna Terminal	33
	7.5	Peak-Average Ratio	61
	7.6	Radiated Power (EIRP)	75
	7.7	Radiated Spurious Emissions	79
	7.8	Frequency Stability / Temperature Variation	86
8.0	CON	NCLUSION	89
9.0	APP	PENDIX A	90

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 2 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 2 01 90





## **PART 24 MEASUREMENT REPORT**



			Tx Frequency		PAR at 0.1%	EI	RP	Emission
Mode	Bandwidth	Modulation		Range [MHz] OBW [MHz]		Max. Power	Max. Power	Designator
			Kange [winz]		[dB]	[mW]	[dBm]	Designator
WCDMA1900	5 MHz	Spread Spectrum	1852.4 - 1907.6	4.0918	3.31	27.416	14.38	4M09F9W
	1.4 MHz	QPSK	1850.7 - 1909.3	1.1076	5.16	30.130	14.79	1M11G7W
	1.4 IVIDZ	16QAM	1850.7 - 1909.3	1.1091	5.94	26.242	14.19	1M11D7W
	3 MHz	QPSK	1851.5 - 1908.5	2.7286	5.27	29.785	14.74	2M73G7W
	3 IVITZ	16QAM	1851.5 - 1908.5	2.7298	6.12	26.669	14.26	2M73D7W
	5 MHz	QPSK	1852.5 - 1907.5	4.5767	5.26	30.761	14.88	4M58G7W
Band 2	5 IVITZ	16QAM	1852.5 - 1907.5	4.5534	6.11	26.853	14.29	4M55D7W
Danu 2	10MHz	QPSK	1855 - 1905	9.1192	5.15	29.785	14.74	9M12G7W
	TOME	16QAM	1855 - 1905	5.4417	5.82	26.546	14.24	5M44D7W
	15 MHz	QPSK	1857.5 - 1902.5	13.6489	5.22	30.269	14.81	13M6G7W
	15 IVITZ	16QAM	1857.5 - 1902.5	6.4496	5.67	27.416	14.38	6M45D7W
	20 MHz	QPSK	1860 - 1900	18.2130	4.94	29.992	14.77	18M2G7W
	20 1/11/12	16QAM	1860 - 1900	7.8627	5.62	26.002	14.15	7M86D7W
	1.4 MHz	QPSK	1850.7 - 1914.3	1.1076	5.26	29.717	14.73	1M11G7W
	1.4 IVITZ	16QAM	1850.7 - 1914.3	1.1091	6.05	26.546	14.24	1M11D7W
	3 MHz	QPSK	1851.5 - 1913.5	2.7286	5.38	29.648	14.72	2M73G7W
	3 IVITZ	16QAM	1851.5 - 1913.5	2.7298	6.18	26.182	14.18	2M73D7W
	5 MHz	QPSK	1852.5 - 1912.5	4.5767	5.42	30.549	14.85	4M58G7W
Band 25	5 IVITZ	16QAM	1852.5 - 1912.5	4.5534	6.17	26.915	14.30	4M55D7W
Band 25	40.141.1-	QPSK	1855 - 1910	9.1192	5.33	29.785	14.74	9M12G7W
	10 MHz	16QAM	1855 - 1910	5.4417	5.87	26.792	14.28	5M44D7W
	15 MHz	QPSK	1857.5 - 1907.5	13.6489	5.39	29.923	14.76	13M6G7W
	15 MINZ	16QAM	1857.5 - 1907.5	6.4496	5.87	26.363	14.21	6M45D7W
	20 MHz	QPSK	1860 - 1905	18.2130	5.09	30.409	14.83	18M2G7W
	∠∪ IVIHZ	16QAM	1860 - 1905	7.8627	5.83	26.546	14.24	7M86D7W

**EUT Overview** 

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 3 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 3 of 90



## 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

## 1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

## 1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 4 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 4 01 90



## 2.0 PRODUCT INFORMATION

## 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID:BCG-A2727**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: P34KQY7X0W, QFY90XDQ0F, FN6211203HG17PJ3X

## 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC.

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

	Antenna FCM				
Simultaneous Tx	WLAN	Bluetooth	LTE		
Config	802.11 b/g/n	BDR, EDR, HDR4/8, LE1/2M	Mid/High Band		
Config 1	✓	×	✓		
Config 2	×	✓	✓		

**Table 2-1. Simultaneous Transmission Configurations** 

√ = Support; 
× = Not Support

#### Note:

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be config 1 and reported in RF WLAN and RF Part 27b test reports.

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 5 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 5 of 90



## 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain (dBi)
Ballu	Antenna FCM
LTE Band 25/2	-9.62
WCDMA 1900	-9.62

Table 2-2. Highest Antenna Gain

Note: Antenna Specifications has been attached to Appendix A

## 2.4 Test Support Equipment

1	Apple Macbook	Model:	A1398	S/N:	C2QKP008F6F3
	w/AC/DC Adapter	Model:	A1435	S/N:	N/A
2	Apple SPAM Cable	Model:	N/A	S/N:	N/A
	w/ Charging Dock	Model:	N/A	S/N:	CYV001700087SWK01WMP8
	w/ Cradle	Model:		S/N:	FAPS7319394000064
3	Apple Magnetic Charger	Model:	N/A	S/N:	DLC9223004YLNWL43
3	Apple Magnetic Charger	Model:	N/A	S/N:	DLC824401XHJLW04U
4	Pathfinder Swiss	Model:	920-11361-01	S/N:	DLC1212005Q18H71Y
	SiP Socket	Model:	N/A	S/N:	P1 X2339S PF 198
5	Sugar Cube Power Supply	Model:	A1365	S/N:	D292066H2NLDHLHAE
6	Store Sample Wristband	Model:	N/A	S/N:	DLC219400361YDQ2W

**Table 2-3. Test Support Equipment** 

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 6 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 6 of 90



## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The worst case configuration was investigated for all combinations of the various types of wristbands, metal and non-metal wristbands. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

This device only supports 27RBs or less for 16-QAM uplink.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

#### 2.6 Software and Firmware

The test was conducted with firmware version watchOS 9.0 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 7 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage / 01 90



## 3.0 DESCRIPTION OF TESTS

## 3.1 Evaluation Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI C63.26-2015/TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure......None

## 3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

 $E_{[dB\mu V/m]} = Measured \ amplitude \ level_{[dBm]} + 107 + Cable \ Loss_{[dB]} + Antenna \ Factor_{[dB/m]} \ And$   $EIRP_{[dBm]} = E_{[dB\mu V/m]} + 20logD - 104.8; \ where \ D \ is \ the \ measurement \ distance \ in \ meters.$ 

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 8 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage o or 90



## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of k=2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 9 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	raye 3 01 90



## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	8/13/2021	Annual	8/13/2022	T058701-01
ESPEC	SU-241	Tabletop Temperature Chamber	10/26/2021	Annual	10/26/2022	92009574
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	5/11/2022	Annual	5/11/2023	205956
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/6/2022	Annual	1/6/2023	102327
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/18/2022	Annual	4/18/2023	100050
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546

Table 5-1. Test Equipment

## Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 10 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 10 of 90



## 6.0 SAMPLE CALCULATIONS

## **Emission Designator**

## WCDMA Emission Designator

**Emission Designator = 4M16F9W** 

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

## **QPSK Modulation**

## Emission Designator = 8M62G7W

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

#### **QAM Modulation**

#### **Emission Designator = 8M45D7W**

BW = 8.45 MHz

D = Amplitude/Angle Modulated

7 = Quantized/Digital Info

W = Combination of Any

## **Spurious Radiated Emission**

### Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 11 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 11 01 90



## 7.0 TEST RESULTS

## 7.1 Summary

Company Name: Apple Inc.

FCC ID: BCG-A2727

FCC Classification: PCS Licensed Transmitter Worn on Body (PCT)

Mode(s): WCDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
	Occupied Bandw idth	2.1049	WA	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	-13 dBm at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Peak-Average Ratio	24.232(d)	< 13 dB	PASS	Section 7.5
CONDUCTED	Transmitter Conducted Output Pow er	2.1046	N/A	N/A	See RF Exposure Report
	Frequency Stability	2.1055, 24.235	Fundamental emissions stay within authorized frequency block over the temperature and voltage range as tested	PASS	Section 7.8
	Equivalent Isotropic Radiated Pow er	24.232(c)	< 2 Watts max. EIRP	PASS	Section 7.6
RADIATED	Radiated Spurious Emissions	2.1053, 24.238(a)	-13 dBmfor all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

### Notes:

- 1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool v1.1.

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 12 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 12 01 90



## 7.2 Occupied Bandwidth

#### §2.1049

#### **Test Overview**

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

## **Test Procedure Used**

KDB 971168 D01 v03r01 - Section 4.2

## **Test Settings**

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3.  $VBW \ge 3 \times RBW$
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2-7 were repeated after changing the RBW such that it would be within 1-5% of the 99% occupied bandwidth observed in Step 7

### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

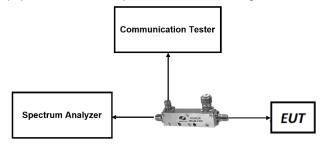


Figure 7-1. Test Instrument & Measurement Setup


#### **Test Notes**

None.

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 13 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 13 01 90



### LTE Band 25/2

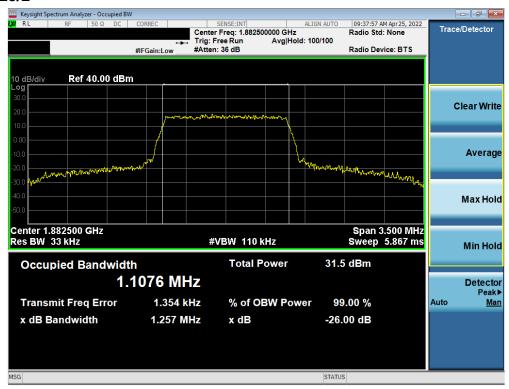

Plot 7-1. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB Configuration)



Plot 7-2. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 14 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 14 01 90





Plot 7-3. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz QPSK - Full RB Configuration)



Plot 7-4. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 15 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 15 01 90






Plot 7-5. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz QPSK - Full RB Configuration)



Plot 7-6. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 16 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 10 01 90



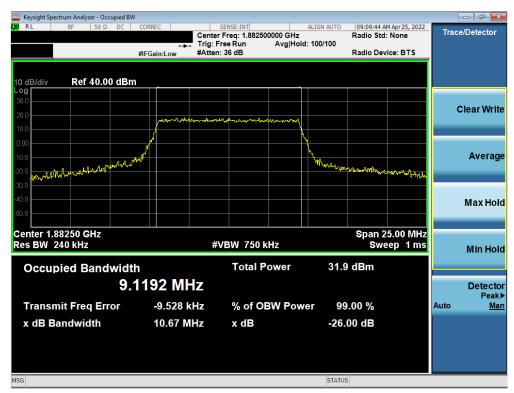


Plot 7-7. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz QPSK - Full RB Configuration)



Plot 7-8. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 17 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



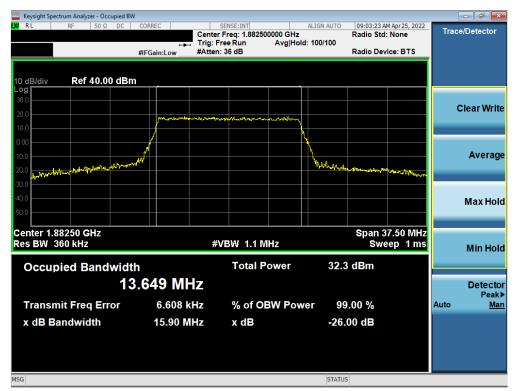

Plot 7-9. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz QPSK - Full RB Configuration)




Plot 7-10. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 18 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	





Plot 7-11. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB Configuration)

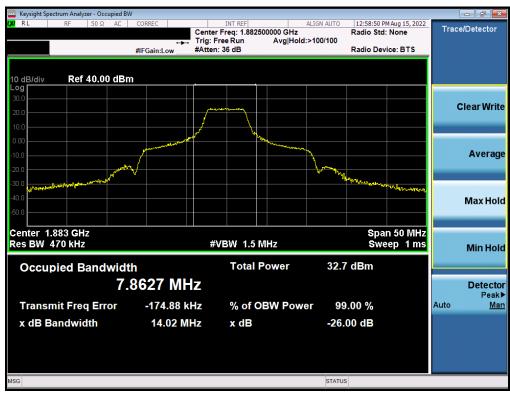

Plot 7-12. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 19 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



## **WCDMA PCS**



Plot 7-13. Occupied Bandwidth Plot (WCDMA, Ch. 9400)

FCC ID: BCG-A2727	<b>e</b> lement	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Daga 20 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 20 of 90



# 7.3 Spurious and Harmonic Emissions at Antenna Terminal §2.1051, §24.238(a)

#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + 10  $log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.

#### **Test Procedure Used**

KDB 971168 D01 v03r01 - Section 6.0

### **Test Settings**

- 1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

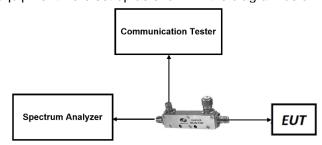


Figure 7-2. Test Instrument & Measurement Setup

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 21 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	




### **Test Notes**

1. Per Part 24, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 22 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 22 of 90



## LTE Band 25/2

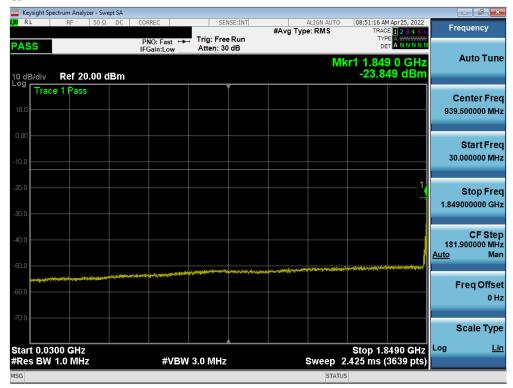


Plot 7-14. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

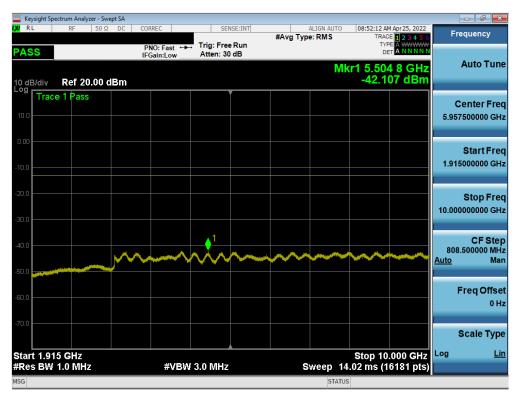


Plot 7-15. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 22 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 23 of 90



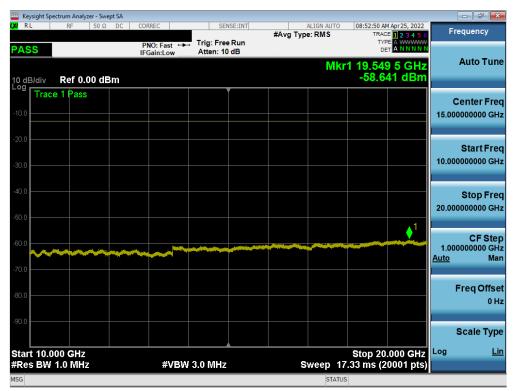


Plot 7-16. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

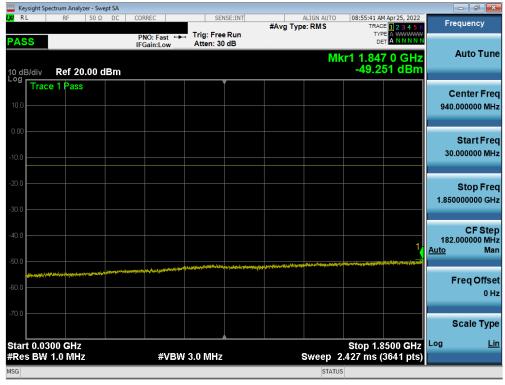


Plot 7-17. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 24 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 24 of 90



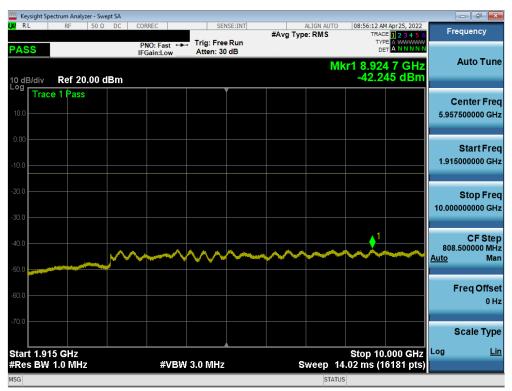


Plot 7-18. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

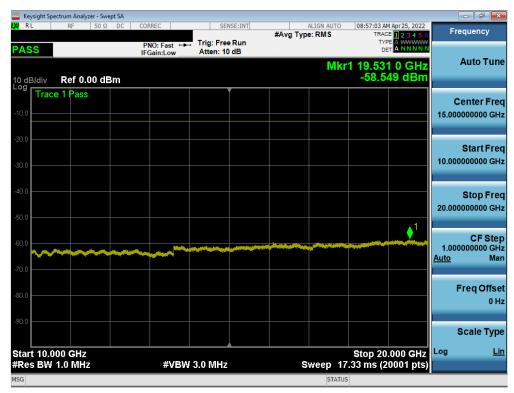

Plot 7-19. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dago 25 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 25 of 90



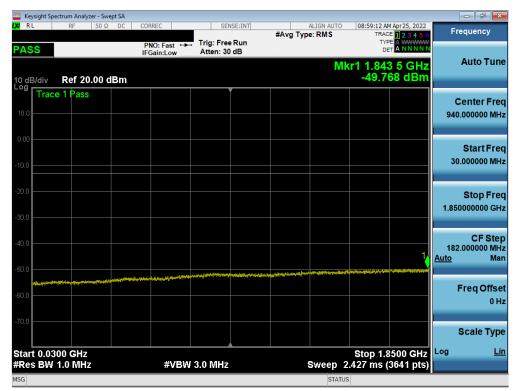


Plot 7-20. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)



Plot 7-21. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 26 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



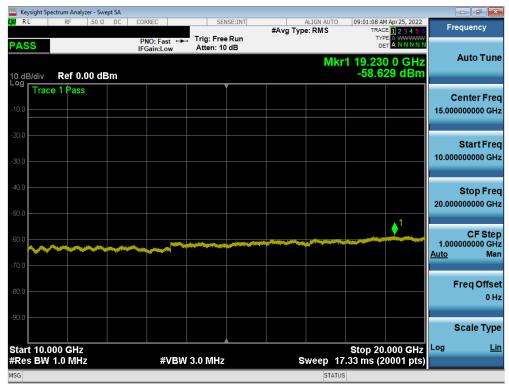


Plot 7-22. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 27 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 27 of 90



## **WCDMA PCS**

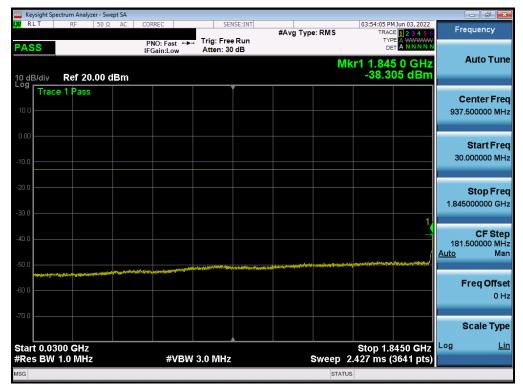

Plot 7-23. Conducted Spurious Plot (WCDMA Ch. 9262)

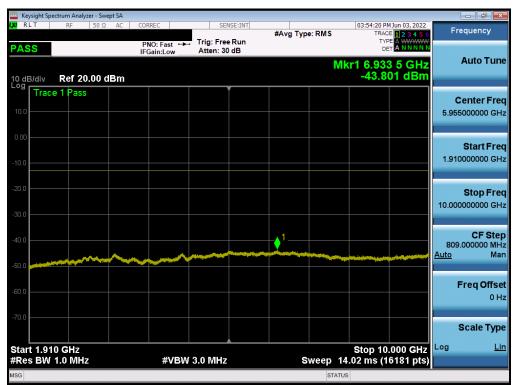


Plot 7-24. Conducted Spurious Plot (WCDMA Ch. 9262)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 28 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 28 of 90





Plot 7-25. Conducted Spurious Plot (WCDMA Ch. 9262)

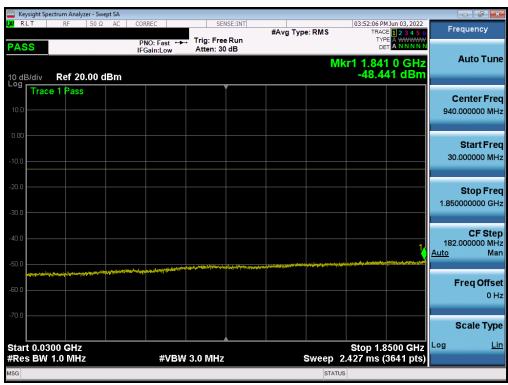


Plot 7-26. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 20 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 29 of 90






Plot 7-27. Conducted Spurious Plot (WCDMA Ch. 9400)

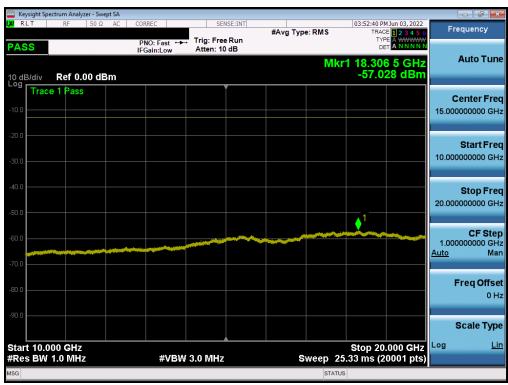

Plot 7-28. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 30 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 30 of 90



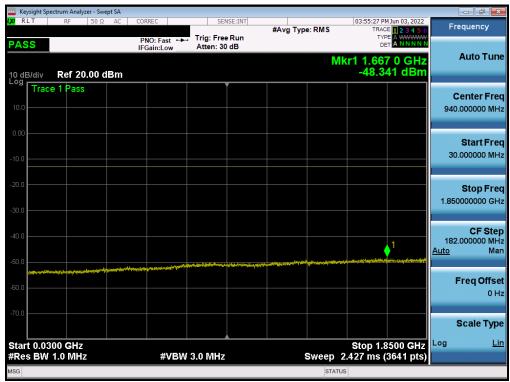

Plot 7-29. Conducted Spurious Plot (WCDMA Ch. 9538)



Plot 7-30. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 31 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 31 of 90





Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: BCG-A2727	element PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 32 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



# 7.4 Band Edge Emissions at Antenna Terminal §2.1051, §24.238(a)

### **Test Overview**

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + 10  $log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.

#### **Test Procedure Used**

KDB 971168 D01 v03r01 - Section 6.0

## **Test Settings**

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW  $\geq$  1% of the emission bandwidth
- 4.  $VBW \ge 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

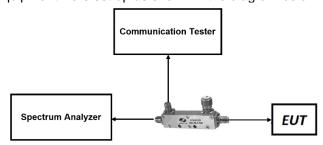


Figure 7-3. Test Instrument & Measurement Setup

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 33 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 33 01 90




### **Test Notes**

1. Per 24.238(a), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 34 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 34 01 90



### LTE Band 25

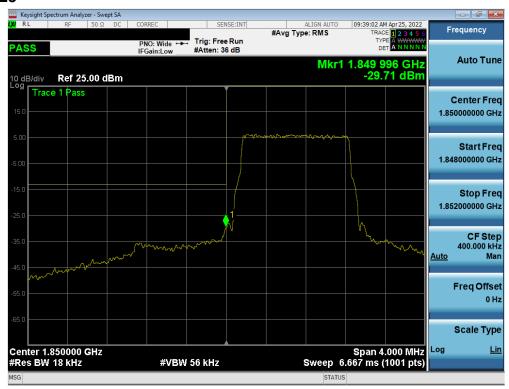

Plot 7-32. Lower Band Edge Plot (LTE Band 25 - 1.4MHz QPSK - Full RB Configuration)

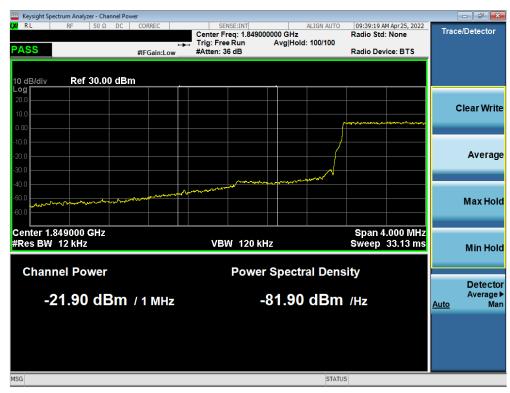


Plot 7-33. Extended Lower Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 35 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 35 of 90





Plot 7-34. Upper Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)

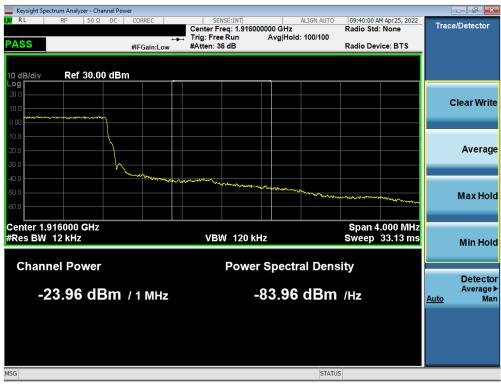


Plot 7-35. Extended Upper Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 36 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 36 of 90





Plot 7-36. Lower Band Edge Plot (LTE Band 25 - 3MHz QPSK - Full RB Configuration)

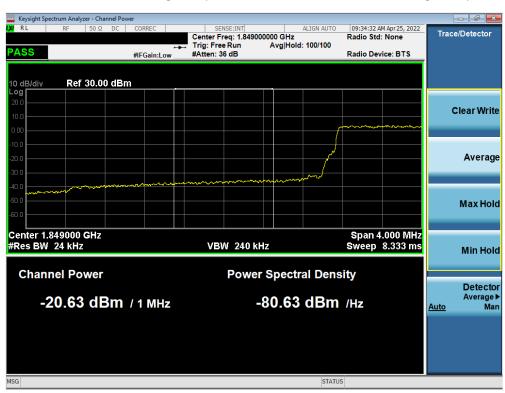


Plot 7-37. Extended Lower Band Edge Plot (LTE Band 25 – 3MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 37 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 37 01 90






Plot 7-38. Upper Band Edge Plot (LTE Band 25 – 3MHz QPSK – Full RB Configuration)

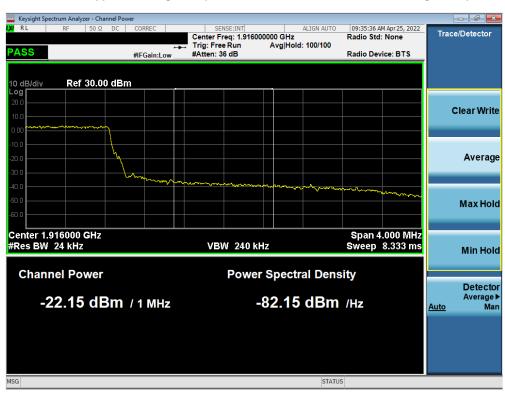


Plot 7-39. Extended Upper Band Edge Plot (LTE Band 25 - 3MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 38 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



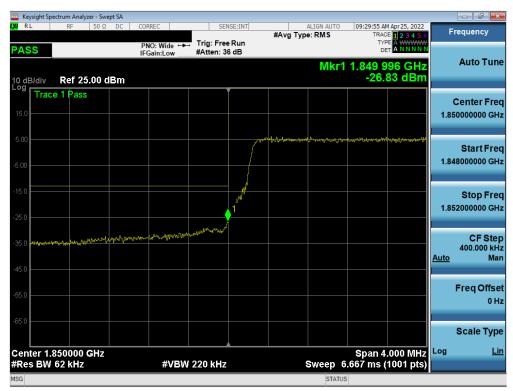

Plot 7-40. Lower Band Edge Plot (LTE Band 25 - 5MHz QPSK - Full RB Configuration)

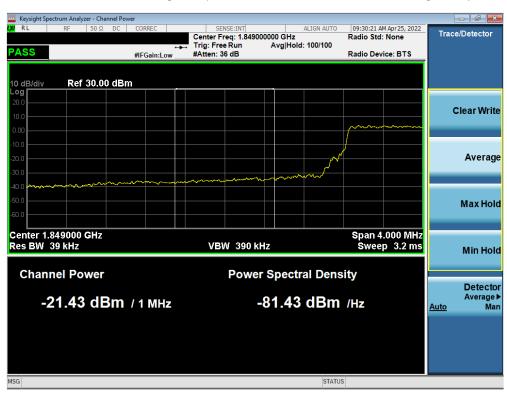


Plot 7-41. Extended Lower Band Edge Plot (LTE Band 25 - 5MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 39 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 39 01 90






Plot 7-42. Upper Band Edge Plot (LTE Band 25 - 5MHz QPSK - Full RB Configuration)

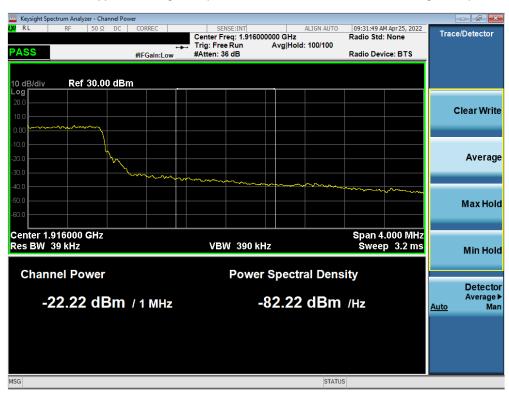


Plot 7-43. Extended Upper Band Edge Plot (LTE Band 25 - 5MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 40 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 40 01 90



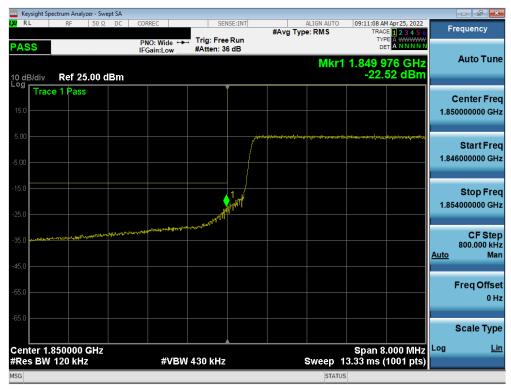


Plot 7-44. Lower Band Edge Plot (LTE Band 25 - 10MHz QPSK - Full RB Configuration)

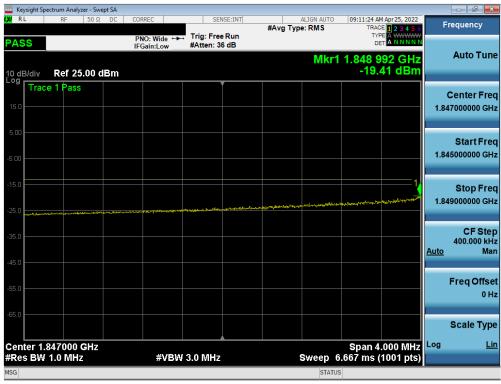


Plot 7-45. Extended Lower Band Edge Plot (LTE Band 25 - 10MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 44 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 41 of 90



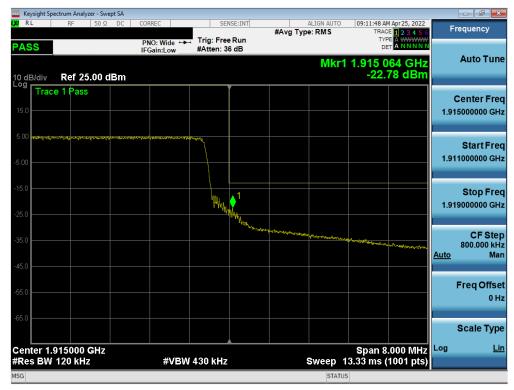


Plot 7-46. Upper Band Edge Plot (LTE Band 25 – 10MHz QPSK – Full RB Configuration)

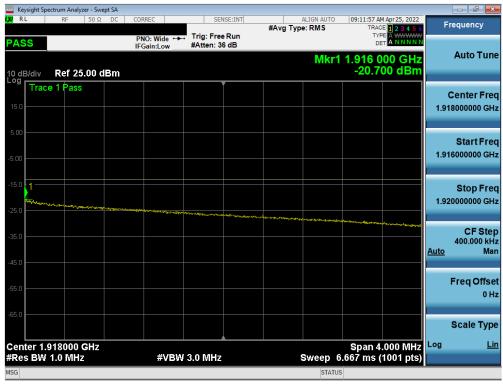


Plot 7-47. Extended Upper Band Edge Plot (LTE Band 25 - 10MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 42 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 42 of 90



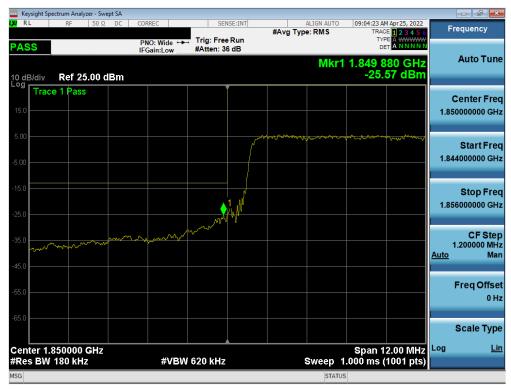

Plot 7-48. Lower Band Edge Plot (LTE Band 25 - 15MHz QPSK - Full RB Configuration)

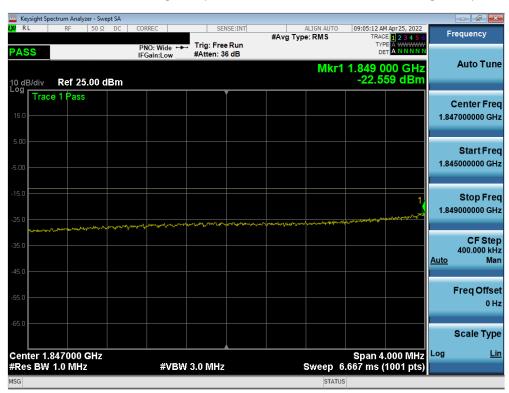


Plot 7-49. Extended Lower Band Edge Plot (LTE Band 25 - 15MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 43 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 43 of 90






Plot 7-50. Upper Band Edge Plot (LTE Band 25 – 15MHz QPSK – Full RB Configuration)

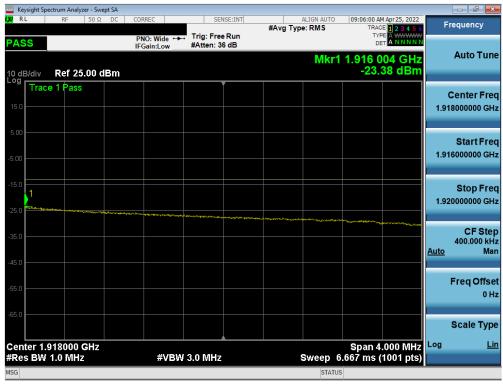


Plot 7-51. Extended Upper Band Edge Plot (LTE Band 25 - 15MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 44 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



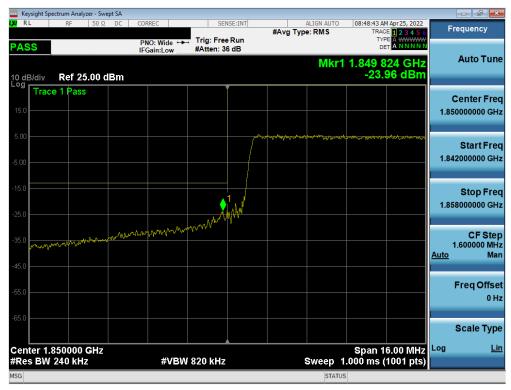

Plot 7-52. Lower Band Edge Plot (LTE Band 25 - 20MHz QPSK - Full RB Configuration)

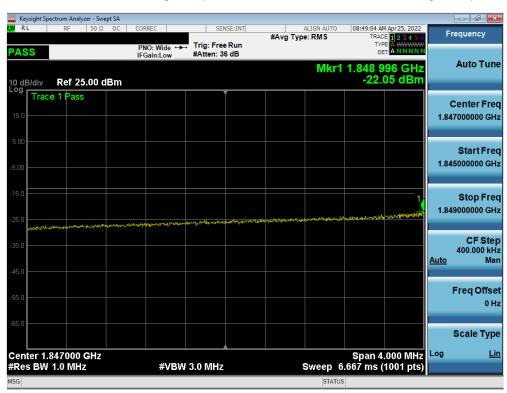

Plot 7-53. Extended Lower Band Edge Plot (LTE Band 25 - 20MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 45 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 45 of 90





Plot 7-54. Upper Band Edge Plot (LTE Band 25 – 20MHz QPSK – Full RB Configuration)




Plot 7-55. Extended Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK - Full RB Configuration)


FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 46 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 46 of 90



## LTE Band 2

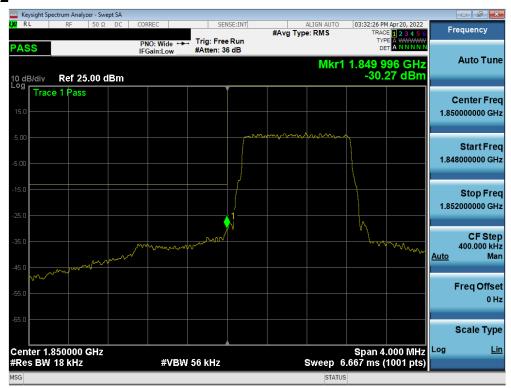

Plot 7-56. Lower Band Edge Plot (LTE Band 2 - 1.4MHz QPSK - Full RB Configuration)

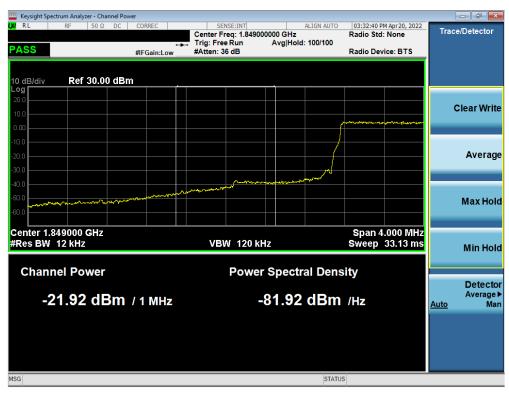


Plot 7-57. Extended Lower Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 47 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Faye 47 01 90






Plot 7-58. Upper Band Edge Plot (LTE Band 2 - 1.4MHz QPSK - Full RB Configuration)

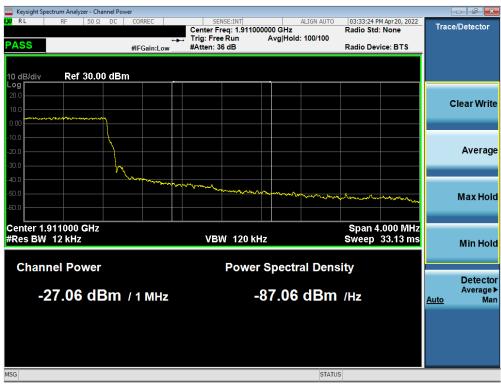


Plot 7-59. Extended Upper Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 49 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 48 of 90



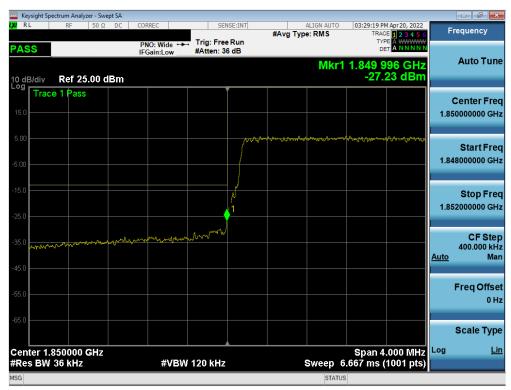

Plot 7-60. Lower Band Edge Plot (LTE Band 2 - 3MHz QPSK - Full RB Configuration)

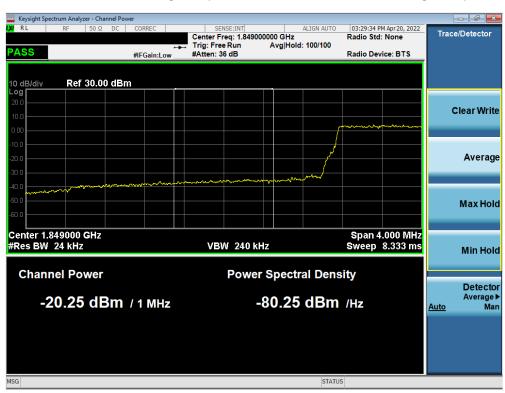


Plot 7-61. Extended Lower Band Edge Plot (LTE Band 2 - 3MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 49 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	






Plot 7-62. Upper Band Edge Plot (LTE Band 2 – 3MHz QPSK – Full RB Configuration)

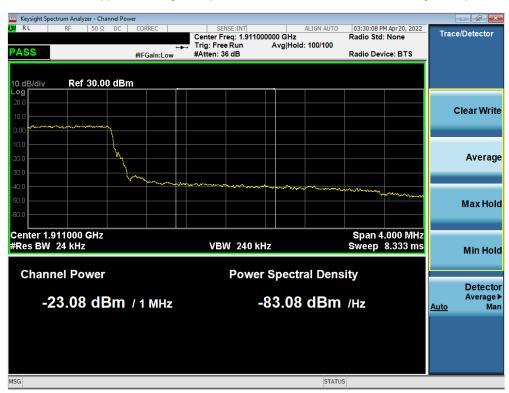


Plot 7-63. Extended Upper Band Edge Plot (LTE Band 2 - 3MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 50 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



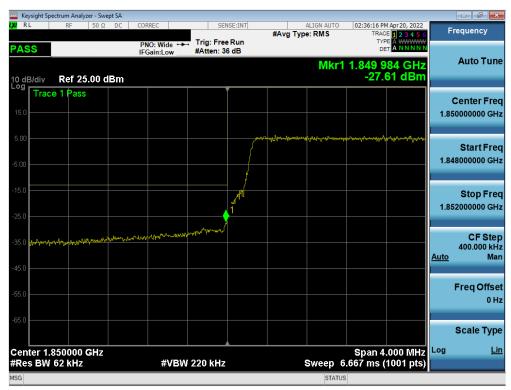

Plot 7-64. Lower Band Edge Plot (LTE Band 2 - 5MHz QPSK - Full RB Configuration)

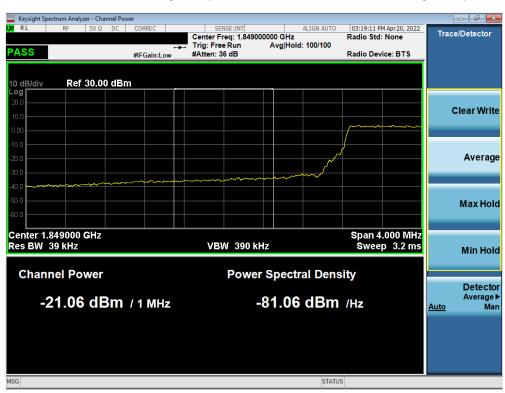


Plot 7-65. Extended Lower Band Edge Plot (LTE Band 2 - 5MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 51 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	





Plot 7-66. Upper Band Edge Plot (LTE Band 2 – 5MHz QPSK – Full RB Configuration)

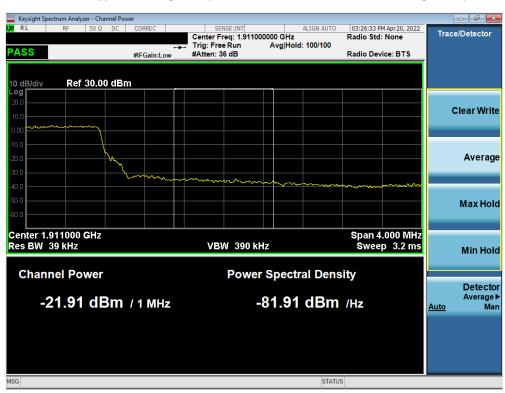

Plot 7-67. Extended Upper Band Edge Plot (LTE Band 2 - 5MHz QPSK - Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 52 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	