

Harman International Industries, Inc.

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISED RSS-247 RF report

Model:

AP72598V

REPORT NUMBER:

240100930SHA-001

ISSUE DATE:

January 31, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.247-01_V1 © 2018 Intertek





Total Quality. Assured.

TEST REPORT

Intertek Testing Services Shanghai
Building No.86, 1198 Qinzhou Road (North)
Caohejing Development Zone
Shanghai 200233, China

Telephone: 86 21 6127 8200
www.intertek.com

Report no.: 240100930SHA-001

Applicant: Harman International Industries, Inc.
8500 Balboa Blvd, Northridge, CA 91329, USA

Manufacturer: Dalian Golden Hualu Digital Technology Co., Ltd.
No.1 Hua Road,Qixianling,High-Tech Industrial Zone,Dalian,Liaoning, China

Manufacturing site: Dalian Golden Hualu Digital Technology Co., Ltd.
No.1 Hua Road,Qixianling,High-Tech Industrial Zone,Dalian,Liaoning, China

Product Name: WiFi & BT Platform Module

Type/Model: AP72598V

FCC ID: APIAP72598V

IC: 6132A-AP72598V

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2021): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 3 (August 2023): Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (February 2021) Amendment 2: General Requirements for Compliance of Radio Apparatus

PREPARED BY:

Project Engineer
Erick Liu

REVIEWED BY:

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Content**

REVISION HISTORY.....	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION	7
1.3 FREQUENCY HOPPING SYSTEM REQUIREMENT	8
1.4 DESCRIPTION OF TEST FACILITY	10
2 TEST SPECIFICATIONS.....	11
2.1 STANDARDS OR SPECIFICATION	11
2.2 MODE OF OPERATION DURING THE TEST.....	11
2.3 TEST SOFTWARE LIST	12
2.4 TEST PERIPHERALS LIST	12
2.5 TEST ENVIRONMENT CONDITION:.....	12
2.6 INSTRUMENT LIST	13
2.7 MEASUREMENT UNCERTAINTY	15
3 20DB BANDWIDTH	16
3.1 LIMIT	16
3.2 MEASUREMENT PROCEDURE	16
3.3 TEST CONFIGURATION	17
3.4 TEST RESULTS OF 20DB BANDWIDTH.....	17
4 CARRIER FREQUENCY SEPARATION.....	18
4.1 LIMIT	18
4.2 TEST CONFIGURATION	18
4.3 TEST PROCEDURE AND TEST SETUP.....	18
4.4 TEST RESULTS OF CARRIER FREQUENCY SEPARATION.....	18
5 OUTPUT POWER.....	19
5.1 LIMIT	19
5.2 TEST CONFIGURATION	19
5.3 MEASUREMENT PROCEDURE	19
5.4 TEST RESULTS OF OUTPUT POWER.....	19
6 RADIATED EMISSIONS	20
6.1 LIMIT	20
6.2 MEASUREMENT PROCEDURE	20
6.3 TEST RESULTS OF RADIATED EMISSIONS	22
7 CONDUCTED SPURIOUS EMISSIONS & BAND EDGE	43
7.1 LIMIT	43
7.2 TEST CONFIGURATION	43
7.3 MEASUREMENT PROCEDURE	43
7.4 TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS & BAND EDGE	44
8 POWER LINE CONDUCTED EMISSION.....	45
8.1 LIMIT	45
8.2 TEST CONFIGURATION	45
8.3 MEASUREMENT PROCEDURE	46

TEST REPORT

8.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	47
9 NUMBER OF HOPPING FREQUENCIES	49
9.1 LIMIT	49
9.2 TEST CONFIGURATION	49
9.3 TEST PROCEDURE AND TEST SETUP	49
9.4 TEST RESULTS OF NUMBER OF HOPPING FREQUENCIES	49
10 DWELL TIME	50
10.1 LIMIT	50
10.2 TEST CONFIGURATION	50
10.3 TEST PROCEDURE AND TEST SETUP	50
10.4 TEST RESULTS OF DWELL TIME	51
11 OCCUPIED BANDWIDTH	52
11.1 LIMIT	52
11.2 MEASUREMENT PROCEDURE	52
11.3 TEST CONFIGURATION	52
11.4 THE RESULTS OF OCCUPIED BANDWIDTH	52
12 ANTENNA REQUIREMENT.....	53
APPENDIX A: TEST RESULTS	54
20dB EMISSION BANDWIDTH.....	54
<i>Test Result</i>	54
<i>Test Graphs</i>	55
OCCUPIED CHANNEL BANDWIDTH.....	58
<i>Test Result</i>	58
<i>Test Graphs</i>	59
MAXIMUM CONDUCTED OUTPUT POWER.....	62
<i>Test Result Peak</i>	62
<i>Test Graphs</i>	63
CARRIER FREQUENCY SEPARATION.....	66
<i>Test Result</i>	66
<i>Test Graphs</i>	67
TIME OF OCCUPANCY.....	68
<i>Test Result</i>	68
<i>Test Graphs</i>	69
NUMBER OF HOPPING CHANNELS	72
<i>Test Result</i>	72
<i>Test Graphs</i>	73
BAND EDGE MEASUREMENTS.....	74
<i>Test Result</i>	74
<i>Test Graphs</i>	75
CONDUCTED SPURIOUS EMISSION	79
<i>Test Result</i>	79
<i>Test Graphs</i>	80
DUTY CYCLE.....	89
<i>Test Result</i>	89
<i>Test Graphs</i>	90

TEST REPORT**Revision History**

Report No.	Version	Description	Issued Date
240100930SHA-001	Rev. 01	Initial issue of report	January 31, 2024

TEST REPORT**Measurement result summary**

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
20 dB Bandwidth	15.247(a)(1)	RSS-247 Issue 3 Clause 5.1	Pass
Carrier Frequency Separation	15.247(a)(1)	RSS-247 Issue 3 Clause 5.1	Pass
Output power	15.247(b)(1)	RSS-247 Issue 3 Clause 5.4	Pass
Radiated Emissions	15.205 & 15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Conducted Spurious Emissions & Band Edge	15.247(d)	RSS-247 Issue 3 Clause 5.5	Pass
Power line conducted emission	15.207	RSS-Gen Issue 5 Clause 8.8	Pass
Number of Hopping Frequencies	15.247(a)(1)(iii)	RSS-247 Issue 3 Clause 5.1	
Dwell time	15.247(a)(1)(iii)	RSS-247 Issue 3 Clause 5.1	
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

TEST REPORT**1 GENERAL INFORMATION****1.1 Description of Equipment Under Test (EUT)**

Product name:	WiFi & BT Platform Module
Type/Model:	AP72598V
Description of EUT:	The EUT is wireless module with WiFi and Bluetooth function, it has only one model.
Rating:	4.5-5.5V DC
Category of EUT:	Class B
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	BCM4362A2_001.003.006.1012.1017_Decrease_BDR_EDR_LE_3dB _2022_0105_2
Hardware Version:	/
Sample received date:	December 19, 2023
Sample Identification Number:	A231219-47-001
Date of test:	December 19, 2023 – January 19, 2024

1.2 Technical Specification

Frequency Band:	2400MHz ~ 2483.5MHz
Support Standards:	Bluetooth 5.1 (BR+EDR)
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Channel Number:	79 (0 - 78)
Data Rate:	Max 3 Mbps
Channel Separation:	1 MHz
Antenna:	Antenna1: Pole antenna, 2.53dBi Antenna2: PCB antenna, 3.19dBi Antenna3: Chip antenna, 1.55dBi Antenna4: Pole antenna, 1.83dBi

Note:

1. This information is supplied by the applicant. Any change on this value would result in different test data / conclusion.
2. After evaluation, we performed Radiated Emissions tests on the following three antennas:
Antenna1: Pole antenna, 2.53dBi
Antenna2: PCB antenna, 3.19dBi
Antenna3: Chip antenna, 1.55dBi

TEST REPORT**1.3 Frequency Hopping System Requirement****Test Requirement: Section 15.247 (a)(1), (g), (h) requirement:**

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs;

i.e. the shift register is initialized with nine ones.


- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

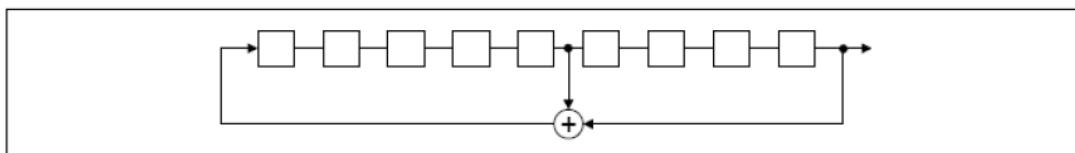

Linear Feedback Shift Register for Generation of the PRBS sequence

TEST REPORT

An example of Pseudorandom Frequency Hopping Sequence as follow:

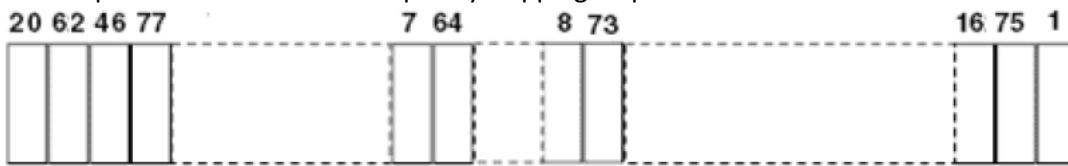

Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

TEST REPORT**1.4 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2021)

ANSI C63.10 (2020)

RSS-247 Issue 3 (August 2023)

RSS-Gen Issue 5 (February 2021) Amendment 2

KDB 558074 D01 15.247 Meas Guidance v05r02

2.2 Mode of operation during the test

While testing the transmitter mode of the EUT, the internal modulation is applied.

All the functions of the host device except the BT module were set on stand-by mode.

The test setting software is offered by the manufactory. The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

The worst-case modulation configuration:

Worst Modulation Used for Conformance Testing			
Bluetooth Mode	Data Rate	Packet Type	Worst Mode
GFSK	BR-1Mbps	DH1, DH3, DH5	BR-1Mbps DH5 EDR-2Mbps 2DH5 EDR-3Mbps 3DH5
$\pi/4$ DQPSK	EDR-2Mbps	2DH1, 2DH3, 2DH5	
8DPSK	EDR-3Mbps	3DH1, 3DH3, 3DH5	

Note: The BR-1Mbps DH5 mode was chosen for radiation emission as representative in this report.

The power setting parameter:

The worst-case power setting parameter			
Test software Version	Secure CRT		
Modulation Mode	2402MHz	2441MHz	2480MHz
BR-1Mbps	Default	Default	Default
EDR-2Mbps	Default	Default	Default
EDR-3Mbps	Default	Default	Default

Radiated test mode: EUT transmitted signal with BT antenna;

Conducted test mode: EUT transmitted signal from BT RF port connected to SPA directly;

TEST REPORT**2.3 Test software list**

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	HP	-

2.5 Test environment condition:

Test items	Temperature	Humidity
20 dB Bandwidth		
Output power		
Carrier Frequency Separation		
Number of Hopping Frequencies	24°C	52% RH
Dwell time		
Occupied bandwidth		
Conducted Spurious Emissions & Band Edge		
Power line conducted emission	25°C	55% RH
Radiated Emissions	24°C	52% RH

TEST REPORT
2.6 Instrument list

Conducted Emission/Disturbance Power/Tri-loop Test/CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2024-12-07
<input checked="" type="checkbox"/>	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2024-12-07
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2024-11-09
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2024-09-11
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2024-06-10
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC5262	2024-06-10
<input type="checkbox"/>	Horn antenna	R&S	HF 906	EC 3049	2024-11-16
<input checked="" type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2024-03-14
<input type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2024-07-09
<input type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2024-03-14
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2024-03-14
<input type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2024-03-14
<input type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2024-03-14
<input type="checkbox"/>	Spectrum analyzer	R&S	CMW500	EC5944	2024-12-07
<input type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2024-03-14
<input type="checkbox"/>	Mobile Test System	Litelpoint	Iqxel	EC 5176	2024-01-09
<input type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2024-09-11
Test Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2024-01-07
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2024-07-31
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date

TEST REPORT

☒	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2024-03-14
☒	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5198	2024-01-18

TEST REPORT**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Power spectrum density	± 0.74dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB
Power line conducted emission	± 3.19dB
Occupied bandwidth	± 0.84 × 10 ⁻⁷
Occupied bandwidth	± 0.84 × 10 ⁻⁷

TEST REPORT**3 20dB bandwidth****Test result:** Pass**3.1 Limit**


- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

3.2 Measurement Procedure

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “–xx dB down” requirement; that is, if the requirement calls for measuring the –20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “–xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “–xx dB down amplitude” determined in step h). If a marker is below this “–xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “–xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker

TEST REPORT

- amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

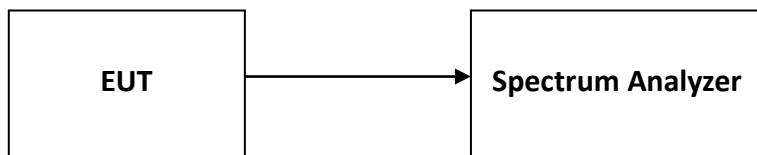3.3 Test Configuration**3.4 Test Results of 20dB bandwidth**


Please refer to Appendix A.

TEST REPORT**4 Carrier Frequency Separation**

Test result: Pass

4.1 Limit

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

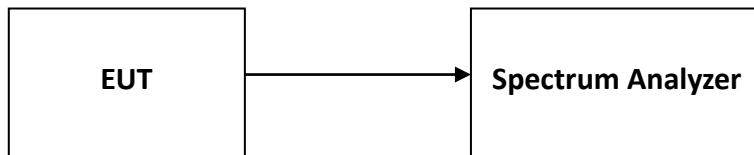4.2 Test Configuration**4.3 Test Procedure and test setup**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

4.4 Test Results of Carrier Frequency Separation

Please refer to Appendix A.

TEST REPORT

5 Output power


Test result: Pass

5.1 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.2 Test Configuration

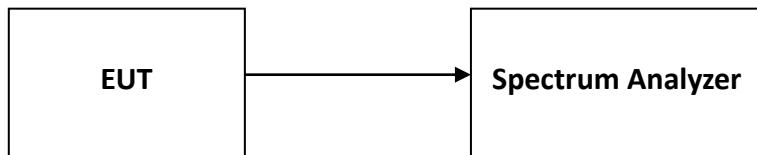

5.3 Measurement Procedure

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW ≥ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

5.4 Test Results of Output Power

Please refer to Appendix A.

TEST REPORT

6 Radiated Emissions

Test result: Pass

6.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

6.2 Measurement Procedure

For Radiated emission below 30MHz:

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**

- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times RBW$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported



TEST REPORT**6.3 Test Results of Radiated Emissions**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

All modulation mode has been tested, and the worst data(GFSK) was listed in the report.

Test data below 1GHz

Antenna1: Pole antenna, 2402MHz

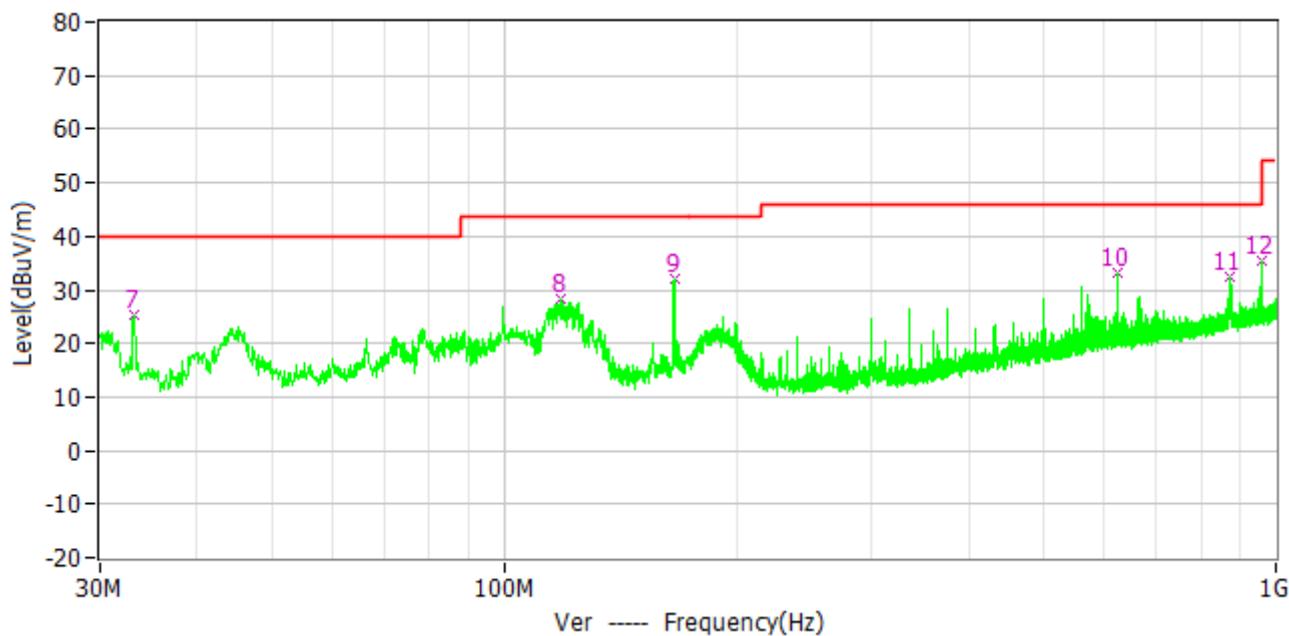
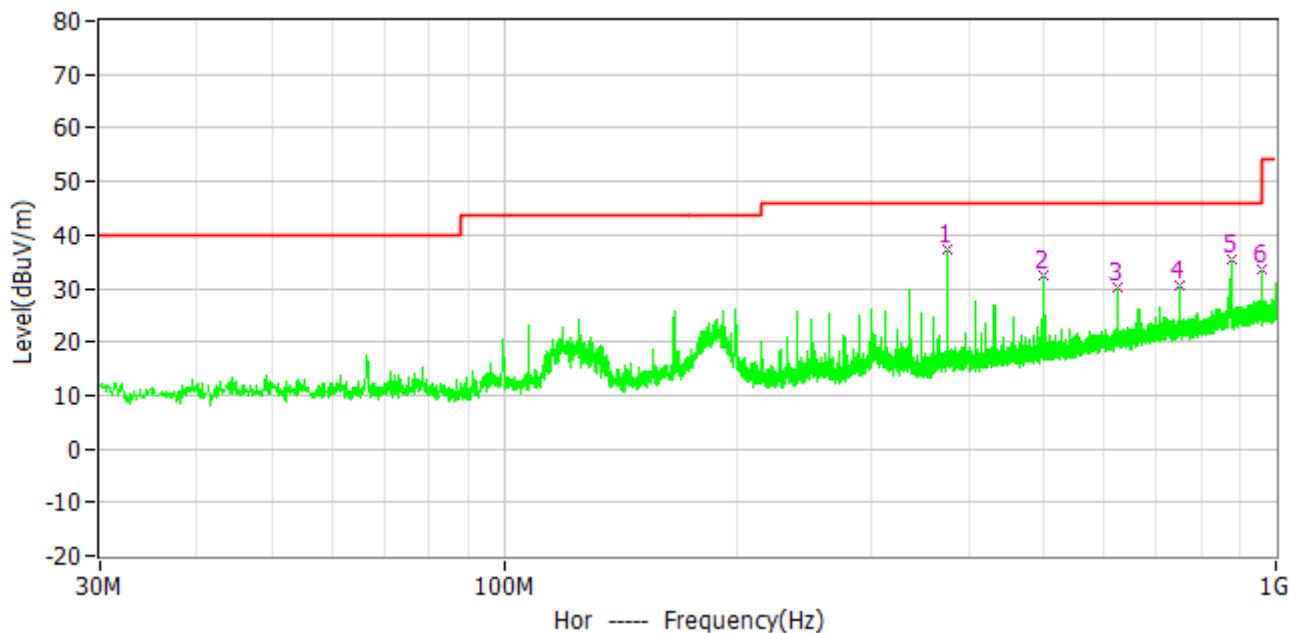


TEST REPORT

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	375.029MHz	46.0	37.2	-8.8	20.3	16.9	PK	Hor
2*	499.965MHz	46.0	32.4	-13.6	12.6	19.8	PK	Hor
3*	624.998MHz	46.0	30.2	-15.8	7.7	22.5	PK	Hor
4*	750.031MHz	46.0	30.6	-15.4	6.4	24.2	PK	Hor
5*	875.064MHz	46.0	35.3	-10.7	9.4	25.9	PK	Hor
6*	959.648MHz	46.0	33.6	-12.4	6.8	26.8	PK	Hor
7*	33.201MHz	40.0	25.3	-14.7	12.7	12.6	PK	Ver
8*	118.367MHz	43.5	28.5	-15.0	16.6	11.9	PK	Ver
9*	166.576MHz	43.5	32.2	-11.3	18.1	14.1	PK	Ver
10*	624.998MHz	46.0	33.1	-12.9	10.6	22.5	PK	Ver
11*	869.147MHz	46.0	32.5	-13.5	6.7	25.8	PK	Ver
12*	959.745MHz	46.0	35.5	-10.5	8.7	26.8	PK	Ver

TEST REPORT

Antenna1: Pole antenna, 2441MHz

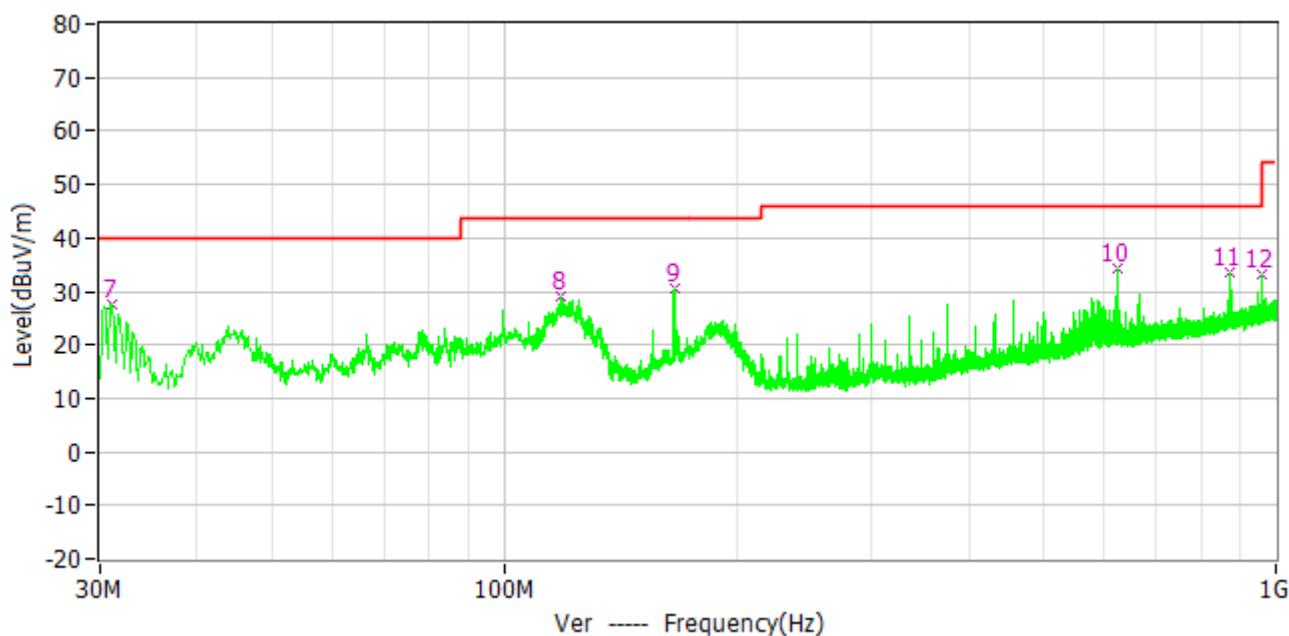
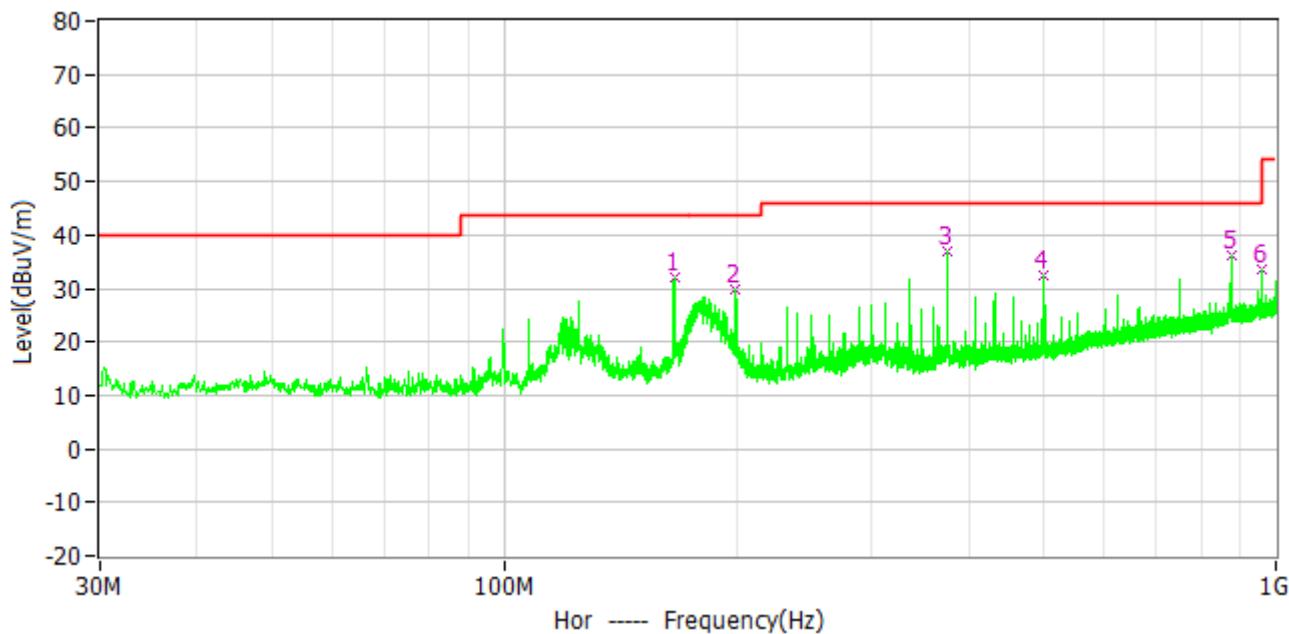


TEST REPORT

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	166.576MHz	43.5	32.2	-11.3	18.1	14.1	PK	Hor
2*	199.168MHz	43.5	29.7	-13.8	18.3	11.4	PK	Hor
3*	375.029MHz	46.0	37.1	-8.9	20.2	16.9	PK	Hor
4*	499.965MHz	46.0	32.4	-13.6	12.6	19.8	PK	Hor
5*	875.064MHz	46.0	36.0	-10.0	10.1	25.9	PK	Hor
6*	959.745MHz	46.0	33.7	-12.3	6.9	26.8	PK	Hor
7*	31.067MHz	40.0	27.7	-12.3	15.5	12.2	PK	Ver
8*	118.561MHz	43.5	28.9	-14.6	17.0	11.9	PK	Ver
9*	166.576MHz	43.5	30.7	-12.8	16.6	14.1	PK	Ver
10*	624.998MHz	46.0	34.4	-11.6	11.9	22.5	PK	Ver
11*	869.147MHz	46.0	33.7	-12.3	7.9	25.8	PK	Ver
12*	959.745MHz	46.0	33.3	-12.7	6.5	26.8	PK	Ver

TEST REPORT

Antenna1: Pole antenna, 2480MHz

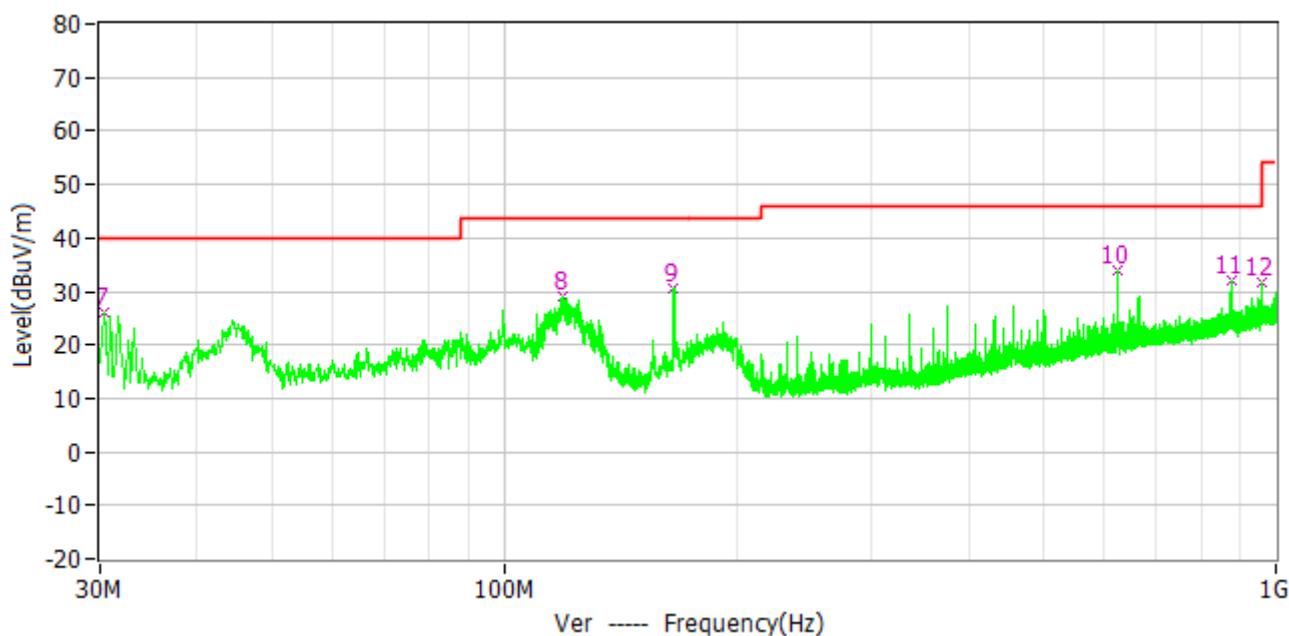
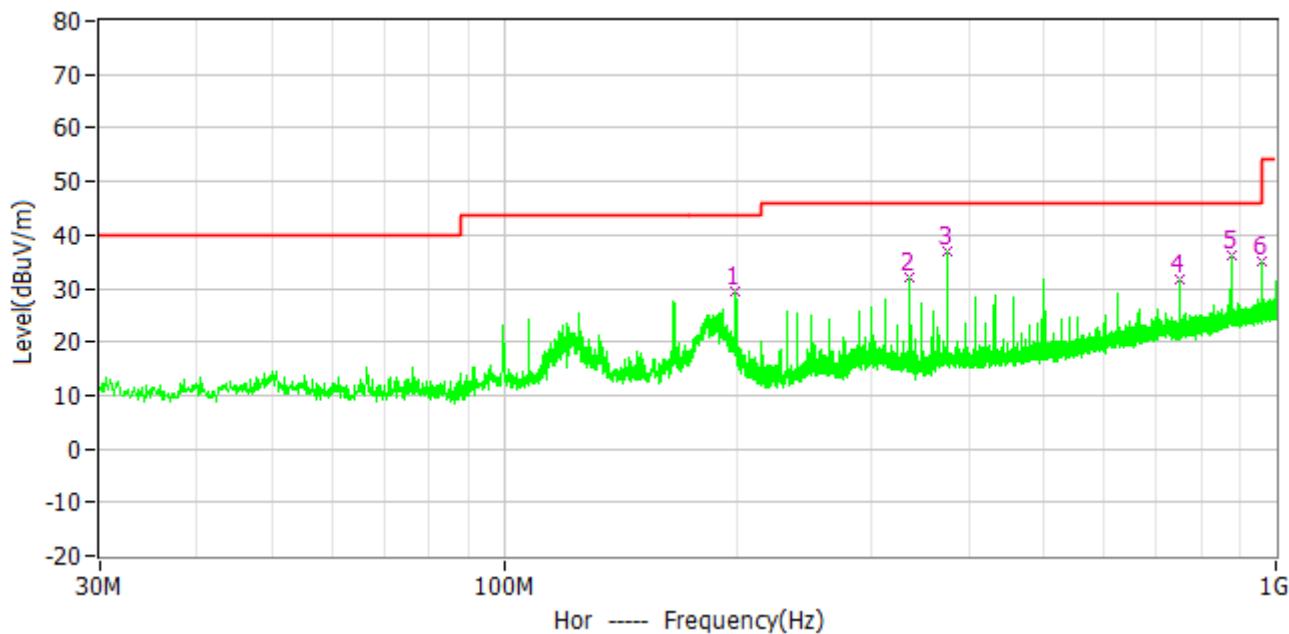


TEST REPORT

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	199.168MHz	43.5	29.3	-14.2	17.9	11.4	PK	Hor
2*	336.035MHz	46.0	31.9	-14.1	16.0	15.9	PK	Hor
3*	375.029MHz	46.0	36.9	-9.1	20.0	16.9	PK	Hor
4*	750.031MHz	46.0	31.7	-14.3	7.5	24.2	PK	Hor
5*	875.064MHz	46.0	36.2	-9.8	10.3	25.9	PK	Hor
6*	959.745MHz	46.0	35.2	-10.8	8.4	26.8	PK	Hor
7*	30.388MHz	40.0	26.0	-14.0	13.9	12.1	PK	Ver
8*	119.046MHz	43.5	29.1	-14.4	17.1	12.0	PK	Ver
9*	165.994MHz	43.5	30.7	-12.8	16.6	14.1	PK	Ver
10*	624.998MHz	46.0	34.0	-12.0	11.5	22.5	PK	Ver
11*	875.064MHz	46.0	32.0	-14.0	6.1	25.9	PK	Ver
12*	959.745MHz	46.0	31.6	-14.4	4.8	26.8	PK	Ver

TEST REPORT

Antenna2: PCB antenna, 2402MHz

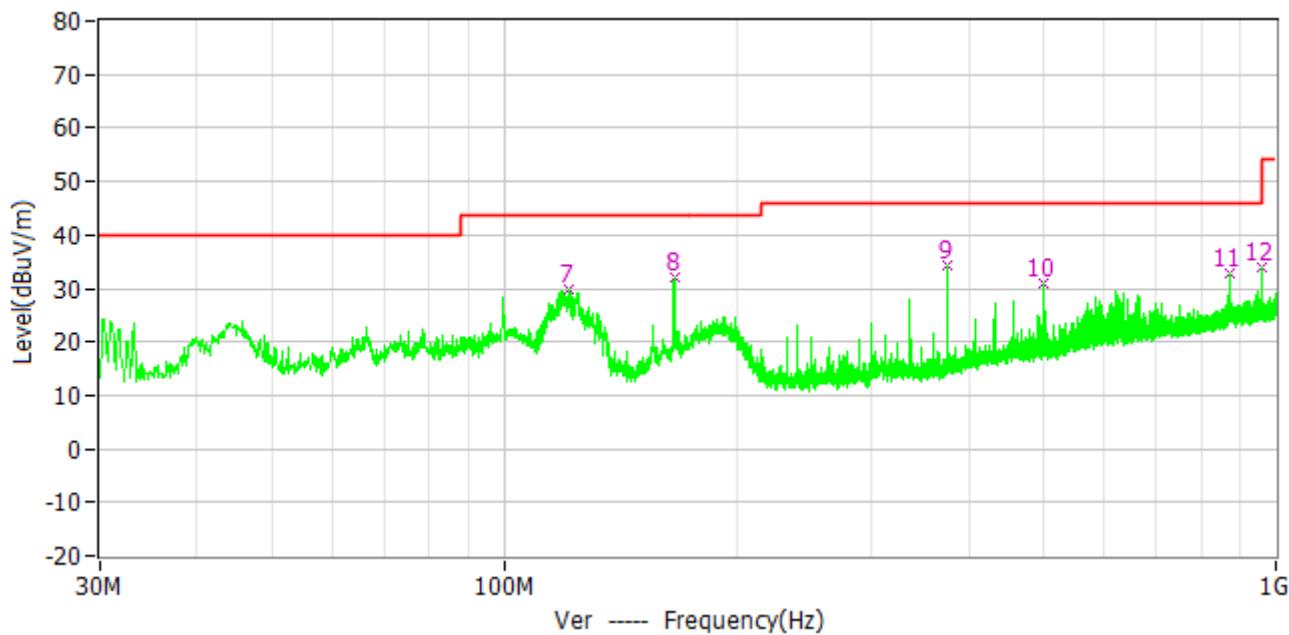
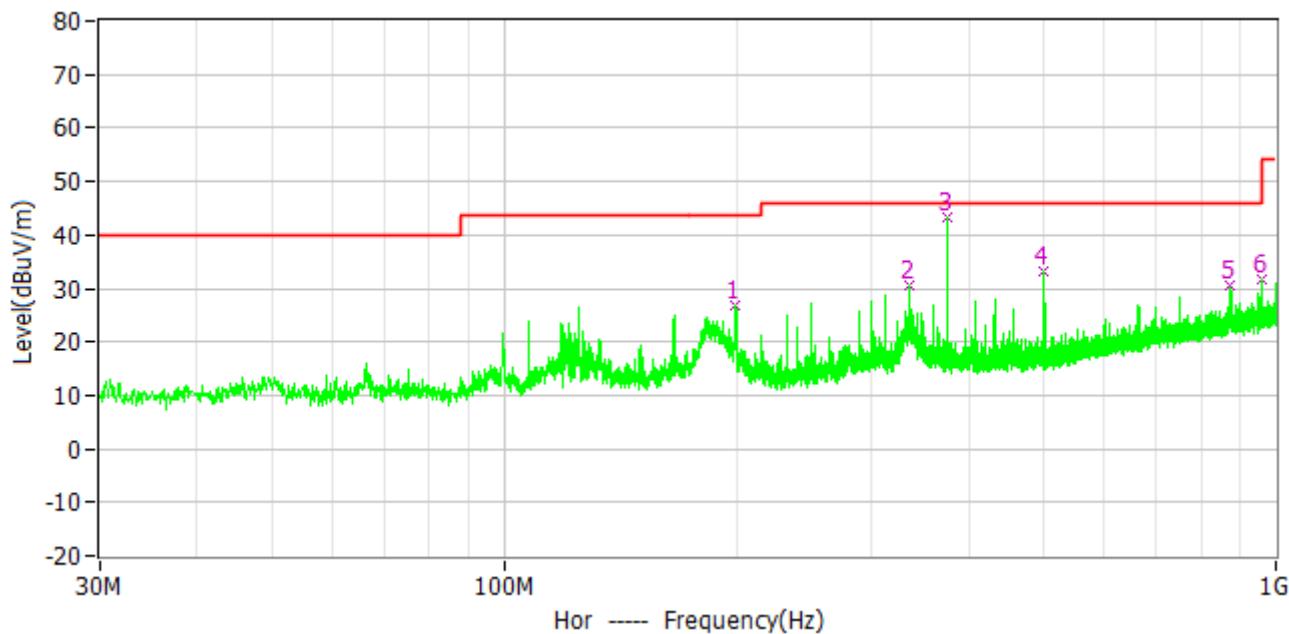


TEST REPORT

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	199.847MHz	43.5	26.9	-16.6	15.6	11.3	PK	Hor
2*	336.035MHz	46.0	30.4	-15.6	14.5	15.9	PK	Hor
3*	375.029MHz	46.0	43.3	-2.7	26.4	16.9	PK	Hor
4*	499.965MHz	46.0	33.2	-12.8	13.4	19.8	PK	Hor
5*	869.244MHz	46.0	30.4	-15.6	4.6	25.8	PK	Hor
6*	959.745MHz	46.0	31.6	-14.4	4.8	26.8	PK	Hor
7*	121.277MHz	43.5	29.7	-13.8	17.5	12.2	PK	Ver
8*	166.576MHz	43.5	32.2	-11.3	18.1	14.1	PK	Ver
9*	375.029MHz	46.0	34.4	-11.6	17.5	16.9	PK	Ver
10*	499.965MHz	46.0	31.0	-15.0	11.2	19.8	PK	Ver
11*	869.147MHz	46.0	32.8	-13.2	7.0	25.8	PK	Ver
12*	959.745MHz	46.0	34.1	-11.9	7.3	26.8	PK	Ver

TEST REPORT

Antenna2: PCB antenna, 2441MHz

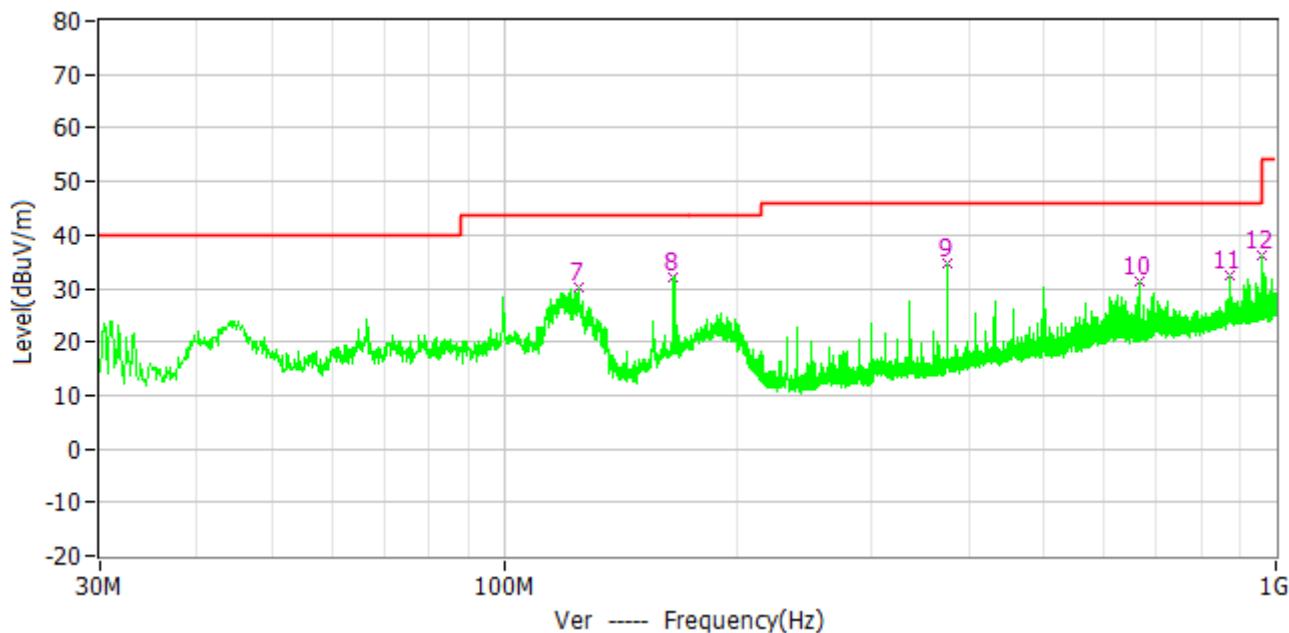
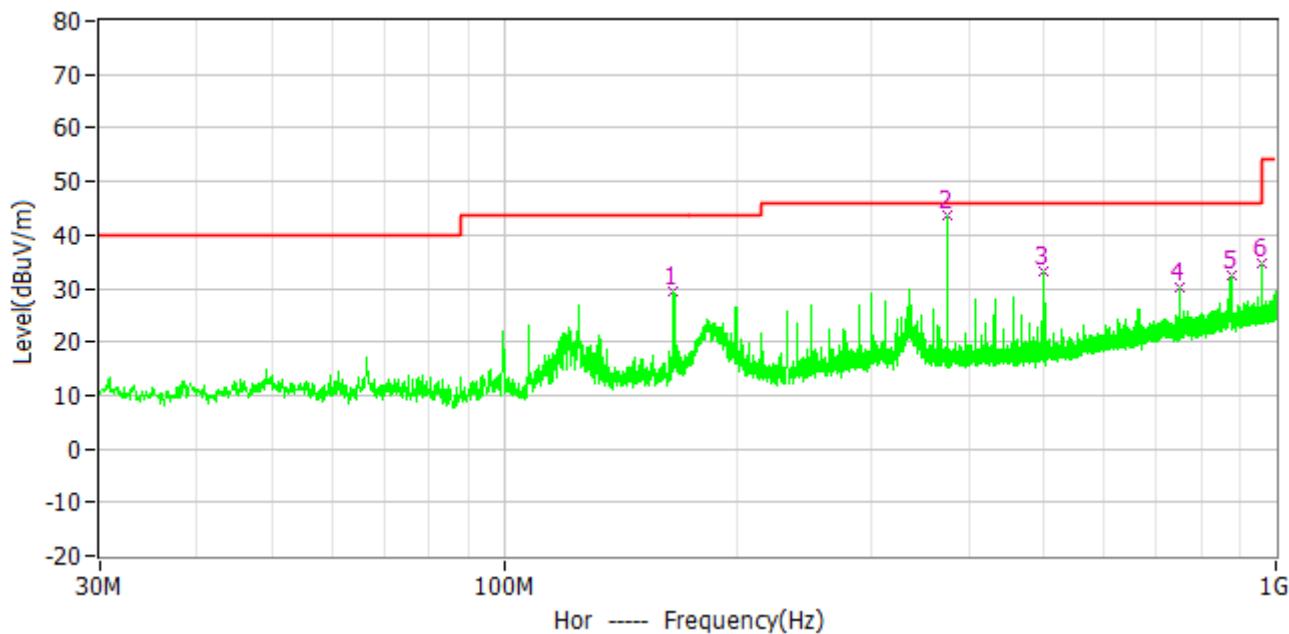


TEST REPORT

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	165.994MHz	43.5	29.4	-14.1	15.3	14.1	PK	Hor
2*	375.029MHz	46.0	43.8	-2.2	26.9	16.9	PK	Hor
3*	499.965MHz	46.0	33.3	-12.7	13.5	19.8	PK	Hor
4*	750.031MHz	46.0	30.3	-15.7	6.1	24.2	PK	Hor
5*	874.967MHz	46.0	32.6	-13.4	6.7	25.9	PK	Hor
6*	959.745MHz	46.0	34.8	-11.2	8.0	26.8	PK	Hor
7*	124.963MHz	43.5	30.3	-13.2	17.7	12.6	PK	Ver
8*	165.994MHz	43.5	32.2	-11.3	18.1	14.1	PK	Ver
9*	375.029MHz	46.0	34.5	-11.5	17.6	16.9	PK	Ver
10*	666.417MHz	46.0	31.2	-14.8	8.1	23.1	PK	Ver
11*	869.147MHz	46.0	32.3	-13.7	6.5	25.8	PK	Ver
12*	959.745MHz	46.0	36.1	-9.9	9.3	26.8	PK	Ver

TEST REPORT

Antenna2: PCB antenna, 2480MHz

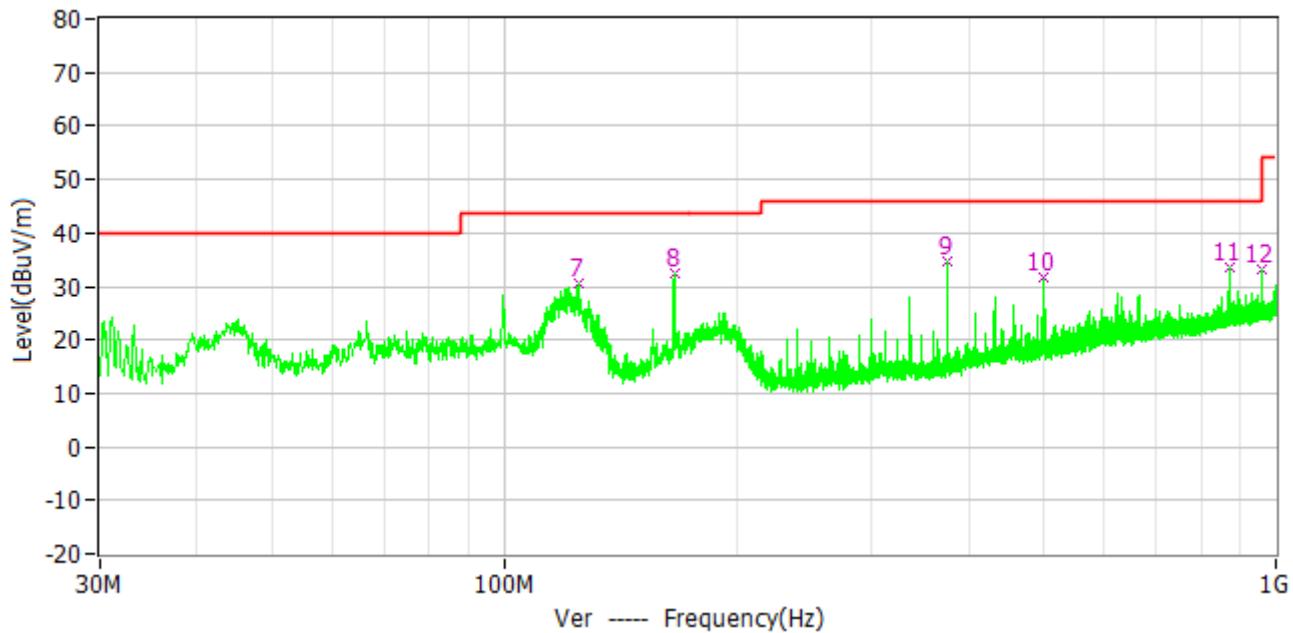
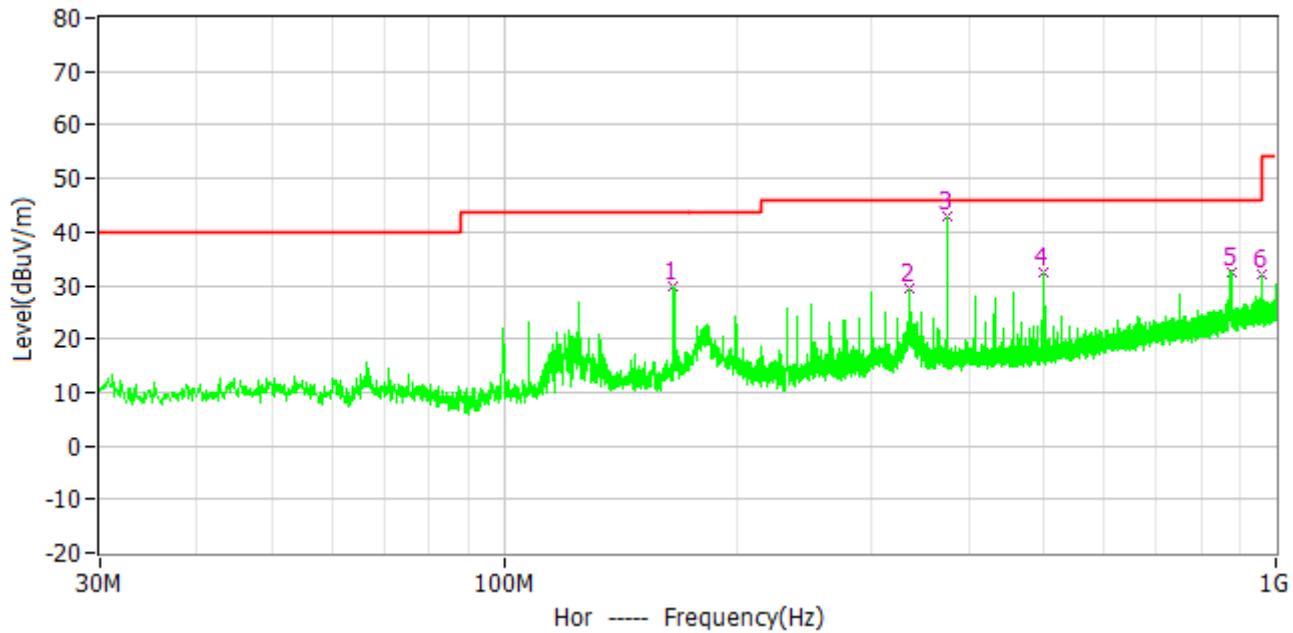


TEST REPORT

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	165.994MHz	43.5	30.0	-13.5	15.9	14.1	PK	Hor
2*	336.035MHz	46.0	29.5	-16.5	13.6	15.9	PK	Hor
3*	375.029MHz	46.0	42.8	-3.2	25.9	16.9	PK	Hor
4*	499.965MHz	46.0	32.6	-13.4	12.8	19.8	PK	Hor
5*	874.967MHz	46.0	32.6	-13.4	6.7	25.9	PK	Hor
6*	959.745MHz	46.0	32.0	-14.0	5.2	26.8	PK	Hor
7*	124.963MHz	43.5	30.5	-13.0	17.9	12.6	PK	Ver
8*	166.576MHz	43.5	32.3	-11.2	18.2	14.1	PK	Ver
9*	375.029MHz	46.0	34.6	-11.4	17.7	16.9	PK	Ver
10*	499.965MHz	46.0	31.5	-14.5	11.7	19.8	PK	Ver
11*	869.826MHz	46.0	33.6	-12.4	7.8	25.8	PK	Ver
12*	959.745MHz	46.0	33.2	-12.8	6.4	26.8	PK	Ver

TEST REPORT

Antenna3: Chip antenna, 2402MHz

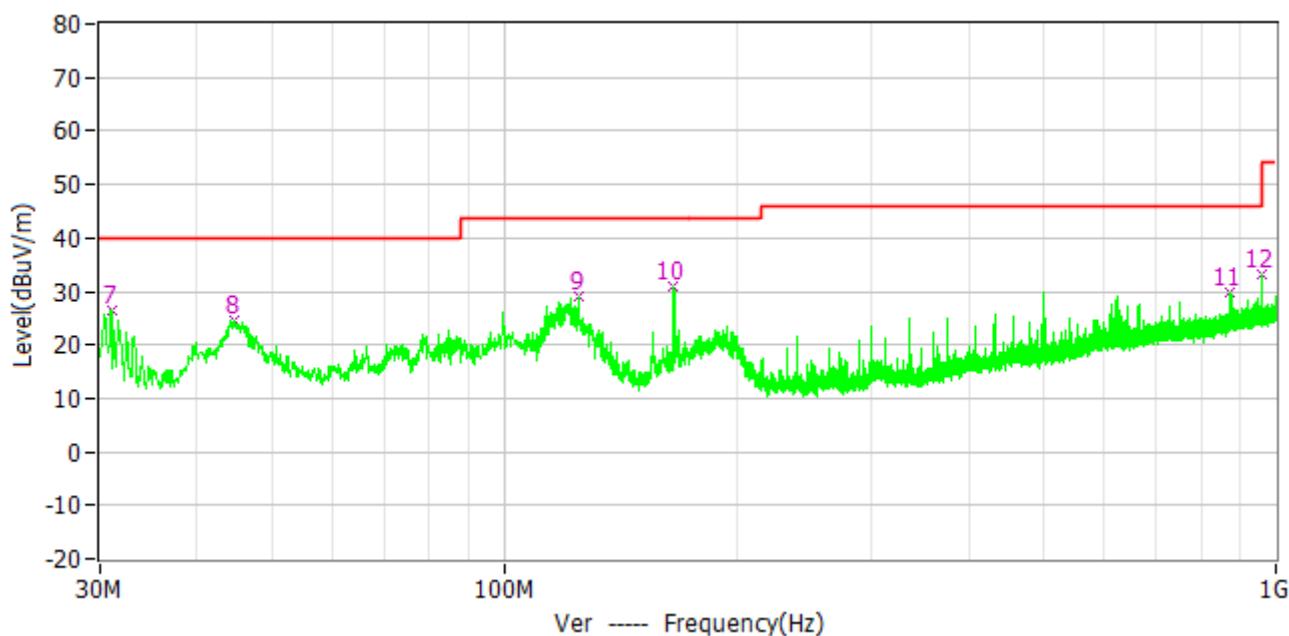
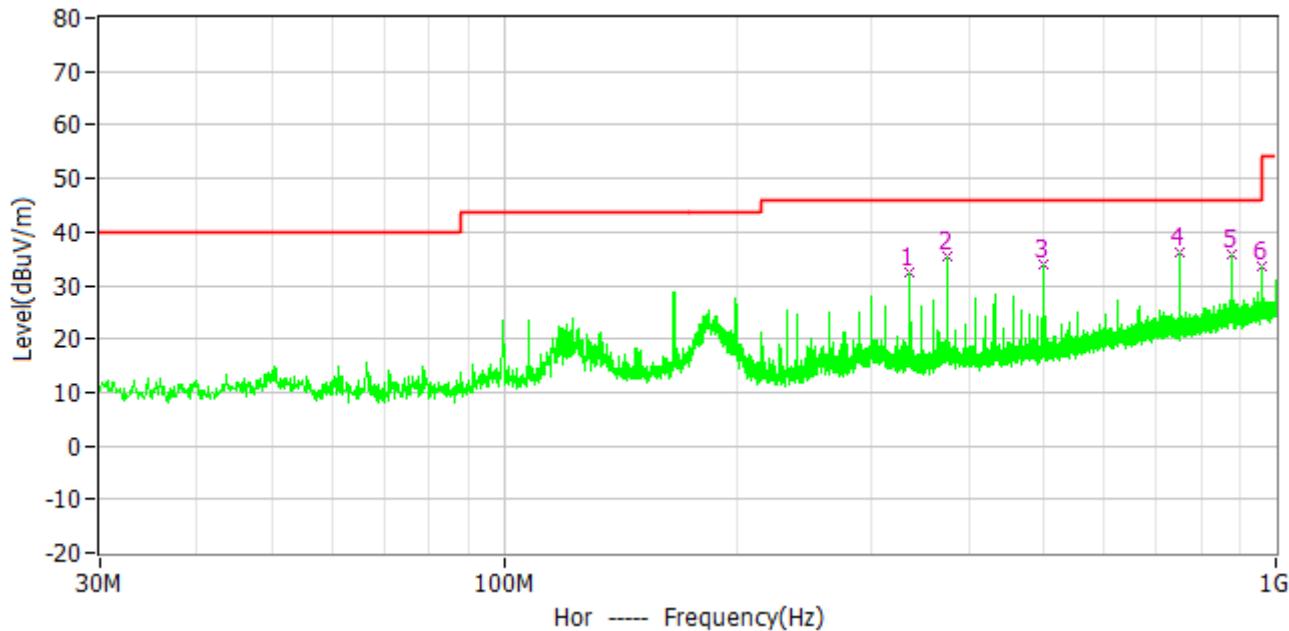


TEST REPORT

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	336.035MHz	46.0	32.5	-13.5	16.6	15.9	PK	Hor
2*	375.029MHz	46.0	35.4	-10.6	18.5	16.9	PK	Hor
3*	499.965MHz	46.0	34.1	-11.9	14.3	19.8	PK	Hor
4*	750.031MHz	46.0	36.3	-9.7	12.1	24.2	PK	Hor
5*	875.064MHz	46.0	35.8	-10.2	9.9	25.9	PK	Hor
6*	959.745MHz	46.0	33.6	-12.4	6.8	26.8	PK	Hor
7*	31.067MHz	40.0	26.4	-13.6	14.2	12.2	PK	Ver
8*	44.744MHz	40.0	24.7	-15.3	10.6	14.1	PK	Ver
9*	124.769MHz	43.5	29.1	-14.4	16.5	12.6	PK	Ver
10*	165.994MHz	43.5	31.0	-12.5	16.9	14.1	PK	Ver
11*	869.147MHz	46.0	30.0	-16.0	4.2	25.8	PK	Ver
12*	959.745MHz	46.0	33.2	-12.8	6.4	26.8	PK	Ver

TEST REPORT

Antenna3: Chip antenna, 2441MHz

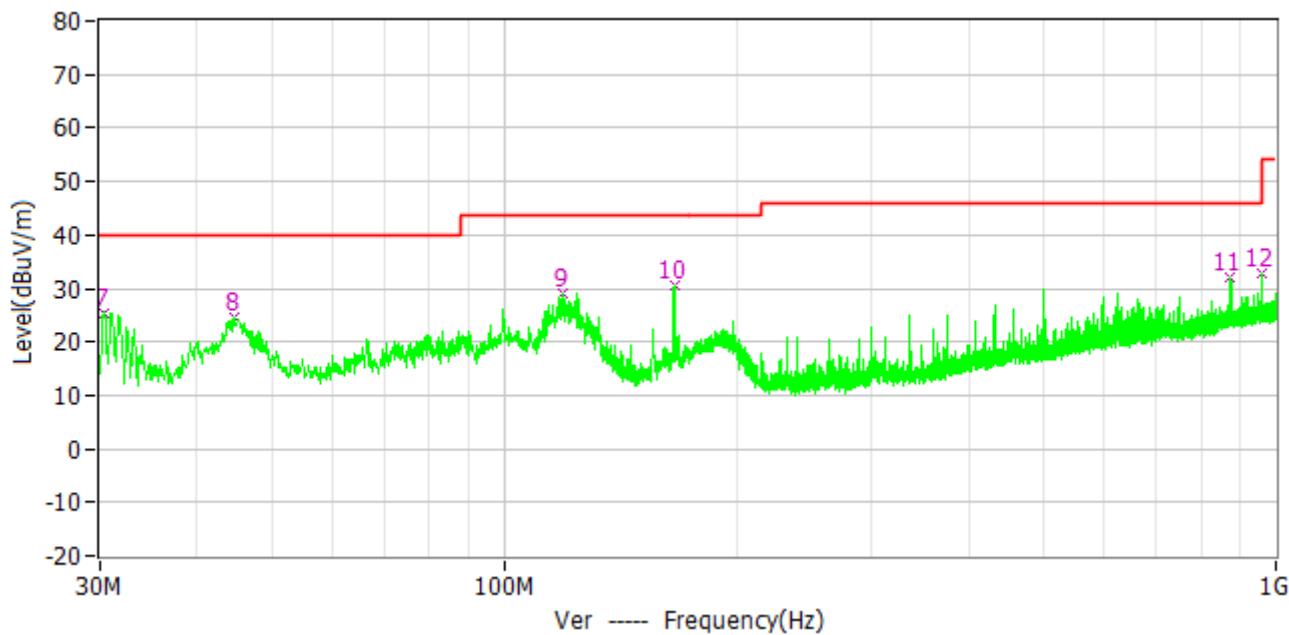
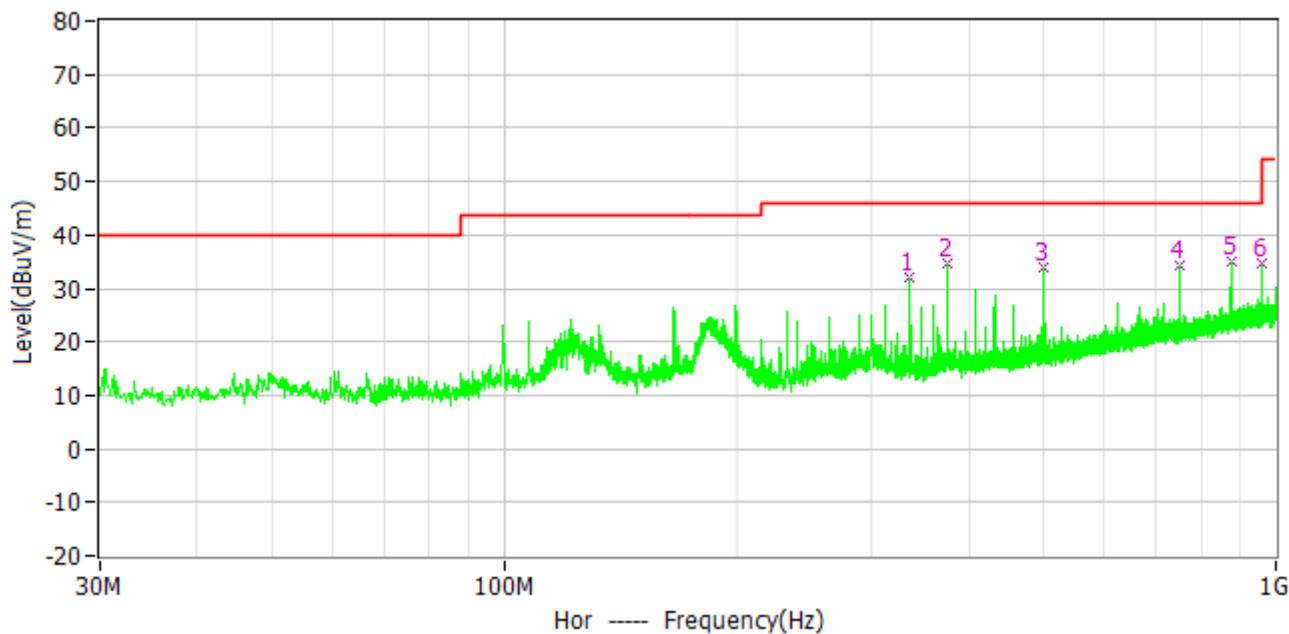


TEST REPORT

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	336.035MHz	46.0	32.2	-13.8	16.3	15.9	PK	Hor
2*	375.029MHz	46.0	34.6	-11.4	17.7	16.9	PK	Hor
3*	499.965MHz	46.0	34.1	-11.9	14.3	19.8	PK	Hor
4*	750.031MHz	46.0	34.2	-11.8	10.0	24.2	PK	Hor
5*	875.064MHz	46.0	35.2	-10.8	9.3	25.9	PK	Hor
6*	959.745MHz	46.0	34.5	-11.5	7.7	26.8	PK	Hor
7*	30.291MHz	40.0	25.5	-14.5	13.5	12.0	PK	Ver
8*	44.647MHz	40.0	24.4	-15.6	10.3	14.1	PK	Ver
9*	119.434MHz	43.5	29.2	-14.3	17.2	12.0	PK	Ver
10*	166.576MHz	43.5	30.6	-12.9	16.5	14.1	PK	Ver
11*	869.147MHz	46.0	32.0	-14.0	6.2	25.8	PK	Ver
12*	959.745MHz	46.0	32.7	-13.3	5.9	26.8	PK	Ver

TEST REPORT

Antenna3: Chip antenna, 2480MHz

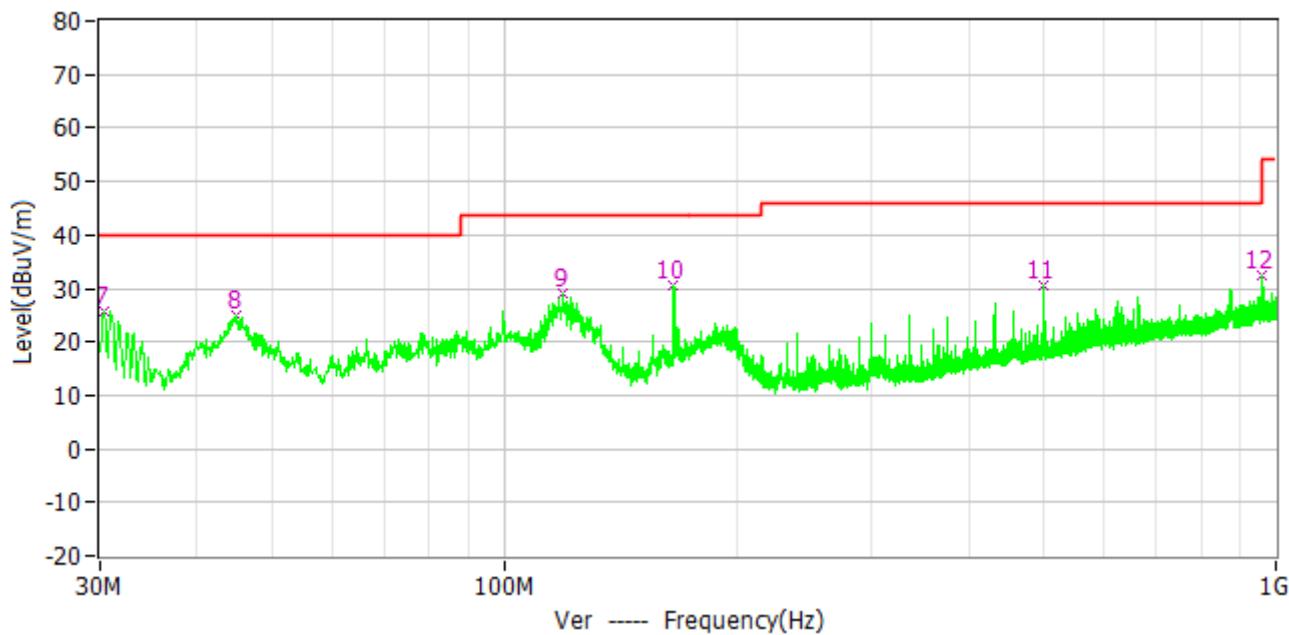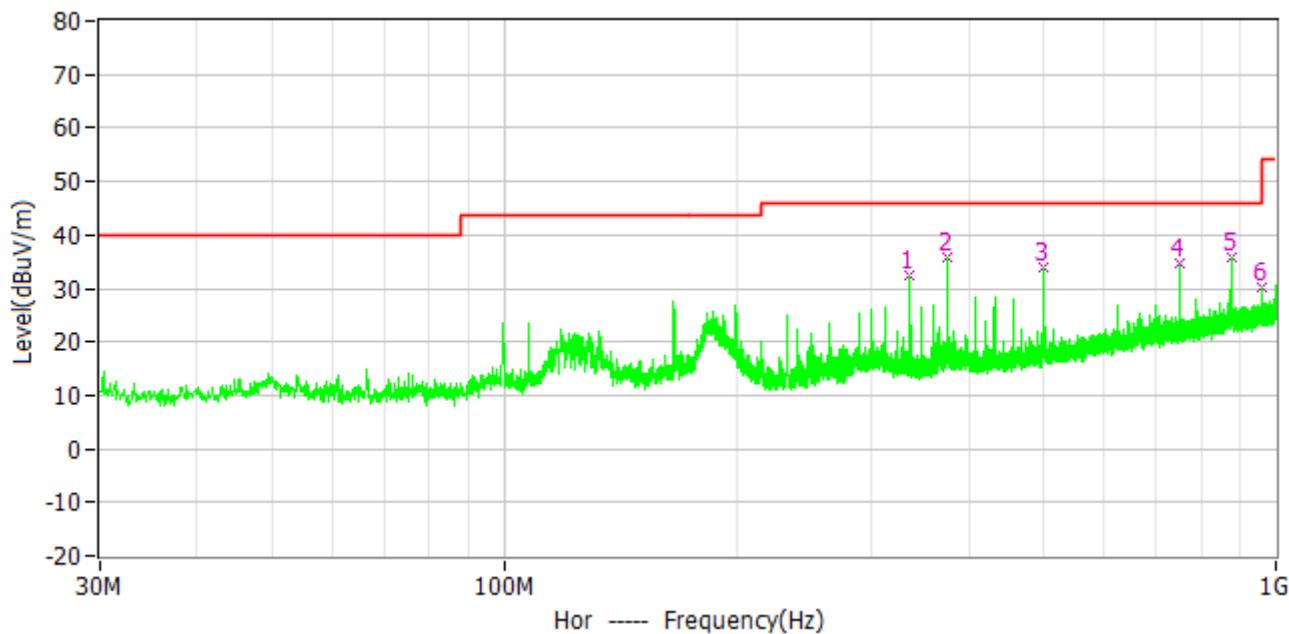

TEST REPORT

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	336.035MHz	46.0	32.4	-13.6	16.5	15.9	PK	Hor
2*	375.029MHz	46.0	35.9	-10.1	19.0	16.9	PK	Hor
3*	499.965MHz	46.0	33.8	-12.2	14.0	19.8	PK	Hor
4*	750.031MHz	46.0	34.5	-11.5	10.3	24.2	PK	Hor
5*	875.064MHz	46.0	35.7	-10.3	9.8	25.9	PK	Hor
6*	959.745MHz	46.0	30.1	-15.9	3.3	26.8	PK	Hor
7*	30.291MHz	40.0	25.8	-14.2	13.8	12.0	PK	Ver
8*	45.035MHz	40.0	24.9	-15.1	10.8	14.1	PK	Ver
9*	119.531MHz	43.5	29.0	-14.5	17.0	12.0	PK	Ver
10*	165.994MHz	43.5	30.5	-13.0	16.4	14.1	PK	Ver
11*	499.965MHz	46.0	30.7	-15.3	10.9	19.8	PK	Ver
12*	959.648MHz	46.0	32.6	-13.4	5.8	26.8	PK	Ver

TEST REPORT
Test result of 1GHz to 25GHz:

Antenna1: Pole antenna

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	44.60	74.00	29.40	PK
	V	2390.00	43.10	74.00	30.90	PK
	H	4804.00	43.60	74.00	30.40	PK
	V	4804.00	42.70	74.00	31.30	PK
M	H	4880.00	42.20	74.00	31.80	PK
	V	4880.00	41.80	74.00	32.20	PK
H	H	2483.50	50.94	74.00	23.06	PK
	V	2483.50	43.80	74.00	30.20	PK
	H	4960.00	42.30	74.00	31.70	PK
	V	4960.00	41.90	74.00	32.10	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20$ dB/m;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

TEST REPORT

Antenna2: PCB antenna

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	41.60	74.00	32.40	PK
	V	2390.00	42.10	74.00	31.90	PK
	H	4804.00	42.50	74.00	31.50	PK
	V	4804.00	42.60	74.00	31.40	PK
M	H	4880.00	42.30	74.00	31.70	PK
	V	4880.00	41.20	74.00	32.80	PK
H	H	2483.50	46.10	74.00	27.90	PK
	V	2483.50	52.20	74.00	21.80	PK
	H	4960.00	42.50	74.00	31.50	PK
	V	4960.00	43.10	74.00	30.90	PK

- Remark:
1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB}/\text{m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB}/\text{m} = 10.20\text{dBuV}/\text{m}$;
Margin = $40.00\text{dBuV}/\text{m} - 10.20\text{dBuV}/\text{m} = 29.80\text{dB}$.

TEST REPORT

Antenna3: Chip antenna

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	42.60	74.00	31.40	PK
	V	2390.00	42.80	74.00	31.20	PK
	H	4804.00	41.50	74.00	32.50	PK
	V	4804.00	42.30	74.00	31.70	PK
M	H	4880.00	43.10	74.00	30.90	PK
	V	4880.00	42.90	74.00	31.10	PK
H	H	2483.50	50.20	74.00	23.80	PK
	V	2483.50	47.50	74.00	26.50	PK
	H	4960.00	43.20	74.00	30.80	PK
	V	4960.00	43.50	74.00	30.50	PK

- Remark:
1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB}/\text{m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB}/\text{m} = 10.20\text{dBuV}/\text{m}$;
Margin = $40.00\text{dBuV}/\text{m} - 10.20\text{dBuV}/\text{m} = 29.80\text{dB}$.

TEST REPORT


7 Conducted Spurious Emissions & Band Edge

Test result: Pass

7.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

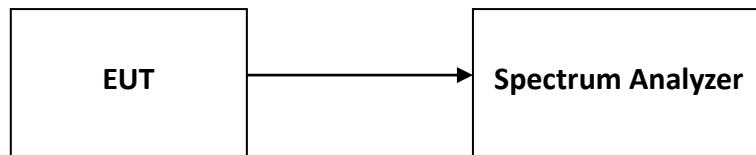

7.3 Measurement Procedure

- a) Connect the EMI receiver or spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described in step e)
- b) Set the EUT to the lowest frequency channel (for the hopping on test, the hopping sequence shall include the lowest frequency channel).
- c) Set the EUT to operate at maximum output power and 100% duty cycle, or equivalent “normal mode of operation” as specified in 6.10.3. of ANSI C63.10.
- d) If using the radiated method, then use the applicable procedure(s) of 6.4, 6.5, or 6.6 of ANSI C63.10, and orient the EUT and measurement antenna positions to produce the highest emission level.
- e) Perform the test as follows:
 - 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
 - 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
 - 3) Attenuation: Auto (at least 10 dB preferred).
 - 4) Sweep time: Coupled.
 - 5) Resolution bandwidth: 100 kHz
 - 6) Video bandwidth: 300 kHz
 - 7) Detector: Peak
 - 8) Trace: Max hold
- f) Allow the trace to stabilize. For the test with the hopping function turned ON, this can take several minutes to achieve a reasonable probability of intercepting any emissions due to oscillator overshoot.

TEST REPORT

- g) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- h) Repeat step c) through step e) for every applicable modulation.
- i) Set the EUT to the highest frequency channel (for the hopping on test, the hopping sequence shall include the highest frequency channel) and repeat step c) through step d).
- j) The band-edge measurement shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


7.4 Test Results of Conducted Spurious Emissions & Band Edge

Please refer to Appendix A

TEST REPORT**8 Power line conducted emission****Test result:** Pass**8.1 Limit**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

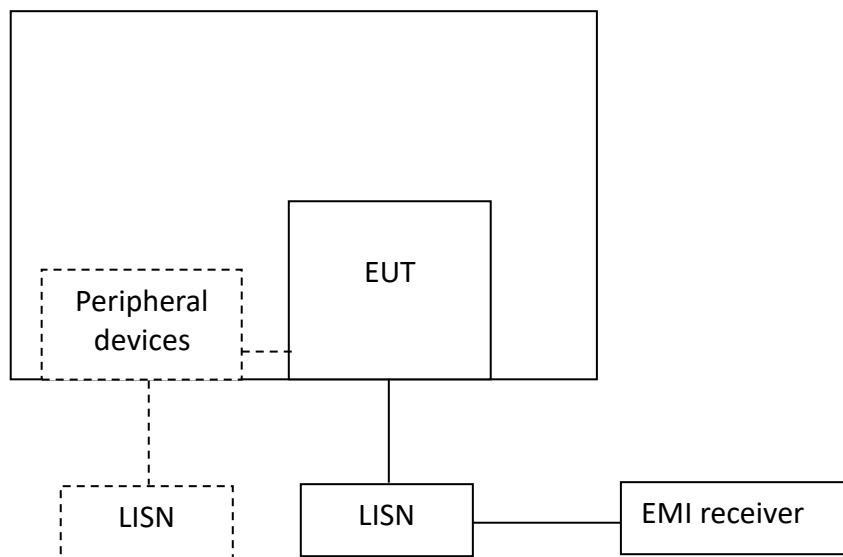
8.2 Test Configuration

TEST REPORT**8.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

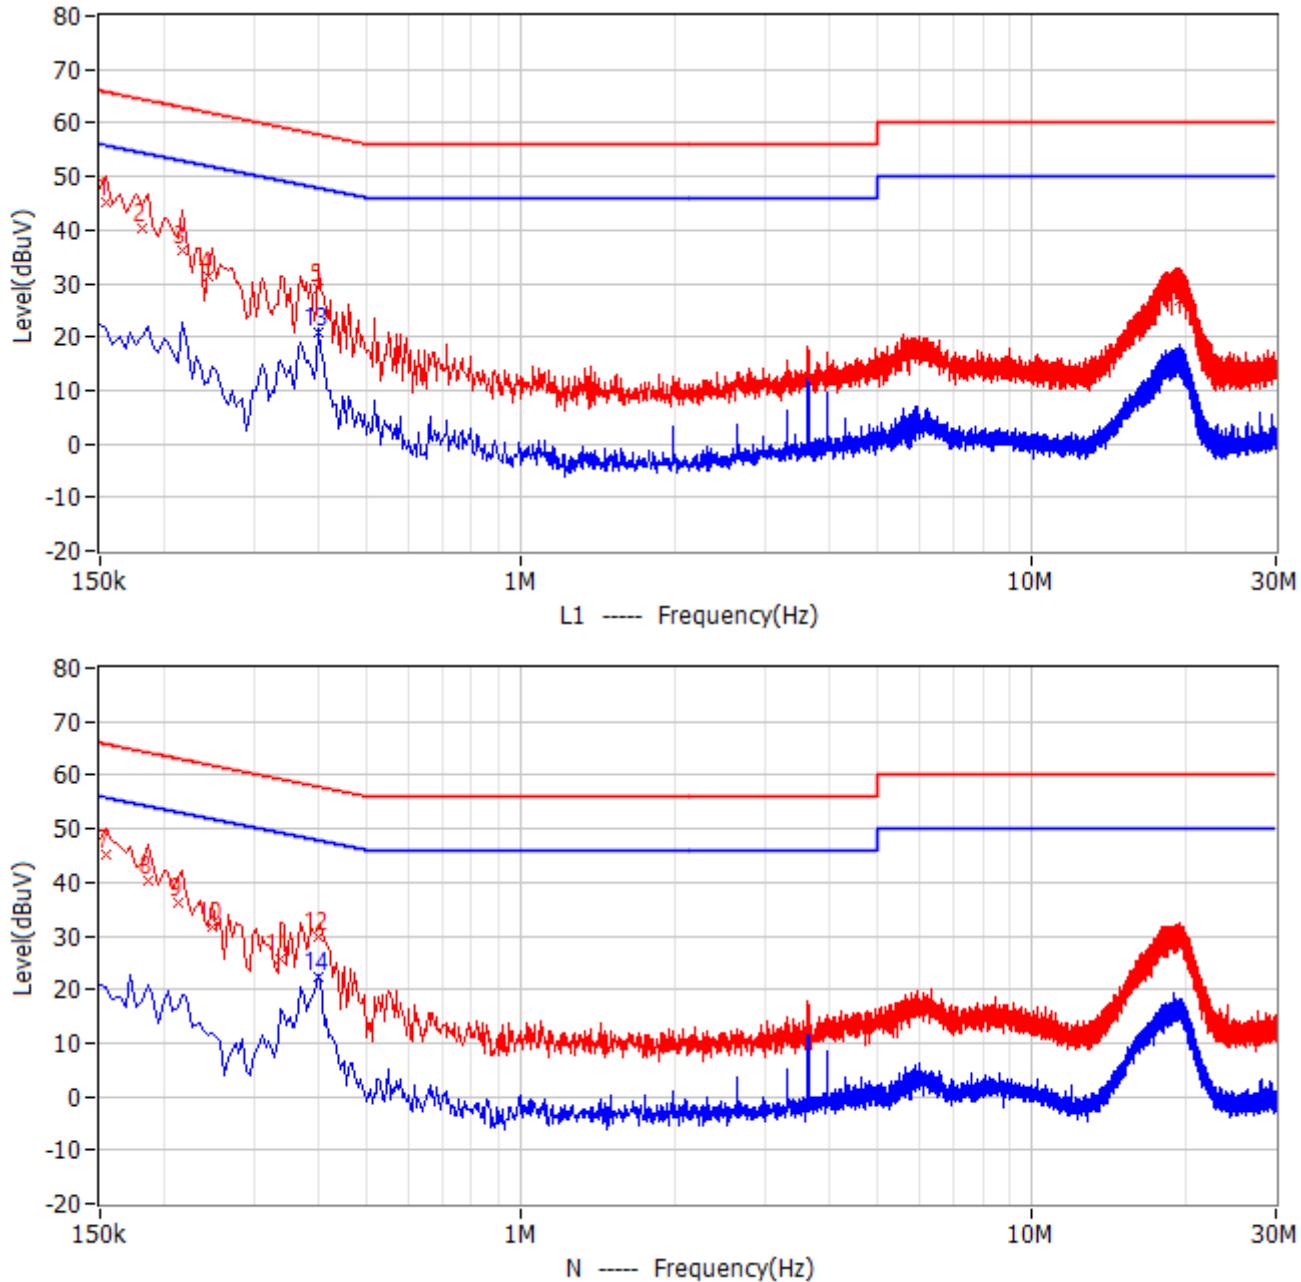TEST REPORT
8.4 Test Results of Power line conducted emission


No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	154.500kHz	65.8	45.0	-20.8	38.8	6.2	QP	L1
2	181.500kHz	64.4	40.4	-24.0	34.2	6.2	QP	L1
3	217.500kHz	62.9	36.1	-26.9	29.9	6.2	QP	L1
4	244.500kHz	61.9	31.4	-30.5	25.2	6.2	QP	L1
5	402.000kHz	57.8	28.9	-28.9	22.7	6.2	QP	L1

TEST REPORT

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
6	19.424MHz	60.0	27.0	-33.0	19.8	7.2	QP	L1
7	154.500kHz	65.8	45.1	-20.6	38.9	6.2	QP	N
8	186.000kHz	64.2	40.2	-24.0	34.1	6.1	QP	N
9	213.000kHz	63.1	36.0	-27.1	29.8	6.2	QP	N
10	249.000kHz	61.8	31.5	-30.3	25.3	6.2	QP	N
11	339.000kHz	59.2	25.6	-33.6	19.4	6.2	QP	N
12	402.000kHz	57.8	30.0	-27.8	23.8	6.2	QP	N
13	402.000kHz	47.8	21.0	-26.8	14.8	6.2	CAV	L1
14	402.000kHz	47.8	22.2	-25.6	16.0	6.2	CAV	N

- Remark:
1. Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Level = Original Receiver Reading + Factor
 3. Delta= Level - Limit
 4. If the PK Level is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
Then Factor = 10.00 + 2.00 = 12.00dB;
Level = 10dBuV + 12.00dB = 22.00dBuV;
Delta = 22.00dBuV - 66.00dBuV = -44.00dB.

TEST REPORT


9 Number of Hopping Frequencies

Test result: Pass

9.1 Limit

Number of Hopping Frequencies in the 2400-2483.5 MHz band shall use at least 15 channels.

9.2 Test Configuration

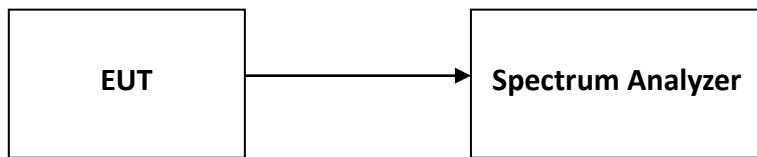

9.3 Test procedure and test setup

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

9.4 Test Results of Number of Hopping Frequencies

Please refer to Appendix A

TEST REPORT


10 Dwell Time

Test result: Pass

10.1 Limit

The dwell time on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Test Configuration

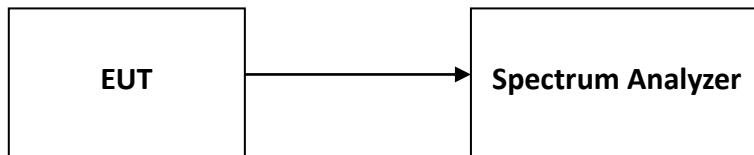

10.3 Test procedure and test setup

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $>> 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\text{(Number of hops in the period specified in the requirements)} = \text{(number of hops on spectrum analyzer)} \times \text{(period specified in the requirements / analyzer sweep time)}$$

TEST REPORT

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

10.4 Test Results of Dwell Time

Please refer to Appendix A

TEST REPORT

11 Occupied Bandwidth

Test result: **Tested**

11.1 Limit


None

11.2 Measurement Procedure

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

11.3 Test Configuration

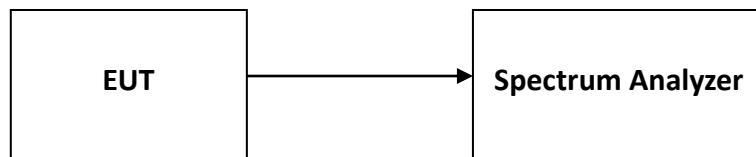

11.4 The results of Occupied Bandwidth

Please refer to Appendix A

TEST REPORT

12 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:


The EUT uses an internal IPEX antenna connector, the user cannot easily open the inside of the device, so it can comply with the provisions of this section.

TEST REPORT**Appendix A: Test results****20dB Emission Bandwidth****Test Result**


TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.909	2401.544	2402.453	---	---
DH5	Ant1	2441	1.029	2440.493	2441.522	---	---
DH5	Ant1	2480	0.996	2479.496	2480.492	---	---
2DH5	Ant1	2402	1.356	2401.331	2402.687	---	---
2DH5	Ant1	2441	1.332	2440.328	2441.660	---	---
2DH5	Ant1	2480	1.344	2479.319	2480.663	---	---
3DH5	Ant1	2402	1.290	2401.355	2402.645	---	---
3DH5	Ant1	2441	1.332	2440.331	2441.663	---	---
3DH5	Ant1	2480	1.317	2479.340	2480.657	---	---

TEST REPORT


Test Graphs

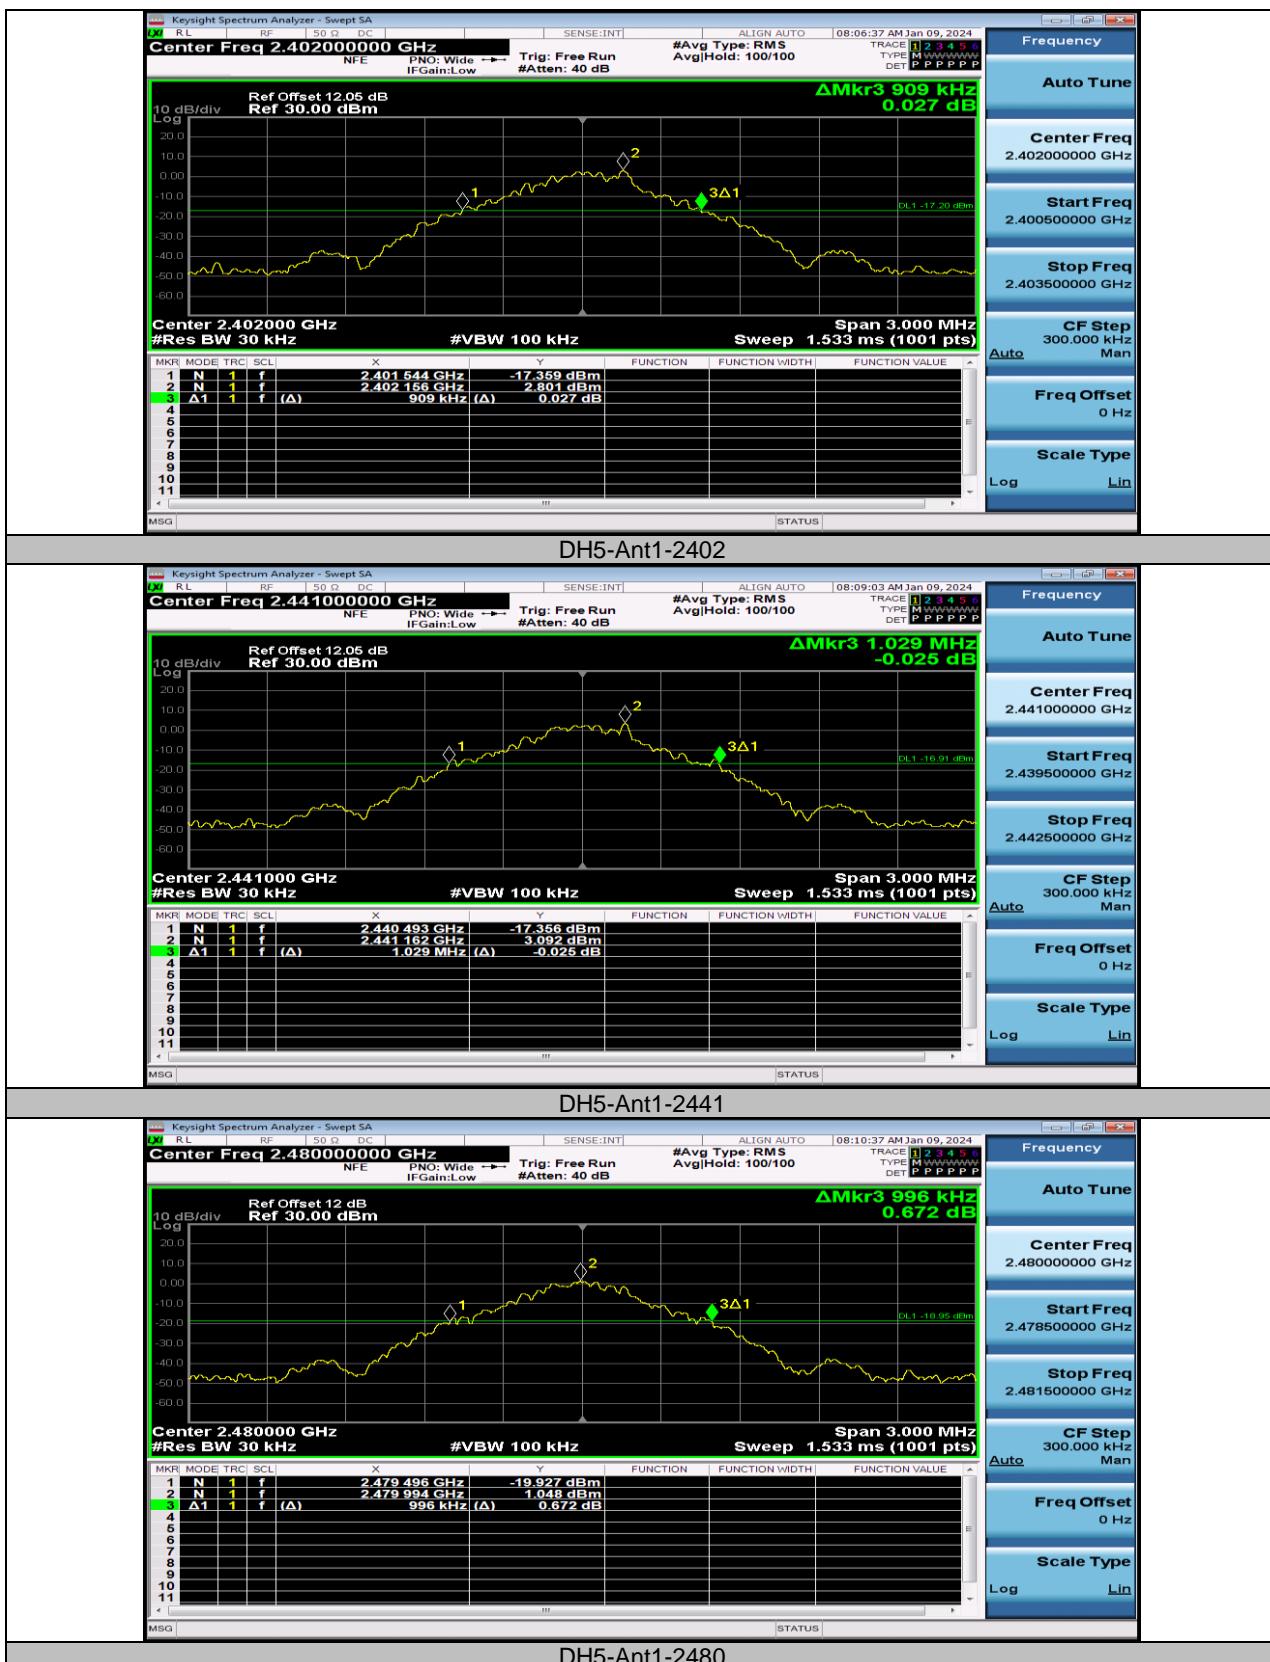

TEST REPORT

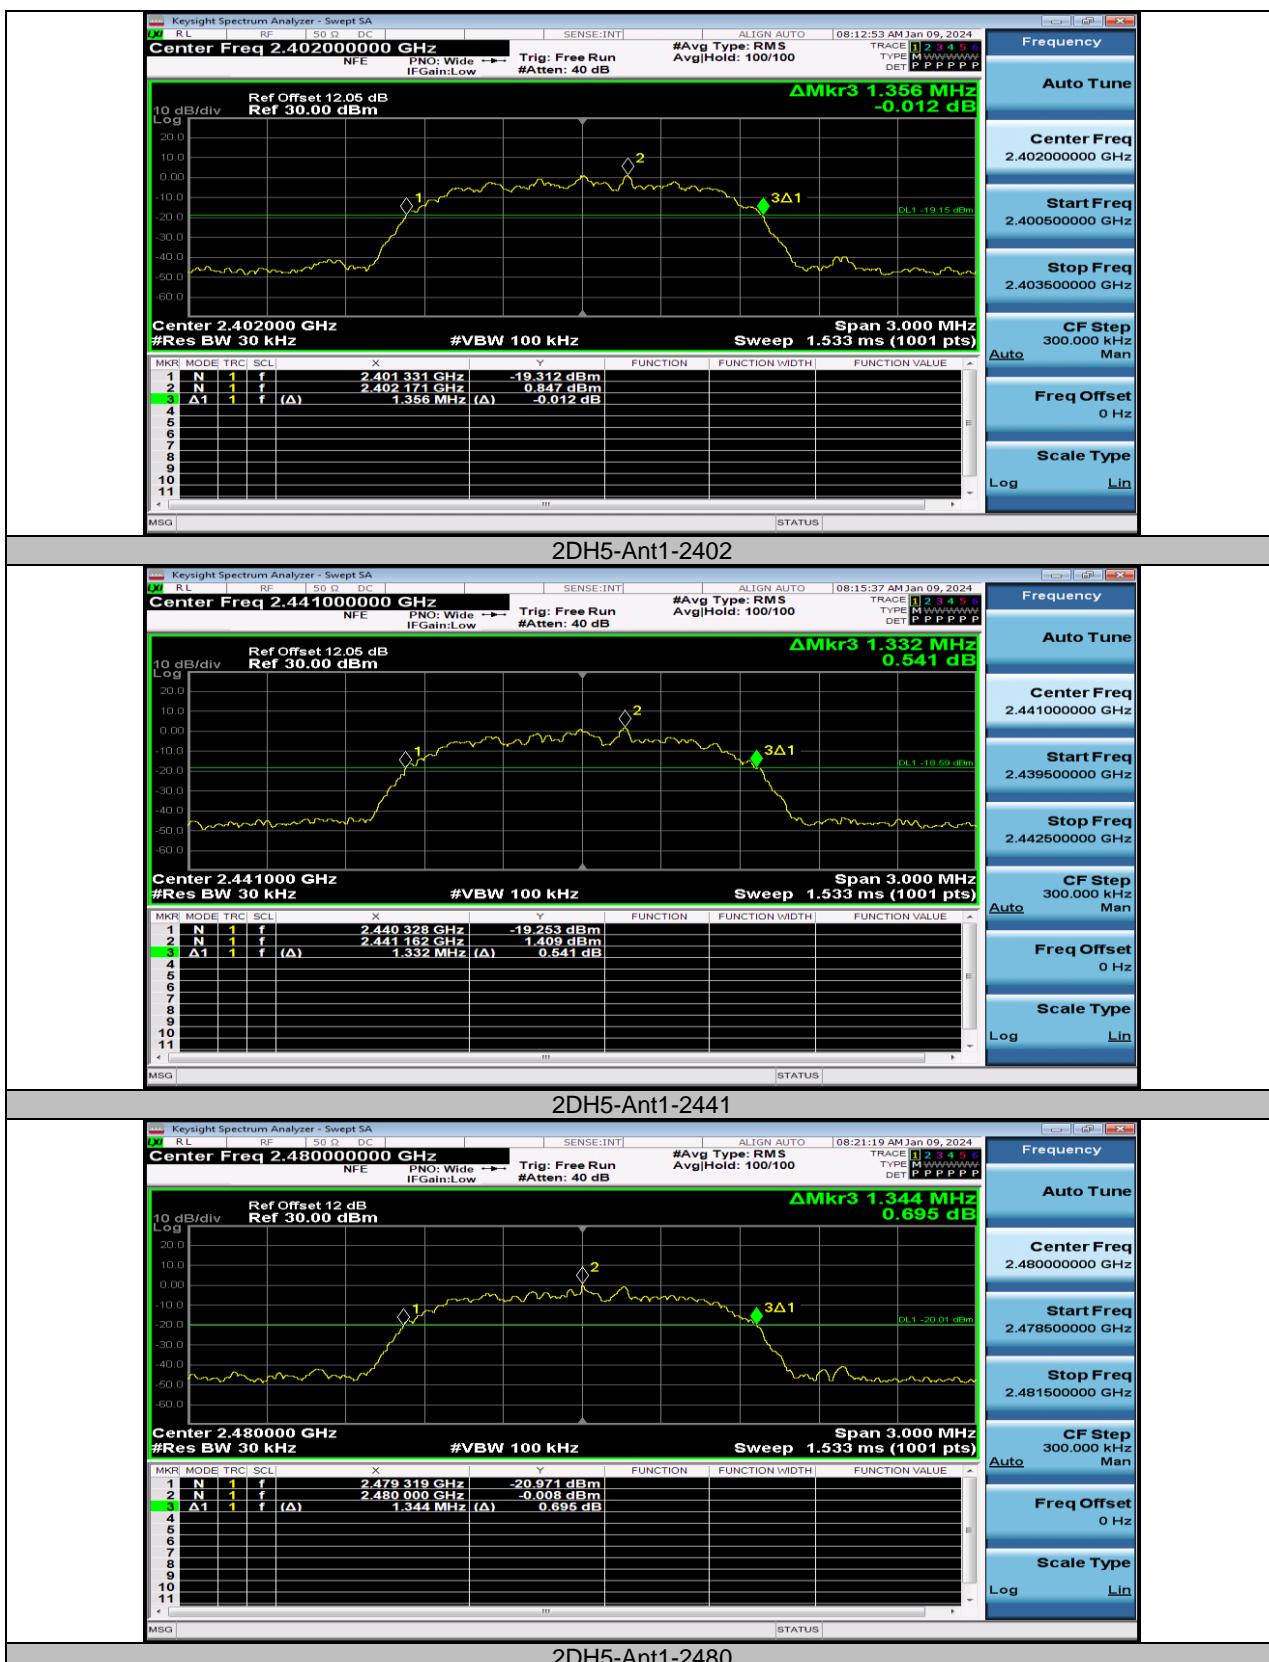

TEST REPORT

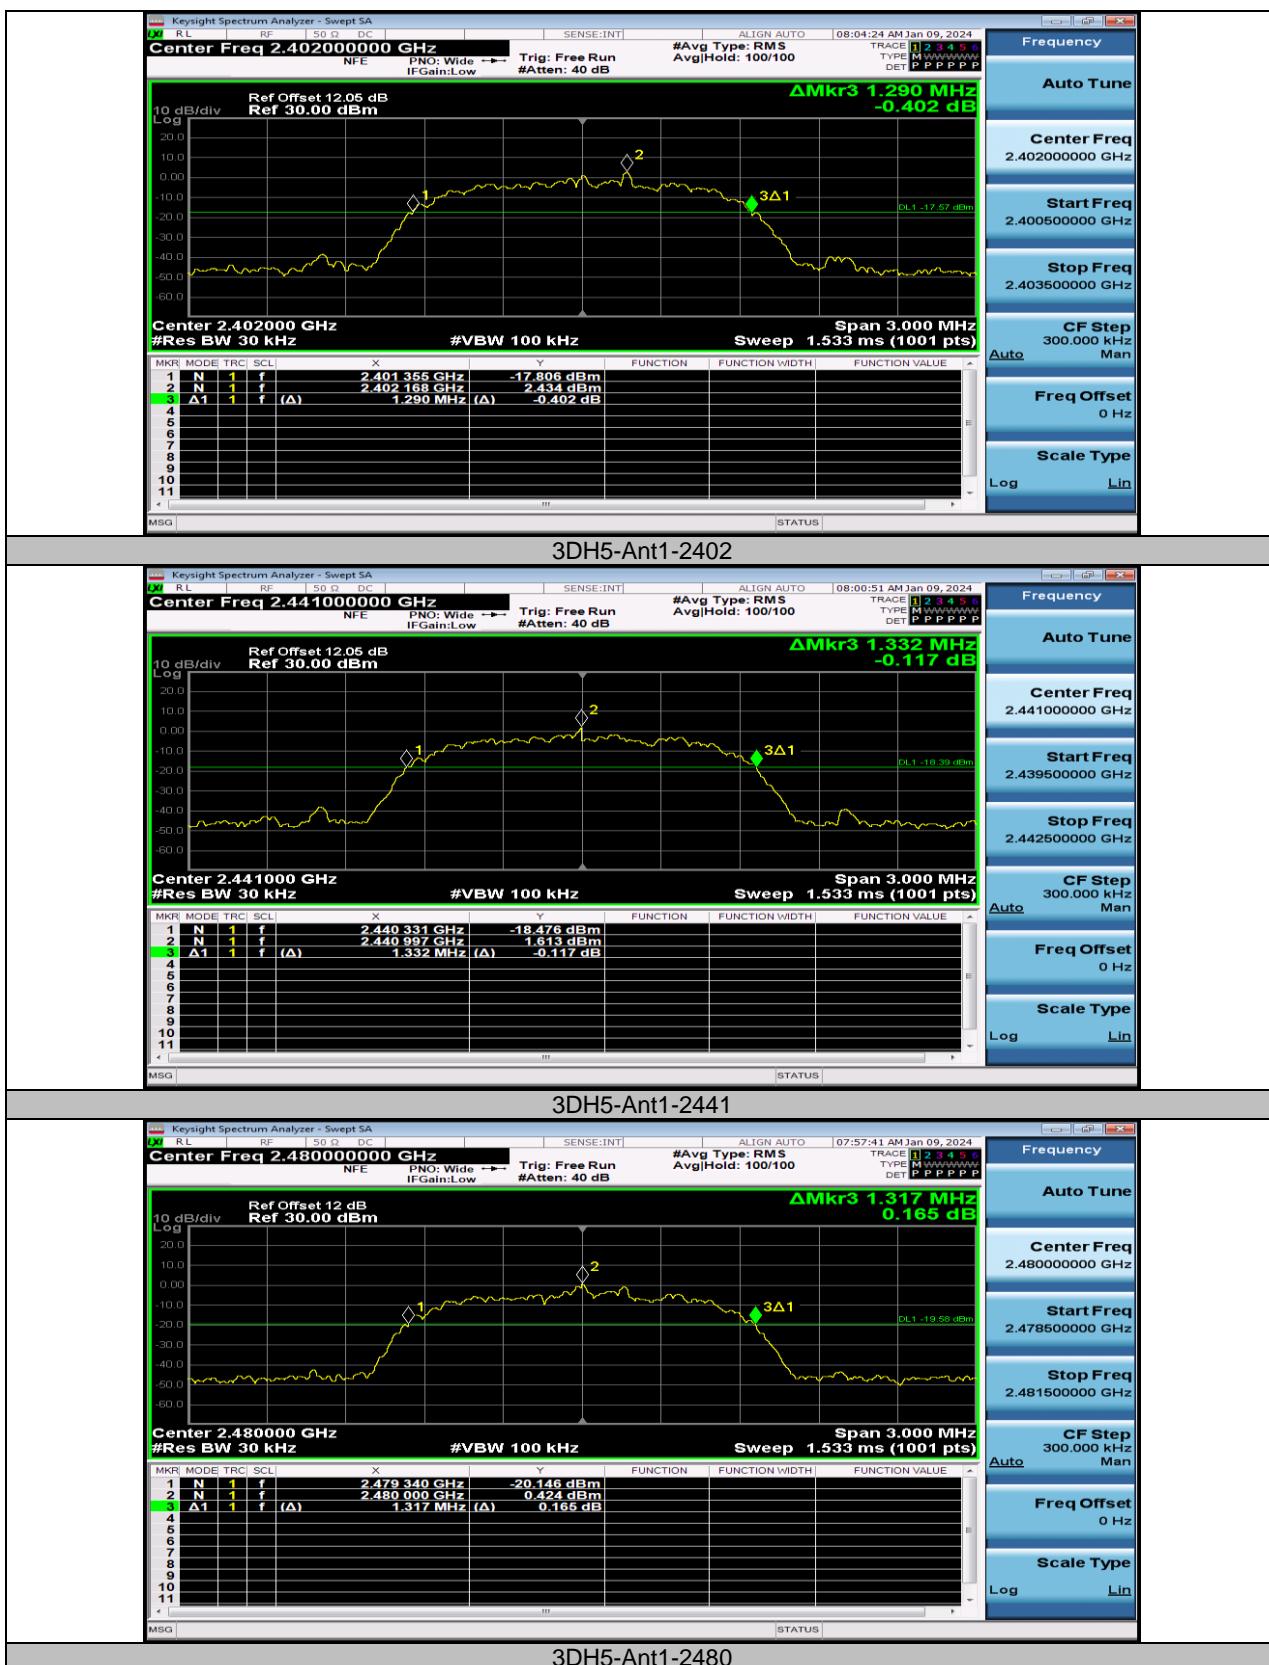


TEST REPORT**Occupied Channel Bandwidth****Test Result**


TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.91403	2401.5553	2402.4693	---	---
DH5	Ant1	2441	0.89904	2440.5542	2441.4532	---	---
DH5	Ant1	2480	0.89369	2479.5543	2480.4480	---	---
2DH5	Ant1	2402	1.1983	2401.4075	2402.6058	---	---
2DH5	Ant1	2441	1.2049	2440.3980	2441.6029	---	---
2DH5	Ant1	2480	1.2050	2479.3893	2480.5943	---	---
3DH5	Ant1	2402	1.2039	2401.4017	2402.6056	---	---
3DH5	Ant1	2441	1.2084	2440.3924	2441.6008	---	---
3DH5	Ant1	2480	1.2157	2479.3821	2480.5978	---	---

TEST REPORT


Test Graphs

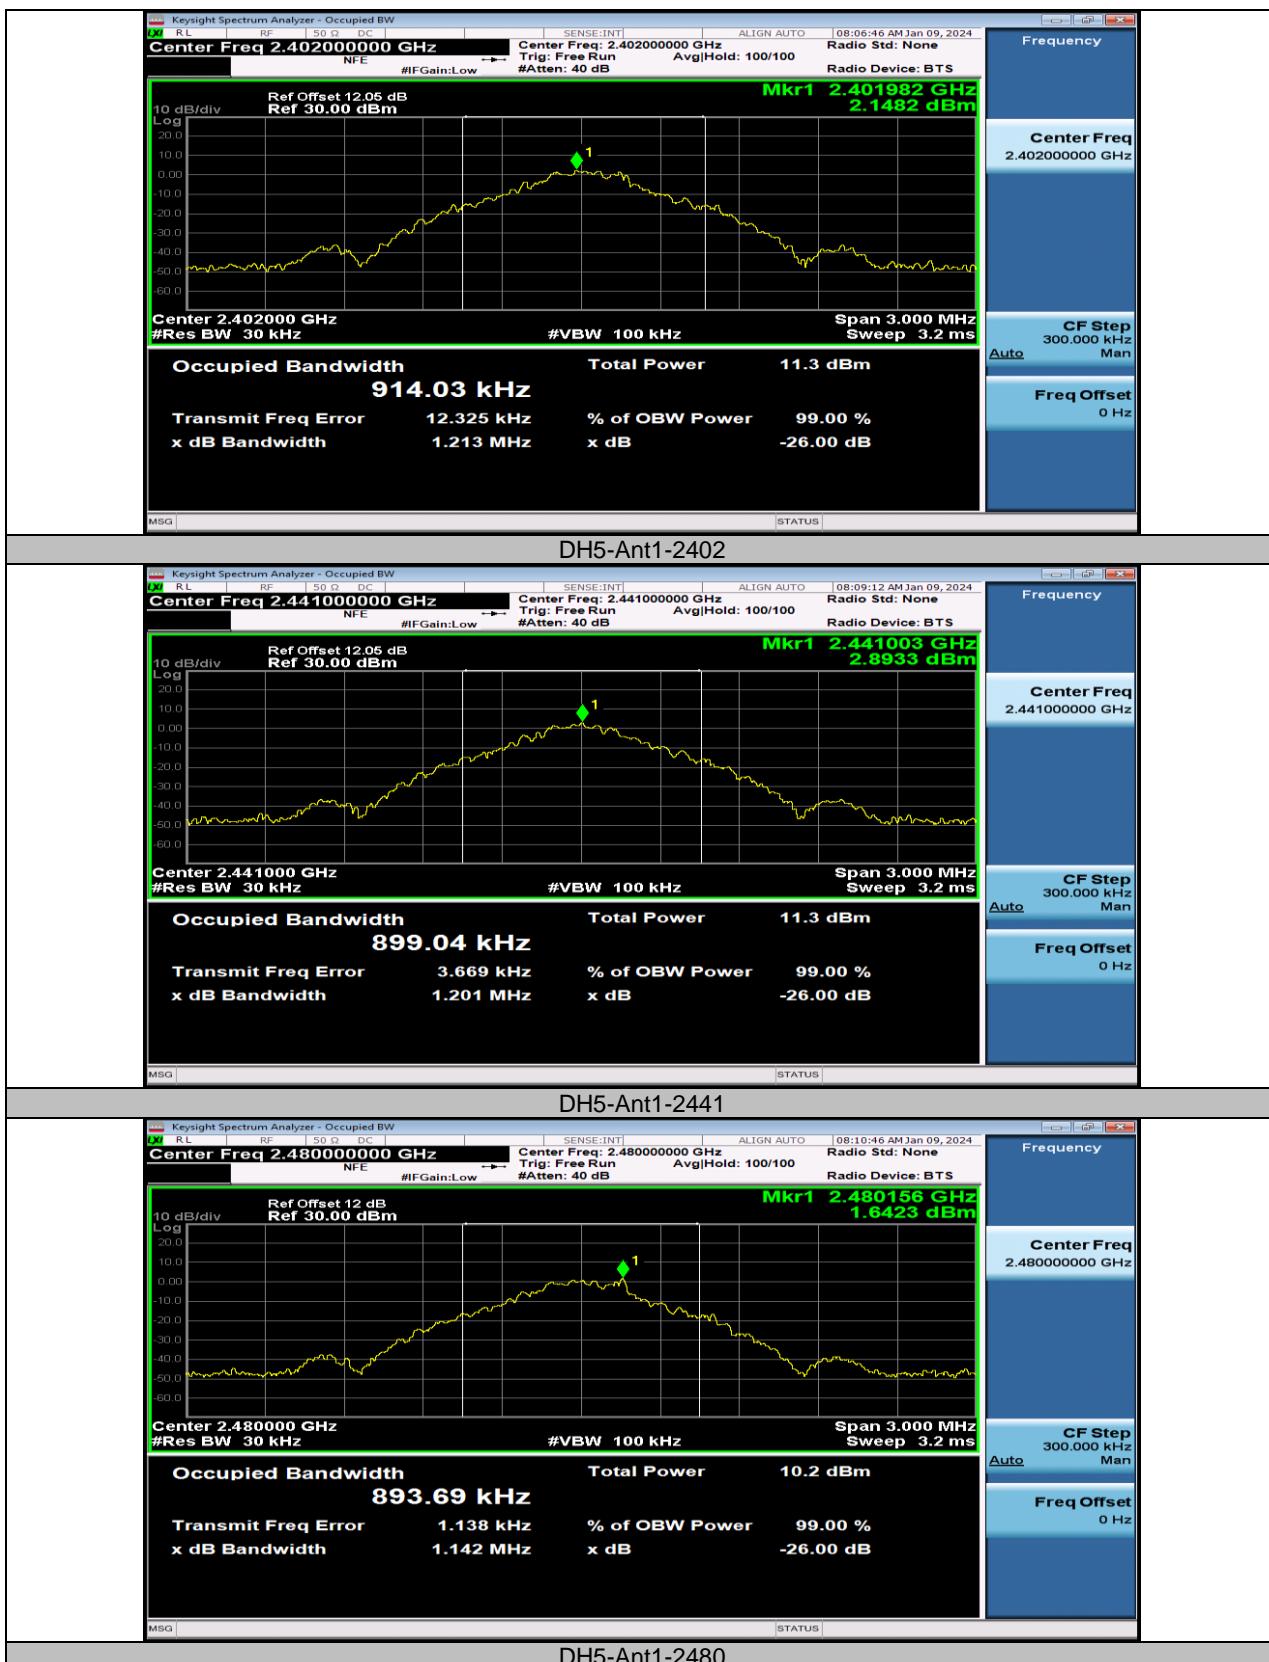

TEST REPORT

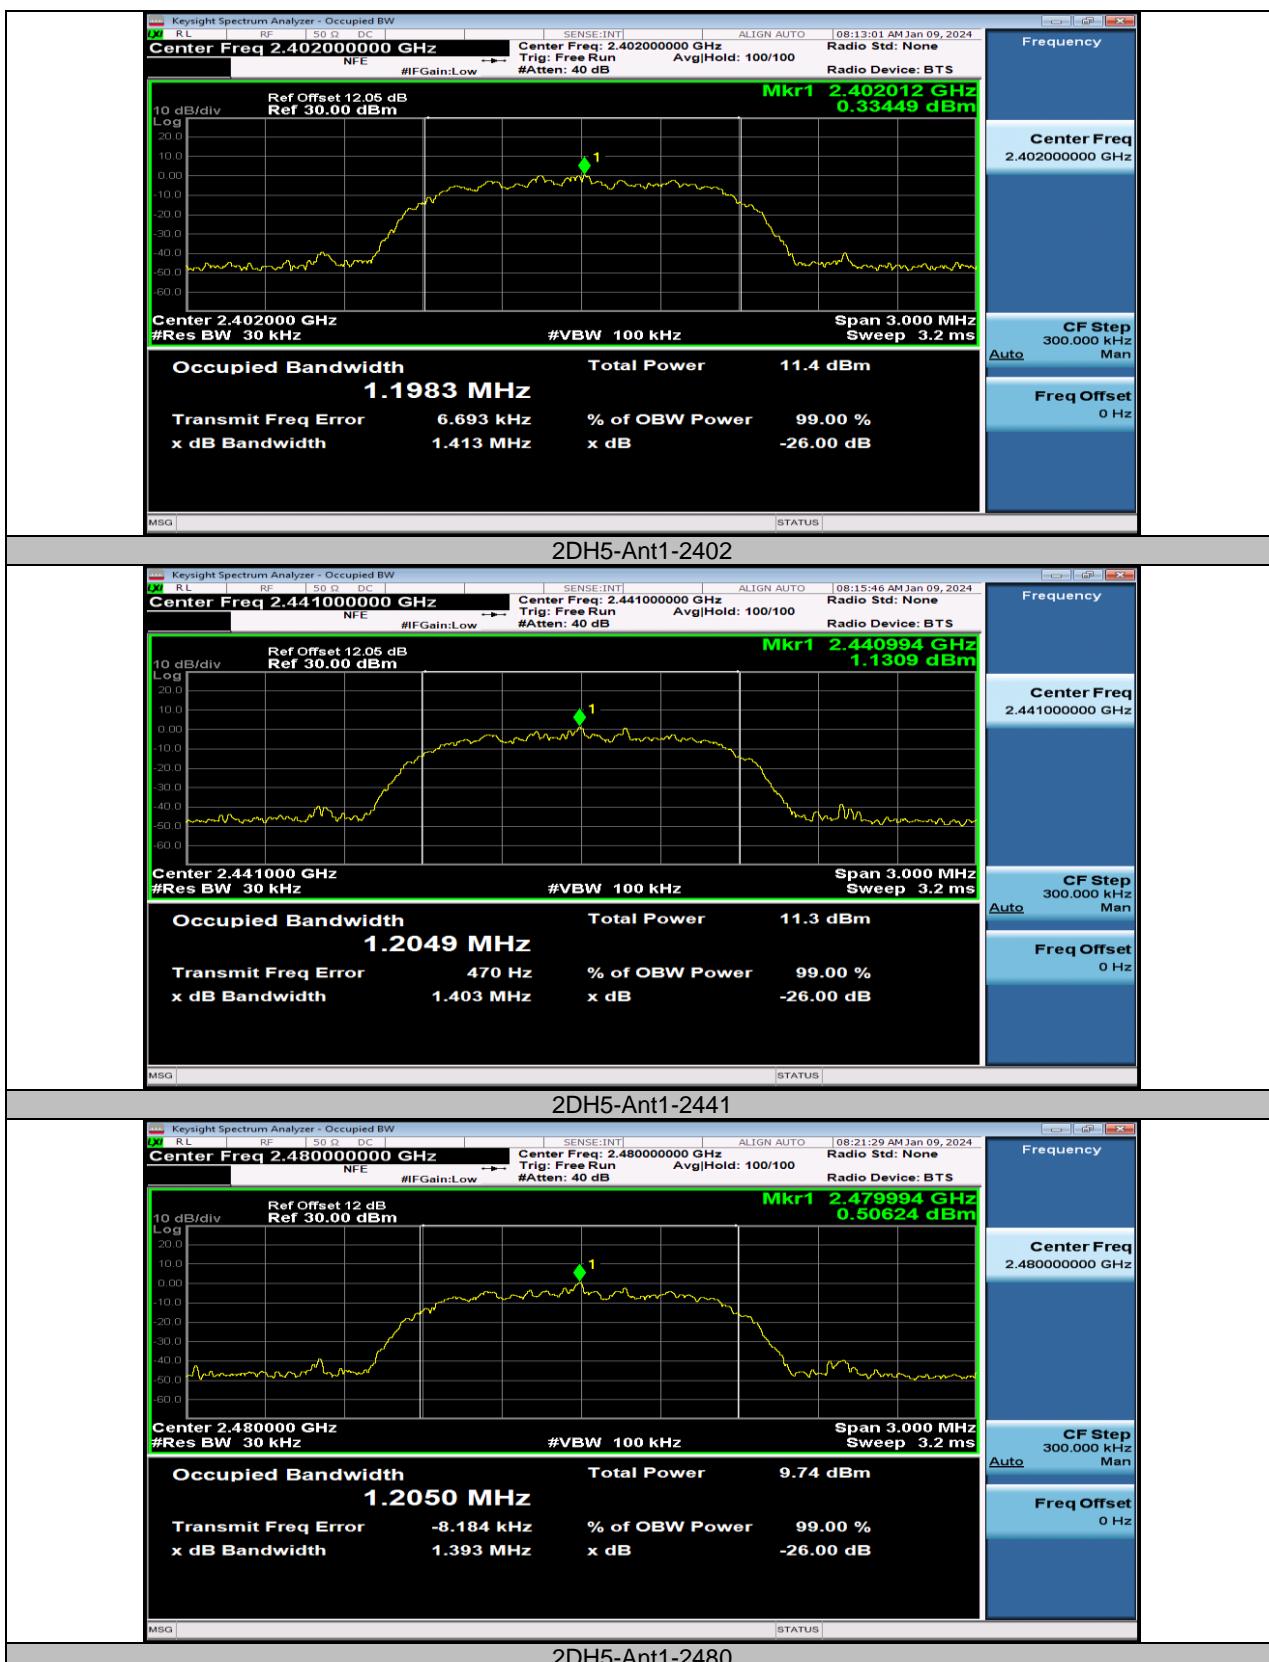

TEST REPORT

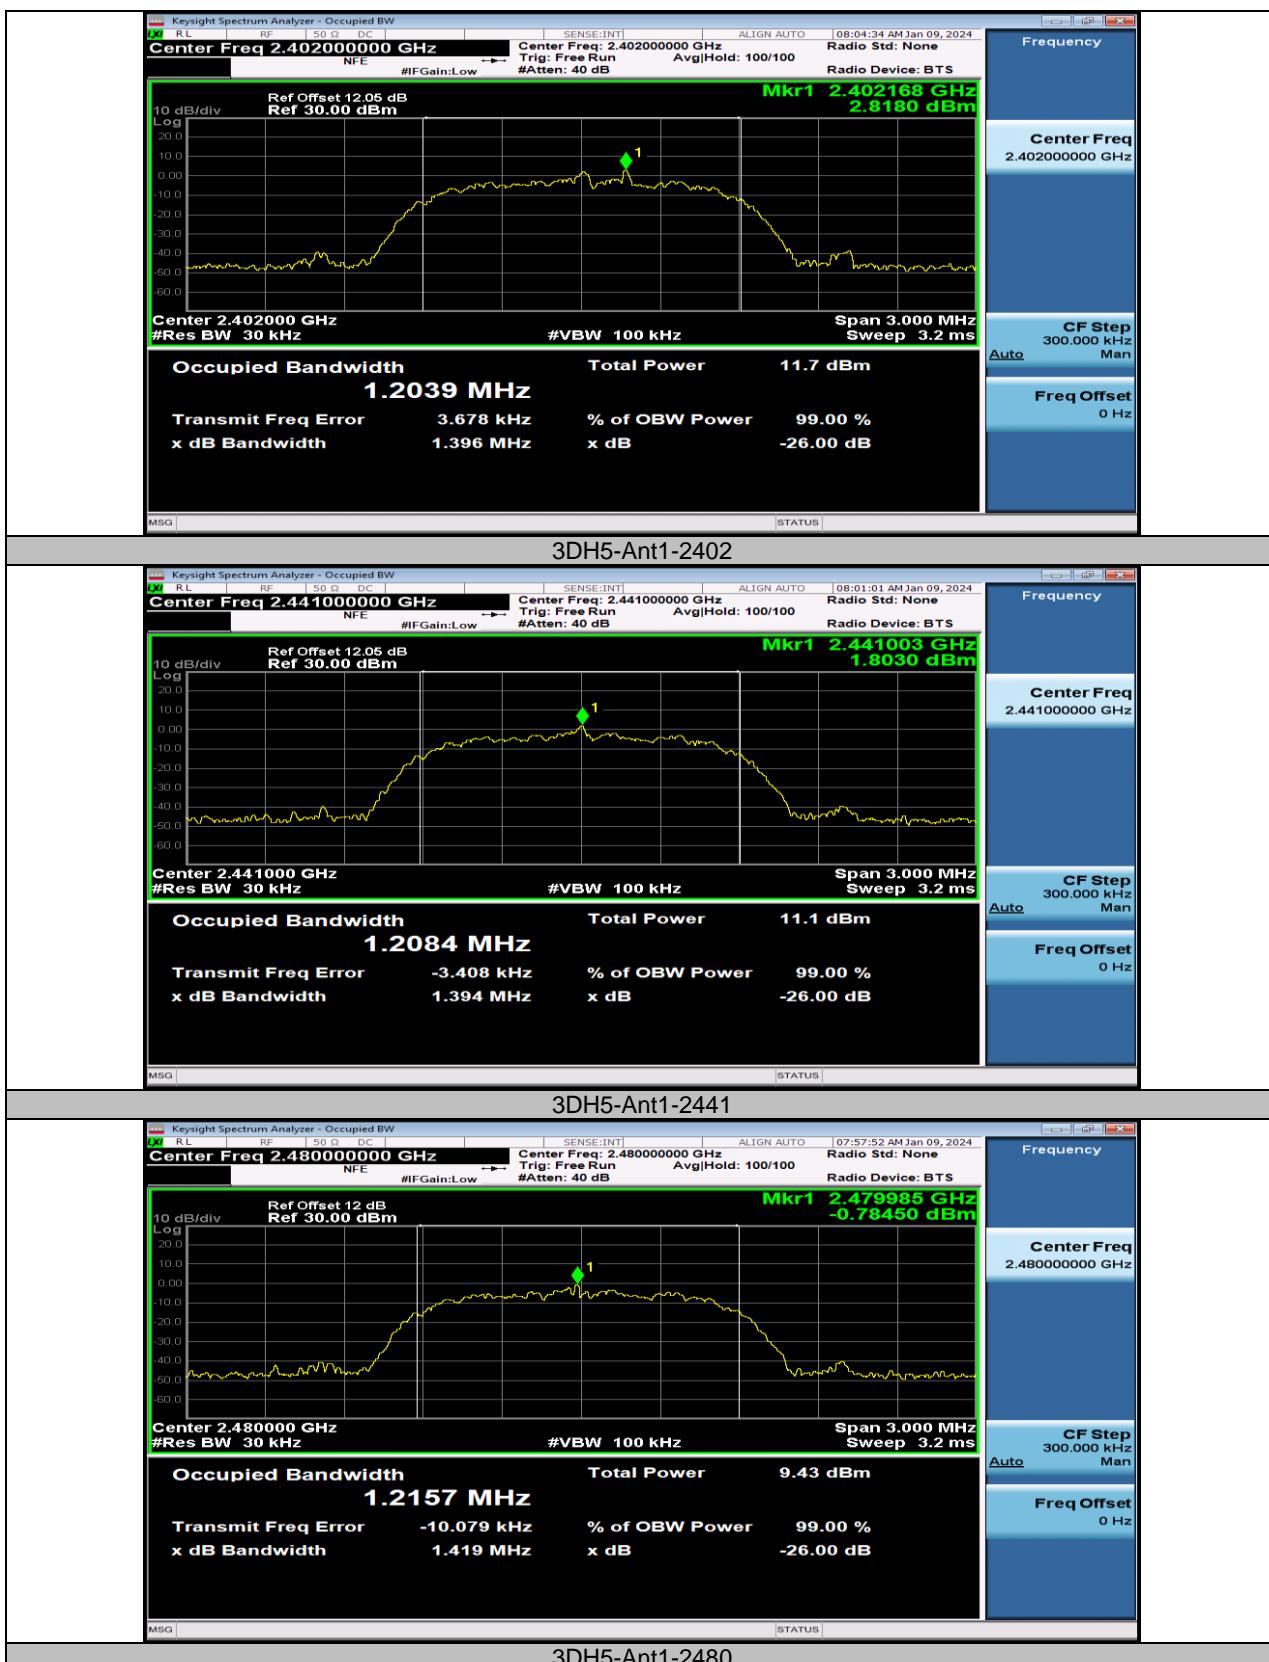


TEST REPORT**Maximum conducted output power****Test Result Peak**

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	5.44	≤20.97	PASS
DH5	Ant1	2441	5.86	≤20.97	PASS
DH5	Ant1	2480	4.14	≤20.97	PASS
2DH5	Ant1	2402	7.30	≤20.97	PASS
2DH5	Ant1	2441	7.08	≤20.97	PASS
2DH5	Ant1	2480	5.53	≤20.97	PASS
3DH5	Ant1	2402	7.76	≤20.97	PASS
3DH5	Ant1	2441	7.33	≤20.97	PASS
3DH5	Ant1	2480	6.07	≤20.97	PASS


Max EIRP is 7.76dBm+3.19dBi=10.95dBm=12.45mW<4W.

TEST REPORT


Test Graphs

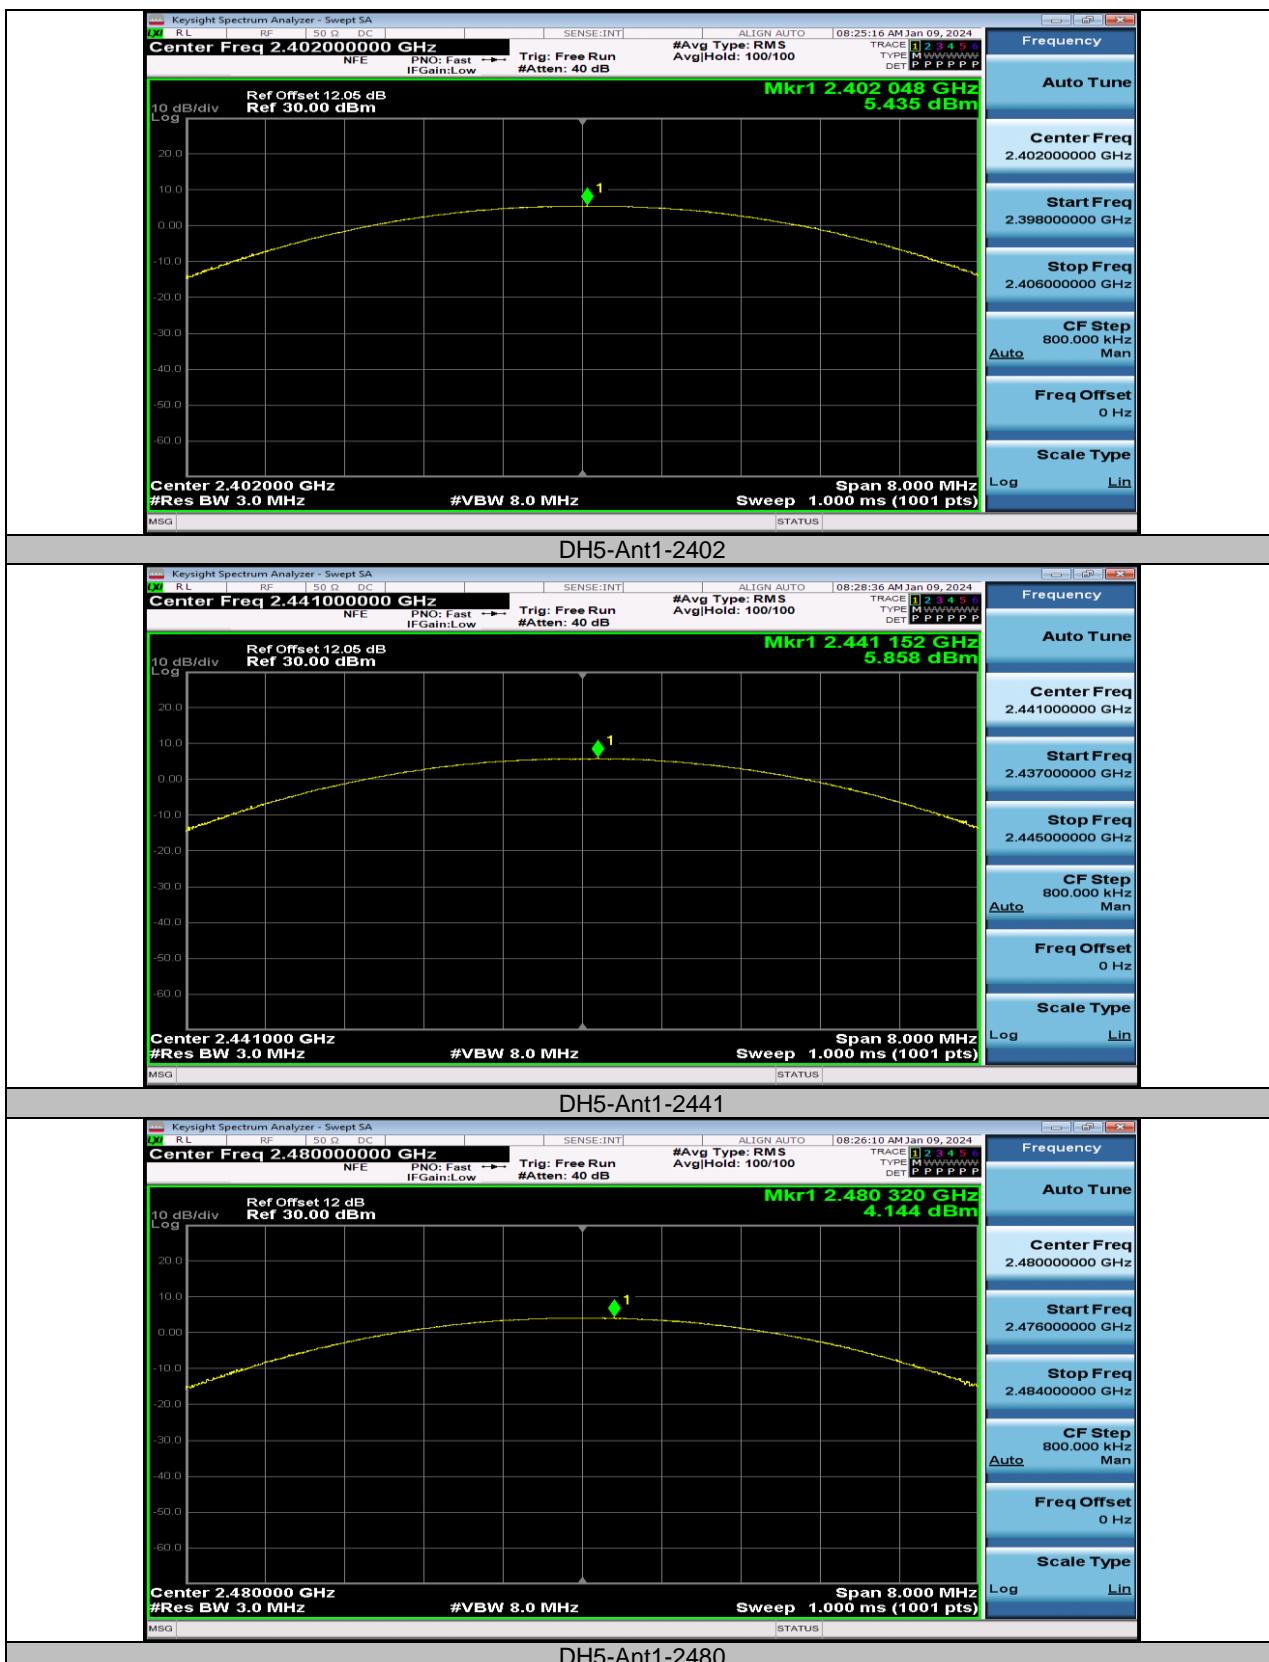

TEST REPORT

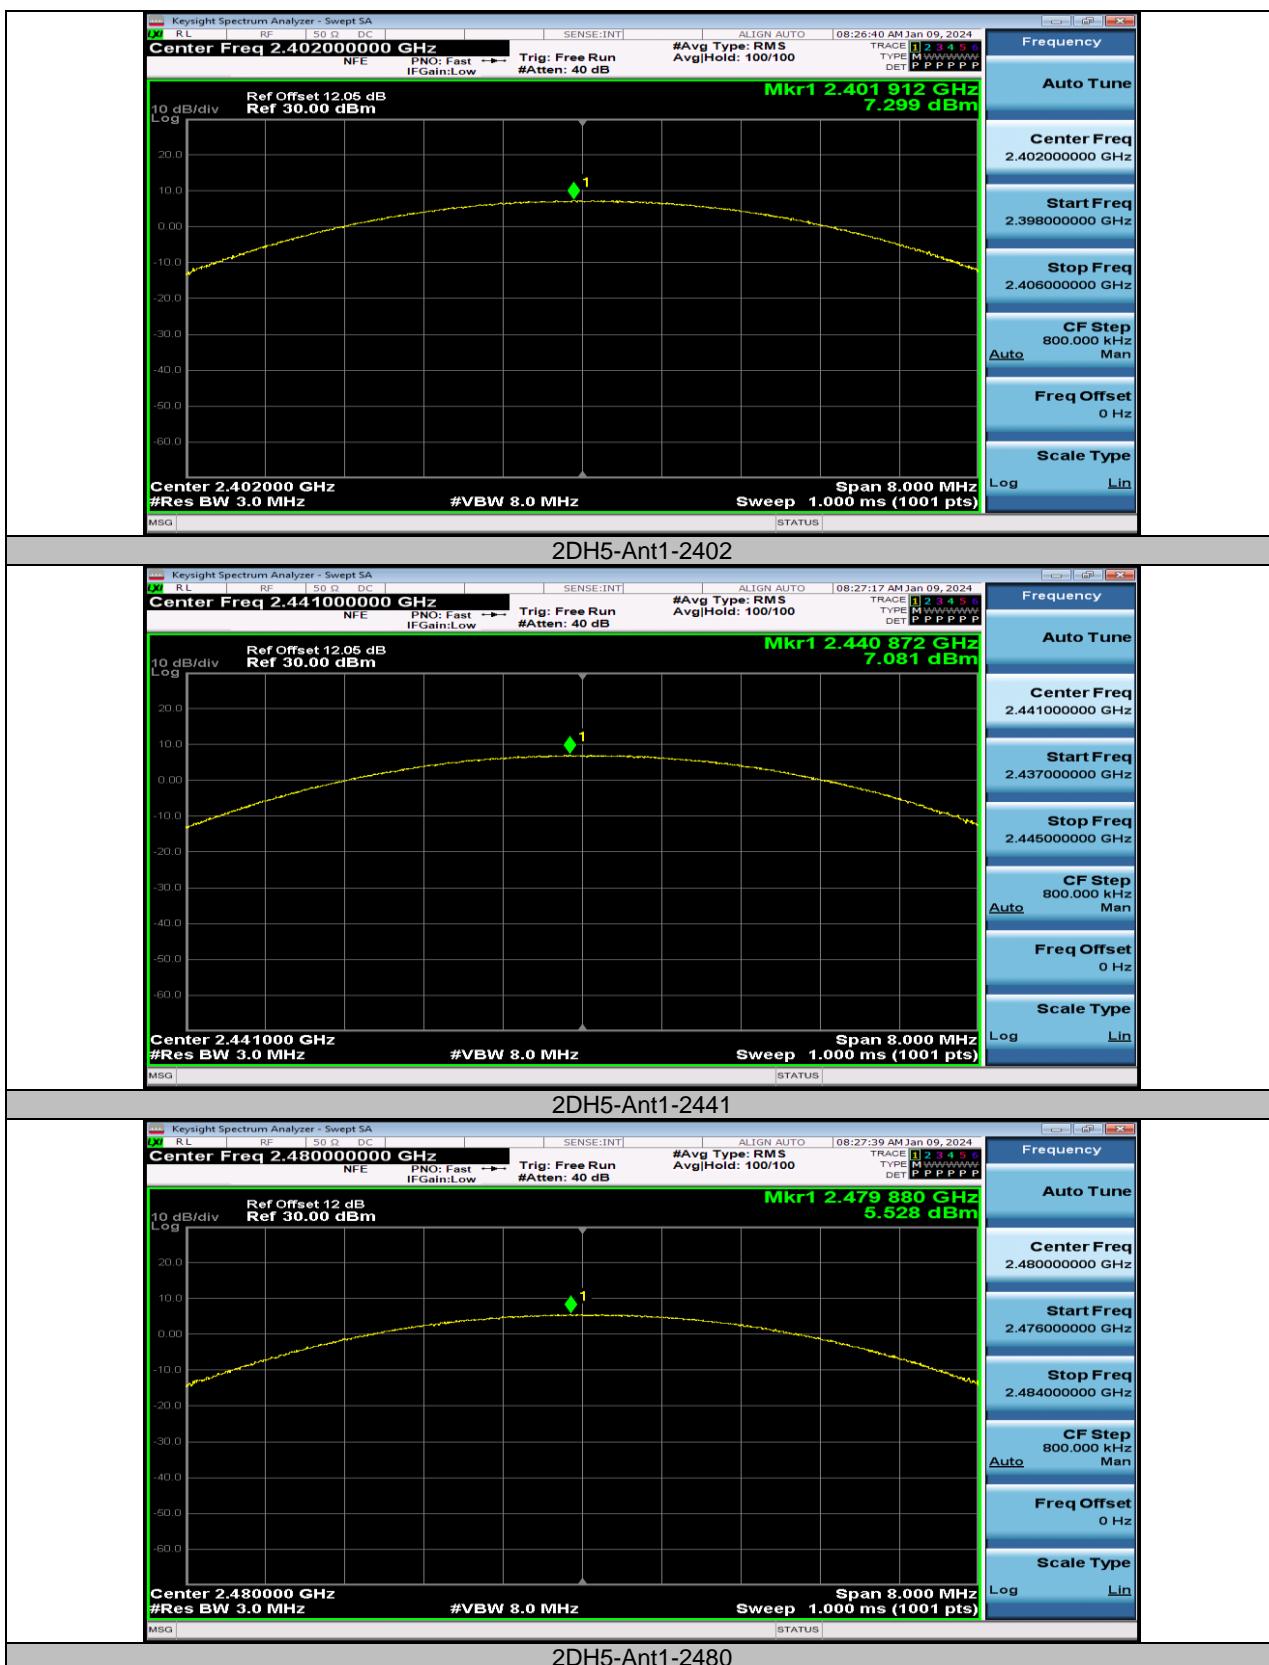

TEST REPORT

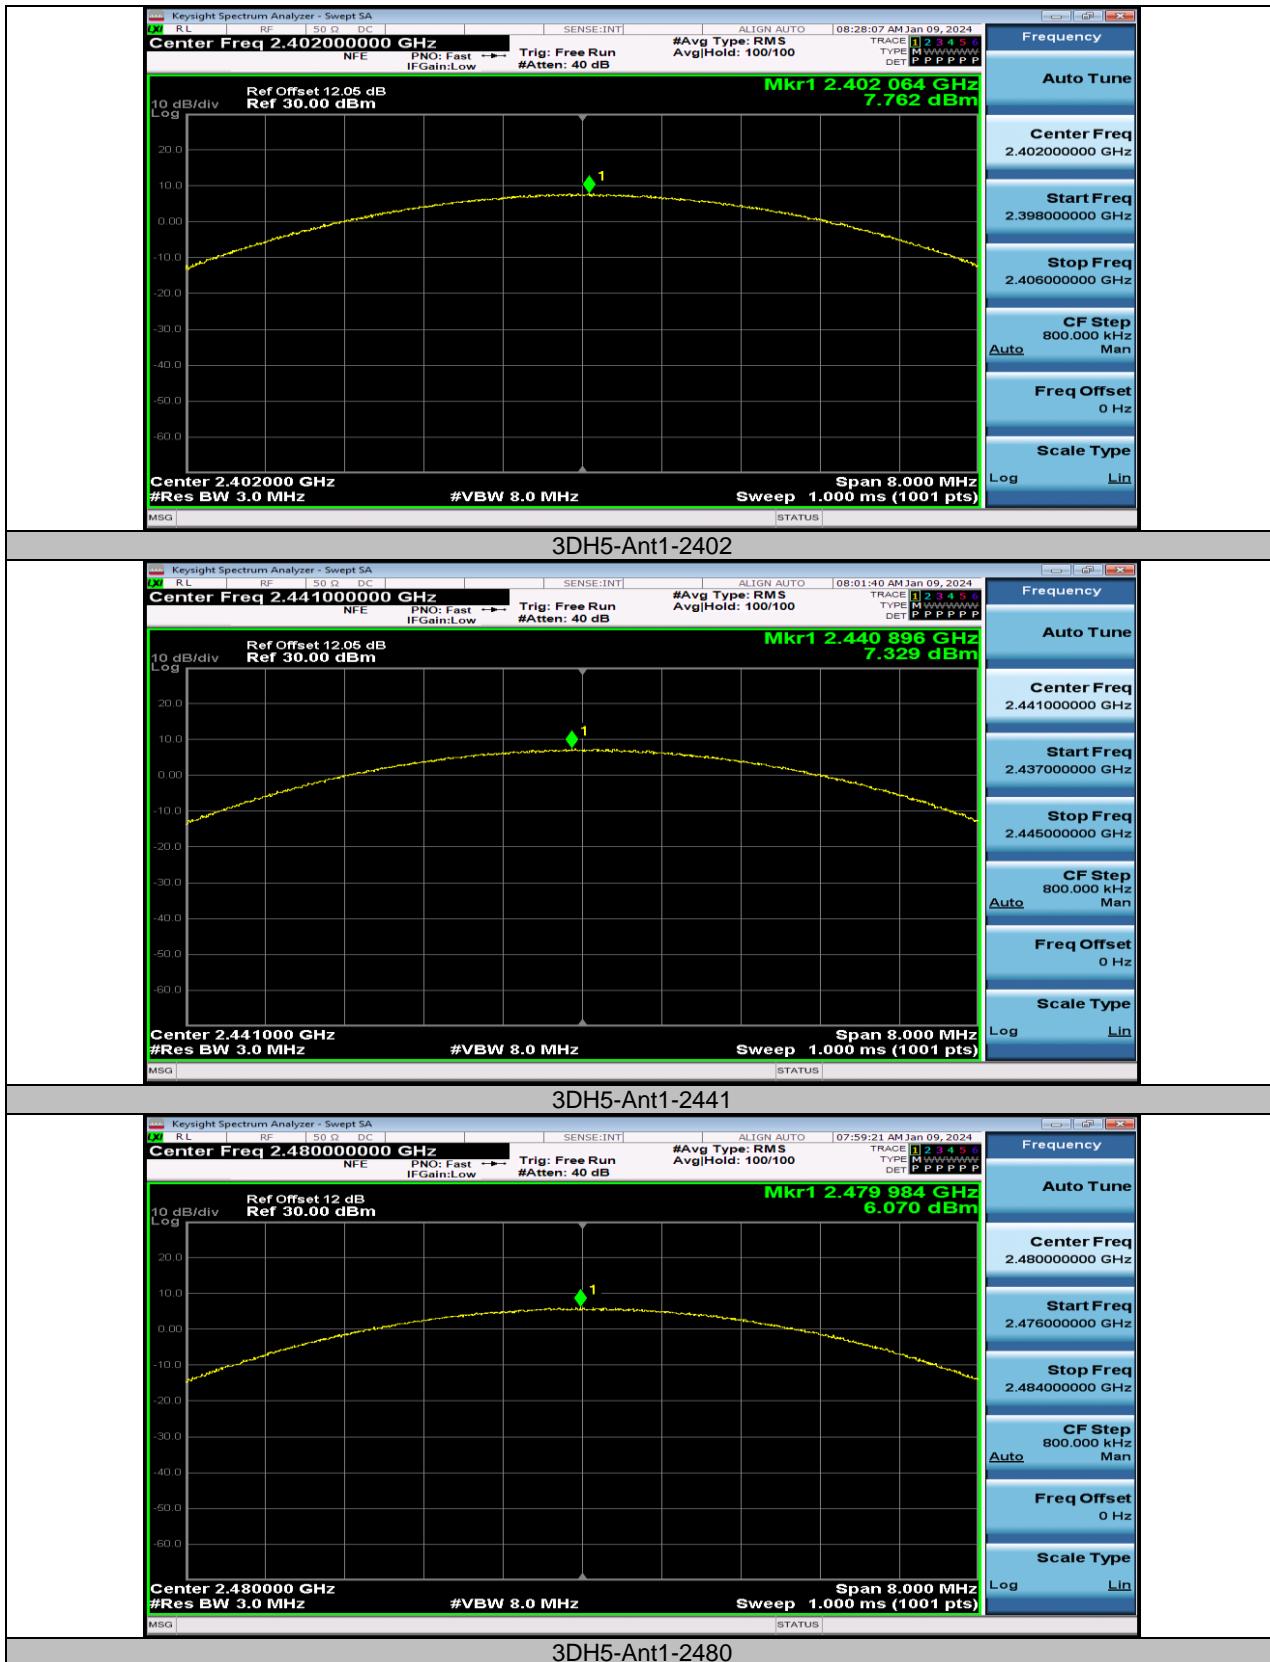

TEST REPORT**Carrier frequency separation****Test Result**

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.176	≥1.029	PASS
2DH5	Ant1	Hop	0.99	≥0.904	PASS
3DH5	Ant1	Hop	0.974	≥0.888	PASS

TEST REPORT

Test Graphs




TEST REPORT**Time of occupancy****Test Result**


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.380	320	0.122	≤0.4	PASS
DH3	Ant1	Hop	1.637	160	0.262	≤0.4	PASS
DH5	Ant1	Hop	2.884	106.67	0.308	≤0.4	PASS
2DH1	Ant1	Hop	0.386	320	0.124	≤0.4	PASS
2DH3	Ant1	Hop	1.639	160	0.262	≤0.4	PASS
2DH5	Ant1	Hop	2.887	106.67	0.308	≤0.4	PASS
3DH1	Ant1	Hop	0.386	320	0.124	≤0.4	PASS
3DH3	Ant1	Hop	1.639	160	0.262	≤0.4	PASS
3DH5	Ant1	Hop	2.885	106.67	0.308	≤0.4	PASS

TEST REPORT


Test Graphs

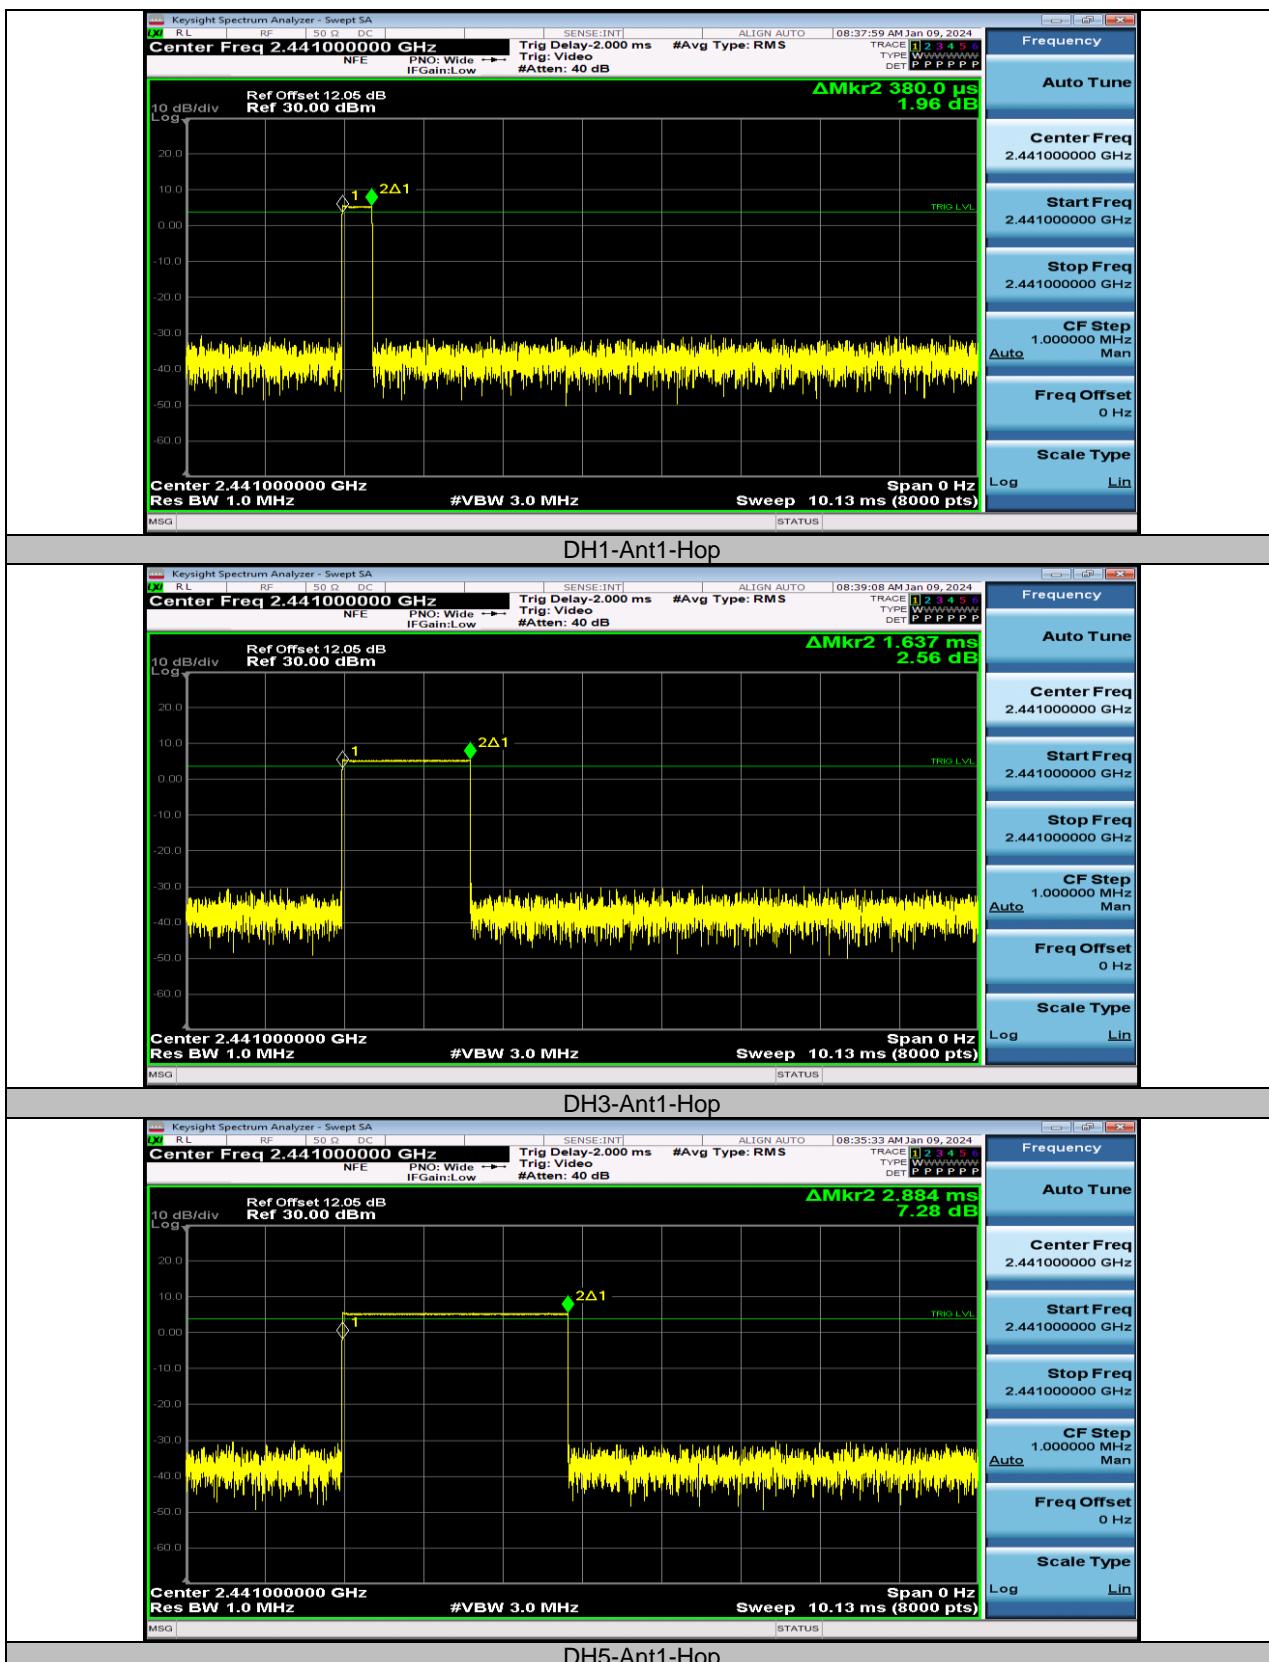

TEST REPORT

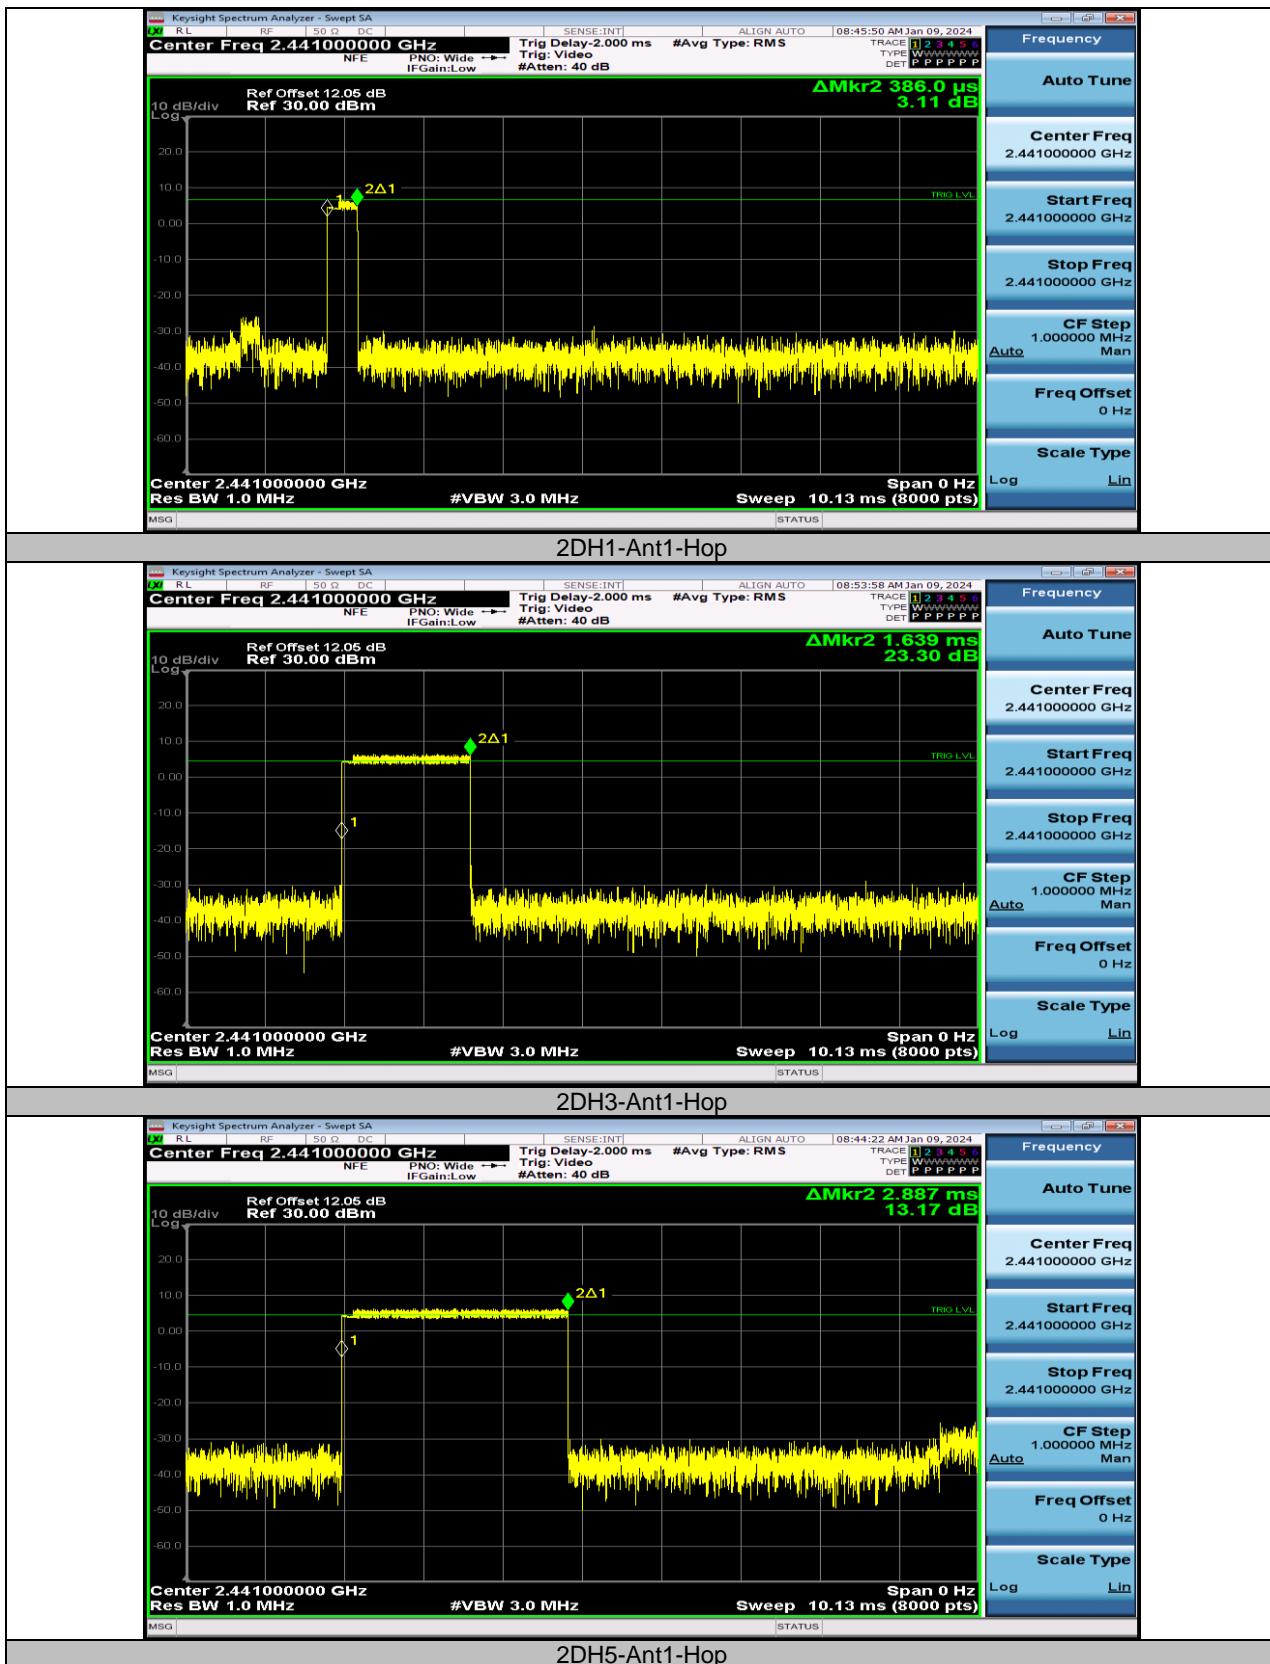

TEST REPORT

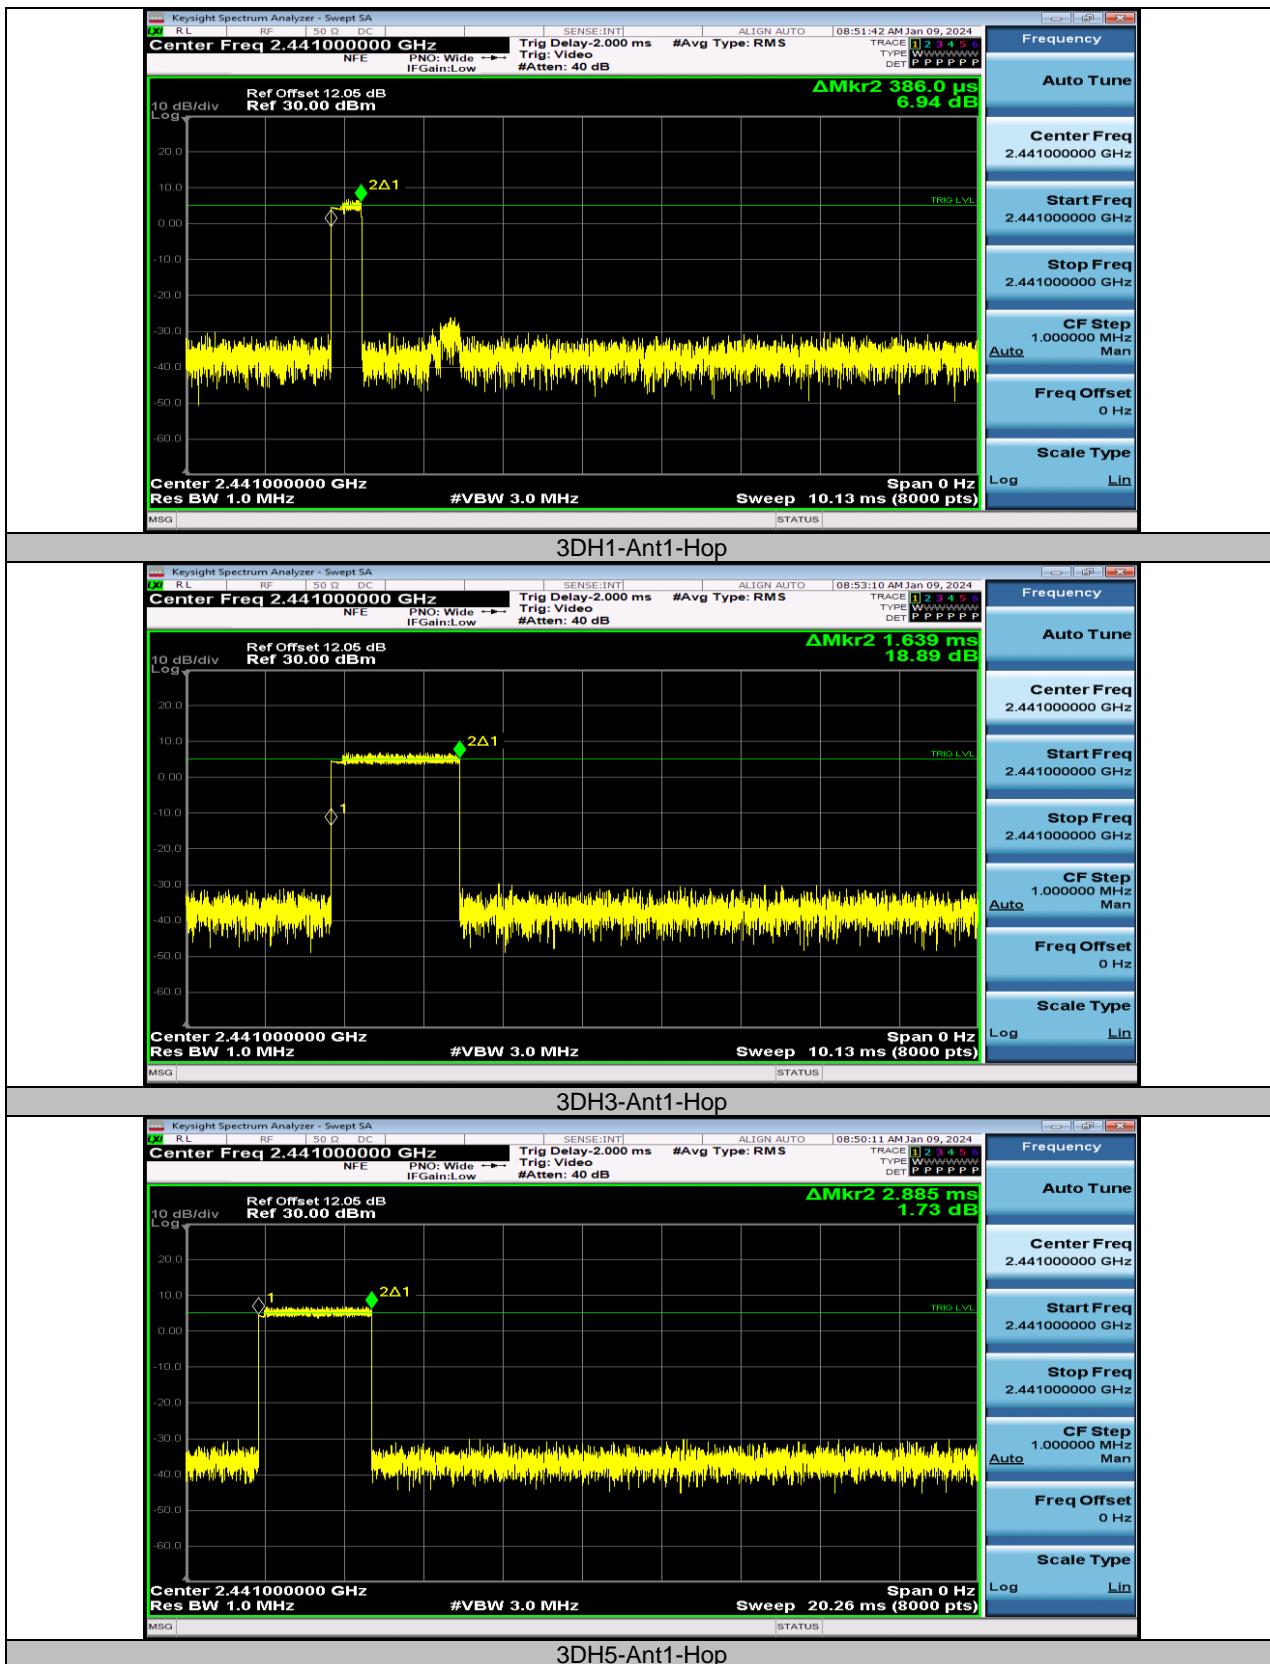

TEST REPORT**Number of hopping channels****Test Result**

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

TEST REPORT

Test Graphs




TEST REPORT**Band edge measurements****Test Result**


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	5.11	-48.47	≤-14.9	PASS
DH5	Ant1	High	2480	3.17	-47.28	≤-16.84	PASS
DH5	Ant1	Low	Hop_2402	3.95	-49.1	≤-16.05	PASS
DH5	Ant1	High	Hop_2480	2.93	-48.88	≤-17.07	PASS
2DH5	Ant1	Low	2402	3.15	-48.57	≤-16.85	PASS
2DH5	Ant1	High	2480	2.17	-48.74	≤-17.83	PASS
2DH5	Ant1	Low	Hop_2402	1.04	-49.61	≤-18.96	PASS
2DH5	Ant1	High	Hop_2480	2.59	-48.46	≤-17.41	PASS
3DH5	Ant1	Low	2402	3.68	-48.79	≤-16.32	PASS
3DH5	Ant1	High	2480	2.76	-48.6	≤-17.24	PASS
3DH5	Ant1	Low	Hop_2402	0.82	-49.1	≤-19.18	PASS
3DH5	Ant1	High	Hop_2480	1.82	-48.75	≤-18.18	PASS

TEST REPORT


Test Graphs

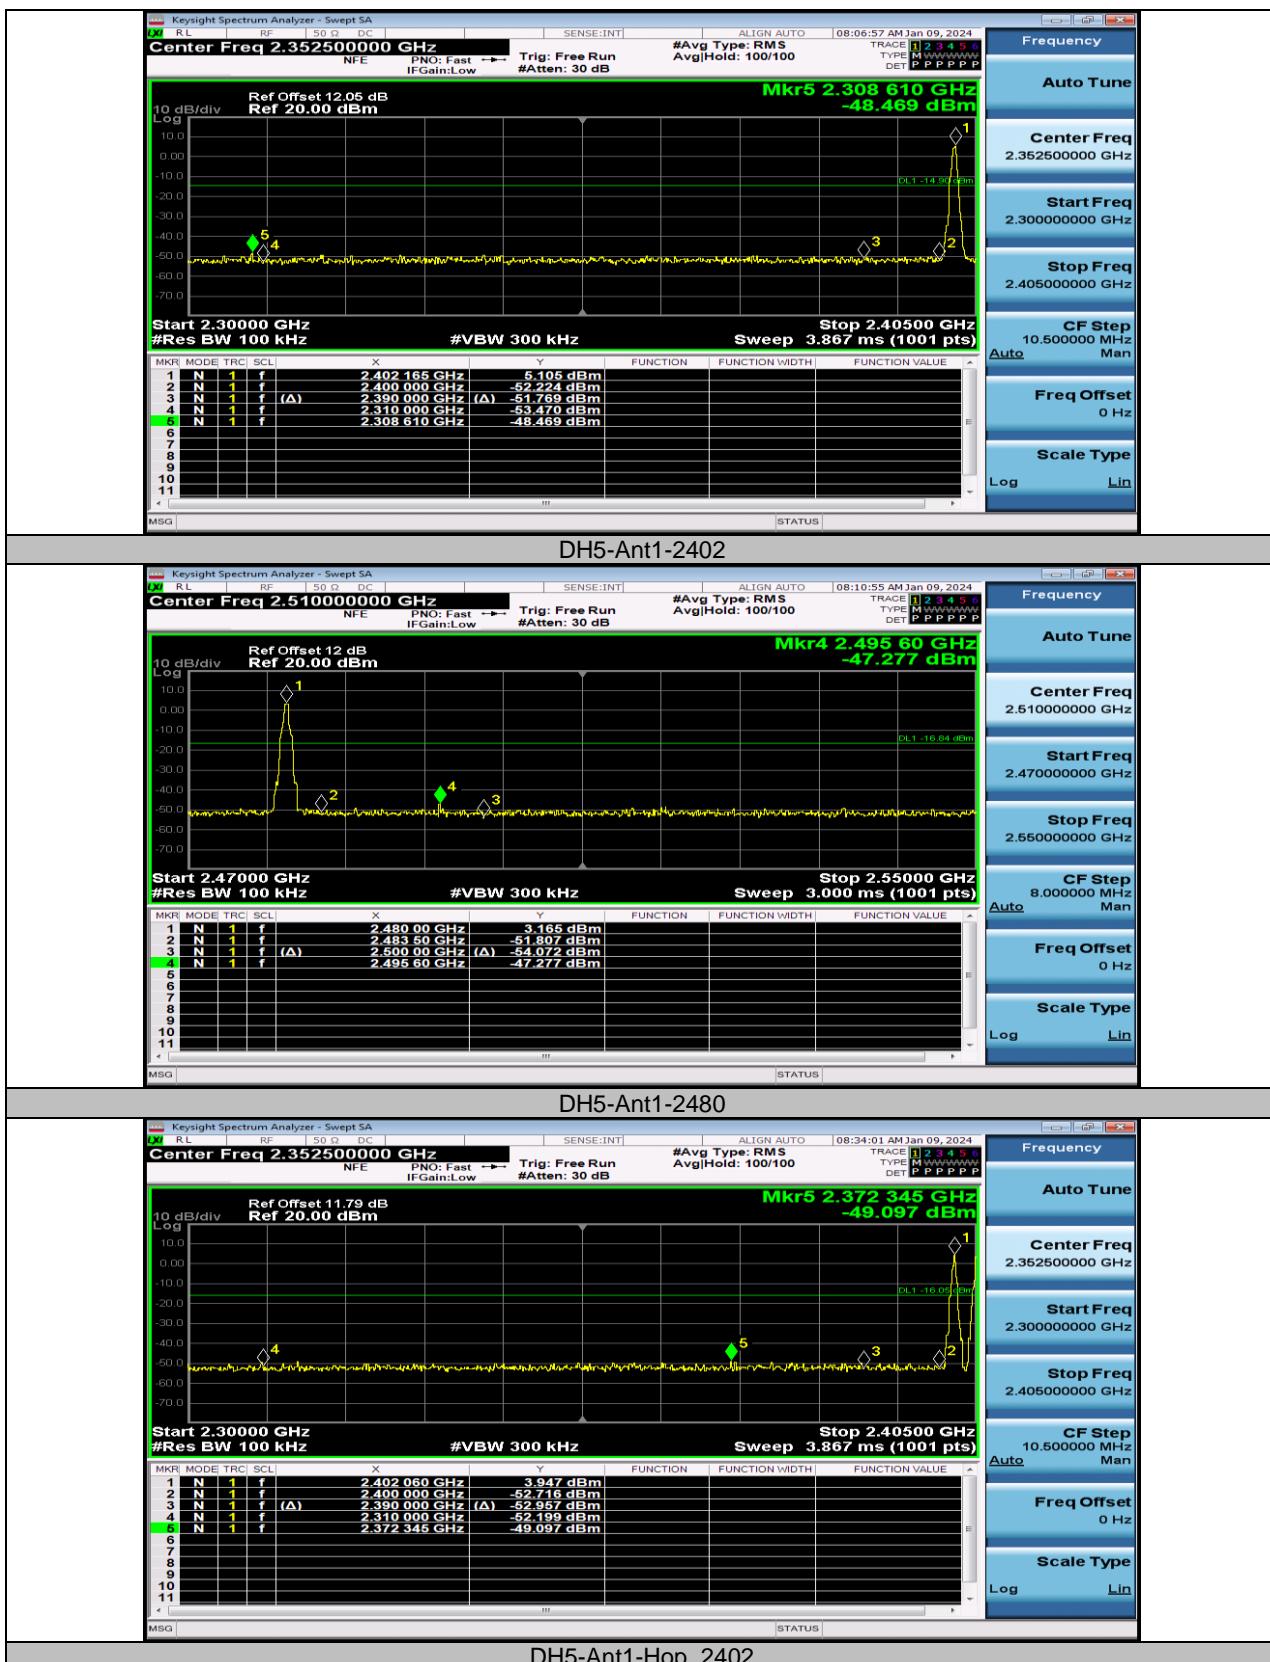


TEST REPORT

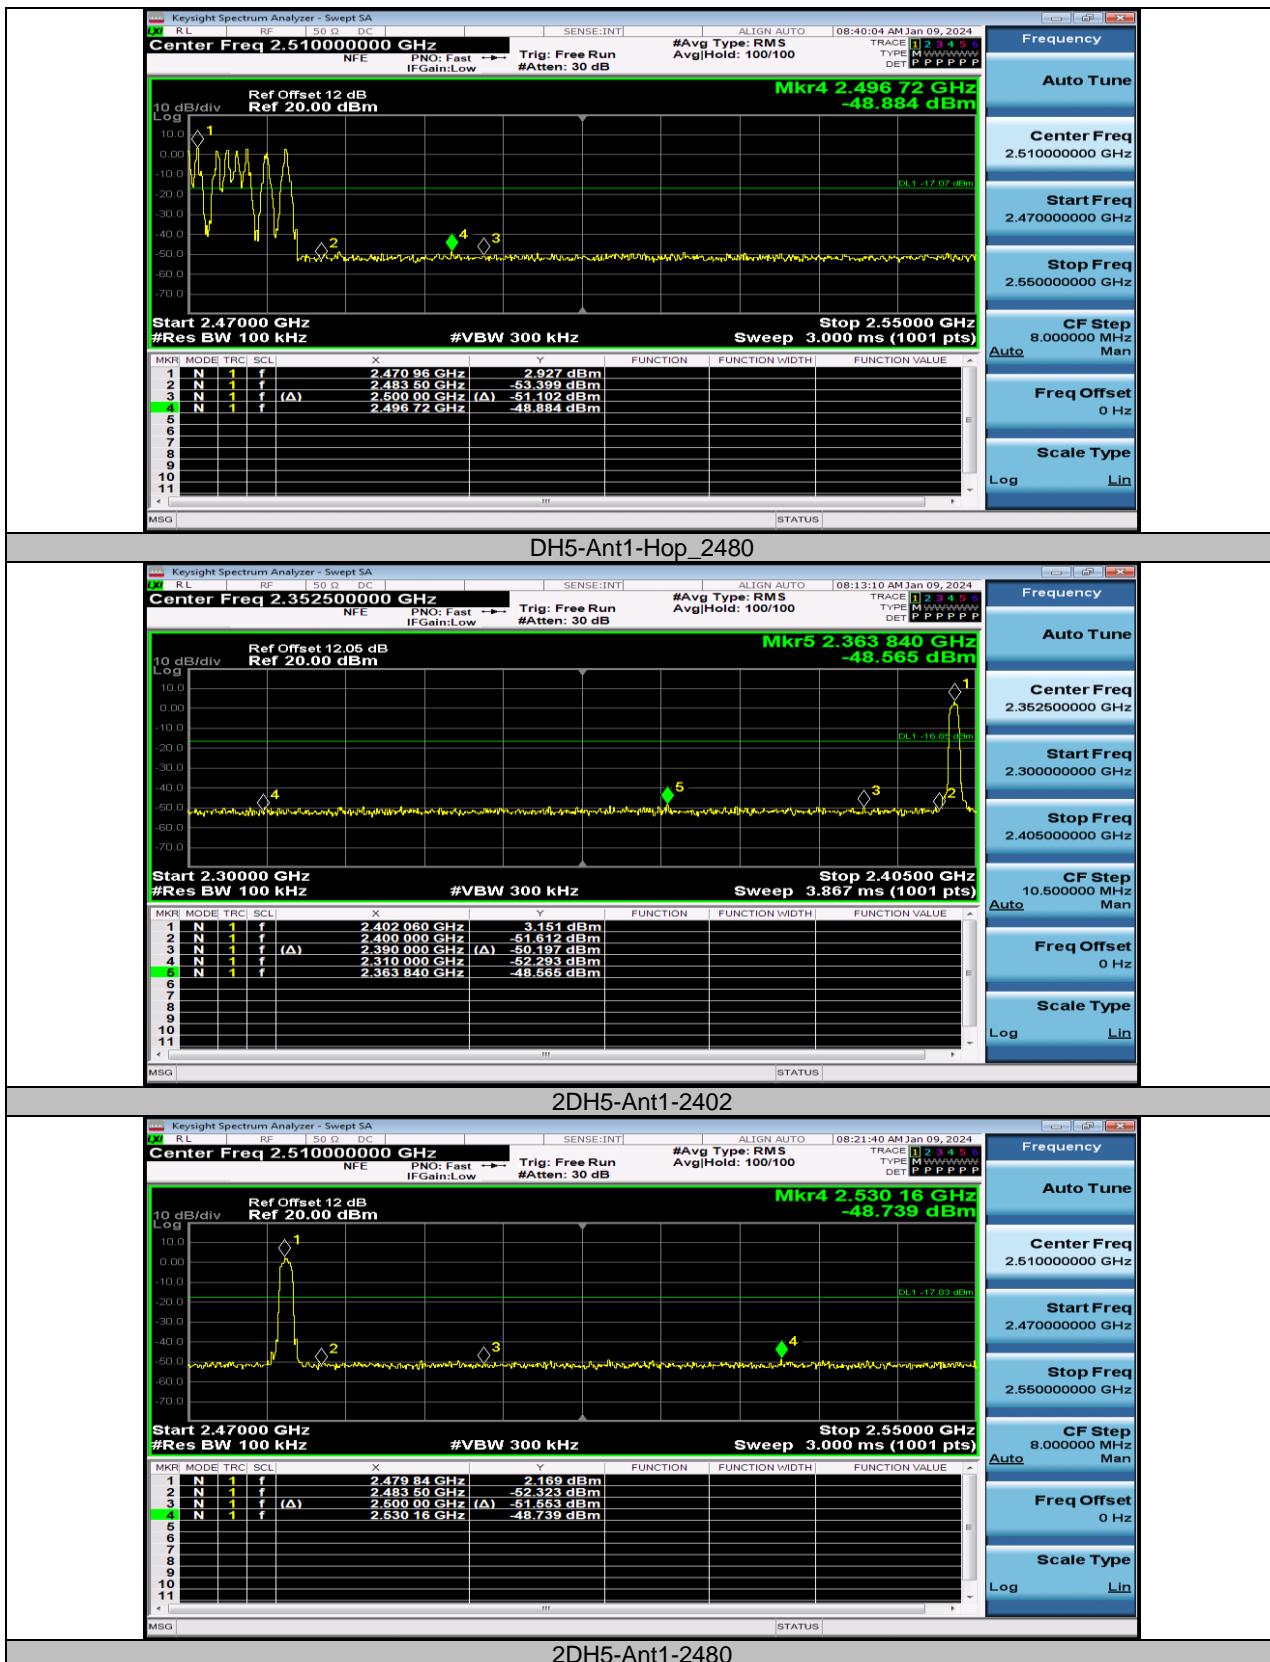

TEST REPORT

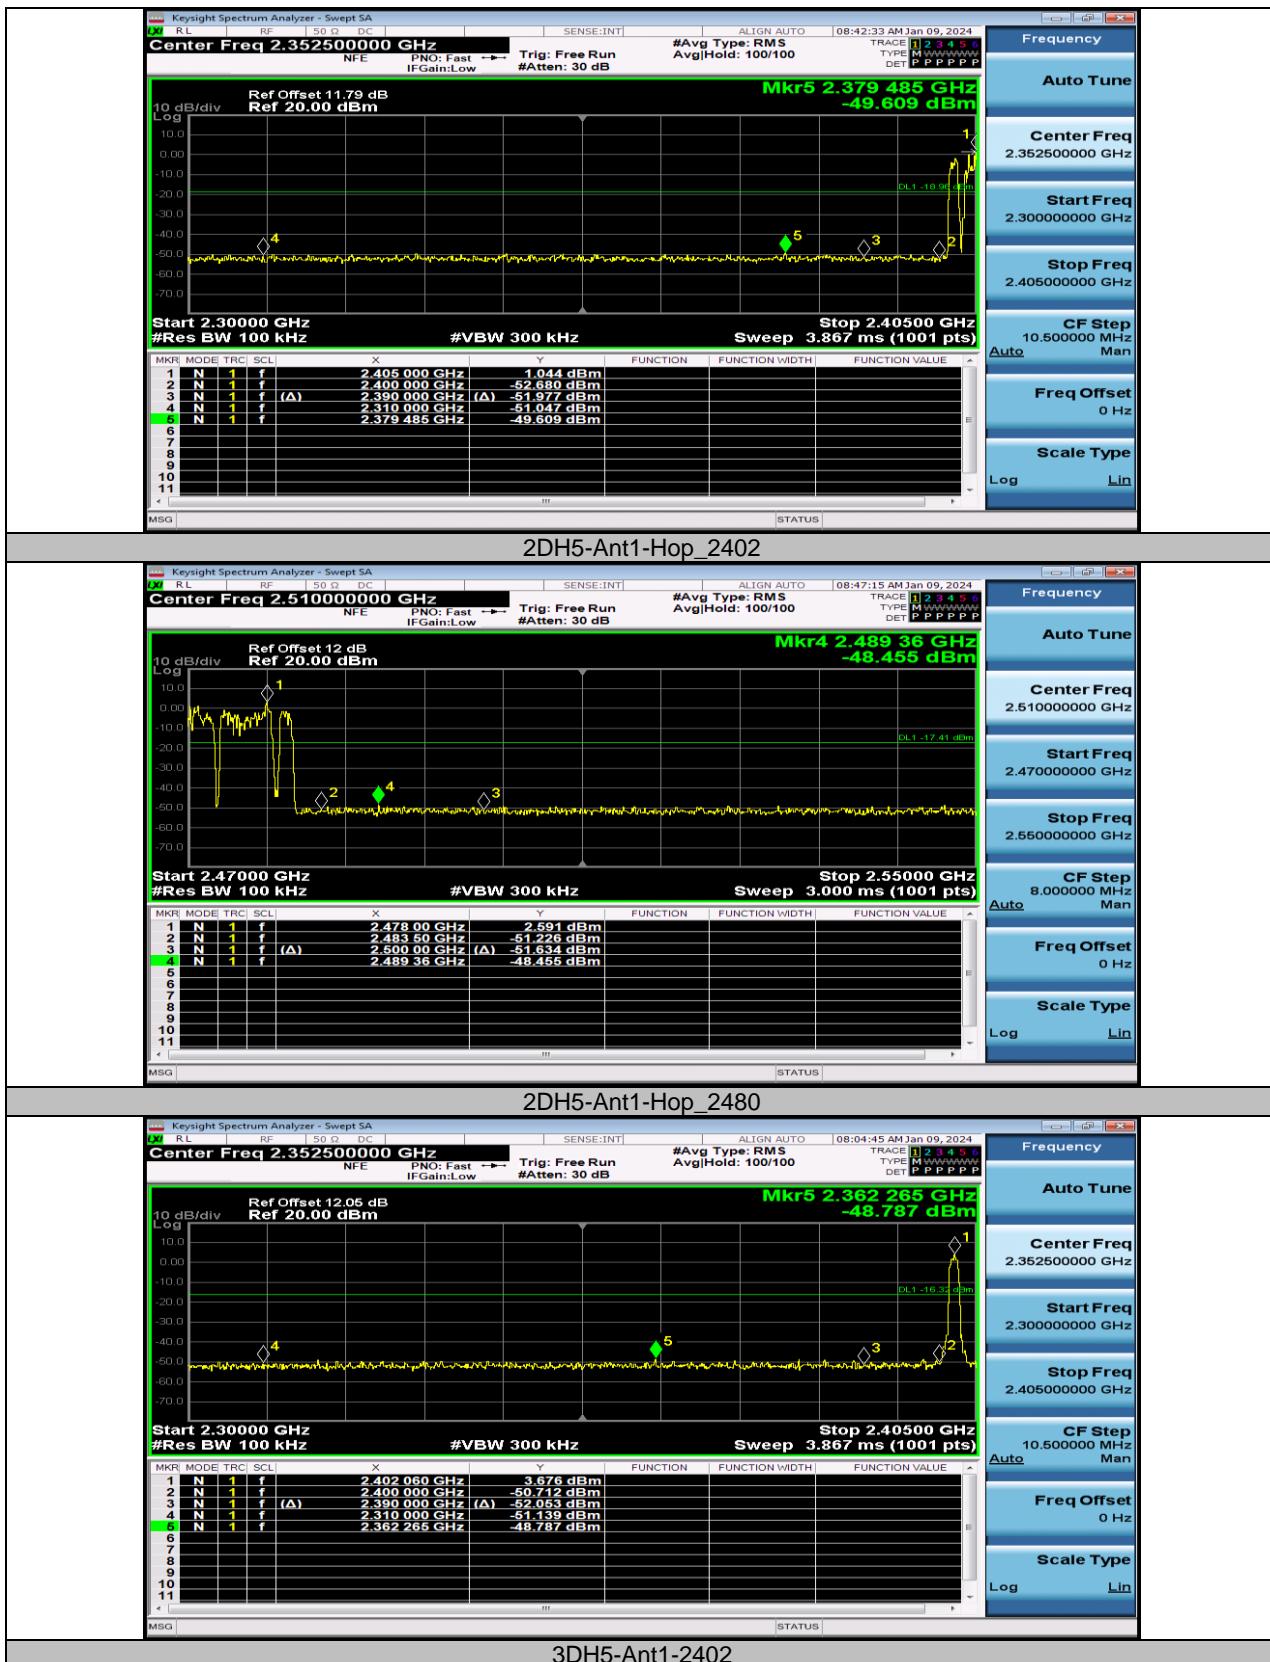

TEST REPORT

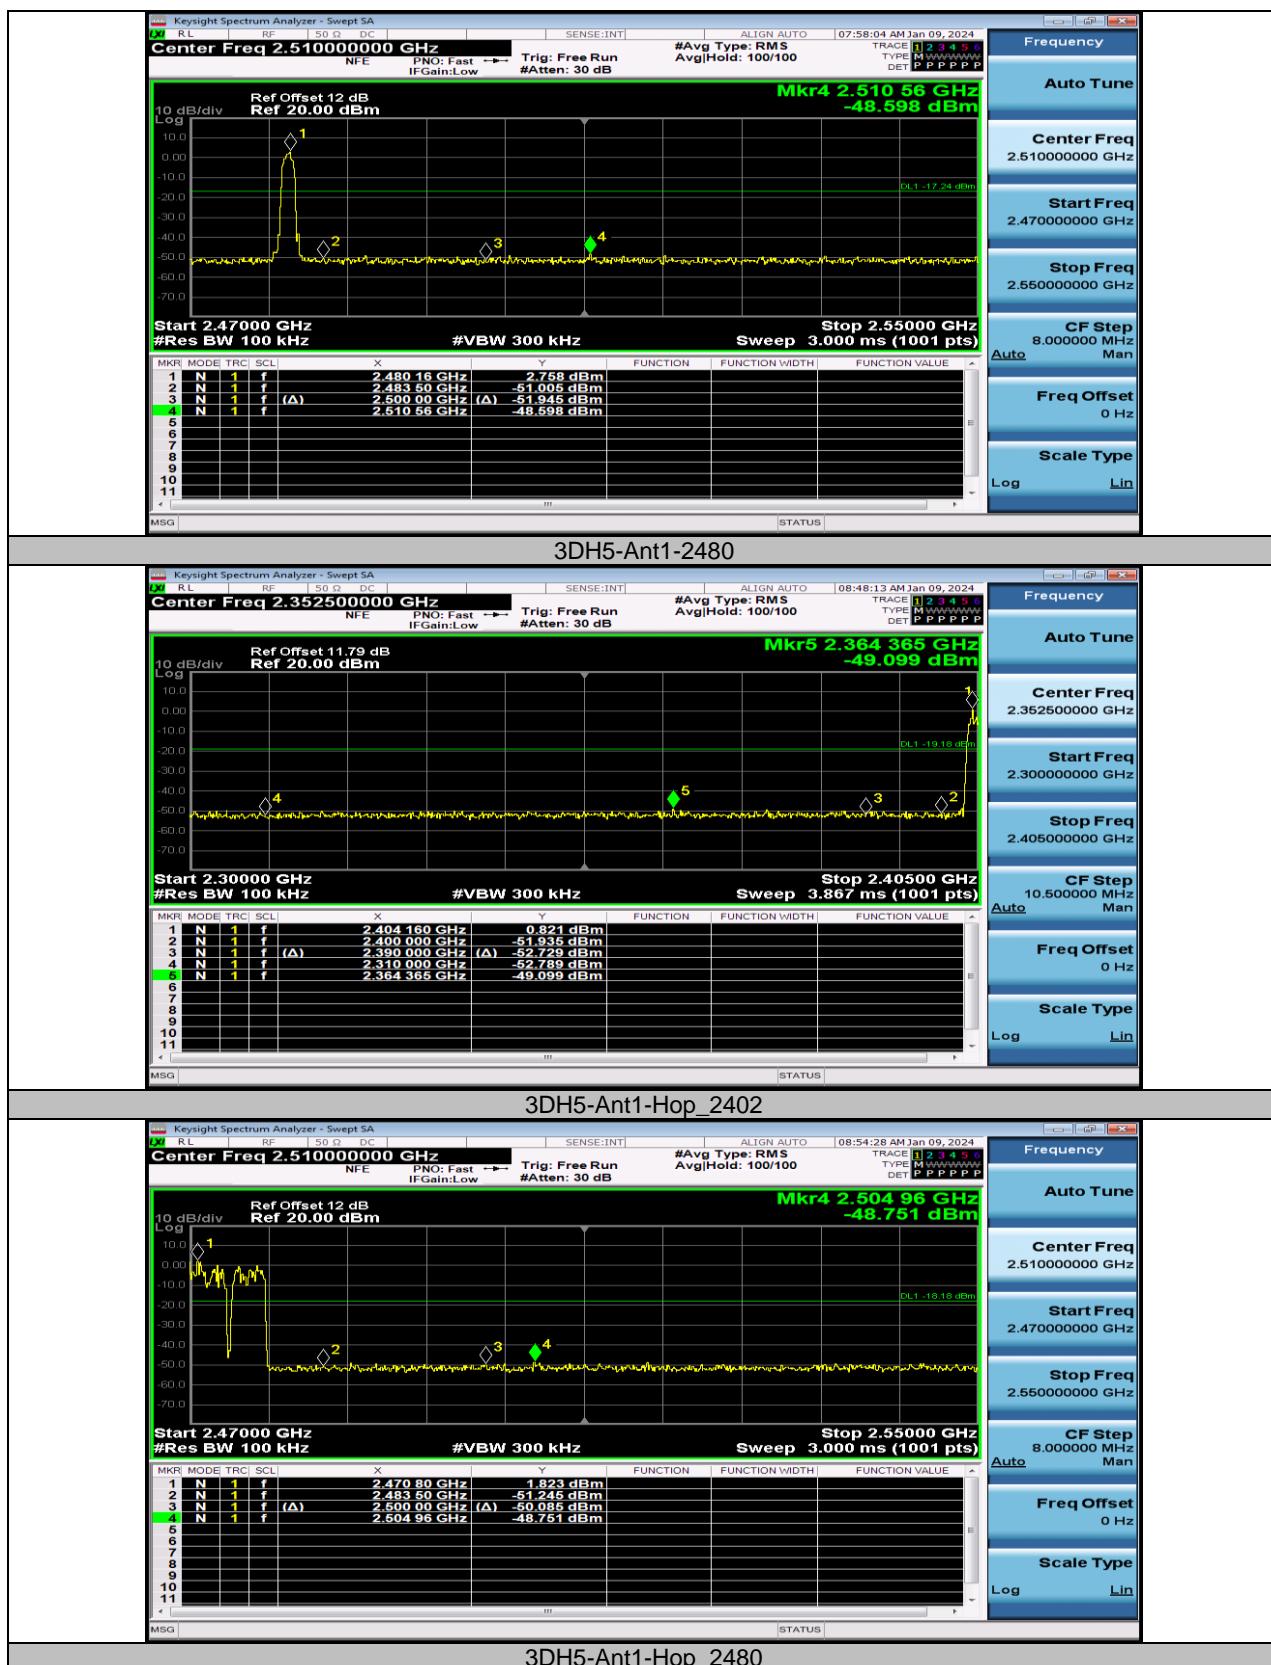


TEST REPORT**Conducted Spurious Emission****Test Result**

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	4.70	4.70	---	PASS
DH5	Ant1	2402	30~1000	4.70	-61.14	≤-15.3	PASS
DH5	Ant1	2402	1000~26500	4.70	-52.57	≤-15.3	PASS
DH5	Ant1	2441	0~Reference	4.74	4.74	---	PASS
DH5	Ant1	2441	30~1000	4.74	-60.29	≤-15.26	PASS
DH5	Ant1	2441	1000~26500	4.74	-52.61	≤-15.26	PASS
DH5	Ant1	2480	0~Reference	3.52	3.52	---	PASS
DH5	Ant1	2480	30~1000	3.52	-60.76	≤-16.48	PASS
DH5	Ant1	2480	1000~26500	3.52	-52.65	≤-16.48	PASS
2DH5	Ant1	2402	0~Reference	2.13	2.13	---	PASS
2DH5	Ant1	2402	30~1000	2.13	-60.99	≤-17.87	PASS
2DH5	Ant1	2402	1000~26500	2.13	-50.82	≤-17.87	PASS
2DH5	Ant1	2441	0~Reference	3.37	3.37	---	PASS
2DH5	Ant1	2441	30~1000	3.37	-60.72	≤-16.63	PASS
2DH5	Ant1	2441	1000~26500	3.37	-53.16	≤-16.63	PASS
2DH5	Ant1	2480	0~Reference	2.14	2.14	---	PASS
2DH5	Ant1	2480	30~1000	2.14	-61.03	≤-17.86	PASS
2DH5	Ant1	2480	1000~26500	2.14	-52.38	≤-17.86	PASS
3DH5	Ant1	2402	0~Reference	2.81	2.81	---	PASS
3DH5	Ant1	2402	30~1000	2.81	-60.5	≤-17.19	PASS
3DH5	Ant1	2402	1000~26500	2.81	-52.13	≤-17.19	PASS
3DH5	Ant1	2441	0~Reference	3.31	3.31	---	PASS
3DH5	Ant1	2441	30~1000	3.31	-61.25	≤-16.69	PASS
3DH5	Ant1	2441	1000~26500	3.31	-52.98	≤-16.69	PASS
3DH5	Ant1	2480	0~Reference	0.98	0.98	---	PASS
3DH5	Ant1	2480	30~1000	0.98	-61.57	≤-19.02	PASS
3DH5	Ant1	2480	1000~26500	0.98	-52.36	≤-19.02	PASS

TEST REPORT

Test Graphs

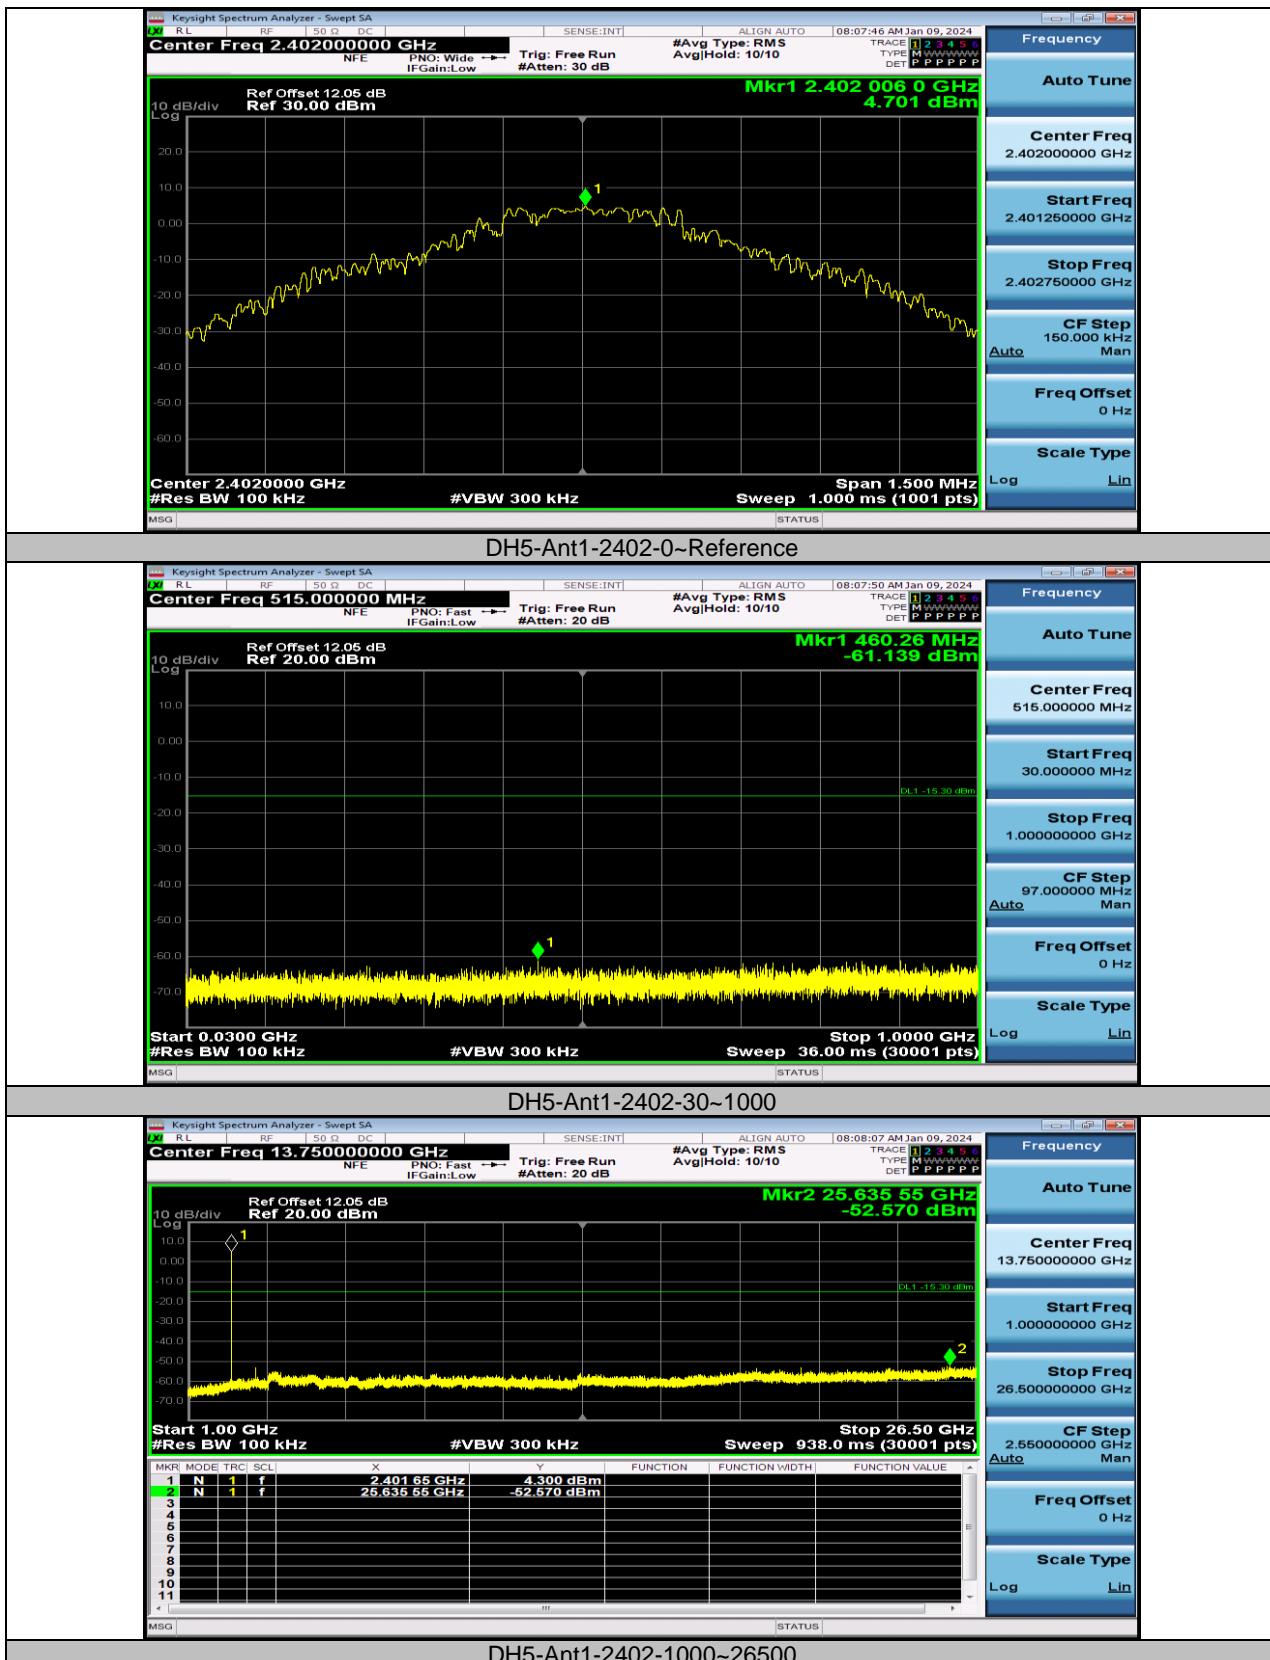

TEST REPORT

