

# Cisco SD-Access | SD-WAN *Integrated Domain* Pairwise Integration

## Prescriptive Deployment Guide

October 2021

First Publish: 30 September 2021  
Last Update: 12 October 2021

---

# Contents

Hardware and Software Version Summary .....	3
About This Guide .....	4
Define.....	7
Cisco Software-Defined Wide Area Network Solution Overview.....	7
Cisco Software-Defined Access Overview .....	8
Protocol Operational Planes Overview .....	10
Cisco SD-Access   Cisco SD-WAN Pairwise Integration Overview.....	12
Integrated Domain Protocol Integrations .....	13
Design .....	16
Integrated Domain Design Considerations.....	21
Deploy.....	28
Process 1: Verifying Prerequisites for Integrated Domain .....	31
Process 2: Associate IOS-XE WAN Edge device with Service VPN.....	36
Process 3: Integrate the domain controllers .....	46
Process 4: Configuring LAN Segment manually.....	63
Process 5: Configuring LAN Segment with LAN Automation .....	81
Process 6: Provision Cisco SD-Access Fabric Site(s).....	89
Process 7: Defining Group-Based Access Control Policies .....	121
Operate.....	126
Process 1: Monitoring and Assuring the Cisco SD-Access Infrastructure .....	126
Process 2: Validating Policy Enforcement .....	132
Process 3: Monitoring SD-WAN Edge device .....	133
Appendix A: Hardware and Software Versions .....	136
Appendix B: References Used in This Guide.....	140
Appendix C: Acronym Glossary .....	141
Appendix D: Recommended for You .....	147
Feedback.....	148


# Hardware and Software Version Summary

**Table 1.** Hardware and Software Version Summary

Product	Software version
Cisco DNA Center Appliance	2.2.2.5 (System 1.6.424)
Cisco Identity Services Engine	3.0 Patch 2
Cisco SD-WAN Controllers	20.3.4
Cisco IOS XE WAN Edge Devices	IOS XE 17.3.4a
Cisco SD-Access Devices	IOS XE 17.3.4

---

## About This Guide

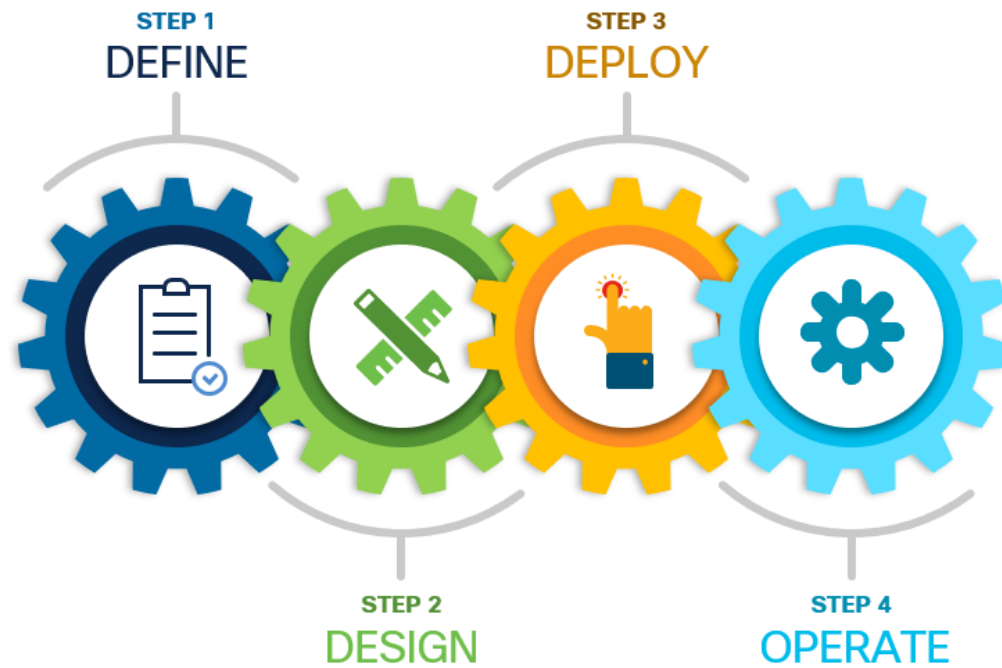

This document contains four major sections:

The **DEFINE** section provides a high-level overview of the Cisco SD-WAN, SD-Access architecture, and components.

The **DESIGN** section provides a detailed discussion on the design considerations, deployment topology options, and prerequisites needed to integrate the solutions.

The **DEPLOY** section discusses step-by-step procedures, workflows to connect multiple SD-Access fabric sites with SD-WAN network.

The **OPERATE** section briefly discusses how to monitor and troubleshoot the common issues.

Refer to [Appendix A](#) for details on the platform and software versions used to build this document.



## Introduction


This guide provides design and deployment steps to use the Cisco SD-Access and Cisco SD-WAN solutions to achieve end-to-end segmentation and consistent policy across enterprise and branch. The guide focuses on the design considerations, best practices, and the step-by-step procedures needed to integrate the two solutions together.

The Cisco SD-Access | Cisco SD-WAN *Integrated* Domain and *Independent* Domain deployment models provide network administrators the ability to:

- Securely onboard network devices and interconnect campus and branch locations
- Preserve Scalable Group Tags (SGTs) across the SD-WAN transport
- Maintain end-to-end segmentation across the enterprise campus and branch locations
- Define and enforce group-based policy throughout the network

These capabilities, coupled with the unique capabilities provided through each solution, enables organizations to build the next-generation Intent-Based Networking solution.

Figure 1. *Integrated* Domain Components

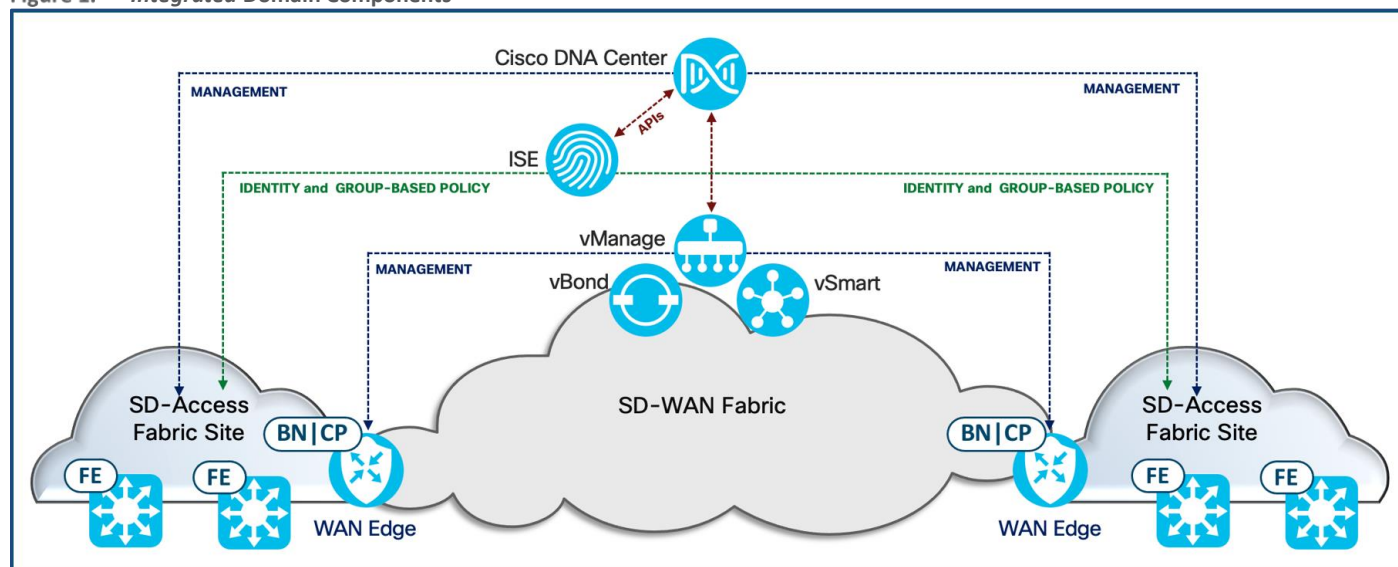

The guide focuses on the *Integrated* Domain deployment model where the SD-WAN controllers and Cisco DNA Center are integrated. In this approach, the WAN Edge devices perform both SD-WAN edge and SD-Access border and control plane functionality, managed and provisioned by the SD-WAN controllers. The SD-WAN vManage controller shares the WAN Edge devices to Cisco DNA Center. The SD-Access fabric components are managed and provisioned by the Cisco DNA Center.

---

## Companion Resources

For more information on the SD-WAN Design and Deployment best practices, see:

- [Cisco SD-WAN Design Guide](#)
- [Cisco WAN Edge Onboarding Prescriptive Deployment Guide](#)
- [Cisco SD-WAN End-to-End Deployment Guide](#)

For more information on the SD-Access best practices design and deployment, see:

- [SD-Access Solution Design Guide](#)
- [SD-Access and Cisco DNA Center Management Infrastructure](#)
- [SD-Access Fabric Provisioning Prescriptive Deployment Guide](#)
- [SD-Access for Distributed Campus Deployment Guide](#)

For all full list of related deployment guides, design guides, and white papers, visit the following pages:

- <https://cs.co/en-cvds>
- <https://www.cisco.com/go/designzone>

If you didn't download this guide from Cisco Community or Design Zone, you can [check for the latest version](#) of this guide.

## Audience

The intended audience for this document includes network design engineers and network operations personnel who are looking to deploy multiple Cisco SD-Access sites, interconnect with Cisco SD-WAN solution with the intent to maintain end-to-end automation, segmentation, and consistent group-based policy.

## Define

This chapter is organized into the following sections:

Chapter	Section
Define	<a href="#">Cisco SD-WAN Solution Overview</a>
	<a href="#">Cisco SD-Access Solution Overview</a>
	<a href="#">Protocol Operational Planes Overview</a>
	<a href="#">Cisco SD-Access   SD-WAN Pairwise Overview</a>
	<a href="#">Integrated Domain Protocol Integrations</a>

## Cisco Software-Defined Wide Area Network Solution Overview

The Cisco® Software-Defined Wide Area Network (SD-WAN) solution is an enterprise-grade SD-WAN overlay architecture that enables digital and cloud transformation. The solution fully integrates routing, security, centralized policy, management, and orchestration into large-scale networks and addresses the problems and challenges of common WAN deployments.

### Cisco SD-WAN Solution Components

There are four key components that make up the Cisco SD-WAN solution, each performing distinct activities in different network planes of operation: orchestration plane, management plane, control plane, and data plane.

**Orchestration Plane Controller** – Securely onboards the SD-WAN Edge routers into the SD-WAN overlay


**Management Plane Controller** – Provides assurance, visibility, and management

**Control Plane Controller** – Responsible for central configuration and monitoring

**Data Plane Devices** – Forwards packets based on decisions from the control plane

In Cisco SD-WAN, Cisco vBond is responsible for the orchestration plane, the management plane is enabled and powered through Cisco vManage, Cisco vSmart drives the control plane, and Cisco IOS® XE SD-WAN Edge routers are responsible for the data plane.

Figure 2. Cisco SD-WAN Solution components

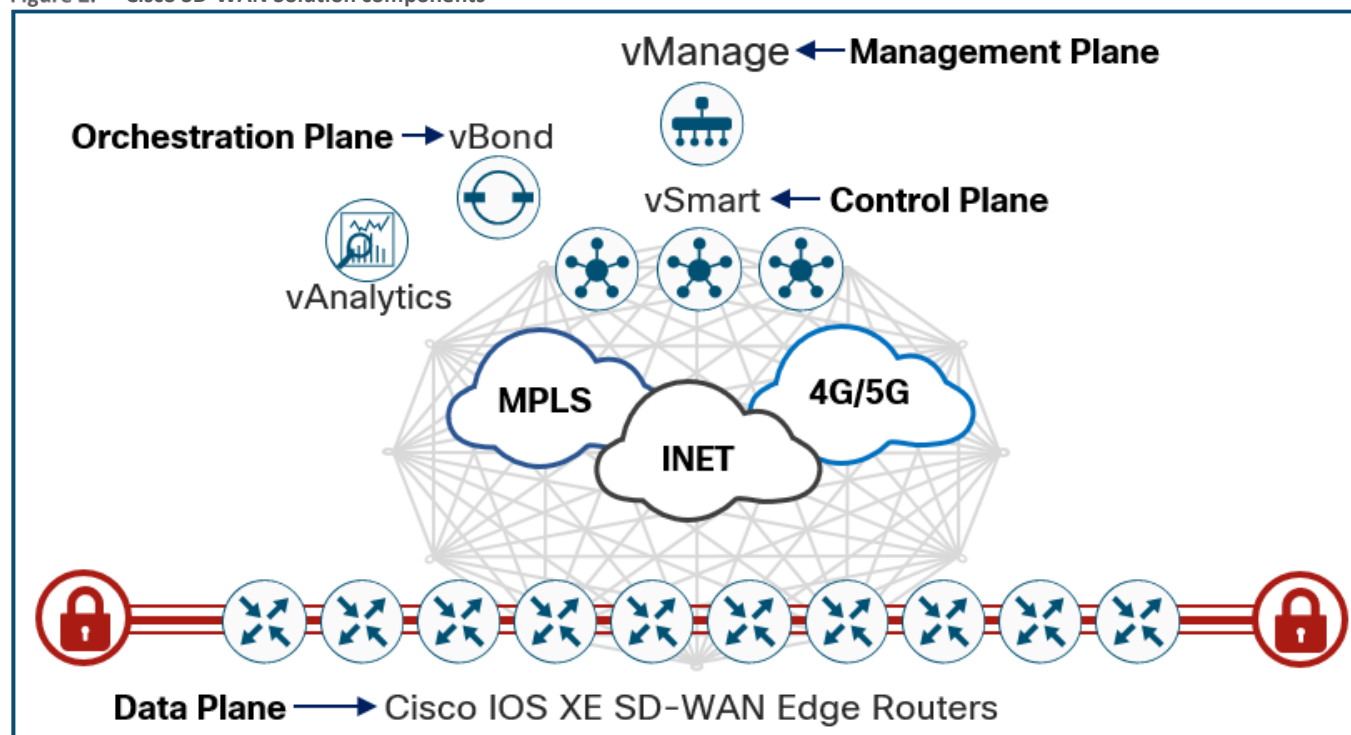

**vBond** – The vBond controller, or vBond *orchestrator*, authenticates and authorizes the SD-WAN routers and controllers into the network. The vBond orchestrator uses a distribute list to propagate vSmart and vManage controller information to the WAN Edge routers.

**vManage** – The vManage controller is the centralized network management system that provides the GUI interface. This single pane of glass allows easy deployment, configuration, monitoring, and troubleshooting of the Cisco SD-WAN network.

**vSmart** – vSmart builds and maintains the network topology and makes decisions on the traffic flows. The vSmart controller disseminates control plane information between WAN Edge devices, enforces centralized control plane policies, and distributes data plane policies to the WAN Edge devices to do enforcement.

**vAnalytics** – Cisco vAnalytics is a cloud-based service that provides visibility and insights into the network infrastructure, application usage, and performance across the SD-WAN network.

**SD-WAN Edge Routers** – WAN Edge devices provide secure data plane connectivity across locations connected to the WAN network. These routers are responsible for traffic forwarding and provide security, encryption, and quality of service (QoS) enforcement.

## Cisco Software-Defined Access Overview


Cisco® Software-Defined Access (SD-Access) is the evolution from traditional campus designs to networks that directly implement the intent of an organization. SD-Access is a software application running on Cisco DNA Center hardware that is used to automate wired and wireless campus networks.

*Fabric technology*, an integral part of SD-Access, provides wired and wireless campus networks with programmable overlays and easy-to-deploy network virtualization, permitting a physical network to host one or more logical networks to meet the design intent. In addition to network virtualization, fabric technology in the campus network enhances control of communications, providing software-defined segmentation and policy enforcement based on user identity and group membership. Software-defined segmentation is seamlessly integrated using Cisco TrustSec® technology, providing micro-segmentation for groups

within a virtual network using scalable group tags (SGTs). Using Cisco DNA Center to automate the creation of virtual networks with integrated security and segmentation reduces operational expenses and reduces risk. Network performance, network insights, and telemetry are provided through the Assurance and Analytics capabilities.

## Cisco SD-Access Solution Components

Figure 3. Cisco SD-Access Solution components

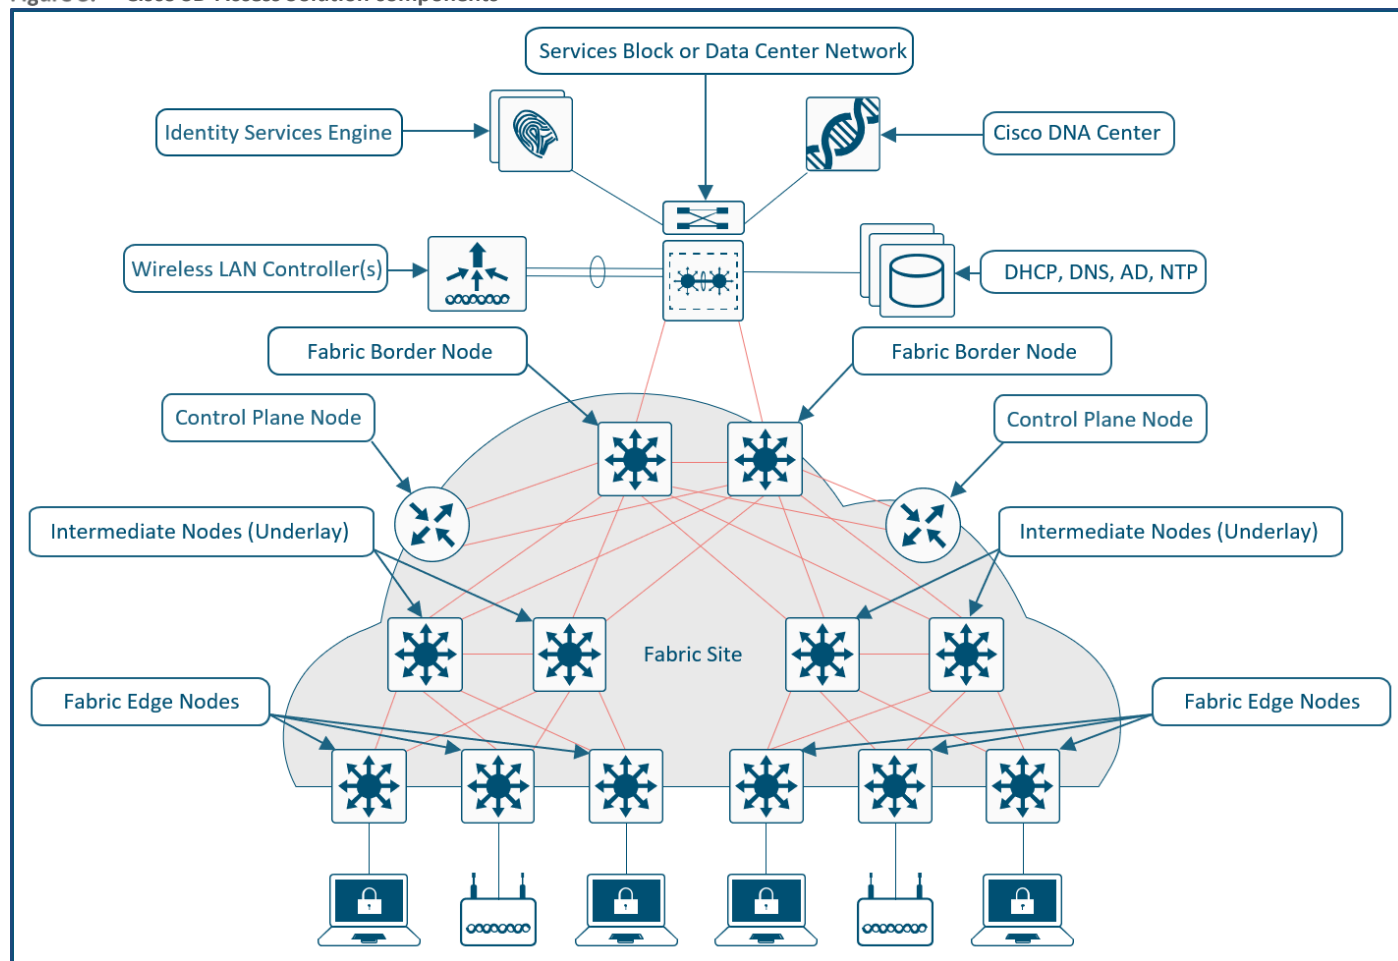

The Cisco SD-Access solution is comprised of the following components:

**Fabric Site** – Independent fabric includes a control plane node, border node, edge node, and usually includes a Cisco Identity Services Engine (ISE) Policy Service Node (PSN) and fabric-mode Wireless LAN Controller (WLC).

**Fabric Edge Nodes** – This is equivalent to an access layer switch in a traditional campus LAN design. Endpoints, IP phones, and wireless access points are directly connected to edge nodes.

**Fabric Border Node** – This serves as the gateway between the SD-Access fabric site and networks external to the fabric. The border node is the device physically connected to a transit (either SD-WAN transit, IP-Transit or SD-Access transit) or to a next-hop device connected to the outside world.

**Fabric Control Plane Node** – The SD-Access fabric control plane node is based on the LISP Map-Server (MS) and Map-Resolver (MR) functionality combined on the same node. The control plane database tracks all endpoints in the fabric site and associates the endpoints to fabric edge nodes, decoupling the endpoint IP address or MAC address from the location (closest router) in the network.

**Fabric Wireless LAN Controller** – The Wireless LAN Controller (WLC) provides centralized access point (AP) image and configuration management and client session management. The WLC integrates and communicates with the fabric Control Plane Node to provide mobility services for endpoints attached to fabric Access Points.

**Fabric Access Points** – Access Points (APs) operating with fabric SSIDs build a VXLAN data tunnel to fabric Edge Nodes. Control traffic is still tunneled to the WLC. By terminating client traffic at the first-hop Edge Node, policy for wired and wireless traffic can be enforced at the same location in the network.

**Identity Service Engine (ISE)** – Cisco ISE is a secure network access platform enabling increased management awareness, control, and consistency for users and devices accessing an organization's network. ISE is an integral part of SD-Access for policy implementation, enabling dynamic mapping of users and devices to scalable groups and simplifying end-to-end security policy enforcement.

**Cisco DNA Center** – Cisco DNA Center software, including the SD-Access application package, is designed to run on the Cisco DNA Center Appliance. The Cisco UCS® appliance is available in form factors sized to support not only the SD-Access application but also network assurance.

The same enterprise Cisco DNA Center cluster can be used to discover, provision, and manage all the network devices across the enterprise—campus and remote branch locations.

**Virtual Networks (Macro-segmentation)** – Use Virtual Networks (VNs) when requirements dictate isolation at both the data plane and control plane. In general, if devices need to communicate with each other, they should be placed in the same virtual network. If communication is required between different virtual networks, use an external firewall or other device to enable inter-VN communication. A VN provides the same behavior and isolation as VRFs.

**SGTs (Micro-segmentation)** – SGTs allow for simple-to-manage group-based policies and enable granular data plane isolation between groups of endpoints within a virtualized network. Using SGTs also enables scalable deployment of policy without having to do cumbersome updates for these policies based on IP addresses.

## Protocol Operational Planes Overview

This chapter is organized into the following sections:

Chapter	Section
Protocol Operational Planes	<a href="#">Control Plane Protocols</a>
	<a href="#">Data Plane Protocols</a>
	<a href="#">Policy Plane Protocols</a>

In SD-Access the control plane is based on Locator/ID Separation Protocol (LISP), the data plane is based on Virtual Extensible LAN (VXLAN), the policy plane is based on Cisco TrustSec and the management plane is enabled and powered by Cisco DNA Center.

In SD-WAN the control plane is based on Overlay Management Protocol (OMP), the data plane is based on IPSec/GRE, the policy plane is not limited to Layer 3 through Layer 7 information and can incorporate Service Level Agreements managed by vSmart, and the management plane is enabled and powered by vManage.

An overview of each of these protocols is provided in this section. The interaction of these protocols and how they are used to carry segmentation, policy, and traffic end-to-end is discussed in the [next section](#).

### Tech tip

For additional details on the SD-Access protocols, see: [SD-Access Operational Planes](#) in the Cisco SD-Access Solution Design Guide.

## Control Plane Protocols


Cisco SD-Access leverages LISP control plane to communicate and exchange the endpoint's identity (EID) in relationship to its routing locator (RLOCs). The fabric devices query the control plane nodes to determine the RLOC information associated with the destination address (EID-to-RLOC mapping) and use the RLOC information as the traffic destination.

Cisco SD-WAN leverages OMP to communicate and exchange the route prefixes, next-hop routes, crypto, and policy information between WAN Edge routers and vSmart controllers. The LAN Segment routes are redistributed into OMP and advertised to the vSmart controller. The vSmart controller then redistributes these learned routes to other WAN Edge routers in the SD-WAN network.

## Data Plane Protocols

Cisco SD-Access uses VXLAN as the encapsulation method for data packets. When encapsulation is added to the data packets, a tunnel network is created between the fabric devices. The fabric devices place additional information in the fabric VXLAN header, including attributes that can be used to make forwarding decisions by identifying each overlay virtual network using VXLAN network identifier (VNI) and policy decision with the Scalable Group Tag. At minimum, these extra headers add additional 50 bytes of overhead to the original packet.

**Figure 4. VXLAN-GBP (VXLAN-GPO) Packet Header**

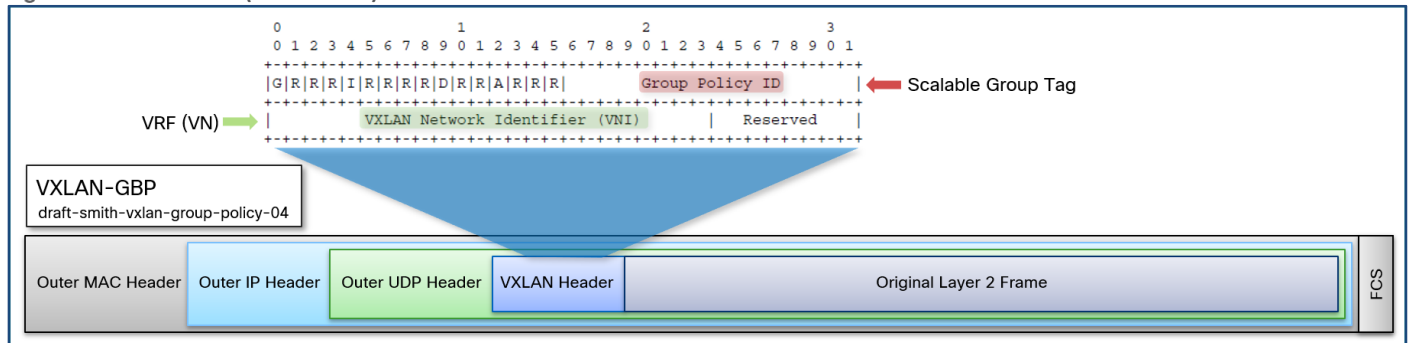


Cisco SD-WAN secures the data traffic with IPsec authentication and encryption. The secure data plane connection is established at the time of the WAN Edge onboarding process to ensure data plane integrity.

Cisco WAN Edge devices support MPLS extensions to data packets that are transported within IPsec connections. These extensions provide the ability to carry the network segmentation (Virtual Network ID) information across the WAN environment.

Cisco IOS XE 17.3.1a introduced Cisco TrustSec capabilities, which adds an additional 8 bytes header. This header, Cisco Meta Data or MDATA, is used to carry the SGT in the WAN environment.

**Figure 5. SD-WAN IPsec Packet Header**

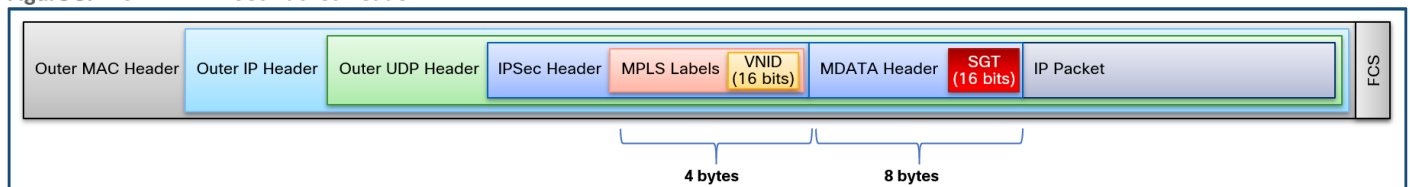

## Policy Plane Protocols

The Cisco SD-Access solution leverages the Cisco TrustSec solution as the policy plane. The solution is defined in three phases: classification, propagation, and enforcement. Cisco TrustSec implementation uses ingress classification and egress enforcement.

---

**Classification** – An SD-Access Edge Node sends user and device authentication requests to the ISE Policy Services Node (PSN) persona via RADIUS packets. The ISE Policy Service Node persona provides the scalable group tag (SGT) as part of the authorization profile. This provides an association between the SGT and the endpoint.

**Propagation** – Any data traffic from the endpoint traversing the Edge Node is tagged with the SGT value. This SGT information is carried to the fabric node in a VXLAN-encapsulated packet.

**Enforcement** – Security policies relevant to the SGT are downloaded from ISE PSN persona and installed on the fabric edge for policy enforcement. The fabric edge only downloads policies relevant to directly connected endpoints. The destination fabric node leverages the SGT information in the VXLAN data packet and SGT value of the directly connected endpoint for policy enforcement at the destination egress direction.

## Cisco SD-Access | Cisco SD-WAN Pairwise Integration Overview

The focus of the SD-Access | SD-WAN Pairwise Integration is to connect multiple, independent SD-Access fabric sites using a Cisco SD-WAN transport. This transport preserves the macro- and micro-segmentation constructs of virtual network (VN) and security group tags (SGTs), respectively. This enables secure endpoint onboarding, consistent user experience, and consistent end-to-end security policies across the enterprise for any user, any device, or any application that are anywhere on the network.

The SD-Access | SD-WAN Pairwise Integration can be deployed in three ways:

- [Integrated Domain](#)
- [Independent Domain](#)
- Both

### Integrated Domain Deployment

In this deployment approach, the SD-WAN controllers and Cisco DNA Center are integrated together. This allows for the sharing of network device information and configuration between the controllers for an end-to-end automation and seamless integration. In this model, the SD-WAN Edge functionality is colocated with the SD-Access Border Node and Control Plane Node functionality on the same device.

Cisco SD-Access | SD-WAN *Integrated* Domain integration provide the capability of carrying end-to-end segmentation and policy with the simplicity of managing the domains together. This is best suited for a branch or remote location across the WAN.

### Independent Domain Deployment

In this deployment approach, the SD-WAN controllers and Cisco DNA Center are **not** integrated. The SD-Access fabric roles are deployed on one set of network devices, while the SD-WAN Edge functionality is deployed on a separate set of network devices. In this deployment, the SD-Access components are managed independently by Cisco DNA Center, and Cisco SD-WAN components are managed independently by the vManage controller.

Cisco SD-Access | SD-WAN *Independent* Domain integration provide the capability of carrying end-to-end segmentation and policy with the flexibility of managing the domains independently. Using Inline tagging and 802.1Q tags, the segmentation constructs are carried across the *independent* domains.


### Hybrid Independent and Integrated Domain Deployments

This model allows enterprises with multiple fabric sites to deploy a combination of *Independent* Domain and *Integrated* Domain deployment models across their networks.

This deployment model is commonly seen in branch deployments with centralized headend locations. At the branch locations, the SD-Access functionality and SD-WAN functionality are colocated on the same device(s). At the headend location, the SD-Access and SD-WAN functionality are deployed on separate devices.



Figure 6. *Independent Domain at Headend and Integrated Domain at Branch*

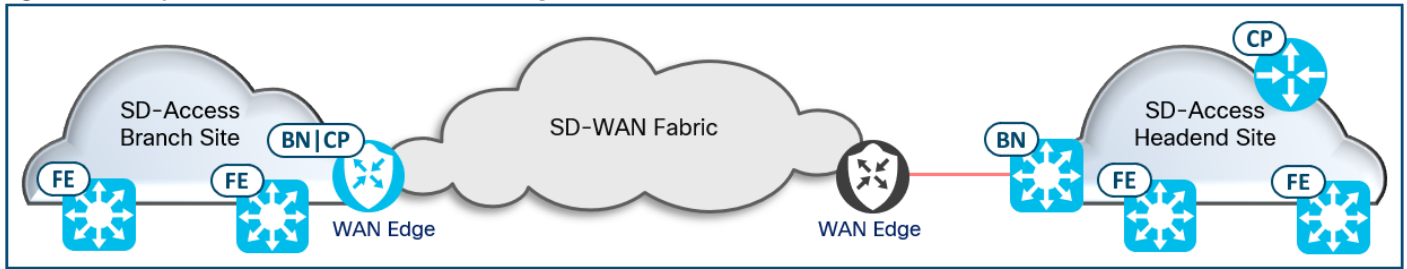

#### Tech tip

An SD-Access fabric site can be deployed with the *Independent Domain* model or the *Integrated Domain* model. Both models cannot be deployed together at the same fabric site.

## Integrated Domain Protocol Integrations

This chapter is organized into the following sections:

Chapter	Section
<i>Integrated Domain</i> Protocol Integrations	<a href="#">Control Plane Integration</a>
	<a href="#">Data Plane Integration</a>
	<a href="#">Policy Plane Integration</a>
	<a href="#">Putting It All Together</a>

### Control Plane Integrations – Integrated Domain

In the *Integrated Domain* Pairwise Integration, the WAN Edge device performs WAN Edge, colocated fabric Border and Control Plane functionality. SD-Access control plane protocol (LISP) is redistributed into SD-WAN control plane protocol (OMP) and vice versa to share routes across the sites. Each virtual network in the SD-Access environment is mapped to a dedicated service VPN in the SD-WAN environment. This ensures routes are shared across mapped segment and provide end-to-end segmentation across the WAN environment.

### Data Plane Integrations – Integrated Domain

The data traffic in the SD-Access fabric site is VXLAN encapsulated. The VXLAN header carries the virtual network and scalable group tag from the Edge Node towards the Border Node or towards another Edge Node and vice-versa. The WAN Edge device, also the fabric Border Node, decapsulates the VXLAN packet and performs route lookup to determine the egress interface to reach the remote-site across the SD-WAN fabric in that segment. The VPN and SGT learnt from the SD-Access network is carried across the WAN transport to the remote site.


The remote-site WAN Edge device decapsulates the IPSec data packets. Based on the VPN ID information in the MPLS label header, the packet is forwarded into the appropriate SD-Access virtual network. The WAN Edge device copies the VPN and SGT in the IPSec header to the SD-Access VXLAN packet, before forwarding the data traffic at the SD-Access fabric segment, preserving the segment information in the data plane.

### Policy Plane Integrations – Integrated Domain

In the *Integrated Domain* Pairwise Integration, the SGT is extracted from the fabric VXLAN header (VXLAN-GPO) by the Border Node and placed in the CMD header of the IPSec packet. The Border Node, also the WAN Edge device, carries the SGT into the

IPSec CMD header. This allows the SGT to be carried across WAN transport to other SD-Access fabric sites. Once received by the WAN Edge router on the other side of the IPSec tunnel, the process of transferring the SGT occurs in reverse. The SGT is copied back to the VXLAN header and carried in the fabric segment. This preserves the end-to-end segmentation in the policy plane.

**Figure 7. Integrated Domain Protocols Integrations**

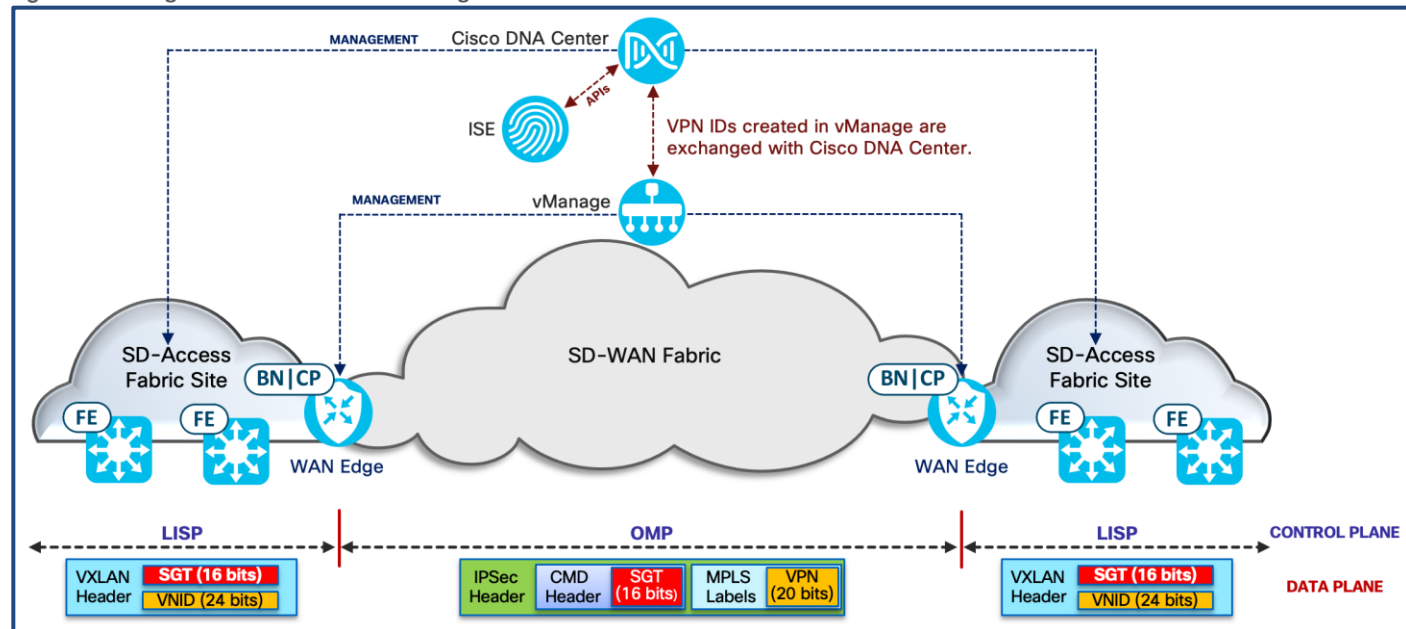

## Putting It All Together

Cisco DNA Center provides network operators the ability to automate the LAN segment with SD-Access workflows. Cisco vManage SD-WAN Controller provides WAN segment automation with feature templates. In the *Integrated* Domain deployment model, the domain controllers are integrated from the Cisco DNA-Center by providing SD-WAN vManage controller details.

The secure integration between the controllers allows to share information through RESTful API calls. The respective domain orchestrator owns the workflow and configuration generation:

- SD-WAN vManage controller owns the WAN configuration generation and provision.
- Cisco DNA Center owns the SD-Access configuration generation and provisioning to all LAN segment network devices with the exception of WAN Edge devices.
- Cisco DNA-Center builds and shares the required fabric configuration to the vManage SD-WAN controller to provision the WAN Edge with colocated Border and Control Plane functionality.


This provides enterprise deployments the flexibility to integrate the two domains together with the ability to securely onboard, provision the network devices and extend the benefits of Cisco SD-Access across sites, maintaining end-to-end segmentation and consistent policy across sites.

With the *Integrated Domain* deployment:

- The Virtual Network segmentation in the Cisco SD-Access environment is mapped to corresponding service VPN on the WAN Edge device to extend the macro-segmentation.
- The Scalable Group Tag is carried from the Cisco SD-Access environment to the WAN environment natively in the data plane.

- The WAN Edge device, also the fabric Border and Control Plane node, transfers the SGT data from the VXLAN into IPSec data packet header and carries it across the WAN environment, preserving the micro-segmentation.

Figure 8. VXLAN to Inline Tagging to IPSec

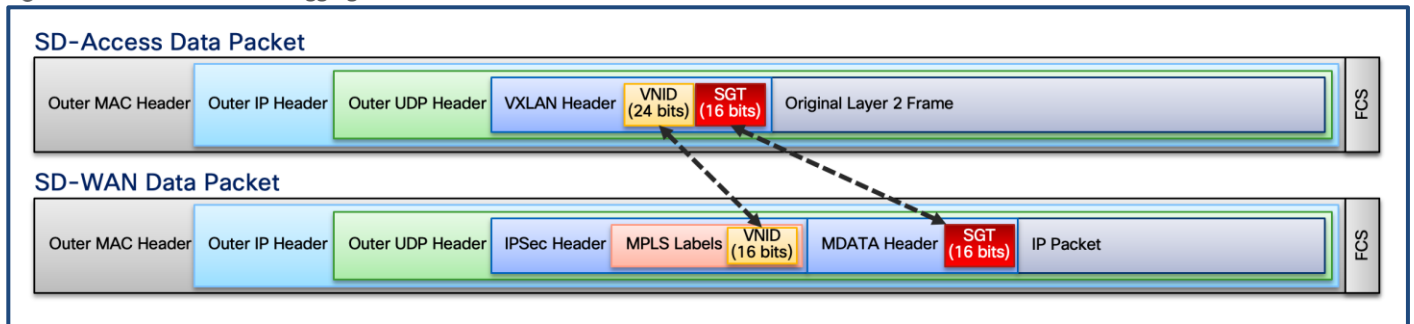

## Design

This chapter is organized into the following sections:

Chapter	Section
Design	<a href="#">SD-WAN Flexible Topologies Overview</a>
	<a href="#">SD-WAN High Availability Topologies</a>
	<a href="#">SD-Access Flexible Topologies Overview</a>
	<a href="#">Flexible Topologies Integration</a>
	<a href="#">Integrated Domain Design Considerations</a>

This section discusses design consideration, provides an overview of the topology used in this guide, and deployment steps to build distributed SD-Access fabric sites interconnect with the SD-WAN transport using the *Integrated* Domain deployment approach.

### SD-WAN Flexible Topologies Overview

Cisco SD-WAN solution provides flexibility in creating various WAN overlay topologies. By default, Cisco WAN Edge devices establish full-mesh IPsec data plane connections with other WAN Edge devices in the SD-WAN overlay infrastructure. Depending on the size of the network, it might not be desirable to build full-mesh WAN topology, either due to routing platform limitations or the number of tunnels the router can support.

Based on the deployment requirements, the SD-WAN overlay network can be modified to establish hub-and-spoke, partial-mesh, or a combination of both with simple control policies defined in vManage. Additionally, any SD-WAN specific use cases, such as Direct Internet Access (DIA), Application-Aware Routing, and App QoE can be provisioned and monitored from vManage.

Refer to [Cisco SD-WAN Design Guide](#) for design recommendations and best practices to build SD-WAN infrastructure.

**Figure 9. SD-WAN Hub-and-Spoke Deployment**

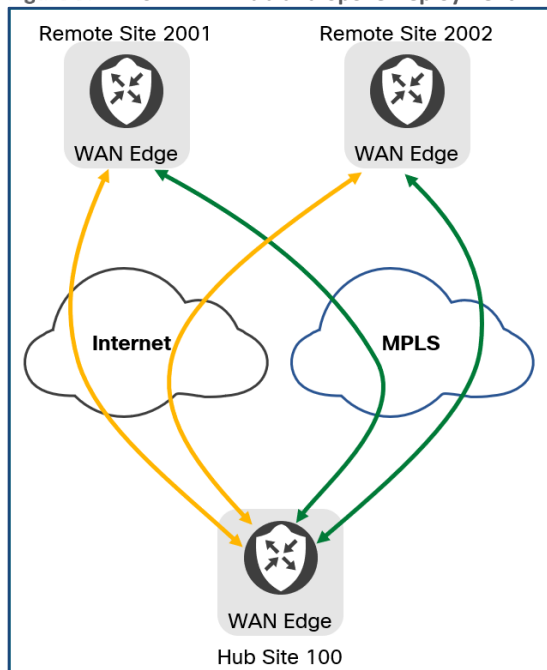


Figure 10. SD-WAN Partial-Mesh Deployment


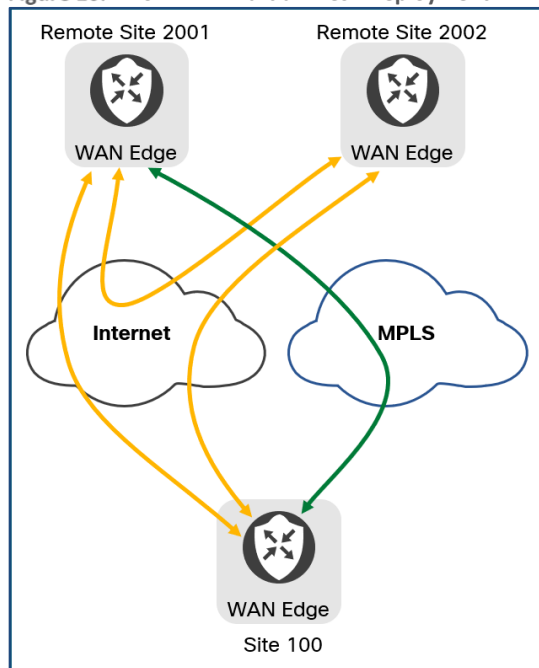


Figure 11. SD-WAN Full-Mesh Deployment

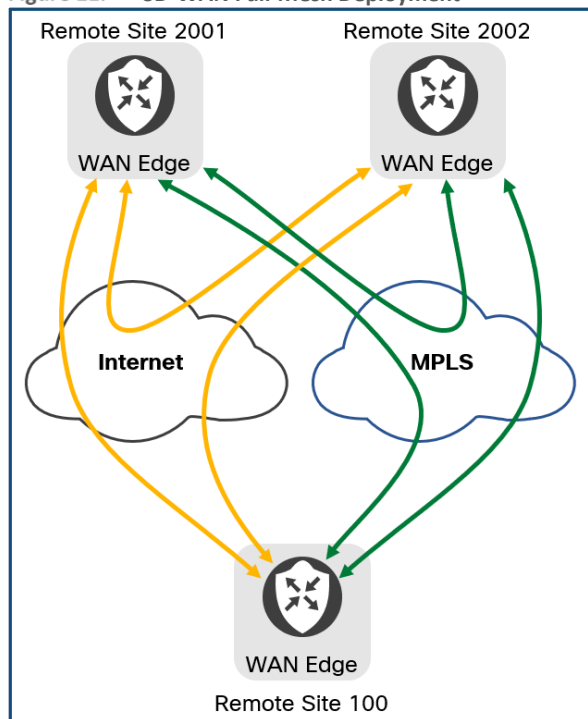

## SD-WAN High Availability Topologies

High Availability in the SD-WAN network can be achieved through several different topologies. For high availability in the physical network, a WAN Edge device can connect to multiple WAN transports. For high availability in the physical network and physical devices, two WAN Edge devices can be deployed in a dual multihomed topology where both WAN Edge devices connect to both WAN transports. For environments that cannot dual multihome, an alternative is single multihoming. Each WAN Edge device is connected to a single WAN transport, and the TLOC extension is used between the routers to connect to the other WAN transport.



Figure 12. Single WAN Edge Dual Homed

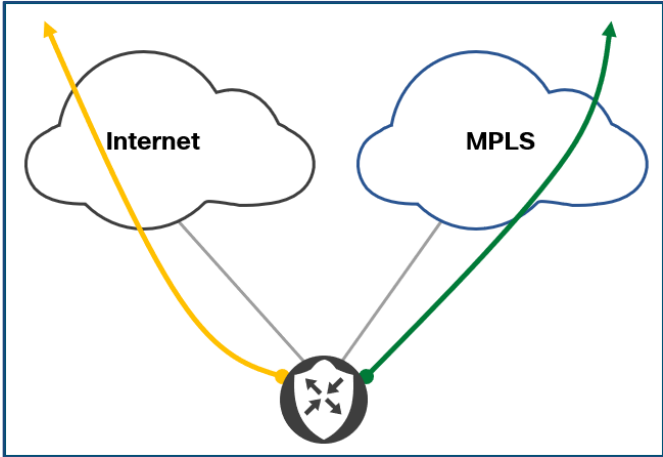


Figure 13. Two WAN Edge Devices Dual Multihomed


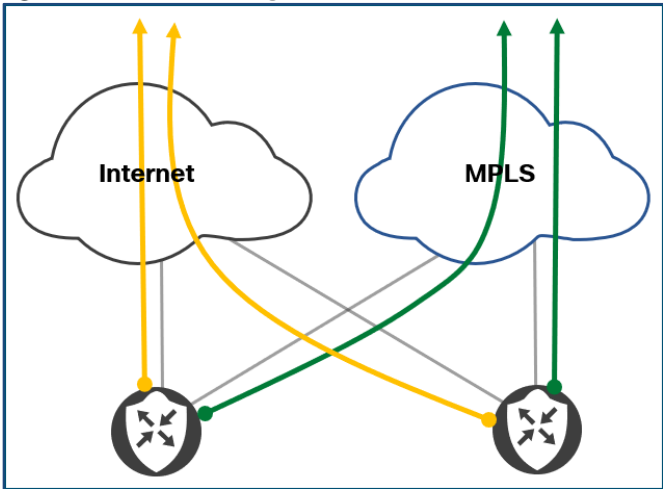


Figure 14. Two WAN Edge Devices Single Multihomed with TLOC Extension

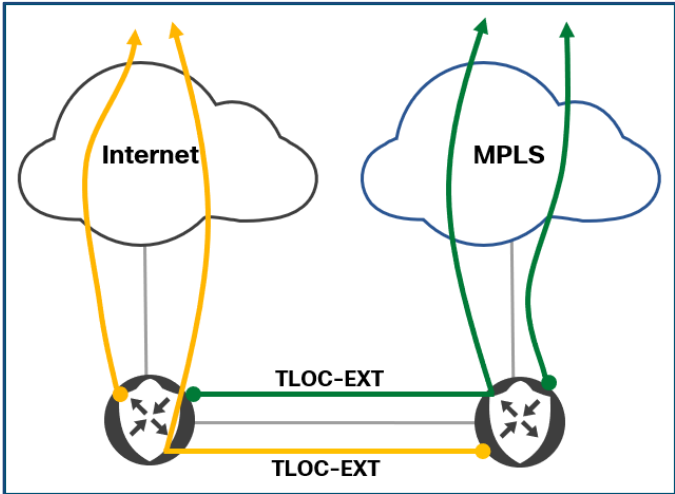

---

## SD-Access Flexible Topology Overview

Having a well-designed network foundation on which to build the overlay ensures the highest stability, performance, and most efficient utilization of the SD-Access network. This underlay network foundation can be built manually, which provides the largest degree of configuration granularity, or it can be automated through Cisco DNA Center LAN Automation. LAN Automation is the Plug-n-Play (PnP) zero-touch automation of the underlay network in the SD-Access solution. The simplified procedure builds a solid, error-free underlay network using the principles of a Layer 3 routed access design.

Whether using Layer 2 switched access or Layer 3 routed access, the network should utilize full-mesh, equal-cost routing paths leveraging Layer 3 forwarding in the core and distribution layers of the network to provide the most reliable and fastest converging design for those layers. For optimum convergence at the core and distribution layer, build triangles, not squares, to take advantage of equal-cost redundant paths.

Refer to [Cisco SD-Access Solution Design Guide - Underlay Network Design Chapter](#) for design recommendations and best-practices to build SD-Access infrastructure.

When deploying the SD-Access fabric nodes, the reference network architecture provisions the fabric roles in the same way the underlying network architecture is built: *distribution of function*. Separating roles onto different devices provides the highest degree of availability, resilience, deterministic convergence, and scale.

For *Integrated* Domain deployment, the SD-WAN WAN Edge device must be colocated with the SD-Access Border and Control Plane nodes functionality. This provides deployment flexibility for medium to small sites by co-locating the Border and Control Plane node and integrating embedded wireless on the Edge Node or with dedicated SD-Access Wireless Controller at the site for scaled environment. These solution deployment options provide flexibility to design a zero-trust, highly resilient, and always-available wired and wireless infrastructure, as shown in [Figure 15](#).


Refer to [Cisco SD-Access Solution Design Guide](#) for further design recommendations and best practices to build SD-Access infrastructure.

## Flexible Topology Integration

With *Integrated* Domain SD-Access | SD-WAN Pairwise Integration, the SD-Access fabric sites must be new deployments. The SD-WAN WAN Edge routers at these locations can be new or existing network. *Integrated* Domain provides significant flexibility by integrating the two domains and preserving:

- End-to-end macro- and micro-segmentation across the enterprise.
- Consistent policy for wired and wireless across the fabric sites.
- Consistent network access experience for any users, any device, any application at any location in the network.

Figure 15. Flexible Topologies Example

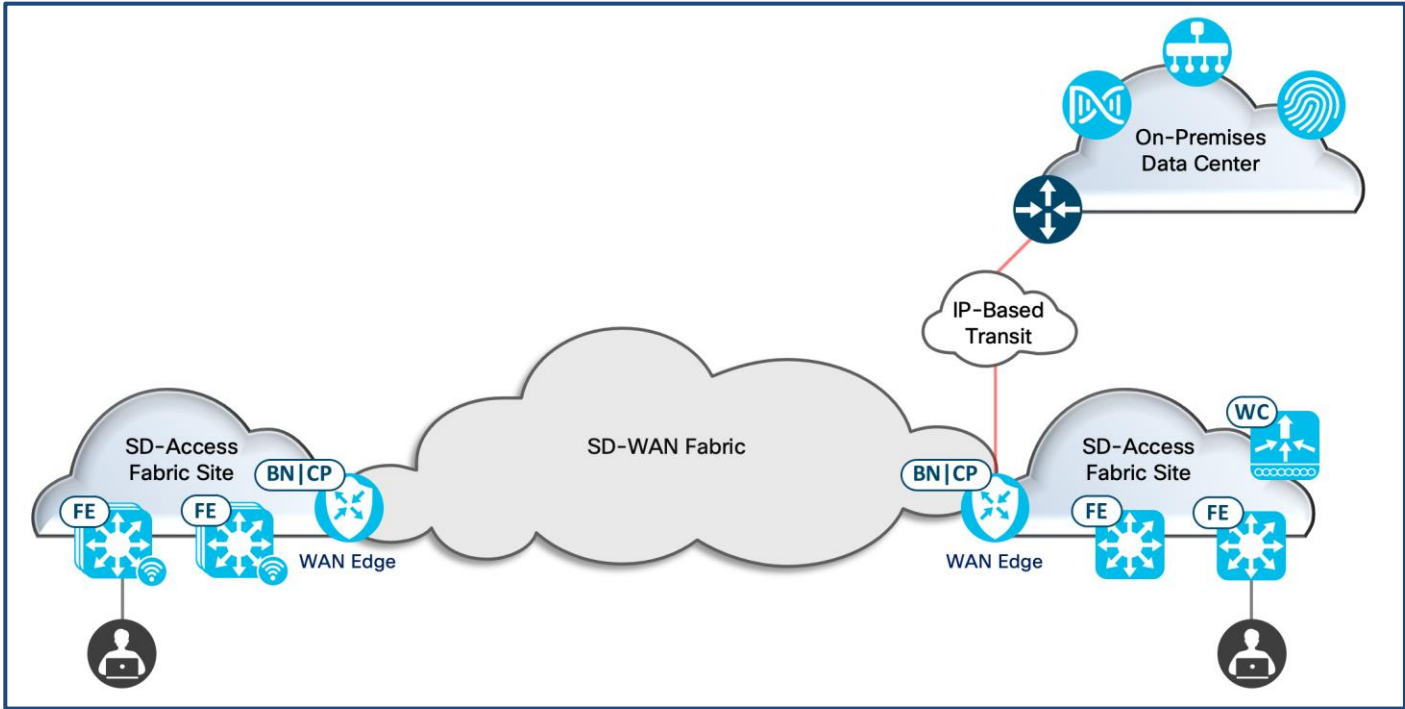



## Integrated Domain Design Considerations

This chapter is organized into the following sections:

Chapter	Section
Design Considerations	<a href="#">Service VPN and VN Considerations</a>
	<a href="#">Underlay Infrastructure Considerations</a>
	<a href="#">MTU Considerations</a>
	<a href="#">Cisco SD-Access Fabric site considerations</a>
	<a href="#">Macro-Segmentation considerations</a>
	<a href="#">Micro-Segmentation Considerations</a>
	<a href="#">Route-leaking Options</a>
	<a href="#">SNMP and Syslog considerations</a>
	<a href="#">Network Assurance and Visibility</a>
	<a href="#">Latency Considerations</a>
	<a href="#">Platform Requirements</a>
	<a href="#">SD-Access Scale Considerations</a>
	<a href="#">SD-WAN Edge SGT Forwarding Interoperability</a>
	<a href="#">Deployment Limitations</a>

### Service VPN and VN Considerations

Cisco SD-WAN components have two predefined Service VPNs: VPN 0 and VPN 512. WAN Edge devices leverage routes in VPN 0, which is associated with the WAN Global Routing Table (GRT), to securely connect to the SD-WAN controllers and establish secure control and data plane connections with other SD-WAN routers. VPN 512 is the Management VPN that provides out-of-band (OOB) management access for the SD-WAN devices.

Network administrators can configure additional Service VPNs to segment the LAN traffic across the WAN environment. The supported VPN numbers are VPN 1 through VPN 511 (1-511) and VPN 513 through VPN 65500 (513-65500). Other VPNs IDs are reserved for internal use by the WAN Edge device and should be avoided as the routes in these reserved VPN IDs are not shared across the WAN environment.

Each Layer 3 Virtual Network in the SD-Access environment is mapped to a corresponding Service VPN in the SD-WAN environment. The SD Access fabric site underlay, which is part of the global routing table (GRT), is mapped to a dedicated Service VPN on the WAN Edge device. This Fabric GRT Service VPN must be used at all sites to provide end-to-end IP reachability for the network devices.

#### Tech tip

The SD-WAN Global Routing Table uses VPN 0 to build the WAN fabric across WAN transports. The SD-Access Global Routing Table maps to a user-defined SD-WAN Service VPN. The SD-WAN GRT and SD-Access GRT do not need to communicate with each other and are not mapped together.

Mapping of SD-WAN Service VPN to Cisco SD-Access Virtual Network in DNA Center must be complete before SD-Access fabric site is created.

## Underlay Infrastructure Considerations

Cisco SD-WAN Orchestrators take ownership of securely onboarding the WAN Edge devices and building resilient secure WAN network. The vManage controller integrated in Cisco DNA Center shares the selected WAN Edge devices part of the *Integrated* Domain integration with the Cisco DNA Center.

The shared WAN Edge devices can then be leveraged with Cisco DNA Center SD-Access workflow to build Fabric GRT infrastructure. The Cisco SD-Access fabric site's *underlay* is defined by the physical switches and routers that are used to deploy the SD-Access overlay network. Establish a stable, resilient, and fast converged underlay either manually or using LAN Automation.

The WAN Edge device part of the *Integrated* domain integration can be configured as LAN Automation Seed devices to discover and configure the LAN segment network devices. LAN Automation provisions IS-IS routing protocol to provide Fabric GRT LAN connectivity at the site. Cisco DNA Center generated LAN Automation configuration for the WAN Edge device is shared with vManage orchestrator, to provision the WAN Edge device(s).

Alternatively, LAN segment can be manually configured and can leverage OSPF, EIGRP feature templates to build connectivity between the WAN Edge and the access layer.


Refer to the [Cisco SD-Access Design Guide](#) on design requirements and recommendations to build resilient and highly available networks for an SD-Access deployment.

#### Tech tip

The WAN Edge device must be provisioned with /32 host mask ip address for Loopback 0 interface and should be part of Fabric GRT Service VPN.

The WAN Edge interfaces that connect to the LAN segment should be associated to the Fabric GRT Service VPN.

Figure 16. SD-Access VN and SD-WAN Service VPN – Mapping Across the Enterprise

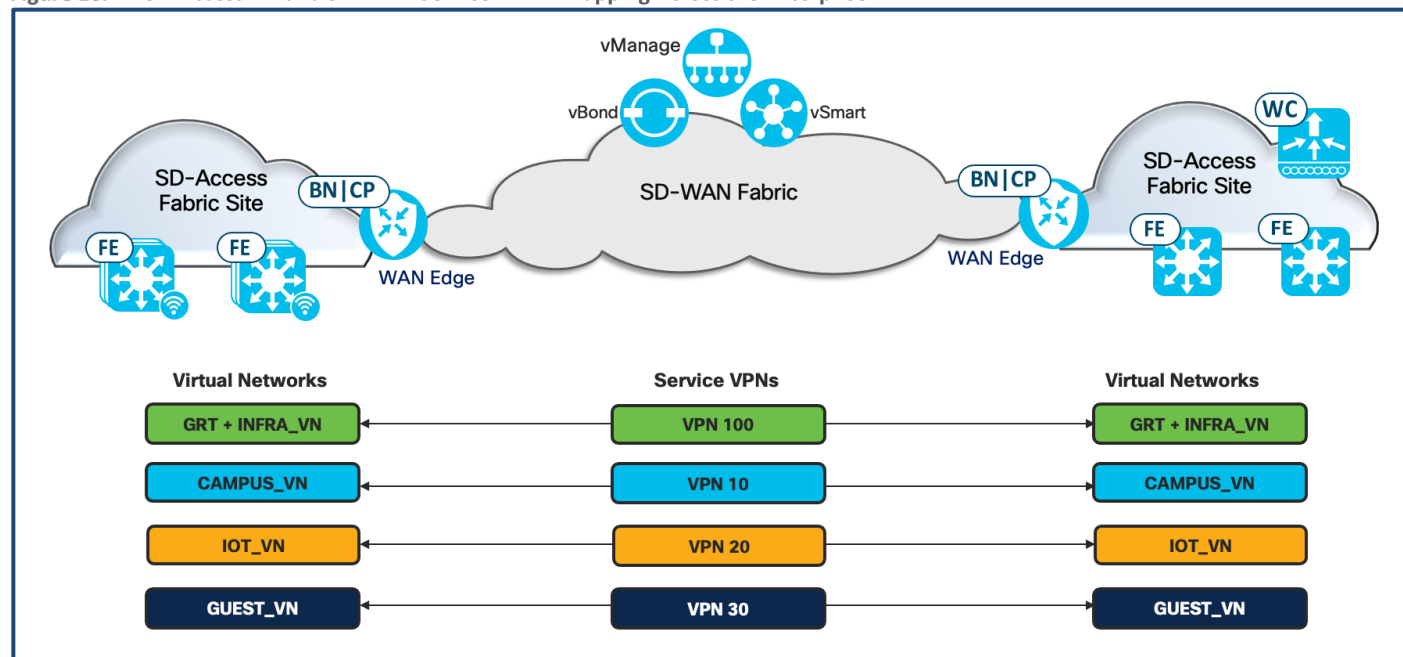

## MTU Considerations

Cisco SD-Access VXLAN header adds an additional 50 bytes, and optionally 54 bytes, of encapsulation overhead. On switching platforms in SD-Access, the MTU is increased at the system level with the `'system MTU <mtu value>'` command, which tunes the MTU on all the interfaces. On routing platforms, the MTU is set per interface using the command `'mtu <mtu value>'` on the physical interface.

Cisco SD-WAN Edge devices use the default MTU of 1500 bytes on the physical interface and this can be increased to a maximum MTU of 2000 bytes on the LAN-segment interfaces. To accommodate ethernet jumbo packets across the LAN segment, configure the WAN Edge device interface with MTU of 2000 bytes in the Cisco VPN Interface Ethernet feature template.

### Tech tip

Fabric GRT network devices discovered and configured with Cisco DNA Center LAN Automation workflow will be provisioned higher MTU of 9100 bytes. The Seed device, WAN Edge device interface connecting the fabric site LAN segment is provisioned with MTU of 9100 bytes along with the system-mtu of 9100 bytes on the discovered switches.

MTU within the SD-WAN environment is addressed using Bidirectional Forwarding Detection (BFD) packets. These packets are used to periodically probe each WAN transport for path liveliness and quality, which includes tunnel status, loss/latency/jitter, and IPSec tunnel MTU. WAN Edge devices use this probing information to natively fragment and reassemble the packet before forwarding them on the WAN transport.

## Cisco SD-Access Fabric Site Considerations

Before SD-Access fabric site is created, the following must be completed in Cisco DNA Center:

- Service VPN is associated to Virtual Network
- Network devices, including the SD-WAN WAN Edge devices are discovered with loopback 0 interface
- Network devices are provisioned to a site.


With the completion of the above, create fabric Site, associate fabric roles and connect IP-Transit or SD-WAN Transit or both. Note that the SD-WAN Transit is created in Cisco DNA Center on successful integration between the domain controllers. The WAN Edge part for the *Integrated* Domain integration is required to be associated with colocated Border and Control Plane Node functionality.

## Macro-Segmentation Considerations

Cisco SD-Access overlay prefixes for each virtual network, advertised in LISP, is redistributed to corresponding Service-VPN SD-WAN control plane (OMP). This ensures control plane separation from one domain to another across the WAN environment.

By default, the WAN Edge device advertise /32 host prefixes from the fabric site LISP database to the SD-WAN OMP routing protocol. This can be modified by adding the overlay client prefixes in the Advertise OMP section of the Cisco VPN templates for each Service-VPN and advertise aggregate only for each virtual network.

**Figure 17.** Extending Macro-Segmentation – SD-Access VN to SD-WAN Service VPN

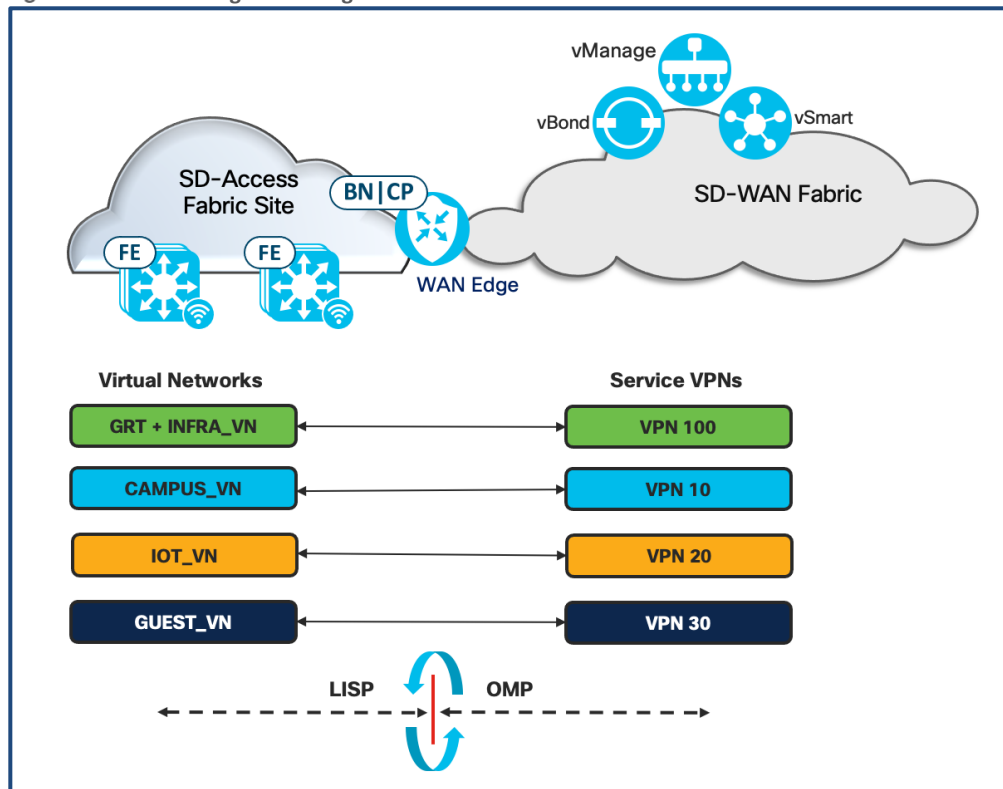

## Micro-Segmentation Considerations

The WAN Edge device, also the fabric Border, terminates the VXLAN encapsulated packets from the LAN segment fabric nodes. The device copies the scalable group value from the VXLAN header into the IPsec CMD header for traffic destined to remote-sites connected through the SD-WAN WAN environment.

At the remote-site the WAN Edge device copies the scalable group value from the IPsec CMD header to the VXLAN header before forwarding the traffic to the SD-Access fabric environment. This ensures the micro-segmentation information is carried natively in the data-plane across the domains.

## SNMP and Syslog Considerations

SNMP and Syslog statistics on the WAN Edge router and LAN network devices are collected by Cisco DNA Center. It is recommended to leverage Cisco DNA Center, Network Setting > Device Credentials workflow to configure the device credentials, SNMPv2/SNMPv3 and Syslog parameters to the network devices across the enterprise infrastructure.

## Network Assurance and Visibility


Visibility of SD-WAN WAN Edge device health, WAN transport health and Application statistics across the WAN transports are monitored in the SD-WAN vManage controller. Network Assurance from the fabric nodes are monitored in Cisco DNA Center. In the *Integrated Domain* integration

- SNMP and Syslog statistics for the WAN Edge are destined to Cisco DNA Center.
- Cisco DNA Center provides Site-level Topology, Network health, Network level Issues and Events, Device 360 and Client 360 visibility
- SD-WAN vManage provides WAN Edge device-level visibility into Inventory, Control Status, Site Health, Device Health, Transport Health and Events.

## Latency Considerations

Latency in the network is an important consideration for performance, and the RTT between Cisco DNA Center and any network device it manages must be taken into strict account. The RTT should be equal to or less than 100 milliseconds to achieve optimal performance for all solutions provided by Cisco DNA Center, including SD-Access. The maximum supported latency is 200 ms RTT. Latency between 100 ms and 200 ms is supported, although longer execution times could be experienced for certain functions, including inventory collection, fabric provisioning, SWIM, and other processes that involve interactions with the managed devices.

Figure 18. Cisco SD-Access Latency Requirements

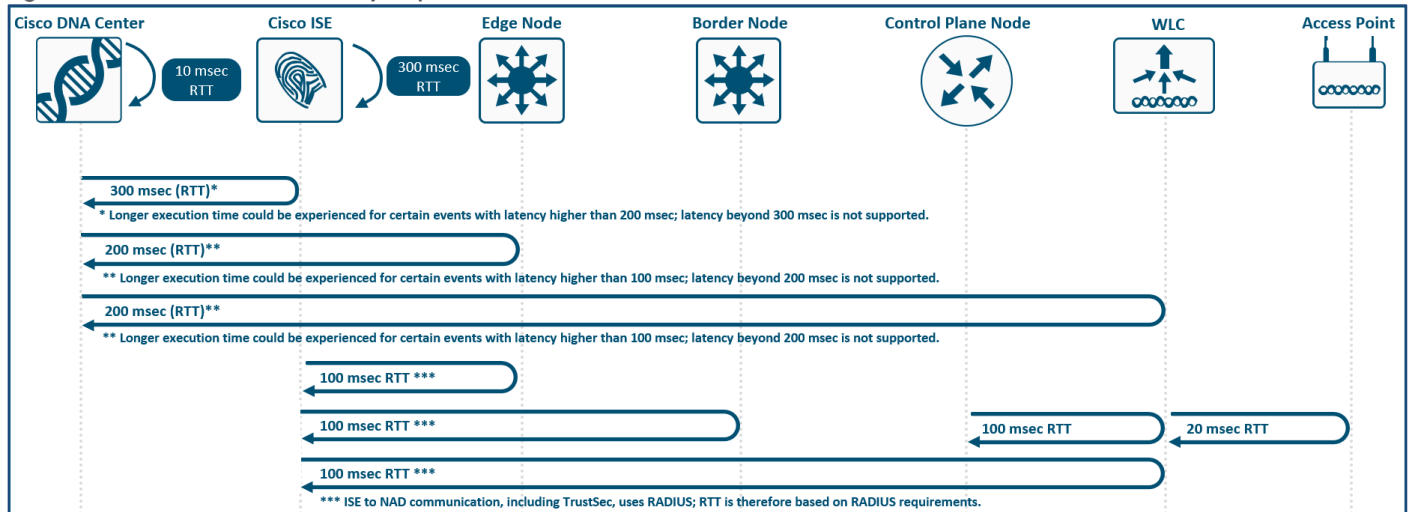

## Platform Requirements

Cisco SD-Access | SD-WAN *Integrated Domain* Integration requires the network device to perform SD-WAN WAN Edge functionality and SD-Access colocated Border and Control Plane functionality.

Tables 1 list the supported hardware devices.

**Table 1.** Integrated Domain SD-WAN Edge Supported Platforms

Supported Cisco hardware	Additional details
ISR 4331 Series Routers	≥ 8G Memory
ISR 4351 Series Routers	≥ 8G Memory
ISR 4400 Series Routers	≥ 8G Memory
ASR 1001-X Series Routers	≥ 8G Memory
ASR 1002-X Series Routers	≥ 8G Memory
ASR 1001-HX Series Routers	≥ 8G Memory
ASR 1002-HX Series Routers	≥ 8G Memory
Cisco Catalyst® 8300 Series Edge Platforms	≥ 8G Memory Cisco DNA Center ≥2.1.2.6 IOS XE ≥17.3.3

## SD-Access Scale Considerations

SD-Access has a number of scaling components that must be taken into consideration. Platform-specific scale includes items such as the number of endpoints, the number of virtual networks, the number of routes, and the number of SGTs. Cisco DNA Center has scale components, such as the number of fabric sites, the number of fabric devices within a site, and the total number of concurrent endpoints. For details, consult the SD-Access Platform Scale, Appliance Scale, and fabric VN Scale Tables in the Cisco DNA Center [data sheet](#).

Table 2 list the scaling numbers for the WAN Edge platforms that are part of the *Integrated* Domain integration

**Table 2.** Integrated Domain WAN Edge platform scale numbers

Platform	Virtual Networks (VNs)	Max EID per VN	Max EID Entries
ASR Series Routers	10	5,000	50,000
ISR Series Routers	10	1,000	10,000

## SD-WAN Edge SGT Forwarding Interoperability

The Cisco SD-WAN solution can contain WAN Edge devices running either IOS-XE SD-WAN or Viptela software. For the Cisco SD-Access | SD-WAN Pairwise Integration, it is required to deploy supported IOS-XE SD-WAN Edge devices running ≥17.3.2a.

Table 3 shows the interoperability behavior for various WAN Edge platforms and their corresponding software version with respect to carrying SGTs in the data plane.

**Table 3.** SD-WAN Traffic Forwarding Interoperability

To From	≥IOS XE 17.3.x SD-WAN (Cisco TrustSec enabled)	≥IOS XE 17.3.x SD-WAN (Cisco TrustSec not enabled)	<IOS XE 17.2.x SD-WAN	Colocated SD-Access IOS XE WAN Edge	vEdge Router
≥IOS XE 17.3.x SD-WAN (CTS Enabled)	SGT carried in MDATA Header	IP and SGT are carried; SGT is discarded	Traffic is sent without SGT	SGT carried in MDATA Header	Traffic is sent without SGT
≥IOS XE 17.3.x SD-WAN (CTS NOT Enabled)	Traffic is sent without SGT	Traffic is sent without SGT	Traffic is sent without SGT	Traffic is sent without SGT	Traffic is sent without SGT
<IOS XE 17.2.x SD-WAN	Traffic is sent without SGT	Traffic is sent without SGT	Traffic is sent without SGT	Traffic is sent without SGT	Traffic is sent without SGT
Colocated SD-Access IOS XE WAN Edge	SGT carried in MDATA Header	IP and SGT are carried; SGT is discarded	Traffic is sent without SGT	SGT carried in MDATA Header	Traffic is sent without SGT
vEdge Router	Traffic is sent without SGT	Traffic is sent without SGT	Traffic is sent without SGT	Traffic is sent without SGT	Traffic is sent without SGT

## Deployment Limitations

*Integrated Domain* integrates Cisco SD-Access and SD-WAN solution natively on the same WAN Edge device. This integration model is ideal, but not limited, for remote-branch deployment. The ability to fully automate the WAN and the LAN segment at remote sites, provides business the ability to deploy Zero-Trust Branch site faster, securely and provide consistent user experience.

Below lists the design constraints before considering the *Integrated Domain* deployment approach:

- Cisco SD-WAN WAN fabric infrastructure is built first followed by SD-Access network.
- Cisco IOS-XE WAN Edge device must be in vManage mode.
- Cisco SD-Access Border and Control Plane functions must be colocated on the IOS-XE SD-WAN WAN Edge router.
- A maximum of 2x colocated SD-Access | IOS XE WAN Edge devices are supported per SD-Access fabric site.
- Cisco SD-Access Border node should be configured as External-Only node.
- Group-Based policy enforcement is not supported on the IOS-XE WAN Edge devices.

- The following features are not supported on the colocated SD-Access | IOS-XE WAN Edge device:
  - Multicast
  - IPv6
  - Layer 2 Flooding
  - Layer 2 Border Handoff
  - SD-Access Transit
  - MultiSite Remote Border

## Deploy

This chapter is organized into the following sections:

Chapter	Section
Deploy	<a href="#">Deployment Topology Overview</a> <a href="#">Deployment Prerequisites</a> <a href="#">Deployment Steps</a>

This section provides an overview of the topology used throughout this guide and covers the prerequisites and steps needed for this *Integrated* Domain deployment.

### Deployment Topology Overview

The validation topology has two SD-Access fabric sites connected via a Cisco SD-WAN fabric, representing multiple locations. The Cisco SD-WAN controllers are deployed in the enterprise private cloud. The WAN Edge routers are connected to SD-WAN fabric across public-internet and MPLS WAN transports.


At branch site, the single WAN Edge device part of the *Integrated* Domain deployment is directly connected to fabric Edge and to WAN transports.

At the headend location, the two WAN Edge devices are connected to fabric Edge devices, WAN transports and also the IP-Transit for reachability to shared-services network. At this site, embedded-wireless on Catalyst 9000 is deployed.

Cisco DNA Center, the Identity Service Engine, and shared services such as the DHCP, DNS, and Windows Active Directory (AD) servers are deployed at an on-premises data center that is accessible through the IP-Transit.



Figure 19. Deployment Topology

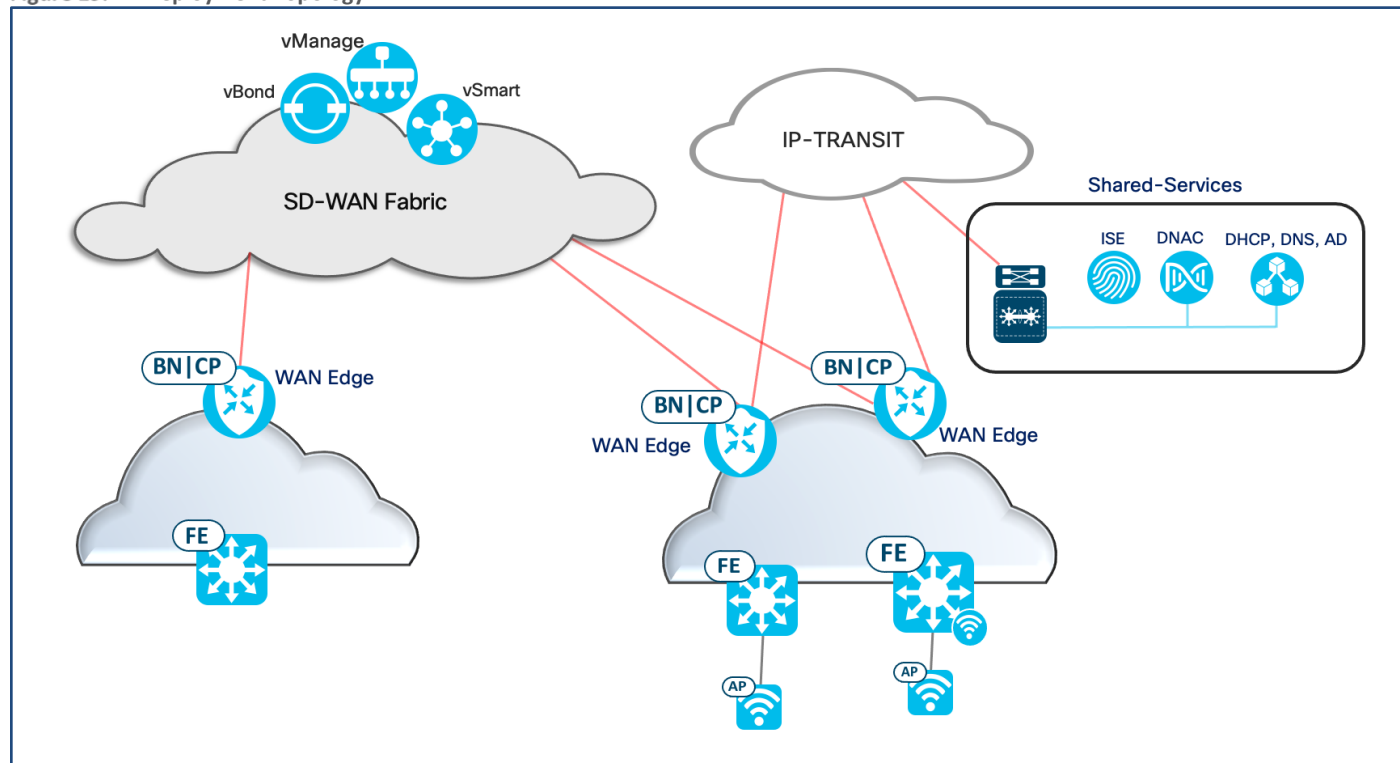

## Deployment Prerequisites

Before beginning with this guide, the following items must be completed in advance.

- Cisco SD-WAN Controllers (vManage, vBond, and vSmart) are deployed with valid certificates.
- Cisco WAN Edge devices are onboarded and have established secure control connections with the Cisco SD-WAN controllers and secure data plane connections to the other WAN Edge devices in the SD-WAN environment using all available WAN transports.
- Cisco DNA Center is installed and integrated with the Identity Services Engine as an Authentication and Policy Server.
- The Design Application in Cisco DNA Center is appropriately configured for the deployment. This includes the network hierarchy and network settings such as device credentials, IP address pools, and wireless settings for each fabric site (optional).

## Deployment Steps

The validated deployment is divided into the following processes and procedures:

Process	Procedure
<a href="#">Verifying Prerequisites for <i>Integrated Domain</i></a>	<a href="#">Verify the SD-WAN infrastructure</a> <a href="#">Verify the WAN Edge secure data plane connections</a> <a href="#">Verify Cisco DNA Center is installed with SD-Access Application</a> <a href="#">Verify Cisco DNA Center is integrated with ISE</a> <a href="#">Verify Cisco DNA Center design application configuration</a>
<a href="#">Associating IOS-XE WAN Edge device with Service VPN</a>	<a href="#">Configuring Service VPN</a> <a href="#">Configuring ethernet interface for loopback 0</a> <a href="#">Associate VPN and ethernet template to the WAN Edge device</a>
<a href="#">Integrating the domain controllers</a>	<a href="#">Integrating vManage in Cisco DNA Center</a> <a href="#">Associating IOS-XE WAN Edge devices to participate in the <i>Integrated-Domain</i> integration</a> <a href="#">Provision the IOS-XE WAN Edge devices to participate in the <i>Integrated-Domain</i> integration</a> <a href="#">Mapping Service VPN to Virtual Network in Cisco DNA Center</a> <a href="#">Associate Scalable Groups to Virtual Networks</a>
<a href="#">Configuring LAN Segment manually</a>	<a href="#">Creating Interface template connecting to the LAN segment</a> <a href="#">Configuring routing protocol template to form LAN segment routing adjacencies</a> <a href="#">Associating interface, routing protocol templates on the IOS-XE WAN Edge device</a> <a href="#">Discover and Provision the network devices to a site</a>
<a href="#">Configuring LAN Segment with LAN Automation</a>	<a href="#">Initiate LAN automation</a>
<a href="#">Provision Cisco SD-Access Fabric Site(s)</a>	<a href="#">Provision the network devices to a site</a> <a href="#">(Optional) Provision IP - Transit Network</a> <a href="#">Provision Fabric – Create Fabric Site</a> <a href="#">Provision Fabric – Configure Host Onboarding</a> <a href="#">Configure WAN Edge to advertise aggregate-summary routes for associated IP Address Pool</a> <a href="#">(Optional) Provision Fabric – Port Assignment</a>
<a href="#">Defining Group-Based Access Control Policies</a>	<a href="#">Configure Group-Based Access Control policies</a>

## Process 1: Verifying Prerequisites for *Integrated* Domain

Before beginning the *Integrated* Domain deployment, the SD-WAN and SD-Access controllers must be deployed.


### Procedure 1. Verify the SD-WAN infrastructure

Use this procedure to verify that vManage, vBond, vSmart, and the WAN Edge devices are successfully onboarded, in a healthy state, and that they are running their applicable software versions.

**Step 1.** Log in to vManage and navigate to **Dashboard > Main Dashboard**.

**Step 2.** Verify the state of vManage, vBond, vSmart, and the WAN Edge devices.

The ↑ green up arrow indicates a healthy, onboarded state.

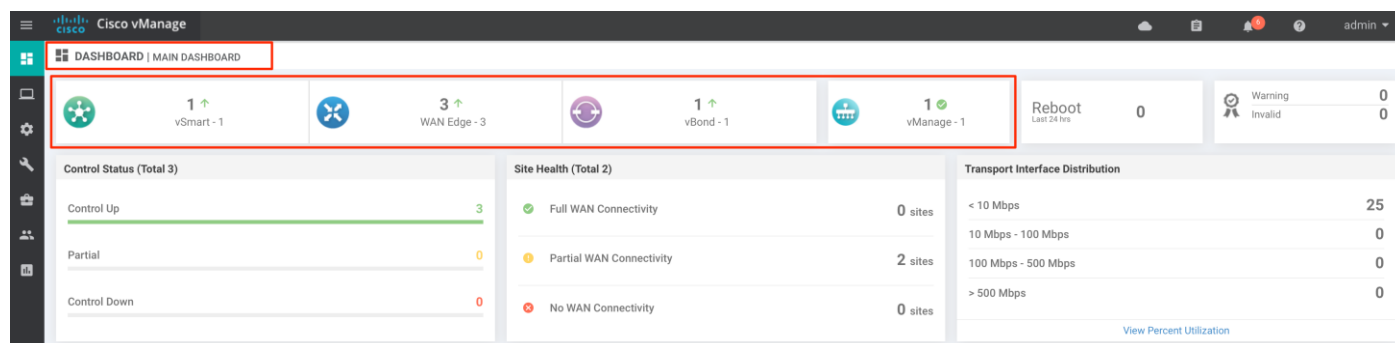

**Step 3.** In vManage, navigate to **Monitor > Network**.

**Step 4.** Select the device from the **WAN - Edge** list.

The screenshot shows the Cisco vManage Monitor > Network page. The left sidebar has a 'WAN - Edge' link highlighted. The main content area shows a table of WAN Edge devices. The table has columns: Hostname, System IP, Device Model, Chassis Number/ID, State, Reachability, Site ID, BFD, Control, Version, Up Since, Device Groups, and Connected vManage. The table contains 6 rows of data. The first row is for vmanage, the second for vsmart, the third for vbond, and the fourth for A-ASR1001X-1. The fifth row is for A-ASR1001X-2 and the sixth row is for RS12-ISR4331-18.

Hostname	System IP	Device Model	Chassis Number/ID	State	Reachability	Site ID	BFD	Control	Version	Up Since	Device Groups	Connected vManage
vmanage	11.11.11.11	vManage	f74f932e-6b11-4f3e-a666-8288df...	✓	reachable	11	—	4	20.3.4	07 Sep 2021 10:09:00 AM PDT	"No groups"	"11.11.11.11"
vsmart	12.12.12.12	vSmart	c51fbc4-88f8-475a-8f55-03f911...	✓	reachable	11	—	7	20.3.4	07 Sep 2021 10:09:00 AM PDT	"No groups"	"11.11.11.11"
vbond	13.13.13.13	vEdge Cloud (vBo...	39563661-3b52-4c62-847e-3f266...	✓	reachable	11	—	—	20.3.4	07 Sep 2021 10:08:00 AM PDT	"No groups"	"11.11.11.11"
A-ASR1001X-1	1.1.1.10	ASR1001-X	ASR1001-X-JAE204100WU	✓	reachable	10	4	3	17.03.04a.0.5574	09 Sep 2021 7:30:00 AM PDT	"No groups"	"11.11.11.11"
A-ASR1001X-2	1.1.1.11	ASR1001-X	ASR1001-X-JAE203201XB	✓	reachable	10	3 (4)	3	17.03.04a.0.5574	09 Sep 2021 7:43:00 AM PDT	"No groups"	"11.11.11.11"
RS12-ISR4331-18	12.12.12.1	ISR4331	ISR4331/K9-FDO2012092M	✓	reachable	12	7 (8)	3	17.03.02.0.3263	18 Aug 2021 8:42:00 AM PDT	"No groups"	"11.11.11.11"

**Step 5.** Select **Control Connections** from the left panel to view the device control connections status.

Verify the DTLS sessions are established with the SD-WAN controllers across the available WAN transport connections.

**Control Connections**

Site ID: 10 Device Model: ASR1001-X

vSmart Control Connections (Expected: 2 | Actual: 2)

Peer Type	Peer System IP	Peer Protocol	Private Port	Public Port	Controller Group ID	Last Updated
public-internet	---	---	---	---	---	---
vsmart	12.12.12.12	dtls	12446	12446	0	09 Sep 2021 7:31:26 AM PDT
mpls	---	---	---	---	---	---
vsmart	12.12.12.12	dtls	12446	12446	0	11 Sep 2021 5:13:09 AM PDT
vmanage	11.11.11.11	dtls	12446	12446	0	09 Sep 2021 7:31:14 AM PDT

**Step 6.** In vManage, navigate to **Monitor > Network**.

**Step 7.** Verify the **State**, **Reachability**, **BFD**, **Control**, and **Version** sections for the devices.

- The desired **State** is **✓**.
- The desired **Reachability** is **reachable**.
- BFD and Control will vary based on the deployment though should have non-zero numbers.
- The IOS-XE WAN Edge **Version** is **17.03.04a**.

**WAN - Edge**

Colocation Clusters

VPN GROUP: No VPN Group Available | VPN SEGMENT: All segments

Device Group	Hostname	System IP	Device Model	Chassis Number/ID	State	Reachability	Site ID	BFD	Control	Version	Up Since	Device Groups	Connected vManage
vmanage	11.11.11.11	11.11.11.11	vManage	f74f932e-6b11-4f3e-a666-8288df...	✓	reachable	11	---	4	20.3.4	07 Sep 2021 10:09:00 AM PDT	"No groups"	"11.11.11.11"
vsmart	12.12.12.12	12.12.12.12	vSmart	c51ffbc4-88f8-475a-8f55-03f911...	✓	reachable	11	---	7	20.3.4	07 Sep 2021 10:09:00 AM PDT	"No groups"	"11.11.11.11"
vbond	13.13.13.13	13.13.13.13	vEdge Cloud (vBo...	39563661-3b52-4c62-847e-3f266...	✓	reachable	11	---	---	20.3.4	07 Sep 2021 10:08:00 AM PDT	"No groups"	"11.11.11.11"
A-ASR1001X-1	1.1.1.10	1.1.1.10	ASR1001-X	ASR1001-X-JAE204100WU	✓	reachable	10	4	3	17.03.04a.0.5574	09 Sep 2021 7:30:00 AM PDT	"No groups"	"11.11.11.11"
A-ASR1001X-2	1.1.1.11	1.1.1.11	ASR1001-X	ASR1001-X-JAE203201XB	✓	reachable	10	3 (4)	3	17.03.04a.0.5574	09 Sep 2021 7:43:00 AM PDT	"No groups"	"11.11.11.11"
RS12-ISR4331-18	12.12.12.1	12.12.12.1	ISR4331	ISR4331/K9-FD02012092M	✓	reachable	12	7 (8)	3	17.03.02.0.3263	18 Aug 2021 8:42:00 AM PDT	"No groups"	"11.11.11.11"

## Procedure 2. Verify the WAN Edge secure data plane connections

**Step 1.** In vManage, navigate to **Monitor > Network**.

**Step 2.** Select the device from the **WAN - Edge** list.

**Step 3.** Select **WAN > Tunnel** option from the left panel.

**Step 4.** Verify the WAN Edge device has successfully established data plane connections to other WAN Edge devices across the WAN environment.

- The desired **State** is **↑**.
- The desired Protocol is **IPSEC**.

4 Rows Selected (Interface Endpoints, Local Interface Description and Remote Interface Description are hidden by default. Please click on the Columns dropdown on the right to enable them)

Tunnel Endpoints	Interface Endpoints	Local Interface Description	Remote Interface Description	Protocol	State	Jitter (ms)	Loss (%)	FEC Loss Recovery (%)	Latency (ms)	QoS Score	Total
public-internet											
A-ASR1001X-1-public-internet-RS12-ISR4331-1B-public-int...	GigabitEthernet0/0/5-Giga...	--	--	IPSEC	↑	0.00	0.00	N/A	0.00	10.00	0 B
A-ASR1001X-1-public-internet-RS12-ISR4331-1B-mpis	GigabitEthernet0/0/5-Giga...	--	--	IPSEC	↑	0.00	0.00	N/A	0.00	10.00	0 B
mpis											
A-ASR1001X-1-mpis-RS12-ISR4331-1B-mpis	GigabitEthernet0/0/4-Giga...	--	--	IPSEC	↑	0.00	0.00	N/A	0.00	10.00	0 B
A-ASR1001X-1-mpis-RS12-ISR4331-1B-public-internet	GigabitEthernet0/0/4-Giga...	--	--	IPSEC	↑	0.00	0.00	N/A	0.00	10.00	0 B

### Procedure 3. Verify Cisco DNA Center is installed with the SD-Access application

- Step 1.** Login to Cisco DNA Center, and navigate to **System > Software Updates**,
- Step 2.** Select **Installed Apps** from the left panel.
- Step 3.** Under the **Automation** section, verify **SD Access** is installed.

Cisco DNA Center

- Design > System 360
- Policy > Software Updates
- Provision > Settings
- Assurance > Data Platform
- Workflows > System Health
- Tools > Users & Roles
- Platform > Backup & Restore
- Activities > Disaster Recovery
- Reports
- System >**
- Explore

Critical Issues  
Last 24 Hours

P1 P2  
View Details

Trends and Insights  
Last 30 Days

Throughput Coverage Capacity  
View Details

**Cisco DNA Center** System - Software Updates

Updates

**Installed Apps**

**Installed Applications**

**Cisco DNA Center Core**

Application	Version	Action
Automation - Base	2.1.365.62360	Uninstall
Cisco DNA Center UI	1.6.2.432	Uninstall
Cloud Connectivity - Data Hub	1.6.0.380	Uninstall
Cloud Connectivity - Tethering	2.12.1.2	Uninstall
Disaster Recovery	2.1.364.362034	Uninstall
NCP - Base	2.1.365.62360	Uninstall
NCP - Services	2.1.365.62360	Uninstall
Network Controller Platform	2.1.365.62360	Uninstall
Network Data Platform - Base Analytics	1.6.1019	Uninstall
Network Data Platform - Core	1.6.579	Uninstall
Network Data Platform - Manager	1.6.541	Uninstall
Network Experience Platform - Core	2.1.365.62360	Uninstall
RBAC Extensions	2.1.364.1910003	Uninstall
System Commons	2.1.365.62360	Uninstall

**Automation**

Application	Version	Action
Application Hosting	1.6.0.2107090810	Uninstall
Application Policy	2.1.364.170201	Uninstall
Application Registry	2.1.364.170201	Uninstall
Application Visibility Service	2.1.364.170201	Uninstall
Cisco Umbrella	2.1.364.592099	Uninstall
Cloud Device Provisioning Application	2.1.365.62360	Uninstall
Command Runner	2.1.365.62360	Uninstall
Device Onboarding	2.1.365.62360	Uninstall
Image Management	2.1.365.62360	Uninstall
<b>SD Access</b>	<b>2.1.365.62360</b>	<b>Uninstall</b>
Stealthwatch Security Analytics	2.1.364.1091088	Uninstall
Wide Area Bonjour	2.4.363.75002	Uninstall

#### Procedure 4. Verify Cisco DNA Center is integrated with the Identity Services Engine

**Step 1.** In Cisco DNA Center, navigate to **System > Settings**.

**Step 2.** Under **External Services**, select **Authentication and Policy Servers** from the left panel.

**Step 3.** Verify the ISE server is integrated and in **ACTIVE** state.

**Cisco DNA Center** System - Settings

Settings / External Services

**Authentication and Policy Servers**

Use this form to specify the servers that authenticate Cisco DNA Center users. Cisco Identity Services Engine (ISE) servers can also supply policy and user information.

[Add](#) [Export](#) As of: Sep 12, 2021 3:00 PM

IP Address	Protocol	Type	Status	Actions
10.4.250.225	RADIUS_TACACS	ISE	ACTIVE	...

#### Procedure 5. Verify Cisco DNA Center design application configuration

**Step 1.** In Cisco DNA Center, navigate to **Design > Network Settings > Network**.

**Step 2.** Under the appropriate site hierarchy make sure the **AAA Server**, **DHCP Server**, **DNS Server**, and **NTP Server** are configured.

**Cisco DNA Center** Design - Network Settings

**Network** | Device Credentials | IP Address Pools | SP Profiles | Wireless | Telemetry

Find Hierarchy

- Global
  - North America
    - Region - NY
      - Region - RTP**
        - RTP-06
          - Floor-01
          - Floor-02
          - Floor-03
        - Region - SJ

Configure AAA, NTP, and Image Distribution (SFTP) servers using the "Add Servers" link. Once devices are discovered, DNA Center will deploy using these settings.

**AAA Server**

☒ Network ☒ Client/Endpoint

**NETWORK**

Servers: ☒ ISE ☐ AAA

Protocol: ☒ RADIUS ☐ TACACS

Network: 10.4.250.225 × IP Address (Primary): 10.4.250.228 × IP Address (Additional): 10.4.250.229 ×

[Change Shared Secret](#)

**CLIENT/ENDPOINT**

Servers: ☒ ISE ☐ AAA

Protocol: ☒ RADIUS ☐ TACACS

Client/Endpoint: 10.4.250.225 × IP Address (Primary): 10.4.250.231 × IP Address (Additional): 10.4.250.232 ×

[Change Shared Secret](#)

**DHCP Server**

DHCP: 10.4.249.102

[Add Servers](#)

**Step 3.** Under **IP Address Pools** tab, make sure IP address are reserved appropriately for the site hierarchy.

**Cisco DNA Center** Design - Network Settings

Network | Device Credentials | **IP Address Pools** | SP Profiles | Wireless | Telemetry

Find Hierarchy

- Global
  - North America
    - Region - NY
      - Region - RTP**
        - RTP-06
          - Floor-01
          - Floor-02
          - Floor-03
        - Region - SJ

**IP Address Pools (15)** [Take a Tour](#)

Subnet Type: **All** | IPv4 only | Dual-Stack

Filter: 0 Selected [Reserve](#) [More Actions](#)

As of: Sep 12, 2021 3:04 PM

<input type="checkbox"/>	Name	Type	IPv4 Subnet	IPv4 Used	IPv6 Subnet	IPv6 Used	Inherited from	Actions
<input type="checkbox"/>	RTP_AP_PREFIX	Generic	10.4.211.0/25	0% <a href="#">0</a>	-	-	-	...
<input type="checkbox"/>	RTP_BORDER_L3Handoff	Generic	10.4.218.0/24	0% <a href="#">0</a>	-	-	-	...
<input type="checkbox"/>	RTP_BORDER_L3Handoff_GUEST	Generic	10.4.219.0/24	0% <a href="#">0</a>	-	-	-	...
<input type="checkbox"/>	RTP_CAMPUS_DATA	Generic	10.4.212.0/24	0% <a href="#">0</a>	-	-	-	...
<input type="checkbox"/>	RTP_CAMPUS_VOICE	Generic	10.4.213.0/24	0% <a href="#">0</a>	-	-	-	...
<input type="checkbox"/>	RTP_CRITICAL_DATA_PREFIX	Generic	10.4.216.0/25	0% <a href="#">0</a>	-	-	-	...
<input type="checkbox"/>	RTP_CRITICAL_VOICE_PREFIX	Generic	10.4.216.128/25	0% <a href="#">0</a>	-	-	-	...
<input type="checkbox"/>	RTP_EN_PREFIX	Generic	10.4.211.128/25	0% <a href="#">0</a>	-	-	-	...
<input type="checkbox"/>	RTP_GUEST_PREFIX	Generic	10.4.215.128/25	0% <a href="#">0</a>	-	-	-	...
<input type="checkbox"/>	RTP_IOT_PREFIX	Generic	10.4.215.0/25	0% <a href="#">0</a>	-	-	-	...

15 Records [Show Records: 25](#) 1 - 15

**Step 4.** (Optional) Under the **Wireless** tab, select **Global** in the hierarchy.

Confirm the wireless Network SSID is configured and associated with Wireless Profile.

**Cisco DNA Center** Design - Network Settings

Network Device Credentials IP Address Pools SP Profiles **Wireless** Telemetry

Find Hierarchy

- Global
- North America
  - Region - NY
  - Region - RTP
    - RTP-06
      - Floor-01
      - Floor-02
      - Floor-03
    - Region - SJ

Wireless SSID(s) [Create](#)

[Filter](#) [Edit](#) [Delete](#)

	Network Name (SSID)	WLAN Type	L2 Security	L3 Security	Wireless Profiles	Portal Type	Portal Name	Action
<input type="checkbox"/>	@-ENT-GUEST	Guest	open	web_auth	FABRIC-WIRELESS	Self Registered	RTP_GUEST_PORTAL	<a href="#">Configure AAA</a>
<input type="checkbox"/>	@-ENT-OPEN	Enterprise	open	open	FABRIC-WIRELESS	Not Applicable	Not Applicable	<a href="#">Configure AAA</a>
<input type="checkbox"/>	@-ENT-PSK	Enterprise	wpa2_wpa3_personal	open	FABRIC-WIRELESS	Not Applicable	Not Applicable	<a href="#">Configure AAA</a>
<input type="checkbox"/>	@-ENT-SSID1	Enterprise	wpa2_enterprise	open	FABRIC-WIRELESS	Not Applicable	Not Applicable	<a href="#">Configure AAA</a>

## Process 2: Associate IOS-XE WAN Edge device with Service VPN

This section details the procedure to create service VPN templates and loopback 0 interface to the IOS-XE WAN Edge devices.

### Procedure 1. Configuring Service VPN

In this procedure, let's create Service VPN – one dedicated for undelay reachability and others for multiple overlay networks.

#### Step 1. Login into vManage, navigate to **Configuration > Templates**

**Cisco vManage** DASHBOARD | MAIN DASHBOARD

Configuration Devices TLS/SSL Proxy Certificates Network Design **Templates** Policies Security Unified Communications Cloud onRamp for SaaS Cloud onRamp for IaaS Cloud OnRamp for Multi-Cloud Cloud OnRamp for Colocation

1 vSmart - 1 3 WAN Edge - 3 1 vBond - 1 1 vManage - 1 Reboot Last 24 hrs 0 Warning Invalid 0

**Site Health (Total 2)**

- Full WAN Connectivity 0 sites
- Partial WAN Connectivity 2 sites
- No WAN Connectivity 0 sites

**Transport Interface Distribution**

Interface	Count
< 10 Mbps	25
10 Mbps - 100 Mbps	0
100 Mbps - 500 Mbps	0
> 500 Mbps	0

[View Percent Utilization](#)

**WAN Edge Health (Total 3)**

3 Normal 0 Warning 0 Error

**Transport Health** Type: By Loss

100 % 50 % 0 %

**Application-Aware Routing** Type: By Loss

Tunnel Endpoints	Avg. Latency (ms)	Avg. Loss (%)	Avg. Jitter (ms)

#### Step 2. Select Feature tab and select **Add Template**

**Cisco vManage** CONFIGURATION | TEMPLATES

Device Feature **Add Template**


Template Type: Non-Default Search Options

Name	Description	Type	Device Model	Device Templates	Devices Attached	Updated By	Last Updated
SD-WAN_CONTROLLER_VPN0	SD-WAN_CONTROLLER_VPN0	vSmart VPN	vSmart   vManage	2	2	admin	13 Aug 2021 11:25:18 AM PDT
SD-WAN_CONTROLLER_VPN512	SD-WAN_CONTROLLER_VPN512	vSmart VPN	vSmart   vManage	2	2	admin	13 Aug 2021 11:27:57 AM PDT
SD-WAN_CONTROLLER_SYSTEM	SD-WAN_CONTROLLER_SYSTEM	vSmart System	vSmart   vManage	2	2	admin	13 Aug 2021 11:18:10 AM PDT
SD-WAN_CONTROLLER_NTP	SD-WAN_CONTROLLER_NTP	NTP	vSmart   vManage	2	2	admin	13 Aug 2021 11:18:50 AM PDT

Total Rows: 30

#### Step 3. Choose all the WAN Edge devices. under **VPN**, choose **Cisco VPN** template



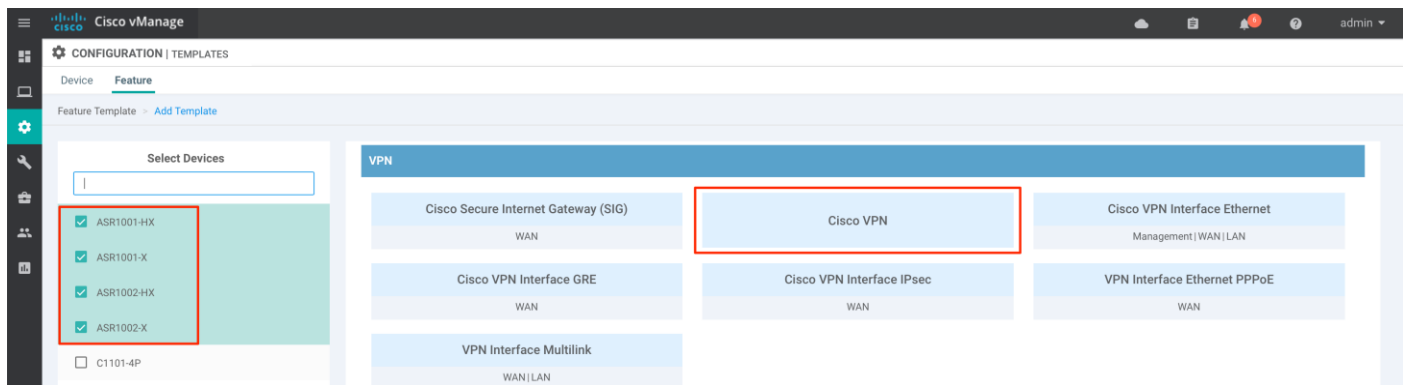

**Step 4.** Input **Template Name**, **Description** for the template

Under **Basic Configuration**, input **VPN**, **Name**

Under **DNS**, input **Primary DNS (IPv4)**

Under **Advertise OMP**, Enable **BGP (IPv4)**, **Connected**, **OSPF External**, **LISP**

**Tech tip**

For sites connected to shared services in traditional IP network:

- Enable BGP to be advertised in OMP ensuring remote-sites WAN Edge devices can reach the shared-services.
- Enable LISP to be advertised in OMP to share the SD-Access INFRA\_VN prefixes for Access Point, Extended/Policy-Extended nodes.
- Enable Fabric GRT routing protocol (EIBGP/OSPF/ISIS) to be advertised in OMP to provide end-to-end reachability across all sites.
- Enable Connected to be advertised in OMP

For sites connected to SD-WAN Transit only:

- Enable LISP to be advertised in OMP to share the SD-Access INFRA\_VN prefixes for Access Point, Extended/Policy-Extended nodes.
- Enable Fabric GRT routing protocol (EIBGP/OSPF/ISIS) to be advertised in OMP to provide end-to-end reachability across all sites.
- Enable Connected to be advertised in OMP

Click **Save**

**Step 5.** Repeat steps in this [Procedure](#) to create additional Service VPN as needed

Name	Description	Type*	Device Model	Device Templates	Devices Attached	Updated By	Last Updated
VPN_SERVICEVPN30	VPN_SERVICEVPN30	Cisco VPN	ISR4331 ISR4221X ISR4451-X ASR1...	0	0	admin	13 Sep 2021 6:30:42 PM PDT
VPN_SERVICEVPN20	VPN_SERVICEVPN20	Cisco VPN	ISR4331 ISR4221X ISR4451-X ASR1...	0	0	admin	13 Sep 2021 6:29:14 PM PDT
VPN_SERVICEVPN100	VPN_SERVICEVPN100	Cisco VPN	ISR4331 ISR4221X ISR4451-X ASR1...	2	2	admin	12 Sep 2021 9:19:53 PM PDT
VPN_SERVICEVPN10	VPN_SERVICEVPN10	Cisco VPN	ISR4331 ISR4221X ISR4451-X ASR1...	0	0	admin	13 Sep 2021 6:26:52 PM PDT
RS_VPN_SERVICEVPN10	RS_VPN_SERVICEVPN10	Cisco VPN	ISR4331 ISR4221X ISR4451-X ASR1...	0	0	admin	13 Sep 2021 6:27:15 PM PDT
RS_VPN_SERVICEVPN20	RS_VPN_SERVICEVPN20	Cisco VPN	ISR4331 ISR4221X ISR4451-X ASR1...	0	0	admin	13 Sep 2021 6:30:00 PM PDT
RS_VPN_SERVICEVPN30	RS_VPN_SERVICEVPN30	Cisco VPN	ISR4331 ISR4221X ISR4451-X ASR1...	0	0	admin	13 Sep 2021 6:31:15 PM PDT
RS_VPN_SERVICEVPN100	RS_VPN_SERVICEVPN100	Cisco VPN	ISR4331 ISR4221X ISR4451-X ASR1...	1	1	admin	12 Sep 2021 10:07:25 PM PDT

#### Tech tip

Each Virtual Network in Cisco SD-Access network should have a corresponding Service VPN in the SD-WAN environment.

## Procedure 2. Configuring ethernet interface for loopback 0

In this procedure, let's create Cisco VPN Interface Ethernet for interface loopback 0. This procedure is needed only when building the Fabric GRT manually.

Skip the [Procedure 2](#) and proceed to [Procedure 3](#) if the deployment will leverage LAN Automation workflow to discover and provision the Fabric GRT network devices. As a part of the LAN Automation workflow, Cisco DNA Center will provision loopback 0 interface on the WAN Edge device.


#### Tech tip

Each Virtual Network in Cisco SD-Access network should have a corresponding Service VPN in the SD-WAN environment.

## Step 1. Login into vManage, navigate to Configuration > Templates

The screenshot shows the Cisco vManage interface. The left sidebar menu has 'Configuration' highlighted, and its sub-menu 'Templates' is selected. The main dashboard area displays various health and status metrics, including Site Health (Total 2), WAN Edge Health (Total 3), Transport Interface Distribution, and Transport Health. The 'Templates' section is currently empty.

## Step 2. Select Feature tab and select Add Template

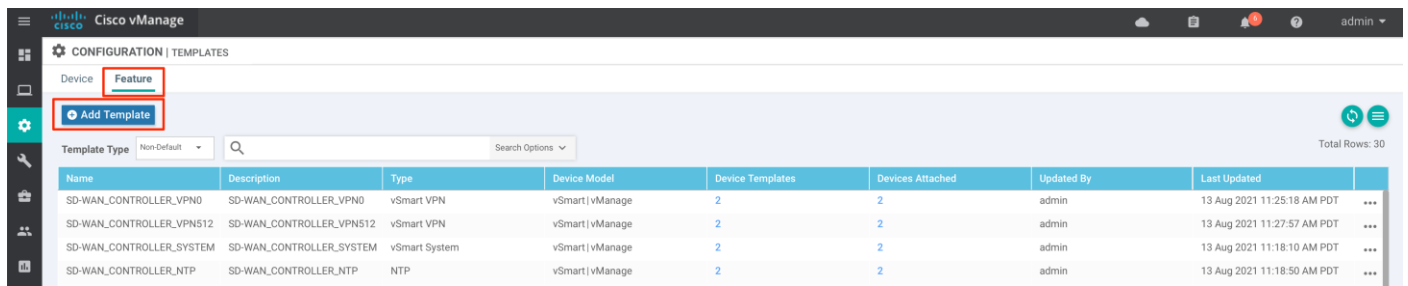

**Step 3.** Choose all the WAN Edge devices.  
under **VPN**, choose **Cisco VPN Interface Ethernet** template



**Step 4.** Input **Template Name**, **Description** for the template  
Under **Basic Configuration**,  
    **Shutdown**, enable **No**  
    Input **Interface Name** - **Loopback0**  
    Input **Description** - **Loopback0**  
    Under **IPv4**, select **Static** option  
    Under **IPv4 Address / prefix-length**, create **Device Specific** variable '**vpn100\_loopback0\_address**'  
Click **Save**

### Procedure 3. Associate VPN and ethernet template to the WAN Edge device

This section details the procedure to associate cisco VPN and ethernet interface templates to the WAN Edge devices with the intent to provide end-to-end Fabric GRT reachability across the sites.

#### Step 1. Login into vManage, navigate to **Configuration > Templates**

#### Step 2. Select the WAN Edge device from the list, click the three dots (...), and select **Edit** from the drop-down list.

CONFIGURATION | TEMPLATES

Device Feature

Create Template

Template Type: Non-Default

Search Options

Total Rows: 5

Name	Description	Type	Device Model	Feature Templates	Devices Attached	Updated By	Last Updated	Template Status
A-ASR1001X-1	A-ASR1001X-1	Feature	ASR1001-X	14	1	admin	12 Sep 2021 4:52:52 PM PDT	In Sync
A-ASR1001X-2	A-ASR1001X-2	Feature	ASR1001-X	24	1	admin	18 Aug 2021 6:09:51 AM PDT	In Sync
RS12-ISR4331-18	RS12-ISR4331-18	Feature	ISR4331	14	1	admin	18 Aug 2021 8:33:24 AM PDT	In Sync
vManage	vManage	Feature	vManage	9	1	admin	16 Aug 2021 2:52:53 PM PDT	In Sync
vSmart	vSmart	Feature	vSmart	10	1	admin	16 Aug 2021 2:50:33 PM PDT	In Sync

Context Menu Options:

- Edit
- View
- Delete
- Copy
- Attach Devices
- Detach Devices
- Export CSV
- Change Device Values

**Step 3.** Select **Service VPN**, click **Add VPN**

CONFIGURATION | TEMPLATES

Basic Information Transport & Management VPN **Service VPN** Additional Templates

Service VPN

0 Rows Selected Add VPN Remove VPN

Search Options

Total Rows: 0

ID	Template Name	Sub-Templates
No data available		

**Step 4.** Select previously created Fabric GRT Service VPN, 'VPN\_SERVICEVPN100' and move from **Available VPN Templates** to **Selected VPN Templates**. Click **Next**

CONFIGURATION | TEMPLATES

Basic Information Transport & Management VPN Service VPN Additional Templates

Add VPN

Select one or more Service VPNs to add:

Select VPNs Select Sub-Templates

1 Items Selected

Available VPN Templates

Search

ID	Template Name
No data available	

Selected VPN Templates

Select All

ID	Template Name
e7e7a788-3aff-4a92-8596-e2b5b1b2936e	VPN_SERVICEVPN100

Create VPN Template

Next CANCEL

**Step 5.** This is required for deployments building manual Fabric GRT at the site.

Deployments using LAN Automation workflow to discover and provision Fabric GRT LAN segment, skip this step (Step 5) and proceed to next step (Step 6).

Select **Additional Cisco VPN Templates > Cisco VPN Interface Ethernet**.

Choose previously created 'LAN\_LOOPBACK0' interface template and any additional interface to provide Fabric GRT connectivity.


Click **Add**

The screenshot shows the 'Add VPN' configuration page in Cisco vManage. The left sidebar contains 'Basic Information' and 'Transport & Management' tabs. The main area is titled 'Add VPN' and has two tabs: 'Select VPNs' (active) and 'Select Sub-Templates'. Under 'Select VPNs', there's a section 'Include sub-templates to attach to ALL selected service VPNs:' with four rows. Each row has a dropdown menu and a 'Sub-Templates' button. The dropdowns are set to 'BGP\_VPN100', 'LAN\_LOOPBACK0', 'LAN\_SUB\_INTERFACE2', and 'LAN\_SUB\_INTERFACE3'. On the right, there's a list titled 'Additional Cisco VPN Templates' with items like Cisco IGMP, Cisco Multicast, Cisco PIM, Cisco BGP, Cisco OSPF, Cisco OSPFv3, Cisco VPN Interface Ethernet, Cisco VPN Interface IPsec, EIGRP, and VPN Interface MultiLink Controller. At the bottom, there are 'BACK', 'Add' (highlighted with a red box), and 'CANCEL' buttons.

**Step 6.** Add additional Service VPN created.  
click **Add VPN**,  
select VPNs and move from **Available VPN Templates** to **Selected VPN Templates**  
click **Next**

The screenshot shows the 'Add VPN' configuration page in Cisco vManage, now in the 'Select VPNs' tab. The left sidebar is the same. The main area has a section 'Select one or more Service VPNs to add:' with a search bar and a 'Select All' button. Below this is a table of 'Available VPN Templates' with columns 'ID' and 'Template Name'. The table contains four rows of data. To the right of the table is a 'Selected VPN Templates' section with a search bar, a 'Select All' button, and a list of three selected items. At the bottom, there are 'Create VPN Template', 'Next' (highlighted with a red box), and 'CANCEL' buttons.


and Click **Add**

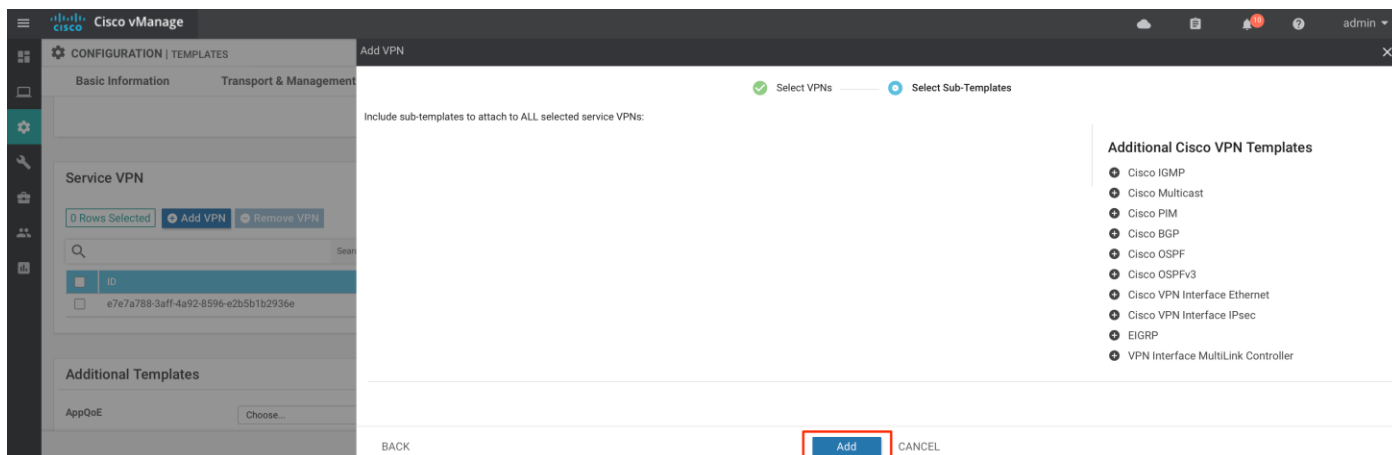


### Tech tip

Associating Service VPN to the WAN Edge devices ensures these VPNs are shared with Cisco DNA Center, when the WAN Edge device is added part of the *Integrated* Domain deployment.

## Step 7. Click Update

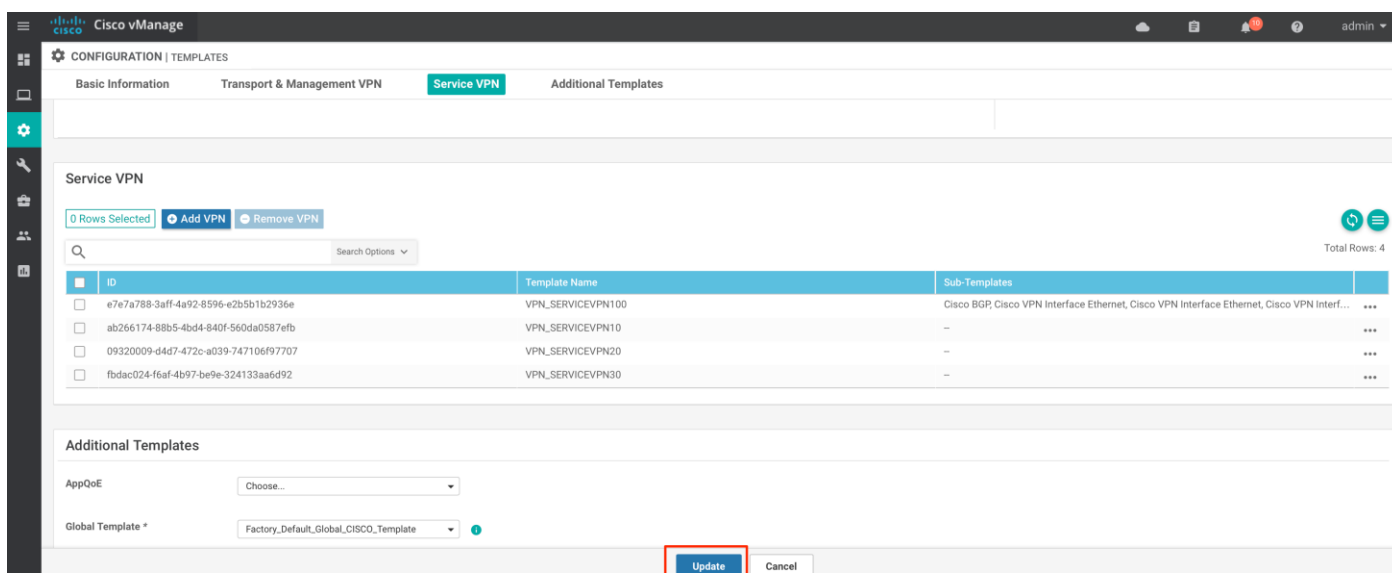

## Step 8. click the three dots (...), select Edit Device Template from the drop-down list,

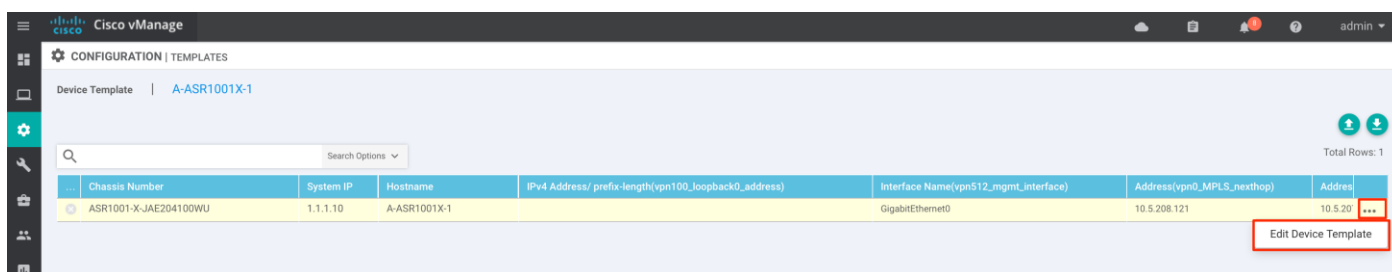

input Device-Specific variables and click **Update** and **Next**.



Cisco vManage

CONFIGURATION | TEMPLATES

Device Template | A-ASR1001X-1

Update Device Template

Variable List (Hover over each field for more information)

IPv4 Address/ prefix-length(mpls_interface_ip_address)	10.5.208.122/30
Interface Name(inet_interface_name)	GigabitEthernet0/0/5
AS Number(bgp_as_num)	5000
Router ID(bgp_router_id)	10.5.208.122
Network Prefix(bgp_inet_prefix)	10.5.207.120/30
Network Prefix(bgp_mpls_prefix)	10.5.208.120/30
Address(inet_bgp_neighbor_address)	10.5.207.121
Address(mpls_bgp_neighbor_address)	10.5.208.121
Description(inet_bgp_neighbor_description)	INET
Description(mpls_bgp_neighbor_description)	MPLS
Remote AS(inet_bgp_neighbor_remote_as)	499
Remote AS(bgp_neighbor_remote_as)	65000
Hostname(system_host_name)	A-ASR1001X-1
System IP(system_system_ip)	1.1.1.10
Site ID(system_site_id)	10
Interface Name(vpn512_mgmt_interface)	GigabitEthernet0
IPv4 Address/ prefix-length(vpn100_loopback0_address)	10.4.200.1/32

Generate Password

Update Cancel

Next Cancel

Cisco vManage

CONFIGURATION | TEMPLATES

Device Template | A-ASR1001X-1

Search Options

Total Rows: 1

Chassis Number	System IP	Hostname	IPv4 Address/ prefix-length(vpn100_loopback0_address)	Interface Name(vpn512_mgmt_interface)	Address(vpn0_MPLS_nexthop)	Address
ASR1001-X-JAE204100WU	1.1.1.10	A-ASR1001X-1	10.4.200.1/32	GigabitEthernet0	10.5.208.121	10.5.20...

Next Cancel

Click **Config Preview** to view the configuration being provisioned to WAN Edge device.

Click **Configure Devices**

Cisco vManage

CONFIGURATION | TEMPLATES

Device Template | A-ASR1001X-1

Total 1

Config Preview Config Diff

Intent

Device list (Total: 1 device(s))

Filter/Search

ASR1001-X-JAE204100WU  
A-ASR1001X-1/1.1.1.10

```

system
  ztp-status in-progress
  device-model vedge-ASR-1001-X
  host-name A-ASR1001X-1
  system-ip 1.1.1.10
  over-ay-id 1
  site-id 10
  port-offset 0
  control-session-pps 300
  max-omp-sessions 20
  admin-tech-on-failure
  sp-organization-name EN-SOLUTIONS
  organization-name EN-SOLUTIONS
  port-hop
  track-transport
  track-default-gateway
  console-baud-rate 9600
  no on-demand enable
  on-demand idle-timeout 10
  vbond 10.4.246.13 port 12346
  logging
  disk
  enable
  !

```

Configure Device Rollback Timer

Back Configure Devices Cancel

**Cisco vManage TASK VIEW**

Push Feature Template Configuration | Validation Success

Initiated By: admin From: 100.119.42.104

Total Task: 1 | Success : 1

Status	Message	Chassis Number	Device Model	Hostname	System IP	Site ID	vManage IP
Success	Done - Push Feature Template ...	ASR1001-X-JAE204100WU	ASR1001-X	A-ASR1001X-1	1.1.1.10	10	11.11.11.11

Total Rows: 1

**Step 9.** Return to the Step1 of the [Procedure](#) and repeat for each WAN Edge device in the SD-WAN fabric.

**Step 10.** Verify the WAN Edge device have reachability to Cisco DNA Center from loopback 0 interface.

In vManage, navigate to **Tools > SSH Terminal**, select the **WAN Edge device** from the list. Login with the device credentials and execute the command 'show vrf' and 'show ip route vrf 100 <DNA Center ip-address>'

**TOOLS | SSH TERMINAL**

Device Group: 12.12.12.1

12.12.12.1 login: admin  
admin@12.12.12.1's password:  
Password:

```

RS12-ISR4331-18#
RS12-ISR4331-18#sh vrf

```

Name	Default RD	Protocols	Interfaces
10	1:10	ipv4,ipv6	
100	1:100	ipv4,ipv6	
20	1:20	ipv4,ipv6	
30	1:30	ipv4,ipv6	
65528	<not set>	ipv4	Lo65528
Mgmt-intf	1:512	ipv4,ipv6	Gi0

```

RS12-ISR4331-18#
RS12-ISR4331-18#sh ip route vrf 100 10.4.249.102

```

Routing Table: 100  
Routing entry for 10.4.249.0/24  
Known via "omp", distance 251, metric 0, type omp  
Last update from 1.1.1.11 on Sdwan-system-intf, 00:13:09 ago  
Routing Descriptor Blocks:  
1.1.1.11 (default), from 1.1.1.11, 00:13:09 ago, via Sdwan-system-intf  
Route metric is 0, traffic share count is 1  
\* 1.1.1.10 (default), from 1.1.1.10, 00:13:09 ago, via Sdwan-system-intf  
Route metric is 0, traffic share count is 1

Device List:

- vmanage 11.11.11.11 | Site ID: 11
- vsmart 12.12.12.12 | Site ID: 11
- vbond 13.13.13.13 | Site ID: 11
- A-ASR1001X-1 1.1.1.10 | Site ID: 10
- A-ASR1001X-2 1.1.1.11 | Site ID: 10
- RS12-ISR4331-18 12.12.12.1 | Site ID: 12**
- RS12-ISR4431-21 10.5.205.21 | Site ID: 12
- Router 10.5.205.2 | Site ID: 11
- Router 10.5.205.3 | Site ID: 11


## Process 3: Integrate the domain controllers

This section details the procedure to integrate SD-WAN vManage controller in Cisco DNA Center and share IOS-XE WAN Edge device(s) for the *Integrated* Domain integration.

### Procedure 1. Integrating vManage in Cisco DNA Center

This section details the procedure to integrate vManage and DNA Center controllers together.

**Step 1.** Login into Cisco DNA Center, navigate to **System > Settings**

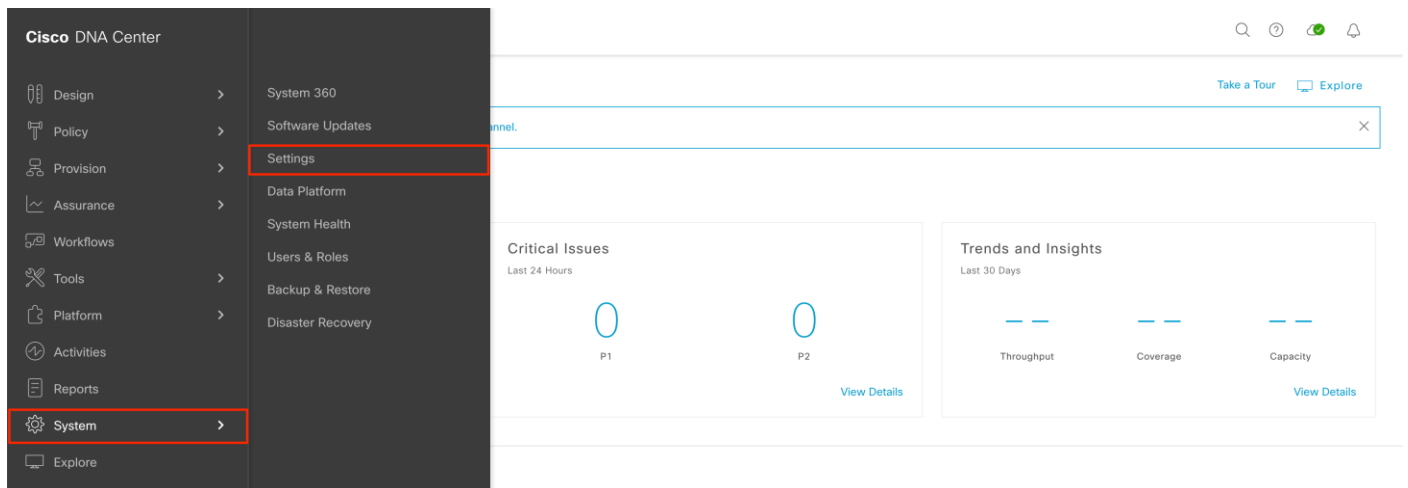


**Step 2.** Under **External Services**, click **vManage**

Input **Host Name/IP Address** of the VManage controller,

**Credentials:** user must be part of the netadmin user-group in vManage.

**Port Numbers: 8443**

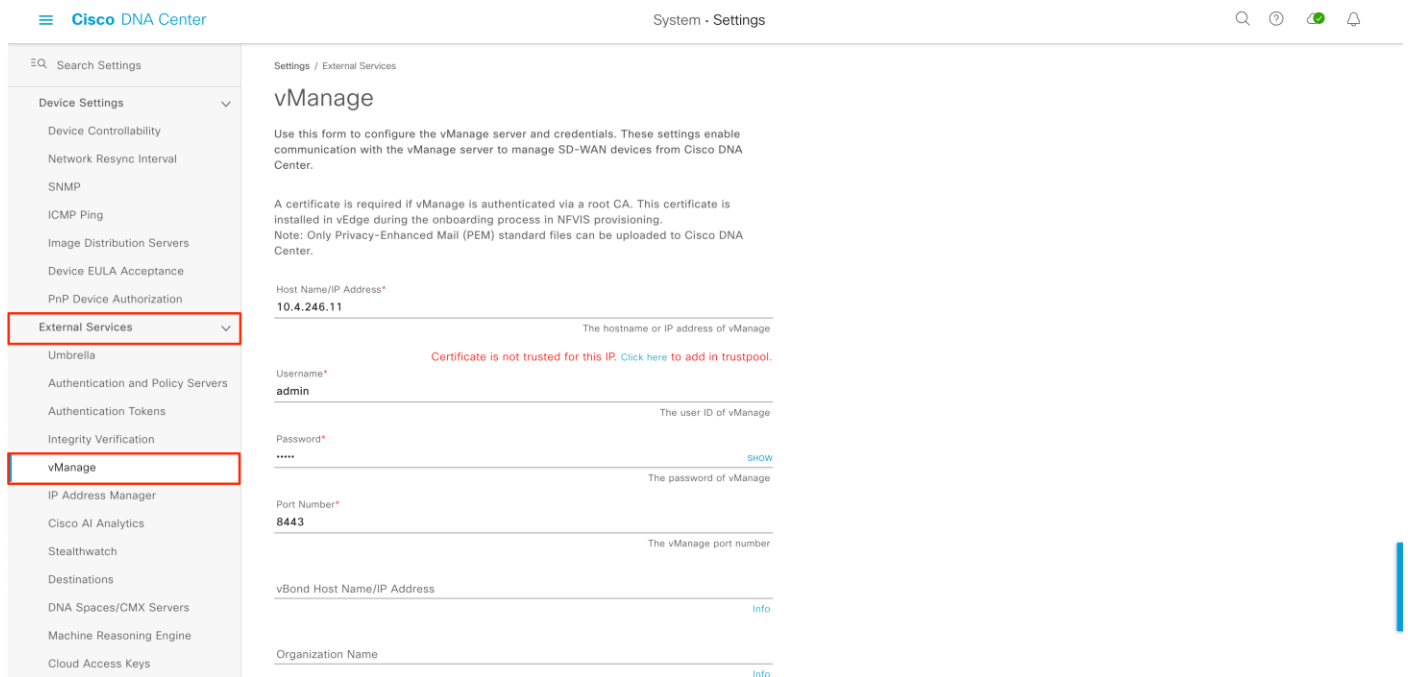

**Step 3.** Install the trustpool certificate, by clicking the **Click here** and allow the ip-address to be added to the trustpool

Cisco DNA Center

System · Settings

EQ Search Settings

Device Settings

Device Controllability

Network Resync Interval

SNMP

ICMP Ping

Image Distribution Servers

Device EULA Acceptance

PnP Device Authorization

External Services

Umbrella

Authentication and Policy Servers

Authentication Tokens

Integrity Verification

vManage

IP Address Manager

Cisco AI Analytics

Stealthwatch

Destinations

DNA Spaces/CMX Servers

Machine Reasoning Engine

Cloud Access Keys

Settings / External Services

vManage

Use this form to configure the vManage server and credentials. These settings enable communication with the vManage server to manage SD-WAN devices from Cisco DNA Center.

A certificate is required if vManage is authenticated via a root CA. This certificate is installed in vEdge during the onboarding process in NFVIS provisioning. Note: Only Privacy-Enhanced Mail (PEM) standard files can be uploaded to Cisco DNA Center.

Host Name/IP Address\*  
10.4.246.11  
The hostname or IP address of vManage

Username\*  
admin  
The user ID of vManage

Password\*  
.....  
The password of vManage

Port Number\*  
8443  
The vManage port number

vBond Host Name/IP Address  
Info

Organization Name  
Info

### Tech tip

**vBond Host Name/IP Address** and **Organization Name** are optional for the *Integrated* Domain controller integrated but needed if the vManage is managing Enterprise NFV network devices.

Cisco DNA Center

System · Settings

EQ Search Settings

Device Settings

Device Controllability

Network Resync Interval

SNMP

ICMP Ping

Image Distribution Servers

Device EULA Acceptance

PnP Device Authorization

External Services

Umbrella

Authentication and Policy Servers

Authentication Tokens

Integrity Verification

vManage

IP Address Manager

Cisco AI Analytics

Stealthwatch

Settings / External Services

vManage

Use this form to configure the vManage server and credentials. These settings enable communication with the vManage server to manage SD-WAN devices from Cisco DNA Center.

A certificate is required if vManage is authenticated via a root CA. This certificate is installed in vEdge during the onboarding process in NFVIS provisioning. Note: Only Privacy-Enhanced Mail (PEM) standard files can be uploaded to Cisco DNA Center.

Host Name/IP Address\*  
10.4.246.11  
The hostname or IP address of vManage

Username\*  
admin  
The user ID of vManage

Password\*  
.....  
The password of vManage

Port Number\*  
8443  
The vManage port number

The certificate associated with this IP address is not trusted.

Certificate Details

☒ Allow DNA center to access this IP address and add the untrusted certificate to the trustpool.

Deny Allow

Cisco DNA Center

System - Settings

EQ Search Settings

Device Settings

Device Controllability

Network Resync Interval

SNMP

ICMP Ping

Image Distribution Servers

Device EULA Acceptance

PnP Device Authorization

External Services

Umbrella

Authentication and Policy Servers

Authentication Tokens

Integrity Verification

**vManage**

IP Address Manager

Cisco AI Analytics

Stealthwatch

Destinations

Settings / External Services

vManage

Certificated added in trustpool successfully

Use this form to configure the vManage server and credentials. These settings enable communication with the vManage server to manage SD-WAN devices from Cisco DNA Center.

A certificate is required if vManage is authenticated via a root CA. This certificate is installed in vEdge during the onboarding process in NFVIS provisioning.

Note: Only Privacy-Enhanced Mail (PEM) standard files can be uploaded to Cisco DNA Center.

Host Name/IP Address\*

10.4.246.11

The hostname or IP address of vManage

Username\*

admin

The user ID of vManage

Password\*

.....

The password of vManage

SHOW

Port Number\*

8443

The vManage port number

**Step 4.** Click **Save** and **Continue** in the pop-up **Warning** page.

Cisco DNA Center

System - Settings

EQ Search Settings

Device Settings

Device Controllability

Network Resync Interval

SNMP

ICMP Ping

Image Distribution Servers

Device EULA Acceptance

PnP Device Authorization

External Services

Umbrella

Authentication and Policy Servers

Authentication Tokens

Integrity Verification

**vManage**

IP Address Manager

Cisco AI Analytics

Stealthwatch

Destinations

DNA Spaces/CMX Servers

Machine Reasoning Engine

Cloud Access Keys

System Configuration

Host Name/IP Address\*

10.4.246.11

The hostname or IP address of vManage

Username\*

admin

The user ID of vManage

Password\*

.....

The password of vManage

SHOW

Port Number\*

8443

The vManage port number

vBond Host Name/IP Address

Info

Organization Name

Info

Choose a file or drag and drop to upload.

Accepted files: .pem, .cert


Accepted sizes: up to 10MB

Delete


Save

© 2021 Cisco and/or its affiliates. All rights reserved.


Page 49 of 148

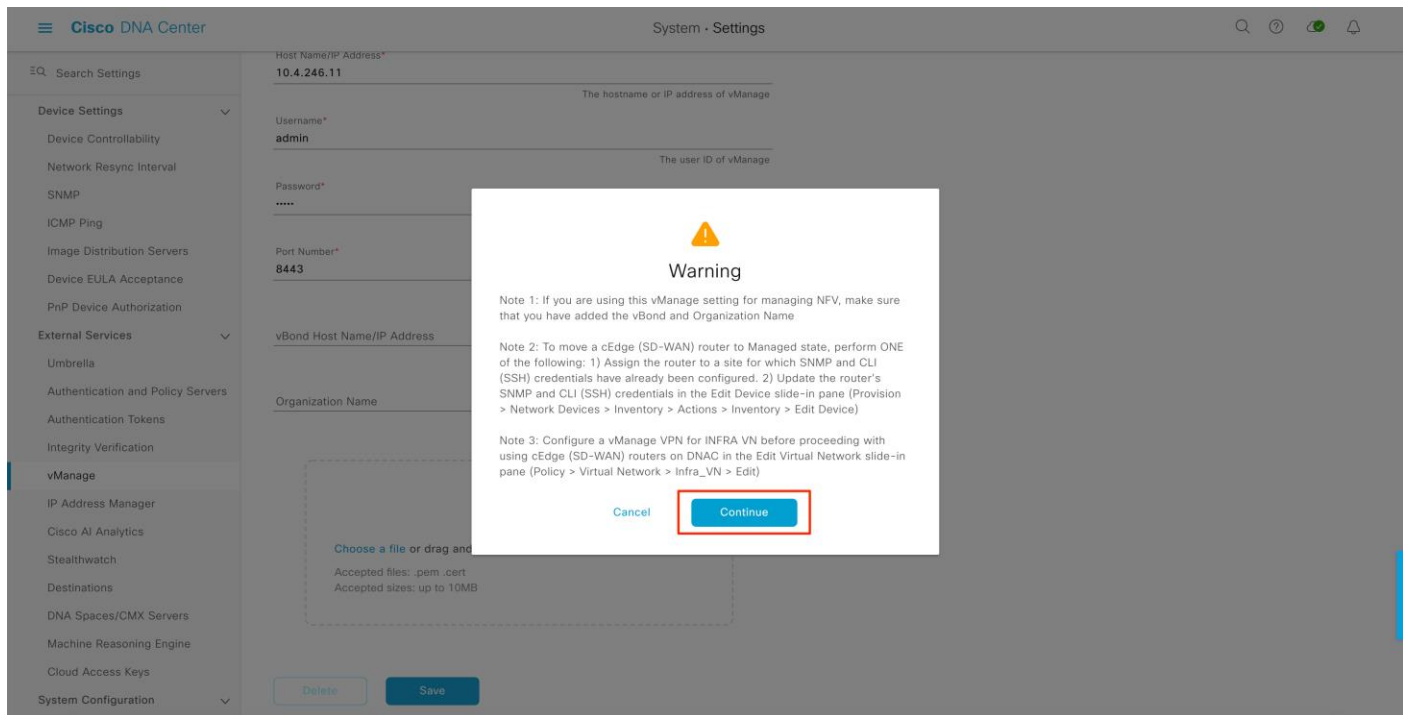

**Step 5.** Verify the controller integration health in **Cisco DNA Center > System 360**, scroll down to **External Connected Systems** section and view the **vManage** status

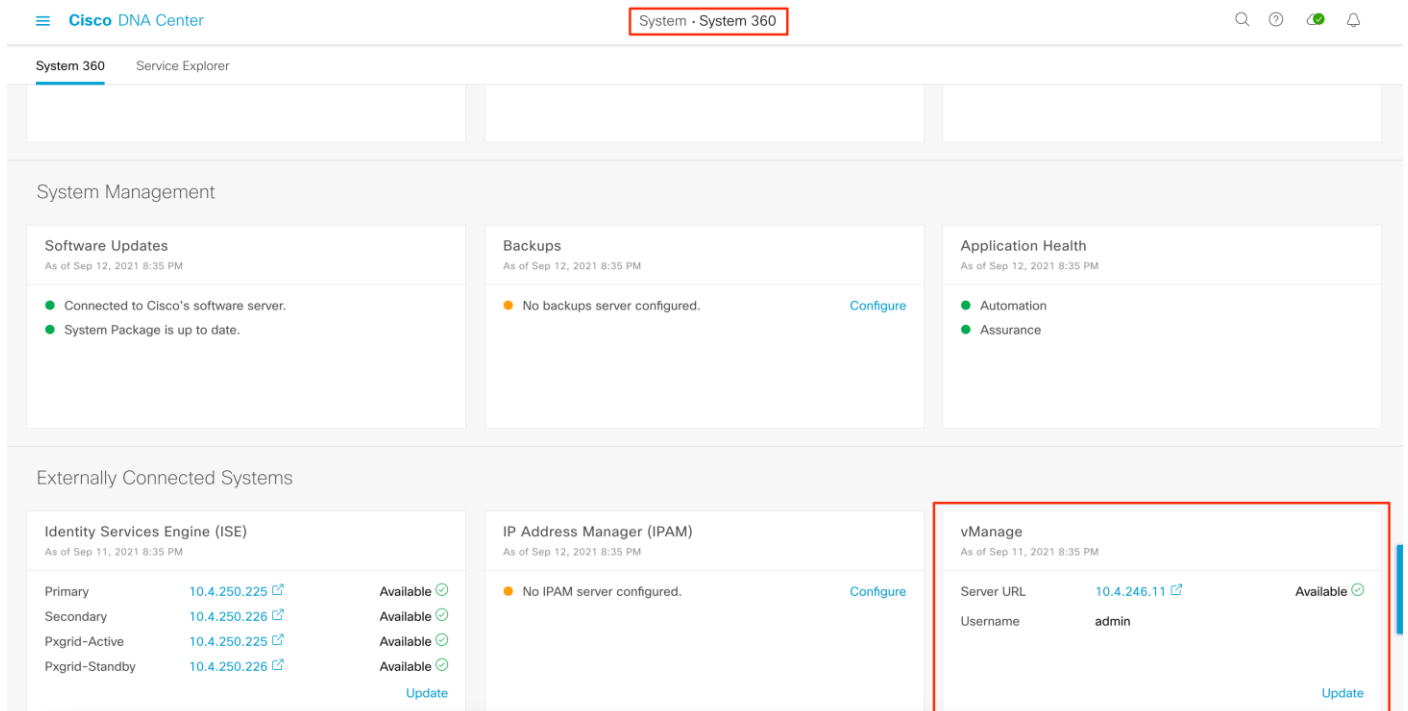

**Step 6.** On successfully integration a registered entry is created in SD-WAN vManage controller.  
Login to vManage, navigate to **Administration > Integration Management**

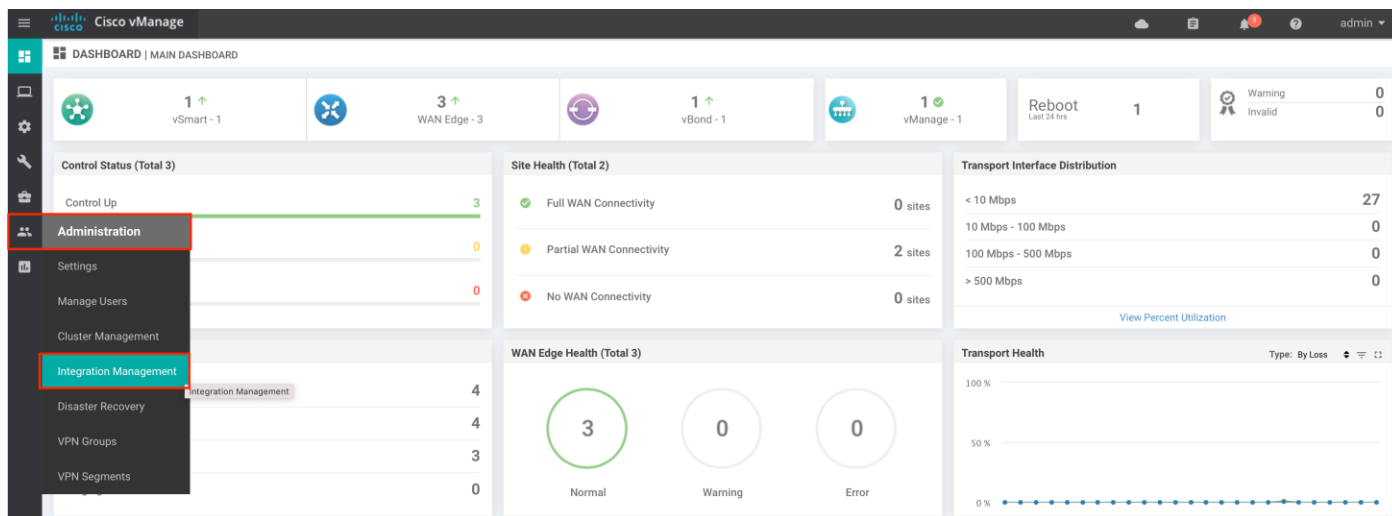

ADMINISTRATION | INTEGRATION MANAGEMENT

Showing list of third-party controllers registered on vManage. Associate Sites for each controller from the 'Actions' menu icon in the table.

Controller Name	Description	Partner id	Platform	Updated By	Date Registered	Devices	
DNAC_08e39fb6-33dd-479e-9dc2-a098a744a...	DNAC deployment for 08e39fb6-33dd-479e-9...	08e39fb6-33dd-479e-9dc2-a098a744ab0f	dnac	admin	12 Sep 2021	0	...

Total Rows: 1

## Procedure 2. Associating IOS-XE WAN Edge devices to participate in the *Integrated-Domain* integration

This section details the procedure to associate IOS-XE WAN Edge devices in vManage, share Service VPN and network devices to Cisco DNA Center that are part of the *Integrated* Domain deployment.

### Step 1. Login to vManage, navigate to **Administration > Integration Management**

ADMINISTRATION | INTEGRATION MANAGEMENT

Showing list of third-party controllers registered on vManage. Associate Sites for each controller from the 'Actions' menu icon in the table.

Controller Name	Description	Partner id	Platform	Updated By	Date Registered	Devices	
DNAC_08e39fb6-33dd-479e-9dc2-a098a744a...	DNAC deployment for 08e39fb6-33dd-479e-9...	08e39fb6-33dd-479e-9dc2-a098a744ab0f	dnac	admin	12 Sep 2021	0	...

Total Rows: 1

### Step 2. Click the three dots (...) and select **Attach Devices** from the drop-down options

ADMINISTRATION | INTEGRATION MANAGEMENT



Showing list of third-party controllers registered on vManage. Associate Sites for each controller from the 'Actions' menu icon in the table.

Controller Name	Description	Partner id	Platform	Updated By	Date Registered	Devices	
DNAC_08e39fb6-33dd-479e-9dc2-a098a744a...	DNAC deployment for 08e39fb6-33dd-479e-9...	08e39fb6-33dd-479e-9dc2-a098a744ab0f	dnac	admin	12 Sep 2021	0	...


Total Rows: 1

Attach Devices  
Detach Devices

### Step 3. Select IOS-XE WAN Edge devices from the **Available Devices** to move them to **Selected Devices** and click **Attach**

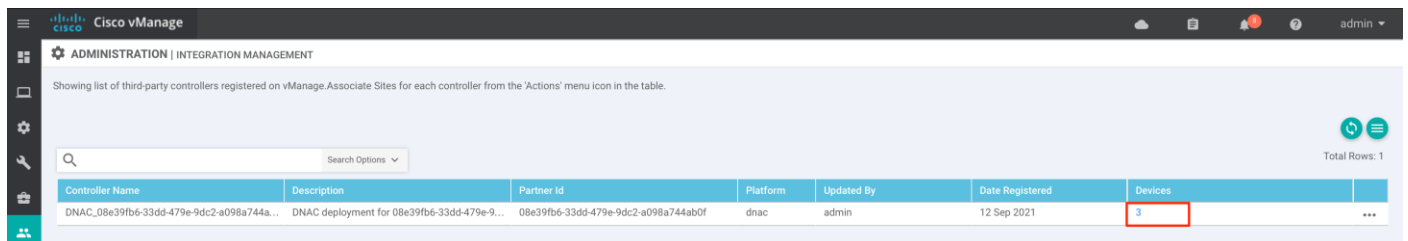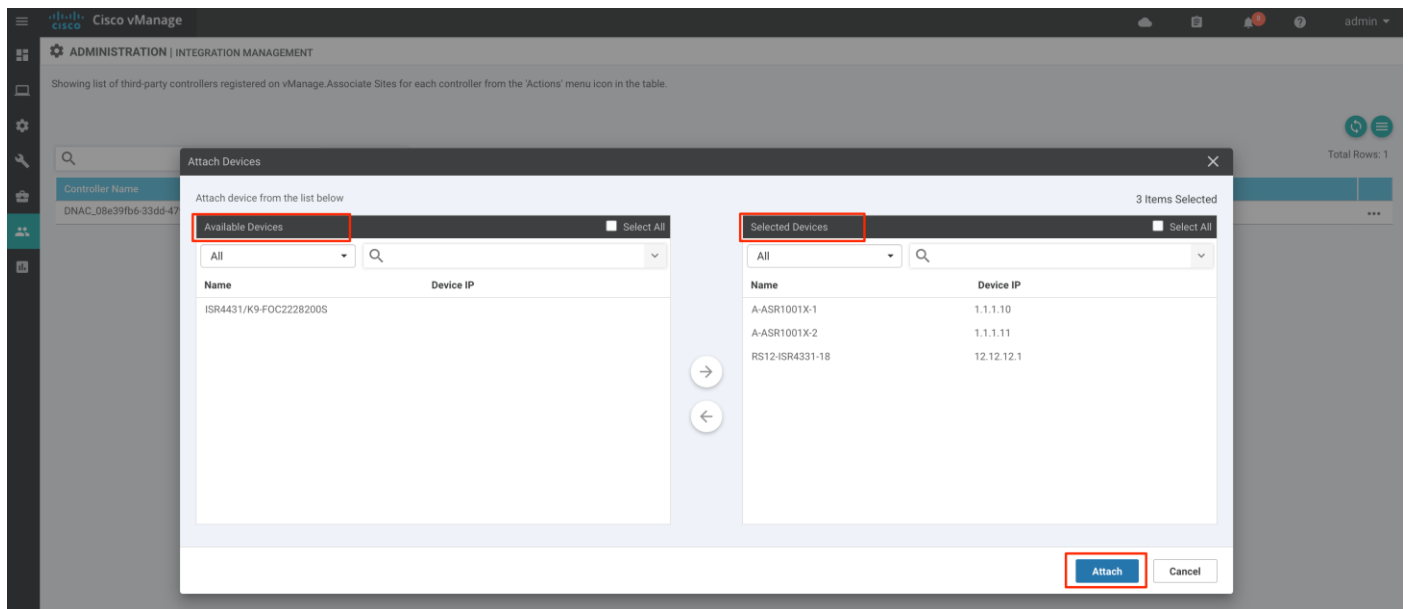

Select the value in the Devices column list the devices that are shared by vManage to Cisco DNA Center

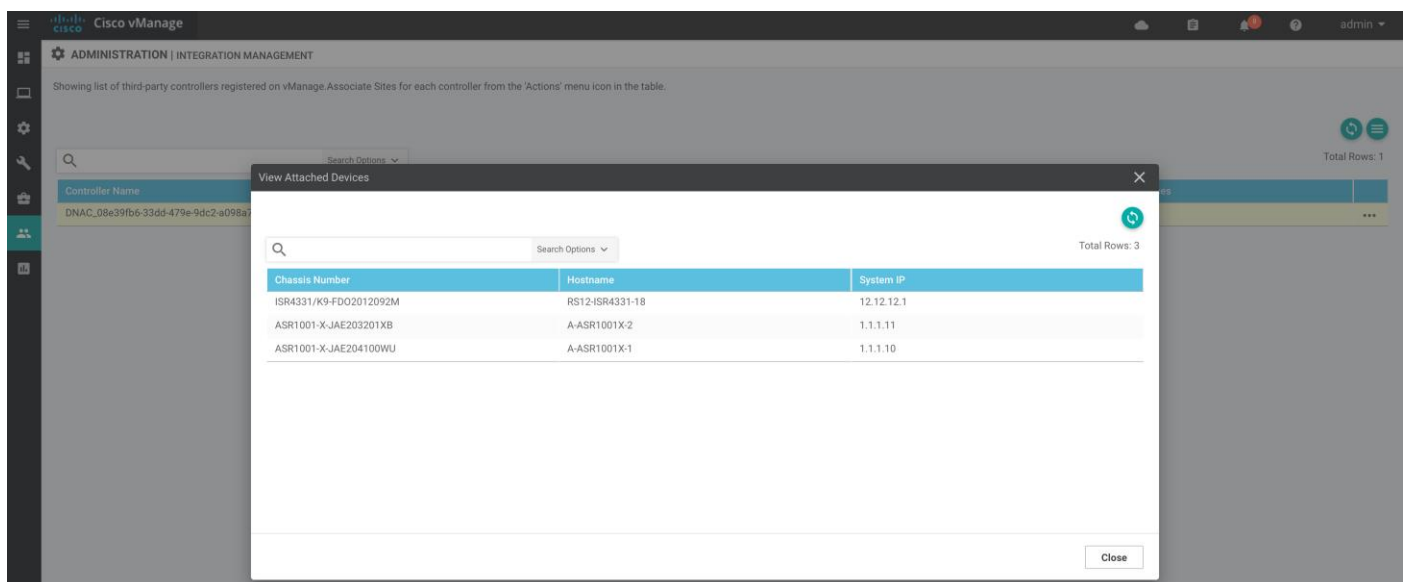



### Procedure 3. Provision the IOS-XE WAN Edge devices to participate in the *Integrated-Domain* integration

This section details the procedure to provision IOS-XE WAN Edge devices to a site in Cisco DNA Center.

**Step 1.** Login to Cisco DNA Center, navigate to **Provision > Network Devices > Inventory**.

The WAN Edge device status in Cisco DNA Center is **Ping Reachable** with Manageability status as **Managed** with **SNMP Authentication Failure**. This is expected as the device has not been provisioned with site-specific parameters that contain SNMP configuration required to manage in network device in Cisco DNA Center.

#### Tech tip

The WAN Edge device status can also be in Reachability status as **Unreachable** and Manageability status as **Managed** with **Device Connectivity Failure**. This is expected as there is no loopback 0 ethernet interface configured on the WAN Edge device and the 'system-ip' address on the WAN Edge device is not reachable from Cisco DNA Center.

The Cisco DNA Center LAN Automation workflow to discover and provision the Fabric GRT network devices, will provision the required loopback 0 ethernet interface on the WAN Edge devices selected as Primary and Peer Seed device.

The screenshot shows the Cisco DNA Center interface. The breadcrumb navigation at the top is 'Provision > Network Devices > Inventory', with the last part highlighted by a red box. On the left sidebar, under 'Global', 'Unassigned Devices (1)' is highlighted with a red box. The main content area shows a table of devices. The first device, 'RS12-ISR4431-21', has a 'Reachability' status of 'Unreachable' and a 'Manageability' status of 'Managed' with a sub-status of 'Device Connectivity Failure'. These two status cells are highlighted with a red box.

Continue with steps in this Procedure, even for the WAN Edge devices in the error state - **Unreachable, Managed** with **Device Connectivity Failure** status. Any DNA Center generated configuration is shared with vManage to provision it to the WAN Edge devices.

**Step 2.** With the WAN Edge devices in either Reachability and Manageability state, select the WAN Edge devices in the **Unassigned Devices** hierarchy

select **Actions > Provision > Assign Device to Site**

The screenshot shows the Cisco DNA Center interface. The breadcrumb navigation at the top is 'Provision > Network Devices > Inventory', with the last part highlighted by a red box. On the left sidebar, under 'Global', 'Unassigned Devices (3)' is highlighted with a red box. The main content area shows a table of devices. The first two devices, 'A-ASR1001X-1' and 'A-ASR1001X-2', have their selection checkboxes checked, which are highlighted with red boxes.

**Cisco DNA Center** Provision · Network Devices · Inventory

Inventory Plug and Play

Global

DEVICES (3)  
FOCUS: Inventory

Filter Add Device Tag Device Actions Take a Tour 2 Selected As of: 10:04 AM Export Refresh

Device Name	IP Address	Manageability	Compliance	Health Score	Site	MAC Address	Device Role	Image Version	Uptime
A-ASR1001X-1	10.4.200.1	Reachable	Managed	N/A	NA	Assign	CORE	CORE	--
A-ASR1001X-2	10.4.200.2	Reachable	Managed	N/A	NA	Assign	CORE	CORE	--
RS12-ISR4331-18	10.5.205.18	Reachable	Managed	N/A	NA	Assign	CORE	CORE	--

Actions menu:

- Inventory
- Software Image
- Provision
- Telemetry
- Device Replacement
- Others
- Compliance

Assign Device to Site

**Step 3.** In the slide-out page **Choose a Site** for each device and click **Next**

**Cisco DNA Center** Provision · Network Devices · Inventory

Inventory Plug and Play

Global

DEVICES (3)  
FOCUS: Inventory

Filter Add Device Tag Device Actions Take a Tour

Device Name	IP Address	Device Family	Reachability
A-ASR1001X-1	10.4.200.1	ASR1001X	Ping Reachable
A-ASR1001X-2	10.4.200.2	ASR1001X	Ping Reachable
RS12-ISR4331-18	10.5.205.18	ISR4331	Ping Reachable

Show 25 entries

Assign Device to Site

Serial Number: FXS2027Q2BB, Device: A-ASR1001X-1, Site: Global/North America/Region - RTP-06

FXS2011Q1B1, Device: A-ASR1001X-2, Site: Global/North America/Region - RTP-06

Device Controllability is Enabled. Learn More | Disable

Cancel Next

**Step 4.** View the parameters that gets provisioned to the device and click **Next**

**Cisco DNA Center** Provision · Network Devices · Inventory

Inventory Plug and Play

Global

DEVICES (3)  
FOCUS: Inventory

Filter Add Device Tag Device Actions Take a Tour

Device Name	IP Address	Device Family	Reachability
A-ASR1001X-1	10.4.200.1	ASR1001X	Ping Reachable
A-ASR1001X-2	10.4.200.2	ASR1001X	Ping Reachable
RS12-ISR4331-18	10.5.205.18	ISR4331	Ping Reachable

Show 25 entries

Assign Device to Site

GLOBAL/NORTH AMERICA/REGION - RTP-06

A-ASR1001X-1

The following settings will be deployed during assignment to site.

Parameter	Value
Syslog Server	Cisco DNA Center
Wireless Streaming Telemetry	Yes
SNMP Trap Receiver	Cisco DNA Center
AP Impersonation	Enabled
Syslog Level	6 - Information Messages

Device Controllability is Enabled. Learn More | Disable

Cancel Back Next

Click Assign

**Assign Device to Site**

☒ Now ☐ Later

Task Name\*  
Assign 2 Device(s) to Site

Device Controllability is **Enabled**. [Learn More](#) | [Disable](#) [Cancel](#) [Back](#) [Assign](#)

**Step 5.** Verify the devices are associated to the site.

For WAN Edge devices configured with Loopback 0 interface associated in the Fabric GRT Service VPN, Cisco DNA Center will use Loopback 0 IPv4 address to connect, perform SNMP polling and move the device to **Managed** state.

**Global > North America > Region - RTP**

DEVICES (2)  
FOCUS: **Inventory**

Device Name	IP Address	Device Family	Reachability	Manageability	Compliance	Health Score	Site	MAC Address	Device Role	Image
A-ASR1001X-1	10.4.200.1	Routers	Reachable	Managed	Compliant	NA	.../Region - RTP/RTP-06	a0:3d:6f:d3:c0:00	BORDER ROUTER	17.3.4a
A-ASR1001X-2	10.4.200.2	Routers	Reachable	Managed	Compliant	NA	.../Region - RTP/RTP-06	00:a6:cae1:08:00	BORDER ROUTER	17.3.4a

For WAN Edge devices with no Loopback 0 interface configured, Cisco DNA Center will not be able to connect. Devices will be in **Unreachable**, **Managed** with **Device Connectivity Failure** state but part of the site hierarchy.

**Global > North America > Region - NY**

DEVICES (1)  
FOCUS: **Inventory**

Device Name	IP Address	Device Family	Reachability	Manageability	Compliance	Health Score	Site	MAC Address	Device Role	Image
RS12-ISR4431-21	12.12.12.2	Unsupported Cisco Device	Unreachable	Managed Device Connectivity Failure	N/A	NA	.../Region - NY/NYC-01			


### Tech Tip

The Cisco WAN Edge CLI credentials defined in the Cisco DNA Center network setting, must be configured on the network device. If needed, local user credentials can be configured on the WAN Edge device with Cisco AAA feature template from the vManage UI.

## Procedure 4. Mapping Service VPN to Virtual Network in Cisco DNA Center

This section details the procedure of mapping Service VPN to Virtual Network in Cisco DNA Center.

### Step 1. Login to Cisco DNA Center, navigate to **Policy > Virtual Networks**

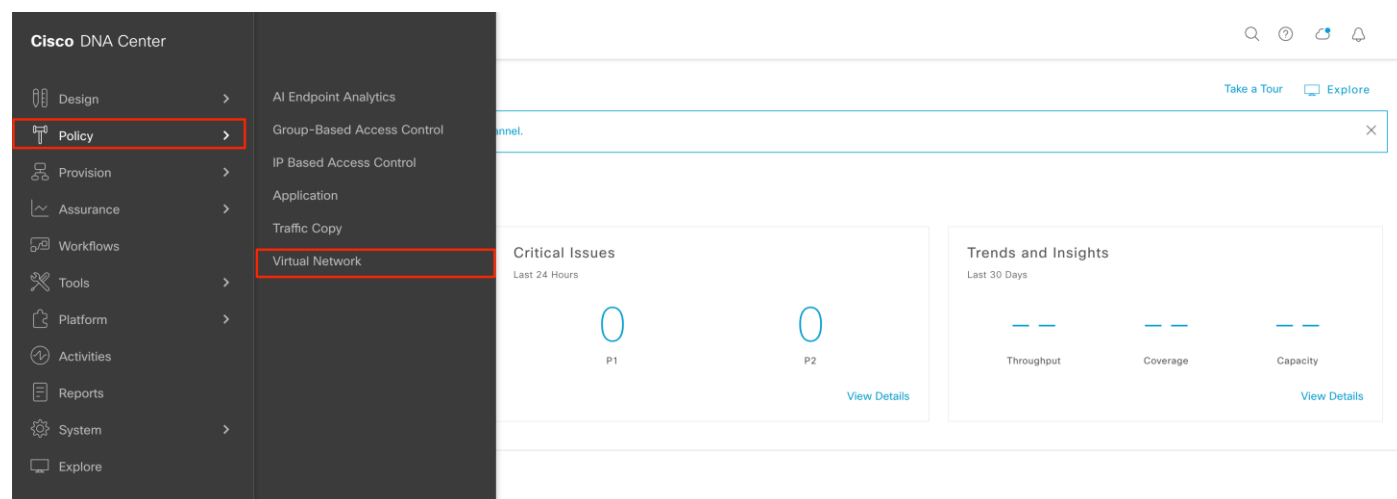

### Step 2. Click in the Virtual Network name **INFRA\_VN**, and click **Edit** in the slide-out page



Choose the Fabric GRT Service VPN associated to the WAN Edge device in the vManage VPN drop-down option.

Click **Save**

Cisco DNA Center
Policy - Virtual Network

Virtual Networks (2)

Filter
Actions

	Name	vManage VPN	Guest VN
<input type="radio"/>	DEFAULT_VN		
<input type="radio"/>	INFRA_VN		

Show 10 entries
Showing 1 - 2 of 2

Edit Virtual Network

Name  
INFRA\_VN

vManage VPN  
100

Search

10  
20  
100  
30

Cancel Save

### Tech tip

The vManage VPN lists all the user-configured Service VPNs that are created and associated to IOS-XE WAN Edge device that are part of the integration.

click **Accept**

Cisco DNA Center
Policy - Virtual Network

Virtual Networks (2)

Filter
Actions

	Name	vManage VPN	Guest VN
<input type="radio"/>	DEFAULT_VN		
<input type="radio"/>	INFRA_VN		

Show 10 entries
Showing 1 - 2 of 2

Edit Virtual Network

Name  
INFRA\_VN

vManage VPN  
100

Guest Virtual Network

Cancel Save

Warning

You are setting the vManage VPN for an INFRA\_VN over which underlay devices are managed. If the LAN devices are already added in the INFRA\_VN, then they may become unreachable after changing it. Do you want to continue?

Cancel Accept

**Step 3.** Repeat the previous step, [Step 2](#), for all Service VPN deployed in the SD-WAN fabric that has a corresponding Virtual Network already created.

Cisco DNA Center
Policy · Virtual Network

Virtual Networks (2)
Last updated: 5:20 AM
Refresh
Create Virtual Network

Filter
Actions

	Name	vManage VPN	Guest VN	Scalable Group(s)
<input type="radio"/>	DEFAULT_VN			21
<input type="radio"/>	INFRA_VN	100		Add

**Step 4.** Create a new SD-Access Virtual Network and map to Cisco SD-WAN Service-VPN to it.

Click **Create Virtual Network**

Cisco DNA Center
Policy · Virtual Network

Virtual Networks (2)
Last updated: 5:20 AM
Refresh
Create Virtual Network

Filter
Actions

	Name	vManage VPN	Guest VN	Scalable Group(s)
<input type="radio"/>	DEFAULT_VN			21
<input type="radio"/>	INFRA_VN	100		Add

Input **Name** and choose the Service VPN that maps to the Virtual Network from the drop-down option

Click **Save**

Cisco DNA Center
Policy · Virtual Network

Virtual Networks (2)
Last updated: 5:20 AM
Refresh
Create Virtual Network

Filter
Actions

	Name	vManage VPN	Guest VN	Scalable Group(s)
<input type="radio"/>	DEFAULT_VN			21
<input type="radio"/>	INFRA_VN	100		Add

Create Virtual Network

Name  
VN\_CAMPUS

vManage VPN  
10

☐ Guest Virtual Network

Cancel
Save

Show 10 entries
Showing 1 - 2 of 2

Select **Accept**

Cisco DNA Center Policy - Virtual Network

Virtual Networks (2)

Filter Actions

Name	vManage VPN
DEFAULT_VN	
INFRA_VN	100

**Warning**

You are setting the vManage VPN to a VN. This should not be changed once this is used in the LAN network as changing it can disrupt the network. Do you want to continue?

Cancel **Accept**

Show 10 entries Showing 1 - 2 of 2

**Create Virtual Network**

Name  
VN\_CAMPUS

vManage VPN  
10

☐ Guest Virtual Network

Cancel Save

**Step 5.** Repeat the previous step, [Step 4](#), for all Service VPN deployed in the SD-WAN WAN fabric and that requires corresponding Virtual Network in the Cisco SD-Access fabric.

**Step 6.** Verify each Virtual Network is mapped to SD-WAN Service VPN extending the macro-segmentation from one domain to another.

Cisco DNA Center Policy - Virtual Network

Virtual Networks (5) Last updated: 5:30 AM Refresh Create Virtual Network

Filter Actions


Name	vManage VPN	Guest VN	Scalable Group(s)
DEFAULT_VN			21
INFRA_VN	100		Add
VN_CAMPUS	10		Add
VN_GUEST	30		Add
VN_IOT	20		Add

Show 10 entries Showing 1 - 5 of 5 Previous 1 Next


## Procedure 5. Associate Scalable Groups to Virtual Networks

This section details the procedure to create Scalable groups and associate Scalable groups to Virtual Networks.

**Step 1.** In Cisco DNA Center, navigate to **Policy > Group-Based Access Control**

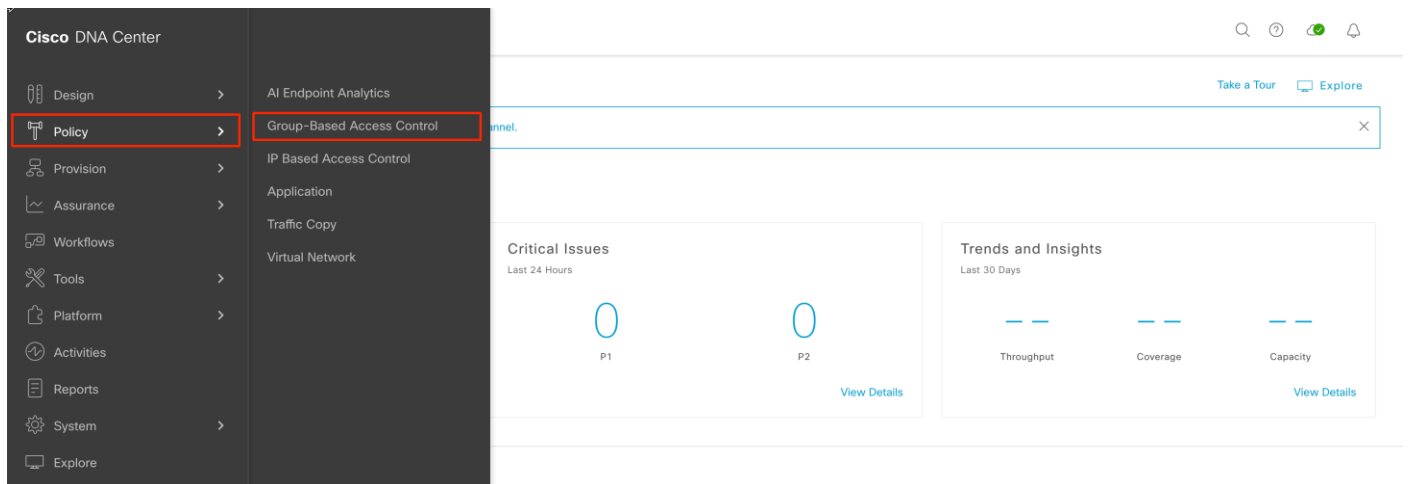


## Step 2. Select Scalable Groups tab

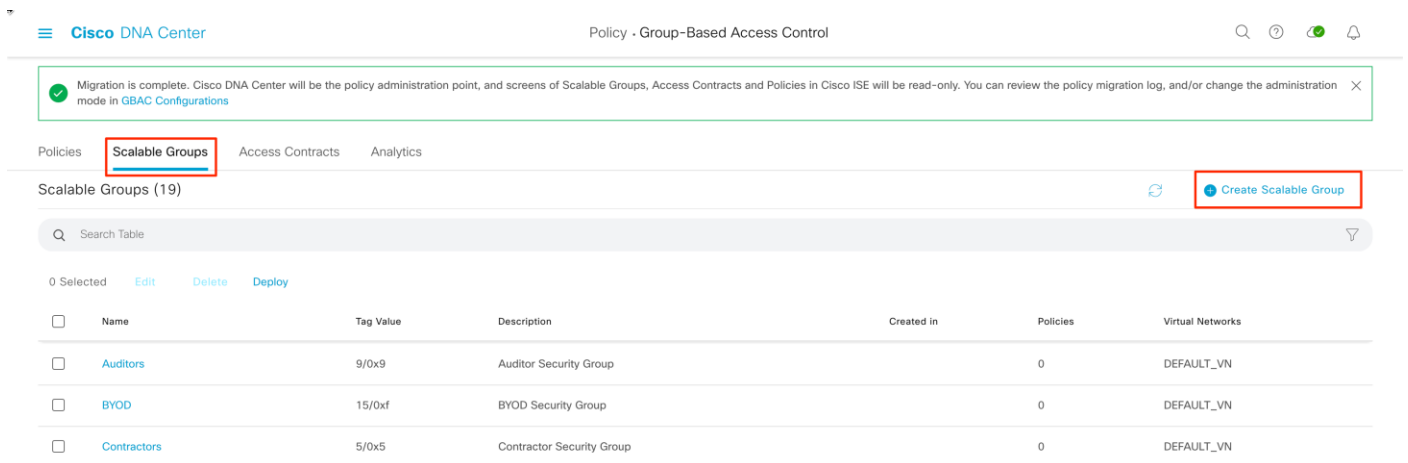

Note: By default, the Scalable Group learnt from ISE are associated to DEFAULT\_VN

## Step 3. To associate the Scalable Group to different Virtual Network, select the Scalable Group from the list and click Edit

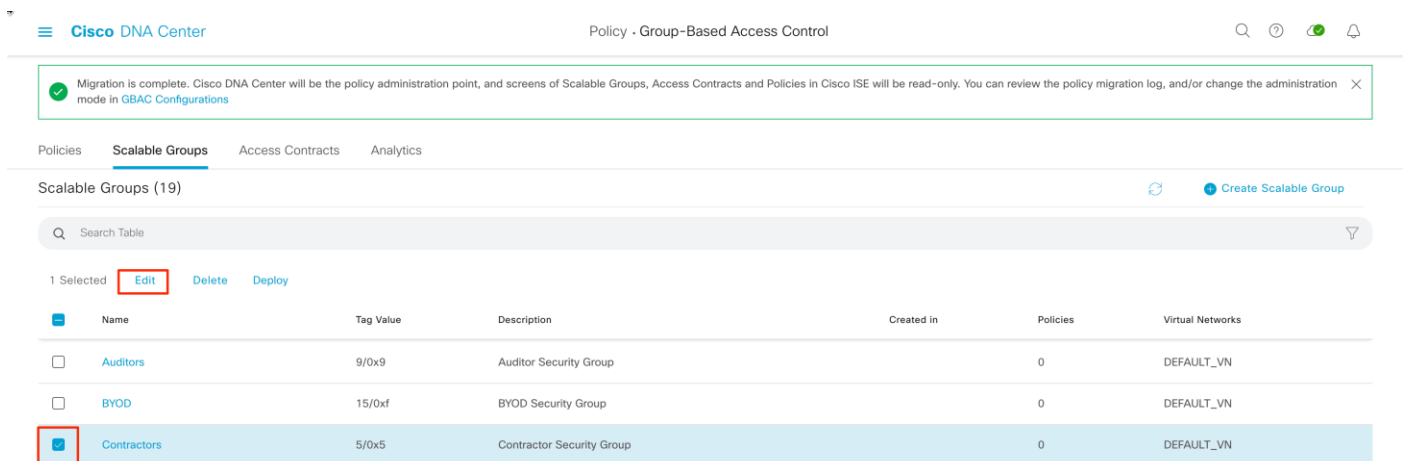

Select the Virtual Networks from the options and click Save



**Cisco DNA Center** Policy - Group-Based Access Control

Migration is complete. Cisco DNA Center will be the policy administration point, and screens of Scalable Groups, Access Contracts and Policies in Cisco ISE will be read-only. You made in GBAC Configurations

Policies **Scalable Groups** Access Contracts Analytics

Scalable Groups (19)

Search Table

1 Selected [Edit](#) [Delete](#) [Deploy](#)

	Name	Tag Value	Description	Created in
<input type="checkbox"/>	Auditors	9/0x9	Auditor Security Group	
<input type="checkbox"/>	BYOD	15/0xf	BYOD Security Group	
<input checked="" type="checkbox"/>	Contractors	5/0x5	Contractor Security Group	
<input type="checkbox"/>	Critical_SGT	19/0x13	undefined	
<input type="checkbox"/>	Developers	8/0x8	Developer Security Group	
<input type="checkbox"/>	Development_Servers	12/0xc	Development Servers Security Group	
<input type="checkbox"/>	Employees	4/0x4	Employee Security Group	
<input type="checkbox"/>	Extranet	17/0x11	Extranet Scalable Group	
<input type="checkbox"/>	Guests	6/0x6	Guest Security Group	

19 Records

**Edit Scalable Group**

Name\* **Contractors**

Tag Value (decimal)\* **5**

Description (optional)  
Contractor Security Group

Virtual Networks\*  
VN\_CAMPUS X

Cancel **Save**

**Cisco DNA Center** Policy - Group-Based Access Control

Migration is complete. Cisco DNA Center will be the policy administration point, and screens of Scalable Groups, Access Contracts and Policies in Cisco ISE will be read-only. You can review the policy migration log, and/or change the administration

Policies **Scalable Groups** Access Contracts Analytics

Scalable Groups (19) [Create Scalable Group](#)

Search Table

0 Selected [Edit](#) [Delete](#) [Deploy](#)

	Name	Tag Value	Description	Created in	Policies	Virtual Networks
<input type="checkbox"/>	Contractors	5/0x5	Contractor Security Group		0	VN_CAMPUS

**Step 4.** Repeat [Step 3](#), for other Scalable Groups being deployed at the site.

**Step 5.** To create new Scalable Group, select **Create Scalable Group**

**Cisco DNA Center** Policy - Group-Based Access Control

Migration is complete. Cisco DNA Center will be the policy administration point, and screens of Scalable Groups, Access Contracts and Policies in Cisco ISE will be read-only. You can review the policy migration log, and/or change the administration

Policies **Scalable Groups** Access Contracts Analytics

Scalable Groups (19) [Create Scalable Group](#)

Search Table

0 Selected [Edit](#) [Delete](#) [Deploy](#)

	Name	Tag Value	Description	Created in	Policies	Virtual Networks
<input type="checkbox"/>	Contractors	5/0x5	Contractor Security Group		0	VN_CAMPUS

Input Name, Tag Value (optional), Virtual Networks and click Save

**Cisco DNA Center** Policy - Group-Based Access Control

Migration is complete. Cisco DNA Center will be the policy administration point, and screens of Scalable Groups, Access Contracts and Policies in Cisco ISE will be read-only. You made in [GBAC Configurations](#)

Policies **Scalable Groups** Access Contracts Analytics

Scalable Groups (19)

Search Table

0 Selected [Edit](#) [Delete](#) [Deploy](#)

<input type="checkbox"/>	Name	Tag Value	Description	Created in
<input type="checkbox"/>	<a href="#">Contractors</a>	5/0x5	Contractor Security Group	
<input type="checkbox"/>	<a href="#">Auditors</a>	9/0x9	Auditor Security Group	
<input type="checkbox"/>	<a href="#">BYOD</a>	15/0xf	BYOD Security Group	
<input type="checkbox"/>	<a href="#">Developers</a>	8/0x8	Developer Security Group	
<input type="checkbox"/>	<a href="#">Development_Servers</a>	12/0xc	Development Servers Security Group	
<input type="checkbox"/>	<a href="#">Employees</a>	4/0x4	Employee Security Group	
<input type="checkbox"/>	<a href="#">Guests</a>	6/0x6	Guest Security Group	
<input type="checkbox"/>	<a href="#">Network_Services</a>	3/0x3	Network Services Security Group	
<input type="checkbox"/>	<a href="#">PCI_Servers</a>	14/0xe	PCI Servers Security Group	

19 Records

**Create Scalable Group**

Name\* **IP\_PHONE\_SGT**

Tag Value (decimal)\* **18**

Description (optional) **IP\_PHONE\_SGT**

Virtual Networks\* **VN\_CAMPUS**

☐ Propagate to ACI

[Cancel](#) [Save](#)

**Cisco DNA Center** Policy - Group-Based Access Control

Migration is complete. Cisco DNA Center will be the policy administration point, and screens of Scalable Groups, Access Contracts and Policies in Cisco ISE will be read-only. You can review the policy migration log, and/or change the administration mode in [GBAC Configurations](#)

Policies **Scalable Groups** Access Contracts Analytics

Scalable Groups (20)

Search Table

0 Selected [Edit](#) [Delete](#) [Deploy](#) [Refresh](#) [Create Scalable Group](#)

<input type="checkbox"/>	Name	Tag Value	Description	Created in	Policies	Virtual Networks
<input type="checkbox"/>	<a href="#">Contractors</a>	5/0x5	Contractor Security Group		0	VN_CAMPUS
<input type="checkbox"/>	<b>IP_PHONE_SGT</b>	<b>18/0x12</b>	IP_PHONE_SGT		0	<b>VN_CAMPUS</b>

**Step 6.** Repeat the previous step, [Step 5](#), to create additional **Scalable Group** and associate **Virtual Networks**.

Cisco DNA Center
Policy - Group-Based Access Control

Migration is complete. Cisco DNA Center will be the policy administration point, and screens of Scalable Groups, Access Contracts and Policies in Cisco ISE will be read-only. You can review the policy migration log, and/or change the administration mode in GBAC Configurations

Policies
Scalable Groups
Access Contracts
Analytics

Scalable Groups (21)
Create Scalable Group

Search Table

0 Selected
Edit
Delete
Deploy


<input type="checkbox"/>	Name	Tag Value	Description	Created in	Policies	Virtual Networks
<input type="checkbox"/>	IoT_Device_SGT	20/0x14	IoT_Device_SGT		0	VN_IOT
<input type="checkbox"/>	Guests	6/0x6	Guest Security Group		0	VN_GUEST
<input type="checkbox"/>	Contractors	5/0x5	Contractor Security Group		0	VN_CAMPUS
<input type="checkbox"/>	Employees	4/0x4	Employee Security Group		0	VN_CAMPUS
<input type="checkbox"/>	IP_PHONE_SGT	18/0x12	IP_PHONE_SGT		0	VN_CAMPUS
<input type="checkbox"/>	Network_Services	3/0x3	Network Services Security Group		0	DEFAULT_VN

Process 4: Configuring LAN Segment manually

This section of the deployment guide provides detailed steps to manually configure the LAN segment with the intent to build Fabric GRT reachability at the site and also provide Fabric GRT reachability across sites.

WAN Edge device connectivity to LAN and WAN segment over different Service VPN.


Figure 20. Cisco SD-WAN WAN Edge Interface Service VPN Mapping

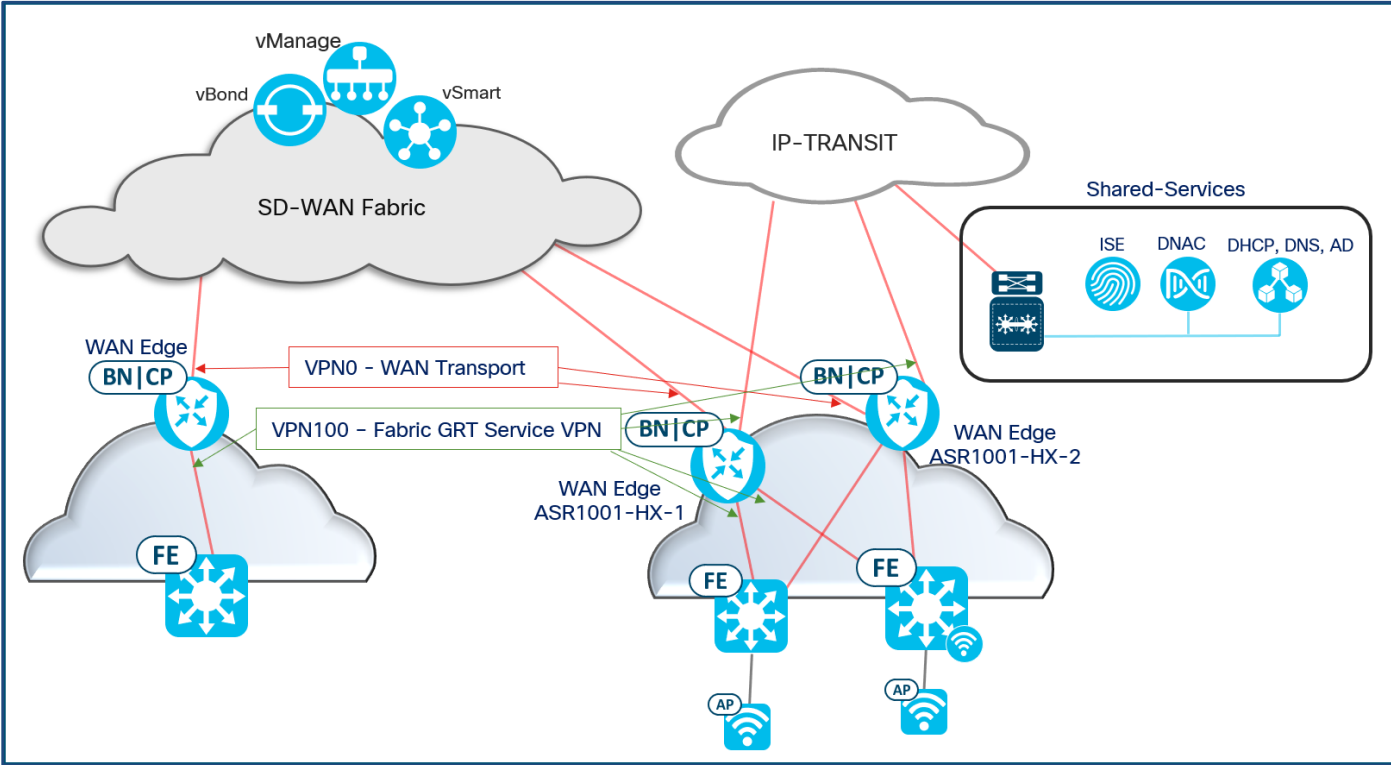


## Procedure 1. Creating Interface template connecting to the LAN segment

This section details the procedure to create templates for Ethernet interface on the IOS-XE WAN Edge devices with the intent to connect to downstream LAN devices at the site.

**Step 1.** Login to vManage, navigate to **Configuration > Templates**, click **Feature** tab and **Add Template**

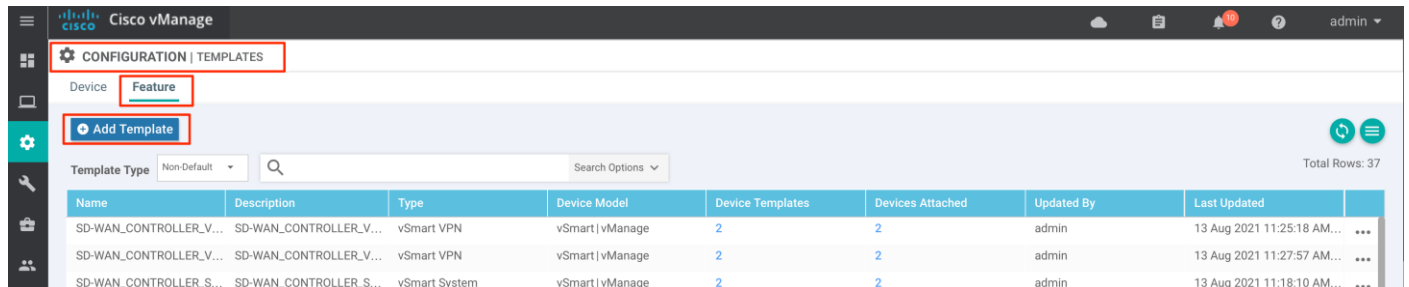

**Step 2.** Select the WAN Edge devices from the list and under **VPN** category, click **Cisco VPN Interface Ethernet** template

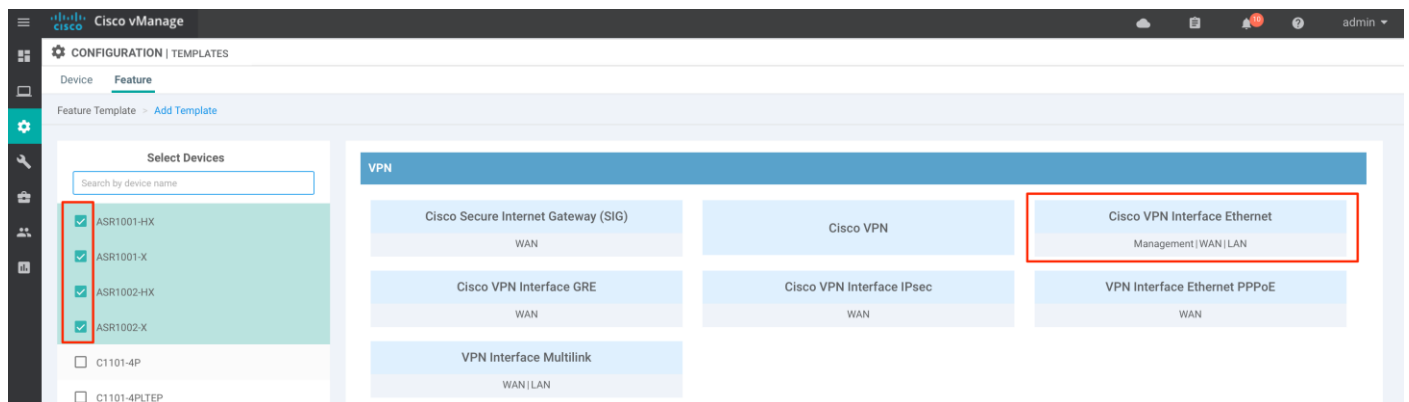

**Step 3.** Input **Template Name** and **Description** to reference the template.

Under **Basic Configuration** tab, select

**Shutdown:** No

**Interface Name:** 'vpn100\_lan\_interface1'

**Description:** 'vpn100\_lan\_interface1'

Select **IPv4**

Select **Static**

**IPv4 Address/prefix length:** 'vpn100\_lan\_interface\_address'

Cisco vManage

CONFIGURATION | TEMPLATES

Device Feature

Feature Template > Add Template > Cisco VPN Interface Ethernet

Device Type: ASR1001-HX,ASR1001-X,ASR1002-HX,ASR1002-X,ISR4321,ISR4331,ISR4351,ISR4431,ISR4451-X,ISR4461

Template Name: LAN\_INTERFACE1

Description: LAN\_INTERFACE1

Basic Configuration Tunnel NAT VRRP ACL/QoS ARP TrustSec Advanced

BASIC CONFIGURATION

Shutdown: ☒ No

Interface Name: vpn100\_lan\_interface1

Description: vpn100\_lan\_interface1

Dynamic ☐ Static ☒

IPv4 Address/prefix-length: vpn100\_lan\_interface1\_address

Secondary IP Address (Maximum: 4) Add

IPv4 IPv6

Under **Advanced** tab, input

**IP MTU: 2000**

click **Save**

#### Tech tip

IP MTU for the interface connecting to the SD-Access LAN segment must be increased to more than 1550 to accommodate the VXLAN encapsulated packets. It is recommended to change the MTU size to highest supported value on the interface, which is 2000 bytes.

Cisco vManage

CONFIGURATION | TEMPLATES

Device Feature

Feature Template > Add Template > Cisco VPN Interface Ethernet

Basic Configuration Tunnel NAT VRRP ACL/QoS ARP TrustSec Advanced

ADVANCED

Duplex: ☒

MAC Address: ☒

IP MTU: 2000

TCP MSS: ☒

Speed: ☒

ARP Timeout: 1200

Autonegotiation: ☒ On ☐ Off

TLLOC Extension: ☒

Save Cancel

**Step 4.** Repeat this [Procedure](#) to add additional interface(s) that connects the IOS-XE WAN Edge devices to the Fabric GRT LAN segment.

**CONFIGURATION | TEMPLATES**

Device: **Feature**

**Add Template**

Template Type: Non-Default | Search: INTERFACE | Search Options

Total Rows: 16 of 37

Name	Description	Type	Device Model	Device Templates	Devices Attached	Updated By	Last Updated
LAN_INTERFACE2	LAN_INTERFACE2	Cisco VPN Interface Ethernet	ISR4331   ISR4221X   ISR4451-X...	1	1	admin	17 Aug 2021 5:05:05 PM PDT
LAN_LOOPBACK0	LAN_LOOPBACK0	Cisco VPN Interface Ethernet	ISR4331   ISR4221X   ISRv   ISR4...	3	3	admin	17 Aug 2021 5:19:30 PM PDT
LAN_MAIN_INTERFACE1	LAN_MAIN_INTERFACE1	Cisco VPN Interface Ethernet	ISR4331   ISR4221X   ISRv   ISR4...	0	0	admin	17 Aug 2021 5:18:28 PM PDT
LAN_MAIN_INTERFACE2	LAN_MAIN_INTERFACE2	Cisco VPN Interface Ethernet	ISR4331   ISR4221X   ISRv   ISR4...	1	1	admin	17 Aug 2021 5:18:48 PM PDT
LAN_MAIN_INTERFACE3	LAN_MAIN_INTERFACE3	Cisco VPN Interface Ethernet	ISR4331   ISR4221X   ISRv   ISR4...	1	1	admin	17 Aug 2021 5:19:08 PM PDT
LAN_SUB_INTERFACE1	LAN_SUB_INTERFACE1	Cisco VPN Interface Ethernet	ISR4331   ISR4221X   ISRv   ISR4...	0	0	admin	17 Aug 2021 4:30:56 PM PDT
LAN_SUB_INTERFACE2	LAN_SUB_INTERFACE2	Cisco VPN Interface Ethernet	ISR4331   ISR4221X   ISRv   ISR4...	2	2	admin	17 Aug 2021 4:31:46 PM PDT
LAN_SUB_INTERFACE3	LAN_SUB_INTERFACE3	Cisco VPN Interface Ethernet	ISR4331   ISR4221X   ISRv   ISR4...	2	2	admin	17 Aug 2021 4:32:32 PM PDT

### Tech Tip

IOS-XE WAN Edge deployments with connection to peer-device, via IP-Transit, to reach the Shared-Services servers leverage sub-interfaces to accommodate Fabric GRT and overlay interface handoff. In such deployment, create the main-interface first with the **Cisco VPN Interface Ethernet** feature template and then add any additional interface template for each sub-interface with reduced IP MTU (1996) to accommodate the 4-bytes Dot1Q information.

Also, ensure all the Fabric GRT interface template are associated to the dedicated Fabric GRT Service VPN.

## Procedure 2. Configuring routing protocol template to form LAN segment routing adjacencies

This section details the procedure to create routing protocol, OSPF, templates on the IOS-XE WAN Edge devices with the intent to form routing adjacencies to downstream LAN devices at the site.

**Step 1.** Login to vManage, navigate to **Configuration > Templates**, click **Feature** tab and **Add Template**

**CONFIGURATION | TEMPLATES**

Device: **Feature**


**Add Template**

Template Type: Non-Default | Search: | Search Options

Total Rows: 37

Name	Description	Type	Device Model	Device Templates	Devices Attached	Updated By	Last Updated
SD-WAN_CONTROLLER_V...	SD-WAN_CONTROLLER_V...	vSmart VPN	vSmart   vManage	2	2	admin	13 Aug 2021 11:25:18 AM...
SD-WAN_CONTROLLER_V...	SD-WAN_CONTROLLER_V...	vSmart VPN	vSmart   vManage	2	2	admin	13 Aug 2021 11:27:57 AM...
SD-WAN_CONTROLLER_S...	SD-WAN_CONTROLLER_S...	vSmart System	vSmart   vManage	2	2	admin	13 Aug 2021 11:18:10 AM...


**Step 2.** Select the WAN Edge devices from the list and under **Other Templates** category, click **Cisco OSPF** template

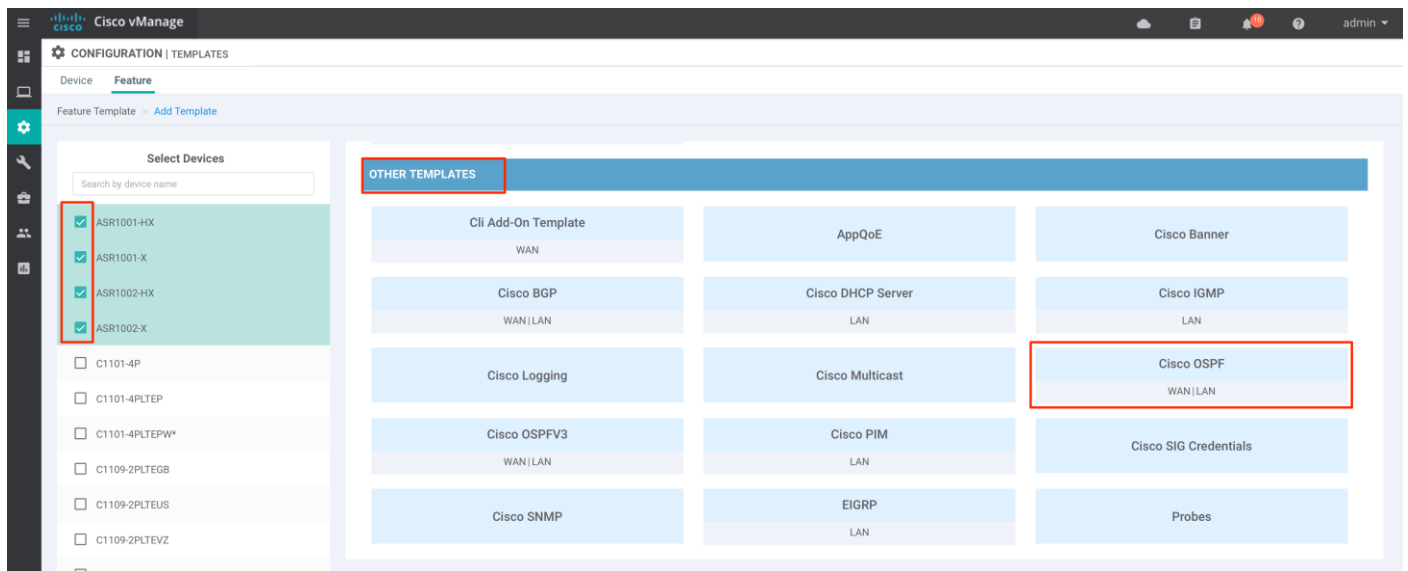

**Step 3.** Input **Template Name** and **Description** to reference the template.

Under **Basic Configuration** tab, select

**Router ID: 'ospf\_router\_id'**

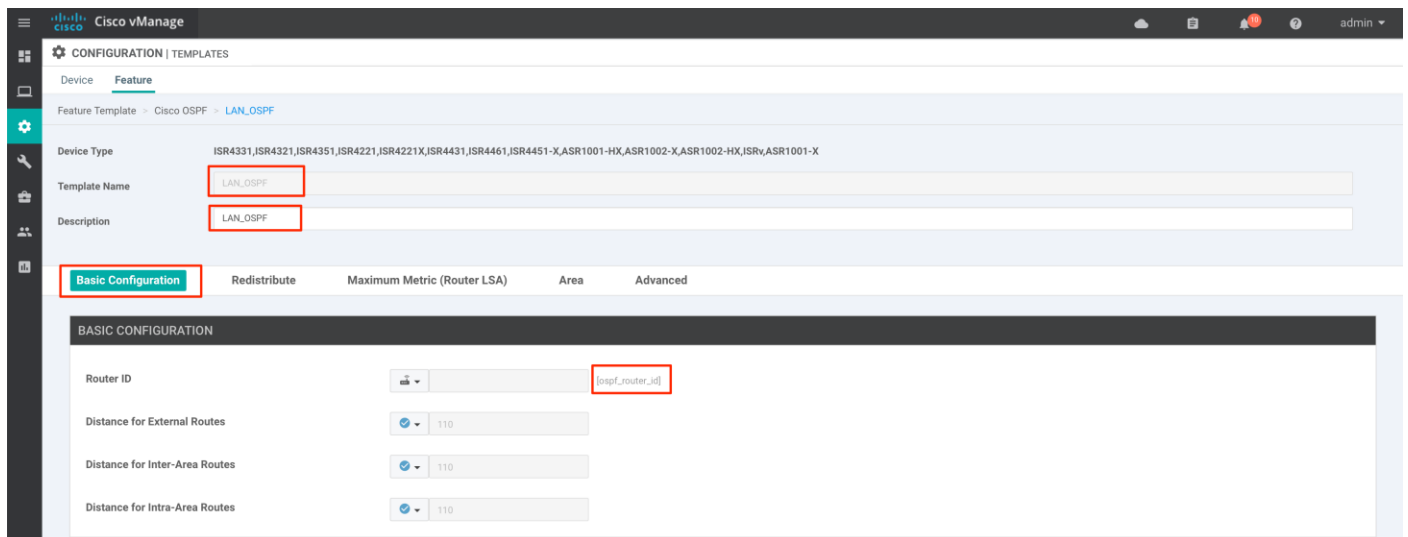


**Step 4.** Under **Redistribute** tab, click **New Redistribute** and select

**Protocol: 'ospf\_redistribute\_protocol'**


Enable **Mark as Optional Row**

and click **Add**

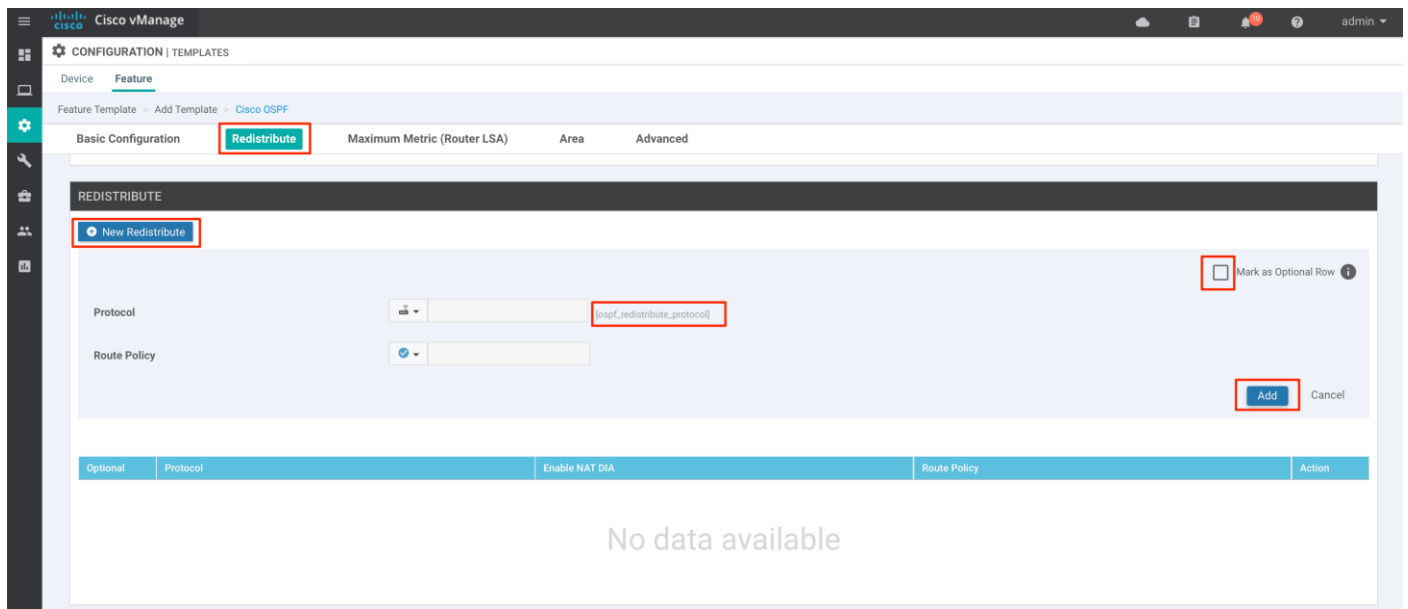


The screenshot shows the Cisco vManage interface for configuring OSPF. The breadcrumb trail is "CONFIGURATION | TEMPLATES" > "Device" > "Feature" > "Cisco OSPF". The "Redistribute" tab is selected. The "REDISTRIBUTE" section has a "New Redistribute" button highlighted. Below it, the "Protocol" field is set to "[ospf\_redistribute\_protocol]". The "Route Policy" field is empty. There is a "Mark as Optional Row" checkbox and an "Add" button. At the bottom, a table header shows columns: "Optional", "Protocol", "Enable NAT DIA", "Route Policy", and "Action". The table is currently empty with the text "No data available".

- Step 5.** Under **Area** tab, click **New Area** and input
- Area Number:** 'ospf\_area\_a\_number'
- Click **Add Interface** and click **Add Interface**

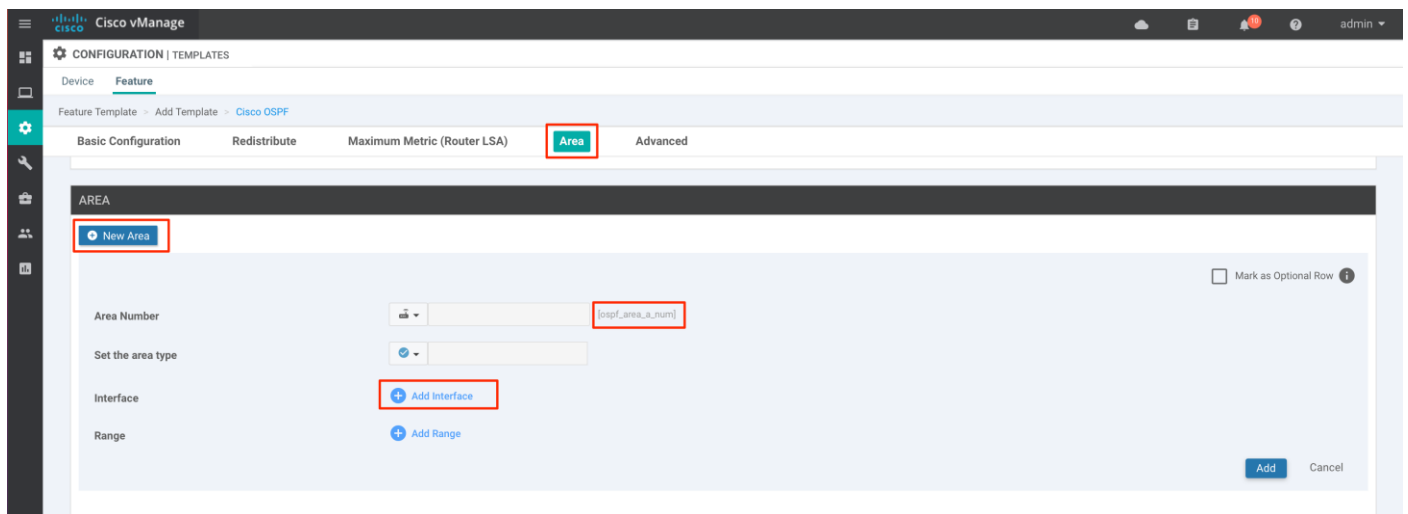

The screenshot shows the Cisco vManage interface for configuring OSPF. The breadcrumb trail is "CONFIGURATION | TEMPLATES" > "Device" > "Feature" > "Cisco OSPF". The "Area" tab is selected. The "AREA" section has a "New Area" button highlighted. Below it, the "Area Number" field is set to "[ospf\_area\_a\_num]". The "Set the area type" field is empty. There are "Add Interface" and "Add Range" buttons. At the bottom right, there is an "Add" button and a "Cancel" button.




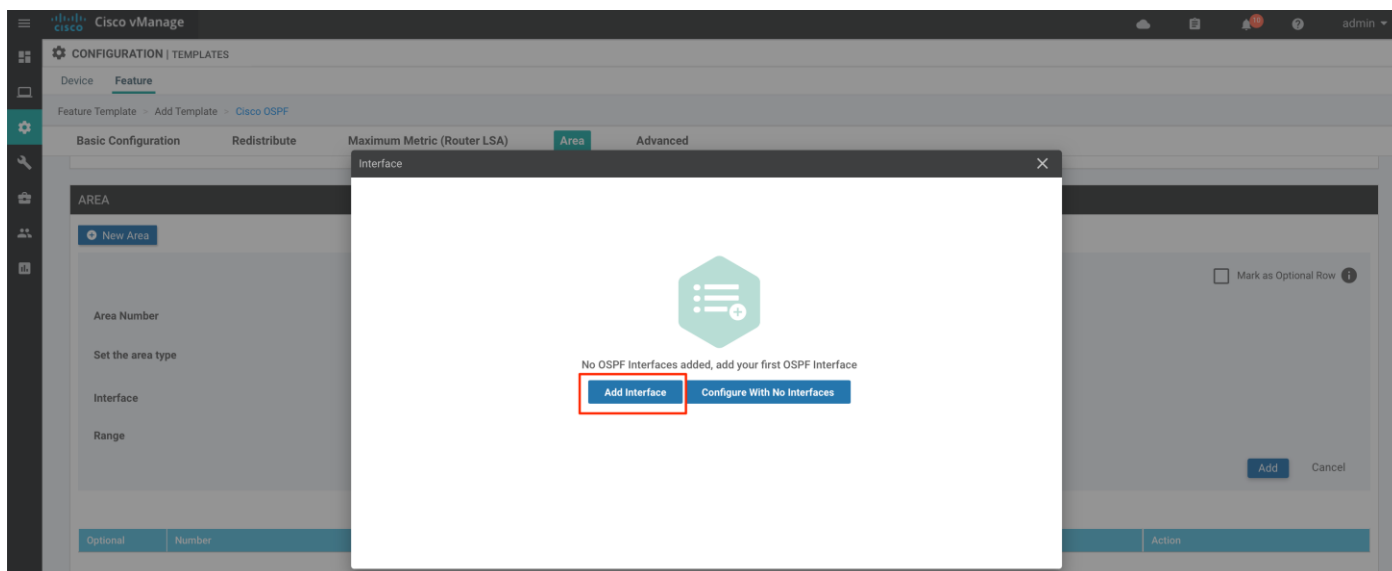

Input **Interface Name**: 'ospf\_interface1'

Add additional interfaces as needed for the deployment by clicking **Add Interface**

and then click **Add**

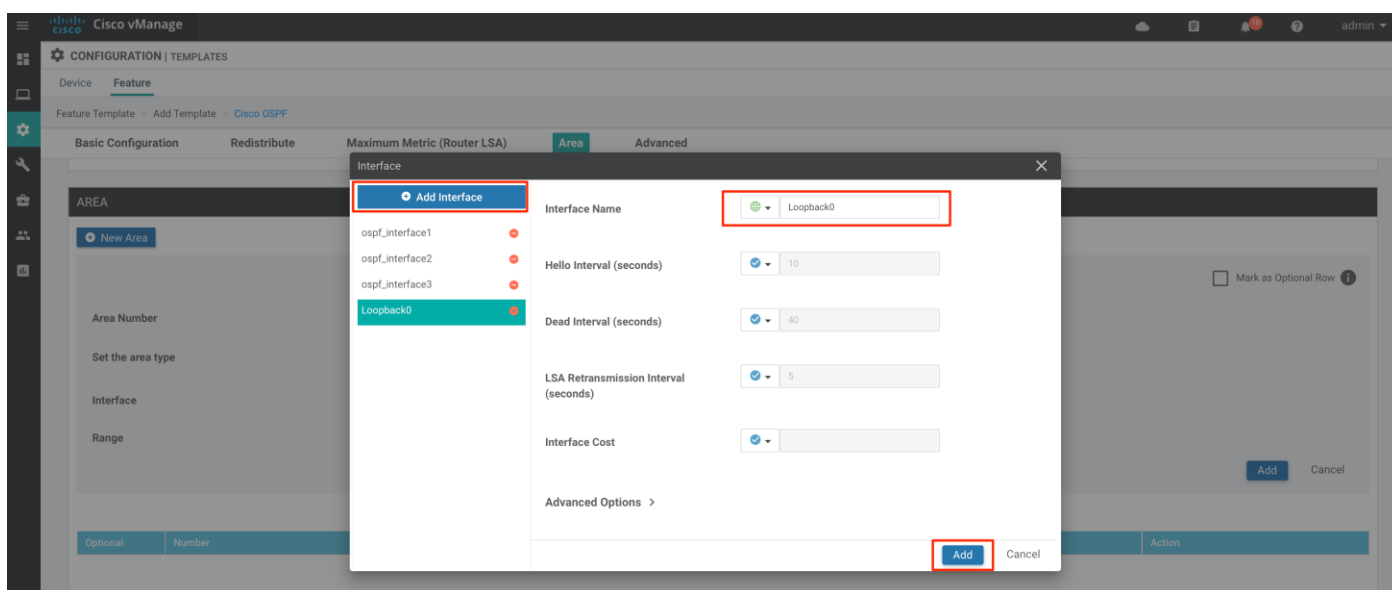

Click **Add**

CONFIGURATION | TEMPLATES

Device Feature

Feature Template > Add Template > Cisco OSPF

Basic Configuration Redistribute Maximum Metric (Router LSA) **Area** Advanced

AREA

+ New Area

Area Number [dropdown icon] [ospf\_area\_a\_num]

Set the area type [dropdown icon]

Interface 4 Interface

Range + Add Range

☐ Mark as Optional Row ⓘ

**Add** Cancel

**Step 6.** Click **Save** to save the routing protocol OSPF template

CONFIGURATION | TEMPLATES

Device Feature

Feature Template > Add Template > Cisco OSPF

Basic Configuration Redistribute Maximum Metric (Router LSA) **Area** Advanced

Optional	Number	Area Type	No Summary	Interface	Range	Action
<input type="checkbox"/>	[dropdown icon] [ospf_area_a_num]	[dropdown icon]		4	0	[edit icon] [delete icon]

ADVANCED

**Save** Cancel

CONFIGURATION | TEMPLATES

Device Feature

+ Add Template

Template Type Non-Default [search icon] OSPF x Search Options


Total Rows: 1 of 37

Name	Description	Type	Device Model	Device Templates	Devices Attached	Updated By	Last Updated	
LAN_OSPF	LAN_OSPF	Cisco OSPF	ISR4331   ISR4221X   ISRV   ISR4...	1	1	admin	17 Aug 2021 5:20:04 PM PDT	...


### Procedure 3. Associating interface, routing protocol templates on the IOS-XE WAN Edge device

This section details the procedure to associate Cisco VPN Ethernet interface, routing protocol template with the intent to establish connectivity, establish routing adjacencies with network devices at the site and to provide end-to-end Fabric GRT connectivity across sites.

**Step 1.** Login to vManage, navigate to **Configuration > Templates**, click **Device** tab

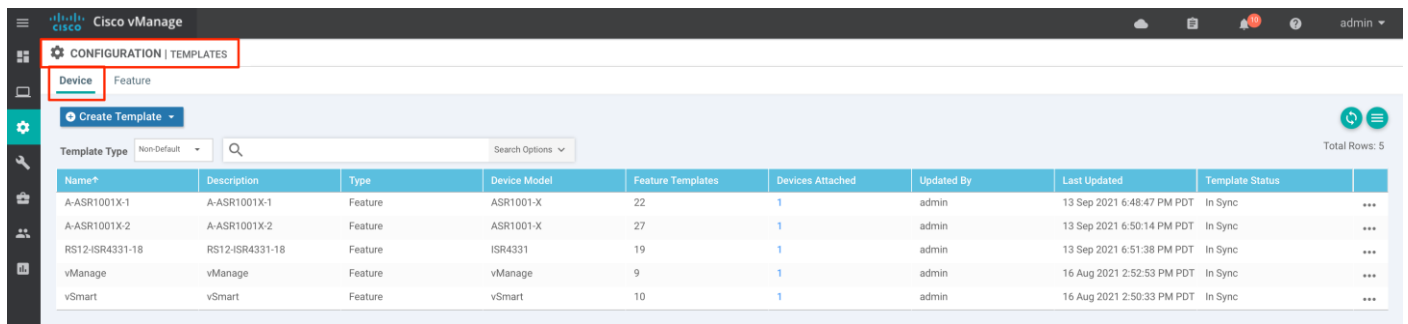


**Step 2.** Select the WAN Edge device from the list and click **three dots (...)** and select **Edit** from the drop-down options

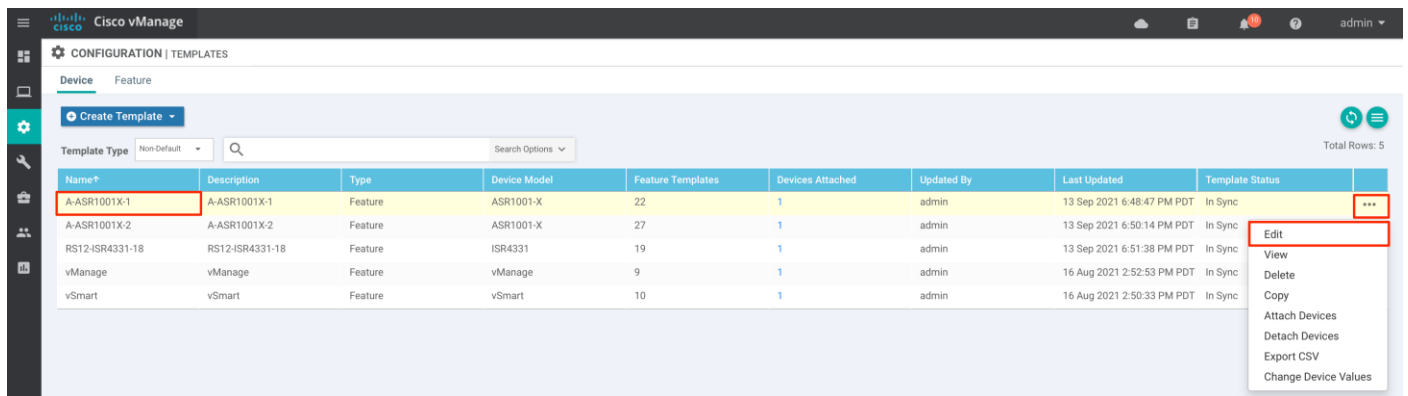


**Step 3.** Select **Service VPN** tab

click Fabric GRT Service **VPN** from the list and click **three dots (...)** and select **Edit** from the options

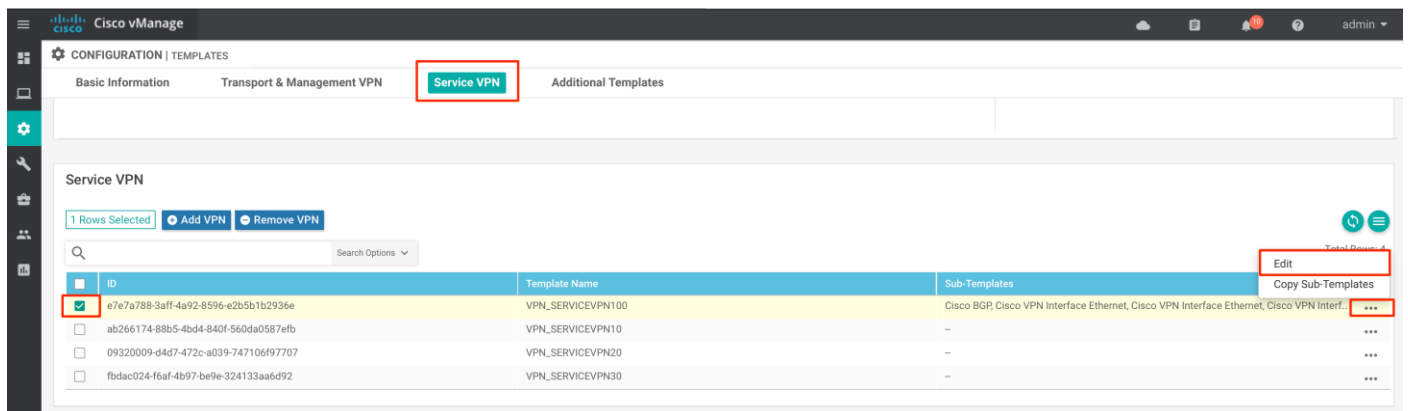


**Step 4.** Select interfaces that connects to the LAN segment, by selecting **Additional Cisco VPN Templates > Cisco VPN Interface Ethernet**


And select the interface template previously created.

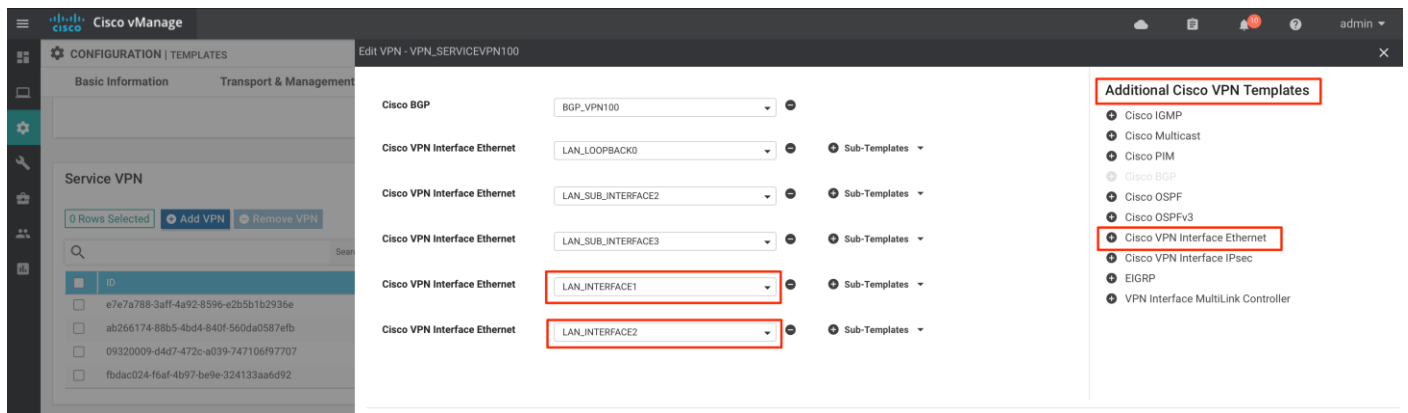

**Step 5.** Select routing protocol by selecting **Additional Cisco VPN Templates > Cisco OSPF**  
And select the routing protocol template previously created.

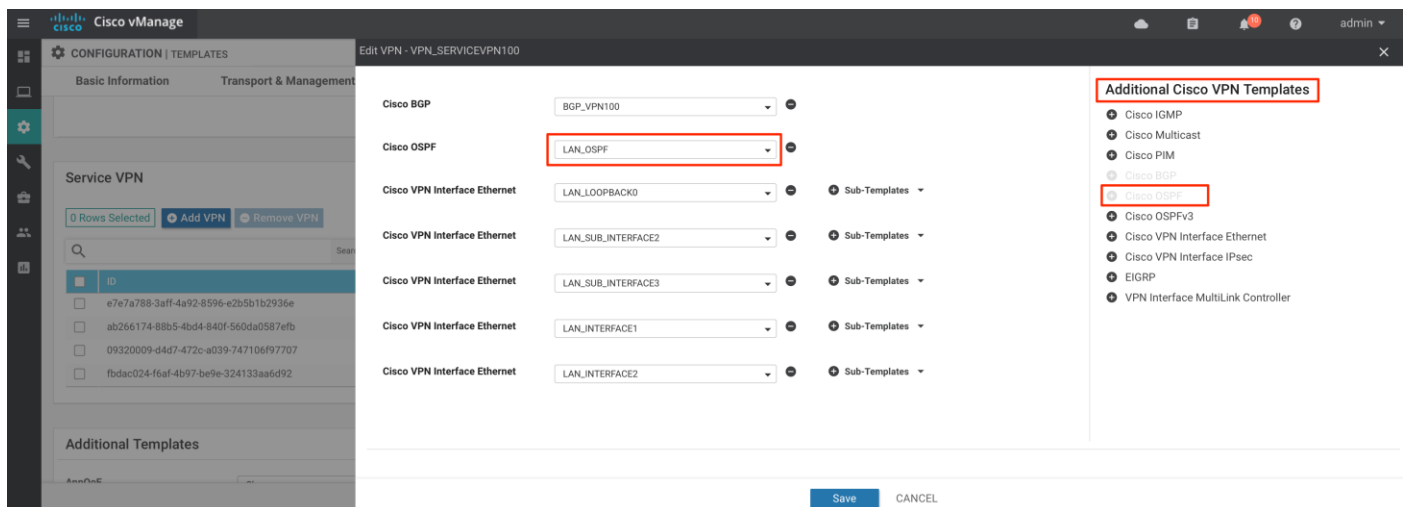

**Step 6.** Click **Save**.

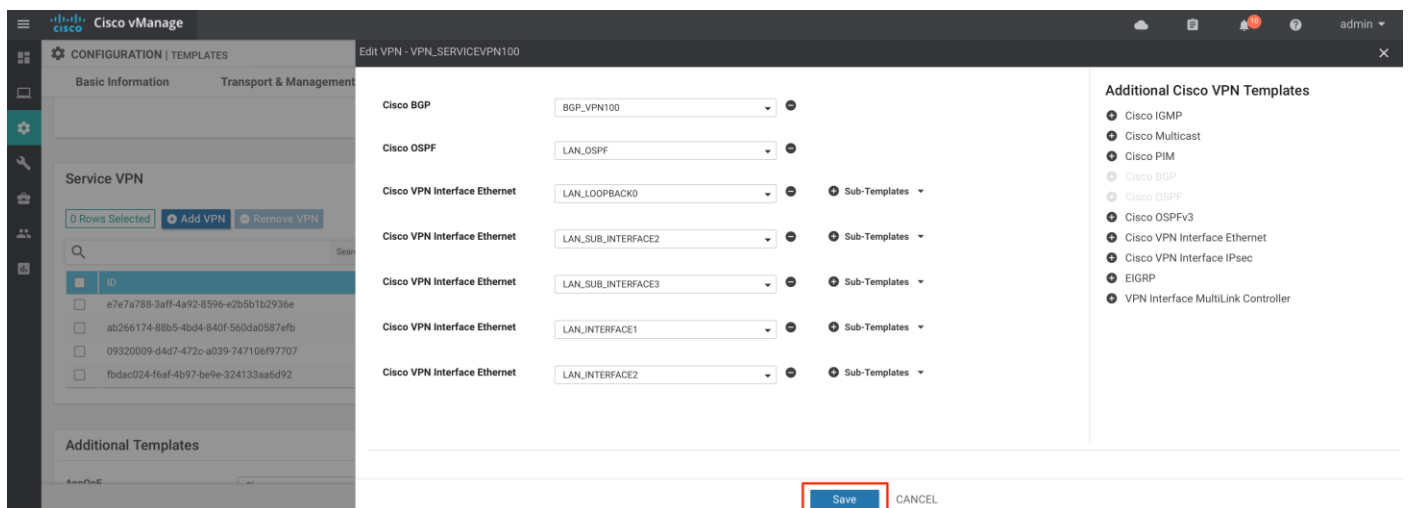

**Step 7.** Click **Update** to associate the templates to the WAN Edge device

**CONFIGURATION | TEMPLATES**

Device Feature

Device Model: ASR1001-X

Template Name: A-ASR1001X-1

Description: A-ASR1001X-1

**Basic Information** | Transport & Management VPN | Service VPN | Additional Templates

Cisco System \*: WAN\_EDGE\_SYSTEM

Cisco Logging\*: Factory\_Default\_Cisco\_Logging\_Template

Cisco NTP: CISCO\_NTP

Additional Cisco System Templates

- Cisco Logging
- Cisco NTP

**Update** Cancel

**Step 8.** Input values to device-specific variables, by clicking the **three dots (...)** and choose **Edit Device Template**

**CONFIGURATION | TEMPLATES**

Device Template | A-ASR1001X-1

Search Options

Chassis Number	System IP	Hostname	Interface Name(vpn100_lan_interface2)	IPv4 Address/ prefix length(vpn100_lan_interface2_address)	Interface Name(vpn100_lan_interface1)
ASR1001-X-JAE204100WU	1.1.1.10	A-ASR1001X-1	TenGigabitEthernet0/0/1	10.4.202.5/30	TenGigabitEthernet0/0/0

Total Rows: 1

**Edit Device Template**

And click **Update**

**Update Device Template**



Variable List (Hover over each field for more information)

Chassis Number	ASR1001-X-JAE204100WU
System IP	1.1.1.10
Hostname	A-ASR1001X-1
Interface Name(vpn100_lan_interface2)	TenGigabitEthernet0/0/1
IPv4 Address/ prefix-length(vpn100_lan_interface2_address)	10.4.202.5/30
Interface Name(vpn100_lan_interface1)	TenGigabitEthernet0/0/0
IPv4 Address/ prefix-length(vpn100_lan_interface1_address)	10.4.202.1/30
Interface Name(vpn100_subinterface3)	GigabitEthernet0/0/1.1
IPv4 Address/ prefix-length(vpn100_subinterface3_address)	10.4.202.89/30
Interface Name(vpn100_subinterface2)	GigabitEthernet0/0/2.1
IPv4 Address/ prefix-length(vpn100_subinterface2_address)	10.4.202.85/30
IPv4 Address/ prefix-length(vpn100_loopback0_address)	10.4.200.1/32
AS Number(bgp_as_num)	5000
Network Prefix(bgp_network_address_prefix_0/0/2.1)	10.4.202.84/30
Address(bgp_neighbor_address_interface2)	10.4.202.86
Remote AS(bgp_neighbor_remote_as_interface2)	3
Interface Name(vpn512_mgmt_interface)	GigabitEthernet0
Address(vpn0_MPLS_nexthop)	10.5.208.121
Address(vpn0_INET_nexthop)	10.5.207.121
Interface Name(mpls_interface_name)	GigabitEthernet0/0/4
IPv4 Address/ prefix-length(mpls_interface_ip_address)	10.5.208.122/30
Interface Name(met_interface_name)	GigabitEthernet0/0/5


Generate Password

**Update** Cancel

**Step 9.** Click **Next** and **Configure Devices**

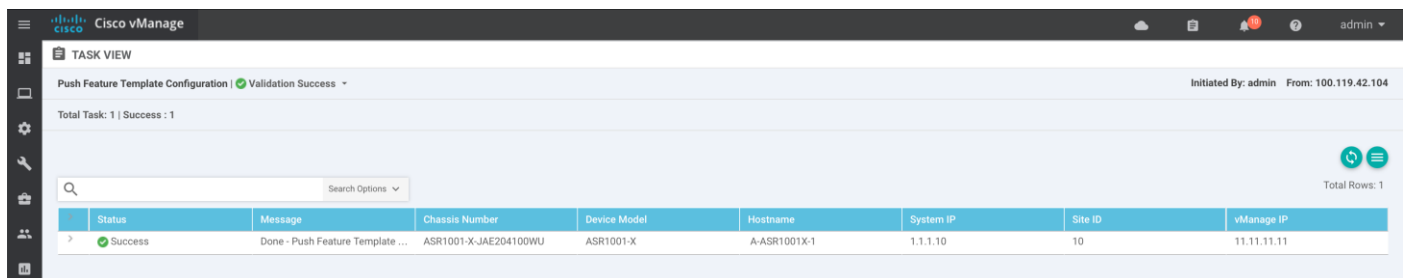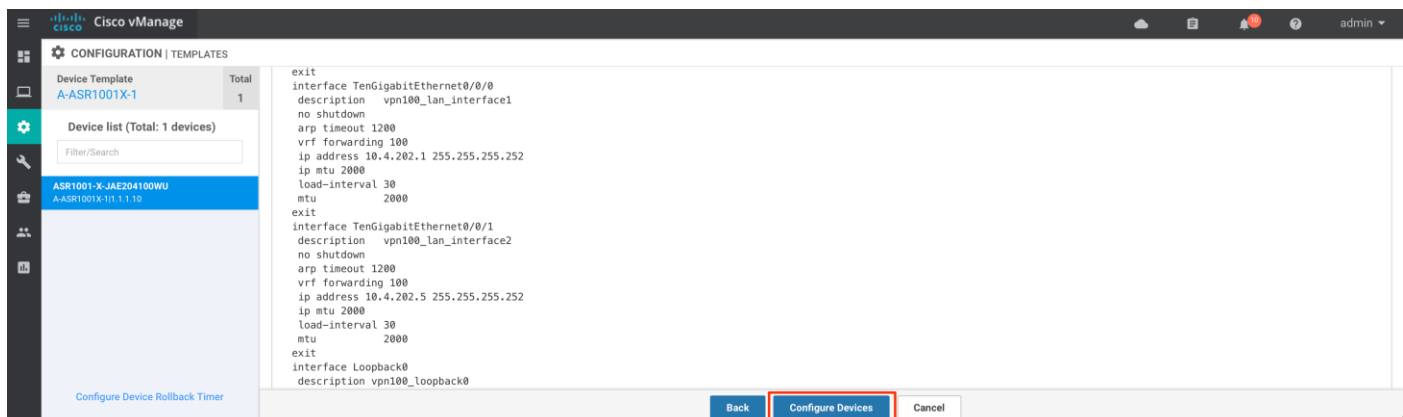

**Step 10.** Repeat steps in this [Procedure](#) to establish resilient, highly available Fabric GRT connectivity on each IOS-XE WAN Edge device

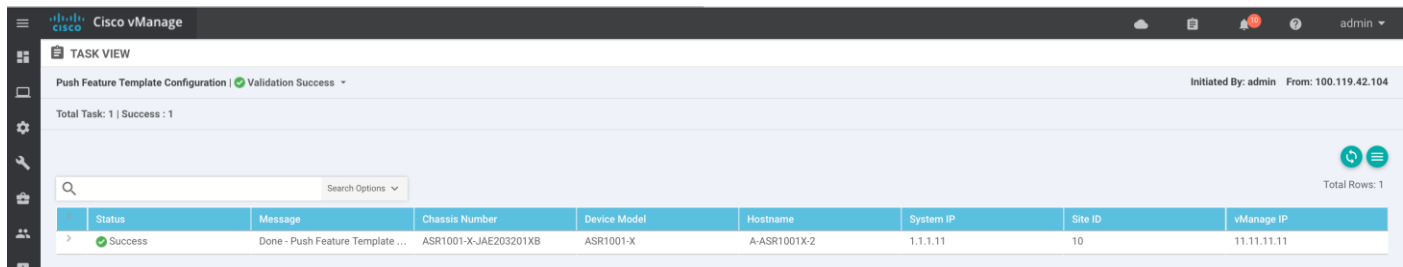

**Step 11.** Verify the Fabric GRT connectivity to the downstream devices

In vManage, navigate to **Tools > SSH Terminal**, select the WAN Edge device from the list. Login with the device credentials and execute the below command

**'show run int <interface name>'**

**'show ip ospf neighbor'**

**'show ip route vrf <Fabric GRT Service VPN>'**

The screenshot shows the Cisco vManage interface with the 'TOOLS | SSH TERMINAL' tab selected. The left sidebar lists device groups, with 'A-ASR1001X-1' (ASR1001-X, 1.1.1.10, Site ID: 10) highlighted. The main terminal window shows the following configuration commands and output:

```

A-ASR1001X-1#sh run int ten 0/0/0
Building configuration...

Current configuration : 254 bytes
!
interface TenGigabitEthernet0/0/0
description vpm100_lan_interface1
mtu 2000
vrf forwarding 100
ip address 10.4.202.1 255.255.255.252
ip ospf network broadcast
ip ospf dead-interval 40
ip ospf 100 area 0
load-interval 30
arp timeout 1200
end
A-ASR1001X-1#sh run int ten 0/0/1
Building configuration...

Current configuration : 254 bytes
!
interface TenGigabitEthernet0/0/1
description vpm100_lan_interface2
mtu 2000
vrf forwarding 100
ip address 10.4.202.5 255.255.255.252
ip ospf network broadcast
ip ospf dead-interval 40
ip ospf 100 area 0
arp timeout 1200
end
A-ASR1001X-1#
  
```

The screenshot shows the Cisco vManage interface with the 'TOOLS | SSH TERMINAL' tab selected. The left sidebar lists device groups, with 'A-ASR1001X-1' (ASR1001-X, 1.1.1.10, Site ID: 10) highlighted. The main terminal window shows the following commands and output:

```

A-ASR1001X-1#sh ip ospf neighbor
Neighbor ID      Pri   State           Dead Time   Address        Interface
10.4.200.12      1     FULL/DR         00:00:32    10.4.202.6     TenGigabitEthernet0/0/1
10.4.200.11      1     FULL/DR         00:00:35    10.4.202.2     TenGigabitEthernet0/0/0
10.4.200.2       1     FULL/DR         00:00:35    10.4.202.90    GigabitEthernet0/0/1.1

A-ASR1001X-1#sh ip route vrf 100

Routing Table: 100
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, m - OMP
       n - NAT, N1 - NAT inside, No - NAT outside, Nd - NAT D1A
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       H - NHRP, G - NHRP registered, g - NHRP registration summary
       o - ODR, P - periodic downloaded static route, l - LISP
       a - application route
       * - replicated route, % - next hop override, p - overrides from PBR
       % - replicated local route overrides by connected

Gateway of last resort is not set


10.0.0.0/8 is variably subnetted, 82 subnets, 5 masks
B      10.4.198.4/30 [20/3328] via 10.4.202.86, 06:22:33
B      10.4.198.64/30 [20/3328] via 10.4.202.86, 06:22:33
C      10.4.200.1/32 is directly connected, Loopback0
O      10.4.200.2/32
        [110/2] via 10.4.202.90, 00:10:29, GigabitEthernet0/0/1.1
O      10.4.200.11/32
        [110/2] via 10.4.202.2, 00:10:15, TenGigabitEthernet0/0/0
O      10.4.200.12/32
        [110/2] via 10.4.202.6, 00:10:15, TenGigabitEthernet0/0/1
B      10.4.200.31/32 [20/130816] via 10.4.202.86, 06:22:33
B      10.4.200.32/32 [20/130816] via 10.4.202.86, 06:22:33
O      10.4.200.51/32
        [110/3] via 10.4.202.6, 00:10:15, TenGigabitEthernet0/0/1
        [110/3] via 10.4.202.2, 00:10:15, TenGigabitEthernet0/0/0
  
```

#### Procedure 4. Discover and Provision the network devices to a site


This section details the procedure to discover, provision the switches to a site with the intent to build Fabric GRT and prepare network devices to build Cisco SD-Access network.

Please refer [Cisco SD-Access Design Guide](#) for design recommendation and deployment best-practices to build resilient Fabric GRT network for Cisco SD-Access fabric site.

##### Step 1. In Cisco DNA Center, navigate to **Tools > Discovery**

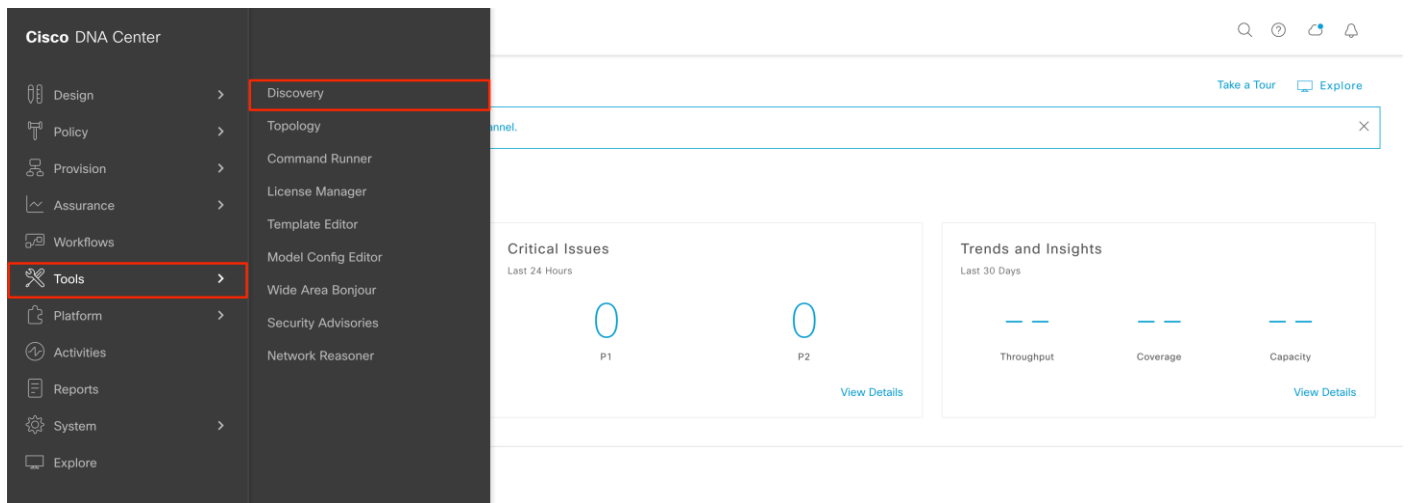

## Step 2. Click Add Discovery

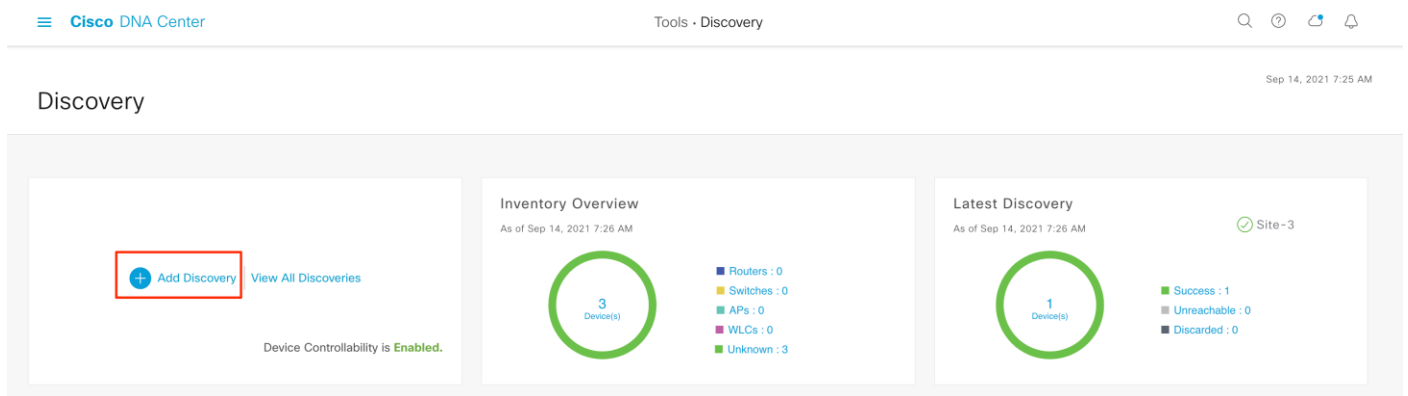

## Step 3. Input Discovery Name

Select **Discovery Type**: IP Address/Range and input IP Address of the device to be discovered

Select **Preferred Management IP Address**: Use Loopback



Under **Credentials** > select **CLI, SNMPv3, HTTP(s) Read, HTTP(s) Write, NETCONF** parameters



**Cisco DNA Center** Tools • Discovery • Add Discovery

Discovery > Add Discovery

EQ Search by Discovered Device IP

**New Discovery**

Discovery Name\*  
RTP-LAN-Devices

▼ Credentials \*

At least one CLI credential and one SNMP credential are required.  
Netconf is mandatory for enabling Wireless Services on Wireless capable devices such as C9800-Switches/Controllers.

GLOBAL Task-specific

CLI

☒ LAN\_CREDENTIALS

SNMPv2c Read

No credentials to display

SNMPv2c Write

No credentials to display

SNMPv3

☒ SNMPv3\_CREDENTIALS

HTTP(S) Read

☒ HTTPS\_READ

HTTP(S) Write

☒ HTTPS\_WRITE

NETCONF

☒ 830

[Add Credentials](#)

**Step 4.** Under Advanced > Protocol Order, select SSH, Telnet  
click **Discover**

**Cisco DNA Center** Tools • Discovery • Add Discovery

Discovery > Add Discovery

EQ Search by Discovered Device IP

**New Discovery**

Discovery Name\*  
RTP-LAN-Devices

No credentials to display

☒ SNMPv3\_CREDENTIALS

HTTP(S) Read

☒ HTTPS\_READ

HTTP(S) Write

☒ HTTPS\_WRITE

NETCONF

☒ 830

▼ Advanced

Protocol Order

☒ SSH

☒ Telnet

Device Controllability is **Enabled**. Config changes will be made on network devices during discovery/inventory or when device is associated to a site. [Learn More](#) | [Disable](#)

[Reset](#) [Discover](#)

**Step 5.** Verify the network devices are successfully discovered in Cisco DNA Center

**Cisco DNA Center** Tools · Discovery · Add Discovery

Discovery > Add Discovery

EQ Search by Discovered Device IP RTP-LAN-Devices Completed 3 Reachable Device(s) 00h:07m:18s

RTP-LAN-Devices | 3 Reachable...  
Range 10.4.200.56-10.4.200.58

Site-3 | 1 Reachable Device(s)  
Range 10.4.210.140-10.4.210.149

Site-2 | 1 Reachable Device(s)  
Range 10.4.210.135-10.4.210.135

SDA-TRANSIT-DEVICES | 3 R...  
Range 10.4.210.130-10.4.210.132

Network\_Devices | 4 Reachable...  
Range 10.4.210.123-10.4.210.126

3 Device(s)

Discovery Details

CDP Level	None	LLDP Level	None
Protocol Order	ssh telnet	Retry Count	3
Timeout	5 second(s)	IP Address/Range	10.4.200.56-10.4.200.58
IP Filter List	None	Preferred Management IP Address	Use Loopback
CLI Credentials	LAN_CREDENTIALS	SNMPv2c READ	None
SNMPv2c WRITE	None	SNMPv3	SNMPv3_CREDENTIALS
HTTP(S) READ	HTTPS_READ	HTTP(S) WRITE	HTTPS_WRITE

Filter History

IP Address	Device Name	Status	ICMP	SNMP	CLI	NETCONF
10.4.200.56	A-9300b	Success	✓	✓	✓	✓
10.4.200.57	A-9407a	Success	✓	✓	✓	✓
10.4.200.58	A-3850mc	Success	✓	✓	✓	✓

Show 25 Showing 1 to 3 of 3 Page 1 of 1

SUCCESS UNREACHABLE FAILURE NOT TRIED UNAVAILABLE

**Step 6.** Verify the network devices are in **Provision > Network Devices > Inventory > Unassigned Devices** hierarchy and devices are **Reachable** and in **Managed** state

**Cisco DNA Center** Provision · Network Devices · Inventory

Inventory Plug and Play

Global > Unassigned Devices

DEVICES (3)  
focus: Inventory

Filter Add Device Tag Device Actions Take a Tour

As of: 7:57 AM Export Refresh

Device Name	IP Address	Device Family	Reachability	Manageability	Compliance	Health Score	Site	MAC Address	Device Role	Image Version	Uptime
A-3850mc	10.4.200.58	Switches and Hubs	Reachable	Managed	Compliant	1	Assign	00:57:d2:f8:9d:80	ACCESS	16.12.3s	101 days 22 hrs
A-9300b	10.4.200.56	Switches and Hubs (WLC Capable)	Reachable	Managed	Non-Compliant	10	Assign	b4:a8:b9:c0:73:80	ACCESS	17.3.2a	101 days 22 hrs
A-9407a	10.4.200.57	Switches and Hubs (WLC Capable)	Reachable	Managed	Compliant	10	Assign	2c:5a:0f:1c:f9:40	ACCESS	17.3.2a	101 days 23 hrs

**Step 7.** Assign network devices to appropriate site.  
Select network devices from the **Unassigned Devices** list  
click **Actions > Provision > Assign Device to Site**

Cisco DNA Center Provision · Network Devices · Inventory

Inventory Plug and Play

Global > Unassigned Devices

DEVICES (3) FOCUS: Inventory

Filter Add Device Tag Device Actions Take a Tour 3 Selected As of: 7:57 AM Export Refresh

Device Name	IP Address	Device Family	Manageability	Compliance	Health Score	Site	MAC Address	Device Role	Image Version	Uptime
A-3850mc	10.4.200.58	Switches and Hubs (WLC Capable)	Managed	Compliant	10	Assign	00:57:d2:f8:9d:80	ACCESS	16.12.3s	101 days 22 hr
A-9300b	10.4.200.56	Switches and Hubs (WLC Capable)	Managed	Compliant	10	Assign	b4:a8:b9:c0:73:80	ACCESS	17.3.2a	101 days 22 hr
A-9407a	10.4.200.57	Switches and Hubs (WLC Capable)	Managed	Compliant	10	Assign	2c:5a:0f:1c:f9:40	ACCESS	17.3.2a	101 days 23 hr

Actions menu:

- Software Image
- Provision
- Telemetry
- Device Replacement
- Others
- Compliance

Provision menu:

- Assign Device to Site
- Provision Device
- LAN Automation
- LAN Automation Status
- Learn Device Config
- Configure WLC HA
- Configure WLC Mobility

Choose the site for each device in the list and select **Next**

Cisco DNA Center Provision · Network Devices · Inventory

Inventory Plug and Play

Global > Unassigned Devices (3)

DEVICES (3) FOCUS: Inventory

Filter Add Device Tag Device Actions Take a Tour

Device Name	IP Address	Device Family	Reachability
A-3850mc	10.4.200.58	Switches and Hubs	Reachable
A-9300b	10.4.200.56	Switches and Hubs (WLC Capable)	Reachable
A-9407a	10.4.200.57	Switches and Hubs (WLC Capable)	Reachable

Assign Device to Site

Serial Number	Devices	Site
FCW1949C1TX	A-3850mc	Global/North America/Region - RTP...
FCW2146L0GL	A-9300b	Global/North America/Region - RTP...
FXS2131Q3YF	A-9407a	Global/North America/Region - RTP...

Apply to All

Device Controllability is Enabled. Learn More | Disable

Cancel Next

View the parameters that gets provisioned to the device and select **Next**

Cisco DNA Center Provision · Network Devices · Inventory

Inventory Plug and Play

Global > Unassigned Devices (3)

DEVICES (3) FOCUS: Inventory

Filter Add Device Tag Device Actions Take a Tour

Device Name	IP Address	Device Family	Reachability
A-3850mc	10.4.200.58	Switches and Hubs	Reachable
A-9300b	10.4.200.56	Switches and Hubs (WLC Capable)	Reachable
A-9407a	10.4.200.57	Switches and Hubs (WLC Capable)	Reachable

Assign Device to Site

GLOBAL/NORTH AMERICA/REGION - RTP/RTP-06

A-3850mc

The following settings will be deployed during assignment to site.

Parameter	Value
Syslog Server	Cisco DNA Center
Netflow Collector	Cisco DNA Center
IP Device Tracking	Yes
Wireless Streaming Telemetry	Yes
SNMP Trap Receiver	Cisco DNA Center
AP Impersonation	Enabled
Syslog Level	6 - Information Messages
Cisco TrustSec (CTS) Credentials	Yes
Controller Certificates	Yes

Device Controllability is Enabled. Learn More | Disable

Cancel Back Next

## Click Assign

Provision · Network Devices · Inventory

Inventory Plug and Play

Find Hierarchy

Global

Unassigned Devices (3)

North America

DEVICES (3)  
FOCUS: Inventory

Filter Add Device Tag Device Actions Take a Tour

Device Name	IP Address	Device Family	Reachability
A-3850mc	10.4.200.58	Switches and Hubs	Reachable
A-9300b	10.4.200.56	Switches and Hubs (WLC Capable)	Reachable
A-9407a	10.4.200.57	Switches and Hubs (WLC Capable)	Reachable

Assign Device to Site

Now Later

Task Name\*

Assign 3 Device(s) to Site

Device Controllability is Enabled. [Learn More](#) | [Disable](#)

Cancel Back Assign

**Step 8.** Navigate to appropriate site **Hierarchy** and view the devices are assigned to the site.

Ensure the network devices are **Reachable** and in **Managed** state

Provision · Network Devices · Inventory

Inventory Plug and Play

Find Hierarchy

Global

Unassigned Devices

North America

Region - NY

Region - RTP

Region - SJC

DEVICES (9)  
FOCUS: Inventory

Filter Add Device Tag Device Actions Take a Tour

As of: 6:14 AM Export Refresh

Device Name	IP Address	Device Family	Reachability	Manageability	Compliance	Health Score	Site	MAC Address
A-3850mc	10.4.200.58	Switches and Hubs	Reachable	Managed	Compliant	8	.../Region - RTP/RTP-06	00:57:d2:f8:5
A-9300b	10.4.200.56	Switches and Hubs (WLC Capable)	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	b4:a8:b9:c0:
A-9407a	10.4.200.57	Switches and Hubs (WLC Capable)	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	2c:5a:0f:1c:f
A-9500-1	10.4.200.51	Switches and Hubs (WLC Capable)	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	00:a3:d1:44:
A-9500-2	10.4.200.52	Switches and Hubs (WLC Capable)	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	00:a3:d1:44:
A-ASR1001X-1	10.4.200.1	Routers	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	a0:3d:6f:d3:c
A-ASR1001X-2	10.4.200.2	Routers	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	00:a6:ca:e1:3
A-N7706-1.sda-lab.local	10.4.200.11	Switches and Hubs	Reachable	Managed	Non-Compliant	10	.../Region - RTP/RTP-06	8c:60:4f:ab:5


Show 25 entries

Showing 9 of 9

**Step 9.** If required, upgrade network device image.



**Figure 21. Cisco SD-WAN WAN Edge Interface Service VPN Mapping**

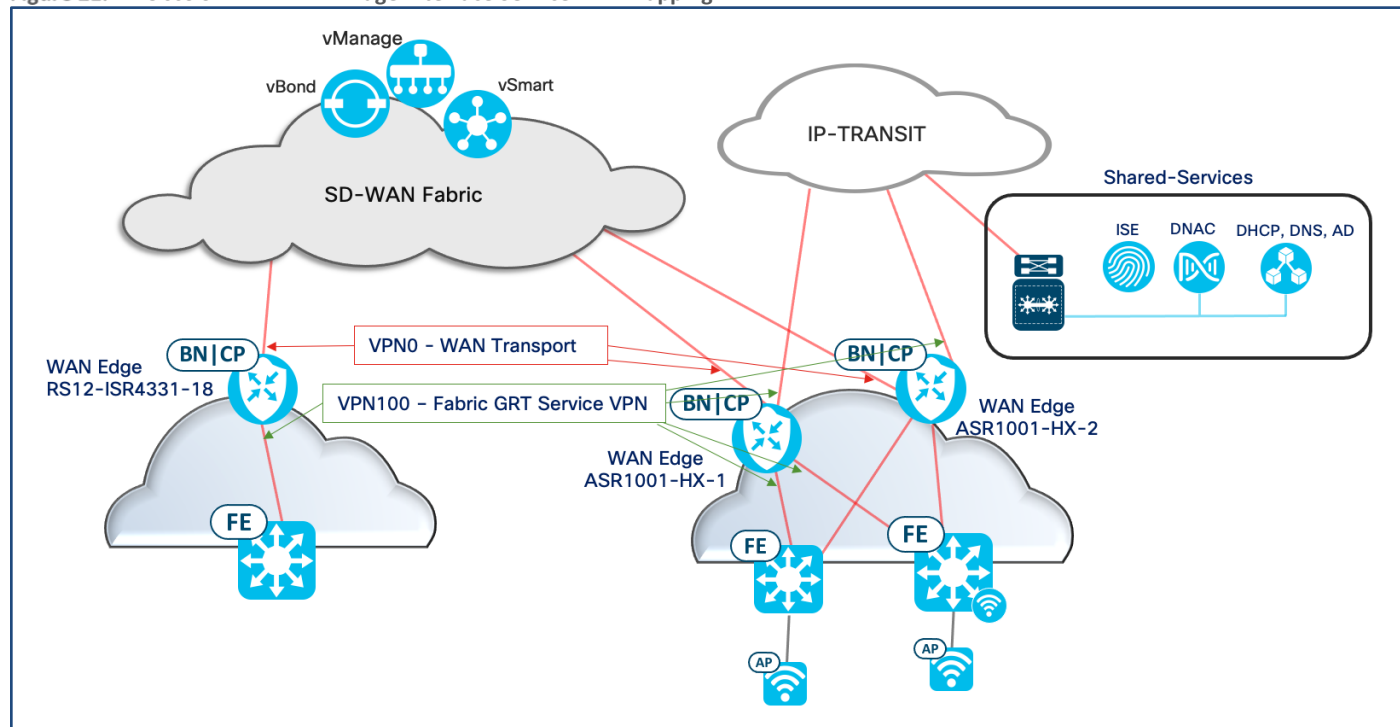

### Procedure 1. Initiate LAN Automation

This section details the procedure to configure IOS-XE WAN Edge as seed device and discover network devices with the intent to build fabric site Fabric GRT connectivity.

#### Step 1. In Cisco DNA Center, navigate to **Provision > Network Devices > Inventory**

Device Name	IP Address	Device Family	Reachability	Manageability	Compliance	Health Score	Site	MAC Address	Device Role
RS12-ISR4331-18	12.12.12.1	Unsupported Cisco Device	Unreachable	Managed Device Connectivity Failure	N/A	NA	.../Region - NY/NYC-01		CORE

#### Step 2. Click the **Hierarchy** from the left panel, select the **WAN Edge** devices from the list of devices.



Click **Actions > Provision > LAN Automation** navigate to appropriate site

The screenshot shows the Cisco DNA Center interface. On the left, the navigation pane is expanded to 'Region - NY'. In the center, a table of devices is displayed, with 'RS12-ISR4331-18' selected. The 'Actions' menu for this device is open, and the 'Provision' option is chosen, leading to a sub-menu where 'LAN Automation' is selected.

- Step 3.** In the slide-out LAN Automation page:
- Select **Primary Site**
  - Select the **Primary Device**
  - Select the **Peer Site** (if available)
  - Select the **Peer Device** (if available)
  - Under **SELECTED PORTS OF PRIMARY DEVICE**, click **Modify selections**

The screenshot displays the 'LAN Automation' configuration window. It includes a notification at the top stating 'Cisco recommends that you add the peer with the primary.' Below this, there are instructions about LAN automation and a link to the deployment guide. The 'Primary Site' is configured as 'Global/North America/Region - NY/NYC-01' and the 'Primary Device' is 'RS12-ISR4331-18'. At the bottom, the 'SELECTED PORTS OF PRIMARY DEVICE' section is empty, and the 'Modify Selections' button is highlighted.

Choose the interface(s) that connect to Fabric GRT switches at the site and click **Done**.

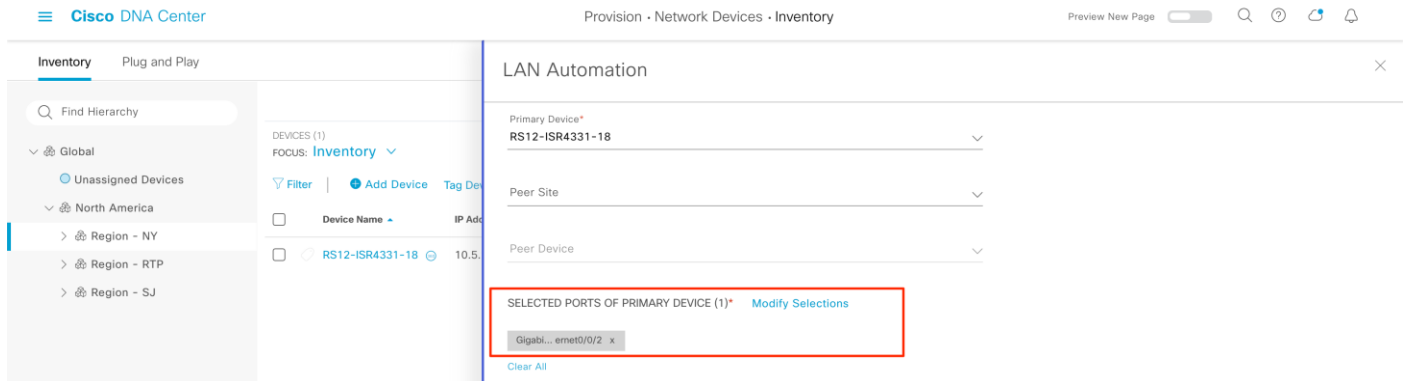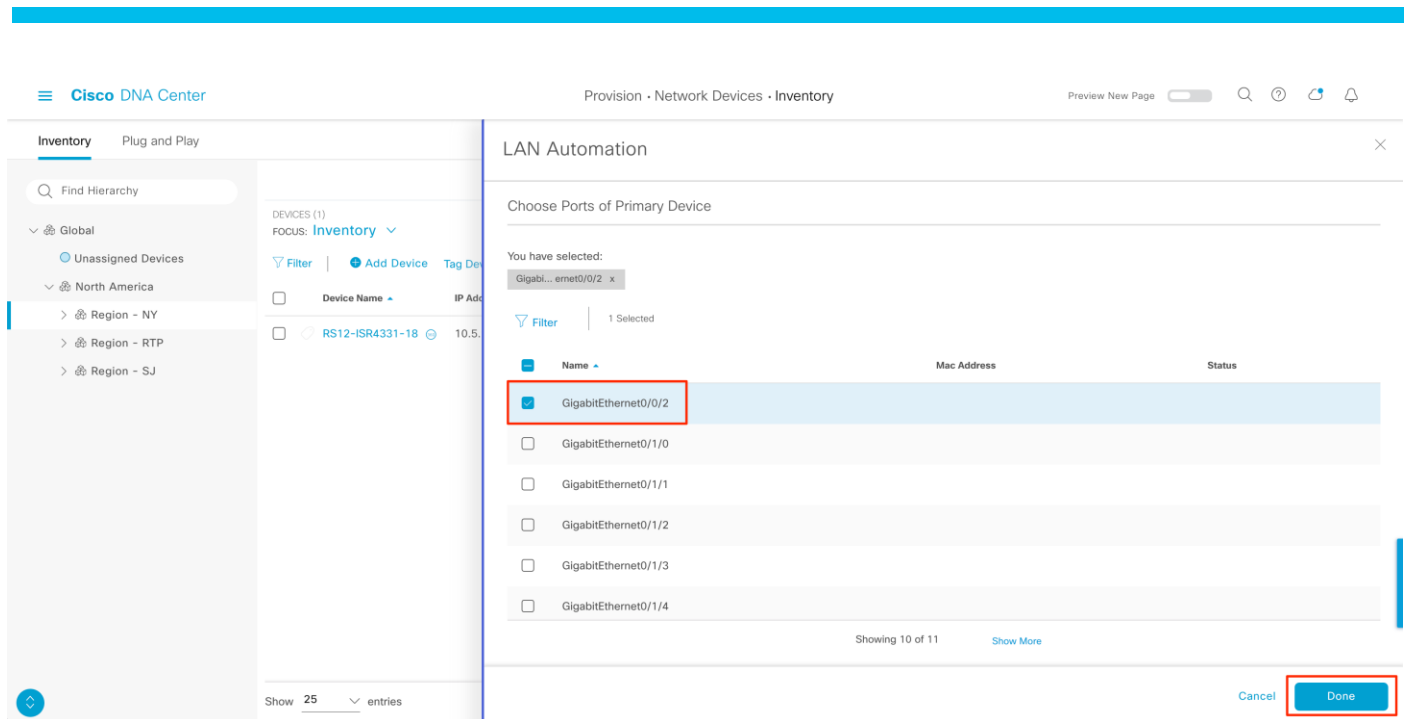

Under **Discovered Device Configuration** section,

Input **Discovered Device Site**:

Input **Main IP Pool**:

Under **Hostname Mapping**,

Input **Device Hostname Prefix**:

And click **Start**



**LAN Automation**

Discovered Device Configuration

Discovered Device Site\*  
Global/North America/Region - NY/NYC-01

Main IP Pool\*  
NY\_LAN\_AUTOMATION\_PREFIX

Link Overlapping IP Pool

IS-IS Domain Password

☐ Enable Multicast

Hostname Mapping  
Device Hostname Prefix  
NY-9300

Choose a File

No file chosen

**Step 4.** Click **Accept** on the information pop-up page

**Information**

Complete these prerequisites before starting LAN automation:

1. Devices will be upgraded automatically to the golden image selected for the site(s). You can change the golden image selection in the Image Repository.
2. All seed and discovered devices must have a Cisco DNA Advantage license. To check the installed license, use the show version command in EXEC mode.

Do you want to continue?

**Step 5.** View the LAN Automation status, navigate to **Provision > Network Devices > Inventory**.

Select **Actions > Provision > LAN Automation Status**

**Cisco DNA Center** Provision · Network Devices · Inventory

Inventory Plug and Play

Global > North America > Region - NY

DEVICES (1)  
FOCUS: Inventory

Filter Add Device Tag Device Actions Take a Tour 1 Selected As of: 2:00 PM Export Refresh

Device Name	IP Address	Reachability	Manageability	Compliance	Health Score	Site	MAC Address	Device Role
RS12-ISR4331-18	12.12.12.1	Unreachable	Managed	N/A	NA	.../Region - NY/NYC-01		CORE

Inventory

- Software Image
- Provision
- Telemetry
- Device Replacement
- Others
- Compliance

- Assign Device to Site
- Provision Device
- LAN Automation
- LAN Automation Status
- Learn Device Config
- Configure WLC HA
- Configure WLC Mobility

**LAN Automation Status**

Last updated Sep 14, 2021 6:31 AM Refresh

Summary Devices Logs

Discovered Site	NYC-01
Primary Device	RS12-ISR4331-18
Peer Device	None
Primary Device Interfaces	GigabitEthernet0/0/2
IP Pool	NY_LAN_AUTOMATION_PREFIX
Link Overlapping IP Pool	None
Multicast	Disabled
Device Prefix	NY-9300
Hostname File	None
Status	Initialized
Discovered Devices	0
Completed : 0	In Progress : 0
Error : 0	

Show 25 entries

View the LAN automation Status logs, by selecting the **Logs** tab.

Cisco DNA Center Provision · Network Devices · Inventory

Preview New Page 🔍 ⓘ 🟢 🔔

**Inventory** Plug and Play

Find Hierarchy

- Global
  - Unassigned Devices
- North America
  - Region - NY
    - NYC-01
  - Region - RTP
  - Region - SJC

DEVICES (1)  
FOCUS: **Inventory**

Filter | Add Device | Tag Device

Device Name	IP Address
RS12-ISR4331-18	10.4.227.68

**LAN Automation Status**

Summary Devices **Logs**

Last updated Sep 24, 2021 2:11 PM Refresh

Search Table

Message	Timestamp
Starting Seed Device Configuration phase.	Sep 25, 2021 02:08 PM
Reserved IP Address 10.4.227.65 for interface Loopback0 on device [redacted] role PrimarySeedDevice.	Sep 25, 2021 02:08 PM
Reserved Subnet 10.4.227.0/26 for interface BD11 on device [redacted]	Sep 25, 2021 02:08 PM
Started the Network Orchestration Session with primary device: RS12-ISR4331-18.	Sep 25, 2021 02:08 PM
Starting LAN Automation by user: admin.	Sep 25, 2021 02:08 PM

View the network devices discovered, by selecting the **Devices** tab

Cisco DNA Center Provision · Network Devices · Inventory

Preview New Page 🔍 ⓘ 🟢 🔔

**Inventory** Plug and Play

Find Hierarchy

- Global
  - Unassigned Devices
- North America
  - Region - NY
    - NYC-01
  - Region - RTP
  - Region - SJC

DEVICES (1)  
FOCUS: **Inventory**

Filter | Add Device | Tag Device

Device Name	IP Address
RS12-ISR4331-18	10.4.227.68

**LAN Automation Status**

Summary **Devices** Logs

Last updated Sep 24, 2021 2:22 PM Refresh

If the new devices aren't listed here, check the [Plug and Play](#) page for missing devices ⓘ

Search Table

Device Name	IP Address	Serial Number	Status ⓘ
NY-9300-4	10.4.227.68	[redacted]	Completed

**Step 6.** Upon network devices being discovered, stop the LAN Automation to complete the onboarding process.  
In the **LAN Automation Status > Summary** tab slide-out, click **Stop**

Cisco DNA Center

Provision · Network Devices · Inventory

Preview New Page

Q ?

Inventory

Plug and Play

Find Hierarchy

Global

Unassigned Devices

North America

Region - NY

NYC-01

Region - RTP

Region - SJC

DEVICES (1)

FOCUS: Inventory

Filter

Add Device

Tag De

Device Name

IP Add

RS12-ISR4331-18

10.4.

Show 25 entries

LAN Automation Status

Last updated Sep 24, 2021 2:24 PM

Refresh

Summary

Devices

Logs

Discovered Site

NYC-01

Primary Device

RS12-ISR4331-18

Peer Device

None

Primary Device Interfaces

GigabitEthernet0/0/2

IP Pool

NY\_LAN\_AUTOMATION\_PREFIX

Link Overlapping IP Pool

None

Multicast

Disabled

Device Prefix

NY-9300

Hostname File

None

Status

In Progress

Discovered Devices

1

Completed : 1

In Progress : 0

Error : 0

Stop

Cancel

Cisco DNA Center

Provision · Network Devices · Inventory

Preview New Page

Q ?

Inventory

Plug and Play

Find Hierarchy

Global

Unassigned Devices

North America

Region - NY

NYC-01

Region - RTP

Region - SJC

DEVICES (1)

FOCUS: Inventory

Filter

Add Device

Tag De

Device Name

IP Add

RS12-ISR4331-18

10.4.

Show 25 entries

LAN Automation Status

Last updated Sep 24, 2021 2:25 PM

Refresh

Summary

Devices

Logs

Discovered Site

NYC-01

Primary Device

RS12-ISR4331-18

Peer Device

None

Primary Device Interfaces

GigabitEthernet0/0/2

IP Pool

NY\_LAN\_AUTOMATION\_PREFIX

Link Overlapping IP Pool

None

Multicast

Disabled

Device Prefix

NY-9300

Hostname File

None

Status

STOP In Progress

Discovered Devices

1

Completed : 1

In Progress : 0

Error : 0

The screenshot shows the Cisco DNA Center interface. The breadcrumb navigation is **Provision > Network Devices > Inventory**. The left sidebar shows the hierarchy: **Global > North America > Region - NY > NYC-01**. The main content area displays the **LAN Automation Status** for a device. The status is **Completed**, and the discovered devices count is 1.

Property	Value
Discovered Site	NYC-01
Primary Device	RS12-ISR4331-18
Peer Device	None
Primary Device Interfaces	GigabitEthernet0/0/2
IP Pool	NY_LAN_AUTOMATION_PREFIX
Link Overlapping IP Pool	None
Multicast	Disabled
Device Prefix	NY-9300
Hostname File	None
Status	Completed
Discovered Devices	1

Summary: 1 Completed, 0 In Progress, 0 Error

**Step 7.** View the discovered network devices in the DNA Center Inventory.

Navigate to Cisco DNA Center, **Provision > Network Devices > Inventory**.

select the site from the **Hierarchy** and verify the devices is **Reachable** and **Managed** state.

The screenshot shows the Cisco DNA Center **Inventory** page. The breadcrumb navigation is **Provision > Network Devices > Inventory**. The left sidebar shows the hierarchy: **Global > North America > Region - NY**. The main content area displays a table of discovered devices.

Device Name	IP Address	Device Family	Reachability	Managability	Compliance	Health Score	Site	MAC Address	Device Role
NY-9300-4	10.4.227.68	Switches and Hubs (WLC Capable)	Reachable	Managed	Compliant	10	.../Region - NY/NYC-01	ac:f5:e6:5c:9a:80	ACCESS
RS12-ISR4331-18	10.4.227.65	Routers	Reachable	Managed	Compliant	10	.../Region - NY/NYC-01	00:3a:7d:81:c5:b0	BORDER ROUTER

### Tech Tip

Image Management for the discovered devices can be completed as a part of LAN Automation. This requires image to be available in Cisco DNA Center **Image Repository** and be tagged with **Golden** for the device family for the site.

The screenshot shows the Cisco DNA Center **Design > Image Repository** page. The left sidebar shows the hierarchy: **Global > North America > Region - NY > Region - RTP**. The main content area displays a table of images.

Family	Image Name	Device(s)	Version	Golden Image	Device Role	Action
Cisco Catalyst 9407R Swit...	cat9k_iosxe.17.03.04.SPA.bin Unable to verify	1	17.03.04 (Suggested, Latest) Add On (2)	★	ALL	

## Process 6: Provision Cisco SD-Access Fabric Site(s).

This section details the procedure to provision the network devices to a site, creating fabric site(s) and assigning fabric role to the devices.

## Procedure 1. Provision the network devices to a site

This section details the steps needed to provision the network devices to a site with the intent to configure network parameters such as AAA, DNS, NTP etc. defined in the Cisco DNA Center network setting.

**Step 1.** In Cisco DNA Center, navigate to **Provision > Network Devices > Inventory**.

Select the site from **Hierarchy** and network devices from the **Devices** list

Click **Actions > Provision > Provision Device**

### Tech tip

Similar network devices such as switches, routers can be grouped together and provisioned to a site together.

The screenshot shows the Cisco DNA Center interface. The breadcrumb navigation at the top is 'Provision - Network Devices - Inventory'. On the left, the hierarchy is expanded to 'Region - RTP'. The main table lists 9 devices. Three devices are selected: A-3850mc, A-9300b, and A-9407a. The 'Actions' dropdown menu is open, showing options like 'Inventory', 'Software Image', 'Provision', 'Telemetry', 'Device Replacement', 'Others', and 'Compliance'. The 'Provision' option is selected, and the 'Provision Device' sub-option is highlighted.

Device Name	IP Address	Reachability	Manageability	Compliance	Health Score	Site	MAC Address
A-3850mc	10.4.200.58	Reachable	Managed	Compliant	8	.../Region - RTP/RTP-06	00:57:d2:f8:1
A-9300b	10.4.200.56	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	b4:a8:b9:c0:1
A-9407a	10.4.200.57	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	2c:5a:0f:1c:f
A-9500-1	10.4.200.1	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	00:a3:d1:44:1
A-9500-2	10.4.200.2	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	00:a3:d1:44:2
A-ASR1001X-1	10.4.200.1	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	a0:3d:6f:d3:c
A-ASR1001X-2	10.4.200.2	Reachable	Managed	Compliant	10	.../Region - RTP/RTP-06	00:a6:ca:e1:1
A-N7706-1.sda-lab.local	10.4.200.11	Reachable	Managed	Non-Compliant	10	.../Region - RTP/RTP-06	8c:60:4f:ab:8

**Step 2.** Choose the site for each device in the list (the site auto) and select **Next**.

The screenshot shows the 'Assign Device to Site' dialog. It lists three devices: A-3850mc, A-9300b, and A-9407a. Each device is assigned to the site 'Global/North America/Region - RTP...'. The 'Apply to All' checkbox is checked. At the bottom, the 'Next' button is highlighted.

Serial Number	Devices	Site
FCW1949C1TX	A-3850mc	Global/North America/Region - RTP...
FCW2146LOGL	A-9300b	Global/North America/Region - RTP...
FXS2131Q3YF	A-9407a	Global/North America/Region - RTP...

## Click Next

Cisco DNA Center

Provision · Network Devices · Inventory · Provision Devices



Inventory > Provision Devices

1 Assign Site 2 Advanced Configuration 3 Summary

### Devices

Select devices to fill out provisioning parameters

Find Show  
EQ Device All

#### Devices having No Templates

A-3850mc  
A-9300b  
A-9407a



### No Devices Selected

Select a device or template from "Devices" panel. Shift + click to select multiple devices under a template, or single click to select one at a time.

Cancel

Next

## View the parameters that gets provisioned on the device and select **Deploy**

Cisco DNA Center

Provision · Network Devices · Inventory · Provision Devices



Inventory > Provision Devices

1 Assign Site 2 Advanced Configuration 3 Summary

A-3850mc  
A-9300b  
A-9407a

#### Device Details

Device Name:	A-3850mc
Platform Id:	WS-C3850-24XU-E
Device IP:	10.4.200.58
Device Location:	Global/North America/Region - RTP/RTP-06

#### Network Settings

NTP Server:	10.4.249.102
AAA Network ISE Server	10.4.250.225
AAA Network Primary Server:	10.4.250.225
AAA Network Secondary Server:	10.4.250.226
AAA Client ISE Server	10.4.250.225
AAA Client Primary Server:	10.4.250.225
AAA Client Secondary Server:	10.4.250.226
WARNING: Do not use "admin" as the username for your device CLI credentials, if you are using ISE as your AAA server. If you do, this can result in you not being able to login to your devices.	
DHCP Server:	10.4.249.102
DNS Domain Name:	sda-lab.local
DNS Primary Server:	10.4.249.102
Syslog Server	Cisco DNA Center
Netflow Collector	(Not configured)

Cancel

Deploy

Under **Provision Device** slide-out page, select **Now** option and **Deploy**

**Cisco DNA Center** Provision · Network Devices · Inventory · Provision Devices

Inventory > Provision Devices

1 Assign Site 2 Advanced Configuration 3 Summary

NTP Server:	10.4.249.102
AAA Network ISE Server	10.4.250.225
AAA Network Primary Server:	10.4.250.225
AAA Network Secondary Server:	10.4.250.226
AAA Client ISE Server	10.4.250.225
AAA Client Primary Server:	10.4.250.225
AAA Client Secondary Server:	10.4.250.226

WARNING: Do not use "admin" as the username for your device CLI or being able to login to your devices.

DHCP Server: 10.4.249.102

DNS Domain Name: sda-lab.local

**Provision Device**

☒ Now  
☐ Later  
☐ Generate configuration preview  
Creates preview which can be later used to deploy on selected devices. If Site assignment is invoked during configuration preview, Device controllability configuration will be pushed to corresponding device(s).

Task Name\*

**Provision Device**

Cancel Apply

**Step 3.** View the status of the Provision task by navigating to **Cisco DNA Center > Activities > Tasks**

**Cisco DNA Center** Activities · Tasks

Audit Logs Tasks Work Items

FILTERS: TYPE All STATUS All Upcoming In Progress Success Failed

Last updated: 9:30:58 AM Refresh

1 PROVISION	Provision Device Hostname: A-9407a	Starts: Sep 15, 2021 9:21 AM   Status: Success
1 PROVISION	Provision Device Hostname: A-9300b	Starts: Sep 15, 2021 9:21 AM   Status: Success
1 PROVISION	Provision Device Hostname: A-3850mc	Starts: Sep 15, 2021 9:21 AM   Status: Success

**Step 4.** Repeat the steps in this [Procedure](#) to provision other network devices to a site, including the IOS-XE SD-WAN WAN Edge devices .



Cisco DNA Center

Activities - Tasks

Audit Logs

Tasks

Work Items

FILTERS:

TYPE

All

STATUS

All

Upcoming

In Progress

Success

Failed

Last updated: 9:36:51 AM

Refresh

PROVISION

Provision Device

Hostname: A-ASR1001X-2

Starts: Sep 15, 2021 9:35 AM

Status: Success

PROVISION

Provision Device

Hostname: A-ASR1001X-1

Starts: Sep 15, 2021 9:35 AM

Status: Success

PROVISION

Provision Device

Hostname: A-9407a

Starts: Sep 15, 2021 9:21 AM

Status: Success

PROVISION

Provision Device

Hostname: A-9300b

Starts: Sep 15, 2021 9:21 AM

Status: Success

PROVISION

Provision Device

Hostname: A-3850mc

Starts: Sep 15, 2021 9:21 AM

Status: Success

Showing 12 of 12

## Procedure 2. (Optional) Provision IP-Transit Network

This section details the steps needed to create an IP-Transit network. This is needed only when the WAN Edge devices part of site has connectivity to shared services network through the IP network.

Skip this Procedure at remote sites, that requires connectivity to SD-WAN Transit only.

**Step 1.** In Cisco DNA Center, navigate to **Provision > Fabric**

Cisco DNA Center

Design

Policy

Provision

Assurance

Workflows

Tools

Platform

Activities

Reports

System

Explore

NETWORK DEVICES

Inventory

Plug and Play

SERVICES

Service Catalog

Cisco User Defined Network

Application Visibility

Stealthwatch Security Analytics

App Hosting for Switches

IoT Services

Umbrella

Site to Site VPN

Cloud

Take a Tour

Explore

Critical Issues

Last 24 Hours

P1

P2

View Details

Trends and Insights

Last 30 Days

Throughput

Coverage

Capacity

View Details

**Step 2.** Create IP-Transit

Click **Add Fabric or Transit/Peer Network** and Select **Transit/Peer Network** from the drop-down option

Cisco DNA Center

Provision - Fabric

## SD-Access Fabrics and Transit/Peer Networks

Choose a Fabric or Transit/Peer Network below to manage, or add a new item by clicking 'Add Fabric or Transit/Peer Network'.

Fabrics ⓘ

Default LAN Fabric

0 Site , 0 Fabric Device  
0 Control Plane , 0 Border

Transit/Peer Networks ⓘ

SDWAN 10.4.246.11

Transit: SDWAN

+ Add Fabric or Transit/Peer Network

Fabric

Transit/Peer Network

Tech Tip

Transit: SDWAN is created on successful integration between Cisco DNA Center and SD-WAN vManage controller.

Under, **Transit/Peer Network** slide out page:

Input **Transit/Peer Network Name**

Select **Transit/Peer Network Type: IP-Based**

Select **Routing Protocol: BGP**

Input **Autonomous System Number (ASN)**: peer network BGP AS number

Click **Save**

Cisco DNA Center
Provision - Fabric

## SD-Access Fabrics and Transit/Peer Networks

Choose a Fabric or Transit/Peer Network below to manage, or add a new item by clicking 'Add Fabric or Transit/Peer Network'.

### Fabrics

Default LAN Fabric
0 Site , 0 Fabric Device  
0 Control Plane , 0 Border

### Transit/Peer Networks

SDWAN 10.4.246.11
Transit: SDWAN

### Transit/Peer Network

To enable interconnectivity between Fabric sites, select Transit Control Plane and connectivity type.

Transit/Peer Network Name

IP-TRANSIT

Transit/Peer Network Type

☐ SD-Access
☒ IP-Based

Routing Protocol

BGP

Autonomous System Number(ASN)

64513

Cancel Save

Cisco DNA Center
Provision - Fabric

## SD-Access Fabrics and Transit/Peer Networks

Choose a Fabric or Transit/Peer Network below to manage, or add a new item by clicking 'Add Fabric or Transit/Peer Network'.

### Fabrics

Default LAN Fabric
0 Site , 0 Fabric Device  
0 Control Plane , 0 Border

### Transit/Peer Networks

IP-TRANSIT
Transit: IP


SDWAN 10.4.246.11
Transit: SDWAN

Add Fabric or Transit/Peer Network


### Procedure 3. Provision Fabric – Create Fabric Site

This section details the steps needed to create a Fabric site. The SD-Access fabric site is provisioned with IOS-XE WAN Edge device as colocated Fabric Border, Control Plane roles and connected SD-WAN Transit and IP-Transit. The access switches are associated with Fabric Edge role.

- Step 1.** In Cisco DNA Center, navigate to **Provision > Fabric**
- Create SD-Access fabric site, click **Add Fabric or Transit/Peer Network**
- Select **Fabric** from the options

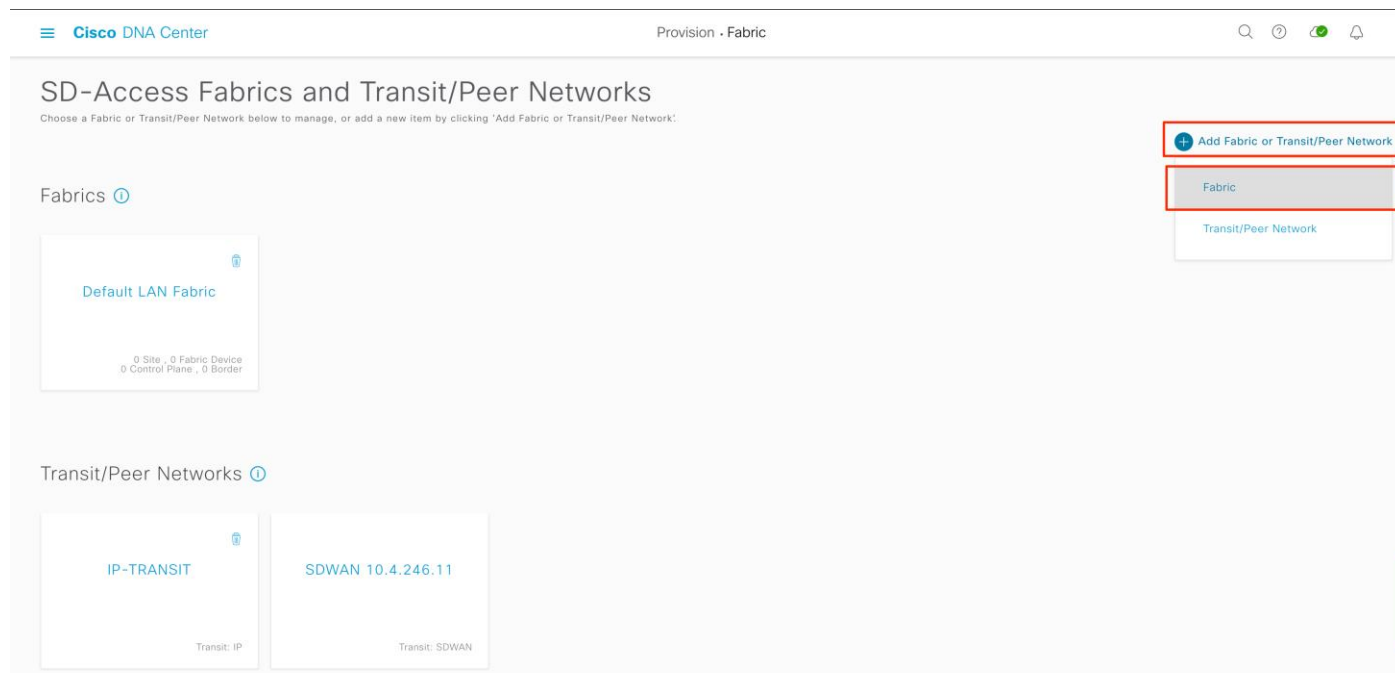

- Step 2.** Input **Fabric Name** and **location** by selecting the site from the hierarchy.
- And click **Next**

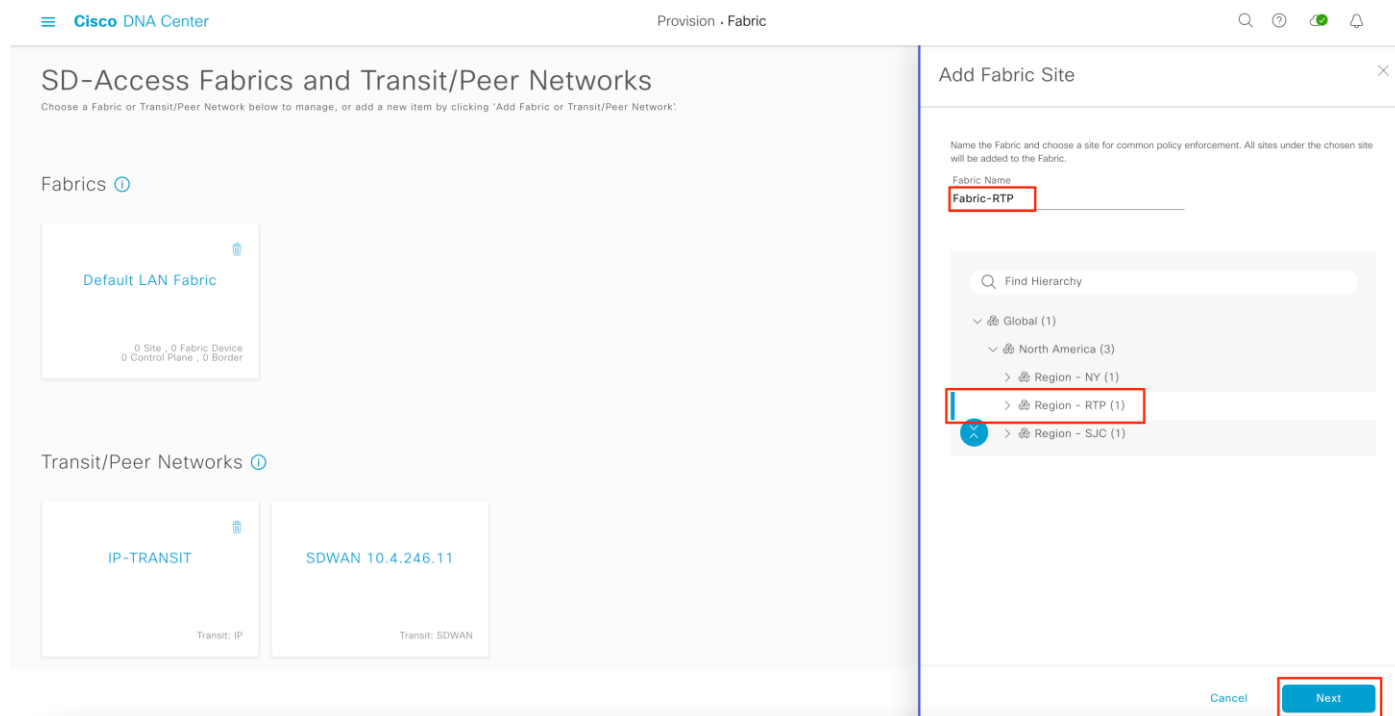

- Step 3.** Select all the **Virtual Network** from the list that needs to be provisioned at the site.

Click **Add**

The screenshot shows the Cisco DNA Center interface for provisioning a fabric. The main page is titled 'SD-Access Fabrics and Transit/Peer Networks' and includes sections for 'Fabrics' and 'Transit/Peer Networks'. A modal window titled 'Add Fabric Site' is open on the right. This modal shows a list of selected virtual networks: INFRA\_VN, VN\_CAMPUS, VN\_GUEST, and VN\_IOT. The 'Add' button at the bottom right of the modal is highlighted with a red box.

**Step 4.** Click on the fabric site '**Fabric-RTP**' card and select the site from the list

The screenshot shows the same Cisco DNA Center interface, but now the 'Fabric-RTP' card is visible in the 'Fabrics' section and is highlighted with a red box. The 'Add Fabric or Transit/Peer Network' button is visible in the top right corner of the main content area.

Cisco DNA Center

Fabric Sites

Find Hierarchy

Fabric-RTP

North America

Region - RTP

All Fabrics > Fabric-RTP

Fabric-RTP

EQ Find

Device	Fabric Site	IP Address	Fabric Role	Connected Transit/Peer Network
--	Global/North America/Region - RTP	--	--	--

Showing 1 - 1 of 1

Cisco DNA Center

Fabric Sites

Find Hierarchy

Fabric-RTP

North America

Region - RTP

All Fabrics > Region - RTP

Fabric-RTP

EQ Find by device IP, type, role, family & MAC

Fabric Infrastructure

Host Onboarding

Show Task Status

Three (3) Information Alerts on this page. Expand to see detail.

The Internet

A-ASR1001X-2

A-ASR1001X-1

A-N7706-2.sda-lab.local

A-N7706-1.sda-lab.local

A-9500-1

A-9500-2

A-3850mc.sda-lab.local

A-9407a.sda-lab.local

A-9300b.sda-lab.local

Cancel


Deploy

**Step 5.** Assign IOS-XE WAN Edge devices with Control Plane role.

Under **Fabric Infrastructure**, click the WAN Edge device and enable **Control Plane** functionality


© 2021 Cisco and/or its affiliates. All rights reserved.

Page 98 of 148

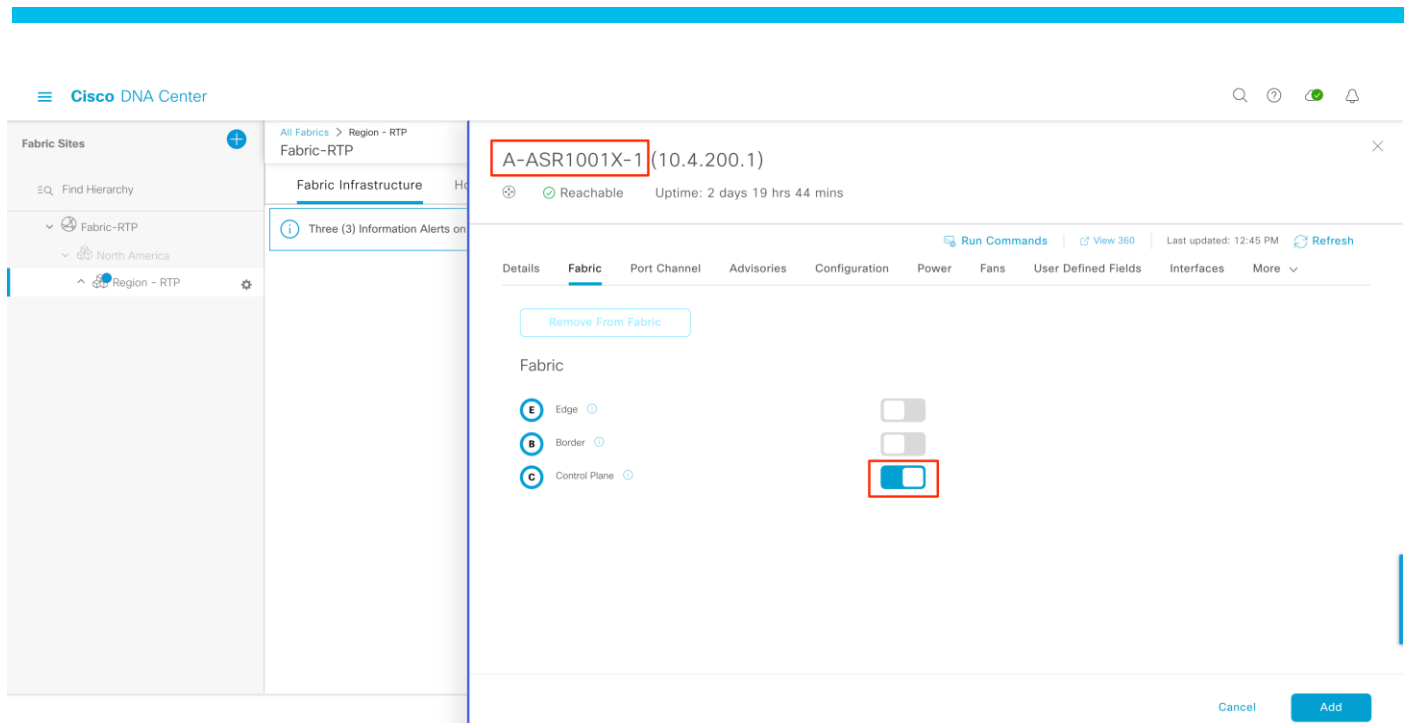


## Step 6. Assign IOS-XE WAN Edge devices with **Border** functionality

Enable the **Border** role to the device

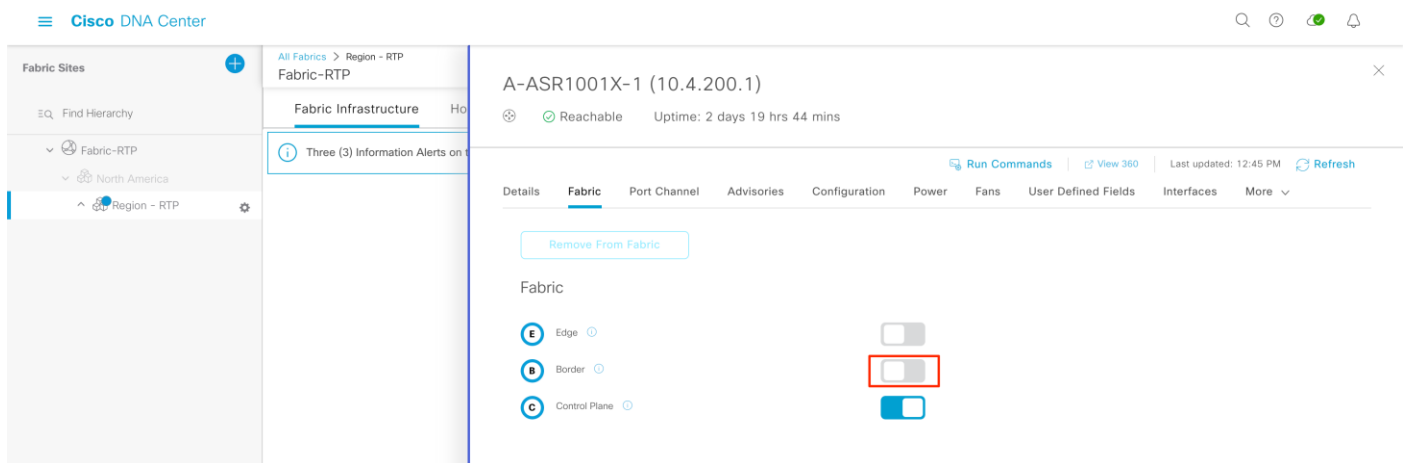


**Transit: SDWAN** is auto assigned to the IOS-XE WAN Edge device when selected as Border.

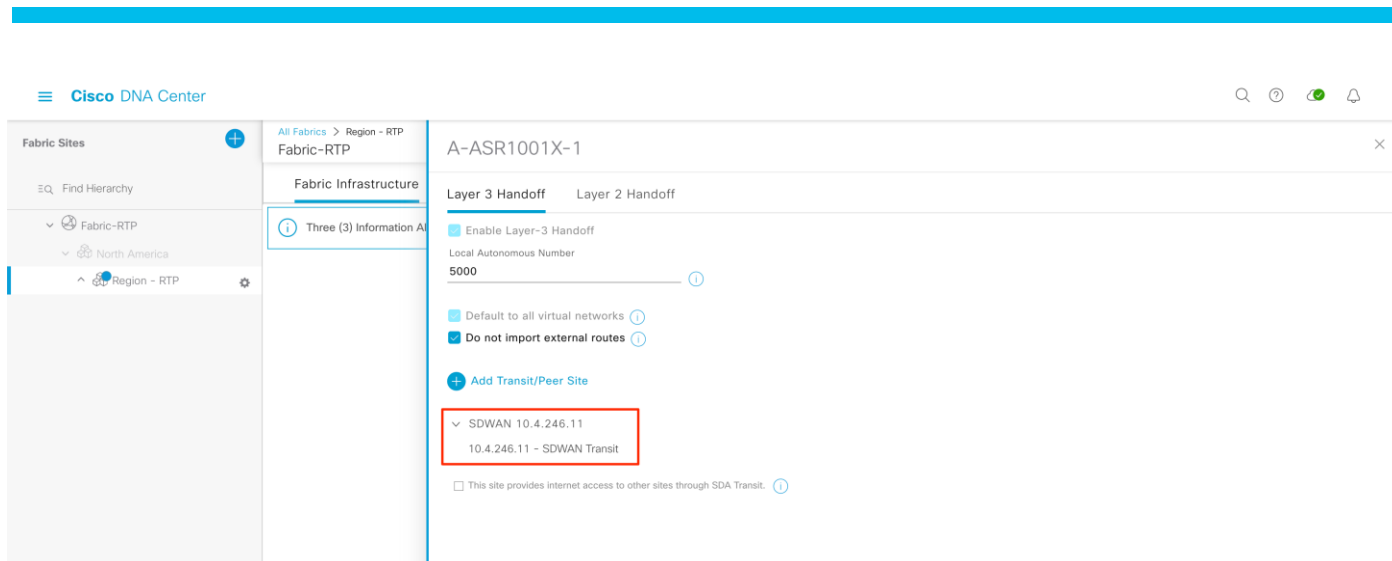

### Tech tip


By default, Cisco SD-Access workflow chooses **External Border** as the Border type. For fabric sites that has connectivity to SDWAN Transit, leverage the default border type on the WAN Edge device.

WAN Edge learns routes to the rest of the network through SD-WAN infrastructure and for fabric site the WAN Edge device is the gateway of last resort implemented using LISP Proxy Tunnel Router (PxTR) functionality on fabric edge nodes.

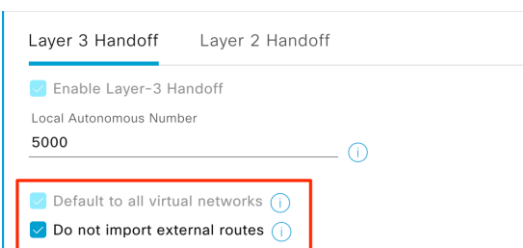


**Step 7.** For sites that requires IP-Transit to be associated to site.

Click **Layer 3 Handoff** > **Add Transit/Peer Site** and select previously created **IP-Transit** network.

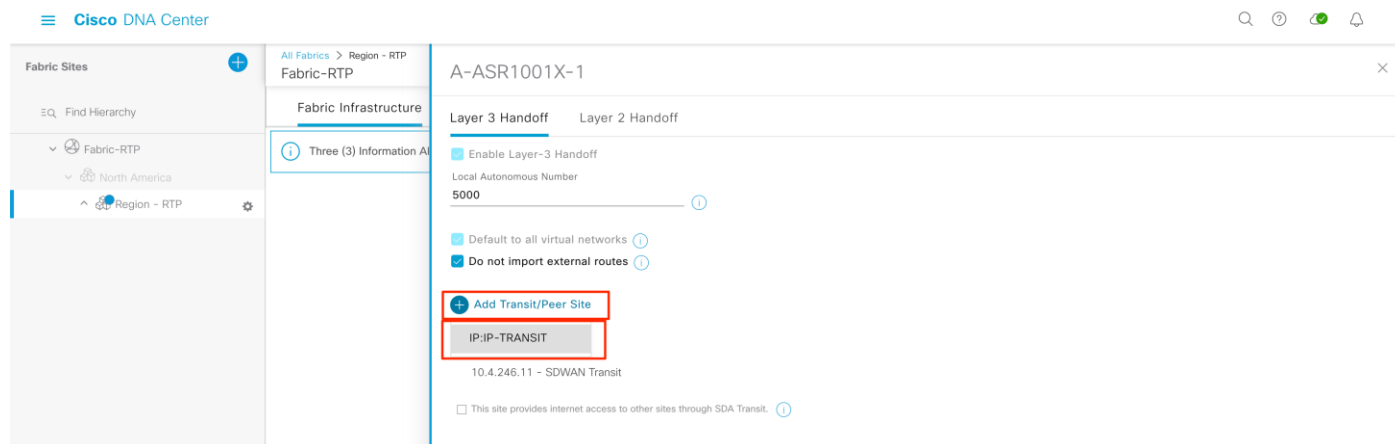

Under the selected **IP-Transit**, select the ports that connected to the peer device by clicking the **Add External Interface**




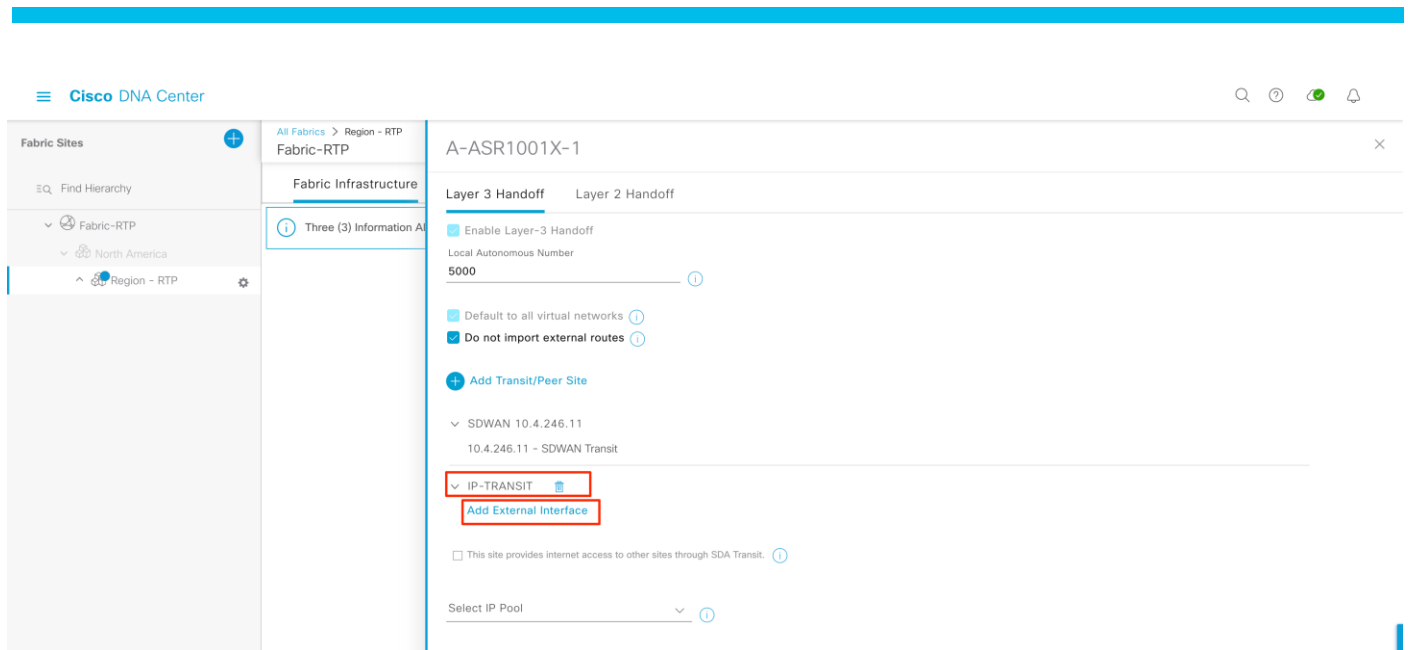

Select interface in the **External Interface** drop-down option

Select all the **Virtual Networks** that require IP-Transit handoff and assign a **vlan** number.

And click **Save**

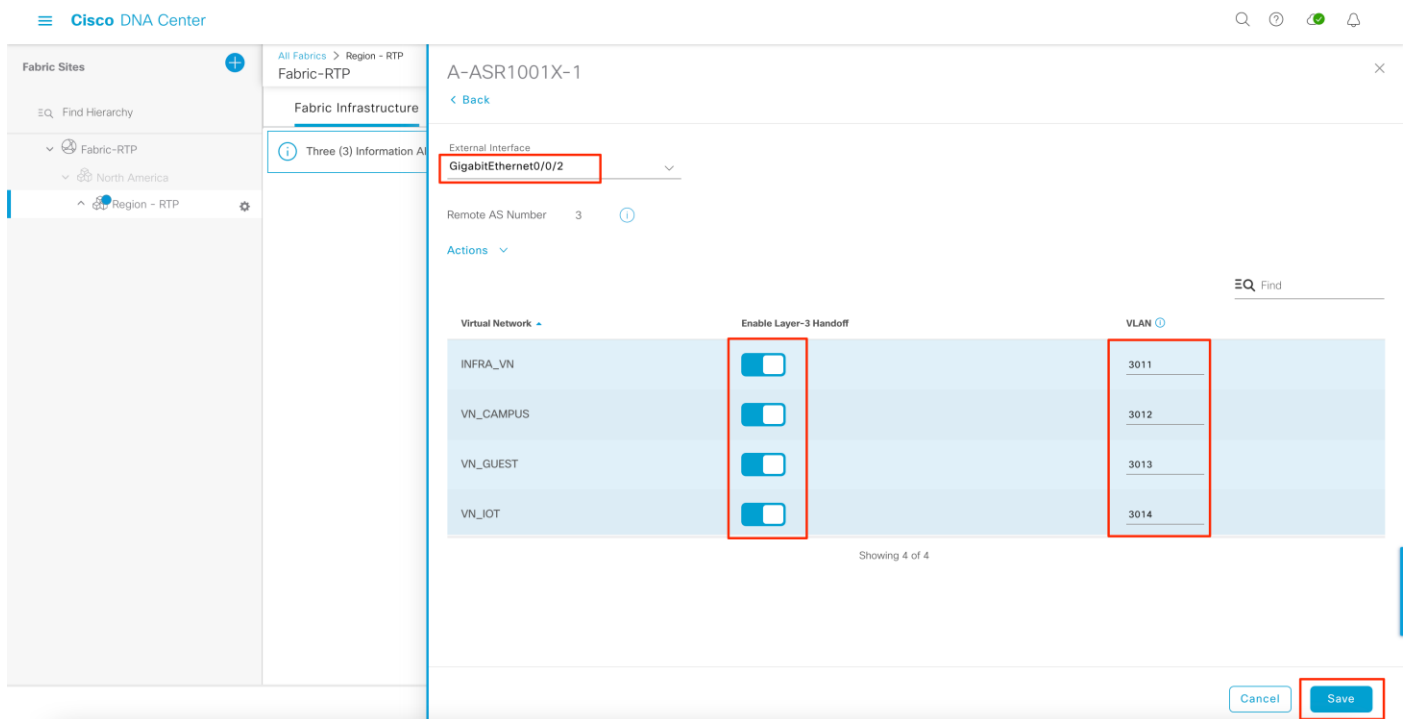

Under **Select IP Pool**, select the Border Handoff Pool

And click **Add**

**Cisco DNA Center**

Fabric Sites

Find Hierarchy

Fabric-RTP

North America

Region - RTP

All Fabrics > Region - RTP

Fabric-RTP

Fabric Infrastructure

Three (3) Information Alerts

A-ASR1001X-1

Layer 3 Handoff Layer 2 Handoff

External Interface

Interface

Number of VN(s)

Interface	Number of VN(s)
GigabitEthernet0/0/2	4

Showing 1 of 1

☐ This site provides internet access to other sites through SDA Transit.

Select IP Pool

RTP\_BORDER\_L3Handoff (10.4.218....)

Cancel Add

**Step 8.** Click **Add** to add Border and Control Plane role to the device

**Cisco DNA Center**

Fabric Sites

Find Hierarchy

Fabric-RTP

North America

Region - RTP

All Fabrics > Region - RTP

Fabric-RTP

Fabric Infrastructure

Three (3) Information Alerts on t

A-ASR1001X-1 (10.4.200.1)

Reachable Uptime: 3 days 1 hr 10 mins

Run Commands View 360 Last updated: 6:11 PM Refresh

Details Fabric Port Channel Advisories Configuration Power Fans User Defined Fields Interfaces More

Remove From Fabric

Fabric

Border Configure Details

Control Plane

Capability

Rendezvous Point Disabled

Cancel Add

**Step 9.** Click **Deploy**

**Cisco DNA Center**

Find Hierarchy

- Fabric-RTP
  - North America
    - Region - RTP

All Fabrics > Region - RTP  
Fabric-RTP

EQ Find by device IP, type, role, family & MAC

Fabric Infrastructure Host Onboarding

Three (3) Information Alerts on this page. Expand to see detail.

Collapse All Custom View Sep 15, 2021 12:45 PM

Cancel Deploy

In the **Modify Fabric** slide out page, select **Schedule Operation: Now** and click **Apply**

**Cisco DNA Center**

Find Hierarchy

- Fabric-RTP
  - North America
    - Region - RTP

All Fabrics > Region - RTP  
Fabric-RTP

EQ Find by device IP, type, role, family & MAC

Fabric Infrastructure Host Onboarding

Three (3) Information Alerts on this page. Expand to see detail.

Modify Fabric

1 Device(s)

This operation impacts all devices in the Fabric site.

Schedule Operation:

- ☒ Now
- ☐ Later
- ☐ Generate configuration preview

Task Name\*

Modifying Fabric at Region - RTP

Cancel Apply

**Step 10.** View the status of the provision task by clicking the **Show Task Status**

**Cisco DNA Center**

Find by device IP, type, role, family & MAC

**Fabric Sites**

- Fabric-RTMP
- North America
- Region - RTP

**All Fabrics > Region - RTP**

**Fabric-RTMP**

**Fabric Infrastructure** Host Onboarding Show Task Status

Three (3) Information Alerts on this page. [Expand](#) to see detail.

[Collapse All](#) [Custom View](#) Sep 15, 2021 6:15 PM

The Internet

**Cisco DNA Center**

Find by device IP, type, role, family & MAC

**Fabric Sites**

- Fabric-RTMP
- North America
- Region - RTP

**All Fabrics > Region - RTP**

**Fabric-RTMP**

**Fabric Infrastructure** Host Onboarding

Task Monitor

Last Updated Sep 14, 2021 6:31 PM [Refresh](#)

[Filter](#)

Three (3) Information Alerts on this page. [Expand](#) to see detail.

**Modifying Fabric at Region - RTP** DEPLOYED

- Task Id: 56f87cc9-05b2-4a80-9324-c2811cf82564
- Start Time: Sep 15, 2021 06:29 PM
- End Time: Sep 15, 2021 06:30 PM

[Device Details](#) [Provision Details](#)

**Modifying Fabric at Region - RTP** DEPLOYED

- Task Id: 16eb6297-7da1-48fa-b6a3-dfb84878a3c
- Start Time: Sep 15, 2021 06:15 PM
- End Time: Sep 15, 2021 06:16 PM

[Device Details](#) [Provision Details](#)

**Step 11.** Repeat [step 5](#) through step 10 to add any additional IOS-XE WAN Edge device at the site with Fabric Border and Control Plane functionality.

**Cisco DNA Center**

Find by device IP, type, role, family & MAC

**Fabric Sites**

- Fabric-RTMP
- North America
- Region - RTP

**All Fabrics > Region - RTP**

**Fabric-RTMP**

**Fabric Infrastructure** Host Onboarding Show Task Status

Three (3) Information Alerts on this page. [Expand](#) to see detail.

[Collapse All](#) [Custom View](#) Sep 15, 2021 6:15 PM

The Internet

A-ASR1001X-2 A-ASR1001X-1

## Tech tip

Cisco DNA Center automates the fabric border configuration with IP-based Layer 3 handoff. The IP Transit workflow provisions the fabric border with sub-interfaces for each VN extending the overlay segmentation to the peer-device, external-BGP neighborhood is established to advertise prefixes from the fabric site and receive shared-services subnets from the peer-device. The peer-device, also commonly known as fusion device, takes care of route-leaking between the extended overlay fabric site subnets and the global routing table containing the shared-service subnets. Please refer to [Software-Defined Access Medium and Larger Site Fabric Provisioning](#) guide on procedure to configure the peer-device.

It is also important to connect the two fabric site border nodes and configure internal-BGP session for each VN. This is needed for any Transit being deployed, either IP-Transit or SD-WAN transit, on the fabric Border Node. This would ensure the SD-Access LAN segment traffic is forwarded to other border in the case of uplink failures to both the WAN transport or to the peer device.

## Step 12. Assign fabric Edge role to network devices

Click on the network device in the **Fabric Infrastructure** tab and select **Edge** role

Click **Add**

The screenshot shows the Cisco DNA Center interface. On the left, the 'Fabric Sites' sidebar is visible with a search bar and a tree view showing 'Region - RTP' and 'Fabric-RTP'. The main panel is titled 'Fabric Infrastructure' and shows a list of network devices. One device, 'A-9300b.sda-lab.local (10.4.200.56)', is highlighted with a red box. Below the device name, there are tabs for 'Details', 'Fabric', 'Port Channel', 'Advisories', 'Configuration', 'VLANs', 'Power', 'Fans', 'User Defined Fields', 'Interfaces', and 'More'. The 'Fabric' tab is selected, and it shows a 'Remove From Fabric' button and a list of roles: 'Edge', 'Border', and 'Control Plane'. The 'Edge' role is selected with a red box around its toggle switch. Below the roles, there is a 'Capability' section with 'Embedded Wireless' and 'Rendezvous Point'. The 'Embedded Wireless' toggle is also selected with a red box. At the bottom right, there are 'Cancel' and 'Add' buttons, with the 'Add' button highlighted by a red box.

Repeat this step on other network devices that need to be provisioned with fabric **Edge** role

And click **Deploy**

**Cisco DNA Center**

Find Hierarchy

- Fabric-RTP
  - North America
    - Region - RTP

All Fabrics > Region - RTP  
Fabric-RTP

Find by device IP, type, role, family & MAC

Fabric Infrastructure Host Onboarding

Three (3) Information Alerts on this page. [Expand](#) to see detail.

Collapse All Custom View Sep 15, 2021 6:33 PM

Cancel Deploy

In the **Modify Fabric** slide out page, select **Schedule Operation: Now** and click **Apply**

**Cisco DNA Center**

Find Hierarchy

- Fabric-RTP
  - North America
    - Region - RTP

All Fabrics > Region - RTP  
Fabric-RTP

Find by device IP, type, role, family & MAC

Fabric Infrastructure Host Onboarding

Collapse All Custom View Sep 15, 2021 6:33 PM

Cancel Deploy

#### Tech Tip

The Cisco SD-Access solution supports integration of wireless controller at each fabric site. The wireless controller can be either dedicated Wireless LAN Controller or Cisco Catalyst 9800 Embedded Wireless on Catalyst 9000 Series switch.

The Access Points (APs) within the fabric site need to establish a CAPWAP tunnel to WLC Management IP Address. APs associated in INFRA\_VN must have IP reachability to the Management IP Address via the Global Routing Table within the fabric site. The WLC IP Address

reachability on the fabric edge node(s) must be through a more specific route and not through a default route. The management IP address of WLCs connect to or through the WAN Edge routers should be present in the Fabric GRT Service VPN.

Refer to [Cisco SD-Access Design Guide](#) and [Cisco SD-Access Wireless Design and Deployment Guide](#) for supported platform and detailed steps to implement fabric Wireless.

**Step 13.** Create additional **Fabric Sites** as necessary, with each fabric site connected to either **SDWAN Transit** or **IP-Transit** or **both**.


The screenshot displays the 'SD-Access Fabrics and Transit/Peer Networks' interface in Cisco DNA Center. The top navigation bar includes 'Cisco DNA Center' and 'Provision - Fabric'. The main heading is 'SD-Access Fabrics and Transit/Peer Networks' with a subtext: 'Choose a Fabric or Transit/Peer Network below to manage, or add a new item by clicking 'Add Fabric or Transit/Peer Network'.' A button labeled 'Add Fabric or Transit/Peer Network' is in the top right. Under the 'Fabrics' section, three cards are shown: 'Default LAN Fabric' (0 Site, 0 Fabric Device, 0 Control Plane, 0 Border), 'Fabric-NY' (1 Site, 2 Fabric Devices, 1 Control Plane, 1 Border), and 'Fabric-RTP' (1 Site, 5 Fabric Devices, 2 Control Planes, 2 Borders). Under the 'Transit/Peer Networks' section, two cards are shown: 'IP-TRANSIT' (Transit: IP) and 'SDWAN 10.4.246.11' (Transit: SDWAN).

The screenshot shows the 'Fabric Sites' page in Cisco DNA Center. The left sidebar has a search bar 'Find Hierarchy' and a tree view showing 'Fabric-NY' expanded, with 'North America' and 'Region - NY' listed. The main content area has tabs for 'Fabric Infrastructure' and 'Host Onboarding'. A network diagram is displayed, showing 'The Internet' connected to a 'CIB' (RS12-ISR4331-18) router, which is connected to a 'NY-9300-1.sda-lab.local' switch. A search bar at the top right contains 'Find by device IP, type, role, family & MAC'. A 'Show Task Status' link is also present. At the bottom right, there are 'Cancel' and 'Deploy' buttons.

#### Procedure 4. Provision Fabric – Configure Host Onboarding


This section details the steps needed to select default Authentication Template for the site, associate IP Address pools to Virtual Networks and Wireless SSIDs and optionally configure Ports.

**Step 1.** In Cisco DNA Center, navigate to **Provision > Fabric**, select a **Fabric Site**.

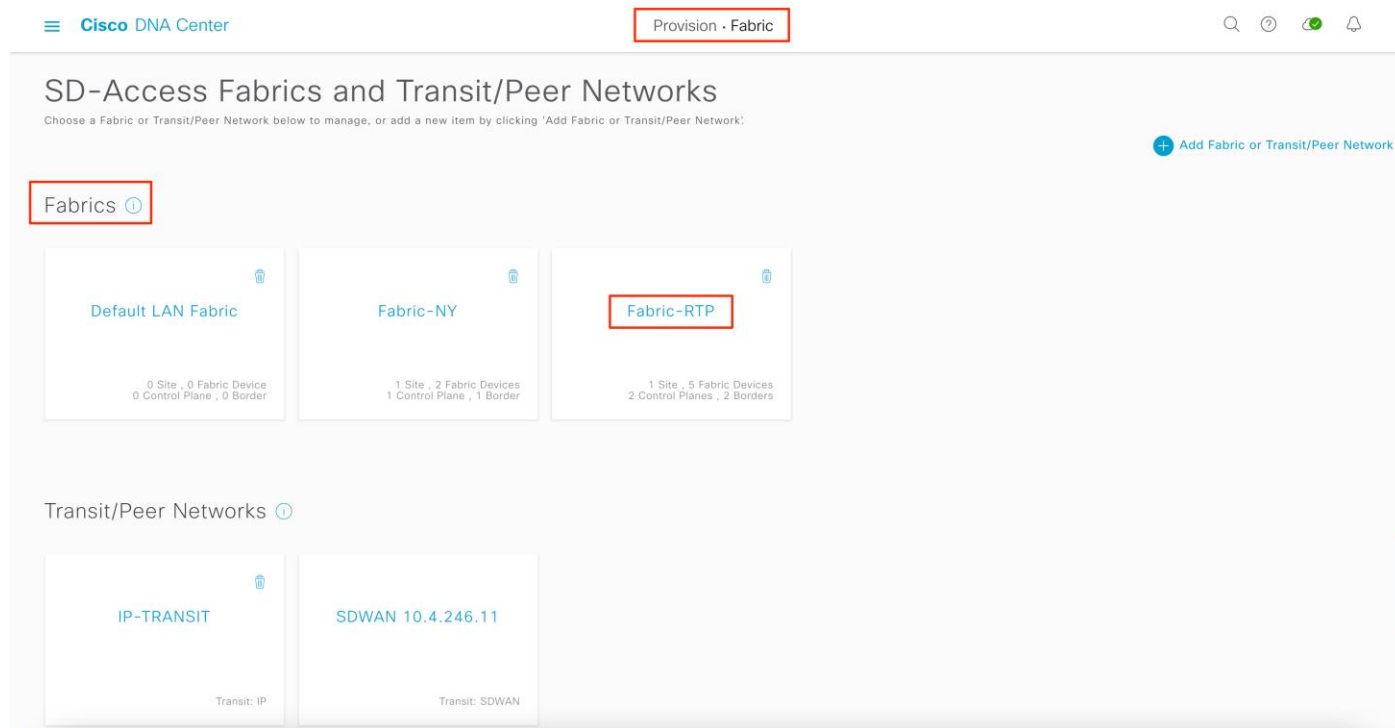

The screenshot shows the Cisco DNA Center interface. At the top, the breadcrumb navigation is "Provision > Fabric". The main heading is "SD-Access Fabrics and Transit/Peer Networks". Below this, there are two tabs: "Fabrics" (selected) and "Transit/Peer Networks". Under the "Fabrics" tab, there are three cards: "Default LAN Fabric", "Fabric-NY", and "Fabric-RTP". The "Fabric-RTP" card is highlighted with a red box. Below the "Fabrics" tab, there are two cards under the "Transit/Peer Networks" section: "IP-TRANSIT" and "SDWAN 10.4.246.11".

**Step 2.** Select the site from the **Hierarchy**

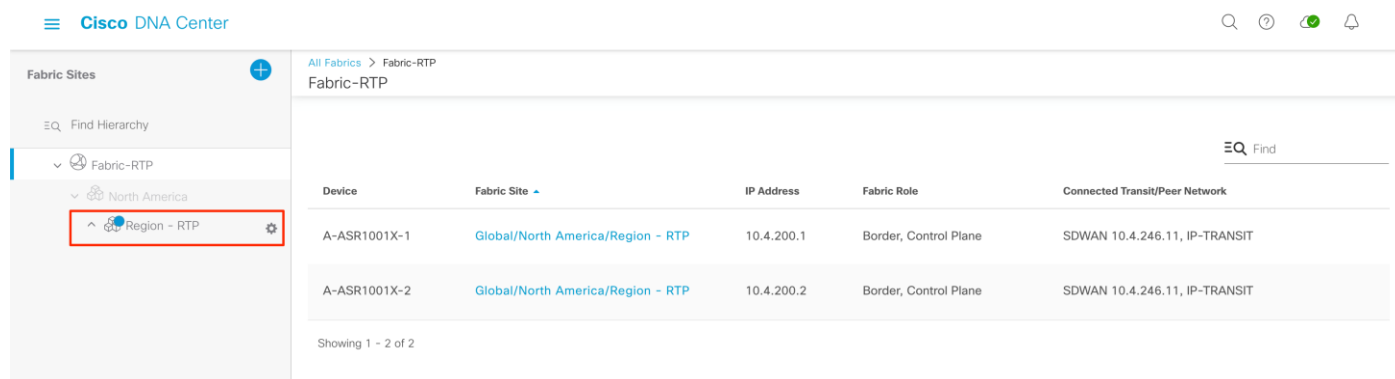


The screenshot shows the Cisco DNA Center interface. The breadcrumb navigation is "All Fabrics > Fabric-RTP". The main heading is "Fabric-RTP". On the left, there is a "Fabric Sites" sidebar with a search bar and a hierarchy tree. The hierarchy tree shows "Fabric-RTP" expanded, with "North America" and "Region - RTP" listed. "Region - RTP" is highlighted with a red box. On the right, there is a table with the following data:

Device	Fabric Site	IP Address	Fabric Role	Connected Transit/Peer Network
A-ASR1001X-1	Global/North America/Region - RTP	10.4.200.1	Border, Control Plane	SDWAN 10.4.246.11, IP-TRANSIT
A-ASR1001X-2	Global/North America/Region - RTP	10.4.200.2	Border, Control Plane	SDWAN 10.4.246.11, IP-TRANSIT

Showing 1 - 2 of 2

**Step 3.** Select **Host Onboarding** tab



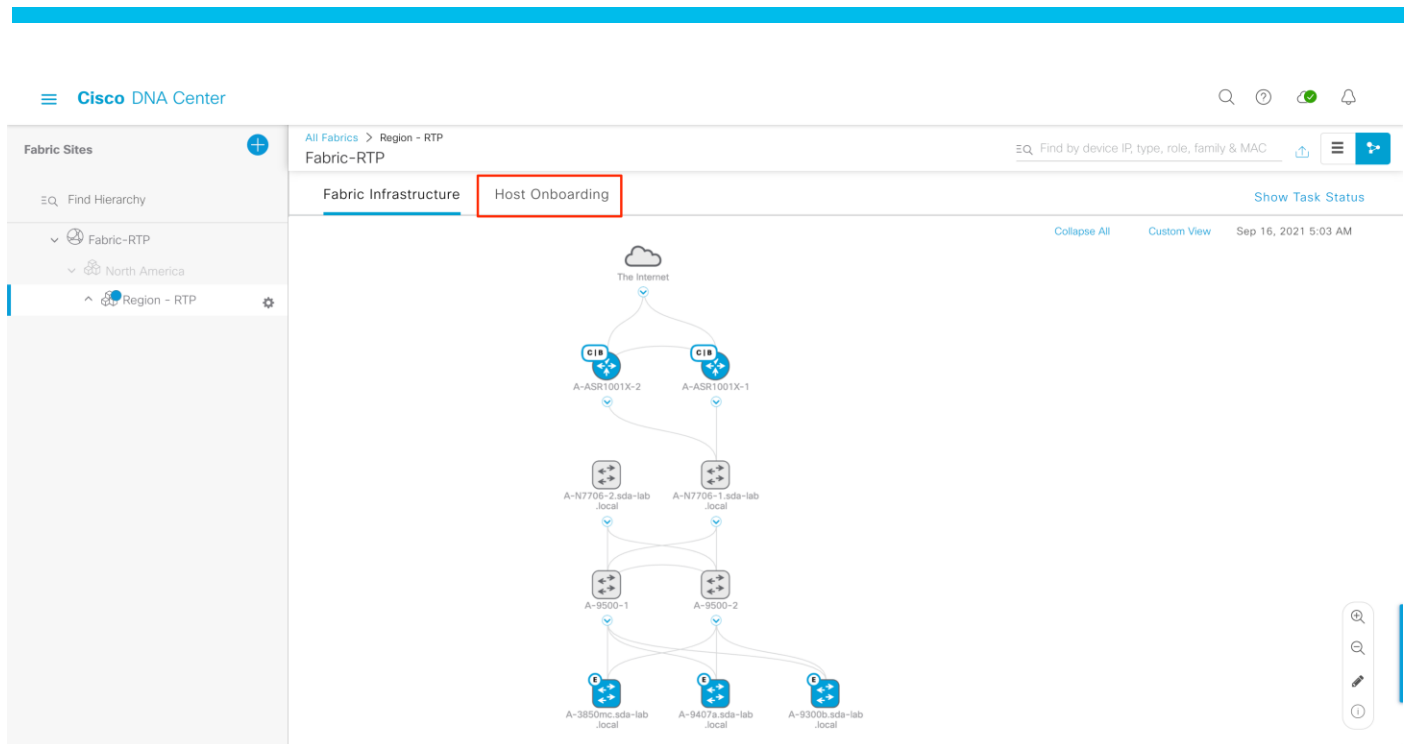

**Step 4.** Select the default **Authentication Template** for the fabric site  
Click **Deploy**

**Authentication** Virtual Networks Wireless SSIDs Port Assignment

Select Authentication Template ⓘ

Settings will be applied to all Fabric Edge host ports, unless overridden by a static port assignment.

<input type="radio"/>	Open Authentication ⓘ	Edit
<input checked="" type="radio"/>	Closed Authentication ⓘ	Edit
<input type="radio"/>	Low Impact ⓘ	Edit
<input type="radio"/>	No Authentication ⓘ	

**Deploy**

In the **Modify Authentication Template** slide-out page, select **Schedule Operation: Now** and click **Apply**

**Cisco DNA Center**

**Fabric Sites**

- Find Hierarchy
- Fabric-RTP
  - North America
    - Region - RTP

**All Fabrics > Region - RTP**

**Fabric-RTP**

**Fabric Infrastructure** **Host Onboarding**

**Authentication** Virtual Networks Wireless SSIDs

Select Authentication Template ⓘ

Settings will be applied to all Fabric Edge host ports, unless overridden.

- ☐ Open Authentication ⓘ
- ☒ Closed Authentication ⓘ
- ☐ Low Impact ⓘ
- ☐ No Authentication ⓘ

**Modify Authentication Template**

Two (2) Warning Alerts

This operation impacts all edge devices in the Fabric site.  
Interfaces on edge devices that have existing configurations as static trunk or static access or routed modes will not be configured automatically. Please default these interfaces, resync the devices and then try this operation again.

Schedule Operation:

- ☒ Now
- ☐ Later
- ☐ Generate configuration preview

Task Name\*

Modifying Authentication Template at Region - RTP

Cancel Apply

## Step 5. Select Virtual Networks tab

**Cisco DNA Center**

**Fabric Sites**

- Find Hierarchy
- Fabric-RTP
  - North America
    - Region - RTP

**All Fabrics > Region - RTP**

**Fabric-RTP**

**Fabric Infrastructure** **Host Onboarding**

**Authentication** **Virtual Networks** Wireless SSIDs Port Assignment

Select a Virtual Network to associate one or more IP Pool(s) with the selected VN.

Critical Pool: Not Selected

+ Add Virtual Network

INFRA\_VN × VN\_CAMPUS × VN\_GUEST × VN\_IOT ×

## Select the Virtual Network

**Cisco DNA Center**

**Fabric Sites**

- Find Hierarchy
- Fabric-RTP
  - North America
    - Region - RTP

**All Fabrics > Region - RTP**

**Fabric-RTP**

**Fabric Infrastructure** **Host Onboarding**

**Authentication** **Virtual Networks** Wireless SSIDs Port Assignment

Select a Virtual Network to associate one or more IP Pool(s) with the selected VN.

Critical Pool: Not Selected

+ Add Virtual Network

INFRA\_VN × VN\_CAMPUS × VN\_GUEST × VN\_IOT ×

and click **Add**

**Cisco DNA Center**

**Edit Virtual Network: INFRA\_VN**

Reset Export **Add**

Filter Delete Find

<input type="checkbox"/>	VLAN Name	Pool Type	IP Address Pool	VLAN	Layer-2 Flooding
No data to display					

associate **IP Address Pool(s)** part of the Virtual Network and click **Add**

**Cisco DNA Center**

**Edit Virtual Network: INFRA\_VN**

Back

IP Address Pool: **RTP\_AP\_PREFIX (10.4.211.0/25)** Pool Type: **AP**

VLAN

VLAN Name: **AP\_POOL** ☐ Auto generate VLAN name

IP Address Pool: **RTP\_EN\_PREFIX (10.4.211.128/25)** Pool Type: **Extended**

VLAN

VLAN Name: **EN\_POOL** ☐ Auto generate VLAN name

Cancel **Add**

Verify the IP Address Pools and click **Deploy**.

**Cisco DNA Center**

**Edit Virtual Network: INFRA\_VN**

Reset Export **Add**



Filter Delete Find

<input type="checkbox"/>	VLAN Name	Pool Type	IP Address Pool	VLAN	Layer-2 Flooding
<input type="checkbox"/>	AP_POOL	AP	RTP_AP_PREFIX 10.4.211.0/25	-	Disabled
<input type="checkbox"/>	EN_POOL	Extended	RTP_EN_PREFIX 10.4.211.128/25	-	Disabled

Showing 2 of 2


Cancel **Deploy**

In the **Update Virtual Network** slide-out page, select **Schedule Operation: Now** and click **Apply**

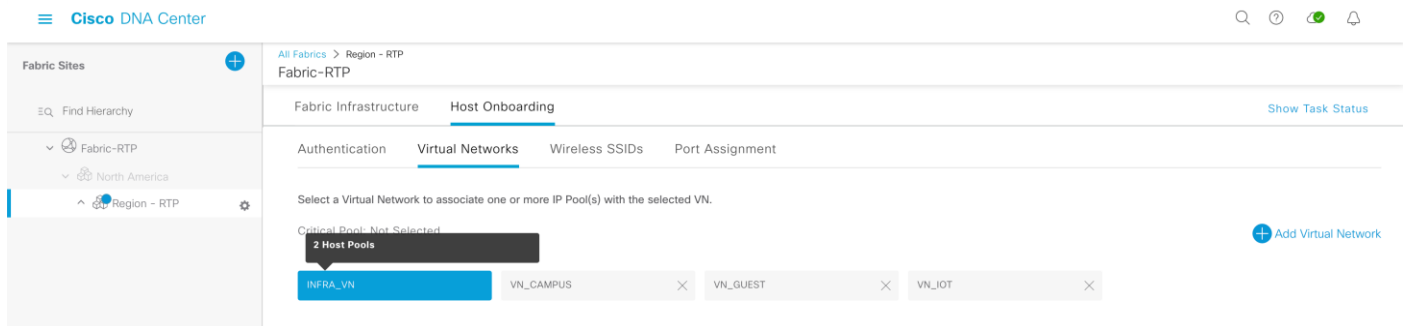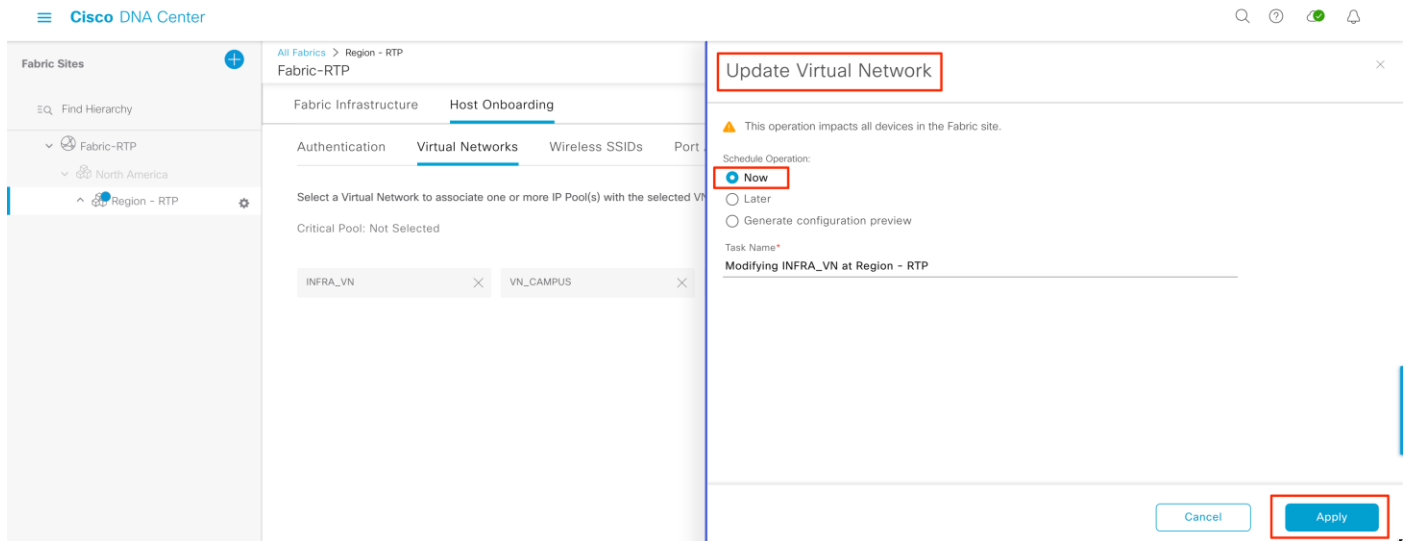

**Step 6.** Repeat the previous step, [Step 5](#), to associate **IP Address Pools** to **Virtual Networks** for the site.


For Virtual Network (other than the INFRA\_VN), configure **VLAN Name**, **Scalable Group**, **Traffic** and feature(s) that is required

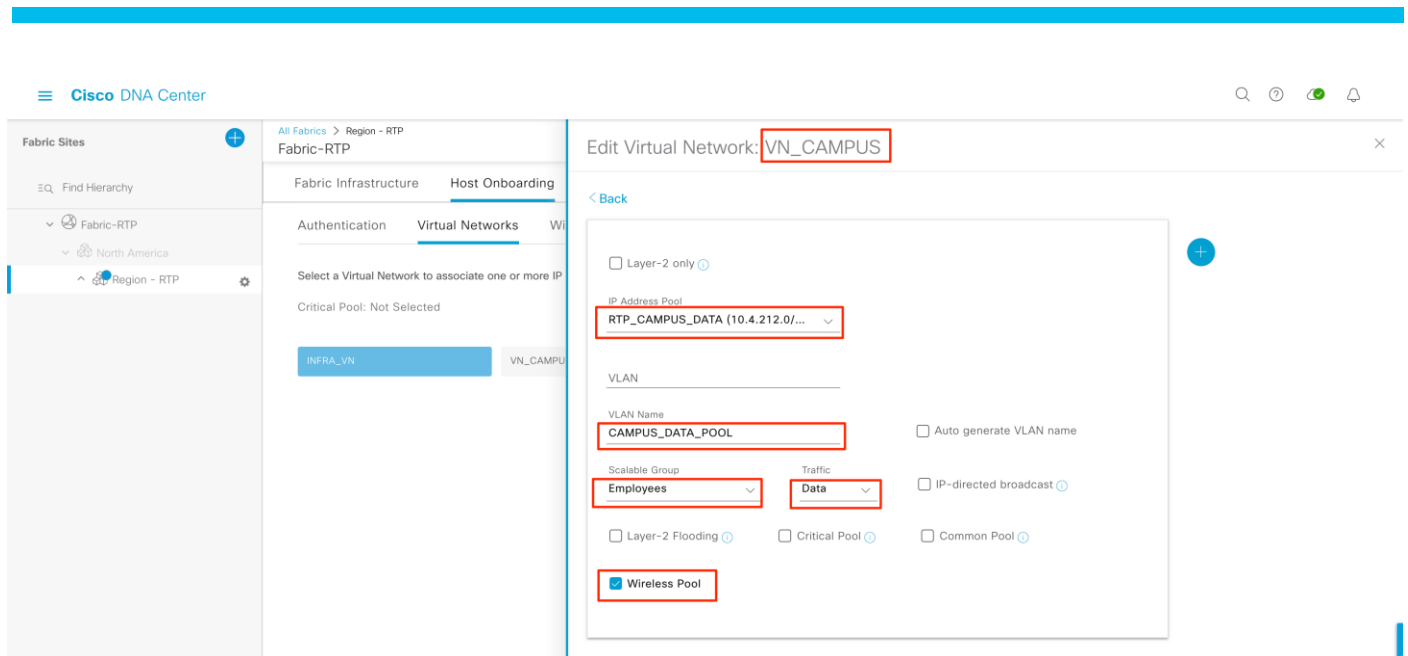

#### Tech tip

Same VLAN Name can be used across multiple fabric sites with different IP Address Pool at each fabric site. This provides the simplicity to configure a single Authorization profile in Cisco ISE, that returns same VLAN name to the fabric edge on successful authenticated.

### Step 7. View the Virtual Networks and associated IP Address Pool

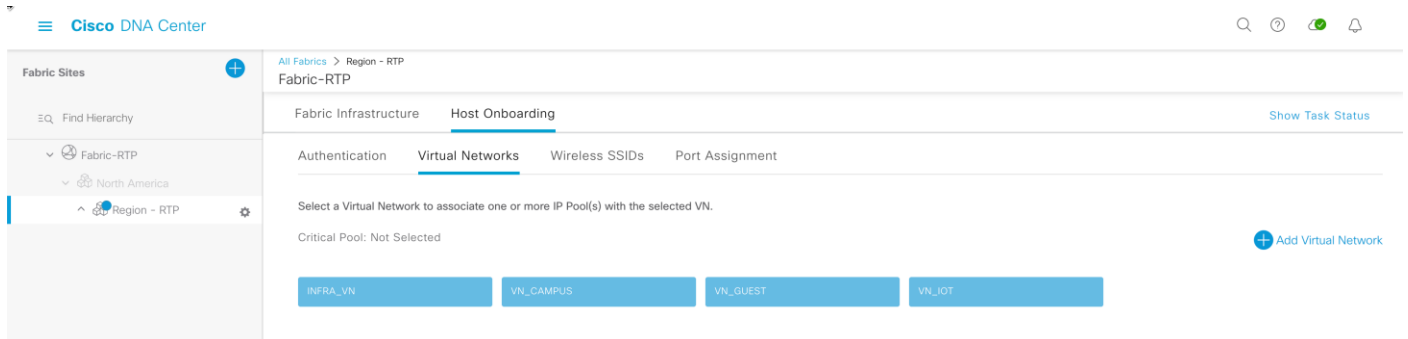


### Procedure 5. Configure WAN Edge to advertise aggregate-summary routes for associated IP Address Pool

The IOS-XE SD-WAN WAN Edge device, which is colocated fabric Border, Control Plane node and WAN Edge device, is configured to re-distribute OMP to LISP and vice-versa. This will result in WAN Edge device advertising both the host prefixes and network subnet for each IP Address Pool associated to Virtual Network.


To optimize and avoid advertising the host entries to remote sites, configure corresponding vManage > Cisco VPN feature template to advertise aggregate-summary subnets for each IP Address pool configured in the Virtual Network.

This section details steps to configure Cisco VPN templates to advertise aggregate-summary routes

#### Step 1. Login to vManage, navigate to **Configuration > Templates > Feature** tab

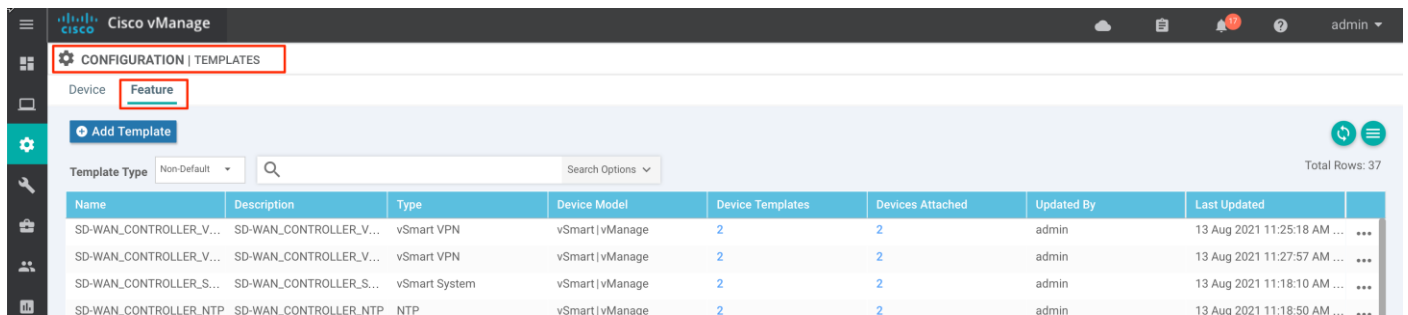

**Step 2.** Search Service VPN, Cisco VPN feature template that was previously created for each Virtual Network.

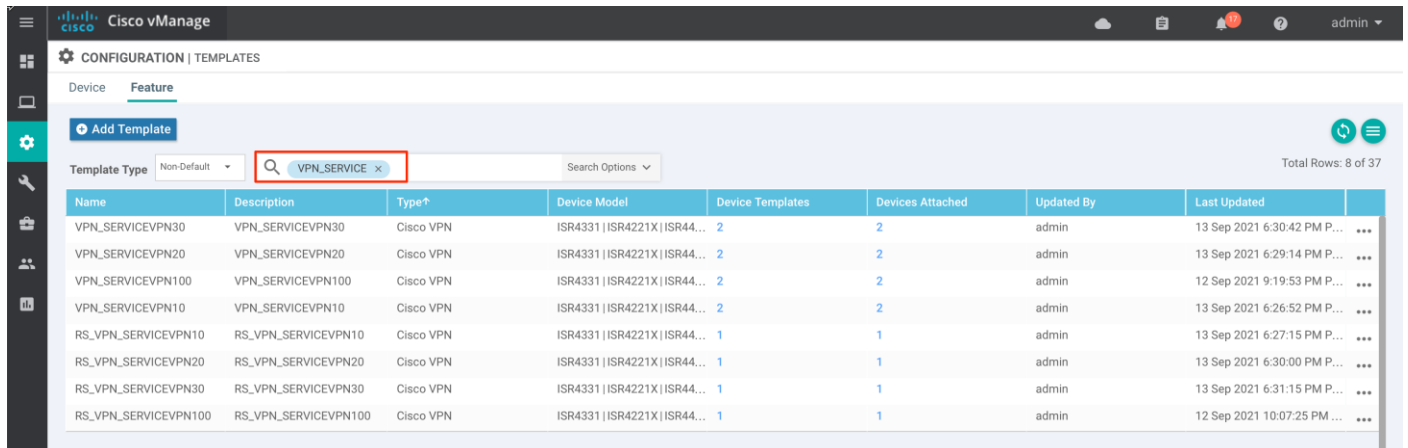

**Table 4.** Service VPN – Virtual Network mapping

Site	Virtual Network	Service VPN	Feature Template
Fabric-RTP	INFRA_VN + GRT	VPN 100	VPN_SERVICEVPN_100
	VN_CAMPUS	VPN 10	VPN_SERVICEVPN_10
	VN_IoT	VPN 20	VPN_SERVICEVPN_20
	VN_GUEST	VPN 30	VPN_SERVICEVPN_30
Fabric-NYC	INFRA_VN + GRT	VPN 100	RS_VPN_SERVICEVPN_100
	VN_CAMPUS	VPN 10	RS_VPN_SERVICEVPN_10
	VN_IoT	VPN 20	RS_VPN_SERVICEVPN_20
	VN_GUEST	VPN 30	RS_VPN_SERVICEVPN_30

**Step 3.** Select each Cisco VPN template, click three dots (...) and select **Edit**

Cisco vManage CONFIGURATION | TEMPLATES

Device Feature

+ Add Template

Template Type: Non-Default | Search: VPN\_SERVICE | Search Options

Total Rows: 8 of 37

Name	Description	Type	Device Model	Device Templates	Devices Attached	Updated By	Last Updated	
VPN_SERVICEVPN30	VPN_SERVICEVPN30	Cisco VPN	ISR4331   ISR4221X   ISR44...	2	2	admin	13 Sep 2021 6:30:42 PM P...	...
VPN_SERVICEVPN20	VPN_SERVICEVPN20	Cisco VPN	ISR4331   ISR4221X   ISR44...	2	2	admin	13 Sep 2021 6:29:14 PM P...	...
VPN_SERVICEVPN100	VPN_SERVICEVPN100	Cisco VPN	ISR4331   ISR4221X   ISR44...	2	2	admin	12 Sep 2021 9:19:53 PM P...	...
VPN_SERVICEVPN10	VPN_SERVICEVPN10	Cisco VPN	ISR4331   ISR4221X   ISR44...	2	2	admin	13 Sep 2021 6:29:14 PM P...	...
RS_VPN_SERVICEVPN10	RS_VPN_SERVICEVPN10	Cisco VPN	ISR4331   ISR4221X   ISR44...	1	1	admin	13 Sep 2021 6:29:14 PM P...	...
RS_VPN_SERVICEVPN20	RS_VPN_SERVICEVPN20	Cisco VPN	ISR4331   ISR4221X   ISR44...	1	1	admin	13 Sep 2021 6:29:14 PM P...	...
RS_VPN_SERVICEVPN30	RS_VPN_SERVICEVPN30	Cisco VPN	ISR4331   ISR4221X   ISR44...	1	1	admin	13 Sep 2021 6:29:14 PM P...	...
RS_VPN_SERVICEVPN100	RS_VPN_SERVICEVPN100	Cisco VPN	ISR4331   ISR4221X   ISR44...	1	1	admin	12 Sep 2021 9:19:53 PM P...	...

View  
Edit  
Change Device Models  
Delete  
Copy

**Step 4.** Select **Advertise OMP**, under **IPv4** section select **Aggregate** tab

Cisco vManage CONFIGURATION | TEMPLATES

OMP can be configured only on service VPNs

Feature Template: Cisco VPN | VPN\_SERVICEVPN100

Basic Configuration | DNS | **Advertise OMP** | IPv4 Route | IPv6 Route | Service | Service Route | GRE Route | IPSEC Route | NAT | Global Route Leak

Advertise OMP

IPv4 IPv6

BGP (IPv4) ☒ On ☐ Off

Static (IPv4) ☐ On ☒ Off

Connected (IPv4) ☒ On ☐ Off

OSPF External ☒ On ☐ Off

OSPFV3 ☐ On ☒ Off

EIGRP ☐ On ☒ Off

LISP ☒ On ☐ Off

ISIS ☐ On ☒ Off


NETWORK **AGGREGATE**

Aggregate (IPv4) ☐ On ☒ Off

IPv4 ROUTE

Update Cancel

**Step 5.** Select **Aggregate (IPv4): On**  
And select **Add Aggregate**

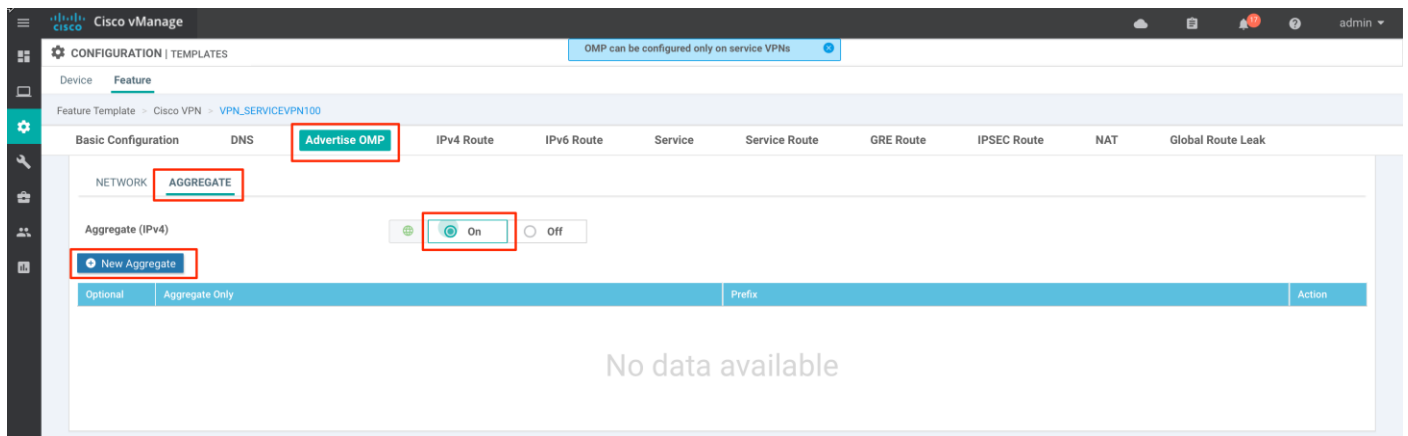


Input Prefix

Select **Aggregate Only: ON**

And click **Add**

And select **Update** at the bottom of the page

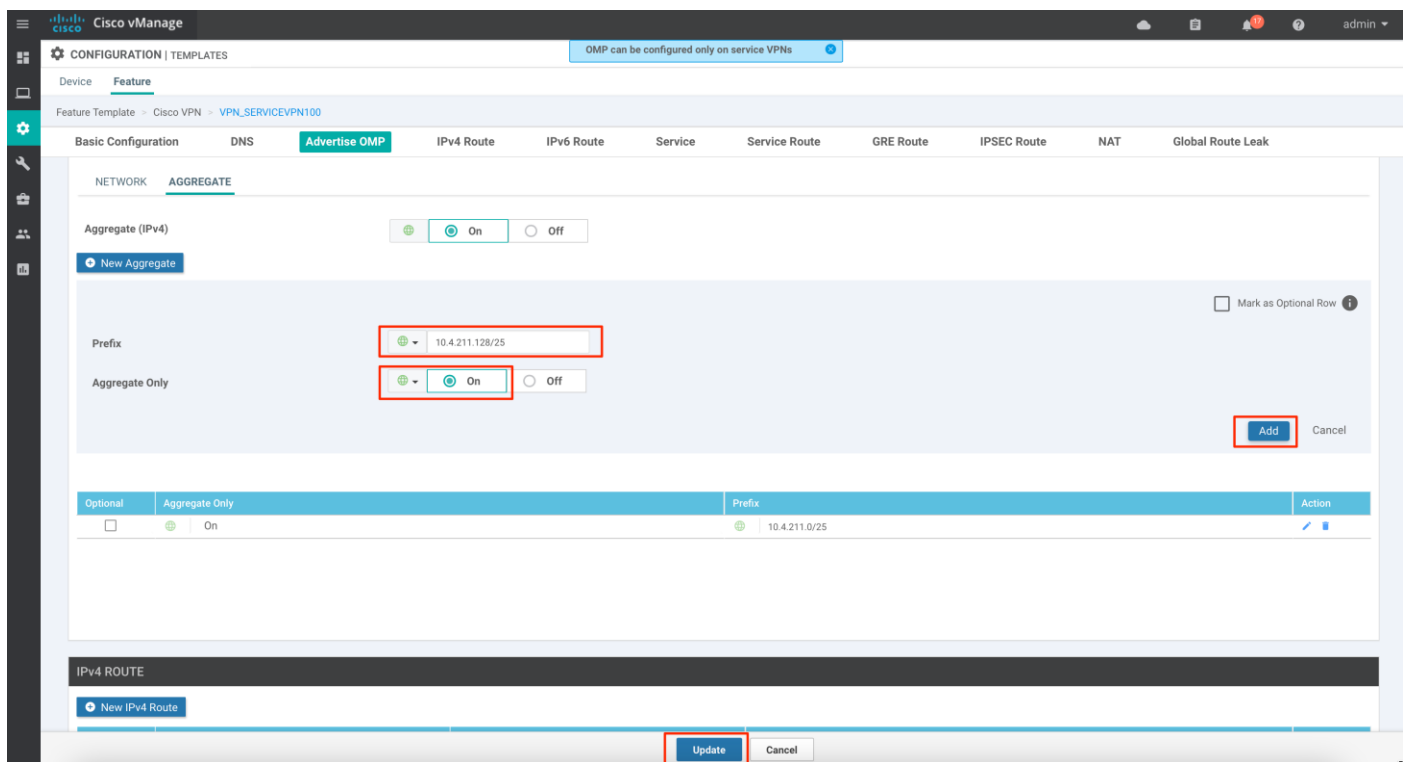


#### Tech Tip


The network IP Address prefix can be obtained from Cisco DNA Center. Navigate to **Provision > Fabric > Fabric Site > Fabric Site > Host Onboarding > Virtual Networks** tab. Click each **Virtual Network** to view the **IP Address Pool** provisioned. Configure the IP Address prefixes to corresponding **Service VPN** in vManage.

Please note the IP Address prefix in the *INFRA\_VN* is mapped to Service VPN 100 (Fabric GRT Service VPN) in vManage.




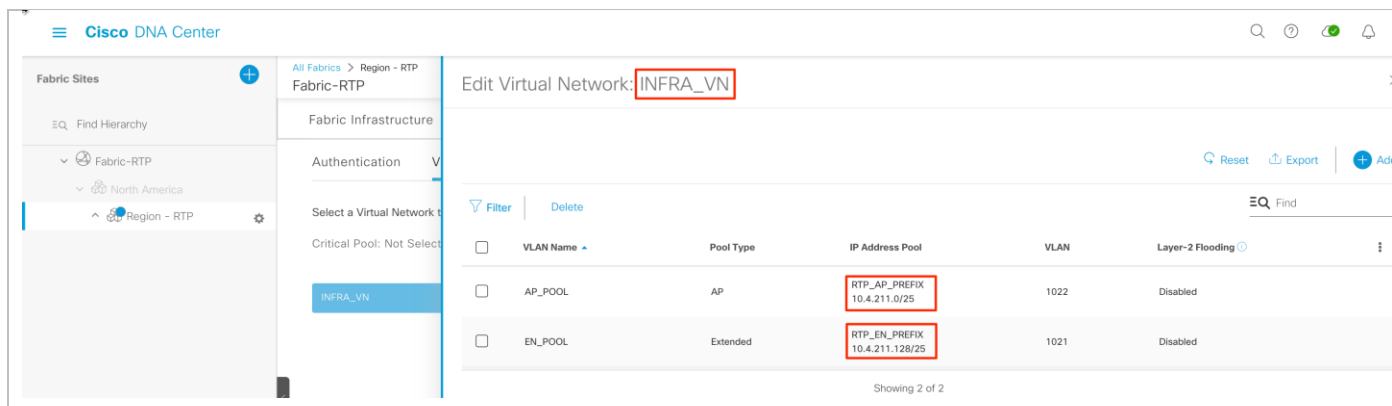



## Step 6. Click Next

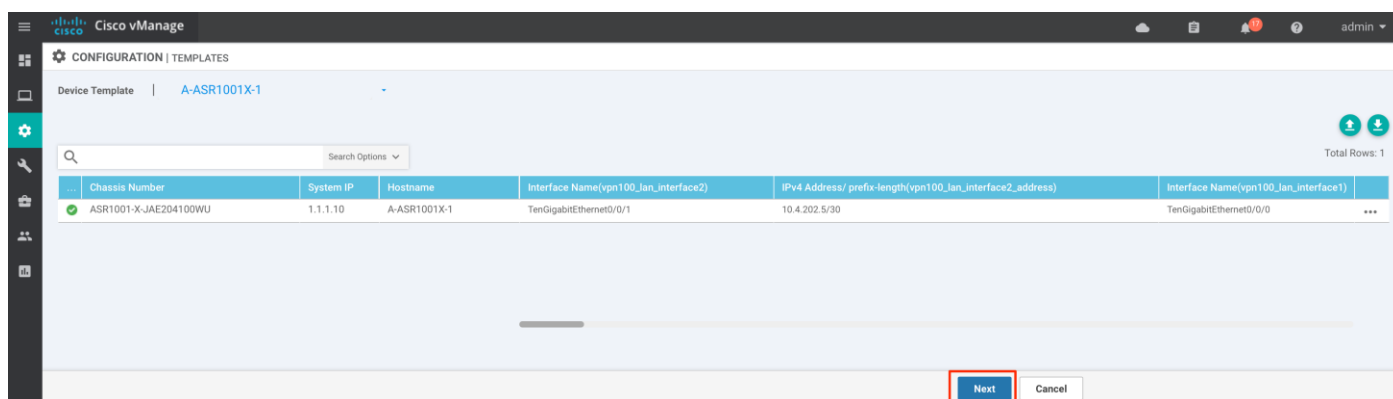


And select **Configure Devices**

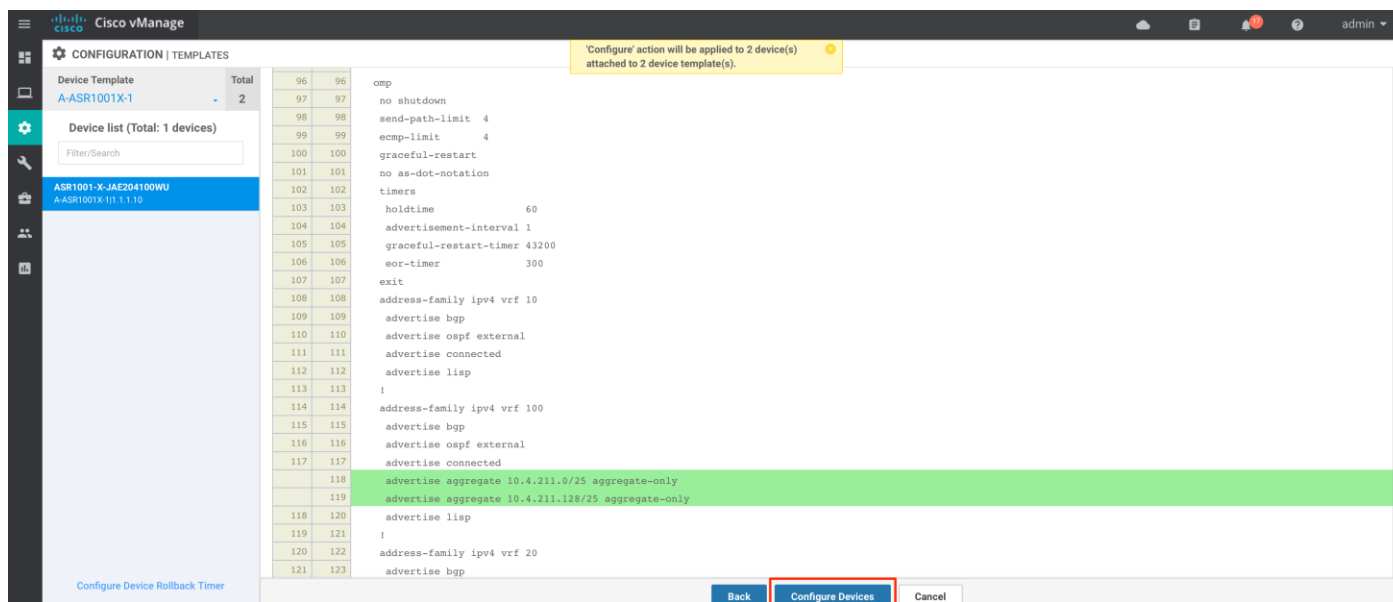

Enable the option to **Confirm Configuration changes** and click **OK**

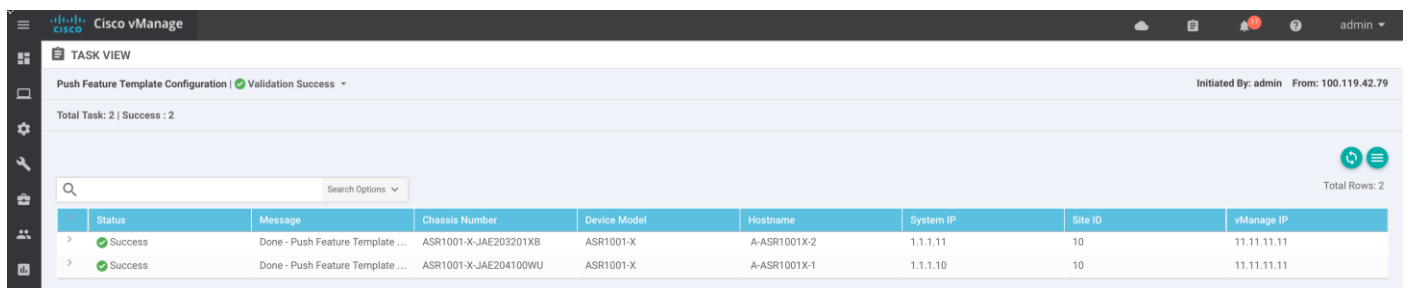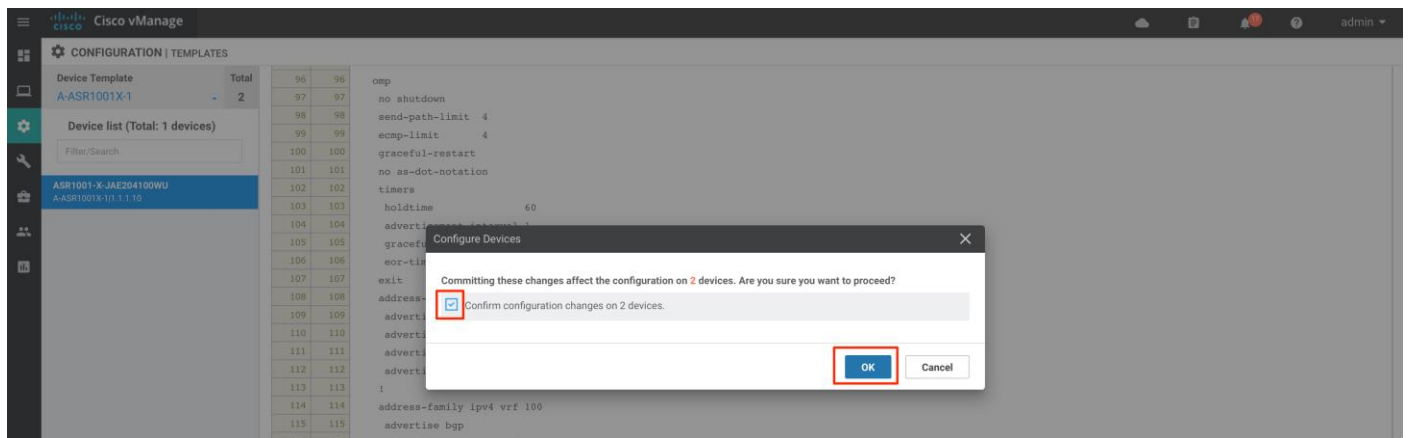

**Step 7.** Repeat [Step 3](#) through Step 6, for each Service VPN template to advertise only the aggregate routes in the OMP protocol across SD-WAN fabric to other sites.

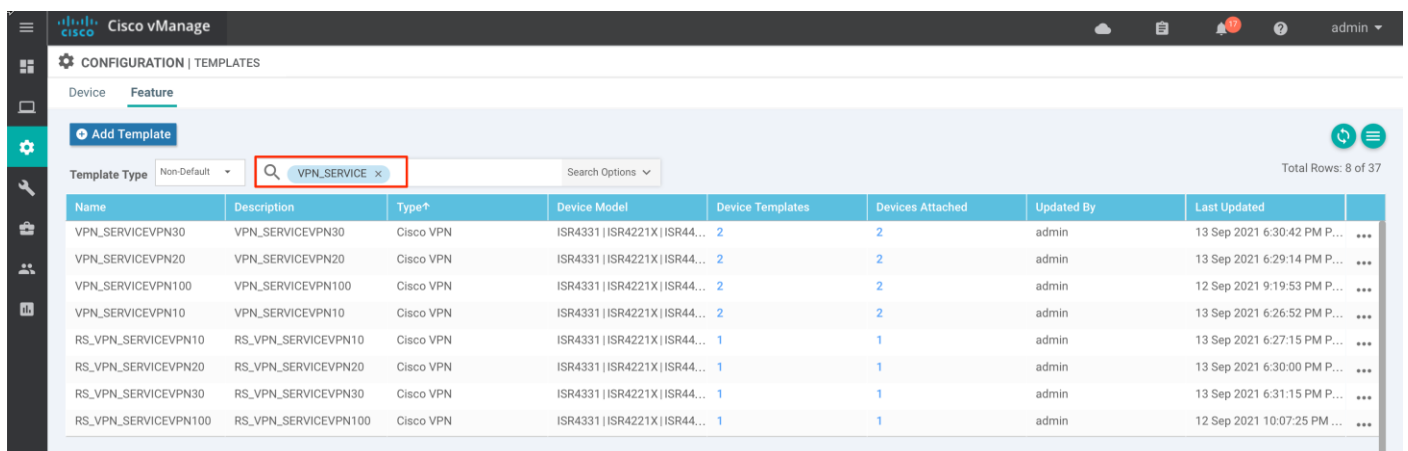


## Procedure 6. (Optional) Provision Fabric – Port Assignment

Endpoints connected to an edge node can be dynamically associated to a VLAN through an ISE Authorization policy upon successful authentication. The Authorization policy can include VLAN and SGT along with additional policy elements that are downloaded to and enforced on the edge node.


For endpoints without a supplicant, Cisco DNA Center provides a workflow to statically configure the edge node's port connecting to the endpoint with VLAN and SGT information. The next steps demonstrate this static procedure, which configures an access port with static VLAN and SGT assignment.

This procedure is not needed if the VLAN and SGT are dynamically assigned via ISE Authorization policies.

**Step 1.** In Cisco DNA Center, navigate to **Provision > Fabric**, select the appropriate **Fabric Site > Host Onboarding > Port Assignment** tab

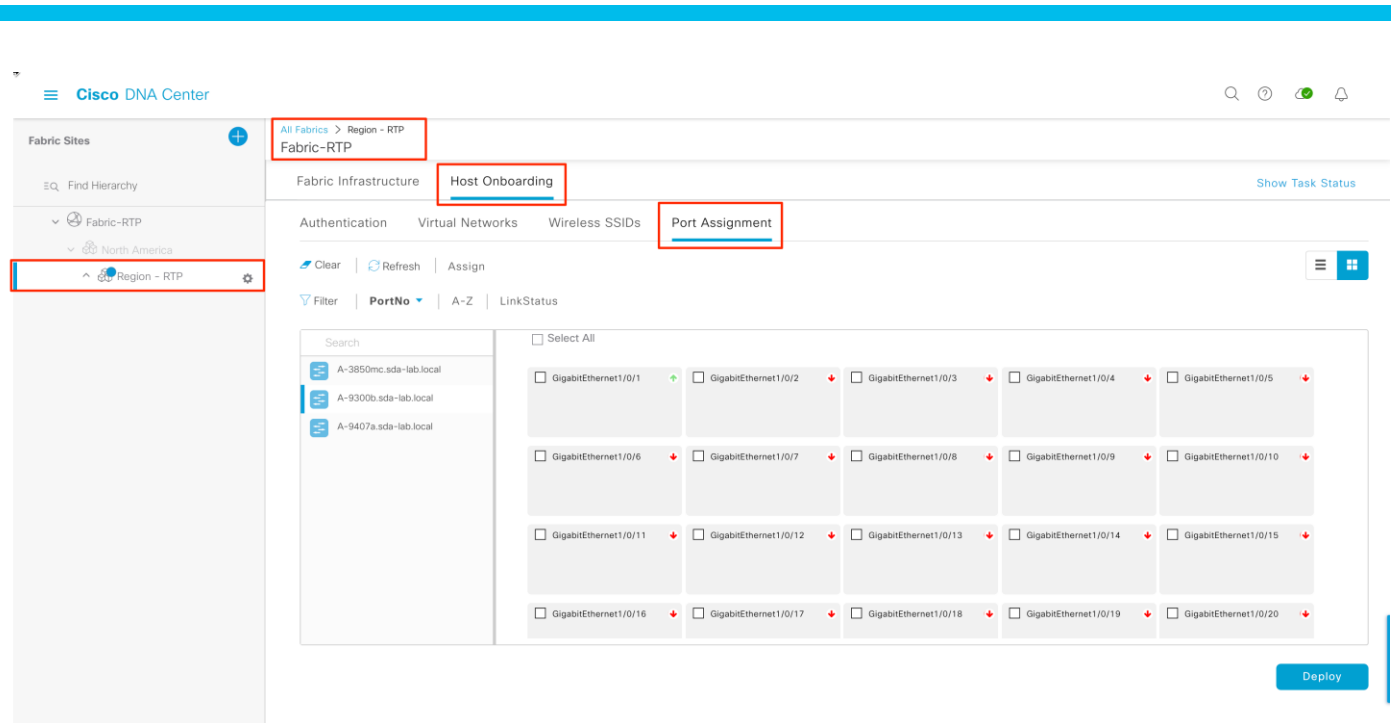

- Step 2.** select the **Fabric Node** and click on the **Interface**
- input **Connected Device Type: User Devices**
- select the **IP Address Pool** from the drop-down options for **Voice** and/or **Data**
- select the **Scalable Group** for endpoint connected to the interface
- select **Authentication: No Authentication**
- and click **Update**

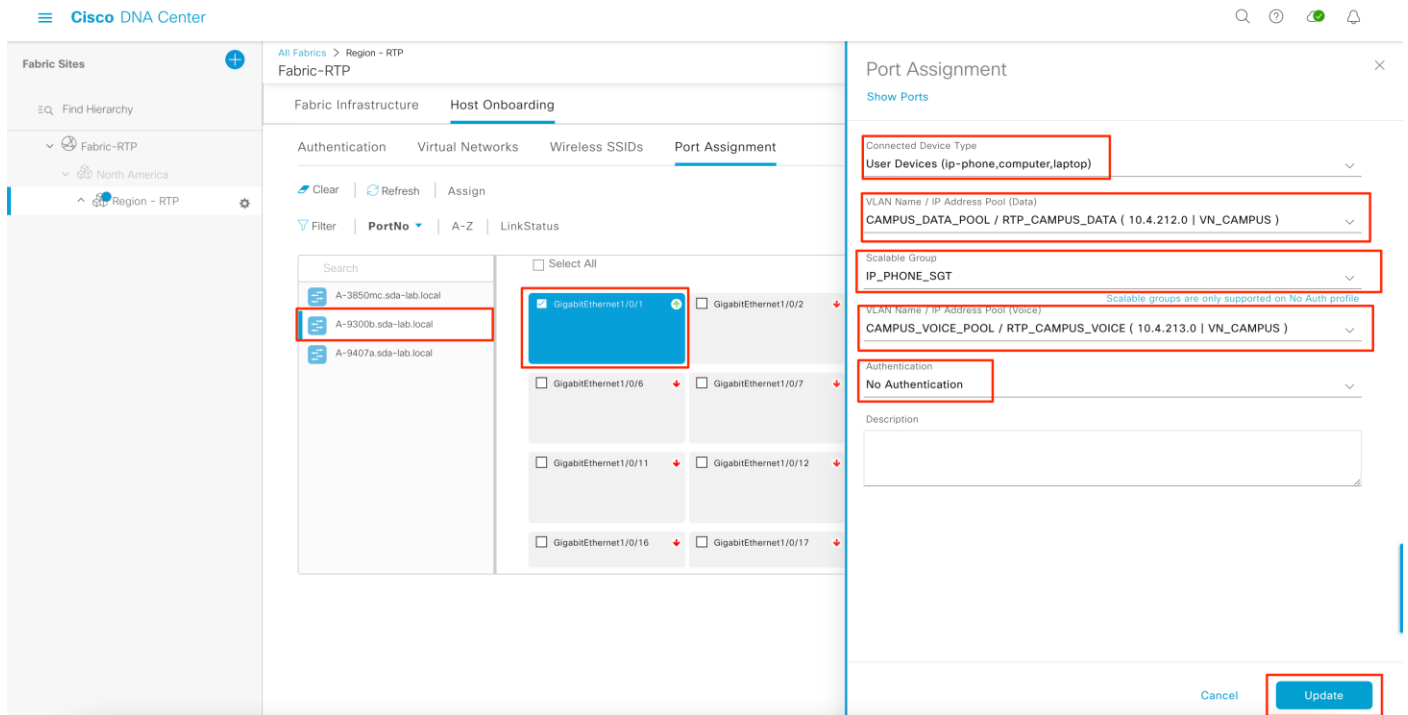


### Step 3. Configure additional interfaces on the same fabric node and click **Deploy**

The screenshot shows the Cisco DNA Center interface for Host Onboarding. The left sidebar shows the navigation tree with 'Region - RTP' selected. The main content area is titled 'Fabric Infrastructure' and 'Host Onboarding'. Under 'Host Onboarding', the 'Port Assignment' tab is active. The page displays a table of port assignments for the device 'A-9300b.sda-lab.local'. The table has columns for 'PortNo' and 'LinkStatus'. The 'PortNo' column lists ports from GigabitEthernet1/0/1 to 1/20. The 'LinkStatus' column shows the status of each port. A 'Deploy' button is highlighted in the bottom right corner.

In the **Update Port Assignment** slide-out page, select **Schedule Operation: Now** and click **Apply**

The screenshot shows the 'Update Port Assignment' slide-out page. The page has a title bar 'Update Port Assignment' and a close button. Below the title bar, there is a warning message: 'This operation impacts the clients that are connected to the ports that are being updated on A-9300b.sda-lab.local.' Below the warning, the 'Schedule Operation' section has 'Now' selected. The 'Task Name' field is populated with 'Modifying Port Assignment for A-9300b.sda-lab.local at Region - RTP'. The 'Apply' button is highlighted in the bottom right corner.

### Step 4. View the static Port Assignment for the device

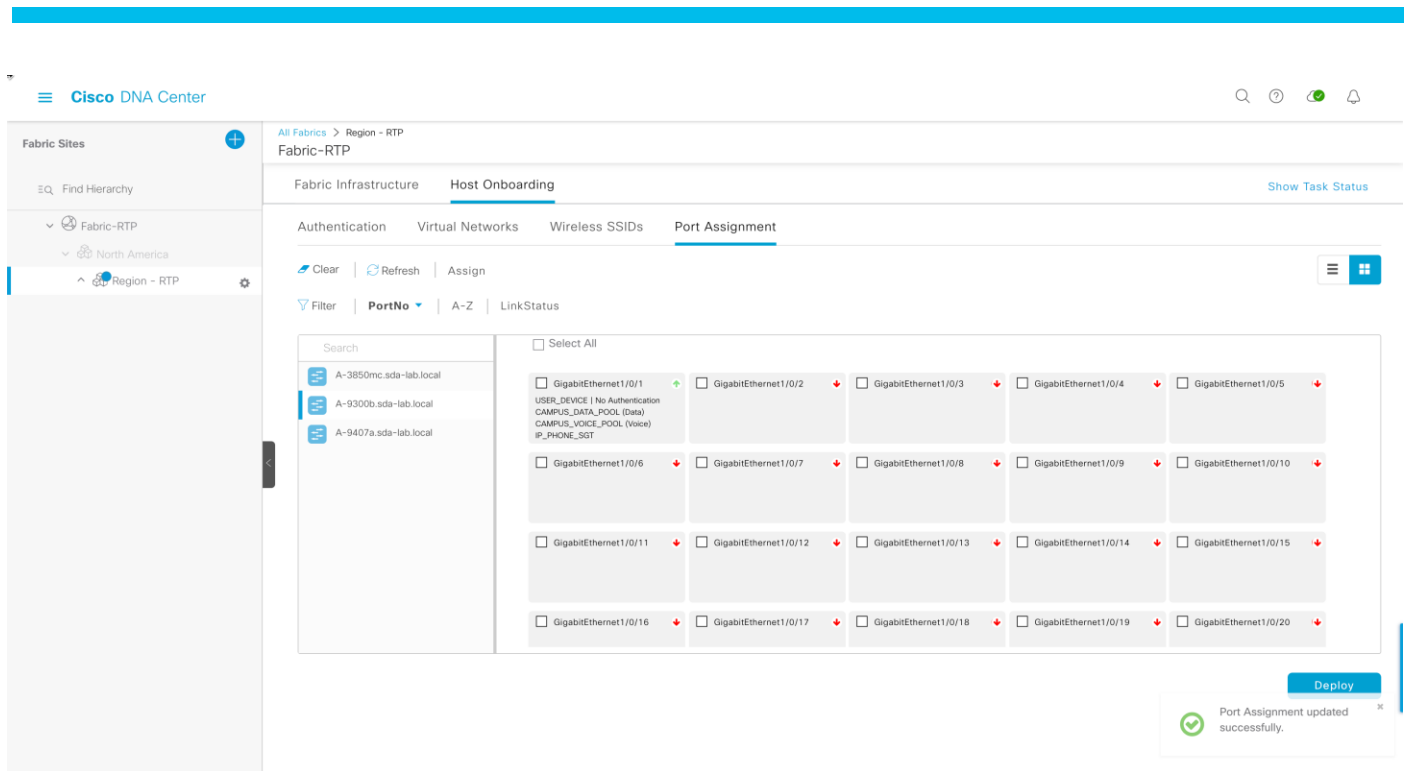


## Process 7: Defining Group-Based Access Control Policies

This section details the procedure to configure consistent group-based access control policies across multiple fabric sites connected via Cisco SD-WAN infrastructure and that are part of Cisco SD-Access | SD-WAN Pairwise Integration.

### Procedure 1. Configure Group-Based Access Control policies

**Step 1.** Navigate to **Cisco DNA Center > Policy > Group-Based Access Control**.

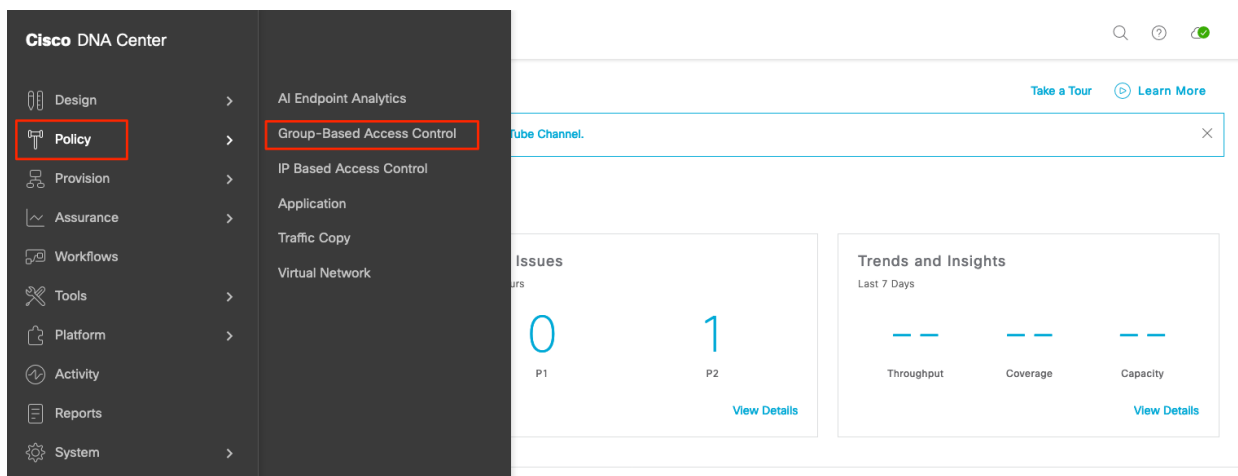

**Step 2.** Under **Policies** tab, click the appropriate **Source/Destination** matrix element.

The Create Policy slide-out panel appears.

Migration is complete. Cisco DNA Center will be the policy administrator migration log, and/or change the administration mode in GBAC Conf

**Policies** Scalable Groups Access Contracts Analytics

Policies (0) [Enter full screen](#)

[Filter](#) [Deploy](#) [Refresh](#)

■ Permit ■ Deny ■ Custom □ Default

Source Destination

Auditors BYOD Contractors Developers Development\_... Employees Extranet Guests Intranet IoT\_Device IoT\_DEVICES IP\_PHONE

Employees > Default Policy > Contractors  
Contractors > Default Policy > Employees

Contract: [Change Contract](#)

Policy Status: Enabled

Employees → Contractors Default

[Cancel](#) [Save](#)

**Step 3.** Click **Change Contract** from the **Create Policy** slide-out panel to change from the default contract.

Migration is complete. Cisco DNA Center will be the policy administrator review the policy migration log, and/or change the administration

**Policies** Scalable Groups Access Contracts Analytics

Policies (0) [Enter full screen](#)

[Filter](#) [Deploy](#) [Refresh](#)

■ Permit ■ Deny ■ Custom □ Default

Source Destination

Auditors BYOD Contractors Developers Development\_... Employees Extranet Guests Intranet

Contract: [Change Contract](#)

Policy Status: Enabled

Employees → Contractors Default

[Cancel](#) [Save](#)

**Step 4.** Select one of the existing or predefined contracts from the list.

Optionally, create a new custom contract by clicking the Create Contract by following Steps 5-8.

If using an existing or predefined contract, skip to Step 9.

**Step 5.** If creating a new contract, click **Create Contract**.

The screenshot shows the Cisco DNA Center interface for Policy - Group-Based Access Control. A notification at the top states: "Migration is complete. Cisco DNA Center will be the policy administration point, and the policy migration log, and/or change the administration mode in GBAC Configurations". The left sidebar shows a matrix for Source (Auditors, BYOD, Contractors, Developers, Development\_Se..., Employees, Extranet) and Destination (Auditors, BYOD, Contractors, Developers, Development\_Se..., Employees, Extranet, Guests, Intranet). The main area is titled "Change Contract" and contains a table of existing contracts. A red box highlights the "+ Create Contract" button in the top right corner.

Name	Description	Policies Referencing	Created in
<input type="radio"/> Permit_IP_Log	Permit IP with logging	0	
<input type="radio"/> Permit IP	Permit IP SGACL	0	
<input type="radio"/> DenyRemoteServices	Sample contract to block Remote Access and telnet services	0	
<input type="radio"/> Deny_IP_Log	Deny IP with logging	0	
<input type="radio"/> Deny IP	Deny IP SGACL	0	
<input type="radio"/> DENY_ICMP	DENY_ICMP	0	
<input type="radio"/> AllowWeb	Sample contract to allow access to Web	0	
<input type="radio"/> AllowDHCPDNS	Sample contract to allow DHCP and DNS	0	

Showing 1 - 8 of 6 entries

**Step 6.** Input a **Name** and **Description**.

**Step 7.** Define the applicable **Action**, **Application**, **Transport Protocol**, **Source / Destination**, **Port**, and optionally enable **Logging**.

**Step 8.** Click **Save**.

The screenshot shows the Cisco DNA Center interface for Policy - Group-Based Access Control. A notification at the top states: "Migration is complete. Cisco DNA Center will be the policy administration point, and the policy migration log, and/or change the administration mode in GBAC Configurations". The left sidebar shows a matrix for Source (Auditors, BYOD, Contractors, Developers, Development\_Se..., Employees, Extranet) and Destination (Auditors, BYOD, Contractors, Developers, Development\_Se..., Employees, Extranet, Guests, Intranet, IoT\_Develop, IP\_Phone, Network\_Serv..., PD\_Serv...). The main area is titled "Change Contract" and contains a form for creating a new contract. The "Name" field is highlighted with a red box and contains "EMPLOYEES\_CONTRACTORS\_LIMIT". The "Description" field is highlighted with a red box and contains "Limited Communication between Employees and Contractors". Below the form is a table titled "CONTRACT CONTENT (4)". A red box highlights the "Save" button in the bottom right corner.

#	Action *	Application *	Transport Protocol	Source / Destination	Port	Logging	Action
1	Deny	Advanced	ICMP	-	-	<input checked="" type="checkbox"/>	+ X
2	Deny	bit torrent	TCP	Destination	6881,6882,6883,68 ...	<input checked="" type="checkbox"/>	+ X
3	Deny	ftp	TCP	Destination	21,21000	<input checked="" type="checkbox"/>	+ X
4	Deny	Advanced	UDP	Destination Source	587 ANY	<input type="checkbox"/>	+ X

Default Action: Permit Logging: ☐

**Step 9.** Select the contract using the ☐ radio button and click **Change**.

Cisco DNA Center
Policy · Group-Based Access Control

Migration is complete. Cisco DNA Center will be the policy administration point, and is now in GBAC Configurations

Policies
Scalable Groups
Access Contracts

Policies (0)
Enter full screen

Filter
Deploy
Refresh

Permit
Deny
Custom
Default

Source
Destination
Auditors
BYOD
Contractors
Developers
Development\_Ser...
Employees
Extremist
Guests
Intranet
IoT\_Devices
IP\_Phones
Network\_Serv...
PD\_Serv...

Auditors
BYOD
Contractors
Developers
Development\_Ser...
Employees
Extremist
Guests
Intranet
IoT\_Devices
IP\_Phones
Network\_Serv...
PD\_Serv...

Edit Policy
Change Contract
Create Contract

Filter

Name	Description	Policies Referencing	Created in
<input type="radio"/> AllowDHCPDNS	Sample contract to allow DHCP and DNS	0	
<input type="radio"/> AllowWeb	Sample contract to allow access to Web	0	
<input type="radio"/> Deny IP	Deny IP SGACL	0	
<input type="radio"/> Deny_IP_Log	Deny IP with logging	0	
<input type="radio"/> DenyRemoteServices	Sample contract to block Remote Access and telnet services	0	
<input checked="" type="radio"/> EMPLOYEES_CONTRACTORS_LIMIT	Limited Communication between Employees and Contractors	0	

Show 10 entries
Showing 1 - 8 of 8
Previous 1 Next

Cancel
Change

**Step 10.** In the **Policy Status** drop-down, selected **Enabled**.

**Step 11.** Click **Save**.

Cisco DNA Center
Policy · Group-Based Access Control

Migration is complete. Cisco DNA Center will be the policy administration point, and is now in GBAC Configurations

Policies
Scalable Groups
Access Contracts

Policies (0)
Enter full screen

Filter
Deploy
Refresh

Permit
Deny
Custom
Default

Source
Destination
Auditors
BYOD
Contractors
Developers
Development\_Ser...
Employees
Extremist
Guests
Intranet
IoT\_Devices
IP\_Phones
Network\_Serv...
PD\_Serv...

Auditors
BYOD
Contractors
Developers
Development\_Ser...
Employees
Extremist
Guests
Intranet
IoT\_Devices
IP\_Phones
Network\_Serv...
PD\_Serv...

Create Policy

Contractors → Employees Custom

Policy Status
Enabled

Contract:
Change Contract

Name	Description	Policies Referencing
EMPLOYEES_CONTRACTORS_LIMIT	Limited Communication between Employees and Contractors	0

#	Action	Application	Protocol	Source / Destination	Port	Logging
1	DENY	advanced	ICMP	Source Destination		ON
2	DENY	bit torrent	TCP	Destination	6881,6882,6883,6884,6885,6886,6887,6888,6889	ON
3	DENY	ftp	TCP	Destination	21,21000	ON
4	DENY	advanced	UDP	Source Destination	587	ON

Default Action PERMIT Logging ON

Cancel
Save



Migration is complete. Cisco DNA Center will be the policy administration point, and screens of Scalable Groups, Access Contracts and Policies in Cisco ISE will be read-only. You can review the policy migration log, and/or change the administration mode in [GBAC Configurations](#)


Policies Scalable Groups Access Contracts

Policies (1) [Enter full screen](#)

[GBAC Configuration](#)
 Default: **Permit IP**
[+ Create Policies](#)

Filter Deploy Refresh

■ Permit ■ Deny ■ Custom □ Default

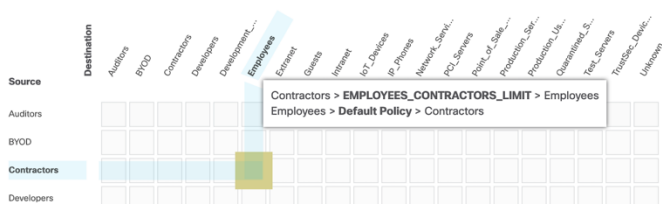

**Step 12.** If needed, return to [Step 1](#) to define additional contracts policies.

**Step 13.** Once complete, click **Deploy** to provision the policies.

Migration is complete. Cisco DNA Center will be the policy administration point, and screens of Scalable Groups, Access Contracts and Policies in Cisco ISE will be read-only. You can review the policy migration log, and/or change the administration mode in [GBAC Configurations](#)


Policies   Scalable Groups   Access Contracts   Analytics

Policies (1) [Enter full screen](#)

 GBAC Configuration
 Default: Permit IP
+ Create Policies v

Filter Deploy Refresh

■ Permit ■ Deny ■ Custom □ Default

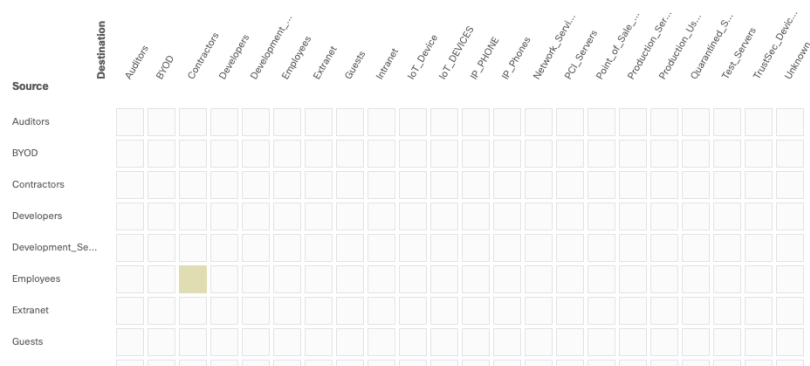

## Operate

This section covers the steps used to monitor, manage, and troubleshoot various network components in this *Integrated* Domain deployment.

It is organized into the following processes and procedures:

Process	Procedure
<a href="#">Monitoring and Assuring the Cisco SD-Access Infrastructure</a>	<a href="#">View Cisco DNA Center and ISE communication status</a> <a href="#">View Cisco DNA Center Assurance summary</a> <a href="#">View Cisco DNA Center Assurance details</a> <a href="#">View Fabric provisioning details in Cisco DNA Center</a>
<a href="#">Validating Policy enforcement</a>	<a href="#">View Group-Based Access Control policies and access contracts</a> <a href="#">Verify policy configuration on edge nodes</a>
<a href="#">Monitoring SD-WAN Edge device health</a>	<a href="#">Monitor IOS-XE WAN Edge router health and connection status</a> <a href="#">View the Audit Logs in the SD-WAN vManage controller</a>

### Process 1: Monitoring and Assuring the Cisco SD-Access Infrastructure

This process demonstrates how to monitor and assure the SD-Access Infrastructure using Cisco DNA Center Assurance.

#### Procedure 1. View Cisco DNA Center and Cisco Identity Service Engine communication status

Similar to the [steps](#) in the prerequisites, this procedure verifies Cisco DNA Center and ISE integration. This procedure displays a list of the ISE Primary and Secondary Policy Administration Nodes (PAN) and ISE Primary and Secondary pxGrid Nodes and their communication status with Cisco DNA Center.

**Step 1.** Navigate to **Cisco DNA Center > System > System 360**.

**Step 2.** Under **Externally Connected Systems**, view the status of the Identity Service Engine (ISE).

The output will vary based on the deployment. At a minimum, there should be two entries:

- Primary – Available ✓
- PxGrid – Available ✓

Cisco DNA Center

System - System 360

System 360

Service Explorer

System Management

Software Updates

As of Sep 16, 2021 1:49 PM

Connected to Cisco's software server.

System Package is up to date.

Backups

As of Sep 16, 2021 1:49 PM

No backups server configured.

Configure

Application Health

As of Sep 16, 2021 1:49 PM

Automation

Assurance

Externally Connected Systems

Identity Services Engine (ISE)

As of Sep 15, 2021 1:49 PM

Secondary	10.4.250.226	Available
Primary	10.4.250.225	Available
Pxgrid-Active	10.4.250.225	Available
Pxgrid-Standby	10.4.250.226	Available

Update

IP Address Manager (IPAM)

As of Sep 16, 2021 1:49 PM

No IPAM server configured.

Configure

vManage

As of Sep 15, 2021 1:49 PM

Server URL	10.4.246.11	Available
Username	admin	


Update

## Procedure 2. View Cisco DNA Center Assurance summary

The main Cisco DNA Center provides a wealth of information regarding the state and status of the devices it manages, along with details on configuration elements. These are each shown in different dashlets.

**Step 1.** To view the overall network health, including the network devices, wireless clients, and wired clients, navigate to the main dashboard by clicking the Cisco DNA Center button in the top left corner.

**Step 2.** For further details and to navigate to the Assurance application, click [View Details](#) in a dashlet.

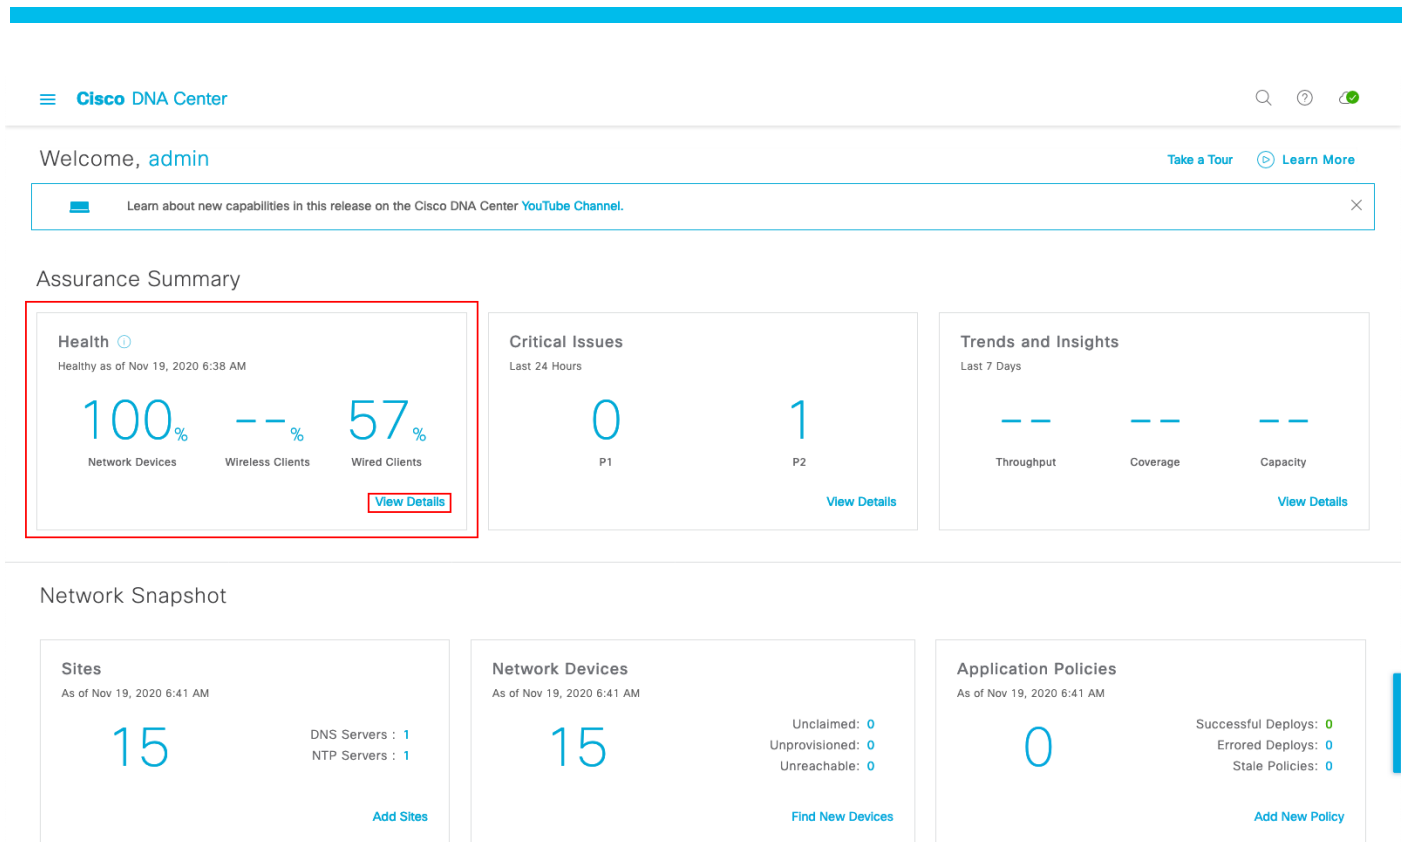

**Procedure 3. View Cisco DNA Center Assurance details**

The Cisco DNA Center Assurance application provides rich details and information that expand further on the summary data presented on the main dashboard.

- Step 1.** Navigate to **Cisco DNA Center > Assurance > Dashboards > Health.**
- Step 2.** Click the tabs for **Overall, Network, Client,** and **Application** to get respective detailed health information.

Tab	Details
Overall	Used to monitor and troubleshoot the overall health of your enterprise
Network	Displays a global view of the network and is used to determine if there are potential network issues to address
Client	Displays a global view of the health of all wired and wireless clients and is used to determine if there are potential client issues to address
Application	Displays a global view of the applications and is used to determine if there are application client issues to address

Cisco DNA Center

Assurance - Dashboards - Health

Overall

Network

Client

Application

Global
Last 24 Hours

Actions

Network Devices

LATEST

100%

Healthy

TOTAL: 8

6/6

No Devices

No Devices

2/2

No Devices

No Devices

Router

Core

Distribution

Access

Wireless Controller

Access Point

40%

5a

5a

View Network Health

Wired Clients

LATEST

100%

Healthy

CONNECTED: 5

40%

5a

5a

View Client Health

Wireless Clients

LATEST

% Healthy

ACTIVE: 0

40%

5a

5a

View Client Health

Top 10 Issue Types

Priority	Issue Type	Device Role	Category	Issue Count	Site Count (Area)	Device Count	Last Occurred Time
P2	Switch power failure	ACCESS	Device	1	1	1	Jun 21, 2020 12:40 PM
P3	Device time has drifted from Cisco DNA Center	BORDER ROUTER	Device	29	3	6	Jun 22, 2020 4:48 AM
P3	Device time has drifted from Cisco DNA Center	ACCESS	Device	13	2	2	Jun 22, 2020 2:41 AM
P3	Device time has drifted from Cisco DNA Center	UNKNOWN	Device	1	0	1	Jun 21, 2020 8:39 PM

Tech tip

For further details, see the [Cisco DNA Center Assurance User Guide](#).

#### Procedure 4. View Fabric provisioning details in the Cisco DNA Center task status

Use this procedure to verify the configuration that is deployed on the SD-Access devices.

- Step 1.** In Cisco DNA Center, navigate to **Provision > Fabric**.
- Step 2.** Select the fabric site in the **Fabrics** section.
- Step 3.** Select the site from the hierarchy list in the left panel.
- Step 4.** Click **Show Task Status**.

© 2021 Cisco and/or its affiliates. All rights reserved.

Page 129 of 148

**Cisco DNA Center**

Find Hierarchy

- Fabric-RTP
  - North America
    - Region - RTP**

Find by device IP, type, role, family & MAC

**Fabric Infrastructure** Host Onboarding [Show Task Status](#)

Collapse All Custom View Sep 16, 2021 5:24 PM

**Step 5.** Under a task, select **Provision Details** to view the details.

**Cisco DNA Center**

Find Hierarchy

- Fabric-RTP
  - North America
    - Region - RTP**

**Fabric Infrastructure**

**Task Monitor**

Filter

Last Updated Sep 15, 2021 5:26 PM [Refresh](#)

**Modifying Port Assignment for A-3850mc.sda-lab.local at Region - RTP** **DEPLOYED**

- Task Id: 0a3b82f7-56dc-49b3-9036-6743b255c342
- Start Time: Sep 16, 2021 11:24 AM
- End Time: Sep 16, 2021 11:25 AM


[Device Details](#) [Provision Details](#)

**Modifying Port Assignment for A-9407a.sda-lab.local at Region - RTP** **DEPLOYED**

- Task Id: f57dfc40-a480-435f-bbb8-0f4a99659fec
- Start Time: Sep 16, 2021 11:23 AM
- End Time: Sep 16, 2021 11:24 AM

[Device Details](#) [Provision Details](#)

**Step 6.** Click the network device in the **Fabric Infrastructure** tab, Select **Run Commands**

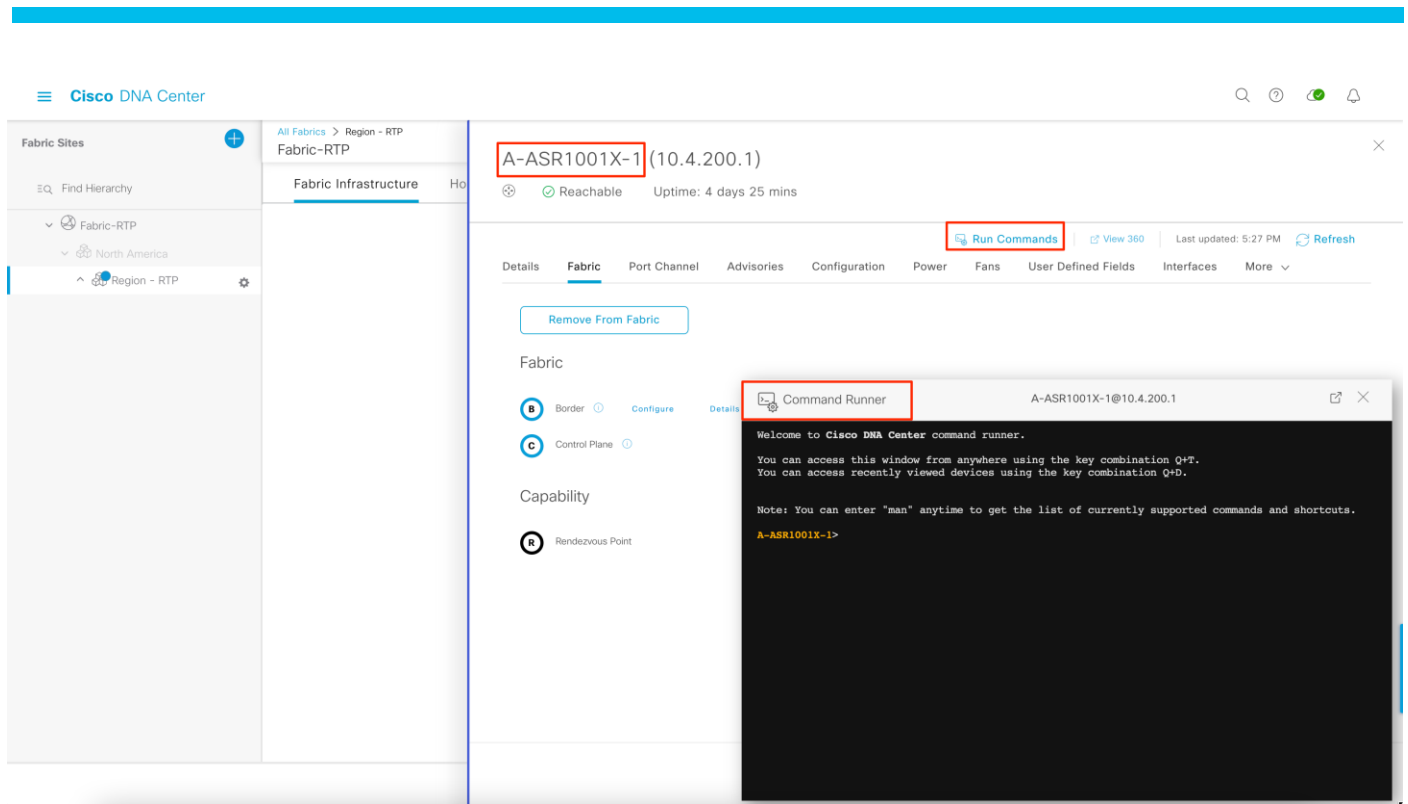

**Step 7.** In the **Command Runner** tab, issue the commands outlined in Table 5, Table 6 to view the fabric status.

**Table 5.** Verification Commands – SD-Access fabric Border, Control Plane

Command	Command Details
show lisp sessions	Displays the LISP control plane status to fabric Edge and Wireless Controller node.
Show ip bgp summary	Displays BGP neighborship state towards SD-WAN WAN transports.
Show ip bgp vpn4 all summary	Displays BGP neighborship state towards Peer Transit Networks for each Service VPN.
Show ip route vrf <Service_VPN>	Displays the routes learnt from the Peer Transit network device on specified Service VPN

**Table 6.** Verification Commands – SD-Access Edge

Command	Command Details
show lisp sessions	Displays the LISP control plane status to fabric Control Plane node
Show ip dhcp snooping binding	Displays DHCP snooping binding database table for all client connected on the edge node
Show authentication status	Displays authentication status for all clients connected to the edge port configured for authentication.
Show cts environment-data	Displays the Cisco Trustsec environment-data state downloaded from ISE.

## Process 2: Validating Policy Enforcement

Use this process to view that TrustSec policy that has been defined in Cisco DNA Center and that it has been provisioned with the SD-Access fabric devices.

### Procedure 1. View Group-Based Access Control policies and access contracts

This procedure uses the Cisco DNA Center Policy Application to view the configuration of the TrustSec Policy Matrix and the defined access contracts.

**Step 1.** Navigate to **Cisco DNA Center > Policy > Group-Based Access Control**.

**Step 2.** Select the **Policies** to view the TrustSec Policy Matrix.

The screenshot shows the Cisco DNA Center interface for the 'Policy - Group-Based Access Control' section. The 'Policies' tab is selected, displaying a matrix of policy enforcement for various source and destination groups. The matrix has columns for Source (Auditors, BYOD, Contractors, Developers, Development\_Ser..., Employees) and Destination (Auditors, BYOD, Contractors, Developers, Development\_Ser..., Employees, External, Guests, Internet, IoT\_Devices, IP\_Phones, Network\_Serv..., PD\_Services, Policy\_of\_Role..., Production\_Ser..., Production\_Use..., Quarantined\_S..., Test\_Services, TrustSec\_Conic..., Unknown). A yellow cell is visible at the intersection of Contractors (Source) and Contractors (Destination). The interface includes a search bar, a 'Policy - Group-Based Access Control' label, and a 'Policies (1)' header with a 'Enter full screen' link. There are also buttons for 'Filter', 'Deploy', and 'Refresh', and a legend for Permit (green), Deny (red), Custom (yellow), and Default (grey).

**Step 3.** Select the **Access Contracts** tab to view the predefined and custom contracts.

The screenshot shows the Cisco DNA Center interface for the 'Policy - Group-Based Access Control' section. The 'Access Contracts' tab is selected, displaying a list of access contracts. The table has columns for Name, Description, Created in, Rules Count, and Policies. The contracts listed are: AllowDHCPDNS, AllowWeb, Deny IP, Deny\_IP\_Log, DenyRemoteServices, EMPLOYEES\_CONTRACTORS\_LIMIT, Permit IP, and Permit\_IP\_Log. The 'EMPLOYEES\_CONTRACTORS\_LIMIT' contract has a '1' in the 'Policies' column. The interface includes a search bar, a 'Policy - Group-Based Access Control' label, and an 'Access Contracts (8)' header. There are also buttons for 'Filter', 'Actions', 'Deploy', 'Refresh', and 'Create Access Contract'.

Name	Description	Created in	Rules Count	Policies
AllowDHCPDNS	Sample contract to allow DHCP and DNS		2	0
AllowWeb	Sample contract to allow access to Web		2	0
Deny IP	Deny IP SGACL			0
Deny_IP_Log	Deny IP with logging			0
DenyRemoteServices	Sample contract to block Remote Access and telnet services		4	0
EMPLOYEES_CONTRACTORS_LIMIT	Limited Communication between Employees and Contractors		4	1
Permit IP	Permit IP SGACL			0
Permit_IP_Log	Permit IP with logging			0


### Procedure 2. Verify policy configuration on edge nodes

This procedure uses the Cisco DNA Center Command Runner functionality to verify the policy configuration on edge nodes.

**Step 1.** Navigate to **Cisco DNA Center > Provision > Fabric**.



- Step 2.** Select the fabric site in the **Fabrics** section.
- Select the site from the hierarchy list in the left panel.
- Select the **Fabric Infrastructure** tab and the **Fabric Edge** node

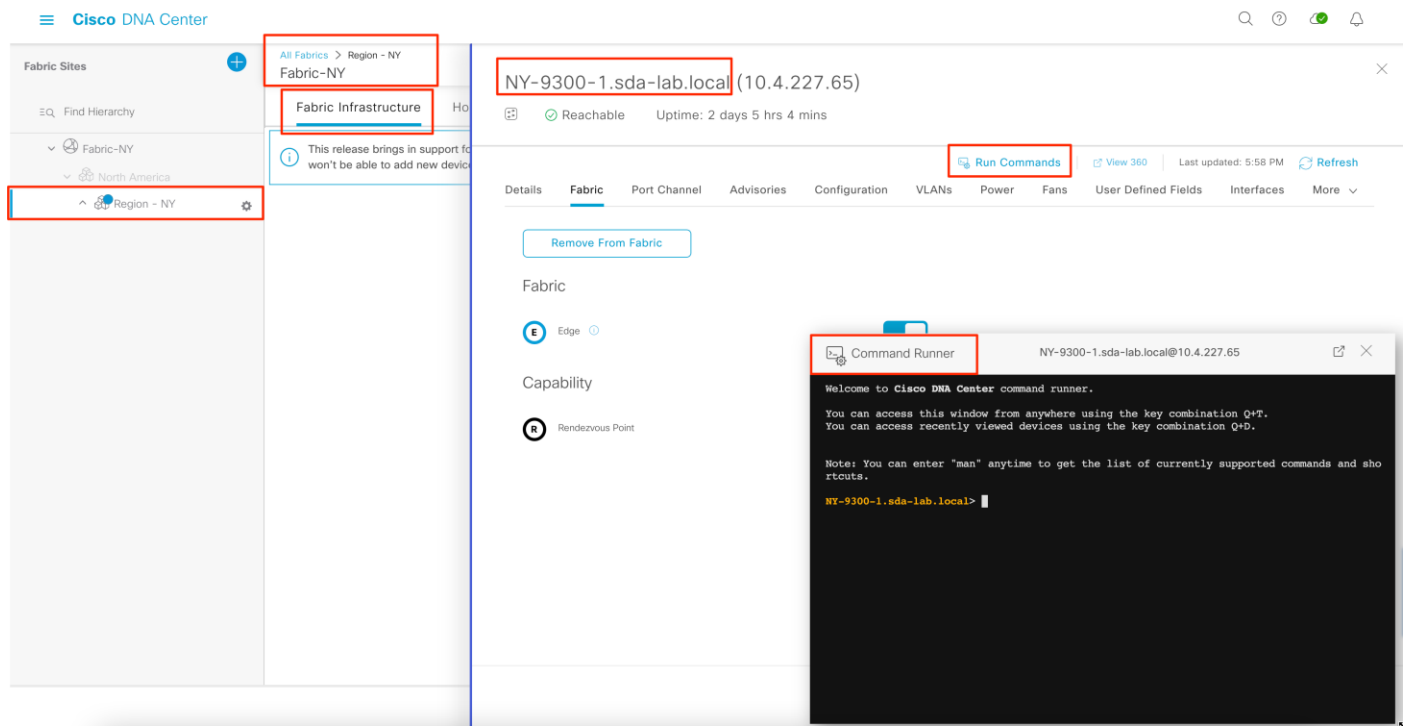

- Step 3.** In the **Command Runner** tab, issue the commands outlined in Table 7 to view the policy configuration status.

**Table 7.** Policy Verification Commands – SD-Access Edge Node

Command	Command Details
show cts environment-data	Displays the Cisco TrustSec environment data downloaded from ISE
show authentication sessions interface <interface_id> details	Displays authentication details, associated authorization profile, SGT tag, and associated security group-based policy for the endpoint connected on the interface
show cts role-based permissions	Displays the Security Group-Based policy downloaded from ISE for enforcement
show cts role-based counters	Displays the packets denied or permitted based on the defined Group-Based Access policy

## Process 3: Monitoring SD-WAN Edge device


Use this process to view the status of the TrustSec configuration on the WAN Edge routers.

### Procedure 1. Monitor IOS-XE WAN Edge router health and connection status

- Step 1.** Navigate to **vManage > Monitor > Network**.

**Step 2.** Select the WAN Edge from the list.

**Step 3.** Select **System Status** option from the left panel

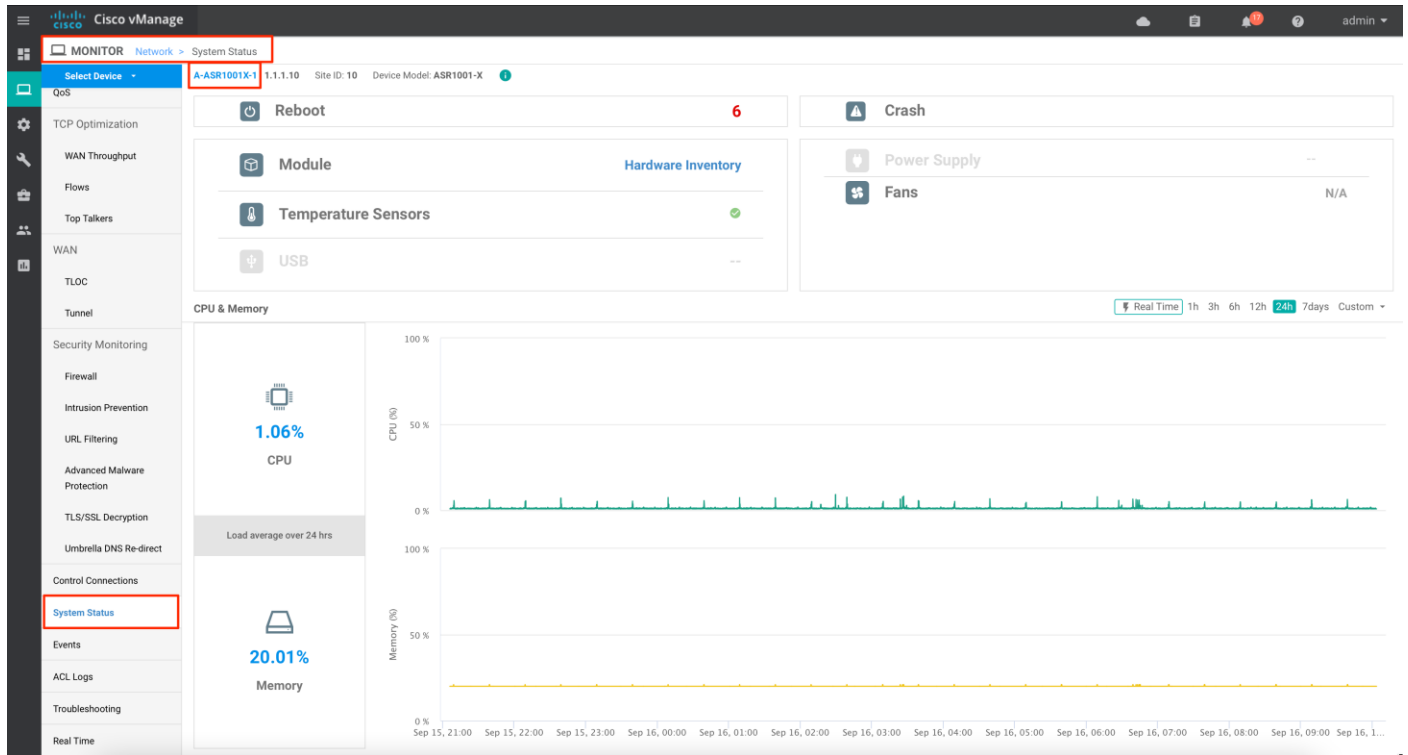

**Step 4.** Select the **Real Time** option from the left panel.

**Step 5.** In the **Device Options** box, search for the following:

**IP Route** and filter for certain Service VPN

**Control Connections**

**BFD Session**

Last Updated	Outgoing Interface	Destination Prefix	VPN ID	Source Protocol	Next Hop Address	Device IP	Hostname	AF Type	Default Rib	Route Preference
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.210.12/30	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.210.16/30	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.210.125/32	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.210.126/32	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.211.0/25	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.211.128/25	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.218.0/30	100	rt-ext-omp	1.1.1.10	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.218.16/30	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	GigabitEthernet0/0/2	10.4.227.65/32	100	rt-ext-omp	10.4.227.67	12.12.12.1	RS12-ISR433...	ipv4	false	115
16 Sep 2021 6:37:58 PM PDT	GigabitEthernet0/0/2	10.4.227.66/31	100	rt-ext-is-is	0.0.0.0	12.12.12.1	RS12-ISR433...	ipv4	false	0
16 Sep 2021 6:37:58 PM PDT	GigabitEthernet0/0/2	10.4.227.66/32	100	direct	0.0.0.0	12.12.12.1	RS12-ISR433...	ipv4	false	0
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.246.0/24	100	direct	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.247.0/24	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.248.0/24	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.249.0/24	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.4.250.0/24	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.5.0.0/30	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Loopback0	10.5.205.18/32	100	rt-ext-omp	0.0.0.0	12.12.12.1	RS12-ISR433...	ipv4	false	0
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.5.207.0/30	100	direct	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.5.207.4/30	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.5.207.24/30	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251
16 Sep 2021 6:37:58 PM PDT	Sdwan-system-intf	10.5.207.28/30	100	rt-ext-omp	1.1.1.11	12.12.12.1	RS12-ISR433...	ipv4	false	251

## Procedure 2. View the Audit Logs in the SD-WAN vManage controller


Use this procedure to view Audit Logs, config shared by DNA Center to vManage to provision the WAN Edge device.

### Step 1. In vManage, navigate to Monitor > Audit Log


### Step 2. In the search tab, input Cisco DNA Center IP Address to filter configuration that is shared and provisioned to the WAN Edge device by vManage controller.

Timestamp	User	User IP	Message	Module	Feature	Device	Task ID
25 Sep 2021 3:10:38 PM PDT	admin	10.4.249.51	Completed template push to device.	template	template-device...	vedge-ISR4331/K9-FDO2012092M	push_template_configuration-1cc...
25 Sep 2021 3:10:10 PM PDT	admin	10.4.249.51	Device Validation Template device config - Validation s...	template	template-device...	Validation	push_template_configuration-1cc...
25 Sep 2021 3:09:59 PM PDT	admin	10.4.249.51	Template RS12-ISR4431-21 successfully attached to d...	template	template-device...	12.12.12.2	push_template_configuration-1aa...
25 Sep 2021 3:09:58 PM PDT	admin	10.4.249.51	Completed template push to device.	template	template-device...	vedge-ISR4431/K9-FOC2228200S	push_template_configuration-1aa...
25 Sep 2021 3:09:30 PM PDT	admin	10.4.249.51	Device Validation Template device config - Validation s...	template	template-device...	Validation	push_template_configuration-1aa...
25 Sep 2021 3:09:24 PM PDT	admin	10.4.249.51	Template RS12-ISR4331-18 successfully attached to d...	template	template-device...	12.12.12.1	push_template_configuration-bb1...
25 Sep 2021 3:09:23 PM PDT	admin	10.4.249.51	Completed template push to device.	template	template-device...	vedge-ISR4331/K9-FDO2012092M	push_template_configuration-bb1...

**Step 3.** Select a **task** and click the three dots (...) to view the **Audit Log Details** or **CLI Diff**

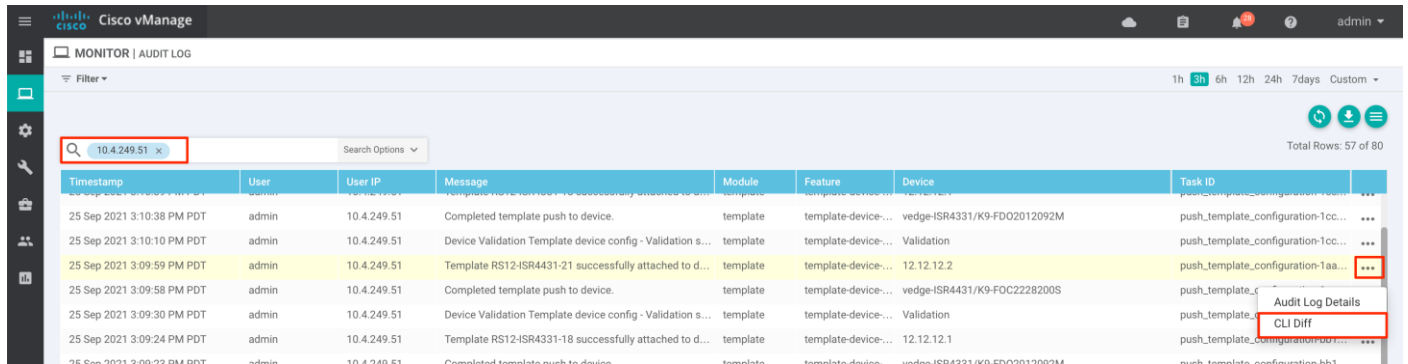

In the **Config Diff** window, select **Side by Side** to view the **Old Configuration** and the **New Configuration**

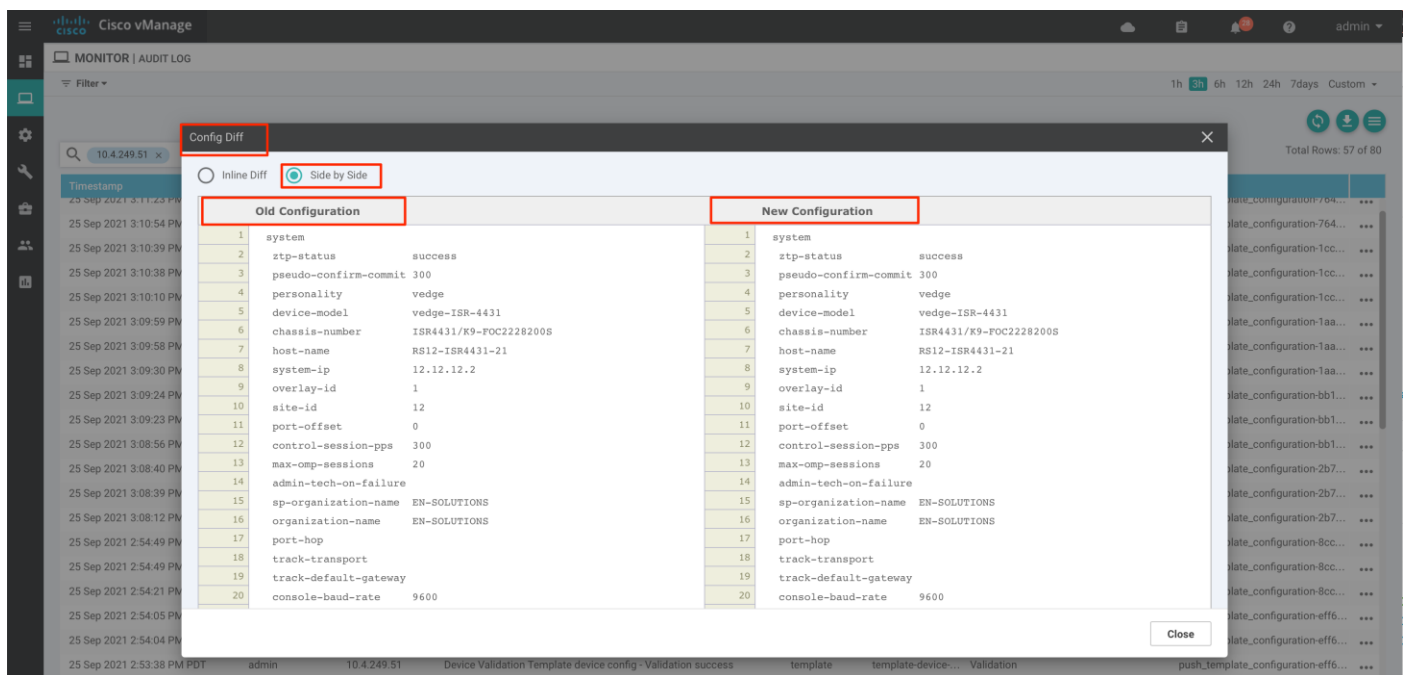

## Appendix A: Hardware and Software Versions

The following products and software versions were included as part of validation in this deployment guide, and this validated set is not inclusive of all possibilities. Additional hardware options are listed in the associated [SD-Access Compatibility Matrix](#) and the [Cisco DNA Center data sheets](#). These documents may have guidance beyond what was tested as part of this guide. Updated Cisco DNA Center package files are regularly released and available within the packages and updates listing in the [release notes](#).

**Table 8.** Cisco SD-WAN Infrastructure

Product	Part number	Software version
Cisco vSmart	viptela-smart-20.3.4-genericx86-64.ova	20.3.4
Cisco vManage	viptela-vmanage-20.3.4-genericx86-64.ova	20.3.4
Cisco vBond	viptela-edge-20.3.4-genericx86-64.ova	20.3.4

Product	Part number	Software version
ASR 1001-X Series	ASR1001-X	17.3.4a
ISR 4300 Series	ISR4331/K9	17.3.4a

**Table 9.** Device Platform, Model, and Software Version

Platform	Model (PID)	Software code version
Cisco DNA Center	DN2-HW-APL-L	Cisco DNA Center 2.2.2.5
Identity Services Engine	R-ISE-VMS-K9	ISE 3.0 Patch 2
Catalyst 9300 Series	C9300-48U	17.3.4
Catalyst 9400 Series	C9400-48U	17.3.4
WLC 8540 Series	AIR-CT8540-K9	8.10.151.0
Cisco Catalyst 9800 Embedded Wireless on C9300, C9400, C9500 Series Switch	C9300 Embedded Wireless	17.3.4

**Table 10.** Cisco SD-Access fabric devices

Product	SD-Access fabric role
Catalyst 9300 Series Switches	Fabric Edge, Embedded Wireless
Cisco ASR 1000-X Series Aggregation Services Routers	Colocated Border and Control Plane Node
Catalyst 9300 Series Switches	Edge Nodes
Catalyst 9400 Series Switches	Edge Nodes

**Table 11.** Cisco DNA Center Package Versions

Package name - GUI	Software version
System	1.6.424
System Commons	2.1.365.62360
Access Control Application	2.1.365.62360
AI Endpoint Analytics	1.4.365
AI Network Analytics	2.6.9.453
Application Hosting	1.6.0.2107090810
Application Policy	2.1.364.170201
Application Registry	2.1.364.170201
Application Visibility Service	2.1.364.170201

Package name - GUI	Software version
Assurance - Base	2.2.2.411
Assurance - Sensor	2.2.2.404
Automation - Base	2.1.365.62360
Automation - Intelligent Capture	2.1.365.62360
Automation - Sensor	2.1.365.62360
Cisco DNA Center Global Search	1.5.0.362
Cisco DNA Center Platform	1.5.1.137
Cisco DNA Center UI	1.6.2.432
Cisco Umbrella	2.1.364.592099
Cloud Connectivity - Contextual Content	1.3.1.359
Cloud Connectivity - Data Hub	1.6.0.380
Cloud Connectivity - Tethering	2.12.1.2
Cloud Device Provisioning Application	2.1.365.62360
Command Runner	2.1.365.62360
Device Onboarding	2.1.365.62360
Disaster Recovery	2.1.364.362034
Group-Based Policy Analytics	2.2.1.226
Image Management	2.1.365.62360
Machine Reasoning	2.1.364.212034
NCP - Base	2.1.365.62360
NCP - Services	2.1.365.62360
Network Controller Platform	2.1.365.62360
Network Data Platform - Base Analytics	1.6.1019
Network Data Platform - Core	1.6.579
Network Data Platform - Manager	1.6.541
Network Experience Platform - Core	2.1.365.62360
Path Trace	2.1.365.62360
RBAC Extensions	2.1.364.1910003
Rogue and aWIPS	2.2.0.45

---

Package name - GUI	Software version
SD Access	2.1.365.62360
Stealthwatch Security Analytics	2.1.364.1091088
Wide Area Bonjour	2.4.363.75002

---

## Appendix B: References Used in This Guide

**Cisco 4000 Series Integrated Services Router Gigabit Ethernet WAN Modules Data Sheet:**

<https://www.cisco.com/c/en/us/products/collateral/routers/4000-series-integrated-services-routers-isr/datasheet-c78-730527.html>

**Cisco DNA Center Assurance User Guides:** <https://www.cisco.com/c/en/us/support/cloud-systems-management/dna-center/products-user-guide-list.html>

**Cisco SD-Access and Cisco DNA Center Management Infrastructure:** <https://cs.co/sda-infra-pdg>

**Cisco SD-Access Fabric Provisioning Prescriptive Deployment Guide:** <https://cs.co/sda-fabric-pdg>

**Cisco SD-Access for Distributed Campus Prescriptive Deployment Guide:** <https://cs.co/sda-distrib-pdg>

**Cisco SD-Access Solution Design Guide:** <https://cs.co/sda-cvd>

**Cisco SD-Access Solution Design Guide, SD-Access Operational Planes Chapter:**

<https://www.cisco.com/c/en/us/td/docs/solutions/CVD/Campus/cisco-sda-design-guide.html#SDAccessOperationalPlanes>

**Cisco SD-WAN Design Guide:** <https://www.cisco.com/c/en/us/td/docs/solutions/CVD/SDWAN/cisco-sdwan-design-guide.html>

**Cisco SD-WAN Edge Onboarding Prescriptive Deployment Guide:**

<https://www.cisco.com/c/dam/en/us/td/docs/solutions/CVD/SDWAN/sd-wan-wan-edge-onboarding-deploy-guide-2020jan.pdf>

**Cisco SD-WAN End-to-End Deployment Guide:** <https://www.cisco.com/c/dam/en/us/td/docs/solutions/CVD/SDWAN/SD-WAN-End-to-End-Deployment-Guide.pdf>

**Cisco vManage How-Tos for Cisco IOS XE SD-WAN Devices, Chapter: What's New in Cisco vManage:**

[https://www.cisco.com/c/en/us/td/docs/routers/sdwan/vManage\\_How-Tos/vmanage-howto-xe-book/whats-new.html](https://www.cisco.com/c/en/us/td/docs/routers/sdwan/vManage_How-Tos/vmanage-howto-xe-book/whats-new.html)

**Overview of TrustSec Guide, Configuring Native SGT Propagation (Tagging):**

[https://www.cisco.com/c/dam/en/us/solutions/collateral/borderless-networks/trustsec/C07-730151-00\\_overview\\_of\\_trustSec\\_og.pdf](https://www.cisco.com/c/dam/en/us/solutions/collateral/borderless-networks/trustsec/C07-730151-00_overview_of_trustSec_og.pdf)

**Release Notes for Cisco IOS XE SD-WAN Devices, Cisco IOS XE Release Amsterdam 17.3.x:**

[https://www.cisco.com/c/en/us/td/docs/routers/sdwan/release/notes/xe-17-3/sd-wan-rel-notes-xe-17-3.html#concept\\_ecj\\_kyz\\_blb](https://www.cisco.com/c/en/us/td/docs/routers/sdwan/release/notes/xe-17-3/sd-wan-rel-notes-xe-17-3.html#concept_ecj_kyz_blb)



---

## Appendix C: Acronym Glossary

**AAA**—Authentication, Authorization, and Accounting

**ACP**—Access Control Policy

**ACI**—Cisco Application Centric Infrastructure

**ACK**—Acknowledge or Acknowledgement

**ACL**—Access Control List

**AD**—Microsoft Active Directory

**AFI**—Address Family Identifier

**AMP**—Cisco Advanced Malware Protection

**AP**—Access Point

**API**—Application Programming Interface

**APIC**—Cisco Application Policy Infrastructure Controller (ACI)

**ASA**—Cisco Adaptive Security Appliance

**ASM**—Any-Source Multicast (PIM)

**ASR**—Aggregation Services Router

**Auto-RP**—Cisco Automatic Rendezvous Point protocol (multicast)

**AVC**—Application Visibility and Control

**BFD**—Bidirectional Forwarding Detection

**BGP**—Border Gateway Protocol

**BMS**—Building Management System

**BSR**—Bootstrap Router (multicast)

**BYOD**—Bring Your Own Device

**CAPWAP**—Control and Provisioning of Wireless Access Points Protocol

**CDP**—Cisco Discovery Protocol

**CEF**—Cisco Express Forwarding

**CMD**—Cisco Meta Data

**CPU**—Central Processing Unit

**CSR**—Cloud Services Routers

**CTA**—Cognitive Threat Analytics

**CUWN**—Cisco Unified Wireless Network

**CVD**—Cisco Validated Design

**CYOD**—Choose Your Own Device

---

**DC**—Data Center

**DHCP**—Dynamic Host Configuration Protocol

**DM**—Dense-Mode (multicast)

**DMVPN**—Dynamic Multipoint Virtual Private Network

**DMZ**—Demilitarized Zone (firewall/networking construct)

**DNA**—Cisco Digital Network Architecture

**DNS**—Domain Name System

**DORA**—Discover, Offer, Request, ACK (DHCP Process)

**DWDM**—Dense Wavelength Division Multiplexing

**ECMP**—Equal Cost Multi Path

**EID**—Endpoint Identifier

**EIGRP**—Enhanced Interior Gateway Routing Protocol

**EMI**—Electromagnetic Interference

**ETR**—Egress Tunnel Router (LISP)

**EVPN**—Ethernet Virtual Private Network (BGP EVPN with VXLAN data plane)

**FHR**—First-Hop Router (multicast)

**FHRP**—First-Hop Redundancy Protocol

**FMC**—Cisco Firepower Management Center

**FTD**—Cisco Firepower Threat Defense

**GBAC**—Group-Based Access Control

**GbE**—Gigabit Ethernet

**Gbit/s**—Gigabits Per Second (interface/port speed reference)

**GRE**—Generic Routing Encapsulation

**GRT**—Global Routing Table

**HA**—High-Availability

**HQ**—Headquarters

**HSRP**—Cisco Hot-Standby Routing Protocol

**HTDB**—Host-tracking Database (SD-Access control plane node construct)

**IBNS**—Identity-Based Networking Services (IBNS 2.0 is the current version)

**ICMP**—Internet Control Message Protocol

**IDF**—Intermediate Distribution Frame; essentially a wiring closet.

**IEEE**—Institute of Electrical and Electronics Engineers

---

**IETF**—Internet Engineering Task Force

**IGP**—Interior Gateway Protocol

**IID**—Instance-ID (LISP)

**IOE**—Internet of Everything

**IoT**—Internet of Things

**IP**—Internet Protocol

**IPAM**—IP Address Management

**IPS**—Intrusion Prevention System

**IPSec**—Internet Protocol Security

**ISE**—Cisco Identity Services Engine

**ISR**—Integrated Services Router

**IS-IS**—Intermediate System to Intermediate System routing protocol

**ITR**—Ingress Tunnel Router (LISP)

**LACP**—Link Aggregation Control Protocol

**LAG**—Link Aggregation Group

**LAN**—Local Area Network

**L2 VNI**—Layer 2 Virtual Network Identifier; as used in SD-Access Fabric, a VLAN.

**L3 VNI**—Layer 3 Virtual Network Identifier; as used in SD-Access Fabric, a VRF.

**LHR**—Last-Hop Router (multicast)

**LISP**—Location Identifier Separation Protocol

**MAC**—Media Access Control Address (OSI Layer 2 Address)

**MAN**—Metro Area Network

**MEC**—Multichassis EtherChannel, sometimes referenced as *MCEC*

**MDF**—Main Distribution Frame; essentially the central wiring point of the network.

**MnT**—Monitoring and Troubleshooting Node (Cisco ISE persona)

**MOH**—Music on Hold

**MPLS**—Multiprotocol Label Switching

**MR**—Map-resolver (LISP)

**MS**—Map-server (LISP)

**MSDP**—Multicast Source Discovery Protocol (multicast)

**MTU**—Maximum Transmission Unit

**NAC**—Network Access Control

---

**NAD**—Network Access Device

**NAT**—Network Address Translation

**NBAR**—Cisco Network-Based Application Recognition (NBAR2 is the current version).

**NFV**—Network Functions Virtualization

**NSF**—Non-Stop Forwarding

**OMP**— Overlay Management Protocol

**OSI**—Open Systems Interconnection model

**OSPF**—Open Shortest Path First routing protocol

**OT**—Operational Technology

**PAgP**—Port Aggregation Protocol

**PAN**—Primary Administration Node (Cisco ISE persona)

**PCI DSS**—Payment Card Industry Data Security Standard

**PD**—Powered Devices (PoE)

**PETR**—Proxy-Egress Tunnel Router (LISP)

**PIM**—Protocol-Independent Multicast

**PITR**—Proxy-Ingress Tunnel Router (LISP)

**PnP**—Plug-n-Play

**PoE**—Power over Ethernet (generic term, may also refer to IEEE 802.3af, 15.4W at PSE)

**PoE+**—Power over Ethernet Plus (IEEE 802.3at, 30W at PSE)

**PSE**—Power Sourcing Equipment (PoE)

**PSN**—Policy Service Node (Cisco ISE persona)

**pxGrid**—Platform Exchange Grid (Cisco ISE persona and publisher/subscriber service)

**PxTR**—Proxy-Tunnel Router (LISP – device operating as both a PETR and PITR)

**QoS**—Quality of Service

**RADIUS**—Remote Authentication Dial-In User Service

**REST**—Representational State Transfer

**RFC**—Request for Comments Document (IETF)

**RIB**—Routing Information Base

**RLOC**—Routing Locator (LISP)

**RP**—Rendezvous Point (multicast)

**RP**—Redundancy Port (WLC)

**RP**—Route Processor

---

**RPF**—Reverse Path Forwarding

**RR**—Route Reflector (BGP)

**RTT**—Round-Trip Time

**SA**—Source Active (multicast)

**SAFI**—Subsequent Address Family Identifiers (BGP)

**SD**—Software-Defined

**SDA**—Cisco Software Defined-Access

**SD-Access**—Cisco Software Defined-Access

**SDN**—Software-Defined Networking

**SD-WAN**—Cisco Software-Defined WAN

**SFP**—Small Form-Factor Pluggable (1 GbE transceiver)

**SFP+**— Small Form-Factor Pluggable (10 GbE transceiver)

**SGACL**—Security-Group ACL

**SGT**—Scalable Group Tag, sometimes reference as Security Group Tag

**SM**—Spare-mode (multicast)

**SNMP**—Simple Network Management Protocol

**SSID**—Service Set Identifier (wireless)

**SSM**—Source-Specific Multicast (PIM)

**SSO**—Stateful Switchover

**STP**—Spanning-tree protocol

**SVI**—Switched Virtual Interface

**SVL**—Cisco StackWise Virtual

**SWIM**—Software Image Management

**SXP**—Scalable Group Tag Exchange Protocol

**Syslog**—System Logging Protocol

**TACACS+**—Terminal Access Controller Access-Control System Plus

**TCP**—Transmission Control Protocol (OSI Layer 4)

**UCS**— Cisco Unified Computing System

**UDP**—User Datagram Protocol (OSI Layer 4)

**UPOE**—Cisco Universal Power Over Ethernet (60W at PSE)

**UPOE+**— Cisco Universal Power Over Ethernet Plus (90W at PSE)

**URL**—Uniform Resource Locator

---

**VLAN**—Virtual Local Area Network

**VN**—Virtual Network, analogous to a VRF in SD-Access

**VNI**—Virtual Network Identifier (VXLAN)

**vPC**—virtual PortChannel (Cisco Nexus®)

**VPLS**—Virtual Private LAN Service

**VPN**—Virtual Private Network

**VPNv4**—BGP address family that consists of a Route-Distinguisher (RD) prepended to an IPv4 prefix

**VPWS**—Virtual Private Wire Service

**VRF**—Virtual Routing and Forwarding

**VSL**—Virtual Switch Link (Cisco VSS component)

**VSS**—Cisco Virtual Switching System

**VXLAN**—Virtual Extensible LAN

**WAN**—Wide-Area Network

**WLAN**—Wireless Local Area Network (generally synonymous with IEEE 802.11-based networks)

**WoL**—Wake-on-LAN

**xTR**—Tunnel Router (LISP – device operating as both an ETR and ITR)

---

## Appendix D: Recommended for You

Cisco IBNG / Enterprise Networking Validated Design and Deployment Guides: <https://cs.co/en-cvds>

Deploying SD-Access Embedded Wireless on Catalyst® 9300 switches: <https://community.cisco.com/t5/networking-documents/cisco-sd-access-embedded-wireless-on-catalyst-9300-deployment/ta-p/3886635>

Cisco SD-Access Segmentation Design Guide: <https://www.cisco.com/c/dam/en/us/td/docs/solutions/CVD/SDWAN/CVD-SD-WAN-Design-2018OCT.pdf>

Cisco SD-WAN Design Guide: <https://www.cisco.com/c/dam/en/us/td/docs/solutions/CVD/SDWAN/sd-wan-wan-edge-onboarding-deploy-guide-2019dec.pdf>

Cisco SD-WAN: WAN Edge Onboarding Deployment Guide:  
<https://www.cisco.com/c/dam/en/us/td/docs/solutions/CVD/SDWAN/sd-wan-wan-edge-onboarding-deploy-guide-2019dec.pdf>

Cisco SD-WAN Enabling Direct Internet Access Deployment Guide:  
<https://www.cisco.com/c/en/us/td/docs/solutions/CVD/SDWAN/CVD-SD-WAN-DIA-2019JUL.html>

Cisco SD-WAN Application-Aware Routing Deployment Guide:  
<https://www.cisco.com/c/en/us/td/docs/solutions/CVD/SDWAN/cisco-sdwan-application-aware-routing-deploy-guide.html>

---

## Feedback

For comments and suggestions about this guide and related guides, join the discussion on [Cisco Community](https://cs.co/en-cvds) at <https://cs.co/en-cvds>.

**Americas Headquarters**  
Cisco Systems, Inc.  
San Jose, CA

**Asia Pacific Headquarters**  
Cisco Systems (USA) Pte. Ltd.  
Singapore

**Europe Headquarters**  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)