

SAR TEST REPORT

No. I14N01535-SAR

For

TCL Communication Ltd.

HSUPA/HSDPA/UMTS Dual band/GSM Quad band mobile phone

Model Name: 4023A

With

Hardware Version: PIO

Software Version: v7G1D

FCC ID: 2ACCJH008

Issued Date: 2015-01-05



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504


Email: cttl terminals@catr.cn, website: www.chinattl.com




Picture 1: front side of the sample




Picture 2: back side of the sample

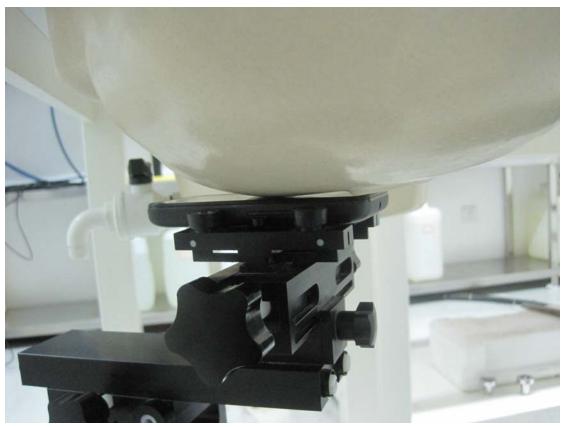


Picture 3: Left Hand Touch Cheek Position

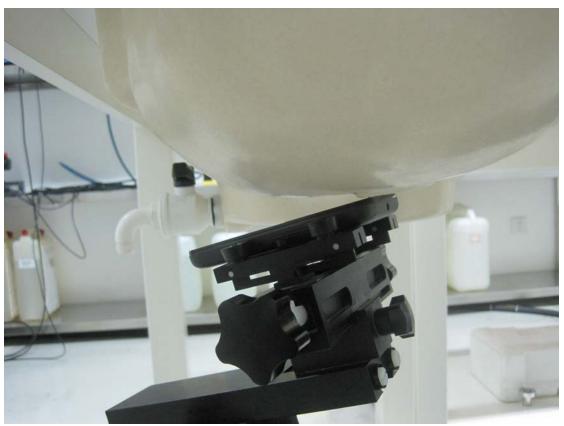

Picture 4: Left Hand Tilt 15° Position

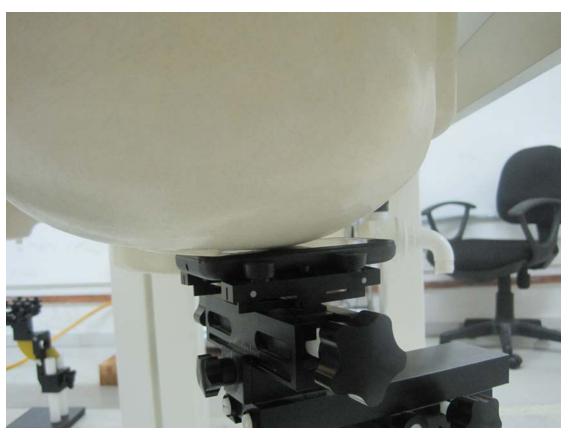


Picture 5: Right Hand Touch Cheek Position

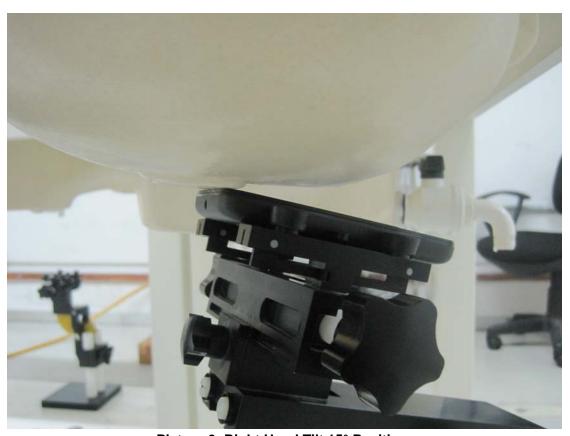

Picture 6: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following test positions all with the distance =10mm between the EUT and the phantom bottom:

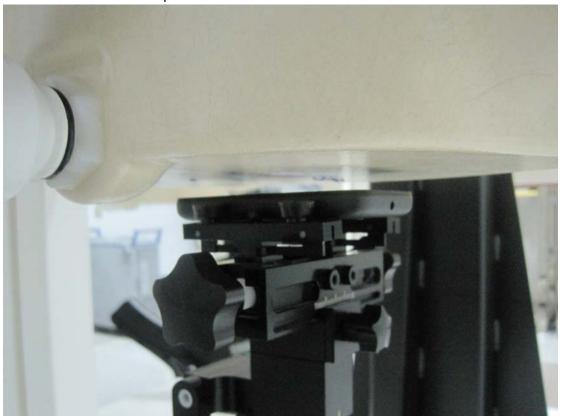


Picture 7: Front Side



Picture 8: Rear Side

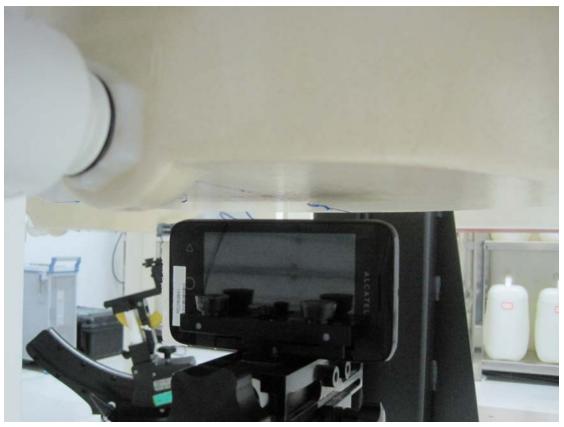

Picture 9: Left Side

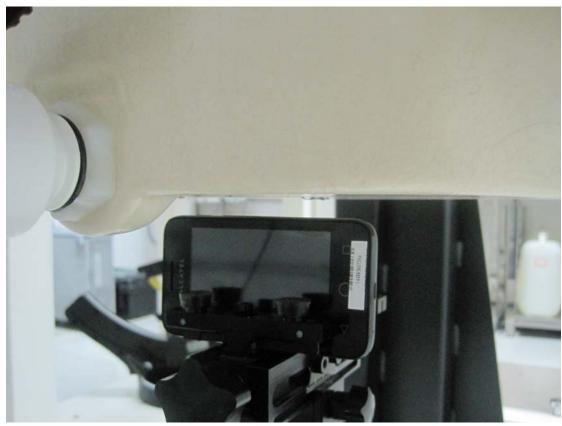

Picture 10: Right Side



Picture 11: Bottom Side



Picture 12:Rear Side with Headset