

TEST REPORT

Reference No...... : WTD25D02021541W003
FCC ID : 2AD6G-F82
Applicant..... : Rongta Technology (Xiamen) Group Co., Ltd.
Address..... : No.88, Tonghui South Road, Tongan, Xiamen City, China
Manufacturer : Rongta Technology (Xiamen) Group Co., Ltd.
Address..... : No.88, Tonghui South Road, Tongan, Xiamen City, China
Product..... : A4 Portable Printer
Model(s) : F82, F82 Plus, F82 PRO, F82 MAX, F82 Lite, F82A, F82B, F82C, F82D, F82E, F82F, F82H, F82M, F82N, F82S, F82Z, KM82, F83, F84, F85, R1, R2, R5, R11, R22, F***, R*** (*=0-9 or A-Z or Plus, PRO, MAX, Lite or blank)
Standards..... : FCC 47CFR Part 15.247
Date of Receipt sample : 2025-02-10
Date of Test : 2025-02-14 to 2025-02-25
Date of Issue..... : 2025-02-25
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Approved by:

James Cheng

James Cheng / Project Engineer

Deval Qin

Deval Qin / Designated Reviewer



2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION	5
4.1 General Description of E.U.T.....	5
4.2 Details of E.U.T.....	5
4.3 Channel List.....	5
4.4 Test Facility.....	6
4.5 Subcontracted.....	6
4.6 Abnormalities from Standard Conditions.....	6
4.7 Test Mode.....	6
5 TEST SUMMARY	7
6 EQUIPMENT USED DURING TEST	8
6.1 Equipments List.....	8
6.2 Description of Support Units.....	9
6.3 Measurement Uncertainty.....	9
6.4 Test Equipment Calibration.....	9
7 DUTY CYCLE	10
8 CONDUCTED EMISSION	11
8.1 E.U.T. Operation.....	11
8.2 EUT Setup.....	11
8.3 Measurement Description.....	11
8.4 Conducted Emission Test Result.....	12
9 RADIATED EMISSIONS	14
9.1 EUT Operation.....	14
9.2 Test Setup.....	15
9.3 Spectrum Analyzer Setup.....	16
9.4 Test Procedure.....	17
9.5 Corrected Amplitude & Margin Calculation.....	17
9.6 Summary of Test Results.....	18
10 CONDUCTED SPURIOUS EMISSIONS	24
10.1 Test Procedure.....	24
10.2 Test Result.....	25
11 BAND EDGE MEASUREMENT	31
11.1 Test Produce.....	31
11.2 Test Result.....	32
12 6 DB BANDWIDTH MEASUREMENT	33
12.1 Test Procedure.....	33
12.2 Test Result.....	33
13 MAXIMUM PEAK OUTPUT POWER	36
13.1 Test Procedure.....	36
13.2 Test Result.....	36
14 POWER SPECTRAL DENSITY	39

14.1	Test Procedure	39
14.2	Test Result.....	39
15	ANTENNA REQUIREMENT	42
16	RF EXPOSURE	42
17	PHOTOGRAPHS OF TEST SETUP AND EUT.....	42

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD25D02021541W003	2025-02-10	2025-02-14 to 2025-02-25	2025-02-25	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	A4 Portable Printer
Model(s):	F82, F82 Plus, F82 PRO, F82 MAX, F82 Lite, F82A, F82B, F82C, F82D, F82E, F82F, F82H, F82M, F82N, F82S, F82Z, KM82, F83, F84, F85, R1, R2, R5, R11, R22, F***, R*** (*=0-9 or A-Z or Plus, PRO, MAX, Lite or blank)
Model Description:	Only the model names and appearance colors are different. Model F82 was tested in the report.
Test Sample No.:	1-1/1
Bluetooth Version:	V5.0
Hardware Version:	F82_JL_BWU_V1.0_241031
Software Version:	F82_BWU_AC7916_300DPI_RT_V1.03_250120.bin

4.2 Details of E.U.T.

Operation Frequency:	2402~2480MHz
Max. RF output power:	1M: 3.98dBm, 2M: 4.46dBm
Type of Modulation:	GFSK
Antenna installation:	FPC Antenna
Antenna Gain:	1dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTEK lab has not verified the authenticity of its information.

Ratings: DC7.2V for battery

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

4.6 Abnormalities from Standard Conditions

None.

4.7 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

Note: Parameters set by test software during channel & power tests, the software provided by the applicant was used to set the operating channels as well as the maximum output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Calibration Due Date
Conducted Emissions 1#						
1	EMI Test Receiver	R&S	ESCI	100947	2024-07-18	2025-07-17
2	LISN	R&S	ENV216	100115	2024-07-18	2025-07-17
3	Cable	Top	TYPE16(3.5M)	-	2024-07-18	2025-07-17
3m Semi-anechoic Chamber for Radiation Emissions 1#						
1	Spectrum Analyzer	R&S	FSP30	100091	2024-04-22	2025-04-21
2	Amplifier	Agilent	8447D	2944A10178	2024-07-18	2025-07-17
3	Tri-log Broadband Antenna	SCHWARZBECK	VULB9163	336	2024-07-21	2025-07-20
4	Coaxial Cable	Top	TYPE16(13M)	-	2024-04-22	2025-04-21
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D	667	2024-01-23 2025-01-17	2025-01-22 2026-01-16
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2024-07-18	2025-07-17
7	Broadband Preamplifier	COMPLIANCE	PAP-1G18	2004	2024-07-18	2025-07-17
8	Coaxial Cable	Top	ZT26-NJ-NJ-8M/FA	-	2024-04-22	2025-04-21
9	Microwave Amplifier	SCHWARZBECK	BBV 9721	100472	2024-07-18	2025-07-17
10	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2024-04-22	2025-04-21
3m Semi-anechoic Chamber for Radiation Emissions 2#						
1	Test Receiver	R&S	ESCI	101296	2024-04-22	2025-04-21
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2024-11-04	2025-11-03
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2024-04-27	2025-04-26
4	Amplifier	ANRITSU	MH648A	M43381	2024-04-22	2025-04-21
5	Cable	HUBER+SUHNER	CBL2	525178	2024-04-22	2025-04-21
RF Conducted Testing						
1	Spectrum Analyzer	R&S	FSP40	100501	2024-07-18	2025-07-17
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-07-18	2025-07-17

Test Software:

Test Item	Software name	Software version
Conduction disturbance Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
notebook	dell	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

7 Duty Cycle


Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
GFSK 1M	2.124	2.508	0.85	84.69	0.72	-1.44
GFSK 2M	1.072	2.512	0.43	42.68	3.70	-7.40

Remark:


Duty cycle=On Time/period;

Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;

Average factor= $20 \log_{10} \text{Duty cycle}$

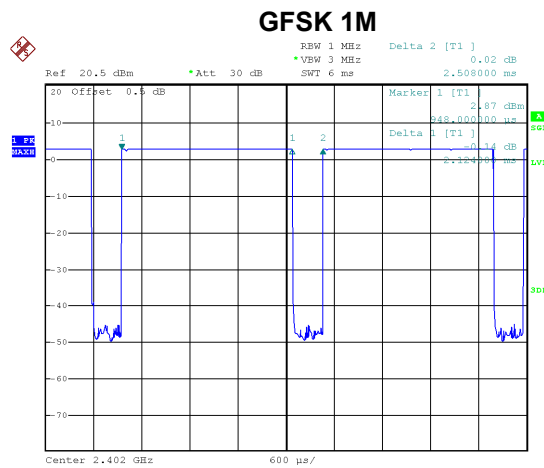

Date: 18.FEB.2025 09:04:13

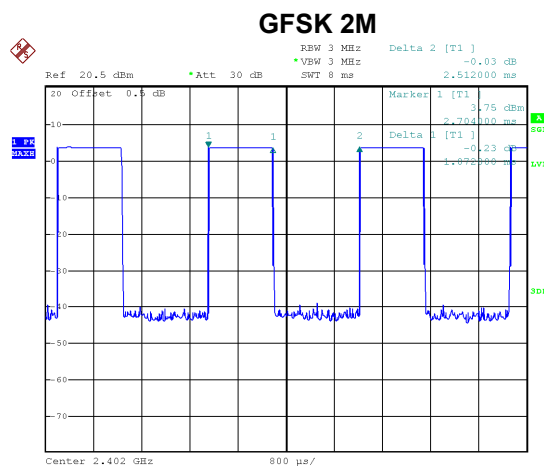

Date: 18.FEB.2025 10:20:15

8 Conducted Emission

Test Requirement: 47CFR FCC Part15 Subpart C §15.207

Test Method: ANSI C63.10-2020+A1-2024

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50

*Decreases with the logarithm of the frequency.

8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.1°C

Humidity: 44.2%RH


Atmospheric Pressure: 101.6kPa

EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2020+A1-2024.

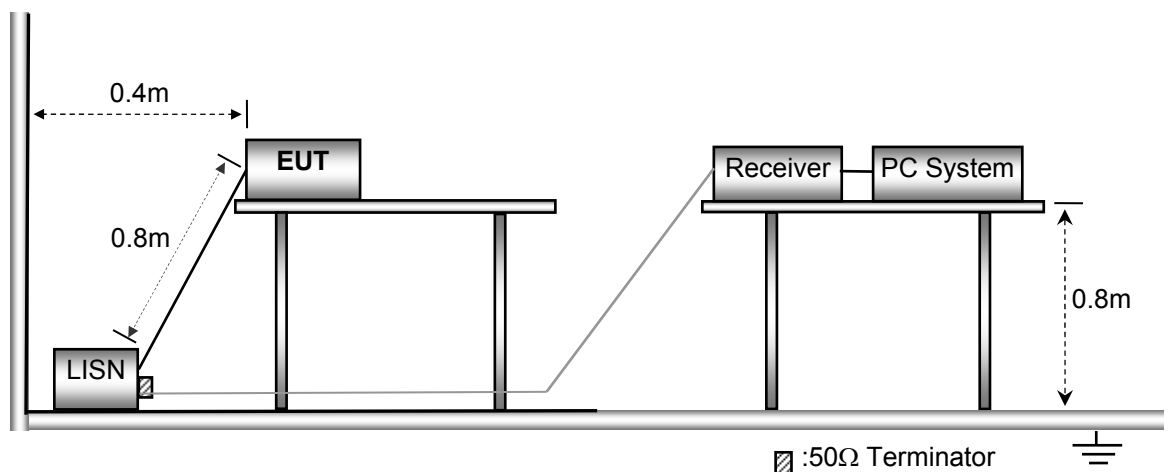


8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result


Remark: only the worst data (High channel mode) were reported

Live line:

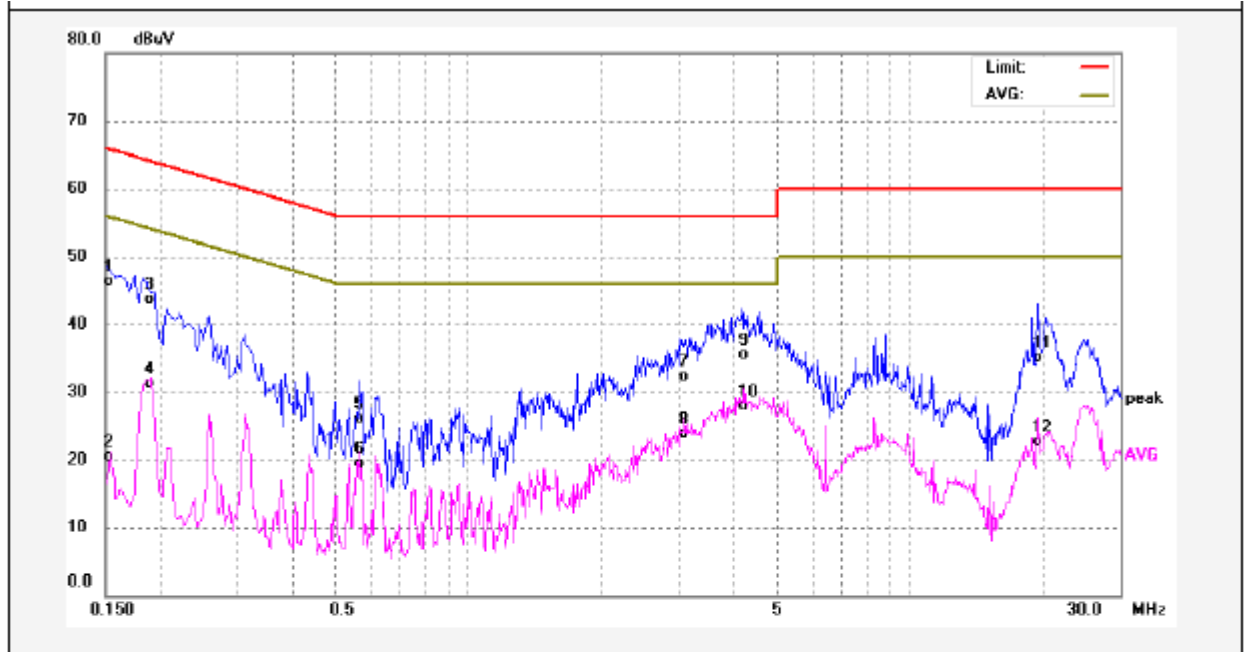

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	36.87	9.52	46.39	65.99	-19.60	QP	
2	0.1500	10.94	9.52	20.46	55.99	-35.53	AVG	
3	0.1900	34.07	9.54	43.61	64.03	-20.42	QP	
4	0.1900	21.86	9.54	31.40	54.03	-22.63	AVG	
5	0.5660	16.60	9.59	26.19	56.00	-29.81	QP	
6	0.5660	10.00	9.59	19.59	46.00	-26.41	AVG	
7	3.0860	22.63	9.69	32.32	56.00	-23.68	QP	
8	3.0860	14.16	9.69	23.85	46.00	-22.15	AVG	
9	4.1660	25.83	9.75	35.58	56.00	-20.42	QP	
10	4.1660	18.15	9.75	27.90	46.00	-18.10	AVG	
11	19.4420	24.87	10.15	35.02	60.00	-24.98	QP	
12	19.4420	12.49	10.15	22.64	50.00	-27.36	AVG	

Neutral line:

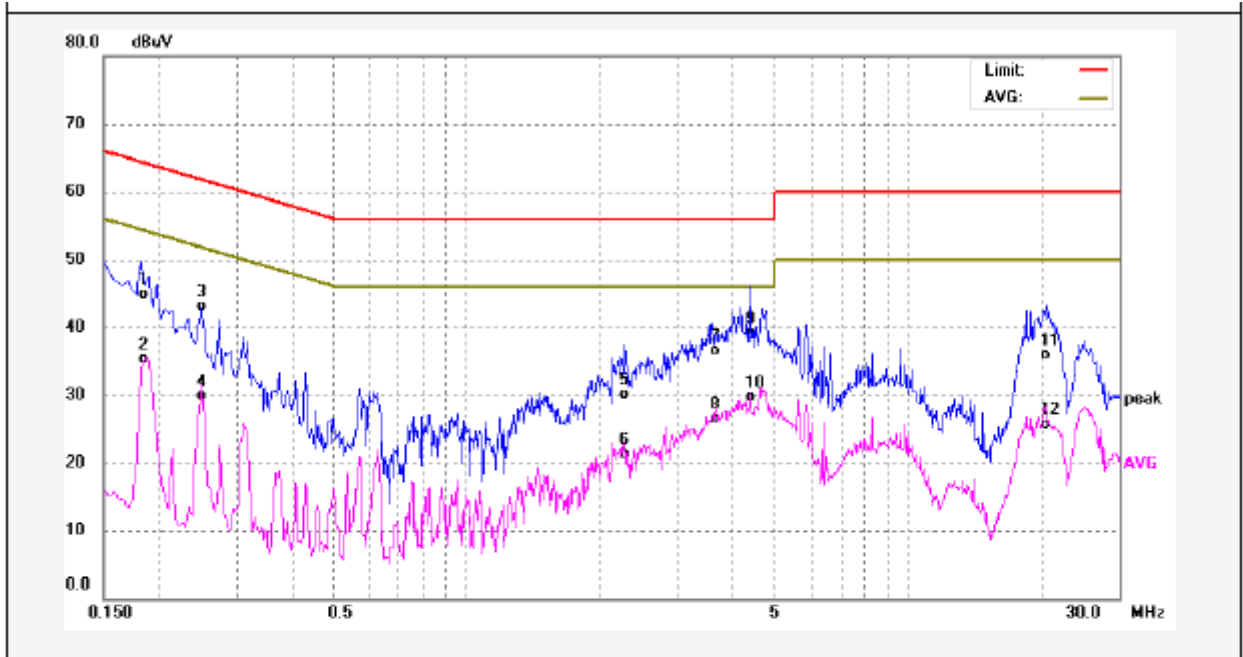

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1860	35.29	9.56	44.85	64.21	-19.36	QP	
2	0.1860	25.76	9.56	35.32	54.21	-18.89	AVG	
3	0.2500	33.48	9.59	43.07	61.75	-18.68	QP	
4	0.2500	20.35	9.59	29.94	51.75	-21.81	AVG	
5	2.2820	20.40	9.67	30.07	56.00	-25.93	QP	
6	2.2820	11.70	9.67	21.37	46.00	-24.63	AVG	
7	3.6420	26.78	9.74	36.52	56.00	-19.48	QP	
8	3.6420	16.81	9.74	26.55	46.00	-19.45	AVG	
9	4.3780	29.25	9.77	39.02	56.00	-16.98	QP	
10	4.3780	19.97	9.77	29.74	46.00	-16.26	AVG	
11	20.5459	25.44	10.39	35.83	60.00	-24.17	QP	
12	20.5459	15.26	10.39	25.65	50.00	-24.35	AVG	

9 Radiated Emissions

Test Requirement: FCC 47CFR Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10-2020+A1-2024

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

9.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

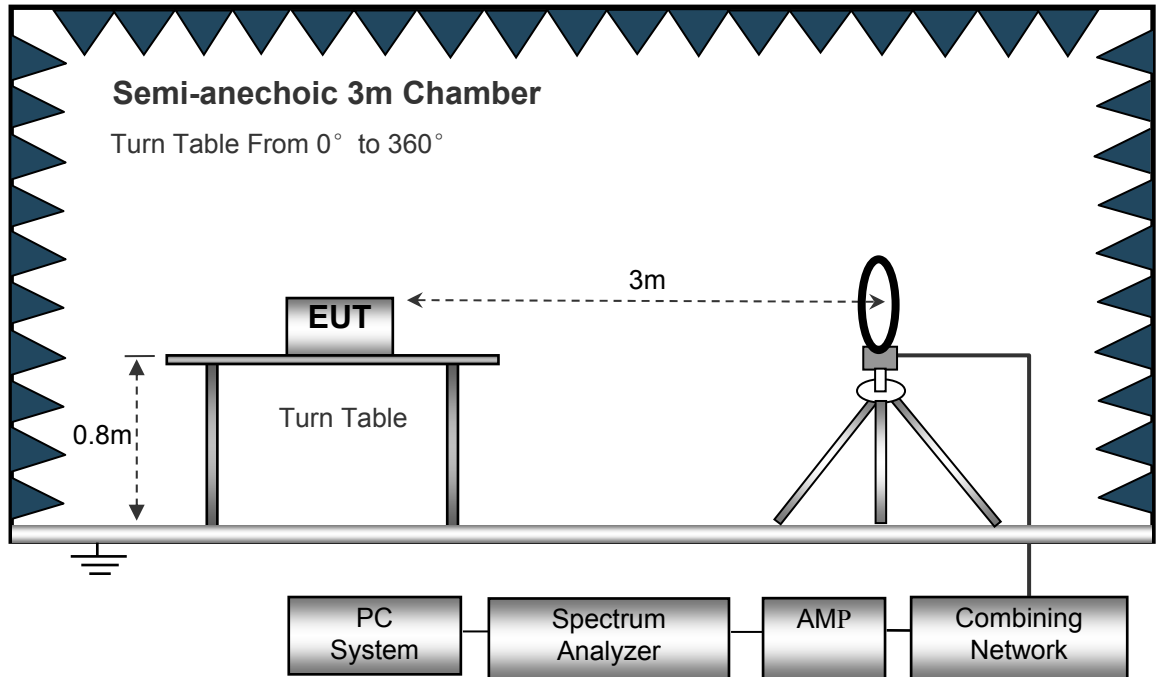

The test setup for emission measurement from 30 MHz to 1 GHz.

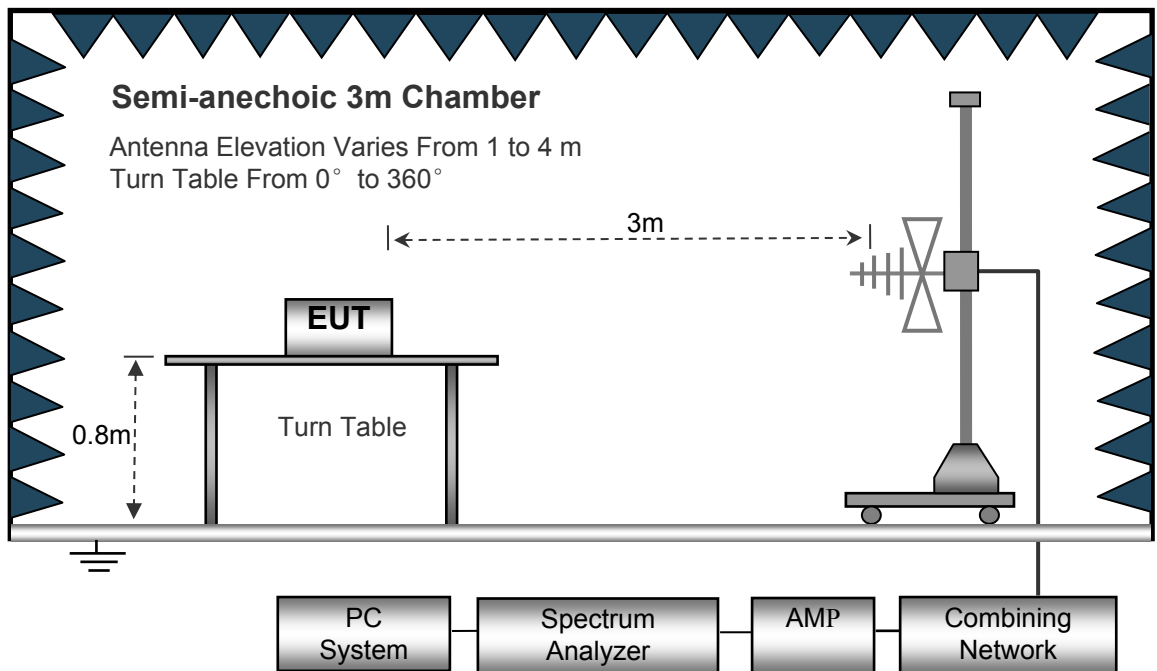

The test setup for emission measurement above 1 GHz.

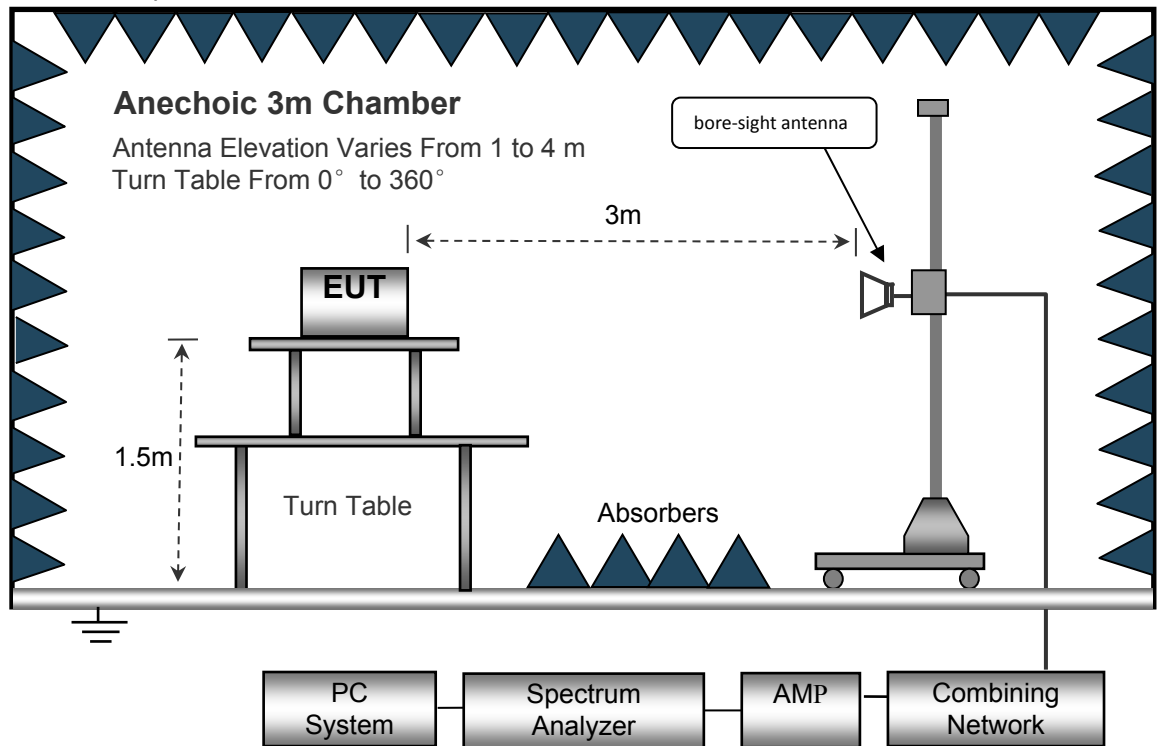

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency: 9kHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 8GHz

1M

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
263.45	39.29	QP	278	2.0	H	-11.88	27.41	46.00	-18.59
263.45	44.57	QP	208	1.6	V	-11.88	32.69	46.00	-13.31
4804.00	50.19	PK	319	1.9	V	-1.06	49.13	74.00	-24.87
4804.00	39.72	Ave	319	1.9	V	-1.06	38.66	54.00	-15.34
7206.00	52.00	PK	313	1.2	H	1.33	53.33	74.00	-20.67
7206.00	38.52	Ave	313	1.2	H	1.33	39.85	54.00	-14.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel 2440MHz									
263.45	40.22	QP	37	2.0	H	-13.35	26.87	46.00	-19.13
263.45	44.22	QP	249	1.3	V	-13.35	30.87	46.00	-15.13
4880.00	49.24	PK	48	2.0	V	-0.62	48.62	74.00	-25.38
4880.00	40.71	Ave	48	2.0	V	-0.62	40.09	54.00	-13.91
7320.00	52.72	PK	177	1.6	H	2.21	54.93	74.00	-19.07
7320.00	38.10	Ave	177	1.6	H	2.21	40.31	54.00	-13.69

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
263.45	38.81	QP	310	1.7	H	-13.35	25.46	46.00	-20.54
263.45	44.09	QP	345	1.2	V	-13.35	30.74	46.00	-15.26
4960.00	48.81	PK	336	1.6	V	-0.24	48.57	74.00	-25.43
4960.00	40.76	Ave	336	1.6	V	-0.24	40.52	54.00	-13.48
7440.00	52.83	PK	229	1.7	H	2.84	55.67	74.00	-18.33
7440.00	40.35	Ave	229	1.7	H	2.84	43.19	54.00	-10.81

Radiated Restricted Band Emission

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
2319.97	45.53	PK	87	1.0	V	-13.19	32.34	74.00	-41.66
2319.97	37.78	Ave	87	1.0	V	-13.19	24.59	54.00	-29.41
2375.91	43.86	PK	3	1.5	H	-13.14	30.72	74.00	-43.28
2375.91	36.12	Ave	3	1.5	H	-13.14	22.98	54.00	-31.02
2490.30	44.05	PK	339	1.4	V	-13.08	30.97	74.00	-43.03
2490.30	38.62	Ave	339	1.4	V	-13.08	25.54	54.00	-28.46

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
2320.82	46.26	PK	36	1.5	V	-13.19	33.07	74.00	-40.93
2320.82	39.28	Ave	36	1.5	V	-13.19	26.09	54.00	-27.91
2373.65	44.39	PK	348	1.7	H	-13.14	31.25	74.00	-42.75
2373.65	36.55	Ave	348	1.7	H	-13.14	23.41	54.00	-30.59
2497.95	43.91	PK	316	1.8	V	-13.08	30.83	74.00	-43.17
2497.95	37.49	Ave	316	1.8	V	-13.08	24.41	54.00	-29.59

2M

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
269.48	39.18	QP	85	1.1	H	-11.88	27.30	46.00	-18.70
269.48	44.32	QP	254	1.1	V	-11.88	32.44	46.00	-13.56
4804.00	50.65	PK	267	1.7	V	-1.06	49.59	74.00	-24.41
4804.00	39.28	Ave	267	1.7	V	-1.06	38.22	54.00	-15.78
7206.00	51.62	PK	159	1.5	H	1.33	52.95	74.00	-21.05
7206.00	38.76	Ave	159	1.5	H	1.33	40.09	54.00	-13.91

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel 2440MHz									
269.48	37.72	QP	296	1.3	H	-13.35	24.37	46.00	-21.63
269.48	45.34	QP	43	1.6	V	-13.35	31.99	46.00	-14.01
4880.00	51.68	PK	218	1.2	V	-0.62	51.06	74.00	-22.94
4880.00	39.08	Ave	218	1.2	V	-0.62	38.46	54.00	-15.54
7320.00	51.04	PK	305	2.0	H	2.21	53.25	74.00	-20.75
7320.00	37.97	Ave	305	2.0	H	2.21	40.18	54.00	-13.82

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
269.48	37.34	QP	4	1.9	H	-13.35	23.99	46.00	-22.01
269.48	44.38	QP	211	1.5	V	-13.35	31.03	46.00	-14.97
4960.00	51.13	PK	106	1.5	V	-0.24	50.89	74.00	-23.11
4960.00	40.35	Ave	106	1.5	V	-0.24	40.11	54.00	-13.89
7440.00	49.67	PK	37	1.6	H	2.84	52.51	74.00	-21.49
7440.00	38.79	Ave	37	1.6	H	2.84	41.63	54.00	-12.37

Radiated Restricted Band Emission

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
2327.57	45.80	PK	148	1.0	V	-13.19	32.61	74.00	-41.39
2327.57	39.63	Ave	148	1.0	V	-13.19	26.44	54.00	-27.56
2359.28	42.83	PK	104	2.0	H	-13.14	29.69	74.00	-44.31
2359.28	36.90	Ave	104	2.0	H	-13.14	23.76	54.00	-30.24
2499.04	43.28	PK	118	1.5	V	-13.08	30.20	74.00	-43.80
2499.04	36.27	Ave	118	1.5	V	-13.08	23.19	54.00	-30.81

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
2333.12	45.57	PK	154	1.1	V	-13.19	32.38	74.00	-41.62
2333.12	37.39	Ave	154	1.1	V	-13.19	24.20	54.00	-29.80
2361.07	43.16	PK	87	1.8	H	-13.14	30.02	74.00	-43.98
2361.07	36.01	Ave	87	1.8	H	-13.14	22.87	54.00	-31.13
2484.59	42.50	PK	69	1.7	V	-13.08	29.42	74.00	-44.58
2484.59	37.54	Ave	69	1.7	V	-13.08	24.46	54.00	-29.54

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10-2020+A1-2024

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

10.2 Test Result

1M


9kHz – 150kHz

Mode: channel 0

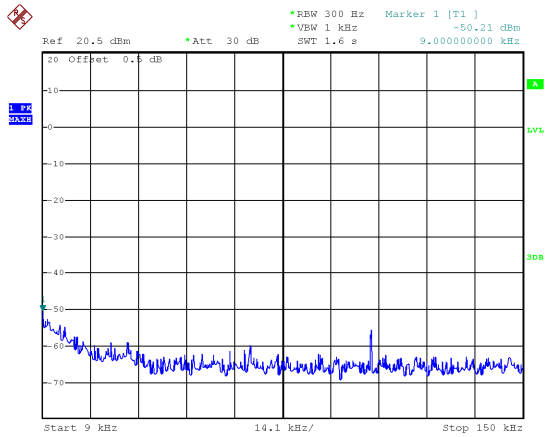


Date: 18.FEB.2025 09:27:50

Mode: channel 19

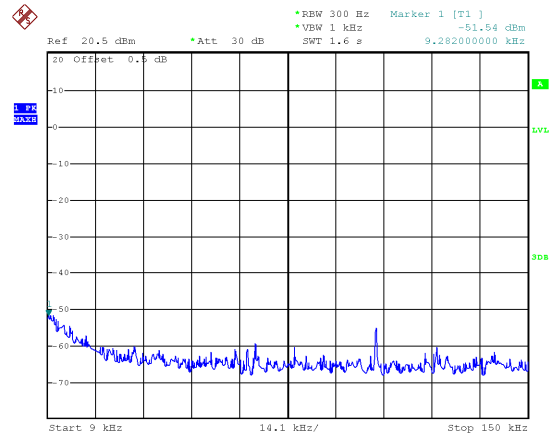

Date: 18.FEB.2025 09:24:42


Mode: channel 39

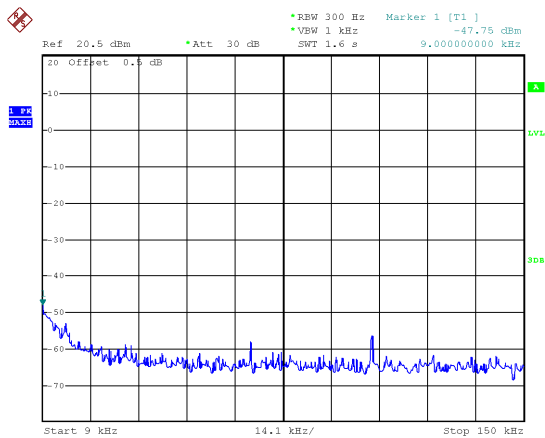

Date: 18.FEB.2025 09:19:11


150kHz – 30MHz

Mode: channel 0

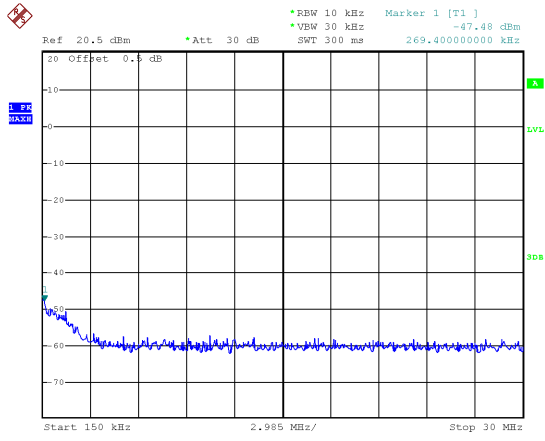


Date: 18.FEB.2025 09:28:11

Mode: channel 19

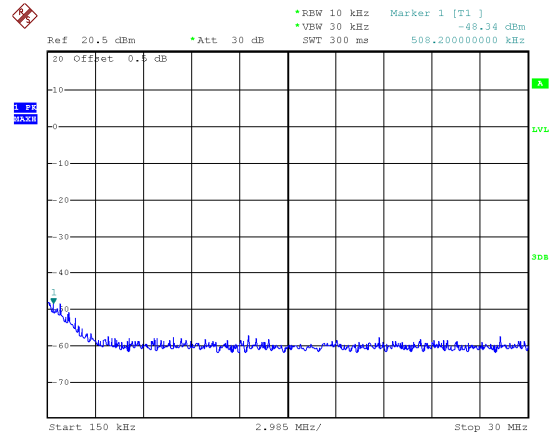


Date: 18.FEB.2025 09:25:04


Mode: channel 39

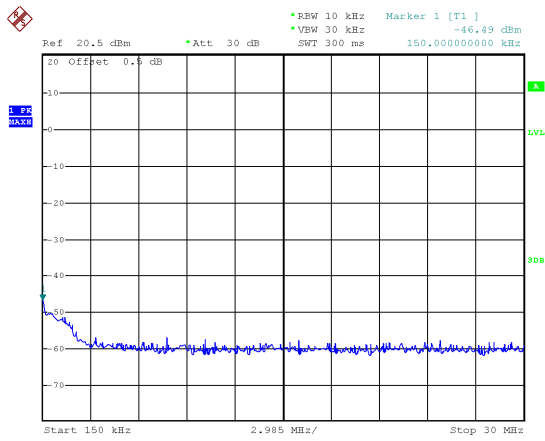


Date: 18.FEB.2025 09:19:34

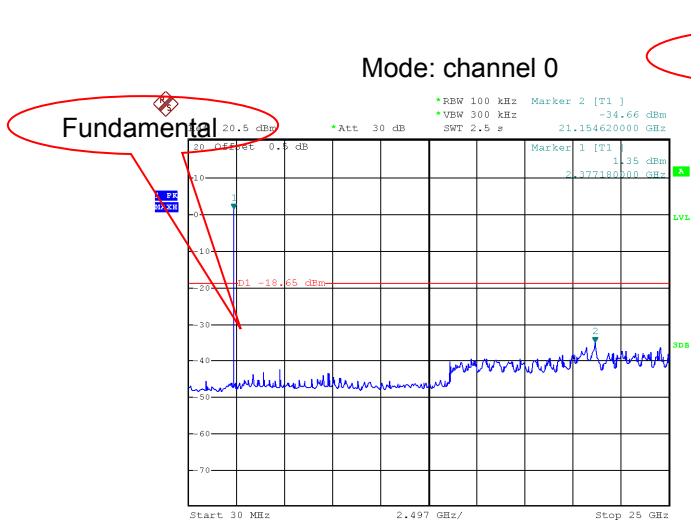

Date: 18.FEB.2025 09:30:06

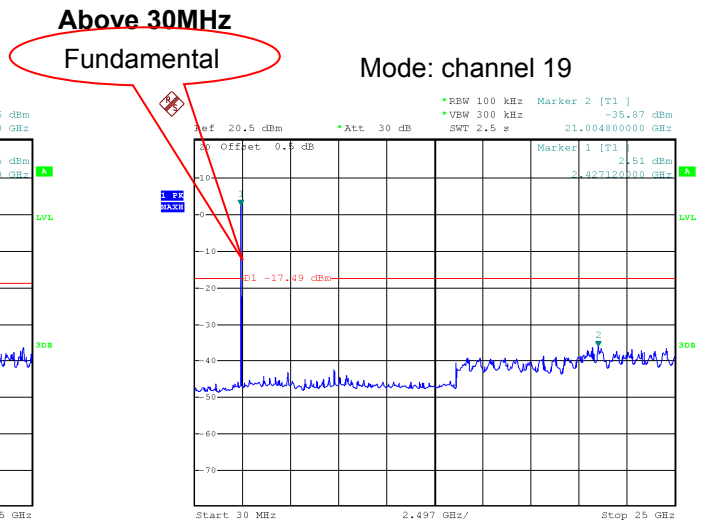

Date: 18.FEB.2025 09:27:12

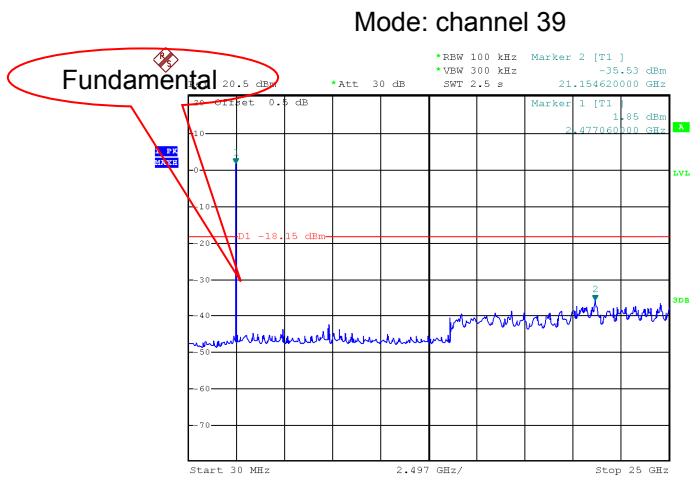


Date: 18.FEB.2025 09:21:32

2M


9kHz – 150kHz

Mode: channel 0

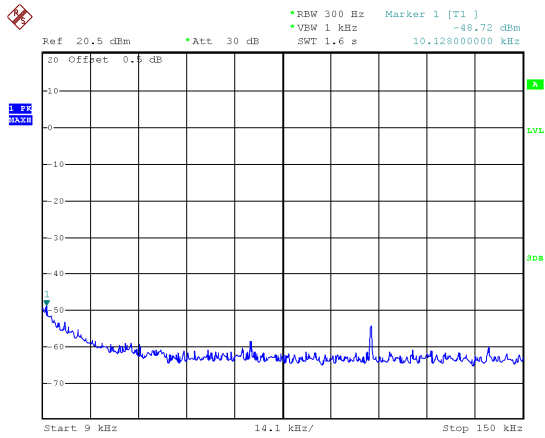


Date: 18.FEB.2025 10:35:26

Mode: channel 19

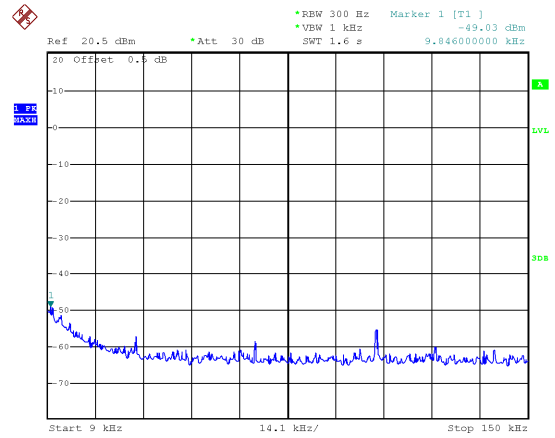

Date: 18.FEB.2025 10:39:41


Mode: channel 39

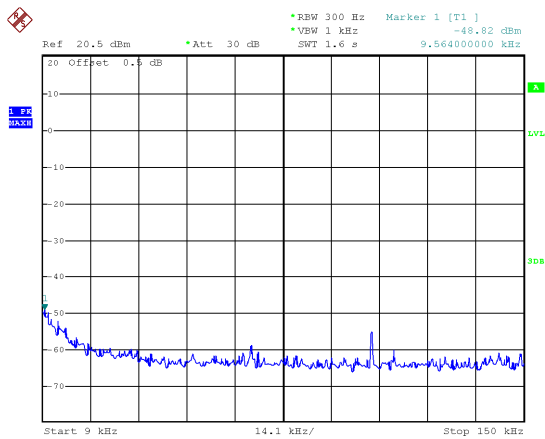

Date: 18.FEB.2025 10:44:15


150kHz – 30MHz

Mode: channel 0

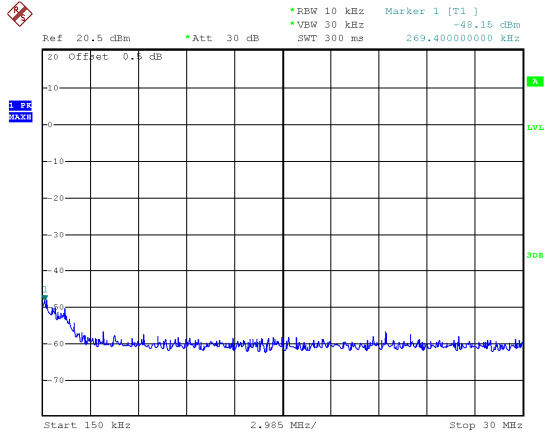


Date: 18.FEB.2025 10:35:48

Mode: channel 19

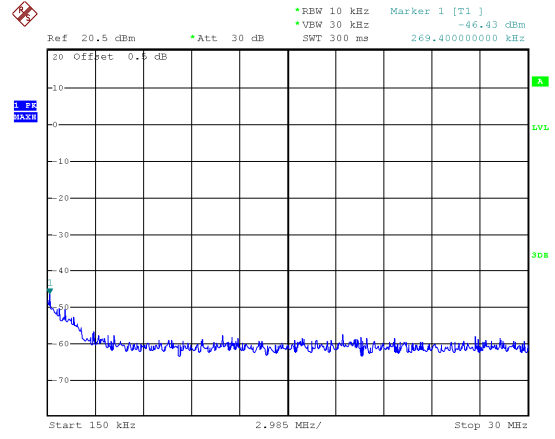


Date: 18.FEB.2025 10:39:56

Mode: channel 39

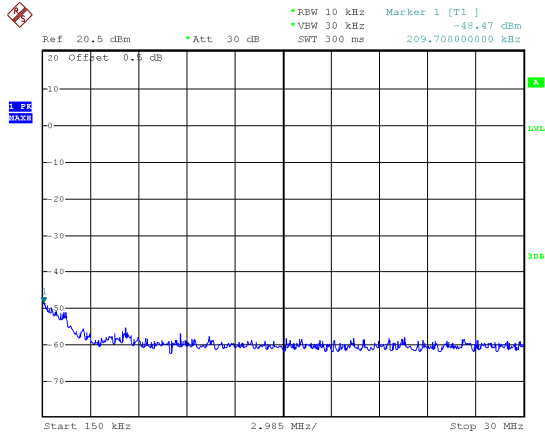


Date: 18.FEB.2025 10:44:36


Above 30MHz

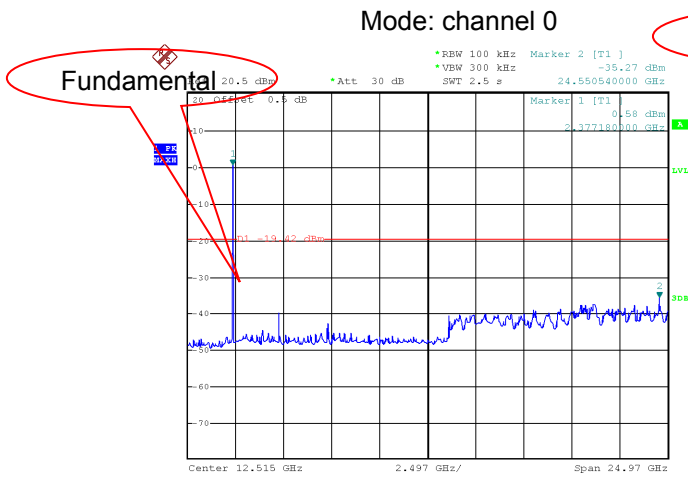

Date: 18.FEB.2025 10:36:31

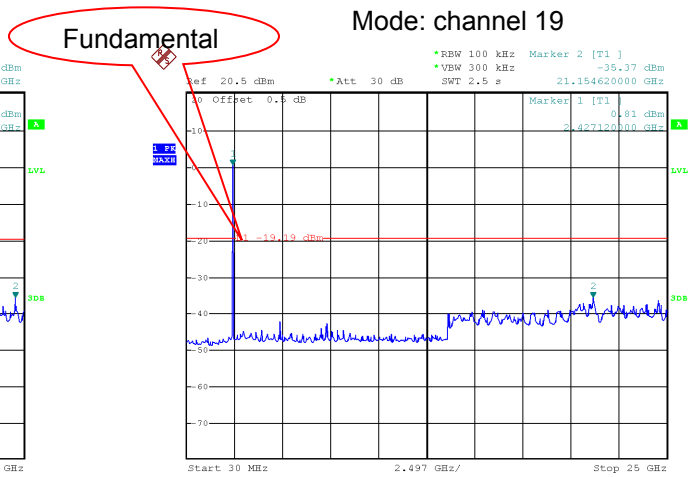

Date: 18.FEB.2025 10:41:38

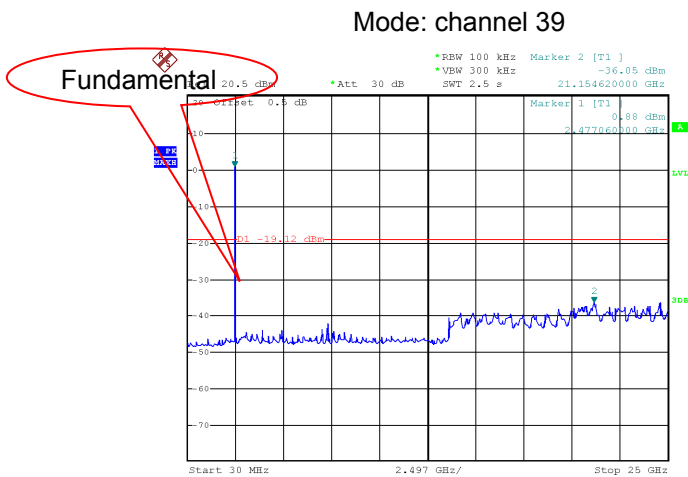

Date: 18.FEB.2025 10:46:43

11 Band Edge Measurement

Test Requirement: FCC 47CFR Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Limit:

Test Mode: Transmitting

11.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.2 Test Result

Test result plots shown as follows:


1M

BLE: Band edge-left side

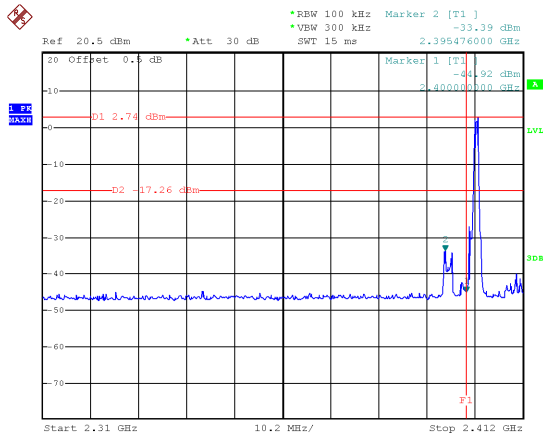

Date: 18.FEB.2025 09:14:37


BLE: Band edge-right side

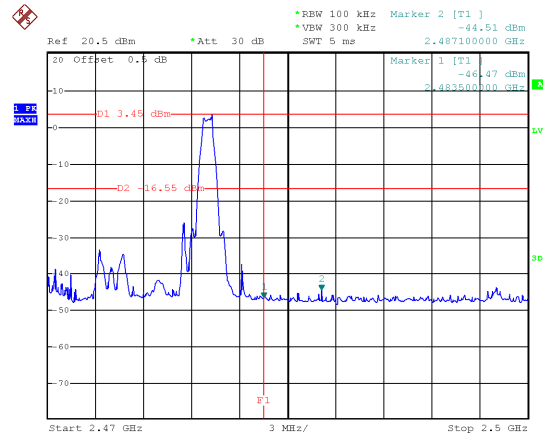

Date: 18.FEB.2025 09:18:07


2M

BLE: Band edge-left side

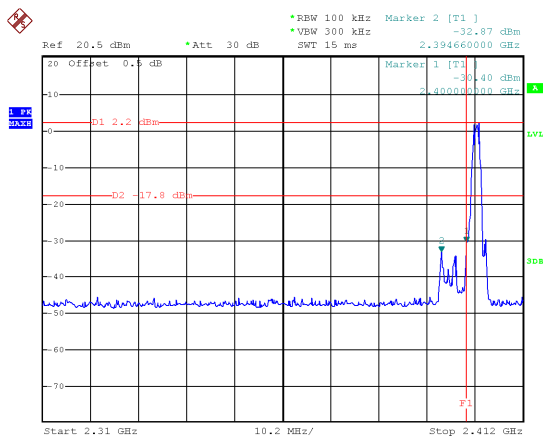

Date: 18.FEB.2025 10:21:36

BLE: Band edge-right side

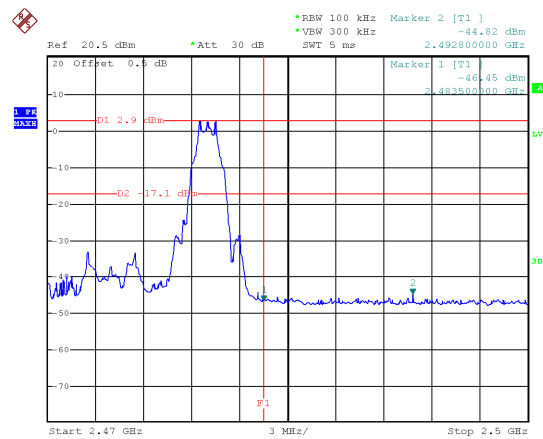

Date: 18.FEB.2025 10:27:12

12 6 dB Bandwidth Measurement

Test Requirement:	FCC 47CFR Part 15 Section 15.247
Test Method:	ANSI C63.10-2020+A1-2024 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Mode:	Transmitting

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

12.2 Test Result


Operation mode	Test Channel	6dB Bandwidth (MHz)
BLE 1M	Channel 0	0.666
	Channel 19	0.672
	Channel 39	0.660
BLE 2M	Channel 0	1.188
	Channel 19	1.248
	Channel 39	1.236

Note: please refer to next page for test plot.

Test result plot:


1M

Mode: TX GFSK channel 0

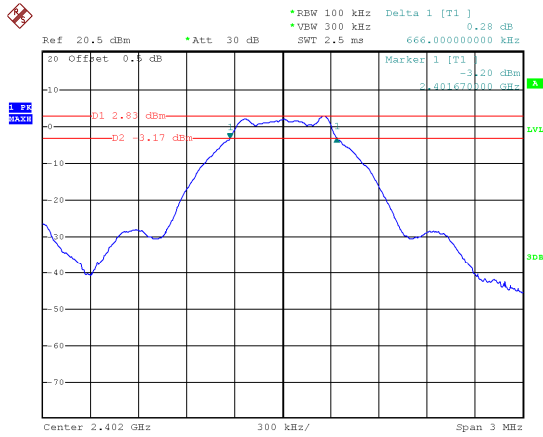


Date: 18.FEB.2025 09:03:00

Mode: TX GFSK channel 19

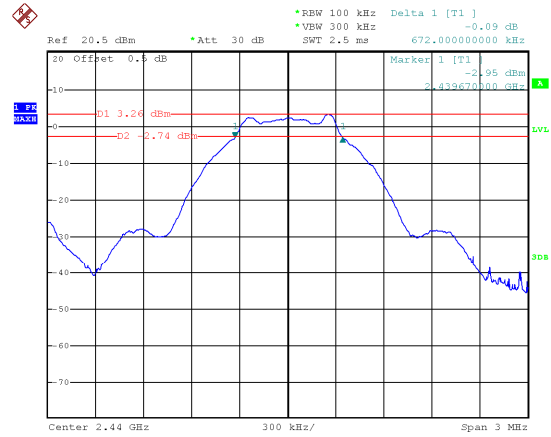

Date: 18.FEB.2025 08:57:25


Mode: TX GFSK channel 39

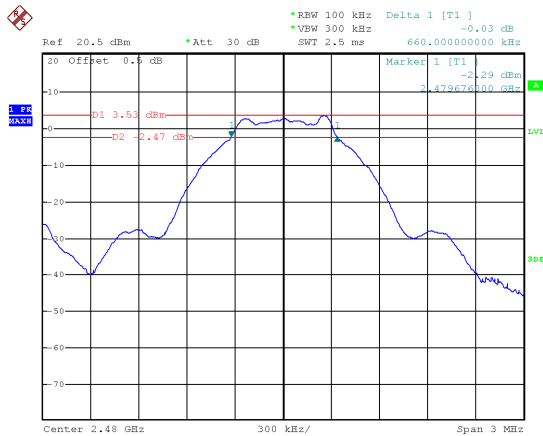

Date: 18.FEB.2025 08:55:21


2M

Mode: TX GFSK channel 0

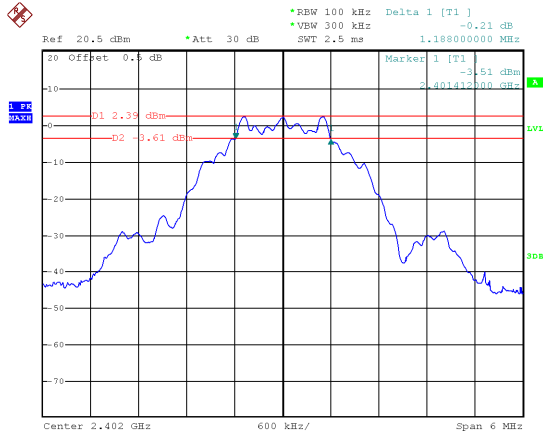


Date: 18.FEB.2025 10:11:08

Mode: TX GFSK channel 19

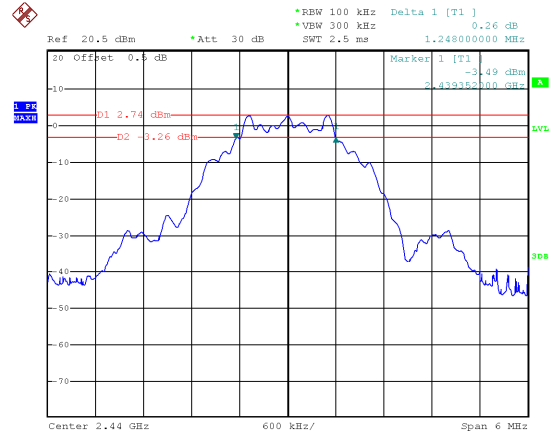

Date: 18.FEB.2025 10:13:54

Mode: TX GFSK channel 39

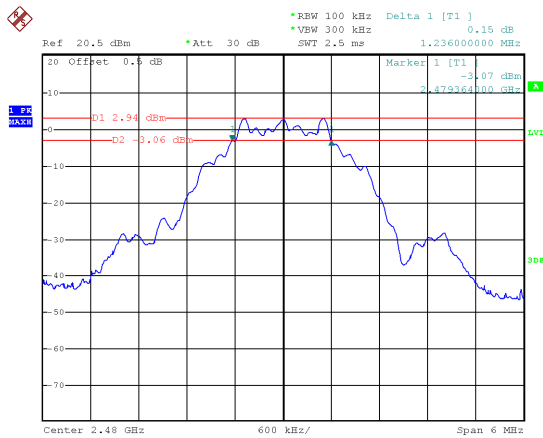

Date: 18.FEB.2025 10:18:48

13 Maximum Peak Output Power

Test Requirement:	FCC 47CFR Part 15 Section 15.247
Test Method:	ANSI C63.10-2020+A1-2024 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019 §15.247(b)
Test Limit:	The maximum peak conducted output power of the intentional radiator shall not exceed 1W.
Test Mode:	Transmitting

13.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Section 8.3.1.1 RBW \geq DTS bandwidth

Subclause 11.9.1.1 of ANSI C63.10 is applicable.

Section 8.3.1.2 Integrated band power method

For measuring the output power of a device transmitting a wide-band noise-like signal where the peak power amplitude is a statistical parameter, the preferred methodology is to use an integrated average power measurement, as described in 8.3.2. The peak integrated band power method of 11.9.1 in ANSI C63.10 is not applicable.

Subclause 11.9.2 of ANSI C63.10 is applicable.


13.2 Test Result

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
BLE 1M	Low-2402	3.82	1W/30dBm
	Middle-2440	3.81	1W/30dBm
	High-2480	3.98	1W/30dBm
BLE 2M	Low-2402	3.50	1W/30dBm
	Middle-2440	4.05	1W/30dBm
	High-2480	4.46	1W/30dBm

Test Plot


1M

Mode: TX GFSK channel 0

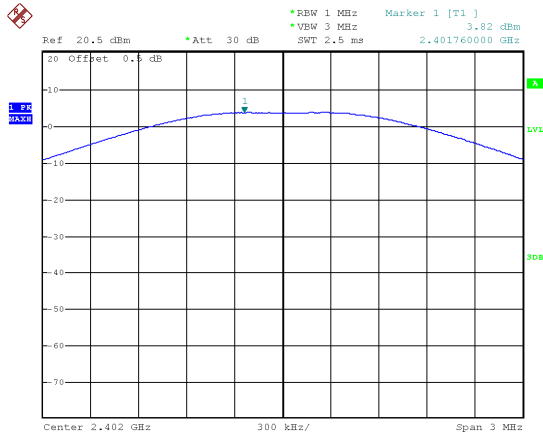


Date: 18.FEB.2025 08:48:08

Mode: TX GFSK channel 19

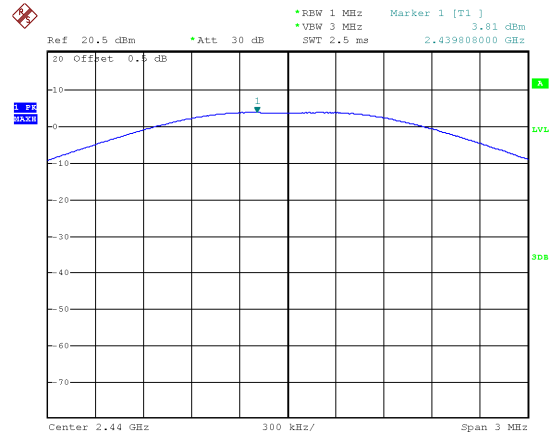

Date: 18.FEB.2025 08:48:42


Mode: TX GFSK channel 39

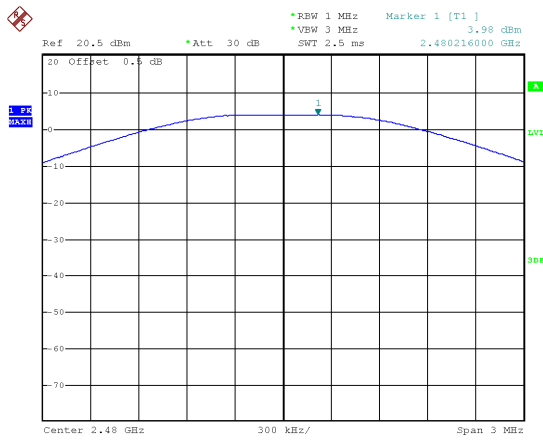

Date: 18.FEB.2025 08:49:03


2M

Mode: TX GFSK channel 0

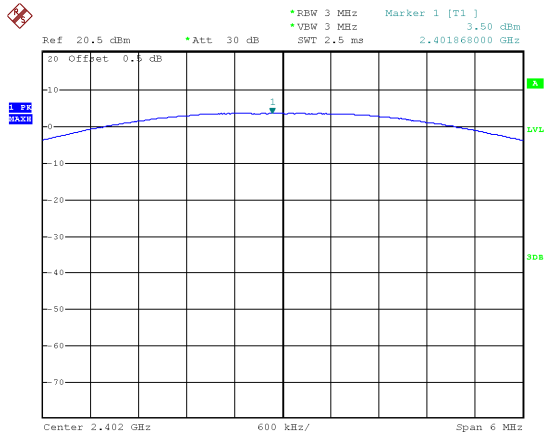


Date: 18.FEB.2025 09:51:54

Mode: TX GFSK channel 19

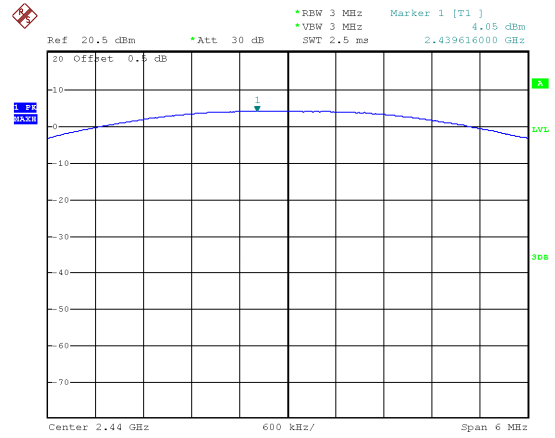

Date: 18.FEB.2025 09:52:13

Mode: TX GFSK channel 39

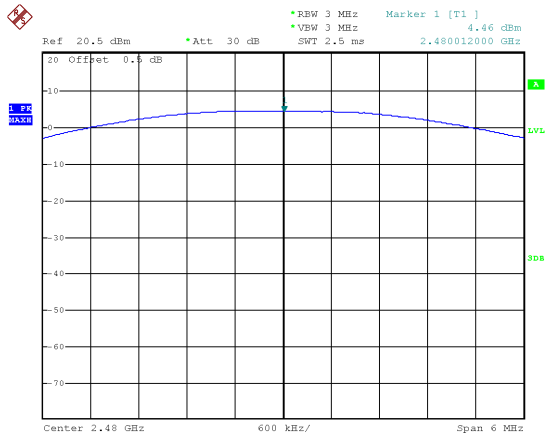

Date: 18.FEB.2025 09:55:18

14 Power Spectral density

Test Requirement:	FCC 47CFR Part 15 Section 15.247
Test Method:	ANSI C63.10-2020+A1-2024 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode:	Transmitting

14.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 8.4

Subclause 11.10 of ANSI C63.10 is applicable.

Choose the test procedure according to the product type

Peak PSD

Subclause 11.10.2 of ANSI C63.10 is applicable.

AVG PSD

Subclause 11.10.3/4/5/6/7/8 of ANSI C63.10 is applicable.


14.2 Test Result

Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
BLE 1M	Low-2402	-13.79	8dBm per 3kHz
	Middle-2440	-13.44	8dBm per 3kHz
	High-2480	-13.13	8dBm per 3kHz
BLE 2M	Low-2402	-16.47	8dBm per 3kHz
	Middle-2440	-16.04	8dBm per 3kHz
	High-2480	-15.79	8dBm per 3kHz

Test Plot


1M

Mode: TX GFSK channel 0

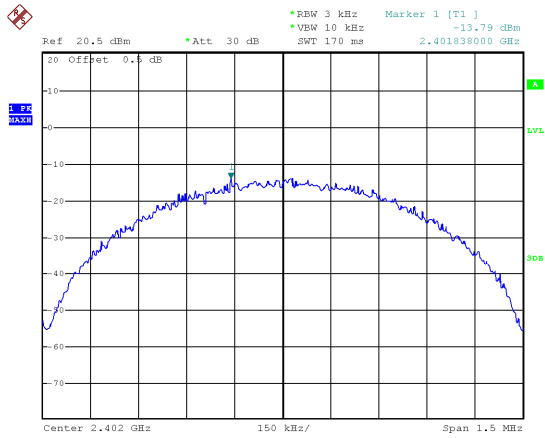


Date: 18.FEB.2025 09:33:32

Mode: TX GFSK channel 19

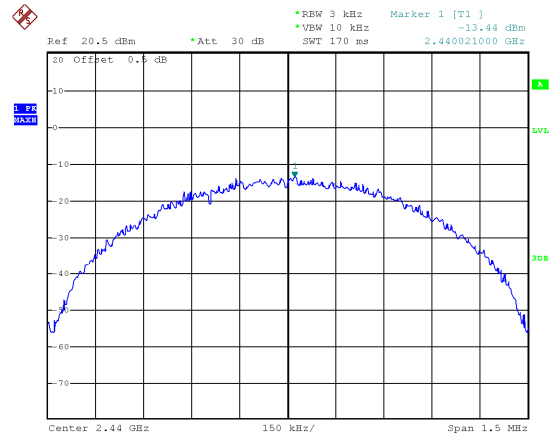

Date: 18.FEB.2025 09:33:55


Mode: TX GFSK channel 39

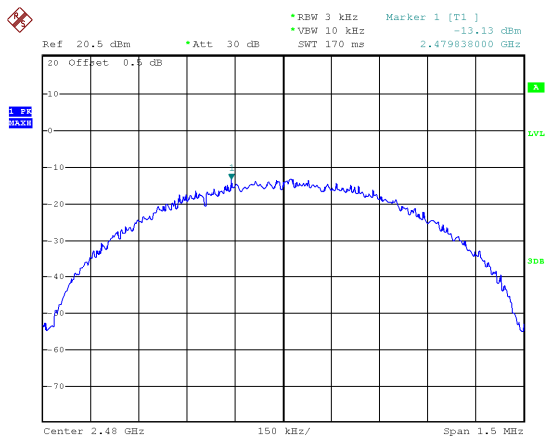

Date: 18.FEB.2025 09:34:22


2M

Mode: TX GFSK channel 0

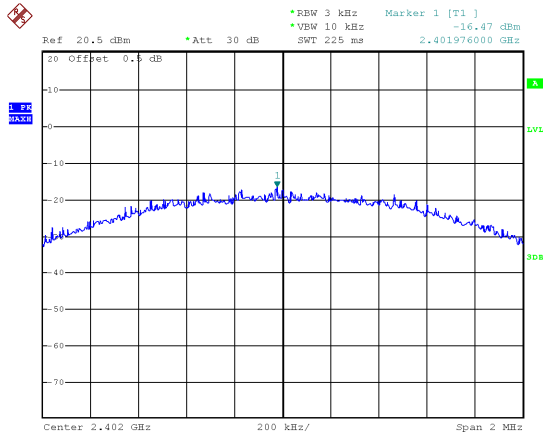


Date: 18.FEB.2025 10:29:14

Mode: TX GFSK channel 19

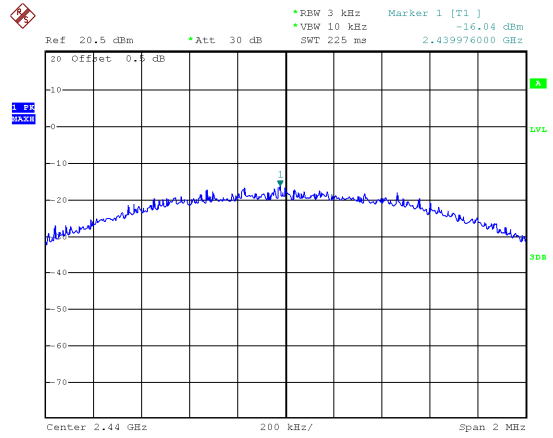

Date: 18.FEB.2025 10:28:46

Mode: TX GFSK channel 39

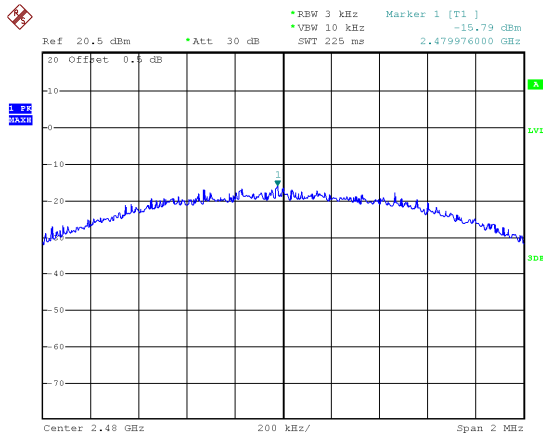

Date: 18.FEB.2025 10:28:08

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an FPC antenna fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

16 RF Exposure

Remark: Please refer to MPE test report: WTX25X02035620W.

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-F82-Photos.

====End of Report====