
Panasonic

LUMIX


BOX-STYLE MIRRORLESS CAMERA SYSTEM CHART

May 2022

Table of Contents	
LUMIN DOUBLO I OLI I	0
LUMIX BS1H System Chart	7
LUMIX BGH1 System Chart	3
Verified Accessories from Other Manufacturers	
- Rig / Switcher	4
- Wired Remote Control	5

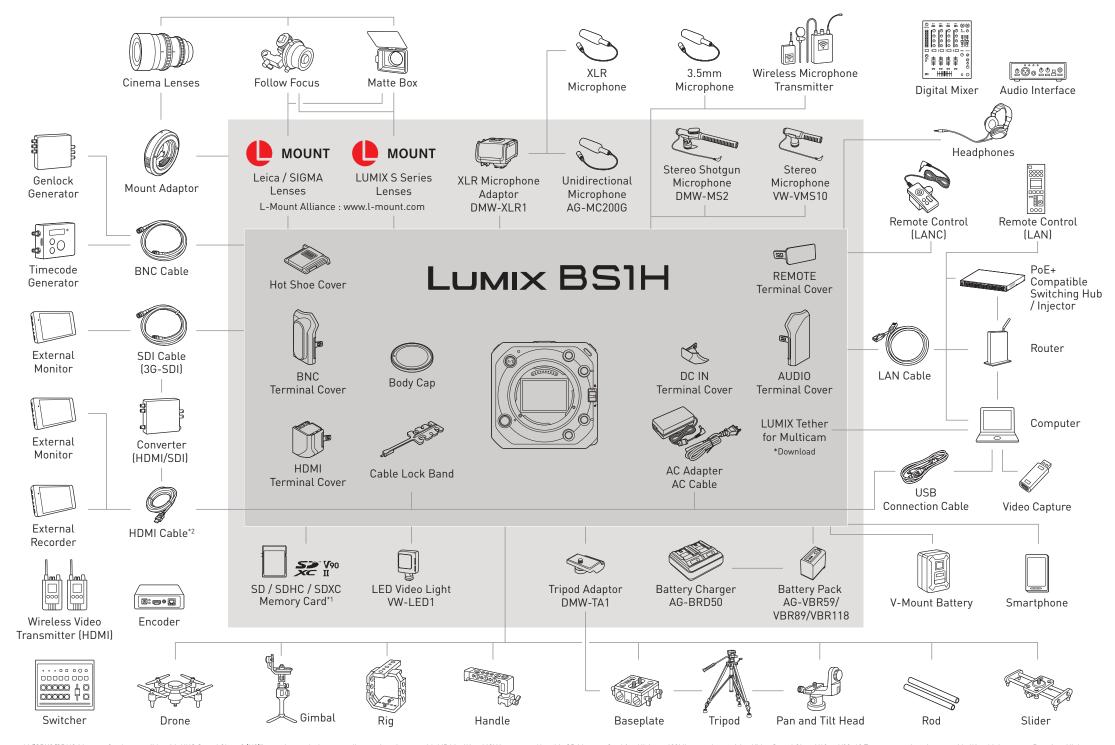

^{*1 &}quot;SDXC/SDHC Memory Card compatible with UHS Speed Class 3 (U3)" must be used when recording motion pictures with MP4 in 4K or MOV in camera. Use this SD Memory Card for All-Intra 400Mbps mode requiring Video Speed Class V60 or V90. *2 To output motion pictures with 4K or higher, use a Premium High Speed HDMI cable [Type A - Type A plug]. *The L-Mount Logo mark is a trademark or registered trademark of Leica Camera AG. * The SDXC/SDHC Memory Card can be used only if their logos are indicated on the equipment to rin the operation manual. It cannot be used with. *e used with *e used only if their logos are indicated on the equipment to rin the operation manual. It cannot be used with. *e used only if their logos are indicated on the equipment or in the operation manual. Substantial to the equipment of the used with these units, but we offer no guarantee as to the quality, performance safety of substantial their prices and those which customers cannot check for themselves before purchasing. *Please confirm the latest information about batteries on the following website. http://panasonic.py/pupport/pippo

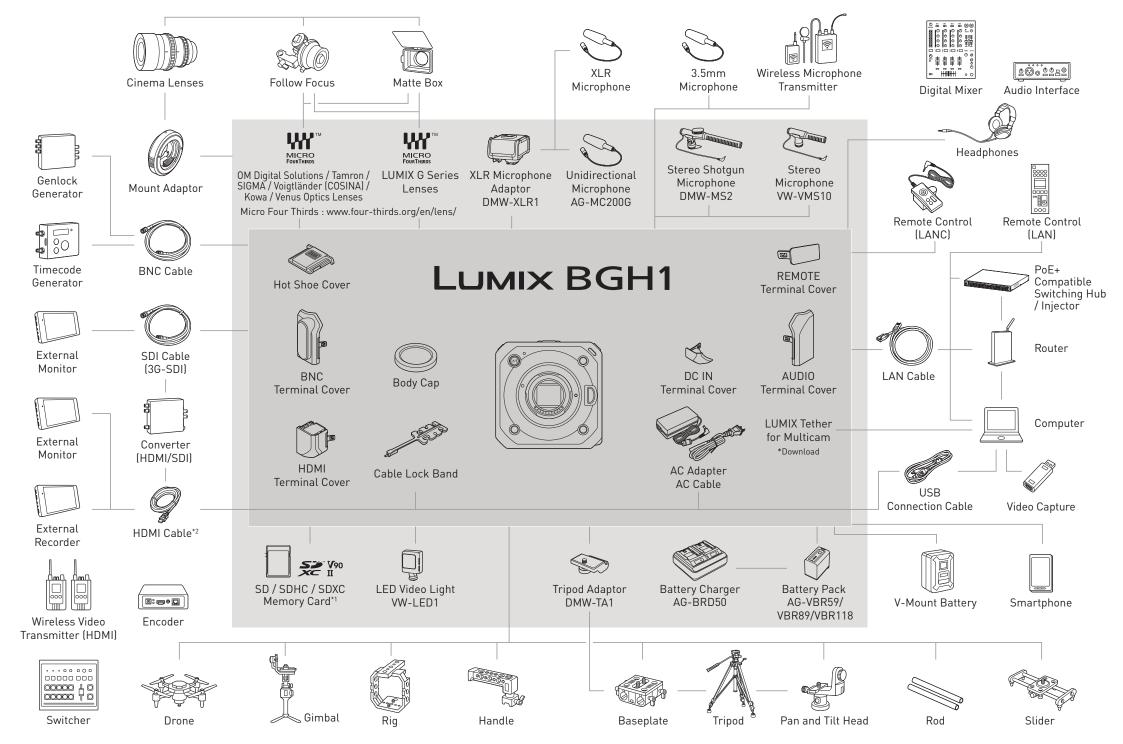

^{*1 &}quot;SDXC/SDHC Memory Card compatible with UHS Speed Class 3 [U3]" must be used when recording motion pictures with MP4 in 4K or MOV in camera. Use this SD Memory Card for All-Intra 400Mbps mode requiring Video Speed Class V60 or V90. *2 To output motion pictures with 4K or higher, use a Premium High Speed HDMI cable [Type A - Type A plug]. * The Micro Four Thirds[™] name and logos are trademarks or registered trademarks of OM Digital Solutions Corporation in Japan, the United States, the European Union, and other countries and regions. * The SDXC/SDHC Memory Card. *USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum. * Batteries made by other companies which have been certified by Panasonic may be used with these units, but we offer no guarantee and USB-C™ are trademarks of USB Implementers. * Exercise care when purchasing batteries. Many fake or imitation batteries have been found among those sold at unusually low prices and those which customers cannot check for themselves before purchasing. * Please confirm the latest information about batteries on the following website. http://panasonic.jp/support/global/cs/info/battery.html (English).

DC-BS1H Ver.1.0

DC-BGH1 Ver.2.3

- •The following results are based on Panasonic's testing. Panasonic cannot guarantee that all of the performance can be achieved when third party after market components are used.
- •The results may vary due to changes in product specifications.
- •Please check the instruction manual for the product specifications and usage.
- •We recommend that you use the latest version of the firmware of your camera body / interchangeable lens.

 Click here to check / download the latest firmware. https://av.jpn.support.panasonic.com/support/global/cs/dsc/download/index.html

Click here for the latest information



https://panasonic.jp/support/global/ cs/dsc/connect/wired_rc.html

Rig

As of May 2022

Manufacturer	Decided News	Model Number	Compatibility		Dde
	Product Name		BS1H	BGH1	Remarks
SmallRig	SmallRig Camera Cage Kit for Panasonic LUMIX BGH1&BS1H 3024	3024	✓	✓	
ZACUTO	Panasonic BGH1 & BS1H Cage	Z-BGH1	√	✓	
TILTA	Full Camera Cage for Panasonic BGH1/BS1H – Black	TA-T21-FCC-B	✓	✓	Panasonic have confirmed that the rig can be attached to the BS1H / BGH1 main unit normally.
8Sinn	8SINN CAGE FOR PANASONIC BS1H / BGH1	8-BS1H C	✓	✓	
WOODEN CAMERA	Panasonic BGH1/BS1H Camera Cage	A10006	√	1	

Switcher

As of May 2022

Manufacturer	Manager	Day day I Marra	MadalNasakas	Coffee Western	Compatibility		Remarks	
	Product Name	Model Number	Software Version	BS1H	BGH1			
	ATOMOS	AtomX CAST	ATOMXCST01	Ver.61831A4A	1	✓	This is the result of checking the HDMI output	
	Roland	Streaming Video Switcher	V-160HD	Ver.1.08	/ *	/ *	setting of the BS1H / BGH1 with "AUTO".	

*If the switcher is set to 720p, the images will not display properly.

DC-BS1H Ver.1.0

DC-BGH1 Ver.2.3

- •The following results are based on Panasonic's testing. Panasonic cannot guarantee that all of the performance can be achieved when third party after market components are used.
- •The results may vary due to changes in product specifications.
- •Please check the instruction manual for the product specifications and usage.
- •We recommend that you use the latest version of the firmware of your camera body / interchangeable lens.

 Click here to check / download the latest firmware. https://av.jpn.support.panasonic.com/support/global/cs/dsc/download/index.html

Click here for the latest information



https://panasonic.jp/support/global/ cs/dsc/connect/wired_rc.html

Wired Remote Control

As of Nov 2021

Manufacturer	Model Number	Compatibility				
		BS1H	BGH1	Cautions When Using Wired Remote Controller		
Manfrotto	MVR901EPLA	✓	✓	DC-BS1H •Rec/Stop, Focus (MF operation only), Iris function are available by using wired remote controller. Other function is not available. •MF operation from wired remote controller is not available with the following lens: L-Mount lens of Panasonic equipped with		
	MVR901ECLA	√	√	"MF mode with distance scale". DC-BGH1 •Rec/Stop, Zoom, Focus (MF operation only), Iris function are available by using wired Remote controller. Other function		
	ZFC-L	/	✓	is not available. •The zoom function is available with the following lenses: H-PS14042, H-PS45175, M.ZUIKO DIGITAL ED 12-50mm F3.5-6.3 EZ, M.ZUIKO DIGITAL ED 14-42mm F3.5-5.6 EZ		
Libec	ZFC-LP		/	•MF operation from wired remote controller is not available with the following lenses: Micro Four Thirds lens of Panasonic equipped with "MF mode with distance scale", M.ZUIKO lens equipped with "Snapshot focus" or "Manual Focus Clutch" or "MF (Focus mode switch)".		
		/		•MF operation from wired remote controller is not available with the following lenses, when frame rate setting is "24p" using Variable Frame Rate: M.ZUIKO DIGITAL 17mm F2.8, M.ZUIKO DIGITAL ED 14-42mm F3.5-5.6L		
VariZoom	VZSTEALTH	✓	1	•MF operation from wired remote controller is not available when ZUIKO DIGITAL ED 70-300mm F4.0-5.6 equipped with AF/MF switch to be the condition "MF".		
				•MF operation from wired remote controller is not available with SIGMA products Four Thirds lens.		