



## TEST REPORT

Test report no.: 1-9831/20-05-02-A

### Testing laboratory

**CTC advanced GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://www.ctcadvanced.com>

e-mail: [mail@ctcadvanced.com](mailto:mail@ctcadvanced.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

### Applicant

**Bosch Connected Devices and Solutions GmbH**

Ludwig-Erhard-Straße 2

72760 Reutlingen / GERMANY

Phone: +49 1704848530

Contact: Christian Brechtmann

e-mail: [Christian.brechtmann@bosch-connectivity.de](mailto:Christian.brechtmann@bosch-connectivity.de)

### Manufacturer

**Bosch Connected Devices and Solutions GmbH**

Ludwig-Erhard-Straße 2

72760 Reutlingen / GERMANY

### Test standard/s

FCC - Title 47 CFR Part 15      FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 2      Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

For further applied test standards please refer to section 2 of this test report.

### Test Item

**Kind of test item:**      **Parking sensor**

**Model name:**      **PLS110**

**FCC ID:**      **2ADSJTPS110**

**IC:**      **12595A-TPS110**

**Frequency:**      DTS band 902 MHz – 928 MHz

**Technology tested:**      Long Range Wide Area Network

**Antenna:**      Integrated antenna  
Ethertronics M620720 with 0.75dBi peak gain

**Power supply:**      3.6 V DC by battery

**Temperature range:**      -20°C to 65°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:



Michael Dorongovski  
Lab Manager  
Radio Communications

### Test performed:



Andreas Kurzkurt  
Testing Manager  
Radio Communications

## Table of contents

Table of contents.....	2
<b>1 General information .....</b>	<b>4</b>
1.1 Notes and disclaimer .....	4
1.2 Application details .....	4
1.3 Test laboratories sub-contracted .....	4
<b>2 Test standard/s, references and accreditations .....</b>	<b>5</b>
<b>3 Reporting statements of conformity – decision rule .....</b>	<b>6</b>
<b>4 Test environment .....</b>	<b>7</b>
<b>5 Test item .....</b>	<b>7</b>
5.1 General description .....	7
5.2 Additional information .....	7
<b>6 Sequence of testing .....</b>	<b>8</b>
6.1 Sequence of testing radiated spurious 9 kHz to 30 MHz .....	8
6.2 Sequence of testing radiated spurious 30 MHz to 1 GHz .....	9
6.3 Sequence of testing radiated spurious 1 GHz to 12.75 GHz .....	10
<b>7 Description of the test setup.....</b>	<b>11</b>
7.1 Shielded semi anechoic chamber .....	12
7.2 Shielded fully anechoic chamber .....	13
7.3 Conducted measurements .....	14
<b>8 Measurement uncertainty .....</b>	<b>15</b>
<b>9 Summary of measurement results .....</b>	<b>16</b>
9.1 Part 1: Hybrid .....	16
9.2 Part 2: DTS .....	17
<b>10 RF measurements .....</b>	<b>18</b>
10.1 Additional comments .....	18
<b>11 Measurement results Part 1 Hybrid .....</b>	<b>19</b>
11.1 Antenna gain.....	19
11.2 Carrier Frequency Separation.....	20
11.3 Average Time of Occupancy (dwell time).....	22
11.4 Spectrum bandwidth of a Hybrid system .....	24
11.5 Maximum Output Power .....	28
11.6 Power spectral density .....	31
11.7 Detailed spurious emissions @ the band edge – conducted and radiated .....	34
11.8 Spurious Emissions Conducted .....	37
11.9 Spurious Emissions Radiated < 30 MHz .....	40
11.10 Spurious Emissions Radiated > 30 MHz .....	43
11.10.1 Spurious emissions radiated 30 MHz to 1 GHz.....	43
11.10.2 Spurious emissions radiated above 1 GHz.....	47
<b>12 Measurement results Part 2 DTS .....</b>	<b>51</b>

12.1	Antenna gain.....	51
12.2	Maximum output power.....	52
12.3	Power spectral density .....	55
12.4	Spectrum bandwidth – 6 dB bandwidth and 99% bandwidth .....	58
12.5	Detailed spurious emissions @ the band edge – conducted and radiated .....	62
12.6	Spurious Emissions Conducted .....	65
12.7	Spurious Emissions Radiated < 30 MHz .....	68
12.8	Spurious Emissions Radiated > 30 MHz .....	71
12.8.1	Spurious emissions radiated 30 MHz to 1 GHz .....	71
12.8.2	Spurious emissions radiated above 1 GHz .....	75
13	Observations .....	79
14	Glossary .....	79
15	Document history .....	80
16	Accreditation Certificate – D-PL-12076-01-04 .....	80
17	Accreditation Certificate – D-PL-12076-01-05 .....	81

## 1 General information

### 1.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

**This test report replaces the test report with the number 1-9831/20-05-02 and dated 2021-05-05.**

### 1.2 Application details

Date of receipt of order: 2020-11-03

Date of receipt of test item: 2021-04-07

Start of test:\* 2021-04-26

End of test:\* 2021-04-30

Person(s) present during the test: -/-

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 1.3 Test laboratories sub-contracted

None

## 2 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 2	February 2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 5	April 2018	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

Guidance	Version	Description
DTS: KDB 558074 D01	v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Accreditation	Description
D-PL-12076-01-04	Telecommunication and EMC Canada <a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf</a>
D-PL-12076-01-05	Telecommunication FCC requirements <a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf</a>


 Deutsche  
 Akkreditierungsstelle  
 D-PL-12076-01-04


 Deutsche  
 Akkreditierungsstelle  
 D-PL-12076-01-05

### 3 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

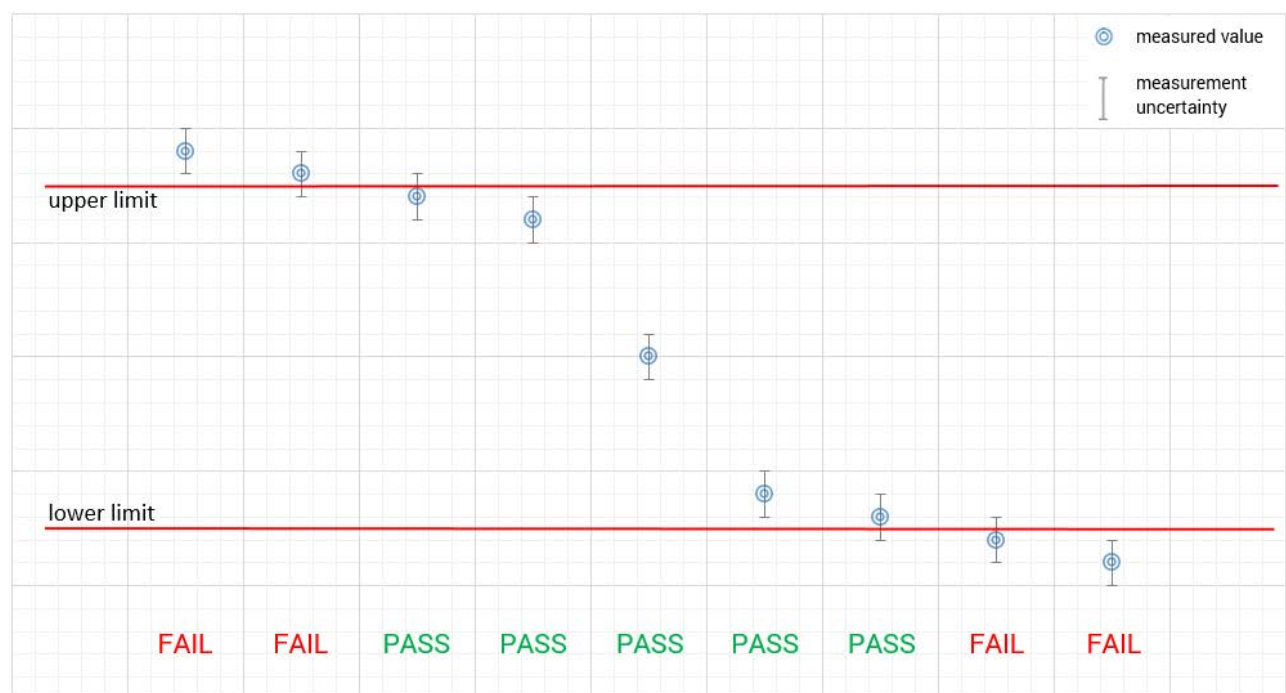

## 4 Test environment

Temperature :	T <sub>nom</sub> T <sub>max</sub> T <sub>min</sub>	22 °C during room temperature tests No tests under extreme conditions required. No tests under extreme conditions required.
Relative humidity content :		30 %
Barometric pressure :		Not relevant for this kind of testing
Power supply :	V <sub>nom</sub> V <sub>max</sub> V <sub>min</sub>	3.6 V DC by battery No tests under extreme conditions required. No tests under extreme conditions required.

## 5 Test item

### 5.1 General description

Kind of test item :	Parking sensor
Model name :	PLS110
HMN :	-/-
PMN :	PLS
HVIN :	TPS110
FVIN :	-/-
S/N serial number :	Rad. #2.2 Cond. #4
Hardware status :	R6 = series status
Software status :	0.39.4
Frequency band :	DTS band 902 MHz – 928 MHz
Type of radio transmission : Use of frequency spectrum :	DTS and Hybrid
Number of channels :	Hybrid mode (902.3-914.9 MHz): 64 DTS mode (903.0-914.2 MHz): 8
Antenna :	Integrated antenna Ethertronics M620720 with 0.75dBi peak gain
Power supply :	3.6 V DC by battery
Temperature range :	-20°C to 65°C

### 5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-9831\_20-05-01\_AnnexA  
 1-9831\_20-05-01\_AnnexB  
 1-9831\_20-05-01\_AnnexD

## 6 Sequence of testing

### 6.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*)Note: The sequence will be repeated three times with different EUT orientations.



## 6.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 6.3 Sequence of testing radiated spurious 1 GHz to 12.75 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

**Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vk!l	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

## 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

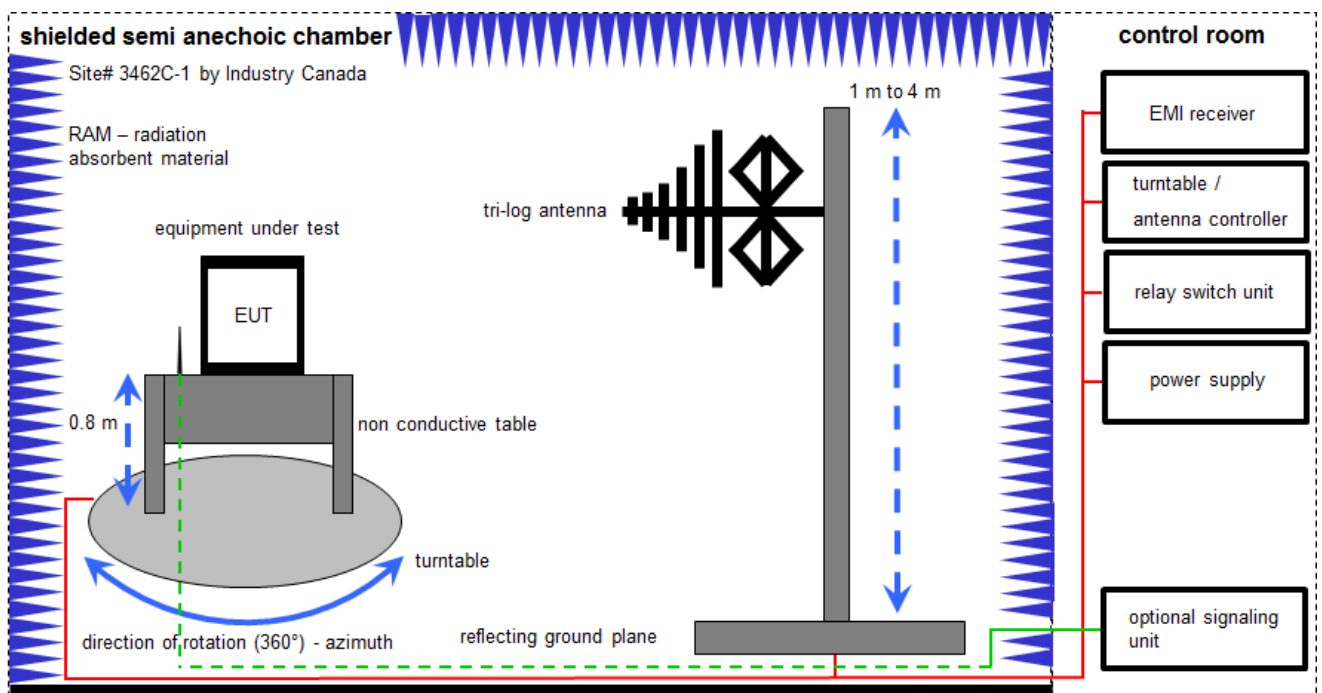


Measurement distance: tri-log antenna 10 meter  
 EMC32 software version: 10.59.00

### Equipment table:

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Meßkabine 1	HF-Absorberhalle	MWB AG 300023	-/-	300000551	ne	-/-	-/-
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
5	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	318	300003696	vKI!	04.09.2019	03.09.2021
7	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	10.12.2020	09.06.2022
8	A	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2920A04466	300000580	ne	-/-	-/-

## 7.2 Shielded fully anechoic chamber

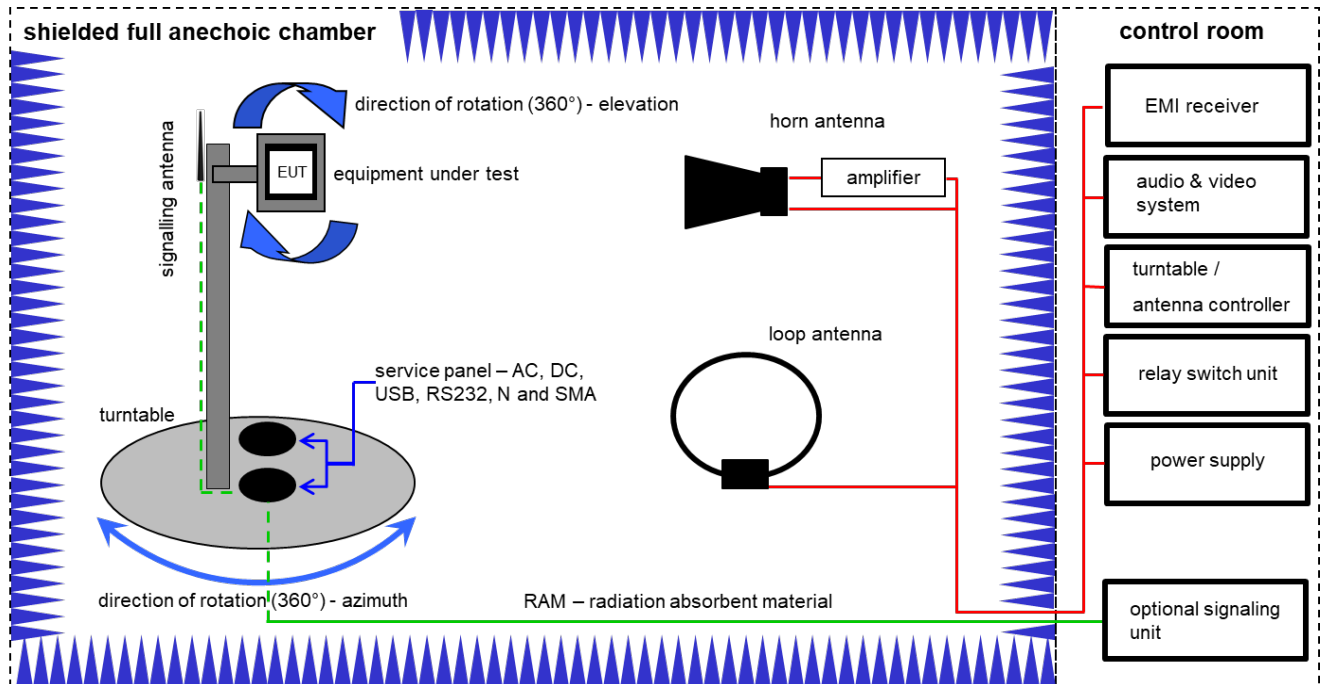

Measurement distance: horn antenna 3 meter; loop antenna 3 meter / 1 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

### Example calculation:


$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB/m]} = 37.1 \text{ [dB}\mu\text{V/m]} \text{ (71.61 } \mu\text{V/m)}$$

### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	B	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vKII	13.06.2019	12.06.2021
2	A	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3696	300001604	vKII	12.03.2021	11.03.2023
3	A+B	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2920A04590	300001041	vKII	09.12.2020	08.12.2023
4	A	Highpass Filter	WHK1.1/15G-10SS	Wainwright	37	400000148	ne	-/-	-/-
5	A	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne	-/-	-/-
6	A	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22051	300004483	ev	-/-	-/-
7	A+B	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
8	A+B	Computer	Intel Core i3 3220/3,3 GHz, Prozessor		2V2403033A54 21	300004591	ne	-/-	-/-
9	A	Highpass Filter	WHKX2.6/18G- 10SS	Wainwright	12	300004651	ne	-/-	-/-
10	A+B	NEXIO EMV- Software	BAT EMC V3.20.0.17	EMCO		300004682	ne	-/-	-/-
11	A+B	Anechoic chamber		TDK		300003726	ne	-/-	-/-
12	A+B	EMI Test Receiver 9kHz-26,5GHz	ESR26	Rohde & Schwarz	101376	300005063	k	09.12.2020	08.12.2021
13	A	RF-Amplifier	AMF-6F06001800- 30-10P-R	NARDA-MITEQ Inc	2011571	300005240	ev	-/-	-/-

### 7.3 Conducted measurements

#### Conducted measurements normal conditions

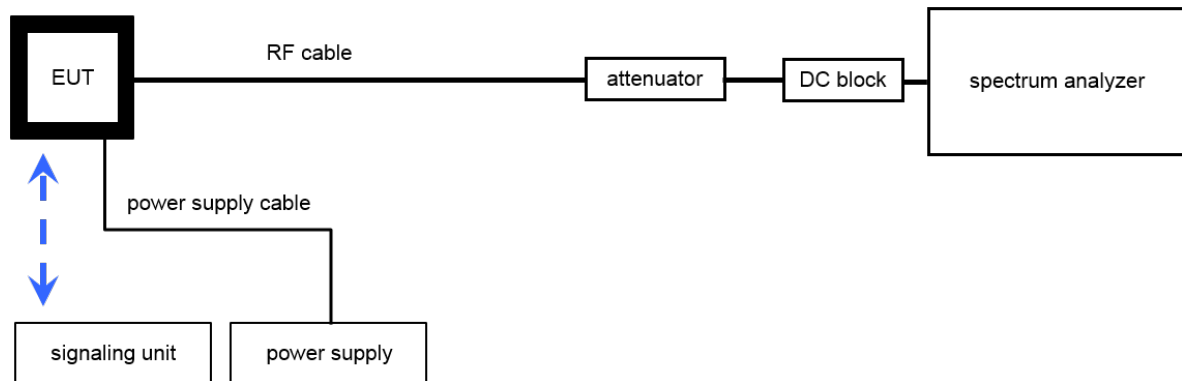

OP = AV + CA  
 (OP-output power; AV-analyzer value; CA-loss signal path)

#### Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

#### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal Analyzer 40 GHz	FSV40	Rohde & Schwarz	101353	300004819	k	12.01.2021	11.01.2022
2	A	RF-Cable WLAN-Tester Port 1	ST18/SMAM/SMAM/36	Huber & Suhner	Batch no. 601494	400001216	g	-/-	-/-

## 8 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Antenna gain	$\pm 3$ dB
Carrier frequency separation	$\pm 21.5$ kHz
Number of hopping channels	-/-
Spectrum bandwidth	$\pm 21.5$ kHz absolute; $\pm 15.0$ kHz relative
Maximum output power	$\pm 1$ dB
Detailed conducted spurious emissions @ the band edge	$\pm 1$ dB
Band edge compliance radiated	$\pm 3$ dB
Spurious emissions conducted	$\pm 3$ dB
Spurious emissions radiated below 30 MHz	$\pm 3$ dB
Spurious emissions radiated 30 MHz to 1 GHz	$\pm 3$ dB
Spurious emissions radiated 1 GHz to 12.75 GHz	$\pm 3.7$ dB
Spurious emissions radiated above 12.75 GHz	$\pm 4.5$ dB

## 9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

### 9.1 Part 1: Hybrid

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 2	Passed	2021-05-14	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Declared
§15.247(a)(1) RSS - 247 / 5.1 (b)	Carrier frequency separation	Nominal	Nominal	TX hopping	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(1) (iii) RSS - 247 / 5.1 (d)	Time of occupancy (dwell time)	Nominal	Nominal	TX hopping	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(1) RSS - 247 / 5.1 (a)	Spectrum bandwidth of a hybrid system bandwidth	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance conducted	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance radiated	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§§15.247(d) RSS - 247 / 5.5	TX spurious emissions conducted	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions below 30 MHz (AC conducted)	Nominal	Nominal	TX single channel	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-/-

**Note:** C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed



## 9.2 Part 2: DTS

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Declared
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS Gen clause 4.6.1	Spectrum bandwidth 6dB bandwidth	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance conducted	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance radiated	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§§15.247(d) RSS - 247 / 5.5	TX spurious emissions conducted	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

## 10 RF measurements

### 10.1 Additional comments

Reference documents:	AVX-E_M620720.pdf Customer_Questionnaire_1-1301-16_TPS110_v07.docx
Special test descriptions:	The EUT uses a Long Range Wide Area Network (LoRaWAN) technology with a combination of a Hybrid system and a DTS system. Both systems were tested completely.
Configuration descriptions:	<p>Hybrid: 64 channels with a nominal bandwidth of 125 kHz and 200 kHz channel spacing</p> <p style="margin-left: 40px;">lowest channel 902.3 MHz, middle channel 908.5 MHz, highest channel 914.9 MHz;</p> <p style="margin-left: 40px;">these channels were tested in part 1 of this test report.</p> <p>DTS: 8 channels with 500 kHz nominal bandwidth and 1600 kHz channel spacing</p> <p style="margin-left: 40px;">lowest channel 903.0 MHz, middle channel 907.8 MHz, highest channel 914.2 MHz;</p> <p style="margin-left: 40px;">these channels were tested in part 2 of this test report.</p>
Test mode:	<input checked="" type="checkbox"/> Special software is used. EUT is transmitting pseudo random data by itself

## **11 Measurement results Part 1 Hybrid**

### **11.1 Antenna gain**

Antenna gain declared by manufacturer (see section 5.1).

## 11.2 Carrier Frequency Separation

### Description:

Measurement of the carrier frequency separation of a hopping system. EUT in hopping mode.

### Measurement:

Measurement parameters	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	See plots
Video bandwidth	See plots
Span	See plots
Trace mode	Max hold
Test setup	See chapter 7.3 A
Measurement uncertainty	See chapter 8


### Limits:

FCC	IC
Carrier frequency separation	
Minimum 25 kHz or two-thirds of the 20 dB bandwidth of the hopping system whichever is greater. The two-thirds of the 20 dB bandwidth for IC is only valid for the ISM band 2400 – 2483.5 MHz.	

**Result:** The channel separation is 201.2 kHz.

## Plots:

Plot 1: Frequency separation

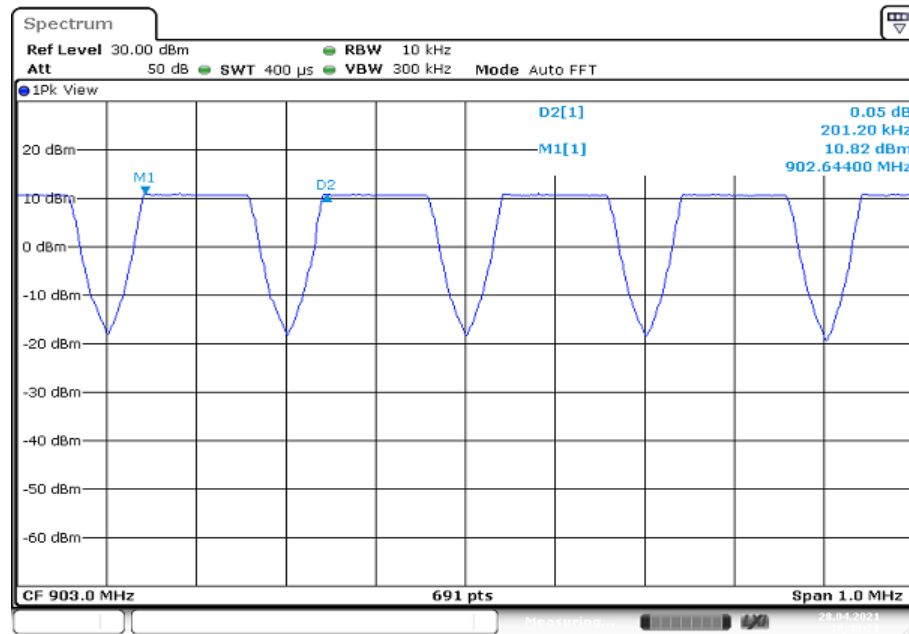

### 11.3 Average Time of Occupancy (dwell time)

#### Measurement:

The measurement is performed in zero span mode to show that none of the 64 used channels is allocated more than 0.4 seconds within a 25.6 seconds interval (64 channels times 0.4s).

Measurement parameters	
Detector	Peak
Resolution bandwidth	See plots
Video bandwidth	See plots
Span	See plots
Trace mode	Max hold
Test setup	See chapter 7.3 A
Measurement uncertainty	See chapter 8

#### Limits:

FCC	IC
Average time of occupancy	
For frequency hopping systems operating in the 902-928 MHz band: If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within 10 second period.	


**Result:** The time slot length is = 36.1 ms  
 Number of hops / channel @ 20s = 3

Within 25.6 s period, the average time of occupancy in 25.6 s: 108.3 ms


→ The average time of occupancy = **108.3 ms**

**Plots:**

Plot 1: Time slot length = 36.1 ms

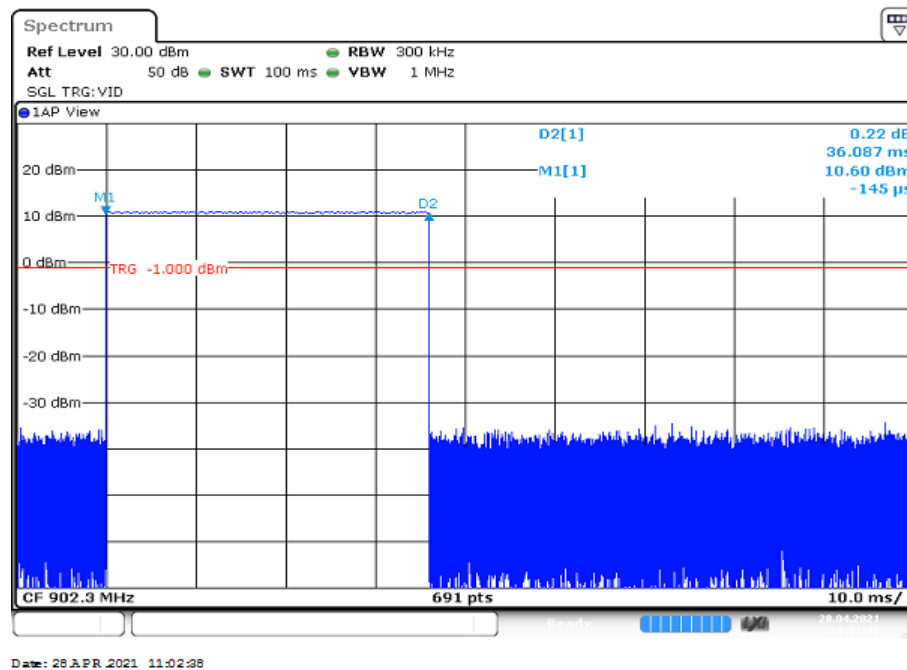

Plot 2: hops / channel @ 25.6s = 3

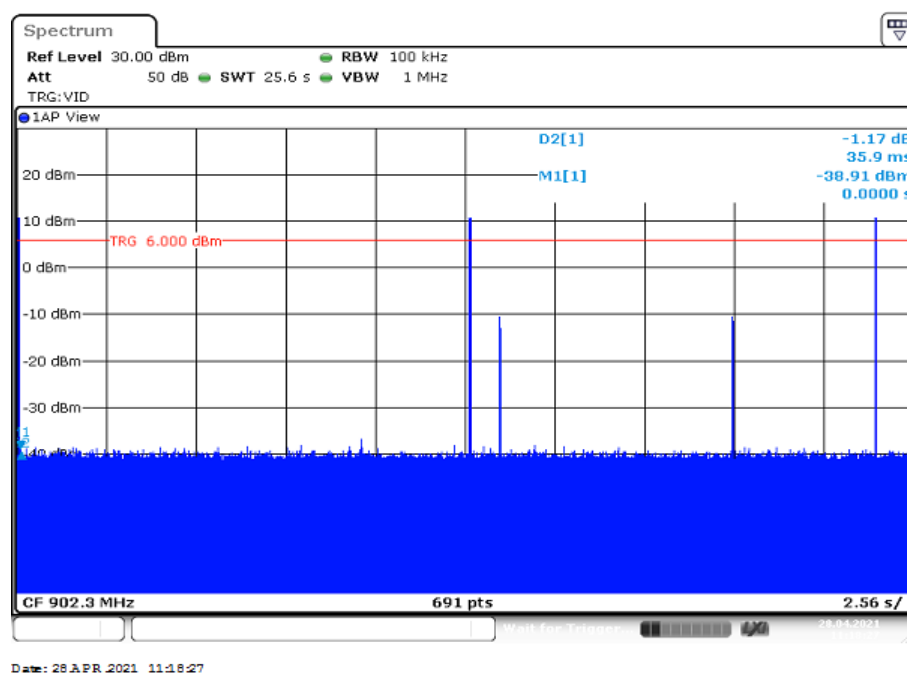

## 11.4 Spectrum bandwidth of a Hybrid system

### Description:

Measurement of the 20dB bandwidth and 99% bandwidth of the modulated signal. The measurement is performed according to the "Measurement Guidelines" (DA 00-705, March 30, 2000). EUT in single channel mode.

### Measurement:

Measurement parameters	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	5 kHz
Video bandwidth	100 kHz
Span	See plots
Trace mode	Max hold
Test setup	See chapter 7.3 A
Measurement uncertainty	See chapter 8

### Limits:

FCC	IC
Spectrum bandwidth of a Hybrid system	
The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.	

### Result:


Test Conditions		20dB Bandwidth / kHz		
		Low channel	Middle channel	High channel
$T_{nom}$	$V_{nom}$	146.5	146.5	146.5

Test Conditions		99% Bandwidth / kHz		
		Low channel	Middle channel	High channel
$T_{nom}$	$V_{nom}$	128.1	128.1	128.1




**Plots:**


Plot 1: Low Channel, 20 dB-BW

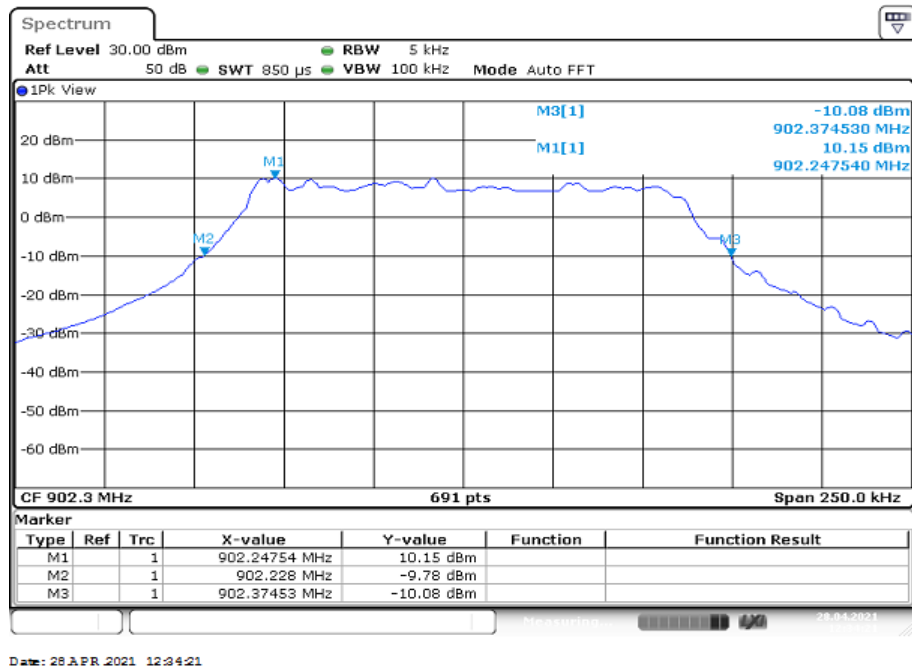


Plot 2: Low Channel, 99%OBW

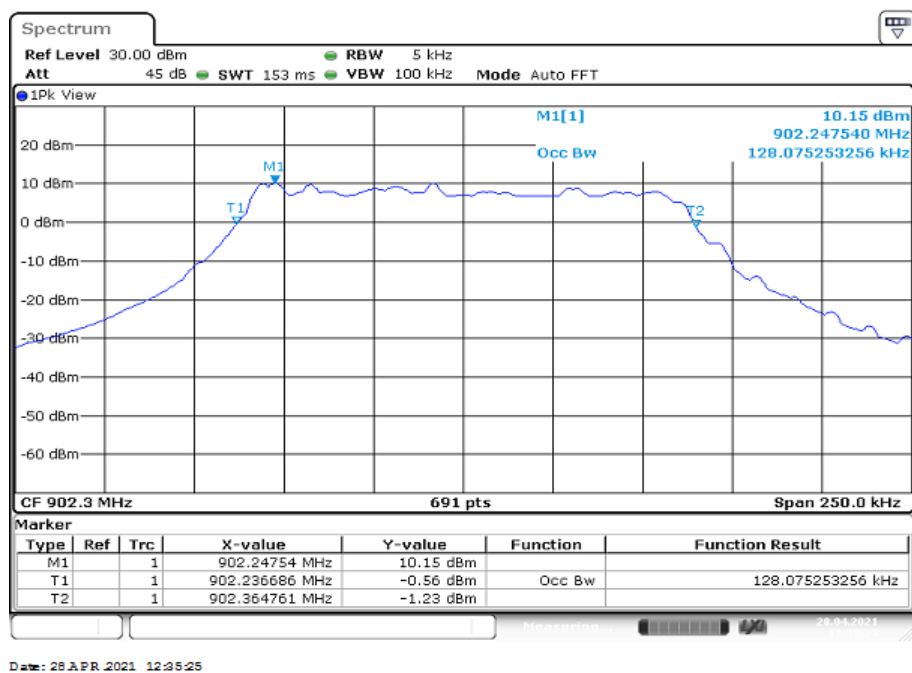


Plot 3: Middle Channel, 20 dB-BW

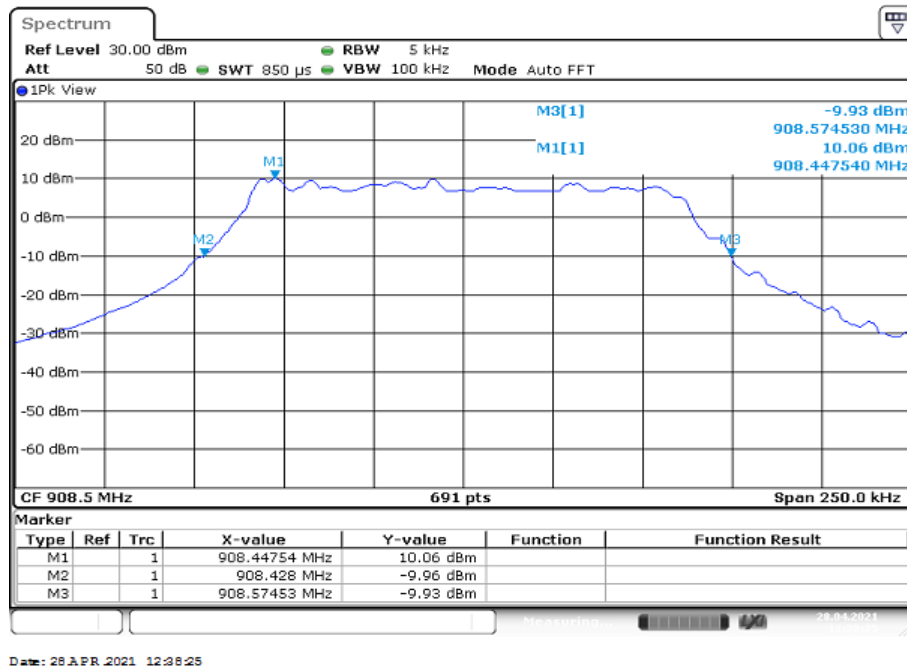


Plot 4: Middle Channel, 99%OBW

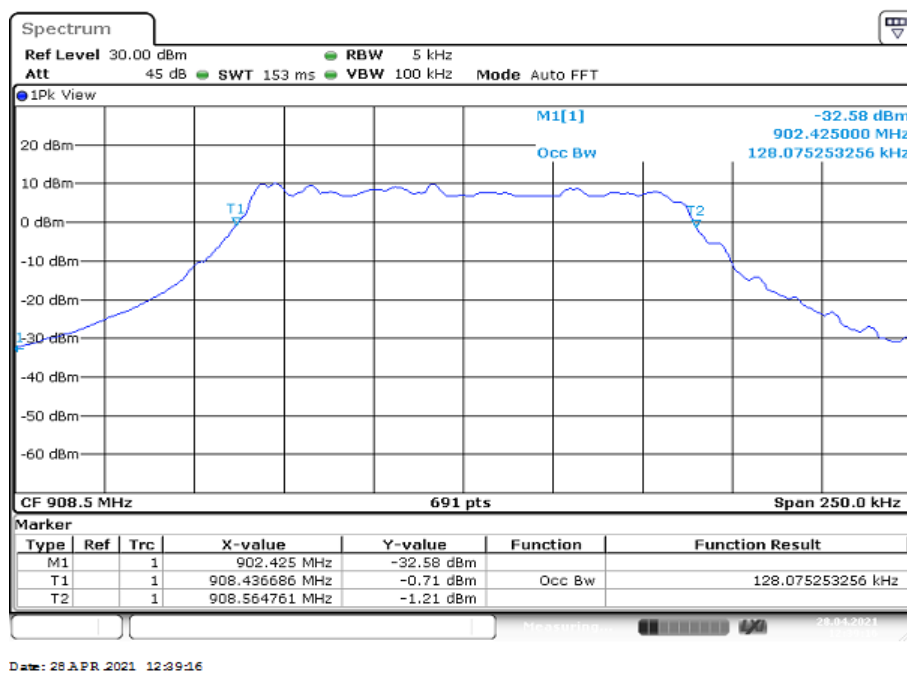

Plot 5: High Channel, 20 dB-BW

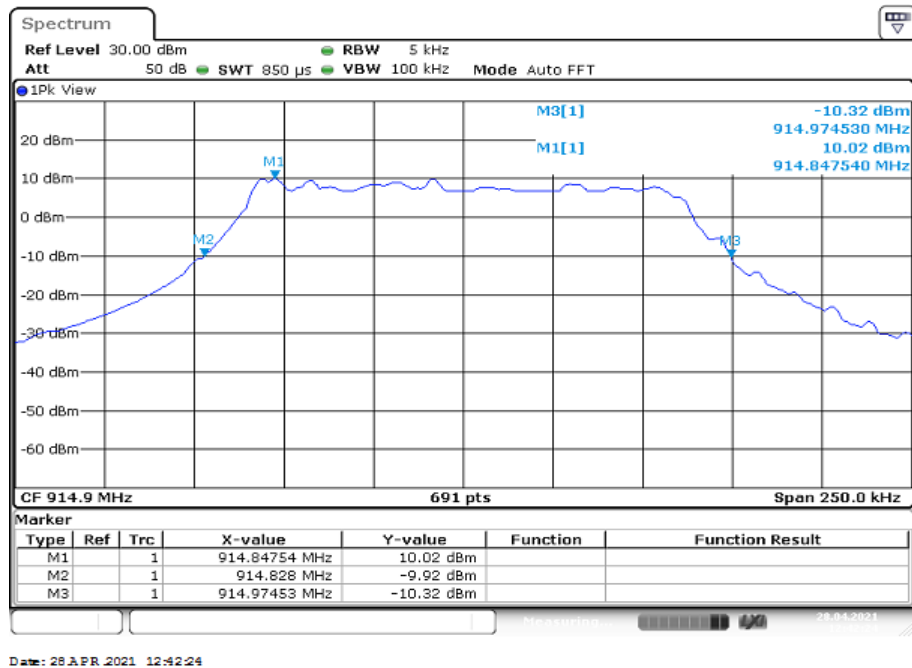

Plot 6: High Channel, 99%OBW

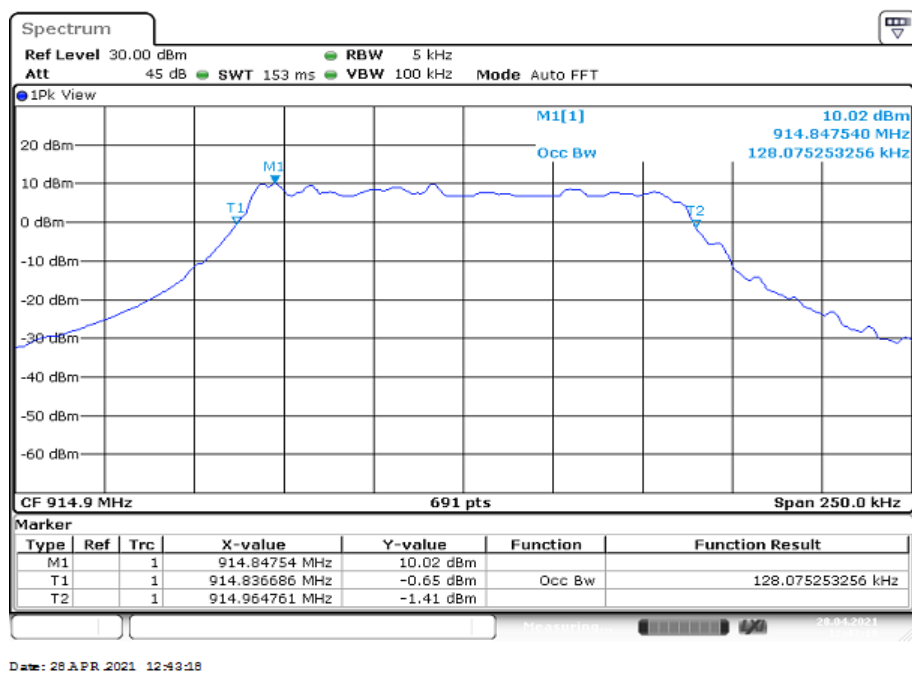

## 11.5 Maximum Output Power

### Measurement:

Measurement parameter	
Detector:	RMS
Sweep time:	Auto
Resolution bandwidth:	5 kHz
Video bandwidth:	100 kHz
Span:	264 kHz
Trace-Mode:	Max Hold
Measurement method:	According to ANSI C63.10-2013 11.9.2.2.5 Method AVGSA-2A
Used equipment:	See chapter 7.3 A
Measurement uncertainty:	See chapter 8

### Limits:

FCC	IC
Maximum Output Power Conducted	
For frequency hopping systems operating in the 902–928 MHz band: 1 watt (30 dBm) for systems employing at least 50 hopping channels; and, 0.25 watts (24 dBm) for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.	


### Result:

Test Conditions		Maximum Output Power Conducted / dBm		
		Low channel	Middle channel	High channel
$T_{nom}$	$V_{nom}$	9.3	9.2	9.1


Test Conditions		ERP / dBm		
		Low channel	Middle channel	High channel
$T_{nom}$	$V_{nom}$	10.1	10.0	9.9

## Plots:


Plot 1: Low Channel

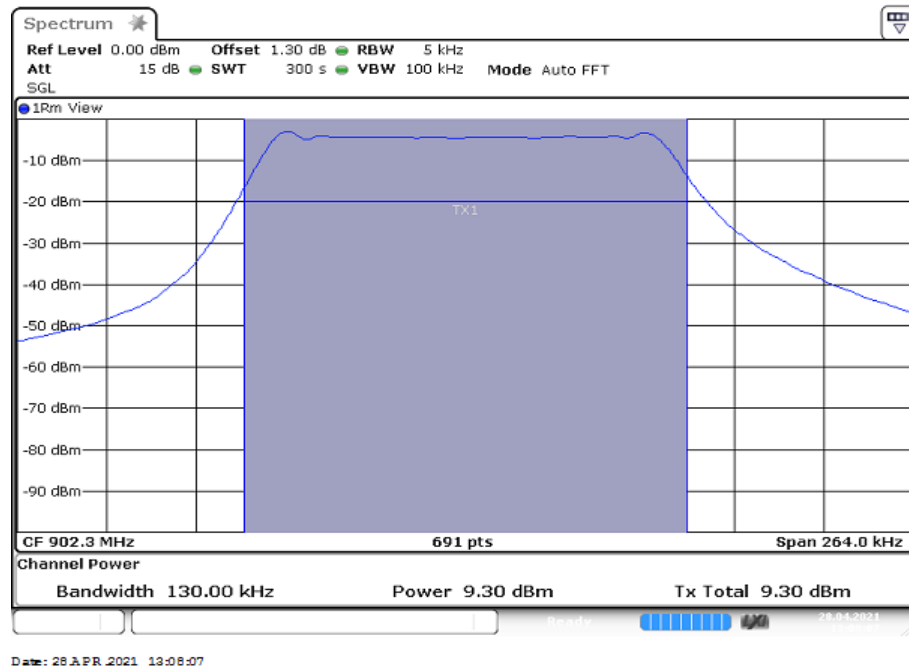

Plot 2: Middle Channel

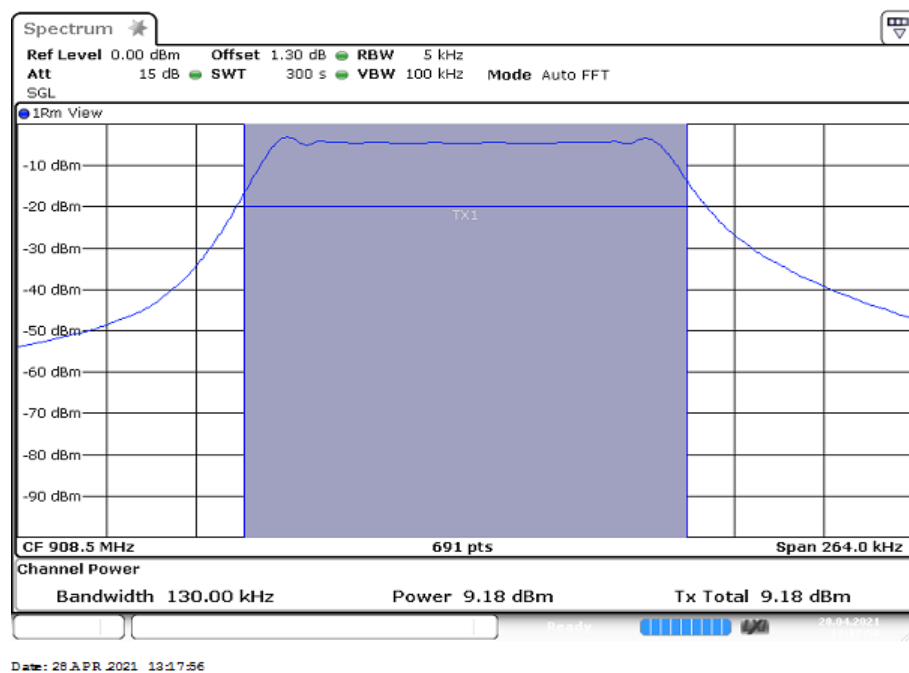

Plot 3: High Channel

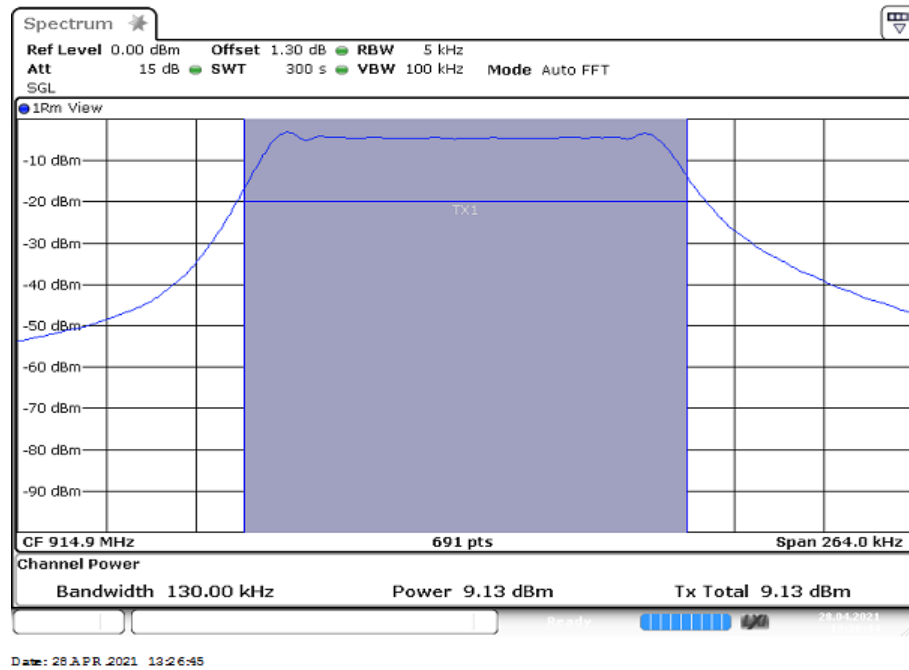

## 11.6 Power spectral density

### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

### Measurement:

Measurement parameter	
Detector:	RMS
Sweep time:	100 s
Video bandwidth:	10 kHz
Resolution bandwidth:	3 kHz
Span:	200 kHz
Trace mode:	Max Hold
Measurement method	According to ANSI C63.10-2013 11.10.4 Method AVGPS-1A (alternative)
Test setup	See chapter 7.3 A
Measurement uncertainty	See chapter 8

### Limits:


FCC	IC
Power Spectral Density	
The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	

### Results:


Channel	Power Spectral density [dBm/3kHz]		
	Lowest	Middle	Highest
	-4.8	-5.0	-5.0

## Plots:

Plot 1: Low Channel

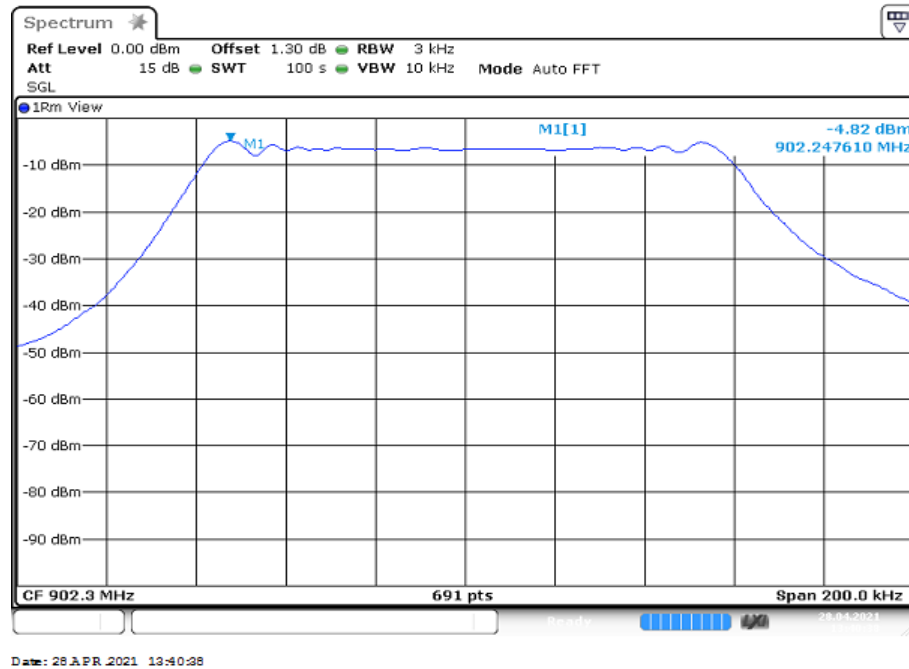


Plot 2: Middle Channel

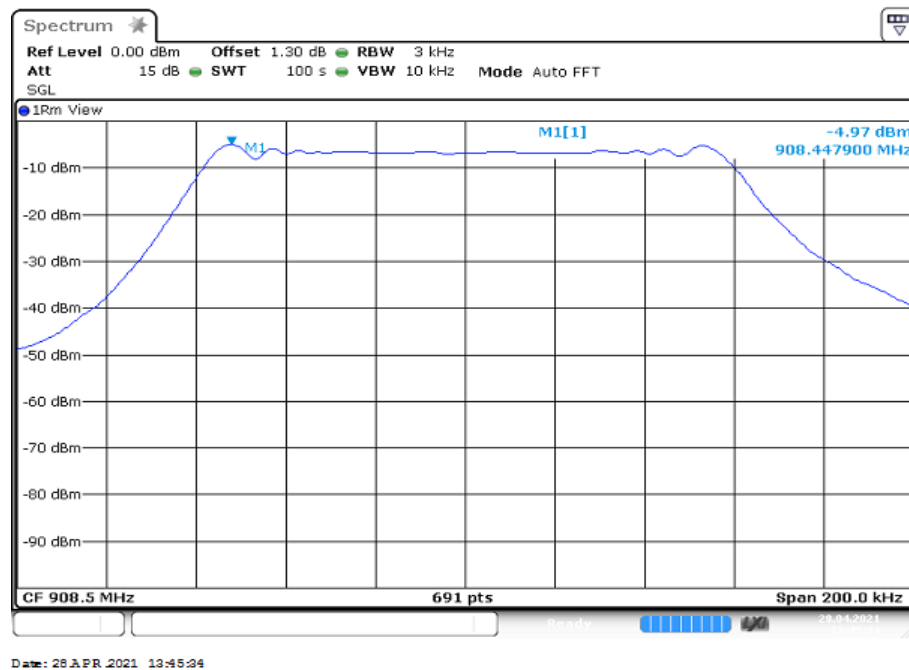



Plot 3: High Channel

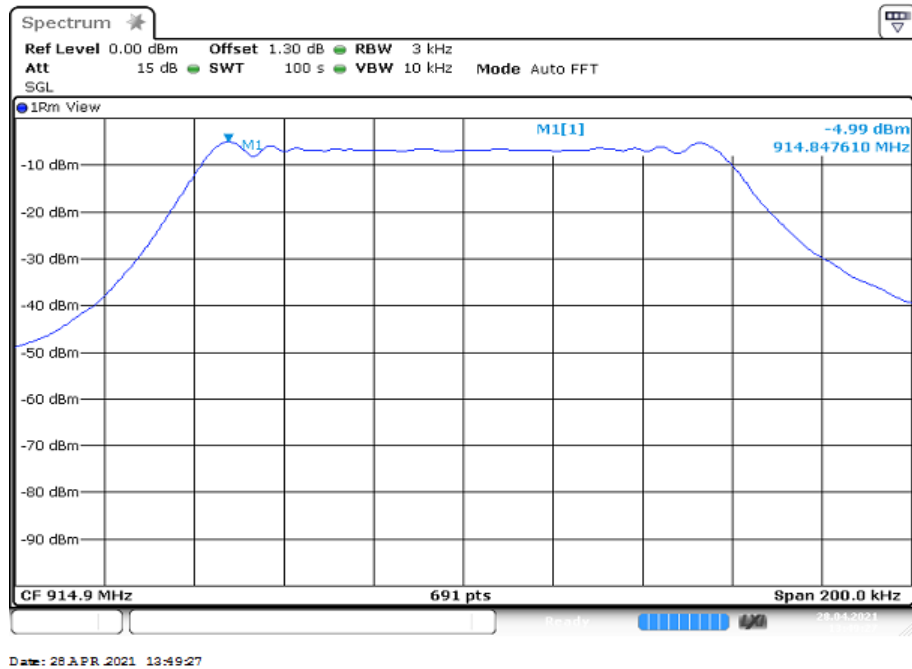

## 11.7 Detailed spurious emissions @ the band edge – conducted and radiated

### Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in single channel mode.

### Measurement:



Measurement parameters	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	Lower Band Edge: 902 MHz Upper Band Edge: 928 MHz
Trace mode	Max hold
Test setup	See chapter 7.3 A
Measurement uncertainty	See chapter 8

### Limits:

FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	

### Results conducted:

Scenario	Spurious band edge conducted	
	lowest channel	highest channel
Lower band edge – hopping on	> 30 dB	> 30 dB
Upper band edge – hopping on	> 30 dB	> 30 dB

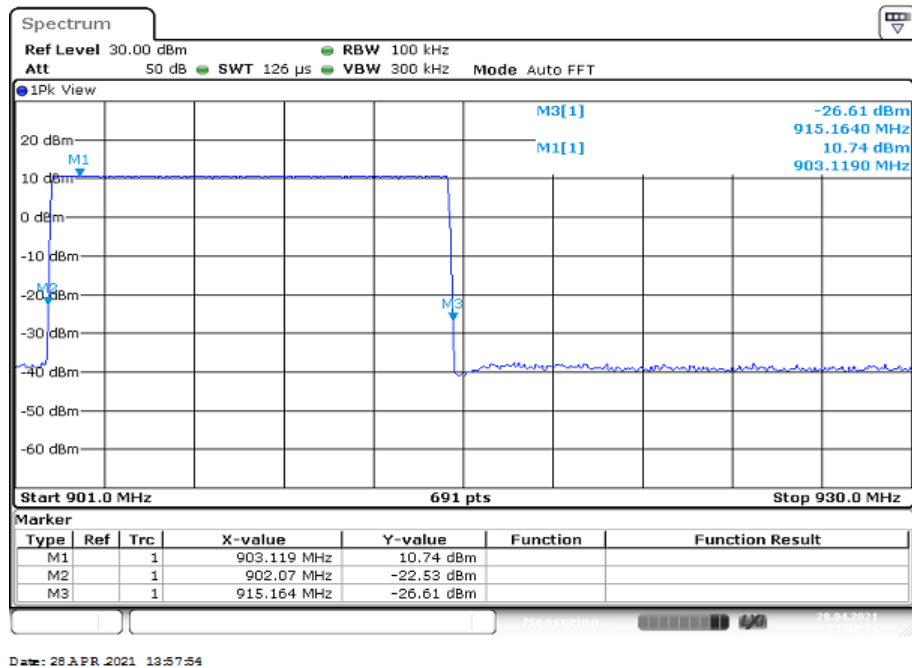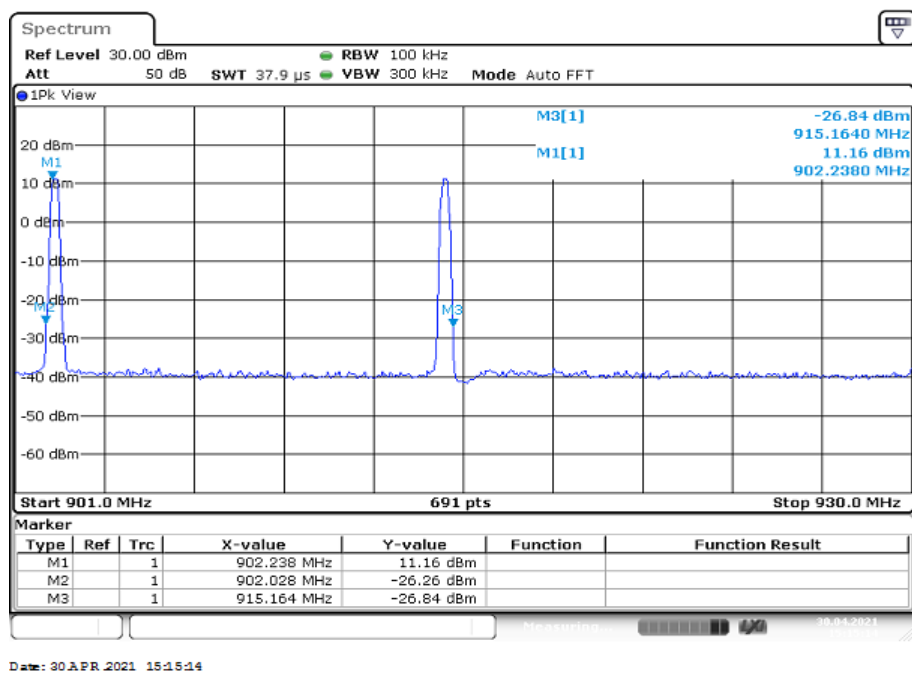**Plots:****Plot 1: 30 dB – hopping on****Plot 2: 30 dB – hopping off**

**Results radiated:**

No restricted band in the range  $\pm 2$  channel bandwidths of the Band-edges of the specified emission band! (608 MHz – 614 MHz and 960 MHz – 1240 MHz).

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

## 11.8 Spurious Emissions Conducted

### Description:

Measurement of the conducted spurious emissions in transmit mode. The EUT is set to single channel mode. The measurement is repeated for low, mid and high channel.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 1 MHz F > 1 GHz: 1 MHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Span:	9 kHz to 12.75 GHz
Trace-Mode:	Max Hold
Used equipment:	See chapter 7.3A
Measurement uncertainty:	See chapter 8

### Limits:


FCC	IC
TX spurious emissions conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

### Result:


Emission Limitation					
Frequency / MHz		Amplitude of emission / dBm	Limit max. allowed emission power	actual attenuation below frequency of operation / dB	Results
902.1		10.9	24 dBm		Operating frequency
No emissions detected!			-20 dBc		
909.3		10.7	24 dBm		Operating frequency
No emissions detected!			-20 dBc		
914.8		10.8	24 dBm		Operating frequency
No emissions detected!			-20 dBc		

**Plots:**


Plot 1: Low channel, 9 kHz – 12.75 GHz

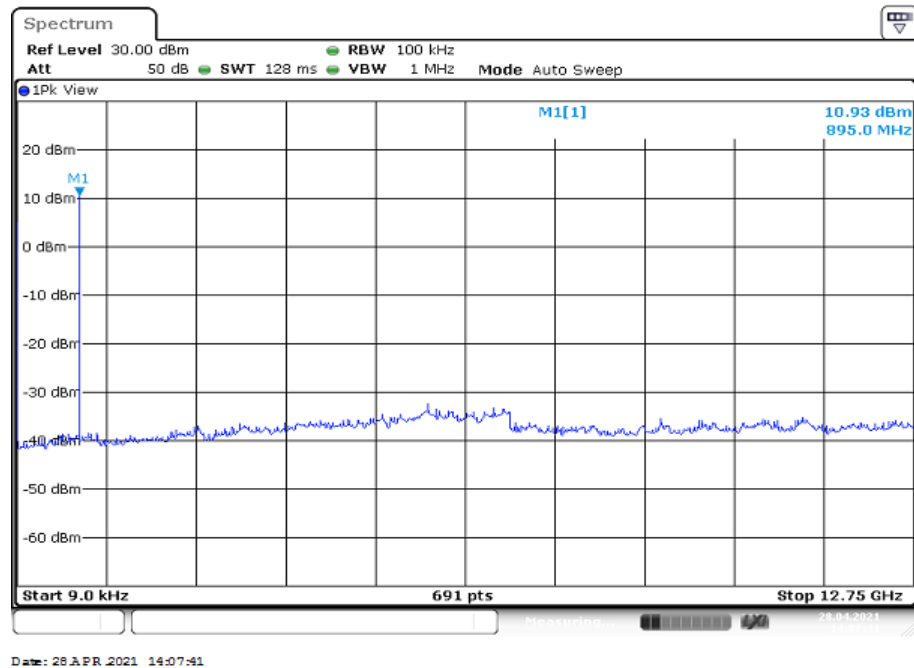

Plot 2: Middle channel, 9 kHz – 12.75 GHz

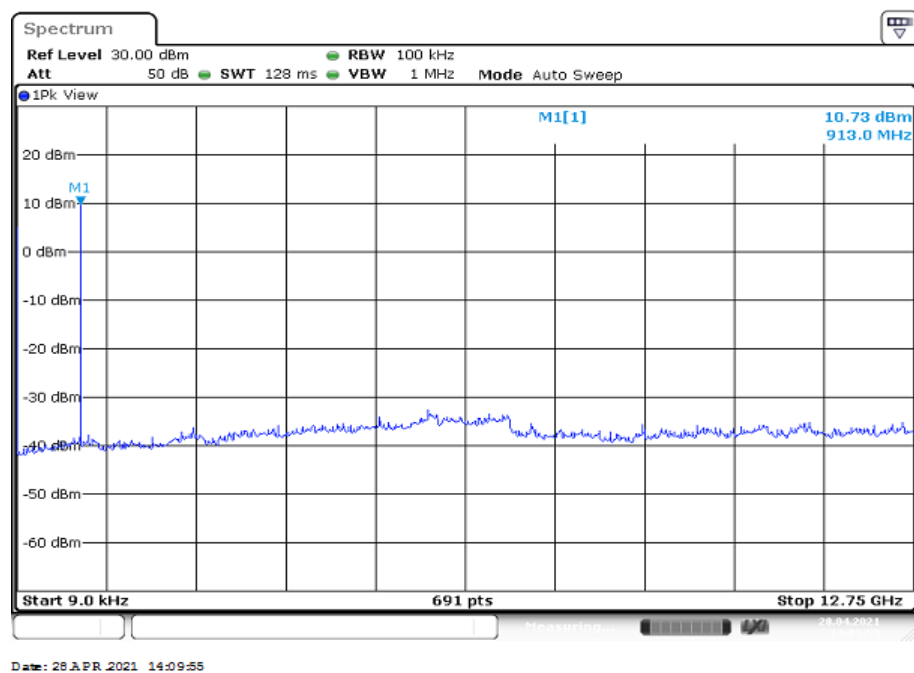

Plot 3: High channel, 9 kHz – 12.75 GHz

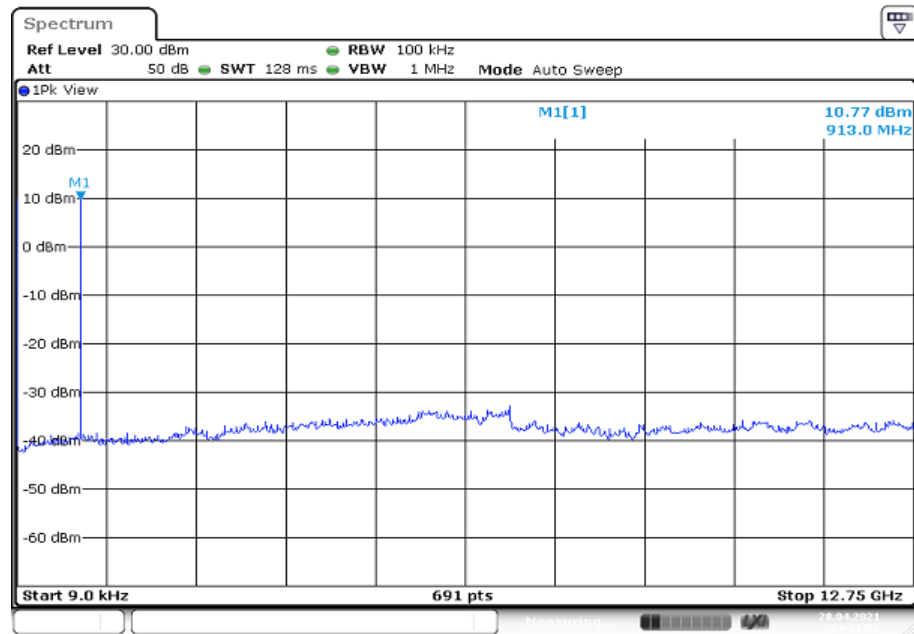

Date: 28 APR 2021 14:11:52

## 11.9 Spurious Emissions Radiated < 30 MHz

### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channels are 00; 39 and 78. The measurement is performed in the mode with the highest output power. The limits are recalculated to a measurement distance of 3 m according the ANSI C63.10.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold
Used equipment:	See chapter 7.2 B
Measurement uncertainty:	See chapter 8

### Limits:

FCC		IC
TX spurious emissions radiated < 30 MHz		
Frequency / MHz	Field strength / (dBµV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30


### Result:

Spurious emission level								
Lowest channel			Middle channel			Highest channel		
Frequency / MHz	Detector	Level / (dBµV/m)	Frequency / MHz	Detector	Level / (dBµV/m)	Frequency / MHz	Detector	Level / (dBµV/m)
All detected emissions are more than 10 dB below the limit.								




## Plots:


Plot 1: TX-Mode low channel

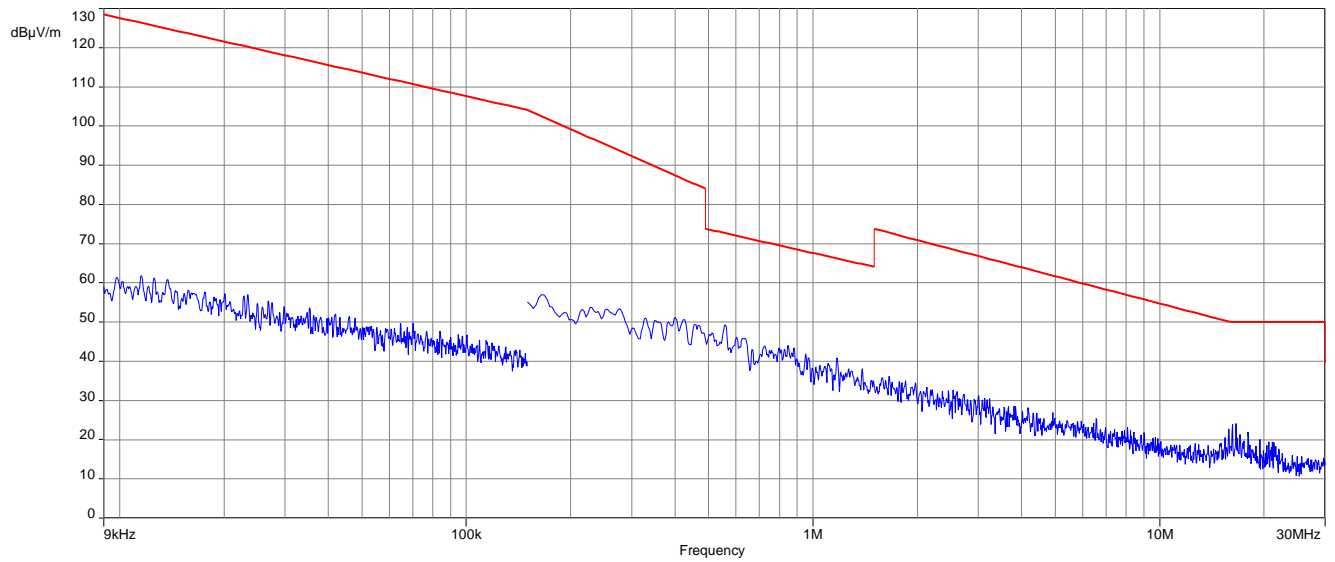

Plot 2: TX-Mode mid channel

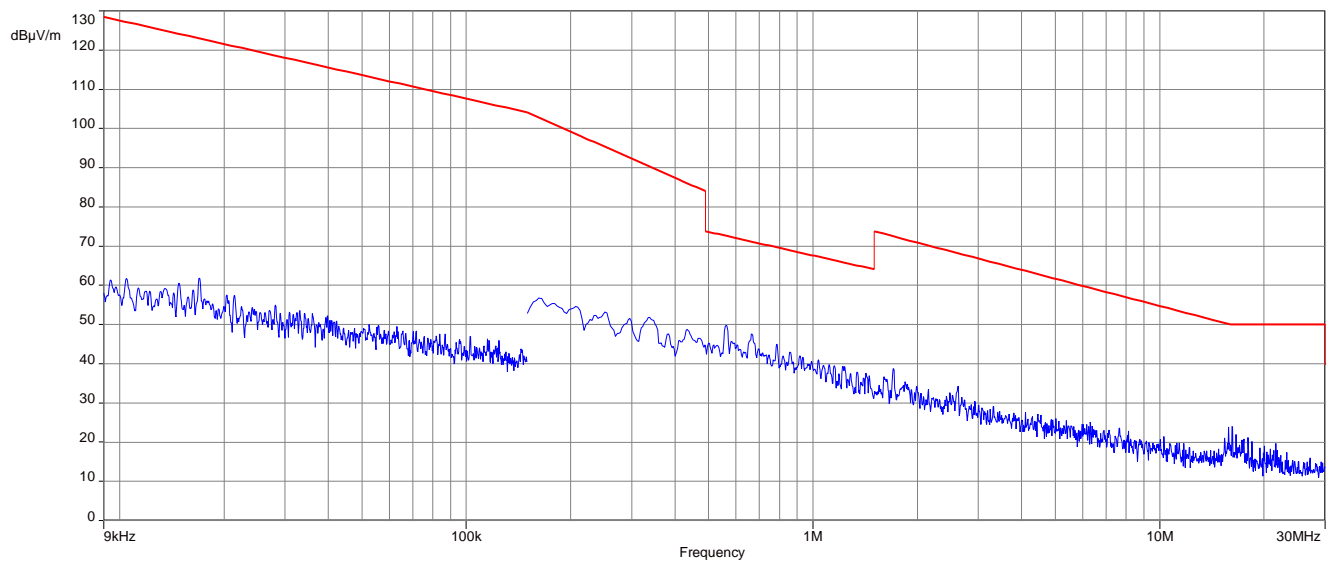

Plot 3: TX-Mode high channel

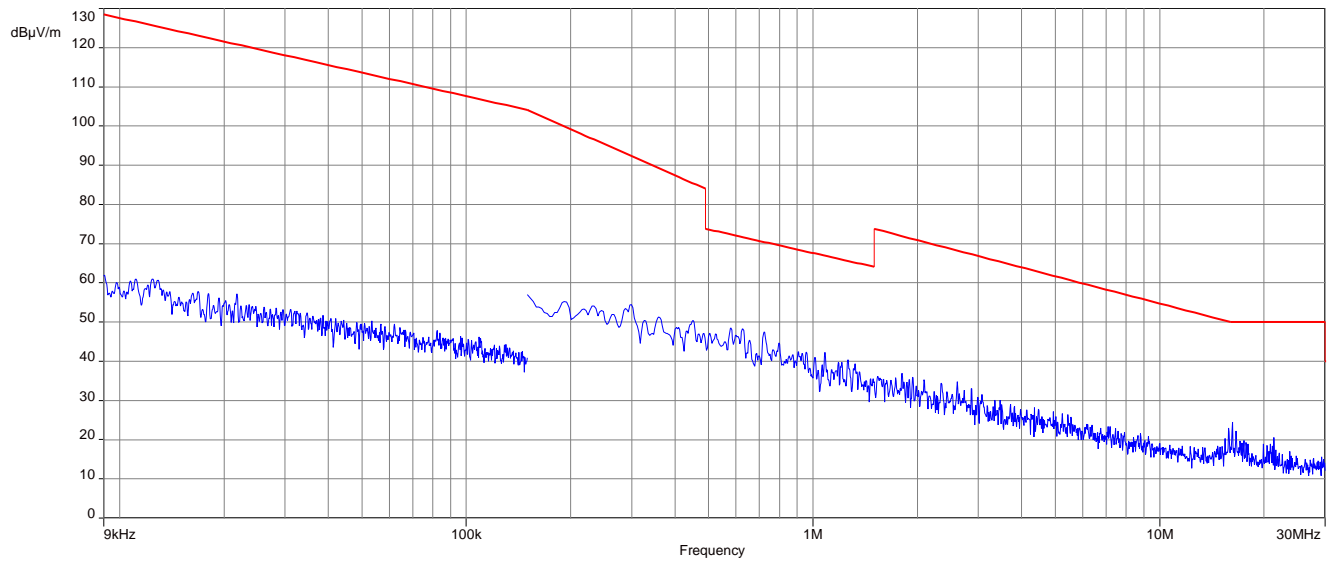

## 11.10 Spurious Emissions Radiated > 30 MHz

### 11.10.1 Spurious emissions radiated 30 MHz to 1 GHz

#### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel low, mid and high.

#### Measurement:

Measurement parameters	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	3 x VBW
Video bandwidth	120 kHz
Span	30 MHz to 1 GHz
Trace mode	Max hold
Test setup	See chapter 7.1 A
Measurement uncertainty	See chapter 8


#### Limits:

FCC		IC
Band-edge Compliance of conducted and radiated emissions		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dBµV/m)	Measurement distance / m
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

**Result:** See result table below the plots.


**Plots:**

Plot 1: 30 MHz – 1 GHz, horizontal &amp; vertical polarisation (lowest channel)

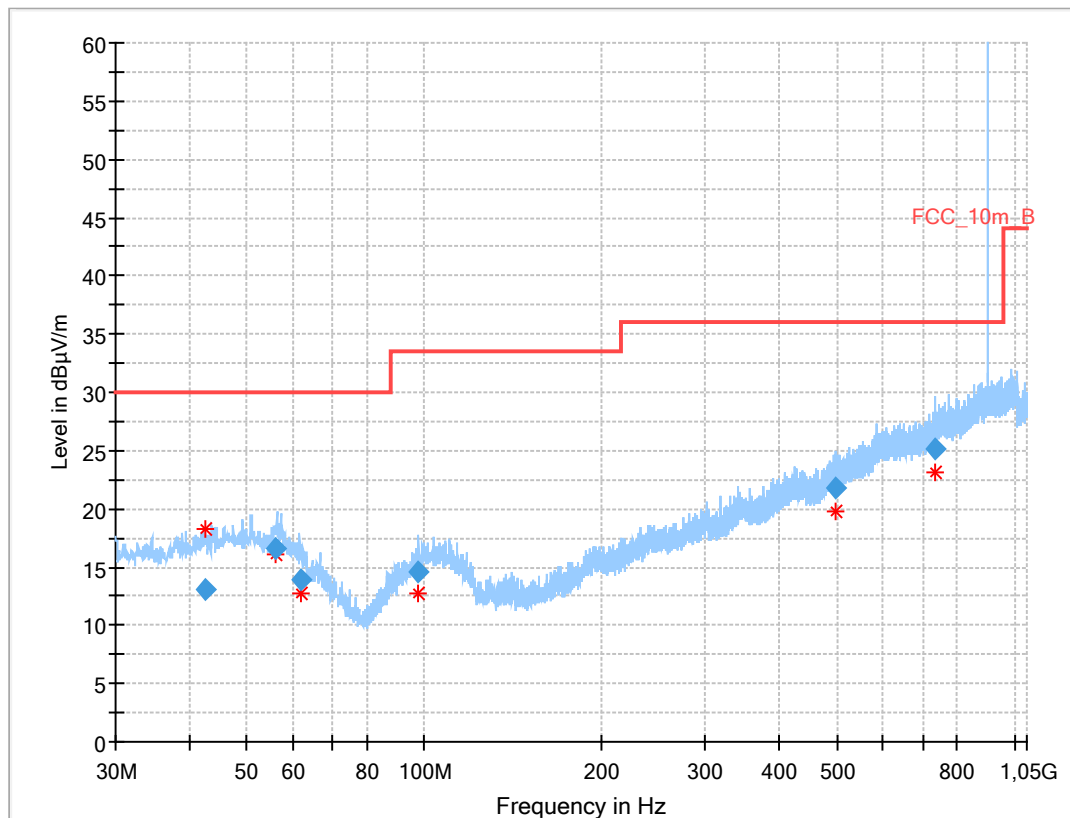**Final results:**


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.718	13.02	30.0	17.0	1000	120.0	139.0	H	277	14
55.915	16.64	30.0	13.4	1000	120.0	170.0	V	247	15
62.069	13.96	30.0	16.0	1000	120.0	136.0	H	248	12
97.941	14.52	33.5	19.0	1000	120.0	130.0	V	247	12
496.432	21.86	36.0	14.1	1000	120.0	121.0	H	157	18
732.951	25.08	36.0	10.9	1000	120.0	170.0	H	67	22

Plot 2: 30 MHz – 1 GHz, horizontal &amp; vertical polarisation (middle channel)

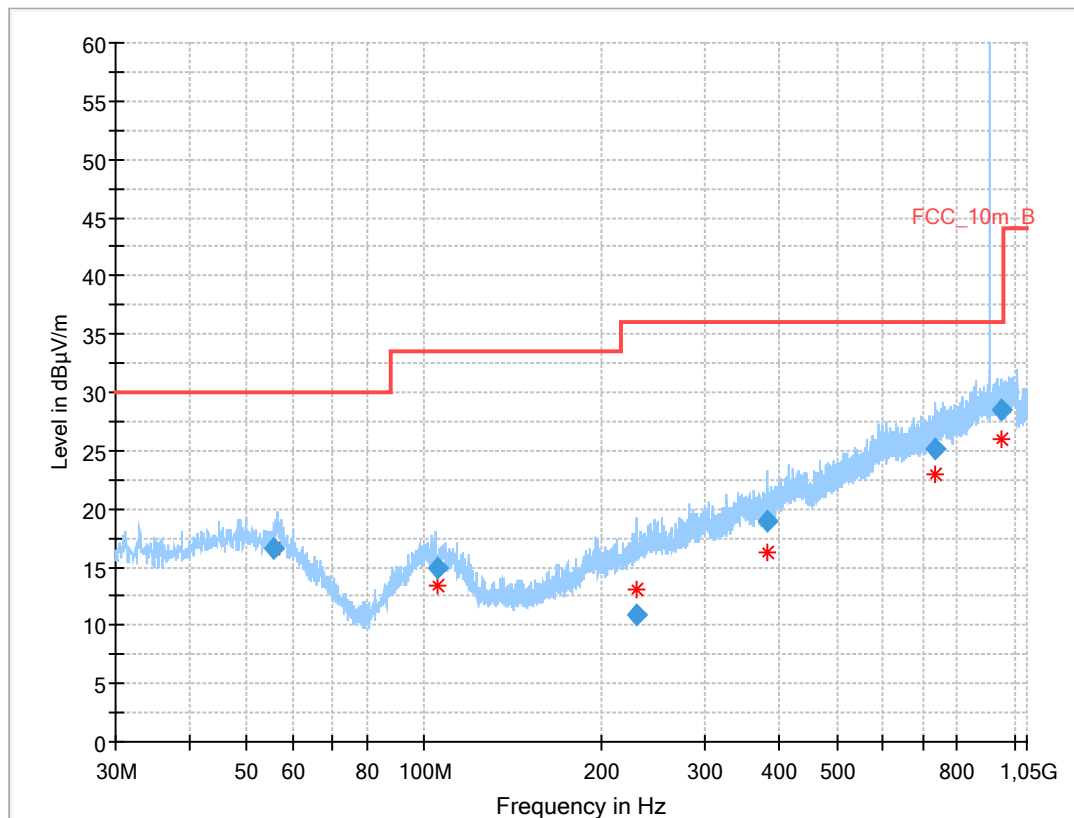**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
55.769	16.61	30.0	13.4	1000	120.0	131.0	V	86	15
104.998	14.89	33.5	18.6	1000	120.0	170.0	V	247	13
229.475	10.90	36.0	25.1	1000	120.0	157.0	V	-22	12
381.819	18.98	36.0	17.0	1000	120.0	104.0	V	-22	16
735.179	25.19	36.0	10.8	1000	120.0	170.0	V	157	22
951.094	28.47	36.0	7.5	1000	120.0	170.0	V	-22	24

Plot 3: 30 MHz – 1 GHz, horizontal &amp; vertical polarisation (highest channel)

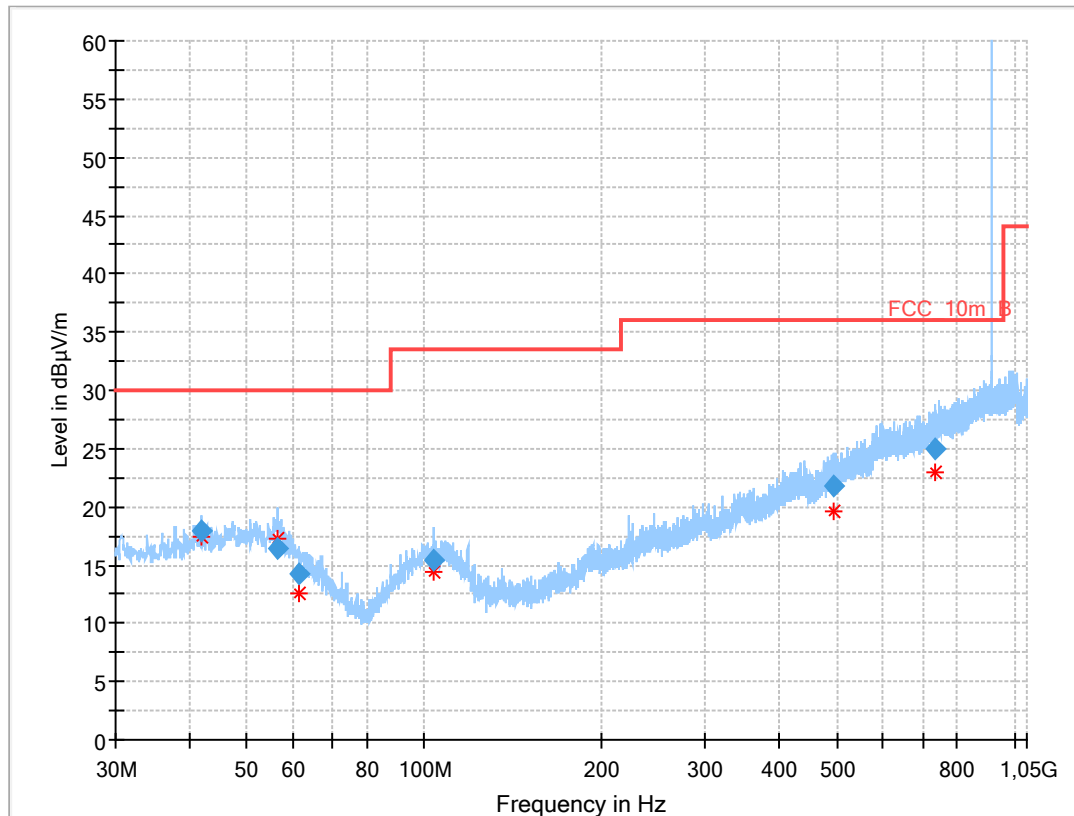**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
41.810	17.94	30.0	12.1	1000	120.0	106.0	H	67	14
56.479	16.47	30.0	13.5	1000	120.0	122.0	V	-22	15
61.474	14.17	30.0	15.8	1000	120.0	170.0	H	-22	12
103.669	15.37	33.5	18.1	1000	120.0	102.0	V	-22	13
494.712	21.87	36.0	14.1	1000	120.0	131.0	H	-22	18
732.137	25.00	36.0	11.0	1000	120.0	170.0	V	88	22

### 11.10.2 Spurious emissions radiated above 1 GHz

#### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed in the mode with the highest output power.

#### Measurement:

Measurement parameters	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 12.75 GHz
Trace mode	Max hold
Test setup	See chapter 7.2 A
Measurement uncertainty	See chapter 8

#### Limits:

FCC		IC
TX spurious emissions radiated		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
§15.209		
Frequency / MHz	Field strength / (dBµV/m)	Measurement distance / m
Above 960	54.0	3


**Result:**

TX spurious emissions radiated								
Lowest channel			Middle channel			Highest channel		
Frequency / MHz	Detector	Level / (dB $\mu$ V/m)	Frequency / MHz	Detector	Level / (dB $\mu$ V/m)	Frequency / MHz	Detector	Level / (dB $\mu$ V/m)
No Spurious Emissions in restricted bands detected.								




## Plots:


Plot 1: 1 GHz – 12.75 GHz, horizontal & vertical polarisation (lowest channel)

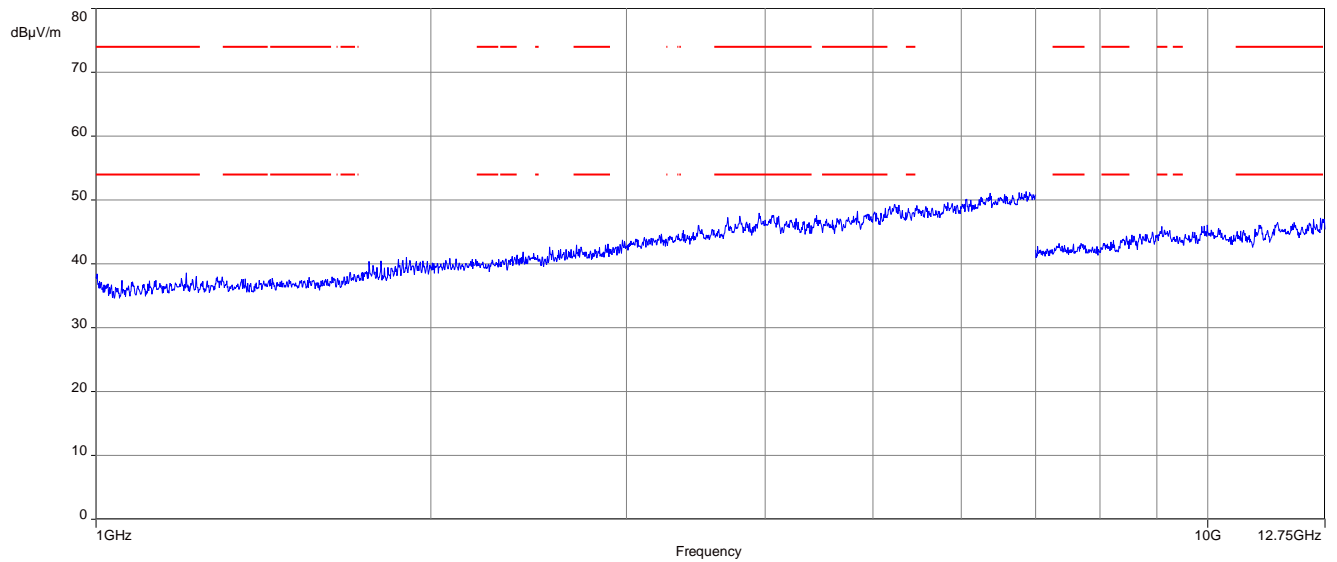

Plot 2: 1 GHz – 12.75 GHz, horizontal & vertical polarisation (middle channel)

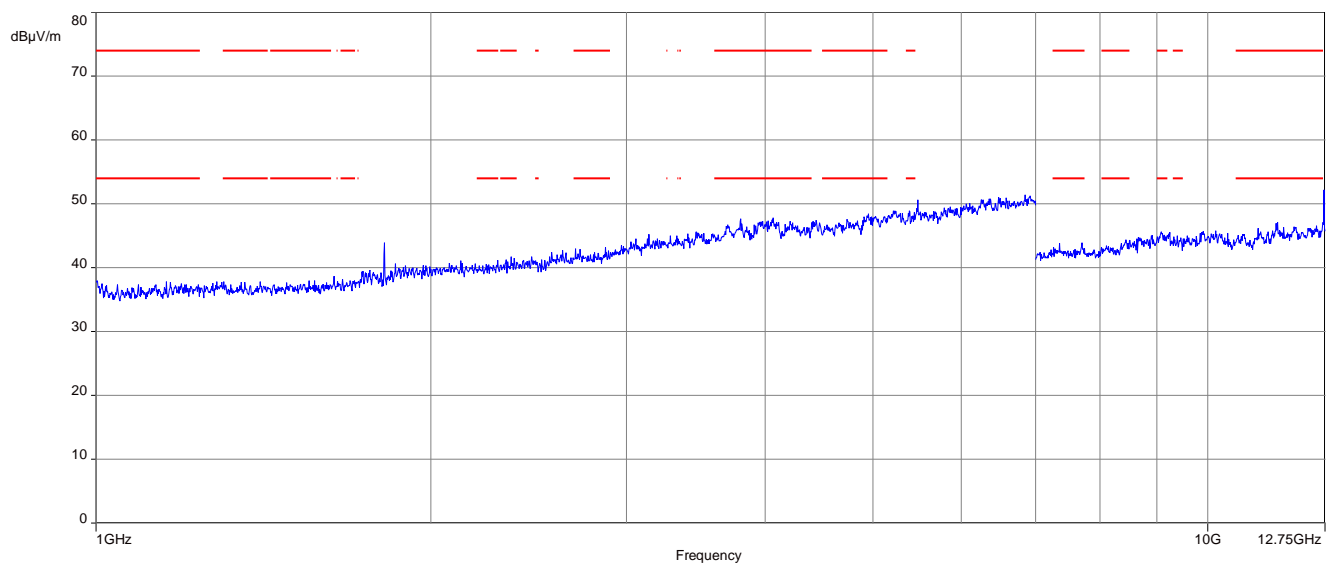

Plot 3: 1 GHz – 12.75 GHz, horizontal & vertical polarisation (highest channel)

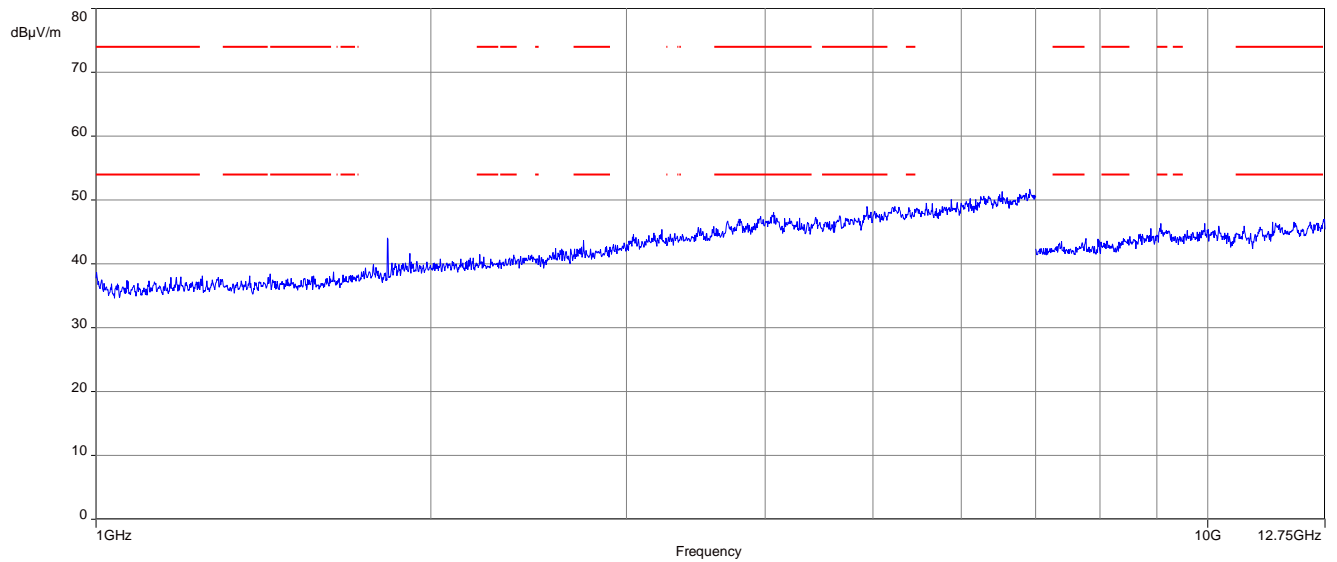

## 12 Measurement results Part 2 DTS

### 12.1 Antenna gain

Antenna gain declared by manufacturer (see section 5.1).

## 12.2 Maximum output power

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	5 MHz
Trace mode:	Max Hold
Measurement method	According to ANSI C63.10-2013 11.9.1.1 RBW $\geq$ DTS bandwidth
Used equipment:	See chapter 7.3 A
Measurement uncertainty:	See chapter 8

### Limits:

FCC	IC
1 watt (30 dBm) Maximum Output Power Conducted	


### Result:

Test Conditions		Maximum Output Power Conducted / dBm		
		Low channel	Middle channel	High channel
$T_{nom}$	$V_{nom}$	12.6	12.5	12.4

Test Conditions		ERP / dBm		
		Low channel	Middle channel	High channel
$T_{nom}$	$V_{nom}$	13.4	13.3	13.2


**Plots:**

Plot 1: Low Channel

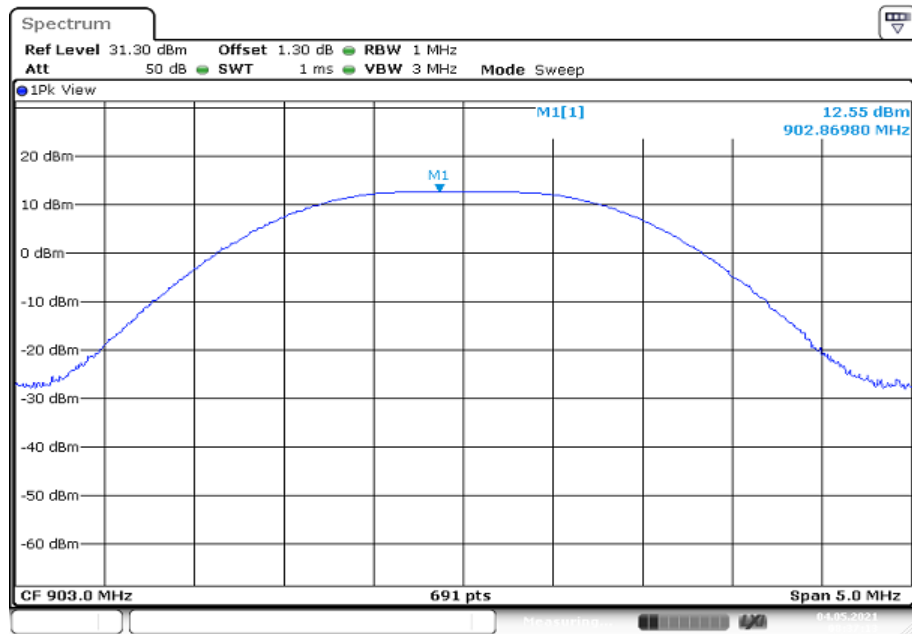


Date: 4 MAY 2021 08:27:13

Plot 2: Middle Channel

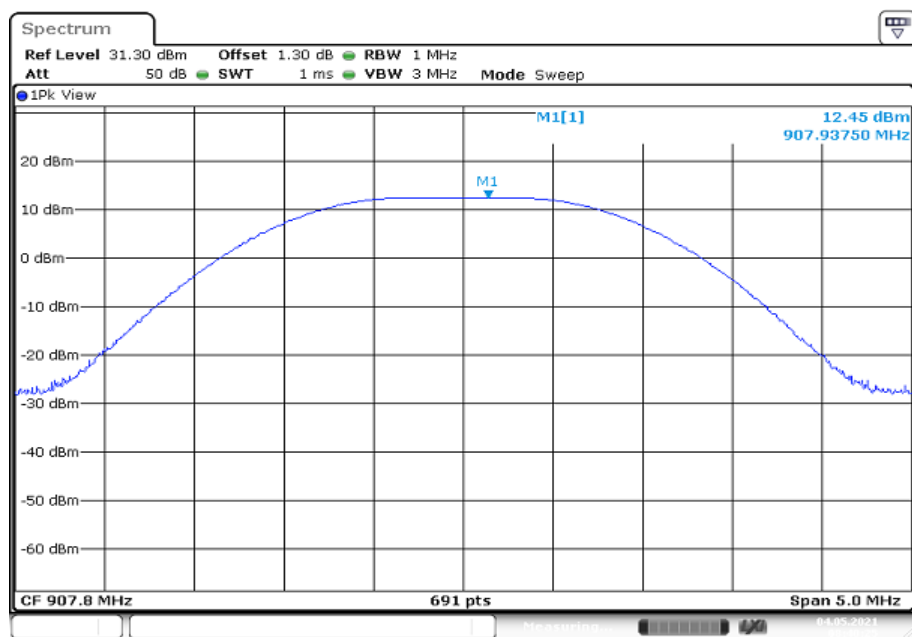

Date: 4 MAY 2021 08:40:26

Plot 3: High Channel

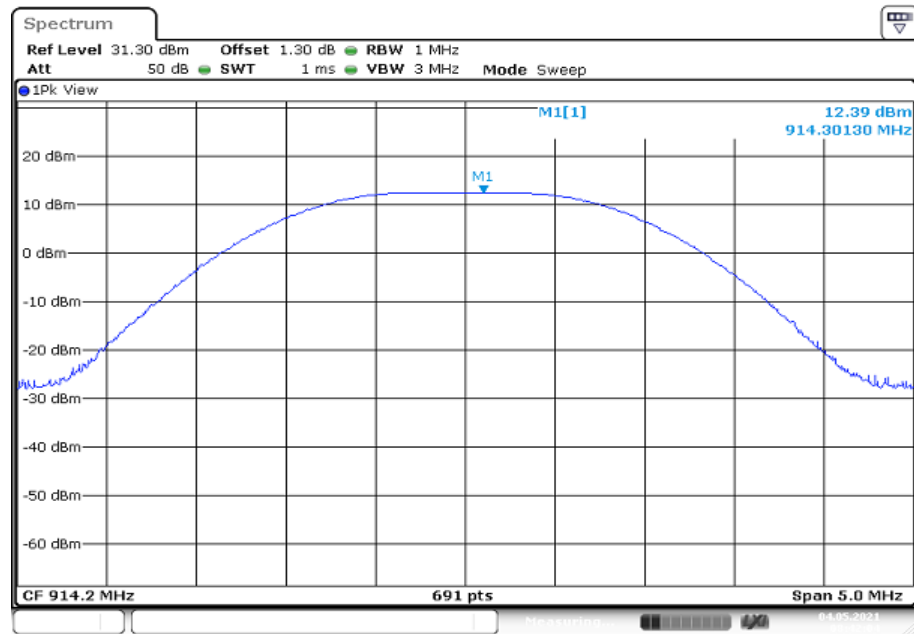

Date: 4 MAY 2021 08:42:04

## 12.3 Power spectral density

### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 kHz
Resolution bandwidth:	10 kHz
Span:	2 MHz
Trace-Mode:	Max Hold
Measurement method	According to ANSI C63.10-2013 11.10.2 Method PKPSD 11.10.4 Method AVGPS-1A alternative
Test setup	See chapter 7.3 A
Measurement uncertainty	See chapter 8

### Limits:


FCC	IC
Power Spectral Density	
The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	

### Results:


	Power Spectral density / (dBm/3kHz)		
Channel	Lowest	Middle	Highest
	1.9	1.8	1.8

**Plots:**

Plot 1: Low Channel

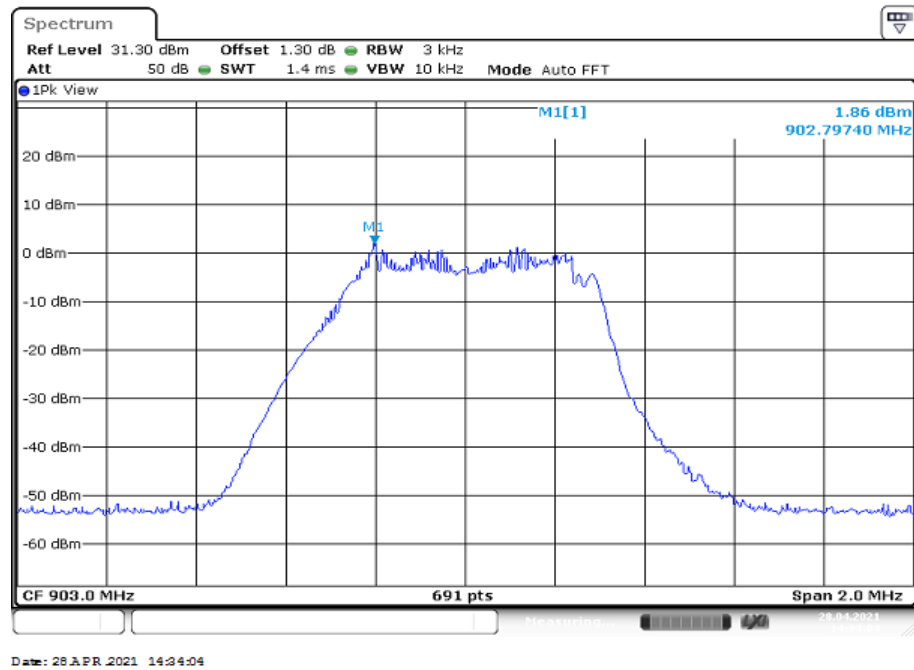


Plot 2: Middle Channel

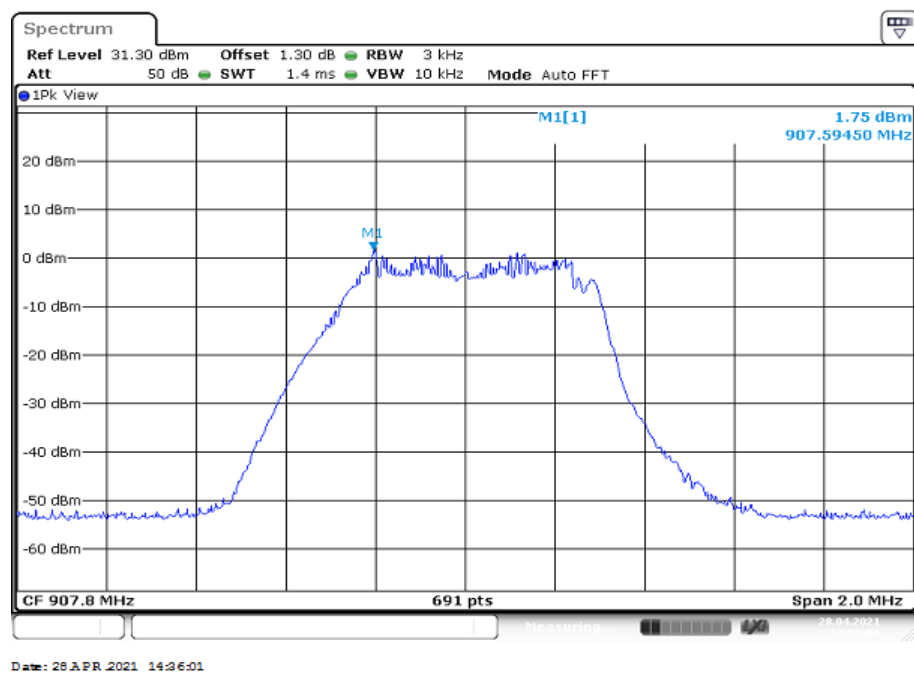



Plot 3: High Channel

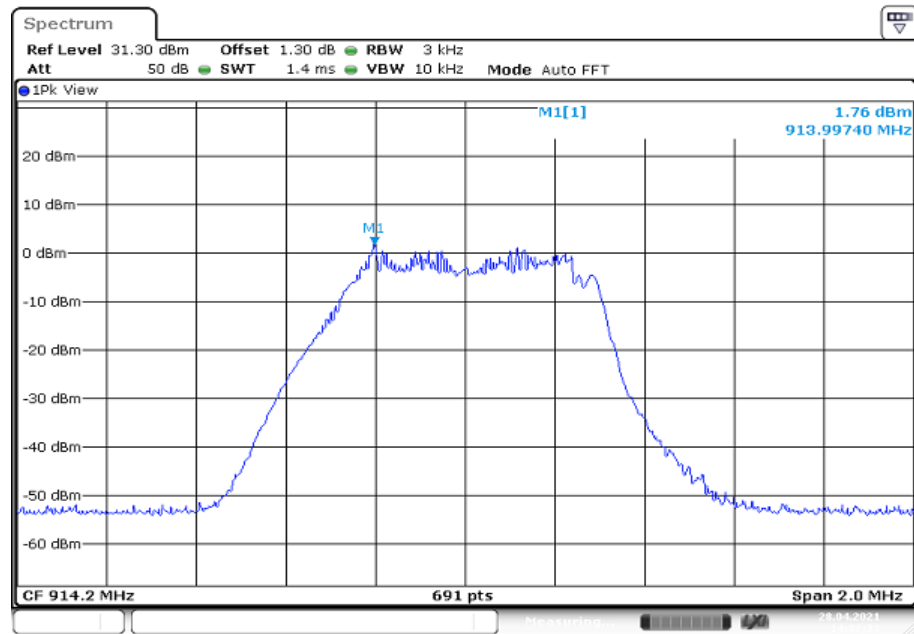

## 12.4 Spectrum bandwidth – 6 dB bandwidth and 99% bandwidth

### Description:

Measurement of the 6 dB bandwidth of the modulated signal.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Span:	2 MHz
Trace-Mode:	Max Hold
Test setup	See chapter 7.3 A
Measurement uncertainty	See chapter 8

### Limits:

FCC	IC
Spectrum Bandwidth – 6 dB Bandwidth	
The minimum 6 dB bandwidth shall be at least 500 kHz.	


### Results:

Test Conditions		6 dB Bandwidth / kHz		
		Low channel	Middle channel	High channel
$T_{nom}$	$V_{nom}$	781.5	778.6	778.6


Test Conditions		99% Bandwidth / kHz		
		Low channel	Middle channel	High channel
$T_{nom}$	$V_{nom}$	622.3	619.4	619.4

**Plots:**


Plot 1: Low Channel, 6 dB-BW

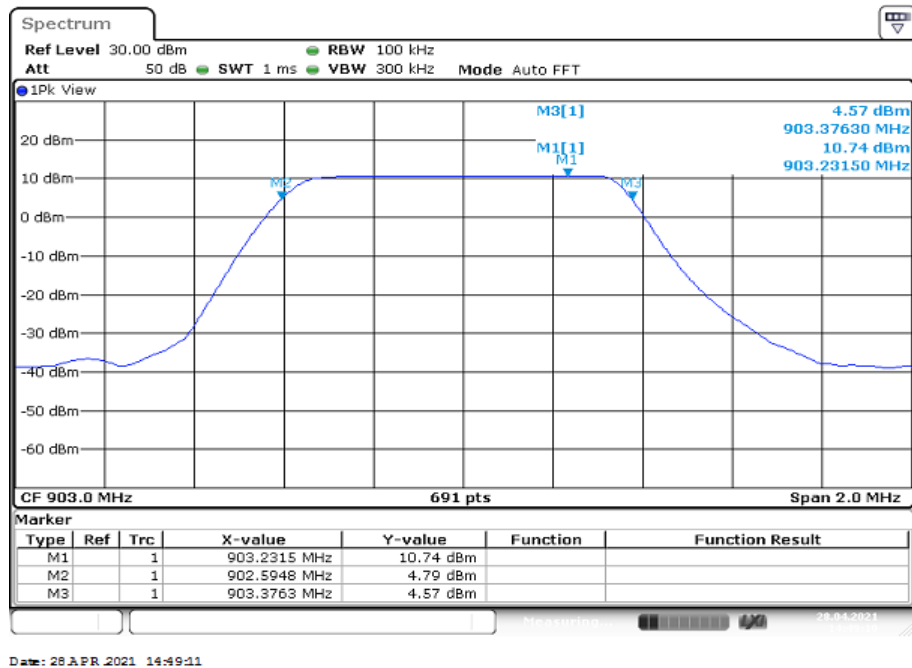


Plot 2: Low Channel, 99%OBW

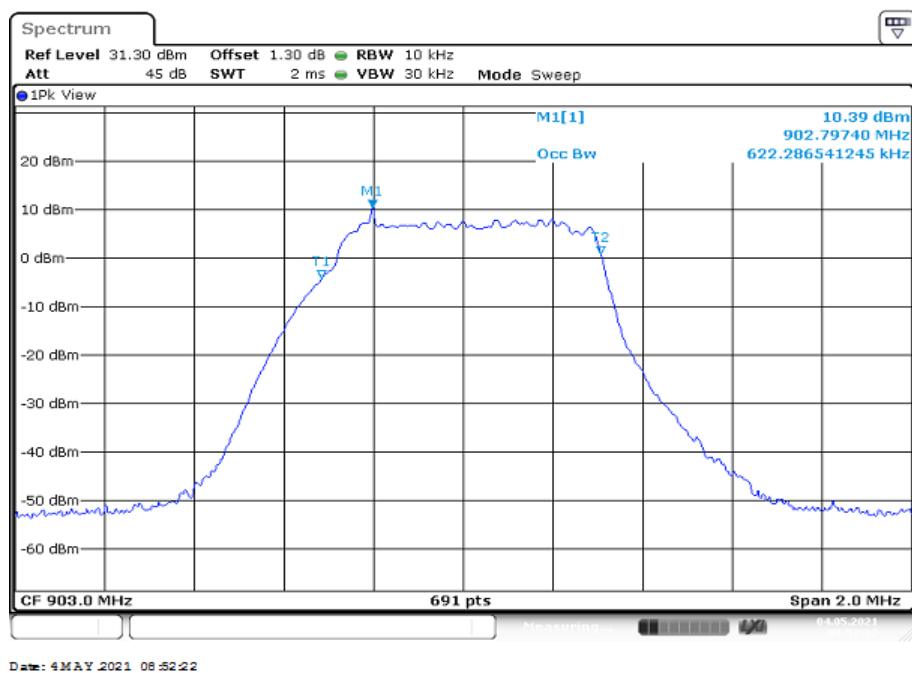


Plot 3: Middle Channel, 6 dB-BW

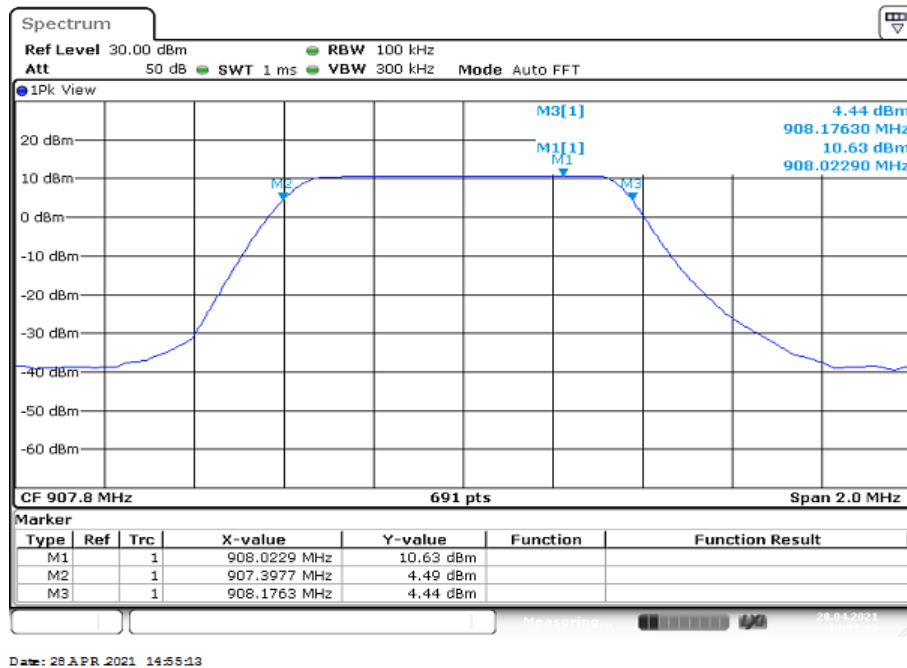


Plot 4: Middle Channel, 99%OBW

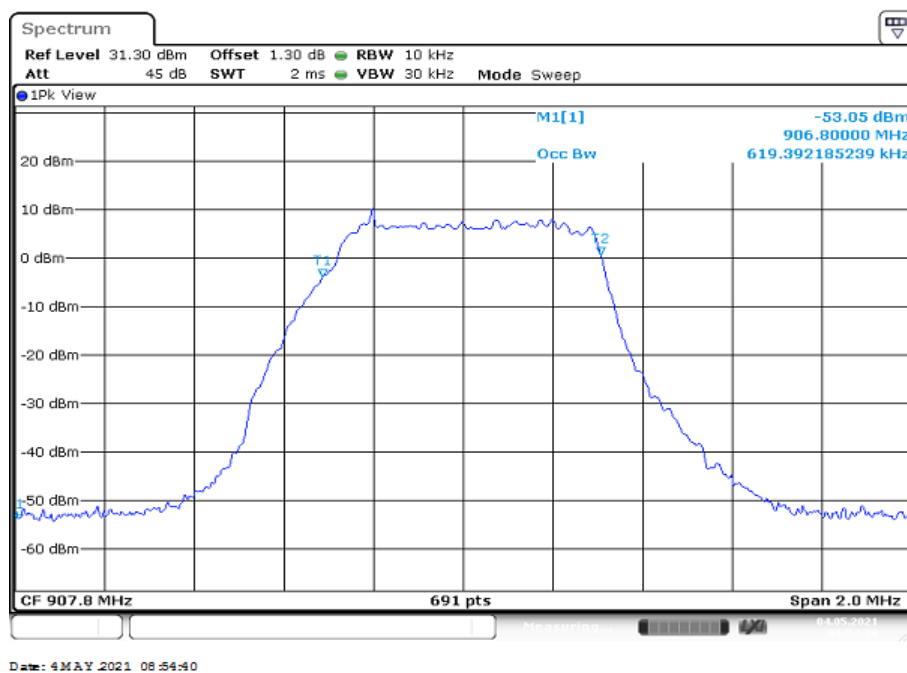

Plot 5: High Channel, 6 dB-BW

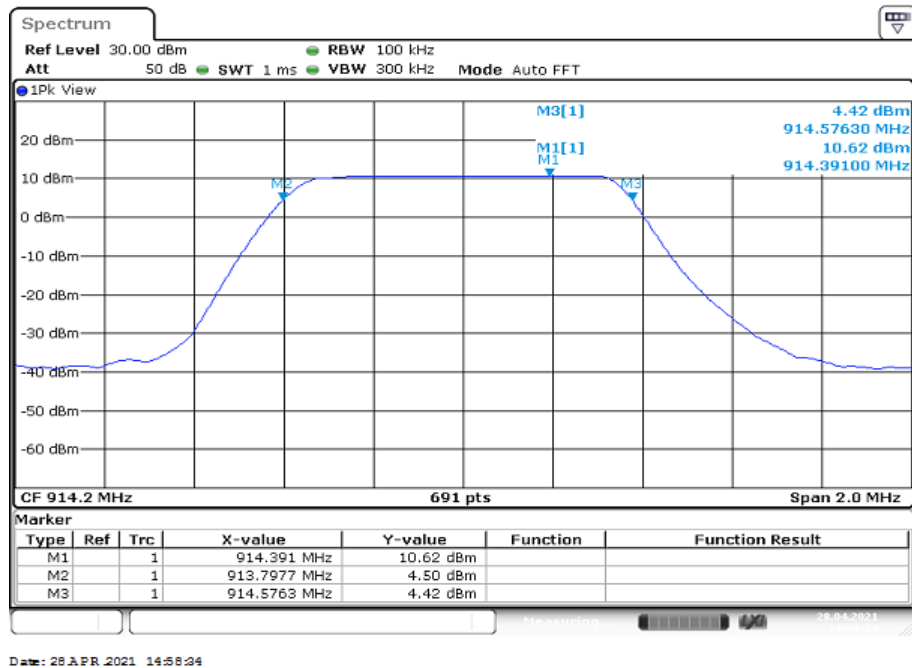

Plot 6: High Channel, 99%OBW

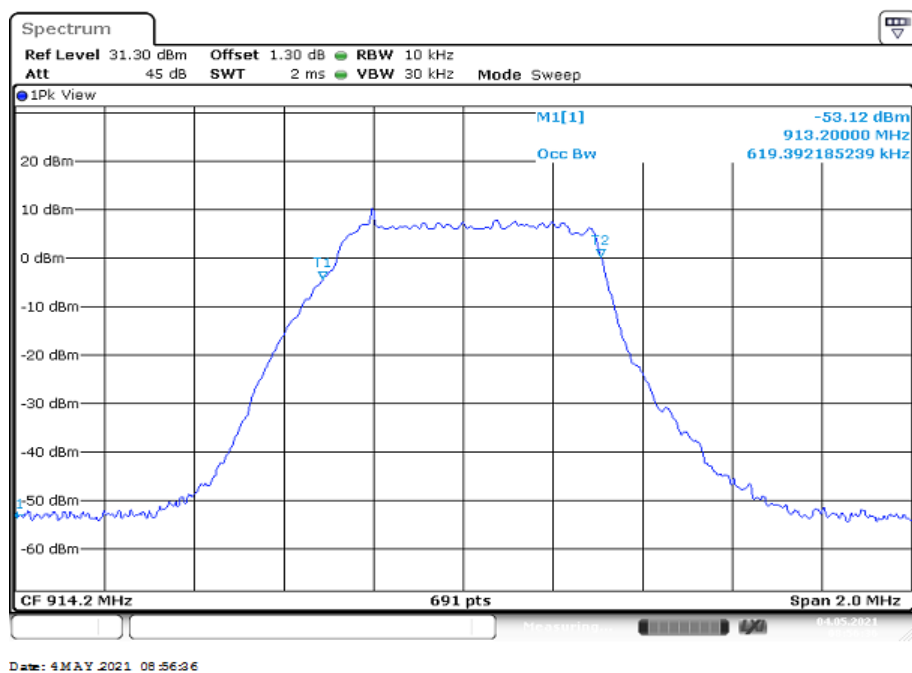

## 12.5 Detailed spurious emissions @ the band edge – conducted and radiated

### Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in single channel mode.

### Measurement:


Measurement parameters	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	Lower Band Edge: 902 MHz Upper Band Edge: 928 MHz
Trace mode	Max hold
Test setup	See chapter 7.3 A
Measurement uncertainty	See chapter 8

### Limits:

FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	

### Results conducted:

Scenario	Spurious band edge conducted / dB	
	lowest channel	highest channel
Lower band edge – single channel mode	> 20 dB	> 20 dB
Upper band edge – single channel mode	> 20 dB	> 20 dB

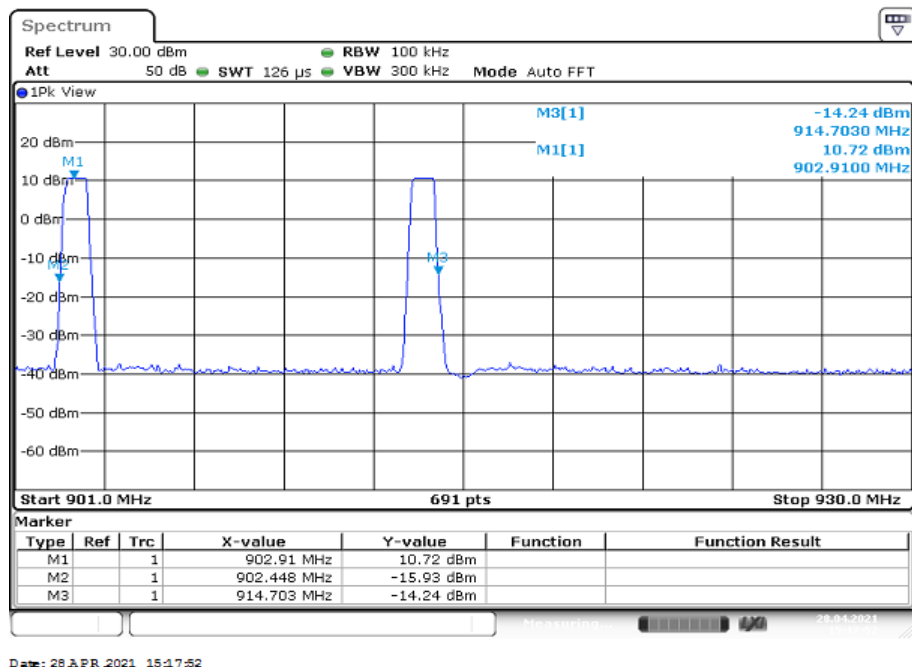**Plots:****Plot 1:** lowest and highest channel

**Results radiated:**

No restricted band in the range  $\pm 2$  channel bandwidths of the Band-edges of the specified emission band! (608 MHz – 614 MHz and 960 MHz – 1240 MHz).

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			



## 12.6 Spurious Emissions Conducted

### Description:

Measurement of the conducted spurious emissions in transmit mode. The EUT is set to single channel mode. The measurement is repeated for low, mid and high channel.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 1 MHz F > 1 GHz: 1 MHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Span:	9 kHz to 12.75 GHz
Trace-Mode:	Max Hold
Used equipment:	See chapter 7.3 A
Measurement uncertainty:	See chapter 8

### Limits:


FCC	IC
TX spurious emissions conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

### Result:


Emission Limitation					
Frequency / MHz		Amplitude of emission / dBm	Limit max. allowed emission power	actual attenuation below frequency of operation / dB	Results
903.0		10.7	24 dBm		Operating frequency
See plots			-20 dBc	No emissions detected!	
907.8		10.6	24 dBm		Operating frequency
See plots			-20 dBc	No emissions detected!	
914.2		10.6	24 dBm		Operating frequency
See plots			-20 dBc	No emissions detected!	

**Plots:**


Plot 1: Low channel, 9 kHz – 12.75 GHz

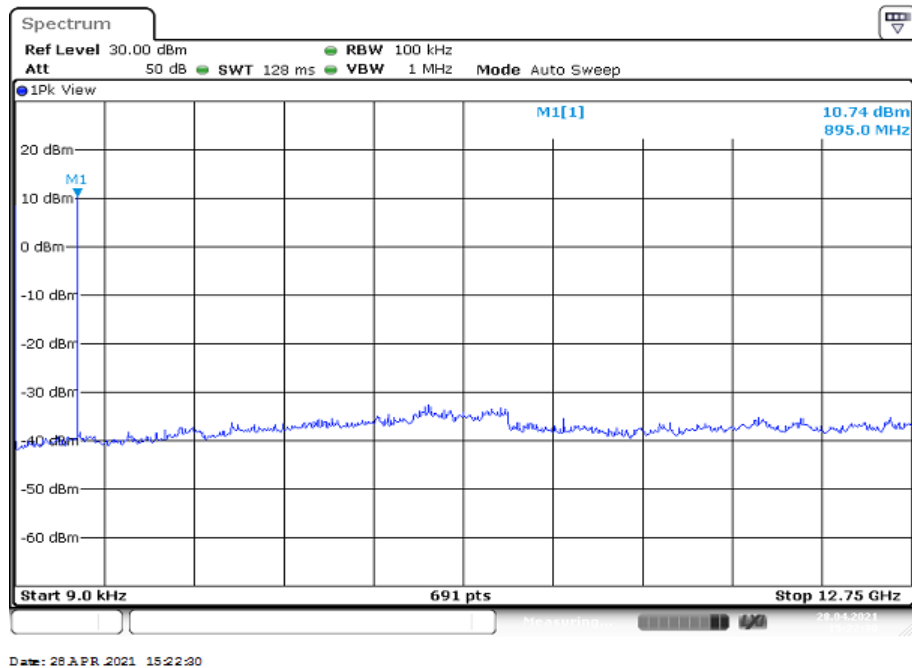

Plot 2: Middle channel, 9 kHz – 12.75 GHz

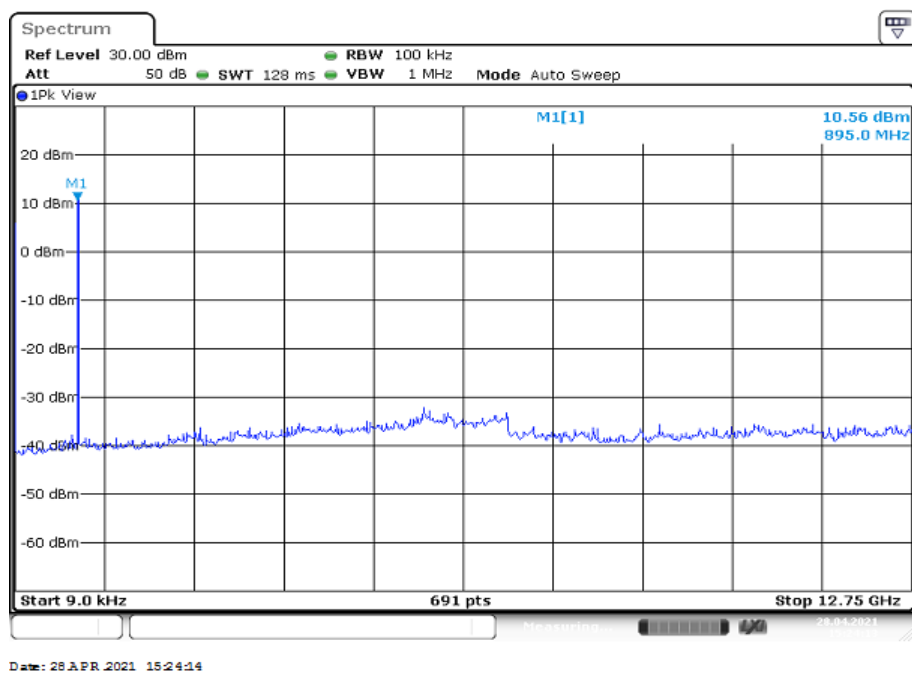

Plot 3: High channel, 9 kHz – 12.75 GHz

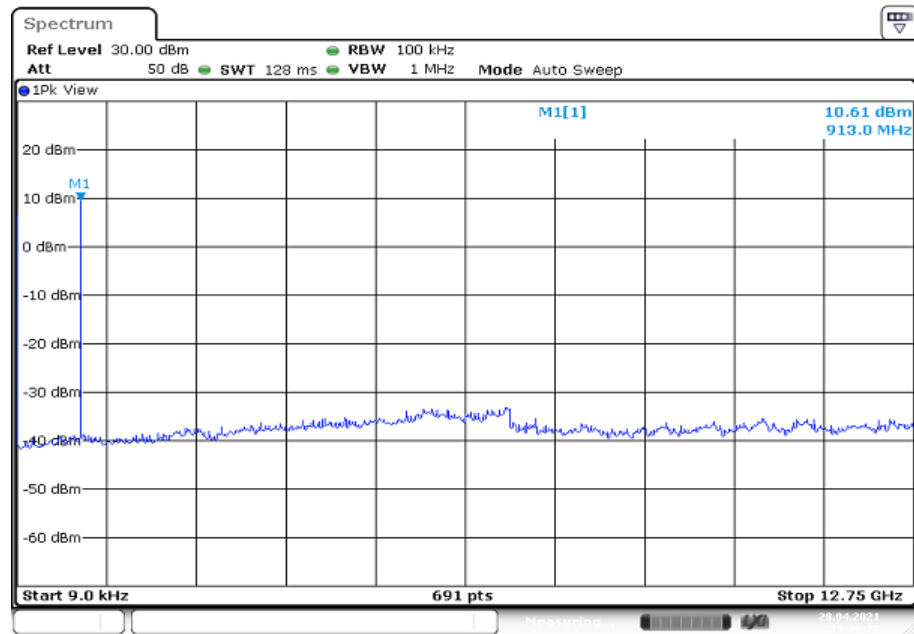

Date: 28 APR 2021 15:26:28

## 12.7 Spurious Emissions Radiated < 30 MHz

### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channels are 00; 39 and 78. The measurement is performed in the mode with the highest output power. The limits are recalculated to a measurement distance of 3 m according the ANSI C63.10.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold
Used equipment:	See chapter 7.2 B
Measurement uncertainty:	See chapter 8

### Limits:


FCC		IC
TX spurious emissions radiated < 30 MHz		
Frequency (MHz)	Field strength (dBµV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

### Result:


Spurious emission level								
Lowest channel			Lowest channel			Lowest channel		
Frequency / MHz	Detector	Level / (dBµV/m)	Frequency / MHz	Detector	Level / (dBµV/m)	Frequency / MHz	Detector	Level / (dBµV/m)
All emissions were more than 10 dB below the limit.								

## Plots:


Plot 1: TX-Mode low channel

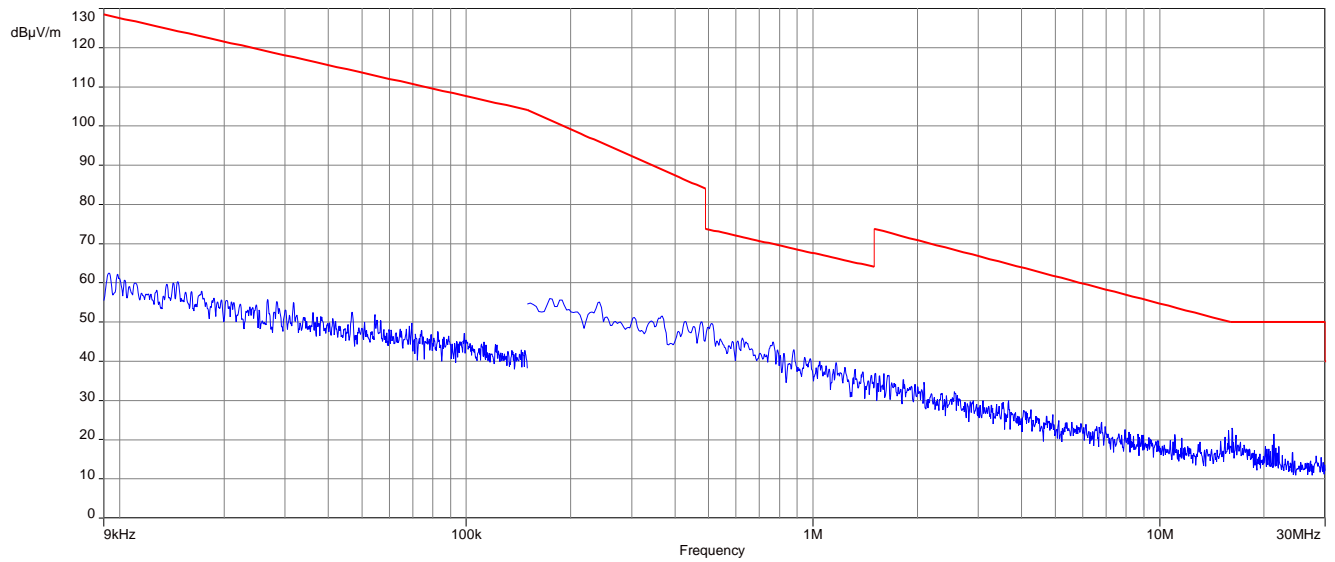

Plot 2: TX-Mode mid channel

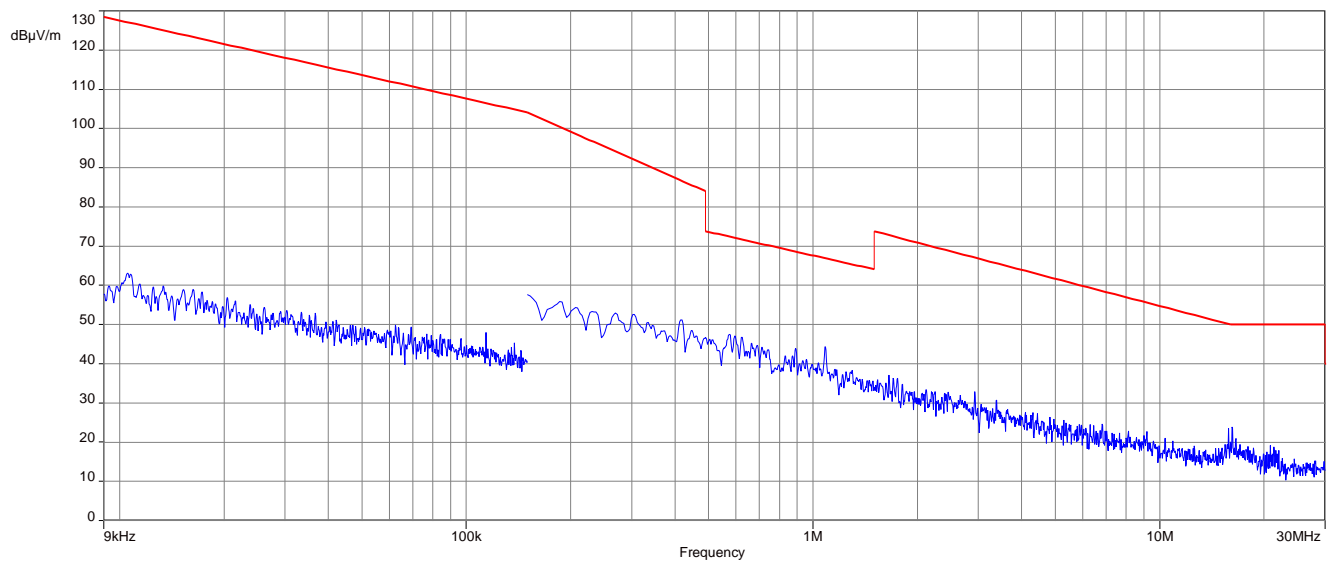

Plot 3: TX-Mode high channel

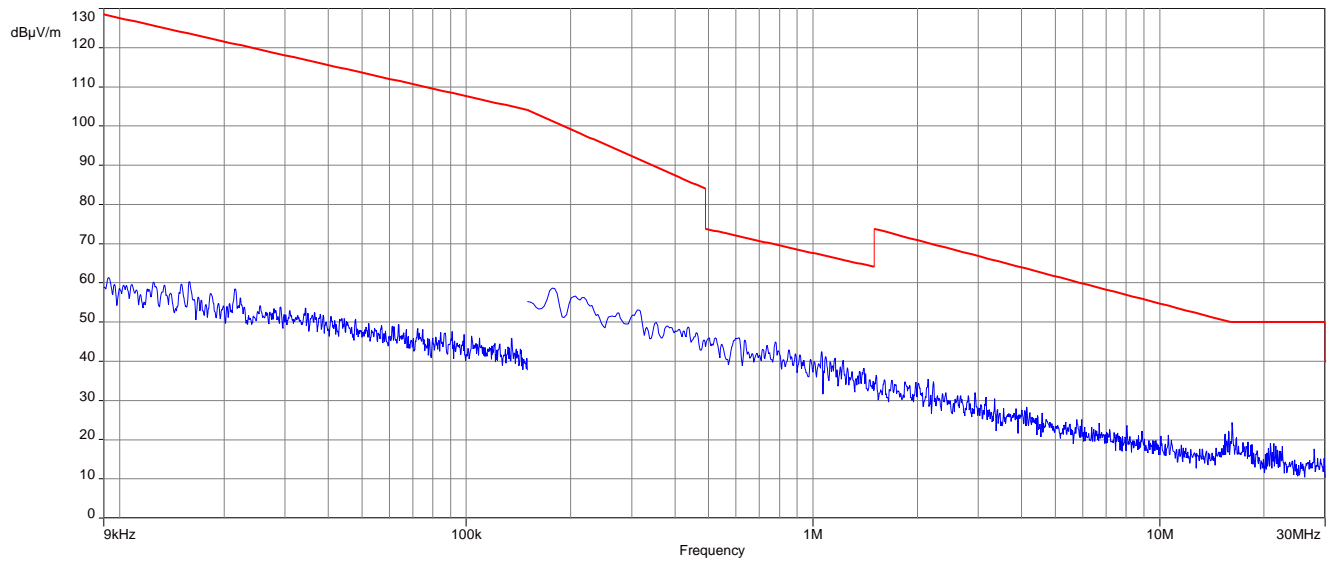

## 12.8 Spurious Emissions Radiated > 30 MHz

### 12.8.1 Spurious emissions radiated 30 MHz to 1 GHz

#### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel low, mid and high.

#### Measurement:

Measurement parameters	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	3 x VBW
Video bandwidth	120 kHz
Span	30 MHz to 1 GHz
Trace mode	Max hold
Test setup	See chapter 7.1 A
Measurement uncertainty	See chapter 8


#### Limits:

FCC		IC
Band-edge Compliance of conducted and radiated emissions		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dBµV/m)	Measurement distance / m
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

**Result:** See result table below the plots.

**Plots:**


Plot 1: 30 MHz – 1 GHz, horizontal &amp; vertical polarisation (lowest channel)

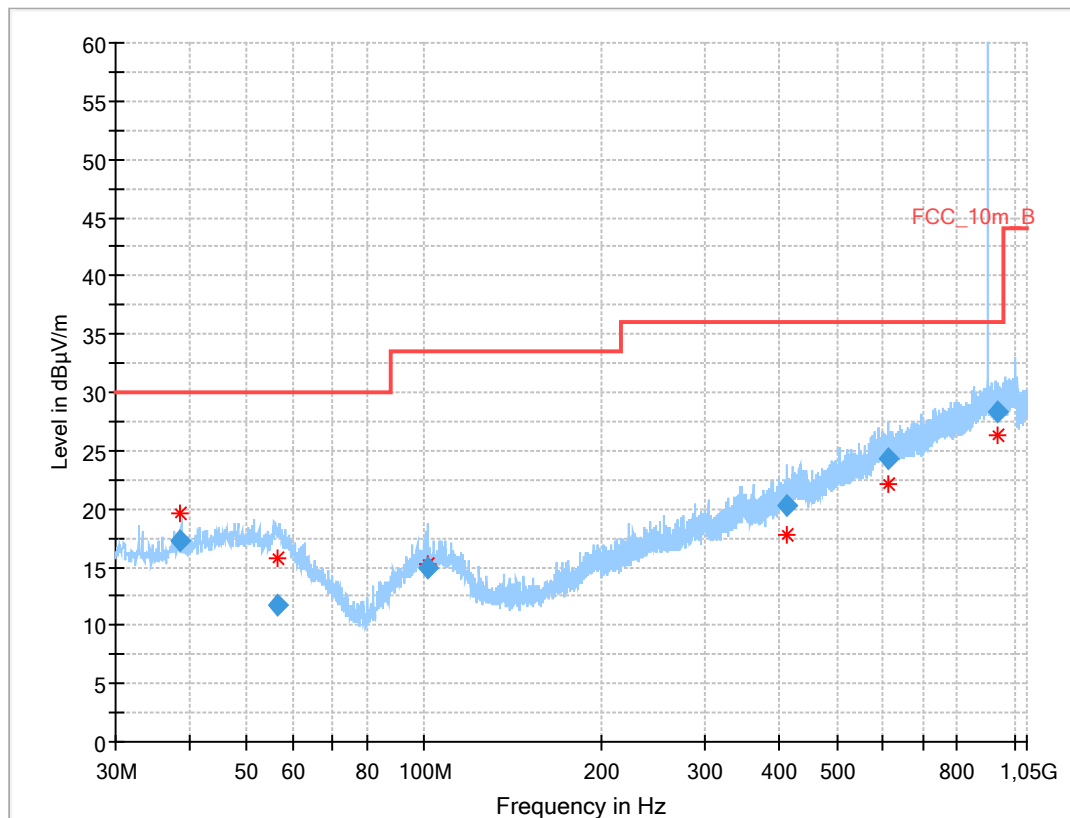**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.667	17.33	30.0	12.7	1000	120.0	137.0	V	172	13
56.333	11.75	30.0	18.3	1000	120.0	118.0	V	247	15
101.262	14.98	33.5	18.5	1000	120.0	114.0	H	22	13
411.707	20.25	36.0	15.8	1000	120.0	170.0	V	292	17
612.217	24.25	36.0	11.8	1000	120.0	102.0	V	-22	21
934.822	28.39	36.0	7.6	1000	120.0	170.0	V	67	24




Plot 2: 30 MHz – 1 GHz, horizontal &amp; vertical polarisation (middle channel)

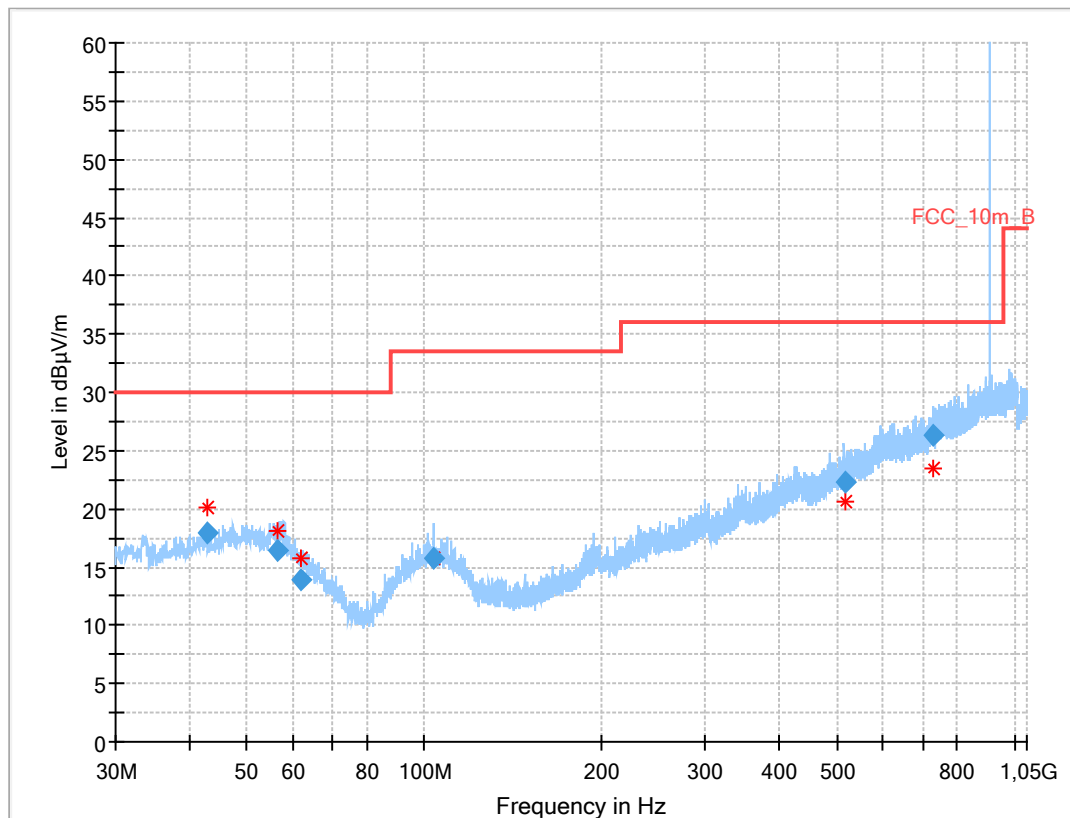**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.764	17.98	30.0	12.0	1000	120.0	114.0	V	-3	14
56.504	16.49	30.0	13.5	1000	120.0	114.0	V	292	15
61.984	13.99	30.0	16.0	1000	120.0	110.0	H	157	12
103.664	15.70	33.5	17.8	1000	120.0	131.0	V	281	13
515.658	22.34	36.0	13.7	1000	120.0	170.0	V	67	19
729.519	26.29	36.0	9.7	1000	120.0	170.0	V	67	21

Plot 3: 30 MHz – 1 GHz, horizontal &amp; vertical polarisation (highest channel)

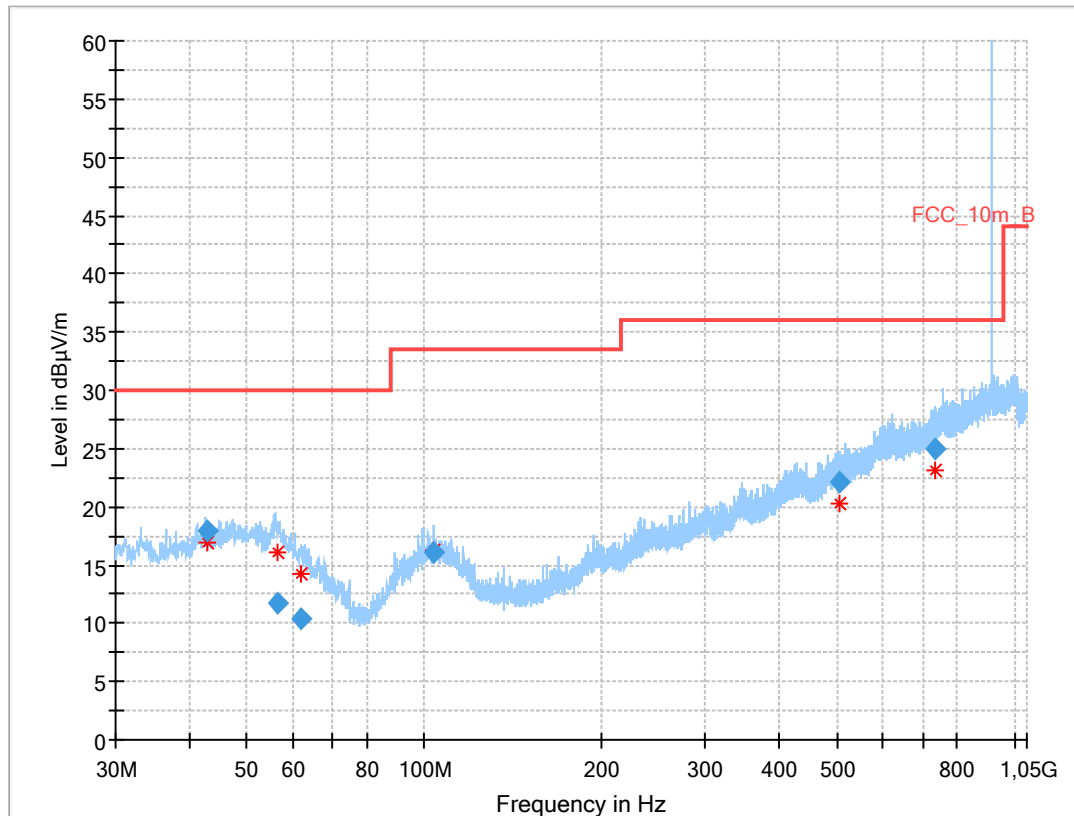**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.917	17.99	30.0	12.0	1000	120.0	124.0	H	267	14
56.381	11.71	30.0	18.3	1000	120.0	107.0	V	22	15
61.981	10.31	30.0	19.7	1000	120.0	164.0	V	67	12
103.694	16.08	33.5	17.4	1000	120.0	155.0	V	247	13
505.700	22.17	36.0	13.8	1000	120.0	134.0	V	-22	18
732.018	25.02	36.0	11.0	1000	120.0	170.0	H	157	22

## 12.8.2 Spurious emissions radiated above 1 GHz

### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed in the mode with the highest output power.

### Measurement:

Measurement parameters	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 12.75 GHz
Trace mode	Max hold
Test setup	See chapter 7.2 A (1 GHz – 12.75 GHz)
Measurement uncertainty	See chapter 8

### Limits:


FCC		IC
TX spurious emissions radiated		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
§15.209		
Frequency / MHz	Field strength / (dBµV/m)	Measurement distance / m
Above 960	54.0	3

**Result:**


TX spurious emissions radiated								
Lowest channel			Middle channel			Highest channel		
Frequency / MHz	Detector	Level / (dBµV/m)	Frequency / MHz	Detector	Level / (dBµV/m)	Frequency / MHz	Detector	Level / (dBµV/m)
No Spurious Emissions in restricted bands detected.								

## Plots:


Plot 1: 1 GHz – 12.75 GHz, horizontal & vertical polarisation (lowest channel)

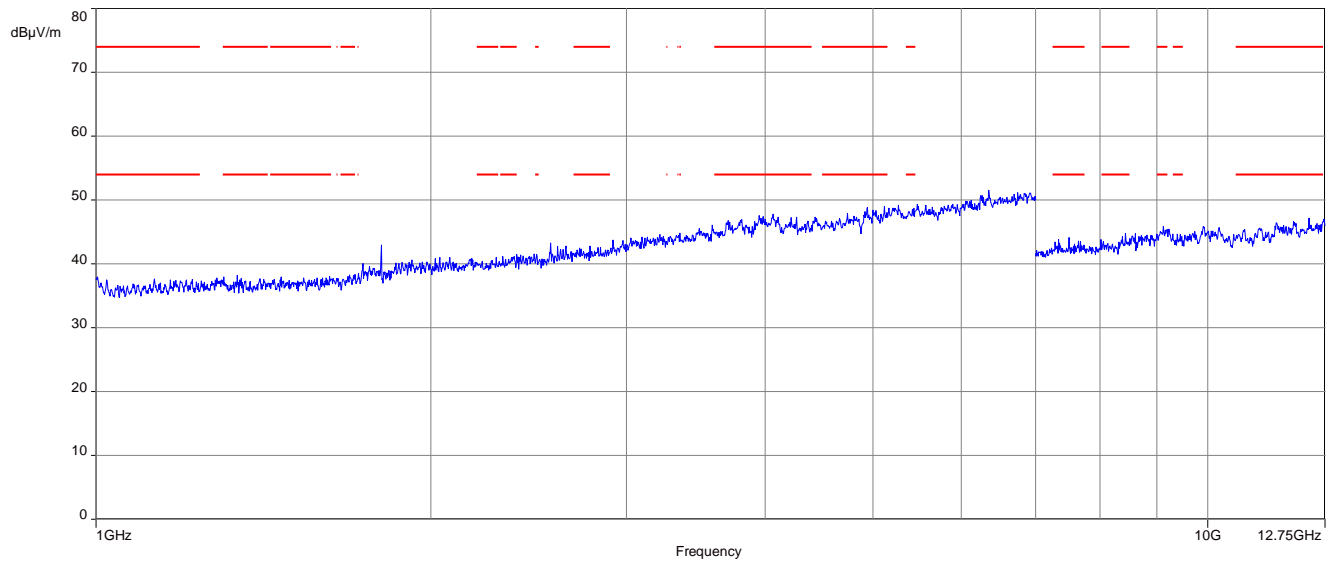

Plot 2: 1 GHz – 12.75 GHz, horizontal & vertical polarisation (middle channel)

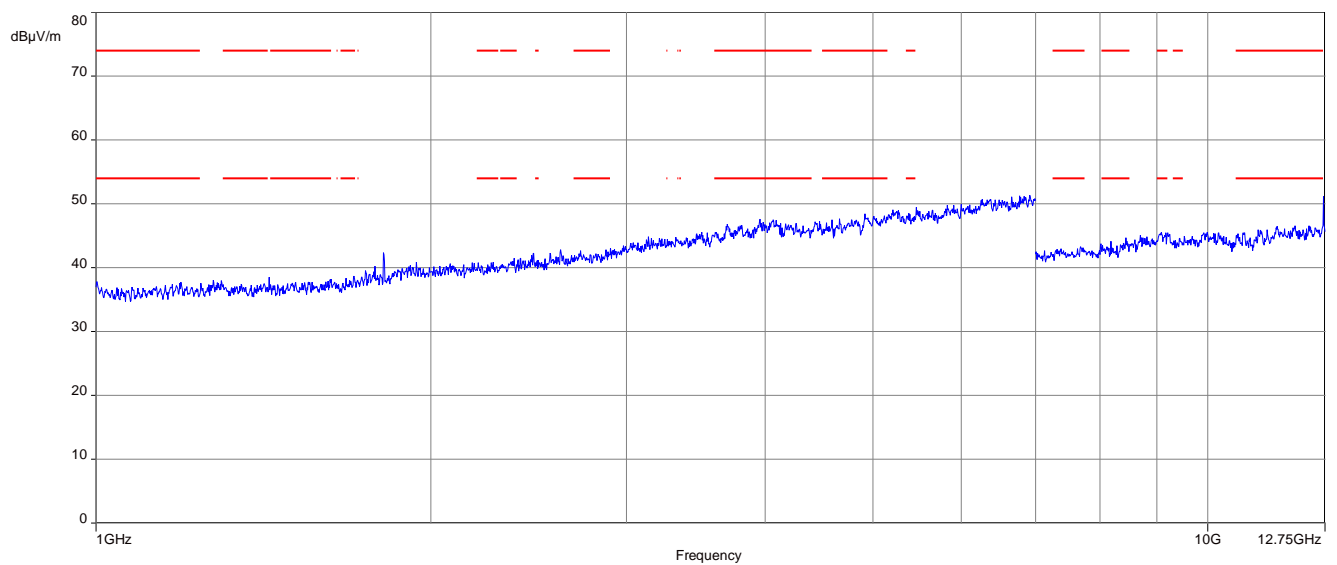

Plot 3: 1 GHz – 12.75 GHz, horizontal & vertical polarisation (highest channel)

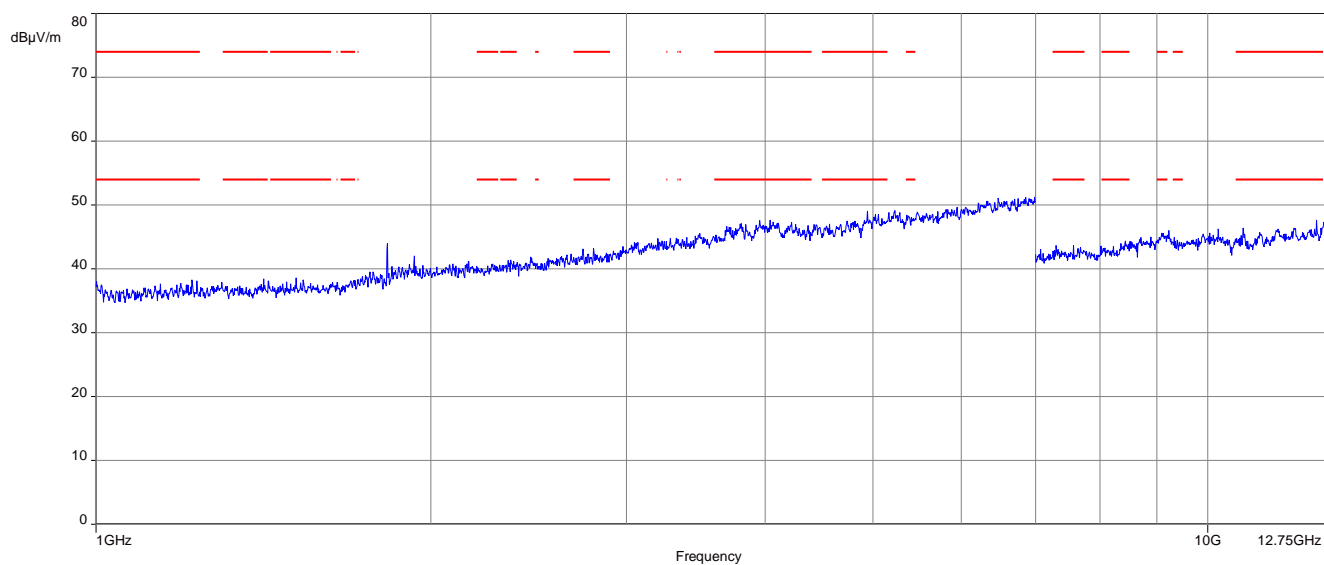

## 13 Observations

No observations except those reported with the single test cases have been made.

## 14 Glossary

<b>EUT</b>	Equipment under test
<b>DUT</b>	Device under test
<b>UUT</b>	Unit under test
<b>FCC</b>	Federal Communications Commission
<b>FCC ID</b>	Company Identifier at FCC
<b>IC</b>	Industry Canada
<b>PMN</b>	Product marketing name
<b>HMN</b>	Host marketing name
<b>HVIN</b>	Hardware version identification number
<b>FVIN</b>	Firmware version identification number
<b>EMC</b>	Electromagnetic Compatibility
<b>HW</b>	Hardware
<b>SW</b>	Software
<b>Inv. No.</b>	Inventory number
<b>S/N or SN</b>	Serial number
<b>C</b>	Compliant
<b>NC</b>	Not compliant
<b>NA</b>	Not applicable
<b>NP</b>	Not performed
<b>PP</b>	Positive peak
<b>QP</b>	Quasi peak
<b>AVG</b>	Average
<b>OC</b>	Operating channel
<b>OCW</b>	Operating channel bandwidth
<b>OBW</b>	Occupied bandwidth
<b>OOB</b>	Out of band
<b>DFS</b>	Dynamic frequency selection
<b>CAC</b>	Channel availability check
<b>OP</b>	Occupancy period
<b>NOP</b>	Non occupancy period
<b>DC</b>	Duty cycle
<b>PER</b>	Packet error rate
<b>CW</b>	Clean wave
<b>MC</b>	Modulated carrier
<b>DSSS</b>	Dynamic sequence spread spectrum
<b>OFDM</b>	Orthogonal frequency division multiplexing
<b>FHSS</b>	Frequency hopping spread spectrum
<b>C/N<sub>0</sub></b>	Carrier to noise-density ratio, expressed in dB-Hz
<b>DTS</b>	Digital transmission system

## 15 Document history

Version	Applied changes	Date of release
-/-	Initial release	2021-05-05
A	Editorial changes	2021-05-14

## 16 Accreditation Certificate – D-PL-12076-01-04

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory <b>CTC advanced GmbH</b> Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: <b>Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards</b></p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 07 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-04</p> <p>Frankfurt am Main, 09.06.2020</p> <p>by order:  Ing. (FH) Ralf Egner Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. <a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a> See notes on sheet 07.</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a> ILAC: <a href="http://www.ilac.org">www.ilac.org</a> IAF: <a href="http://www.lafnu">www.lafnu</a></p>

**Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkKS or may be received by CTC advanced GmbH on request**

<https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf>



**17 Accreditation Certificate – D-PL-12076-01-05**

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory  <b>CTC advanced GmbH</b>        Untertürkheimer Straße 6-10, 66117 Saarbrücken        is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields:</p> <p><b>Telecommunication (FCC Requirements)</b></p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages.</p> <p>Registration number of the certificate: <b>D-PL-12076-01-05</b></p> <p>Frankfurt am Main, 09.06.2020</p> <p>by  <b>R. Egner</b> Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH.  <a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a>        See notes enclosed.</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products [Official Journal of the European Union L 218 of 9 July 2008, p. 30]. DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites:        EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a>        ILAC: <a href="http://www.ilac.org">www.ilac.org</a>        IAF: <a href="http://www.iaf.org">www.iaf.org</a></p>

**Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request**

<https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf>

##### END OF TEST REPORT #####