


Overview

HP ProBook 640 G2 Notebook PC

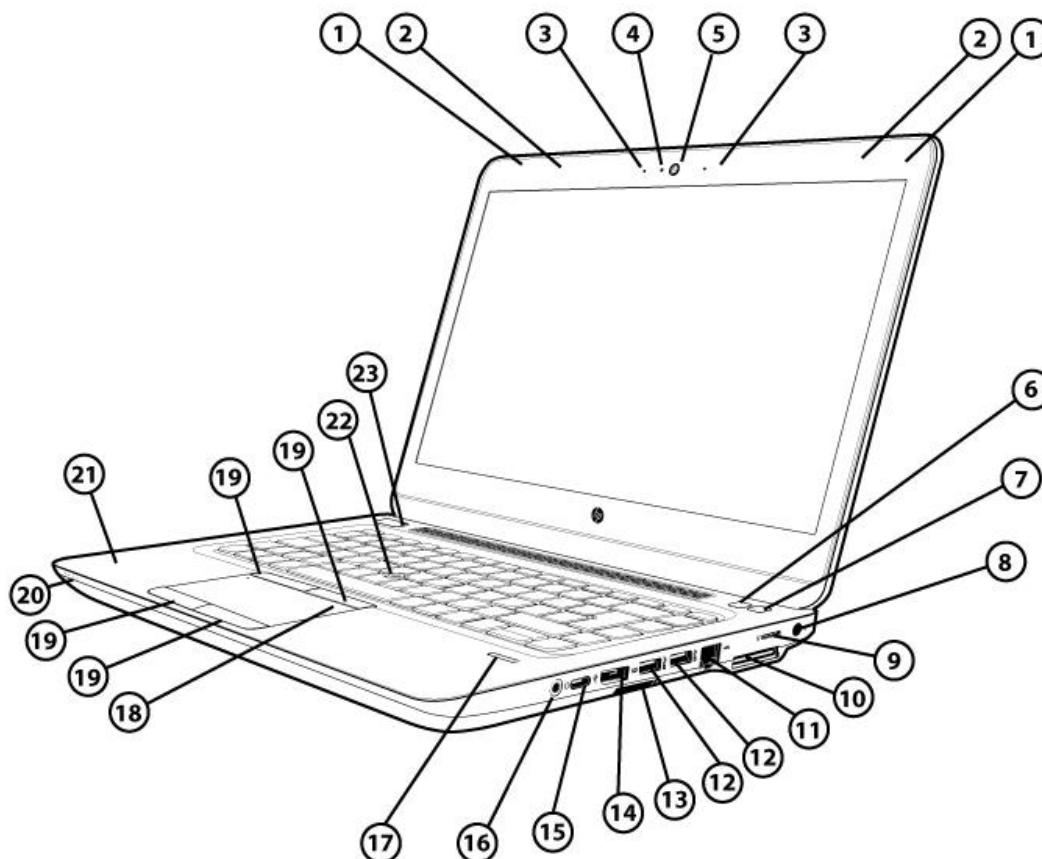


Front/Right

- | | |
|--------------------------------------|--|
| 1. WLAN antennas (2) | 13. SD card slot |
| 2. WWAN antennas (2) (select models) | 14. Display port |
| 3. Internal microphones (2) | 15. USB-C™ port |
| 4. Webcam LED (select models) | 16. Microphone/ headphones combo jack |
| 5. Webcam (select models) | 17. Fingerprint reader (select models) |
| 6. Wireless on/off button | 18. Touchpad |
| 7. Speaker mute button | 19. Touchpad buttons (4) |
| 8. Power connector | 20. Indicator LEDs: Wireless Light, Power Light, AC Adapter/Battery Light, Storage Usage Light |
| 9. SIM card slot | 21. NFC (select models) |
| 10. Docking connector | 22. Pointstick (select models) |
| 11. Ethernet port | 23. Power button |
| 12. USB 3.0 ports (2) | |




Overview

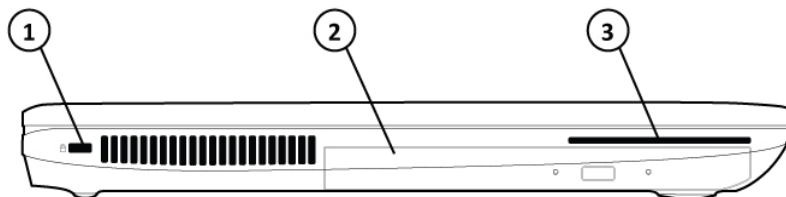

- 1. Security lock slot
- 2. Optical drive

Left

- 3. Smart Card Reader

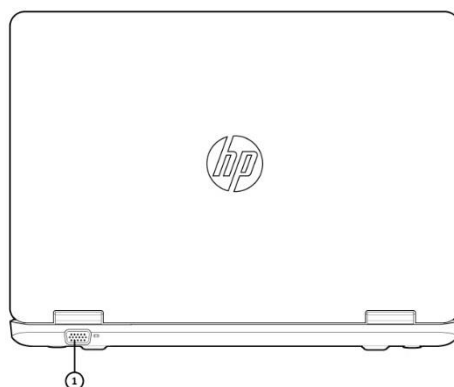


Back

- 1. VGA port



Overview

HP ProBook 650 G2 Notebook PC

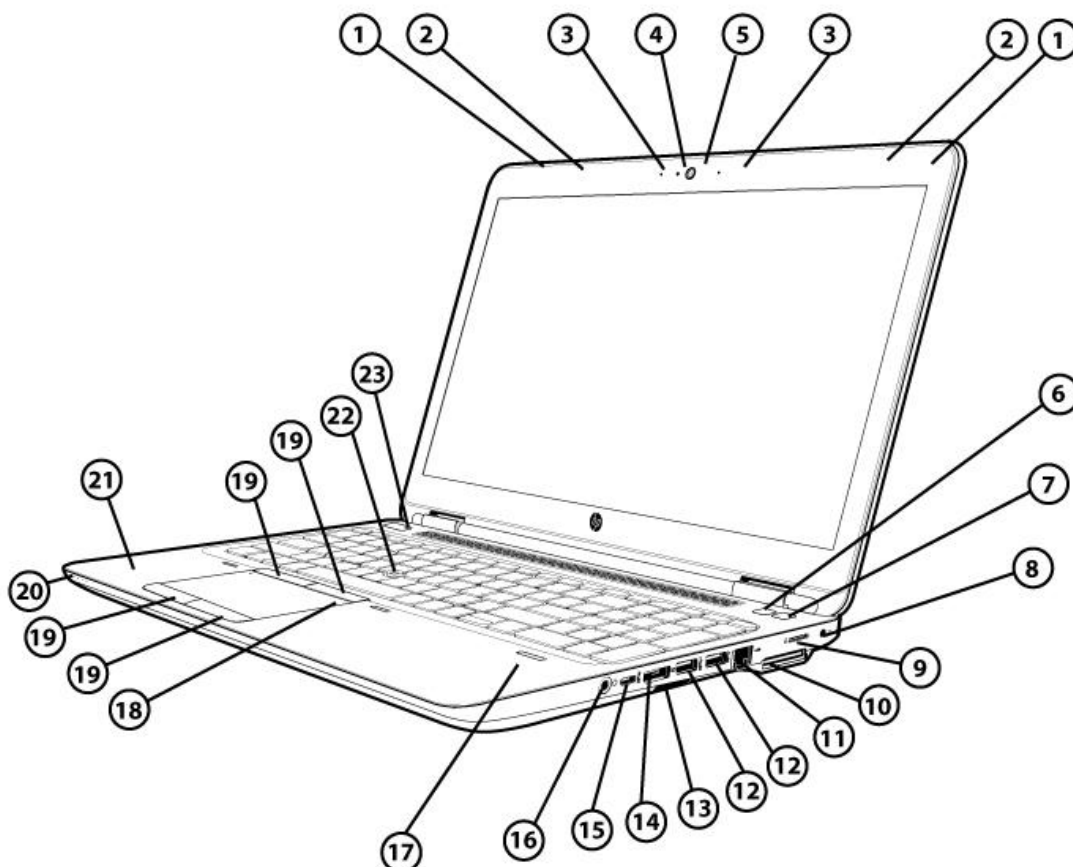


Front/Right

- | | |
|--------------------------------------|--|
| 1. WLAN antennas (2) | 13. SD card slot |
| 2. WWAN antennas (2) (select models) | 14. Display Port |
| 3. Internal microphones (2) | 15. USB-C™ port |
| 4. Webcam LED (select models) | 16. Microphone/ headphones combo jack |
| 5. Webcam (select models) | 17. Fingerprint reader (select models) |
| 6. Wireless on/off button | 18. Touchpad |
| 7. Speaker mute button | 19. Touchpad buttons (4) |
| 8. Power connector | 20. Indicator LEDs: Wireless Light, Power Light, AC Adapter/Battery Light, Storage Usage Light |
| 9. SIM card slot | 21. NFC (select models) |
| 10. Docking connector | 22. Pointstick (select models) |
| 11. Ethernet port | 23. Power button |
| 12. USB 3.0 ports (2) | |




Overview

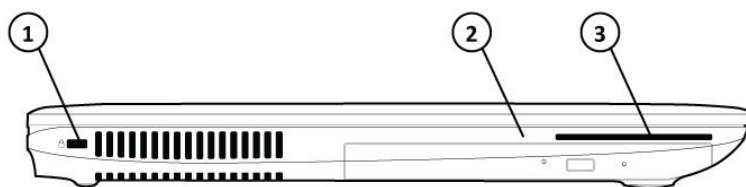

1. Security lock slot
2. Optical drive

Left

3. Smart card reader

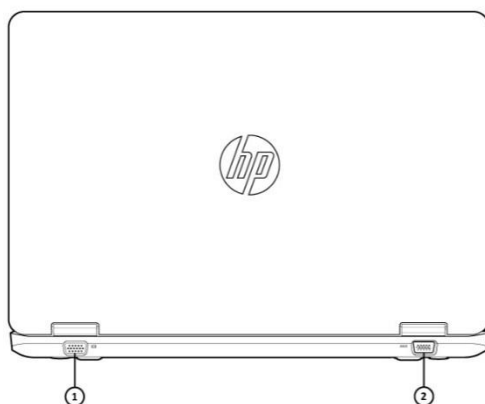

1. VGA port

Back

2. Serial port optional (650 only)



Overview

AT A GLANCE

- Windows 10 versions, Windows 8.1 versions, Windows 7 versions, FreeDOS 2.0
- Choice of 6th Generation Intel® Core™ processors
- Thin and light design— PC-ABS (Polycarbonate–Acrylnitrile/Butadiene/Styrene) durable material is nearly 20% thinner; soft-touch, more durable 4-step paint process; larger buttons (power), revamped keyboard (arrow keys); latch/hook removal for clean palmrest design; top mounted speakers for optimized audio experience (compared to previous generation)
- The HP Premium keyboard is spill-resistant and offered with optional backlit design
- Large Touchpad with gestures support, on/off button with LED indicator
- Enhanced security features including TPM1.2/2.02, SmartCard Reader, HP Biosphere, HP Client Security, Self-Encrypting storage drives, and optional Fingerprint reader
- LED-backlit display
 - HP ProBook 640: 14.0" diagonal HD and FHD or Touch FHD with camera and with WWAN
 - HP ProBook 650: 15.6" diagonal HD and FHD or Touch FHD with camera and with WWAN
- Optional HD webcam with dual-microphone array for video conferencing
- DisplayPort 1.2 now native with integrated graphics
- Three USB 3.0 ports for fast data transfer from devices: 1 standard, 1 charging, and one USB-C™ charging port
- HD Audio with DTS Sound+™ optimized for high fidelity audio
- Wireless and speaker mute button to conveniently manage the connectivity and speaker.
- Flexible wireless connectivity options:
 - Broadband Wireless (WWAN)
 - Wireless LAN (WLAN)
 - Personal area network (WPAN Bluetooth®)
 - Near Field Communication (NFC)
- Choice of hard drives up to 1 TB or solid state drives up to 512 GB
- Passed MIL STD testing¹

1. MIL STD 810G testing is not intended to demonstrate fitness for U.S. Department of Defense contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Damage under the MIL STD test conditions or any accidental damage requires an optional HP Accidental Damage Protection Care Pack.

2. This product ships with TPM 1.2 with option to upgrade to TPM 2.0. Upgrade utility is expected to be available by the second half of 2016 via HP Customer Support.

NOTE: See important legal disclosures for all listed specs in their respective features sections.



Technical Specifications

PRODUCT NAMES

HP ProBook 640 G2 Notebook PC

HP ProBook 650 G2 Notebook PC

OPERATING SYSTEM

Preinstalled

Windows 10 Pro 64¹
Windows 10 Home 64¹
Windows 10 Home Single Language 64¹
Windows 10 Home64 (National Academic only)¹
Windows 10 Pro 64 (National Academic only)¹
Windows 8.1 Pro 64³
Windows 8.1 Pro 64 (National Academic only)³
Windows 8.1 64³
Windows 7 Professional 64 (Available through downgrade rights from Windows 10 Pro 64)²
Windows 7 Professional 32 (Available through downgrade rights from Windows 10 Pro 64)²
Windows 7 Professional 32 (Available through downgrade rights from Windows 10 Pro 64)
(National Academic only)²
Windows 7 Professional 64 (Available through downgrade rights from Windows 10 Pro 64)
(National Academic only)²
Windows 7 Professional 64³
Windows 7 Professional 32³
Windows 7 Professional 32 (National Academic only)³
Windows 7 Professional 64 (National Academic only)³
FreeDOS 2.0

Web-only Support

Windows 10 Enterprise 64¹
Windows 8.1 Enterprise 64¹
Windows 7 Enterprise 64¹
Windows 7 Enterprise 32¹

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>.
2. This system is preinstalled with Windows 7 Professional software and also comes with a license and media for Windows 10 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data
3. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. See <http://www.microsoft.com>.

PROCESSORS



Not all configuration components are available in all regions/countries.
Americas – HP Probook 640 & 650 G2 – June 2016 - c04912132

Technical Specifications

ProBook 640 G2

Intel® Core™ i7-6600U with Intel® HD Graphics 520
(2.6 GHz, up to 3.4 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)^{1,2}
Intel® Core™ i5-6300U with Intel® HD Graphics 520
(2.4 GHz, up to 3 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}
Intel® Core™ i5-6200U with Intel® HD Graphics 520
(2.3 GHz, up to 2.8 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}
Intel® Core™ i3-6100U with Intel® HD Graphics 520
(2.3 GHz, 3 MB cache, 2 cores)^{1,2}

ProBook 650 G2

Intel® Core™ i7-6820HQ with Intel® HD Graphics 530
(2.7 GHz, up to 3.6 GHz with Intel® Turbo Boost Technology, 8 MB cache, 4 cores)^{1,2,3}
Intel® Core™ i5-6440HQ with Intel® HD Graphics 530
(2.6 GHz, up to 3.5 GHz with Intel® Turbo Boost Technology, 6 MB cache, 4 cores)^{1,2,3}

Intel® Core™ i7-6600U with Intel® HD Graphics 520
(2.6 GHz, up to 3.4 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)^{1,2}
Intel® Core™ i5-6300U with Intel® HD Graphics 520
(2.4 GHz, up to 3 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}
Intel® Core™ i5-6200U with Intel® HD Graphics 520
(2.3 GHz, up to 2.8 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}
Intel® Core™ i3-6100U with Intel® HD Graphics 520
(2.3 GHz, 3 MB cache, 2 cores)^{1,2}

1. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

2. Some vPro™ functionality, such as Intel® Active management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel vPro technology is dependent on 3rd party software providers. Microsoft Windows required.

3. Planned to be available February 2016.

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

CHIPSET

Integrated with processor

GRAPHICS

HP ProBook 640

Integrated:

Intel® HD¹ Graphics 520



Technical Specifications

Discrete:

AMD Radeon™ R7 M365X (2 GB GDDR5 dedicated)²

* Available in February 2016

HP ProBook 650

Integrated:

Intel® HD¹ Graphics 520

Intel® HD¹ Graphics 530

Discrete:

AMD Radeon™ R7 M365X (2 GB GDDR5 dedicated)²

1. HD content required to view HD images.

2. AMD Dynamic Switchable Graphics technology requires an Intel processor, plus an AMD Radeon™ discrete graphics configuration and is not available on FreeDOS and Linux OS. With AMD Dynamic Switchable Graphics technology, full enablement of all discrete graphics video and display features may not be supported on all systems (e.g. OpenGL applications will run on the integrated GPU or the APU as the case may be). Planned to be available in February 2016.

DISPLAY

HP ProBook 640

Internal

Non-Touch

14.0" diagonal LED backlight HD¹ Anti-glare 45% CG 220 nits (1366x768)

14.0" diagonal LED backlight HD¹ Anti-glare 45% CG 220 nits (1366x768) with camera

14.0" diagonal LED backlight HD¹ Anti-glare 45% CG 220 nits (1366x768) with WWAN

14.0" diagonal LED backlight HD¹ Anti-glare 45% CG 220 nits (1366x768) with camera and with WWAN

14.0" diagonal LED backlight FHD Anti-glare 60% CG 300 nits (1920x1080)

14.0" diagonal LED backlight FHD Anti-glare 60% CG 300 nits (1920x1080) with camera

14.0" diagonal LED backlight FHD Anti-glare 60% CG 300 nits (1920x1080) with WWAN

14.0" diagonal LED backlight FHD Anti-glare 60% CG 300 nits (1920x1080) with camera & WWAN

Touch

14.0" diagonal LED backlight FHD 60% CG 300 nits (1920x1080) with camera and with WWAN

External

Up to 32-bit per pixel color depth

VGA

Port supports resolutions up to 1920 x 1200 external resolution @60 Hz

DisplayPort 1.2

Supports resolutions up to 2560 x 1600, 30-bit color depth at 60 Hz, and full HD (1920 x 1080) monitors, 24-bit color depth at 120 Hz

Number of Displays Supported

Number of Displays with Optional ² HP UltraSlim Docking Station	UMA	Discrete
ProBook 640	3	5

HP ProBook 650



Technical Specifications

Internal

Non-Touch

- 15.6" diagonal LED backlight HD¹ Anti-glare 45% CG 220 nits (1366 x 768)
- 15.6" diagonal LED backlight HD¹ Anti-glare 45% CG 220 nits (1366 x 768) with camera
- 15.6" diagonal LED backlight HD¹ Anti-glare 45% CG 220 nits (1366 x 768) with WWAN
- 15.6" diagonal LED backlight HD¹ Anti-glare 45% CG 220 nits (1366 x 768) with camera and with WWAN
- 15.6" diagonal LED backlight FHD Anti-glare 60% CG 300 nits (1920 x 1080)
- 15.6" diagonal LED backlight FHD Anti-glare 60% CG 300 nits (1920 x 1080) with camera
- 15.6" diagonal LED backlight FHD Anti-glare 60% CG 300 nits (1920 x 1080) with WWAN
- 15.6" diagonal LED backlight FHD Anti-glare 60% CG 300 nits (1920 x 1080) with camera & WWAN

Touch

- 15.6" diagonal LED backlight FHD 60% CG 300 nits (1920 x 1080) with camera with WWAN

External

Up to 32-bit per pixel color depth

VGA

Port supports resolutions up to 1920 x 1200 external resolution @60 Hz

DisplayPort 1.2

Supports resolutions up to 2560 x 1600, 30-bit color depth at 60 Hz, and full HD (1920 x 1080) monitors, 24-bit color depth at 120 Hz

Number of Displays Supported

Number of Displays with Optional ² HP UltraSlim Docking Station	UMA	Discrete
ProBook 650	3	5

1. HD content required to view HD images.
2. Sold separately or as an optional feature.

NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

500 GB 7200rpm Self Encrypting Drive (FIPS- 140-2) (Opal 2)

Drive Weight	0.21 lbs (95 g)
Capacity	500 GB
Height	0.28 in (7 mm)
Width	2.75 in (69.85 mm)
Interface	ATA-8, SATA 3.0
Transfer Rate	Synchronous (maximum) 600 MB/s
Seek Time	Single Track 1.5 ms
(typical reads, including settling)	Average 12ms
	Maximum 18ms-22ms
Cache	32GB
Rotational Speed	7200 rpm
Logical Blocks	976,773,168
Operating Temperature	32° to 140° F (0° to 60° C) [top cover temp]



Technical Specifications

	Features	ATA Security; TCG Opal 2.x, FIPS, S.M.A.R.T., NCQ, Ultra DMA
500 GB 7200rpm Hard Drive	Drive Weight	0.20 lbs (92 g)-0.21 lbs (95 g)
	Capacity	500 GB
	Height	0.28 in (7 mm)
	Width	2.75 in (69.85 mm)
	Interface	ATA-8, SATA 3.0
	Transfer Rate	Synchronous (maximum) 600 MB/s
	Seek Time (typical reads, including settling)	Single Track 1.5ms-2.0ms
		Average 11ms-13ms
		Maximum 18ms-22ms
	Cache	32GB
	Rotational Speed	7200 rpm
	Logical Blocks	976,773,168
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security
500 GB 7200rpm Self-Encrypting Drive (Opal 2)	Drive Weight	0.21 lbs (95 g)
	Capacity	500GB
	Height	0.28 in (7 mm)
	Width	2.75 in (69.85 mm)
	Interface	ATA-8, SATA 3.0
	Transfer Rate	Synchronous (maximum) 600 MB/s
	Seek Time (typical reads, including settling)	Single Track 1.5ms
		Average 12ms
		Maximum 18ms- 22ms
	Cache	32GB
	Rotational Speed	7200rpm
	Logical Blocks	976,773,168
	Operating Temperature	32° to 140° F (0° to 60° C) [top cover temp]
	Features	ATA Security; TCG Opal 2.x, S.M.A.R.T., NCQ, Ultra DMA
1 TB 5400rpm Hard Drive	Drive Weight	0.21 lbs (94 g)- 0.21 lbs (99 g)
	Capacity	1TB
	Height	0.28 in (7.2 mm)
	Width	2.75 in (69.85 mm)
	Interface	ATA-8, SATA 3.0
	Transfer Rate	Synchronous (maximum) 600 MB/s
		Single Track 2ms



Technical Specifications

	Seek Time (typical reads, including settling)	Average	12ms-13ms
		Maximum	18ms-23ms
	Cache	Up to 32GB	
	Rotational Speed	5400rpm	
	Logical Blocks	1,953,525,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	S.M.A.R.T., NCQ, Ultra DMA	
500 GB Hybrid, 8 GB cache	Drive Weight	0.21 lb (95 g)	
	Capacity	500 GB	
	Height	0.276 in (7 mm)	
	Width	2.76 in (70.1 mm)	
	Interface	ATA-8, SATA 2.6, 6.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum)	600 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	2 ms
		Average	12 ms
		Maximum	NIL ms
	Cache	64GB	
	Rotational Speed	5400 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	
128 GB M2 2280 SATA-3 TLC Solid State Drive	Drive Weight	0.019 lb (8.5 g)-0.022 lb (10 g)	
	Capacity	128 GB	
	Height	0.09 in (2.23 mm)- 0.14 in (3.58 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		Up to 540 MB/s	Up to 300 MB/s
	Logical Blocks	250,069,680	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, DIPM; TRIM; DEVSLP	
180 GB M2 2280 SATA-3 MLC Solid State Drive	Drive Weight	0.022 lb (<10 g)	
	Capacity	180 GB	
	Height	0.09 in (2.23 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	



Technical Specifications

	Performance	Maximum Sequential Read Up to 540 MB/s (Compressible Performance)	Maximum Sequential Write UP to 490 MB/s (Compressible Performance)
	Logical Blocks	351,651,888	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, DIPM; TRIM; DEVSLP	
180 GB M2 2280 SATA-3 Self-Encrypting Drive (Opal 2) MLC Solid State Drive	Drive Weight	0.022 lb (<10 g)	
	Capacity	180GB	
	Height	0.09 in (2.23 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Maximum Sequential Read Up to 540 MB/s (Compressible Performance)	Maximum Sequential Write UP to 490 MB/s (Compressible Performance)
	Logical Blocks	351,651,888	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, TCG OPAL 2.x, DIPM; TRIM; DEVSLP	
240 GB SATA-3 MLC Solid State Drive	Drive Weight	0.02 lb (10 g)	
	Capacity	240 GB	
	Height	0.14 in (3.58 mm)	
	Width	0.87 in (22 mm)	
	Interface	ACS-3, SATA 3.2	
	Performance	Maximum Sequential Read Up to 540 MB/s	Maximum Sequential Write UP to 490 MB/s
	Logical Blocks	468,862,128	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, DIPM; TRIM; DEVSLP	
256 GB 2280 SATA-3 TLC Solid State Drive	Drive Weight	0.019 lb (8.5 g)- 0.022 lb (10 g)	
	Capacity	256GB	
	Height	0.09 in (2.3 mm)- 0.14 in (3.58 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Maximum Sequential Read Up to 540 MB/s	Maximum Sequential Write Up to 455 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, DIPM; TRIM; DEVSLP	



Technical Specifications

256 GB PCIe-3x4 NVMe Solid State Drive	Drive Weight	0.02 lb (10 g)	
	Capacity	256 GB	
	Height	0.09 in (2.3 mm)	
	Width	0.87 in (22 mm)	
	Interface	PCIe NVMe Gen3X4	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		Up to 2,260 MB/s	UP to 1,260 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, TRIM; L1.2	

256 GB M2 2280 SATA-3 Self-Encrypting Drive (Opal 2) MLC Solid State Drive	Drive Weight	0.02 lb (10 g)	
	Capacity	256 GB	
	Height	0.14 in (3.58 mm)- 0.09 in (2.23 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		Up to 540 MB/s	UP to 460 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security; TCG Opal 2.0, DIPM; TRIM; DEVSLP	

512 GB M2 2280 TLC Solid State Drive	Drive Weight	0.019 lb (8.5 g)- 0.02 lb (10 g)	
	Capacity	512 GB	
	Height	0.09 in (2.3 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		Up to 540 MB/s	UP to 500 MB/s
	Logical Blocks	1,000,215,216	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, DIPM; TRIM; DEVSLP	

512 GB M2 2280 SATA-3 Self-Encrypting Drive (Opal 2) MLC Solid State Drive	Drive Weight	0.019 lb (8.5 g)- 0.02 lb (10 g)	
	Capacity	512 GB	
	Height	0.09 in (2.3 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	



Technical Specifications

Performance	Maximum Sequential Read	Maximum Sequential Write
	Up to 540 MB/s	UP to 460 MB/s
Logical Blocks	1,000,215,216	
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
Features	ATA Security, DIPM; TRIM; DEVSLP; TCG Opal 2.0	

OPTICAL DRIVES

Fixed 9.5 mm SATA

- DVD-ROM Drive
- DVD+/-RW SuperMulti DL¹
- Blu-ray ROM DVD+/-RW SuperMulti DL¹
- Weight saver²

1. For Blu-ray drives, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require an HDMI digital connection and your display may require HDCP support. HD-DVD disks cannot be played on this drive. Note that DVD-RAM cannot read or write to 2.6 GB Single Sided/5.2 GB Double Sided – Version 1.0 media. Actual speeds may vary. Don't copy copyright-protected materials. Double Layer discs can store more data than single layer discs; discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

2. Not available on with Touch panel.

MEMORY

Standard

- DDR4-2133 SDRAM (Transfer rates up to 2133 MT/s)
- Two SODIMM slots supporting dual-channel memory

- 4096 MB Total System Memory (4096 MB x 1)
- 8192 MB Total System Memory (4096 MB x 2)
- 8192 MB Total System Memory (8192 MB x 1)
- 16384 MB Total System Memory (8192 MB x 2)

Maximum

- Up to 16384 MB with optional 8192 MB SODIMMs in slots 1 and 2

Dual-channel

- Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.



Technical Specifications

NETWORKING/COMMUNICATIONS

Intel® Pro Wireless Display (WiDi Pro)¹

1. Integrated Intel Wi-Di software is available on select models only and requires separately purchased projector, tv or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to the projector, tv or computer monitor via a standard VGA, HDMI cable, also sold separately

Broadband Wireless (WWAN)^{2,3}

HP lt4120 Qualcomm® Snapdragon™ X5 LTE Mobile Broadband Module
HP hs3110 HSPA+ Mobile Broadband Module

Wireless LAN (WLAN)^{1,2}

Options via Minicard

Intel® 802.11a/b/g/n/ac (2x2) and Bluetooth® 4.0 Combo
Broadcom 802.11a/b/g/n (2x2) and Bluetooth® 4.0 Combo
Realtek 802.11b/g/n (1x1) Wi-Fi

Personal area network (WPAN Bluetooth)^{1,2}

Bluetooth® 4.0 supported via all combo cards (except for Intel® 802.11 ac Non-vPro)
Bluetooth® 4.1 supported via (Intel® 802.11 ac Non-vPro only)

Near Field Communication (NFC) Optional²

HP Module with NXP NFC Controller NPC100

Support for Miracast (Windows 8.1 and Windows 10)

Intel® Pro Wireless Display (WiDi Pro)

1. Wireless access point and Internet service is required and is not included. Availability of public wireless access points limited.

2. Sold separately or as an optional feature.

3. WWAN module is optional and requires separately purchased service contract. Check with service provider for coverage and availability in your area. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products, in all regions.

Communications¹

Intel® I219LM 10/100/1000 Ethernet
Intel® I219V 10/100/1000 Ethernet

1. The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

AUDIO/MULTIMEDIA

Audio

HD Audio with DTS Sound+™

(2) Integrated stereo speakers

Integrated digital microphone (Dual-microphone array when equipped with optional webcam)

Function keys for microphone mute, volume up, volume down



Technical Specifications

Stereo headphone/line out

Stereo microphone in

Webcam

Optional 720p HD webcam ^{1,2}

- HD format (widescreen)
- Supports videoconferencing (non-HD) and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1280x720 resolution (720p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range
- Skype-ready (subscription required and sold separately)

1. Sold separately or as an optional feature.

2. HD content required to view HD images.

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

HP Premium Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard. The 101/102-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as editing keys, both left and right control and alt keys, and function keys. DuraKeys only available with Backlit option.

Three Keyboard options:

Touchpad, Spill-resistant with drain

Touchpad, Spill-resistant with drain, DuraKeys & Backlit

Dual Point, Spill-resistant with drain, DuraKeys & Backlit

Touchpad

On/Off button

Enabled by default

2F Scrolling – On

2F Zoom (Pinch) – On

OSD (enable / disable) – On

Win 8 2F tap = right click – On

Win 8 Edge Swipes – On

Buttons and Function Keys

F1 – Sleep

F2 – Blank

F3 – Backlit

F4 - Display Switch

F5 - Brightness down

F6 - Brightness up

F7 – Blank

F8 - Volume down



Technical Specifications

F9 - Volume up
F10 - Mic Mute
F11 - Bank
F12 - Num lock

SOFTWARE AND SECURITY

Preinstalled Software with Windows Operating System

BIOS

HP BIOSphere¹
HP DriveLock | HP Automatic DriveLock
HP BIOS Protection²
BIOS Update via Network
Master Boot Record Security
Power On Authentication
Pre-Boot Security
Secure Erase³
Hybrid Boot
Measure Boot
Secure Boot
Absolute Persistence Module⁴
Pre-boot Authentication

Multi Media

Cyberlink Power DVD, BD
Cyberlink Power2Go (Secure Burn)
Cyberlink YouCam BE (Windows 7 only)

Communication

HP GPS and Location (Windows 7 only)⁵
HP Connection Manager with support for HP Mobile Connect (Windows 7 only)⁶
HP Mobile Connect Pro (Windows 8.1 and Windows 10 only)⁶
Intel® Wireless Display (WiDi) Software for Windows⁷
Native Miracast Support⁸

HP Value Add Software

HP 3D DriveGuard (requires Windows)
HP ePrint Driver⁹
HP Hotkey
HP Recovery Manager
HP Recovery Disc Creator
HP Registration App (Windows 8.1 only)



Technical Specifications

HP Support Assistant

HP Noise Reduction Software

3rd Party

Foxit PhantomPDF Express for HP

Microsoft Products

Buy Office

Bing Search

Skype¹⁰

Manageability

HP Driver Packs¹¹

HP SoftPaq Download Manager (SDM)

HP System Software Manager (SSM)¹¹

HP BIOS Config Utility (BCU)¹¹

HP Client Catalog¹¹

HP CIK for Microsoft SCCM¹¹

LANDESK Management¹²

For more information on HP Client Management Solutions refer to: <http://www.hp.com/go/clientmanagement>.

Client Security Software

HP Client Security

- HP Security Manager (including Credential Manager and Password Manager)
- HP Drive Lock
- HP Fingerprint Sensor
- HP Password Manager
- Absolute Persistence Module
- Power On Authentication

Microsoft Security Essentials¹³

Microsoft Defender

Security

Trusted Platform Module (TPM) 1.2 (Infineon SLB9670). Common Criteria EAL4+ Certified.

Upgradable to TPM 2.0. Convertible to FIPS 140-2 Certified mode. (TPM 2.0 is not available for Win 7 32-bit.)¹⁴

HP Fingerprint reader

Security lock slot

Integrated Smart Card Reader

For more information on HP Client Security Software Suite, refer to <http://www.hp.com/go/clientsecurity>.

1. Available only on business PCs with HP BIOS.

2. May require a manual recovery step if all copies of BIOS are compromised or deleted

3. For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.



Technical Specifications

4. Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.
5. GPS access requires an unobstructed path to multiple satellites. Performance may be affected if/when used inside of buildings, bridges or heavily congested metropolitan areas. Requires separately purchased GPS navigation software available from multiple GPS applications.
6. HP Mobile Connect Pro is only available on preconfigured devices with WWAN. For geographic availability refer to www.hp.com/go/mobileconnect
7. Integrated Intel Wi-Di feature is available on select configurations only and requires separately purchased projector, TV or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to the projector, TV or computer monitor via a standard HDMI cable, also sold separately.
8. Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>
9. Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see www.hp.com/go/eprintcenter). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.
10. Skype is not offered in China.
11. Not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>
12. Subscription required.
13. Opt in and internet connection required for updates.
14. This product ships with TPM 1.2 with option to upgrade to TPM 2.0. Upgrade utility is expected to be available by the end of 2015 via HP Customer Support

POWER

Power Supply

HP 45W Smart AC Adapter (UMA only)
 HP 45W Smart AC Adapter (Only available for Japan and England)
 HP 65W Smart AC Adapter
 HP 65W Smart EM Adapter (only available for Asia, China and India)
 Power cord included is 1.8 m (+/- 0.1 m) or 1.0 m (+/- 0.1 m).

Primary Battery

HP 3-cell Long Life Prismatic (48 WHr)

Battery Life¹

HP ProBook 640 Notebook PC	UMA Graphics	Discrete Graphics
----------------------------	--------------	-------------------



Technical Specifications

3-cell (48 Whr) with SSD	Up to 12 hrs 30 mins	Up to 12 hrs 15 mins
3-cell (48 Whr) with HDD	Up to 10 hrs	Up to 9 hrs 45 mins
HP ProBook 650 Notebook PC	UMA Graphics	Discrete Graphics
3-cell (48 Whr) with SSD	Up to 12 hrs 30 mins	Up to 12 hrs 15 mins
3-cell (48 Whr) with HDD	Up to 9 hrs 45 mins	Up to 9 hrs 45 mins

System Standby Time²

	UMA Graphics	Discrete Graphics
HP ProBook 640 Notebook PC	Up to 249 hrs	Up to 190 hrs
HP ProBook 650 Notebook PC	Up to 249 hrs	Up to 190 hrs

Battery recharge times

	ProBook 640 G2	ProBook 650 G2
Time to 90 ³ % Charge (minutes)	113	113
Time to 100 ⁴ % Charge (minutes)	163	163

1. Windows 10 MM14 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.
2. Standby life will vary depending on various factors including battery, Memory, CPU, EC and LAN chip. The maximum capacity of the battery will naturally decrease with time and usage.
3. Recharges your battery up to 90% within 113 minutes when the system is off. Applies to 3-cell 48Whr battery only. When the PC is powered on, charge time may increase and will vary based on the workload of the notebook PC.
4. Recharges your battery up to 100% within 163 minutes when the system is off. Applies to 3-cell 48Whr battery only. When the PC is powered on, charge time may increase and will vary based on the workload of the notebook PC.

WEIGHTS & DIMENSIONS

HP ProBook 640 Notebook PC



Technical Specifications

Weight

Starting at 4.30 lbs (1.95 kg)¹

(3-cell battery, ODD weight saver, UMA, no FPR, 1 SODIMM, WLAN only, SSD, touchpad only, no camera, no WWAN)

Dimensions (w x d x h)

13.39 x 9.33 x 1.06 in (Front and rear)²

34.0 x 23.7 x 27.0 cm (Front and rear)²

HP ProBook 650 Notebook PC

Weight

Starting at 5.10 lbs (2.31 kg)¹

(3-cell battery, ODD weight saver, UMA, no FPR, 1 SODIMM, WLAN only, SSD, touchpad only, no camera, no WWAN)

Dimensions (w x d x h)

14.88 x 10.11 x 27.40 in) (Front and rear)²

37.8 x 25.70 x 2.74 cm) (Front and rear)²

1. Weight varies by configuration and components.
2. Height varies depending upon where on the notebook the measurement is made.

PORTS/SLOTS

Ports

USB Type-C™ - One

USB 3.0 port - One

USB 3.0 Port Charging - One

RJ-45 / Ethernet - One

Docking connector - One

Headphone / Microphone (Combo jack) - One

AC port (4.5mm) - One

DisplayPort 1.2 -One

VGA port - One

Serial port optional - One (only available on HPProBook 650)¹

1. Sold separately or as an optional feature.

SD Media Reader Slot

Supports SD, SDHC, SDXC

SERVICE AND SUPPORT

Limited 3-year, 1-year or 90-day limited warranty options available, depending on country. Batteries have a default one year limited warranty except for Long Life batteries which will have same 1-year or 3-year limited warranty as the platform. Optional¹ HP Care Pack Services² are extended service contracts which go beyond your standard limited warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at

<http://www.hp.com/gp/cpc>.

1. Sold separately or as an optional feature.
2. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on



Technical Specifications

date of hardware purchase. Restrictions and limitations apply. Consult the HP Customer Support Center for details.
<http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>

SYSTEM UNIT

TBD

DISPLAYS*

14.0 FHD AG WLED SVA 60%cg 300nits eDP Slim

Panel

Active Area (W x H)	309.40 x 173.95 (mm)
Dimensions (W x H)	320.9 x 205.6 (mm) max
Diagonal Size	14 (inch)
Thickness	3.0 (mm) max
Weight	270 g max
Interface	eDP 1.2
Surface Treatment	Anti-Glare (AG)
Contrast Ratio	300:1 (typical)
Refresh Rate	60 Hz
Brightness	300 nits
Pixel Resolution - Format	1920 x 1080 (FHD)
PPI	157
Pixel Resolution - Configuration	RGB
Backlight	LED
Color Gamut Coverage	60%
Color Depth	6 bits
Viewing Angle	SVA 45/45/25/35

14.0 HD AG WLED SVA 45%cg 220nits eDP Flat



Technical Specifications

Panel

Active Area (W x H)	309.40 x 173.95 (mm)
Dimensions (W x H)	320.9 x 205.6 (mm) max
Diagonal Size	14 (inch)
Thickness	3.6 (mm) max
Weight	320 g max
Interface	eDP 1.2
Surface Treatment	Anti-Glare (AG)
Contrast Ratio	300:1 (typical)
Refresh Rate	60 Hz
Brightness	220 nits
Pixel Resolution - Format	1280 x 768 (HD)
PPI	112
Pixel Resolution - Configuration	RGB
Backlight	LED
Color Gamut Coverage	45%
Color Depth	6 bits + Hi FRC
Viewing Angle	SVA 45/45/25/35

14.0 FHD WLED SVA 60%cg 300nits eDP Slim Touch

Panel

Active Area (W x H)	309.40 x 173.95 (mm)
Dimensions (W x H)	320.9 x 205.6 (mm) max
Diagonal Size	14 (inch)
Thickness	3.0 (mm) max
Weight	270 g max



Technical Specifications

Interface	eDP 1.2
Contrast Ratio	300:1 (typical)
Refresh Rate	60 Hz
Brightness	300 nits
Pixel Resolution - Format	1920 x 1080 (FHD)
PPI	157
Pixel Resolution - Configuration	RGB
Backlight	LED
Color Gamut Coverage	60%
Color Depth	6 bits
Viewing Angle	SVA 45/45/25/35
Touch Enabled	Optional
Touch Point Supported	10-point multi-touch
Other Features	AS
Pen Enabled	No

15.6 FHD AG WLED SVA 60%cg 300nits eDP Slim 3.2mm

Panel	
Active Area (W x H)	344.2 x 193.5 (mm)
Dimensions (W x H)	360 x 224.3 (mm) max
Diagonal Size	15.6 (inch)
Thickness	3.2 (mm) max
Weight	360 g max
Interface	eDP 1.2
Surface Treatment	Anti-Glare (AG)
Contrast Ratio	400:1 (typical)



Technical Specifications

Refresh Rate	60 Hz
Brightness	300 nits
Pixel Resolution - Format	1920 x 1080 (FHD)
PPI	142
Pixel Resolution - Configuration	RGB
Backlight	LED
Color Gamut Coverage	60%
Color Depth	6 bits
Viewing Angle	SVA 45/45/25/35

15.6 HD AG WLED SVA 45%cg 220nits eDP Flat

Panel	
Active Area (W x H)	344.2 x 193.5 (mm)
Dimensions (W x H)	360 x 224.3 (mm) max
Diagonal Size	15.6 (inch)
Thickness	3.8 (mm) max
Weight	420 g max
Interface	eDP 1.2
Surface Treatment	Anti-Glare (AG)
Contrast Ratio	300:1 (typical)
Refresh Rate	60 Hz
Brightness	220 nits
Pixel Resolution - Format	1280 x 768 (HD)
PPI	101
Pixel Resolution - Configuration	RGB
Backlight	LED



Technical Specifications

Color Gamut Coverage	45%
Color Depth	6 bits + Hi FRC
Viewing Angle	SVA 45/45/25/35

15.6 FHD WLED SVA 60%cg 300nits eDP Slim 3.2mm Touch

Panel	
Active Area (W x H)	344.2 x 193.5 (mm)
Dimensions (W x H)	360 x 224.3 (mm) max
Diagonal Size	15.6 (inch)
Thickness	3.2 (mm) max
Weight	360 g max
Interface	eDP 1.2
Contrast Ratio	400:1 (typical)
Refresh Rate	60 Hz
Brightness	300 nits
Pixel Resolution - Format	1920 x 1080 (FHD)
PPI	142
Pixel Resolution - Configuration	RGB
Backlight	LED
Color Gamut Coverage	60%
Color Depth	6 bits
Viewing Angle	SVA 45/45/25/35
Touch Enabled	Optional
Touch Point Supported	10-point multi-touch
Other Features	AS
Pen Enabled	No



Technical Specifications

* ALL SPECIFICATIONS REPRESENT THE TYPICAL SPECIFICATIONS PROVIDED BY HP'S COMPONENT MANUFACTURERS; ACTUAL PERFORMANCE MAY VARY EITHER HIGHER OR LOWER.

NETWORKING/COMMUNICATIONS

HP It4120 Qualcomm® Snapdragon™ X5 LTE Mobile Broadband Module*

Technology/Operating bands	LTE: 2100 (Band 1), 1900 (Band 2), 1800 (Band 3), 1700/2100 (Band 4), 850 (Band 5), 2600 (Band 7), 900 (Band 8), 700 (Band 12 lower), 700 (Band 13 upper), 700 (Band 17 lower), 800 (Band 20), 700 (Band 28). HSPA+: 2100 (Band 1), 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 900 (Band 8) MHz EV-DO: 850 (BC0), 1900 (BC1) MHz (Only work with Verizon network) E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz
Wireless protocol standards	3GPP Release 10 LTE Specification CAT.4, 20MHz BW WCDMA R99, 3GPP Release 5, 6, 7 and 8 UMTS Specification 1xEVDO Release 0, A and B. E-GPRS: Class B, Multi-slot class 12, coding schemes CS1 - CS4 and MSC1 - MSC9
GPS	Standalone, A-GPS (MS-A, MS-B and XTRA)
GPS bands	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
Maximum data rates	LTE: 150 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21Mbps (Download), 5.76 Mbps (Upload) CDMA 1xRTT: 153.6 kbps (Download), 153.6 kbps (Upload) EVDO Rel.A: 3.1 Mbps (Download), 1.8 Mbps (Upload) EVDO Rel.B: 14.7 Mbps (Download), 5.4Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
Maximum output power	LTE: 23 dBm HSPA+: 23.5 dBm 1xRTT/EVDO: 24dBm E-GPRS 1900/1800: 26 dBm E-GPRS 900/850: 27 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm
Maximum power consumption	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average) 1xRTT/EVDO: 1,000 mA (peak); 700 mA (average) E-GPRS: 2,800 mA (peak); 500 mA (average)
Form Factor	M.2, 3042-S3 Key B
Weight	6.2 g
Dimensions (Length x Width x Thickness)	42 x 30 x 2.3 mm



Technical Specifications

* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors.

HP hs3110 HSPA+ Intel® Mobile Broadband Module*	
Technology/Operating bands	HSPA+: 2100 (Band1), 1900 (Band 2), 1700 (Band 4), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 MHz (Band 5), 900 (Band 8) MHz
Wireless protocol standards	WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9
GPS	Standalone, A-GPS
GPS bands	1575.42 MHz ± 1.023 MHz
Maximum data rates	HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) E-GPRS: 296 kbps (Download), 236.8 kbps (Upload) GPRS: 107 kbps (Download), 85.6 kbps (Upload)
Maximum output power	HSPA+: 24 dBm E-GPRS 1800/1900: 26 dBm E-GPRS 850/900: 27 dBm GPRS 1800/1900: 30 dBm GPRS 850/900: 33 dBm
Maximum power consumption	HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,800 mA (peak); 700 mA (average)
Form Factor	M.2, 3042-S3 Key B
Weight	6 g
Dimensions (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors.

Intel® 802.11a/b/g/n/ac (2x2) and Bluetooth® 4.1 Combo

Wireless LAN Standards	IEEE 802.11a
	IEEE 802.11b
	IEEE 802.11g
	IEEE 802.11n
	IEEE 802.11ac
Interoperability	Wi-Fi certified



Technical Specifications

Frequency Band	<p>802.11b/g/n</p> <ul style="list-style-type: none"> 2.402 – 2.482 GHz <p>Note:</p> <p>The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p> <p>802.11a/n</p> <ul style="list-style-type: none"> 4.9 – 4.95 GHz (Japan) 5.15 – 5.25 GHz 5.25 – 5.35 GHz 5.47 – 5.725 GHz 5.825 – 5.850 GHz <p>Note: Indonesia no support this band)</p>
Data Rates	<ul style="list-style-type: none"> 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) 802.11ac: MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)
Modulation	<p>Direct Sequence Spread Spectrum</p> <p>BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM</p>
Security¹	<ul style="list-style-type: none"> IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only AES-CCMP: 128 bit in hardware 802.1x authentication WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. WPA2 certification IEEE 802.11i Cisco Certified Extensions, all versions through CCX4 and CCX Lite WAPI
Network Architecture Models	<p>Ad-hoc (Peer to Peer)</p> <p>Infrastructure (Access Point Required)</p>
Roaming	<p>IEEE 802.11 compliant roaming between access points</p>
Output Power²	<ul style="list-style-type: none"> 802.11b: +16dBm minimum 802.11g: +14dBm minimum



Technical Specifications

	<ul style="list-style-type: none"> • 802.11a : +14dBm minimum • 802.11n HT20(2.4GHz) : +14dBm minimum • 802.11n HT40(2.4GHz) : +12dBm minimum • 802.11n HT20(5GHz) : +14dBm minimum • 802.11n HT40(5GHz) : +12dBm minimum
Power Consumption	<p>Transmit: 2.0 W (max)</p> <p>Receive: 1.6 W (max)</p> <p>Idle mode (PSP): 180 mW (WLAN Associated)</p> <p>Idle mode: 50 mW (WLAN unassociated)</p> <p>Connect Standby: 10 mW (WLAN+BT)</p> <p>Radio disabled: 5 mW</p>
Power Management	<p>ACPI and PCI Express compliant power management</p> <p>802.11 compliant power saving mode</p>
Receiver Sensitivity³	<p>802.11b, 1Mbps : -94dBm maximum</p> <p>802.11b, 11Mbps : -86dBm maximum</p> <p>802.11g, 6Mbps : -88dBm maximum</p> <p>802.11g, 54Mbps : -74dBm maximum</p> <p>802.11a, 6Mbps : -88dBm maximum</p> <p>802.11a, 54Mbps : -74dBm maximum</p> <p>802.11n, MCS07 : -69dBm maximum</p> <p>802.11n, MCS15 : -66dBm maximum</p> <p>802.11ac, 1SS, MCS-0 : -86dBm maximum</p> <p>802.11ac, 1SS, MCS-9 : -61dBm maximum</p> <p>802.11ac, 2SS, MCS-0 : -83dBm maximum</p> <p>802.11ac, 2SS, MCS-9 : -58dBm maximum</p>
Antenna type	<p>High efficiency antenna with spatial diversity, mounted in the display enclosure</p> <p>Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications</p>



Technical Specifications

Form Factor	PCI-Express M.2 MiniCard	
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm	
	Or	
	Type 1630 : 2.3 x 16.0 x 30.0 mm	
Weight	Type 2230 : 2.8g	
	Or	
	Type 1630 : 2g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 158° F (–10° to 70° C)
	Non-operating	–40° to 176° F (–40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED White – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 	

HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology

Bluetooth Specification	4.0/4.1/4.2 Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps BLE : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels



Technical Specifications

Transmit Power

Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)

The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.

Receiver Sensitivity

Legacy

Modulation	0.01% BER	0.001% BER
GFSK	-80 dBm	-70 dBm
$\pi/4$ -DQPSK	-80 dBm	-70 dBm
8DPSK	-80 dBm	-70 dBm

Power Consumption

Peak (Tx) 330 mW
Peak (Rx) 230 mW
Selective Suspend 17 mW

Range

Legacy Up to 33 ft (10 m)

BLE Up to 99 ft (30 m)

Electrical Interface

USB 2.0 compliant

Bluetooth Software Supported

Microsoft Windows Bluetooth Software

Link Topology

Electrical Interface

Point to Point, Multipoint Pico Nets up to 7 slaves

Bluetooth Software Supported

Full support of Bluetooth Security Provisions

Security

Power Management

Microsoft Windows ACPI, and USB Bus Support

Certifications

Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff

Security

All necessary regulatory approvals for supported countries, including:

Certifications

FCC (47 CFR) Part 15C, Section 15.247 & 15.249

Bluetooth Profiles Supported

Power Management

ETS 300 328, ETS 300 826



Technical Specifications

Certifications

Low Voltage Directive IEC950

UL, CSA, and CE Mark

Serial Port Profile (SPP)¹

Service Discovery Application Profile (SDAP)

Dial-Up Networking (DUN)^{1,2}

Generic Object Exchange Profile (GOEP)^{1,2}

Object Push Profile (OPP)^{1,2}

Hard Copy Cable Replacement (HCRP)^{1,2}

Personal Area Networking Profile (PAN)^{1,2}

Human Interface Device Profile (HID)^{1,2}

Hands Free Profile (HFP)

Advanced Audio Distribution Profile (A2DP)

Audio Video Remote Control Profile (AVRCP)

Certifications

Bluetooth Profiles Supported

Bluetooth V4.1/V4.2 support feature

V4.1: ESR5/6/7 compliant

V4.2: ESR8 compliant, LE Secure Connection – Basic.

Intel® 802.11a/b/g/n (2x2) and Bluetooth® 4.0 Combo

Wireless LAN Standards

IEEE 802.11a

IEEE 802.11b

IEEE 802.11g

IEEE 802.11n

Interoperability

Wi-Fi certified

Frequency Band

802.11b/g/n

- 2.402 – 2.482 GHz

Note:



Technical Specifications

The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

802.11a

- 4.9 – 4.95 GHz (Japan)
- 5.15 – 5.25 GHz
- 5.25 – 5.35 GHz
- 5.47 – 5.725 GHz
- 5.825 – 5.850 GHz

Note:

Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)

Antenna Structure

2 transmit; 2 receive (2x2)

Data Rates

802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11b: 1, 2, 5.5, 11 Mbps
802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)

Modulation

Direct Sequence Spread Spectrum
CCK, BPSK, QPSK, 16-QAM, 64-QAM

Security¹

- IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only
- AES-CCMP: 128 bit in hardware
- 802.1x authentication
- WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.
- WPA2 certification
- IEEE 802.11i
- Cisco Certified Extensions, all versions through CCX4 and CCX Lite
- WAPI

Sub-channels

Multinational support with frequency bands and channels compliant to local regulations.

Network Architecture Models

Ad-hoc (Peer to Peer)
Infrastructure (Access Point Required)

Roaming

IEEE 802.11 compliant roaming between band Access Points



Technical Specifications

Output Power²

- 802.11b : +16dBm minimum
- 802.11g : +14dBm minimum
- 802.11a : +14dBm minimum
- 802.11n HT20(2.4GHz) : +13dBm minimum
- 802.11n HT40(2.4GHz) : +13dBm minimum
- 802.11n HT20(5GHz) : +12dBm minimum
- 802.11n HT40(5GHz) : +12dBm minimum

Power Consumption

Transmit: 2.0 W (max)

Receive: 1.6 W (max)

Idle mode (PSP): 180 mW (WLAN Associated)

Idle mode: 60 mW (WLAN unassociated)

Radio disabled: 30 mW

Power Management

ACPI and PCI Express compliant power management
802.11 compliant power saving mode

Receiver Sensitivity³

802.11b, 1Mbps : -94dBm maximum
802.11b, 11Mbps : -86dBm maximum
802.11g, 6Mbps : -88dBm maximum
802.11g, 54Mbps : -74dBm maximum
802.11a, 6Mbps : -86dBm maximum
802.11a, 54Mbps : -72dBm maximum
802.11n, MCS07 : -69dBm maximum
802.11n, MCS15 : -66dBm maximum

Antenna type

High efficiency antenna with spatial diversity, mounted in the display enclosure

Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO and Bluetooth communications

Form Factor

PCI-Express M.2 MiniCard

Dimensions

Type 2230 : 2.3 x 22.0 x 30.0 mm

Or

Type 1630 : 2.3 x 16.0 x 30.0 mm

Weight

Type 2230 : 2.8g

Or

Type 1630 : 2g



Technical Specifications

Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 158° F (-10° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Amber - Radio OFF; LED White - Radio ON	

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

Bluetooth Specification	4.0+EDR Compliant	
Frequency Band	2402 to 2480 MHz	
Number of Available Channels	79 (1 MHz) available channels	
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps	
	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels	
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric	
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.	

Receiver Sensitivity

Modulation	0.01% BER	0.001% BER
GFSK	-80 dBm	-70 dBm
$\pi/4$ -DQPSK	-80 dBm	-70 dBm
8DPSK	-80 dBm	-70 dBm



Technical Specifications

Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW
Range	Up to 33 ft (10 m)
Electrical Interface	USB 2.0 compliant
Bluetooth Software Supported	Microsoft Windows Bluetooth Software
Link Topology	
Electrical Interface	Point to Point, Multipoint Pico Nets up to 7 slaves
Bluetooth Software Supported	Full support of Bluetooth Security Provisions
Security	
Power Management	Microsoft Windows ACPI, and USB Bus Support
Power Management	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	
Security	All necessary regulatory approvals for supported countries, including:
Certifications	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
Bluetooth Profiles Supported	
Power Management	ETS 300 328, ETS 300 826
Certifications	Low Voltage Directive IEC950 UL, CSA, and CE Mark
Certifications	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP)
Bluetooth Profiles Supported	



Technical Specifications

Hands Free Profile (HFP)
Advanced Audio Distribution Profile (A2DP)

Bluetooth V4.1/V4.2 support feature

V4.1: ESR5/6/7 compliant

V4.2: ESR8 compliant, LE Secure Connection – Basic.

Broadcom 802.11a/b/g/n (2x2) and Bluetooth® 4.0 Combo

Wireless LAN Standards

IEEE 802.11a
IEEE 802.11b
IEEE 802.11g
IEEE 802.11n

Interoperability

Wi-Fi certified

Frequency Band

802.11b/g/n

- 2.402 – 2.482 GHz

Note:

The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

802.11a

- 4.9 – 4.95 GHz (Japan)
- 5.15 – 5.25 GHz
- 5.25 – 5.35 GHz
- 5.47 – 5.725 GHz



Technical Specifications

- 5.825 – 5.850 GHz

Note:

Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)

Antenna Structure	2 transmit; 2 receive (2x2)
Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)
Modulation	Direct Sequence Spread Spectrum CCK, BPSK, QPSK, 16-QAM, 64-QAM
Security¹	<ul style="list-style-type: none"> • IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through CCX4 and CCX Lite • WAPI
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between band Access Points
Output Power²	<ul style="list-style-type: none"> • 802.11b : +16dBm minimum • 802.11g : +14dBm minimum • 802.11a : +14dBm minimum • 802.11n HT20(2.4GHz) : +13dBm minimum • 802.11n HT40(2.4GHz) : +13dBm minimum • 802.11n HT20(5GHz) : +12dBm minimum • 802.11n HT40(5GHz) : +12dBm minimum
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated)



Technical Specifications

	Idle mode: 60 mW (WLAN unassociated)	
	Radio disabled: 30 mW	
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum	
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure	
	Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO and Bluetooth communications	
Form Factor	PCI-Express M.2 MiniCard	
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm	
Weight	Type 2230 : 2.8g Or Type 1630 : 2g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 158° F (-10° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Amber - Radio OFF; LED White - Radio ON	



Technical Specifications

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

Bluetooth Specification	4.0+EDR Compliant													
Frequency Band	2402 to 2480 MHz													
Number of Available Channels	79 (1 MHz) available channels													
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps													
	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels													
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric													
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.													
Receiver Sensitivity	<table border="1"> <thead> <tr> <th>Modulation</th><th>0.01% BER</th><th>0.001% BER</th></tr> </thead> <tbody> <tr> <td>GFSK</td><td>-80 dBm</td><td>-70 dBm</td></tr> <tr> <td>$\pi/4$-DQPSK</td><td>-80 dBm</td><td>-70 dBm</td></tr> <tr> <td>8DPSK</td><td>-80 dBm</td><td>-70 dBm</td></tr> </tbody> </table>		Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER												
GFSK	-80 dBm	-70 dBm												
$\pi/4$ -DQPSK	-80 dBm	-70 dBm												
8DPSK	-80 dBm	-70 dBm												
Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW													
Range	Up to 33 ft (10 m)													
Electrical Interface	USB 2.0 compliant													
Bluetooth Software Supported	Microsoft Windows Bluetooth Software													
Link Topology														
Electrical Interface	Point to Point, Multipoint Pico Nets up to 7 slaves													
Bluetooth Software Supported	Full support of Bluetooth Security Provisions													



Technical Specifications

Security

Power Management

Microsoft Windows ACPI, and USB Bus Support

Power Management

Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff

Certifications

Security

All necessary regulatory approvals for supported countries, including:

Certifications

FCC (47 CFR) Part 15C, Section 15.247 & 15.249

Bluetooth Profiles Supported

Power Management

ETS 300 328, ETS 300 826

Certifications

Low Voltage Directive IEC950

UL, CSA, and CE Mark

Serial Port Profile (SPP)¹

Service Discovery Application Profile (SDAP)

Dial-Up Networking (DUN)^{1,2}

Generic Object Exchange Profile (GOEP)^{1,2}

Object Push Profile (OPP)^{1,2}

File Transfer Profile (FTP)

Certifications

Bluetooth Profiles Supported

Synchronization Profile (SYNC)

Hard Copy Cable Replacement (HCRP)^{1,2}

Personal Area Networking Profile (PAN)^{1,2}

Human Interface Device Profile (HID)^{1,2}

FAX Profile (FAX)

Basic Imaging Profile (BIP)²

Headset Profile (HSP)

Hands Free Profile (HFP)

Advanced Audio Distribution Profile (A2DP)

Broadcom 802.11b/g/n (1x1) WiFi and Bluetooth® 4.0 Combo

Wireless LAN Standards

IEEE 802.11b

IEEE 802.11g

IEEE 802.11n



Technical Specifications

Interoperability	Wi-Fi certified
Frequency Band	802.11b/g/n <ul style="list-style-type: none"> 2.402 – 2.482 GHz <p>Note: The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p>
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 07, (20MHz)
Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM,
Security¹	<ul style="list-style-type: none"> IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only AES-CCMP: 128 bit in hardware 802.1x authentication WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. WPA2 certification IEEE 802.11i Cisco Certified Extensions, all versions through CCX4 and CCX Lite WAPI
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none"> 802.11b : +16dBm minimum 802.11g : +14dBm minimum 802.11n HT20(2.4GHz) : +13dBm minimum 802.11n HT40(2.4GHz) : +13dBm minimum 802.11n HT20(5GHz) : +12dBm minimum 802.11n HT40(5GHz) : +12dBm minimum
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum



Technical Specifications

	802.11b, 11Mbps : -86dBm maximum	
	802.11g, 6Mbps : -88dBm maximum	
	802.11g, 54Mbps : -74dBm maximum	
	802.11n, MCS07 : -69dBm maximum	
	802.11n, MCS15 : -66dBm maximum	
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure	
	Two embedded antennas for 2.4GHz are provided to the card to support WLAN and Bluetooth communications. (Support Dual antenna or Single antenna, depend on platform requirement)	
Form Factor	PCI-Express M.2 MiniCard	
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm	
	Or	
	Type 1630 : 2.3 x 16.0 x 30.0 mm	
Weight	Type 2230 : 2.8g	
	Or	
	Type 1630 : 2g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 158° F (–10° to 70° C)
	Non-operating	–40° to 176° F (–40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED White – Radio ON	
	<ol style="list-style-type: none"> 4. Check latest software/driver release for updates on supported security features. 5. Maximum output power may vary by country according to local regulations. 6. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 	



Technical Specifications

HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

Bluetooth Specification	4.0+EDR Compliant												
Frequency Band	2402 to 2480 MHz												
Number of Available Channels	79 (1 MHz) available channels												
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric												
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.												
Receiver Sensitivity	<table><tr><th>Modulation</th><th>0.01% BER</th><th>0.001% BER</th></tr><tr><td>GFSK</td><td>-80 dBm</td><td>-70 dBm</td></tr><tr><td>π/4-DQPSK</td><td>-80 dBm</td><td>-70 dBm</td></tr><tr><td>8DPSK</td><td>-80 dBm</td><td>-70 dBm</td></tr></table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	π/4-DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER											
GFSK	-80 dBm	-70 dBm											
π/4-DQPSK	-80 dBm	-70 dBm											
8DPSK	-80 dBm	-70 dBm											
Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW												
Range	Up to 33 ft (10 m)												
Electrical Interface	USB 2.0 compliant												
Bluetooth Software Supported	Microsoft Windows Bluetooth Software												
Link Topology													
Electrical Interface	Point to Point, Multipoint Pico Nets up to 7 slaves												
Bluetooth Software Supported	Full support of Bluetooth Security Provisions												
Security													
Power Management	Microsoft Windows ACPI, and USB Bus Support												



Technical Specifications

Power Management	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	
Security	All necessary regulatory approvals for supported countries, including:
Certifications	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
Bluetooth Profiles Supported	
Power Management	ETS 300 328, ETS 300 826
Certifications	Low Voltage Directive IEC950
	UL, CSA, and CE Mark
Certifications	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP)
Bluetooth Profiles Supported	Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

Realtek 802.11b/g/n (1x1) Wi-Fi

Wireless LAN Standards	IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability	Wi-Fi certified
Frequency Band	802.11b/g/n • 2.402 – 2.482 GHz



Technical Specifications

Note:

The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 07, (20MHz)
Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM,
Security¹	<ul style="list-style-type: none"> • IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through CCX4 and CCX Lite • WAPI
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none"> • 802.11b : +16dBm minimum • 802.11g : +14dBm minimum • 802.11n HT20(2.4GHz) : +13dBm minimum • 802.11n HT40(2.4GHz) : +13dBm minimum • 802.11n HT20(5GHz) : +12dBm minimum • 802.11n HT40(5GHz) : +12dBm minimum
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum



Technical Specifications

	802.11g, 54Mbps : -74dBm maximum	
	802.11n, MCS07 : -69dBm maximum	
	802.11n, MCS15 : -66dBm maximum	
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure	
	Two embedded antennas for 2.4GHz are provided to the card to support WLAN and Bluetooth communications. (Support Dual antenna or Single antenna, depend on platform requirement)	
Form Factor	PCI-Express M.2 MiniCard	
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm	
	Or	
	Type 1630 : 2.3 x 16.0 x 30.0 mm	
Weight	Type 2230 : 2.8g	
	Or	
	Type 1630 : 2g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 158° F (–10° to 70° C)
	Non-operating	–40° to 176° F (–40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED White – Radio ON	

7. Check latest software/driver release for updates on supported security features.
8. Maximum output power may vary by country according to local regulations.
9. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).



Technical Specifications

HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

Bluetooth Specification	4.0+EDR Compliant												
Frequency Band	2402 to 2480 MHz												
Number of Available Channels	79 (1 MHz) available channels												
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric												
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.												
Receiver Sensitivity	<table><tr><th>Modulation</th><th>0.01% BER</th><th>0.001% BER</th></tr><tr><td>GFSK</td><td>-80 dBm</td><td>-70 dBm</td></tr><tr><td>$\pi/4$-DQPSK</td><td>-80 dBm</td><td>-70 dBm</td></tr><tr><td>8DPSK</td><td>-80 dBm</td><td>-70 dBm</td></tr></table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER											
GFSK	-80 dBm	-70 dBm											
$\pi/4$ -DQPSK	-80 dBm	-70 dBm											
8DPSK	-80 dBm	-70 dBm											
Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW												
Range	Up to 33 ft (10 m)												
Electrical Interface	USB 2.0 compliant												
Bluetooth Software Supported	Microsoft Windows Bluetooth Software												
Link Topology													
Electrical Interface	Point to Point, Multipoint Pico Nets up to 7 slaves												
Bluetooth Software Supported	Full support of Bluetooth Security Provisions												
Security													
Power Management	Microsoft Windows ACPI, and USB Bus Support												
Power Management	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff												
Certifications													



Technical Specifications

Security	All necessary regulatory approvals for supported countries, including:
Certifications	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
Bluetooth Profiles Supported	
Power Management	ETS 300 328, ETS 300 826
Certifications	Low Voltage Directive IEC950
	UL, CSA, and CE Mark
Certifications	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP)
Bluetooth Profiles Supported	Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

ENVIRONMENTAL TBD

COUNTRY OF ORIGIN

China



Summary of Changes

Options and Accessories (Sold separately and availability may vary by country.)

Type	Description	Part Number
Docking	HP 3001pr USB 3.0 Port Replicator	F3S42AA
	HP 3005pr USB 3.0 Port Replicator	H1L08AA#xxx
	HP Display and Notebook Stand II	E8G00AA#xxx
	Universal Port Replicator	E6D70AA#xxx
	HP UltraSlim Docking Station	D9Y32AA#xxx
Input/Output/Audio	HP USB Travel Mouse	G1K28AA#xxx
	HP Ultrathin Wireless Mouse SE	L9V77AA
	HP Ultrathin Wireless Mouse	L9V78AA
	HP Stereo USB Headset	T1A67AA
	DisplayPort to HDMI Adapter	F3W43AA
	DisplayPort to DVI Adapter	F7W96AA
Power	HP 45W Smart AC Adapter (4.5mm)	H6Y88AA#xxx
	HP 65W Smart AC Adapter	H6Y89AA#xxx
Storage - External Storage	HP USB External DVDRW Drive	F2B56AA
Security	HP UltraSlim Keyed Cable Lock	H4D73AA
	HP USB Smart Card Reader	F6V67AA
	HP Docking Station Cable Lock	AU656AA#XXX
Display	HP ProDisplay P232	K7X31AA
	HP ProDisplay P222va	K7X30AA
	HP ProDisplay P222c	L4J08AA



Summary of Changes

Copyright © 2015 HP Development Company, L.P. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Core, and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark owned by its proprietor and used by Hewlett-Packard Company under license. Microsoft and Windows are either trademarks or registered trademarks of Microsoft Corporation in the U.S. and other countries. Adobe is a trademark of Adobe Systems Incorporated. ENERGY STAR is a registered mark owned by the U.S. Environmental Protection Agency. For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS Licensing Limited. DTS, the Symbol, & DTS and the Symbol together are registered trademarks, and DTS Sound+ is a trademark of DTS, Inc. © DTS, Inc. All Rights Reserved.

