



HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

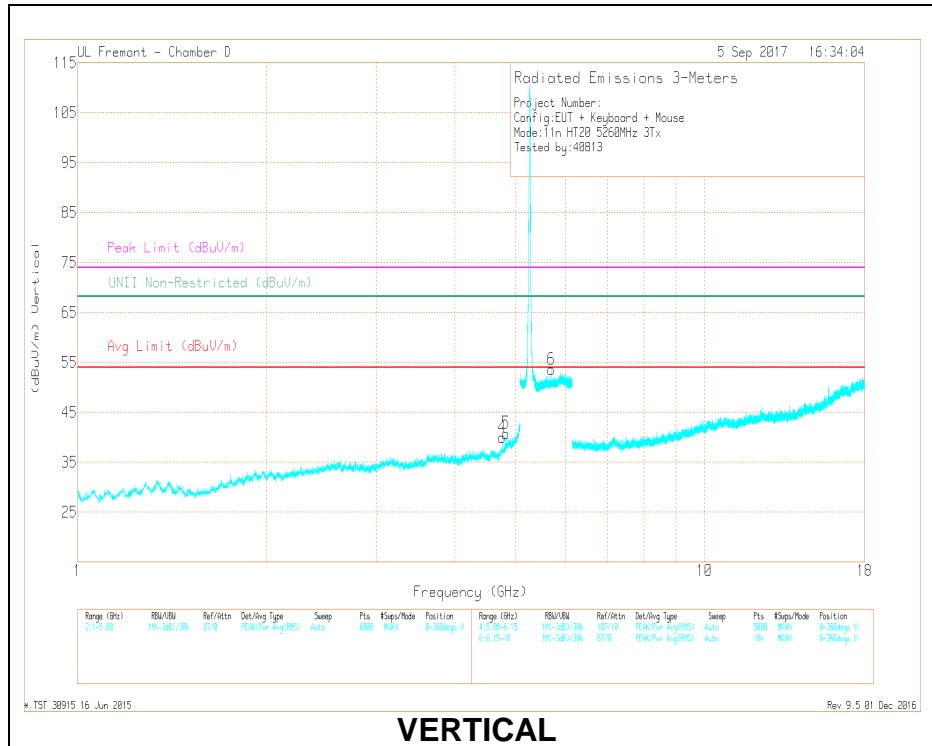

VERTICAL

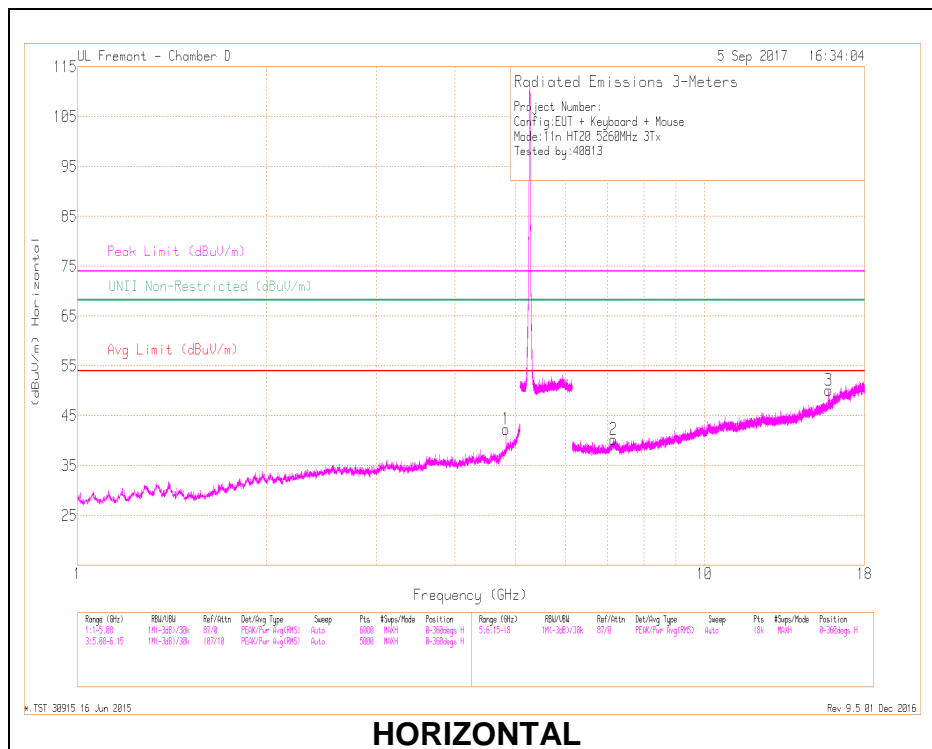

HORIZONTAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.822	41.43	PK-U	34	-27.1	0	48.33	-	-	74	-25.67	-	-	219	221	H
	* 4.822	32.07	ADR	34	-27.1	.23	39.2	54	-14.8	-	-	-	-	219	221	H
4	* 4.743	39.35	PK-U	33.9	-27.6	0	45.65	-	-	74	-28.35	-	-	344	143	V
	* 4.746	27.14	ADR	33.9	-27.4	.23	33.87	54	-20.13	-	-	-	-	344	143	V
5	* 4.822	40.22	PK-U	34	-27.1	0	47.12	-	-	74	-26.88	-	-	3	105	V
	* 4.822	31.07	ADR	34	-27.1	.23	38.2	54	-15.8	-	-	-	-	3	105	V
3	* 15.785	37.61	PK-U	40.5	-20.3	0	57.81	-	-	74	-16.19	-	-	200	107	H
	* 15.779	25.41	ADR	40.5	-20.4	.23	45.74	54	-8.26	-	-	-	-	200	107	H
6	5.698	42.42	PK-U	34.8	-17.4	0	59.82	-	-	-	-	68.2	-8.38	198	153	V
2	7.149	35.85	PK-U	35.5	-24	0	47.35	-	-	-	-	68.2	-20.85	145	343	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

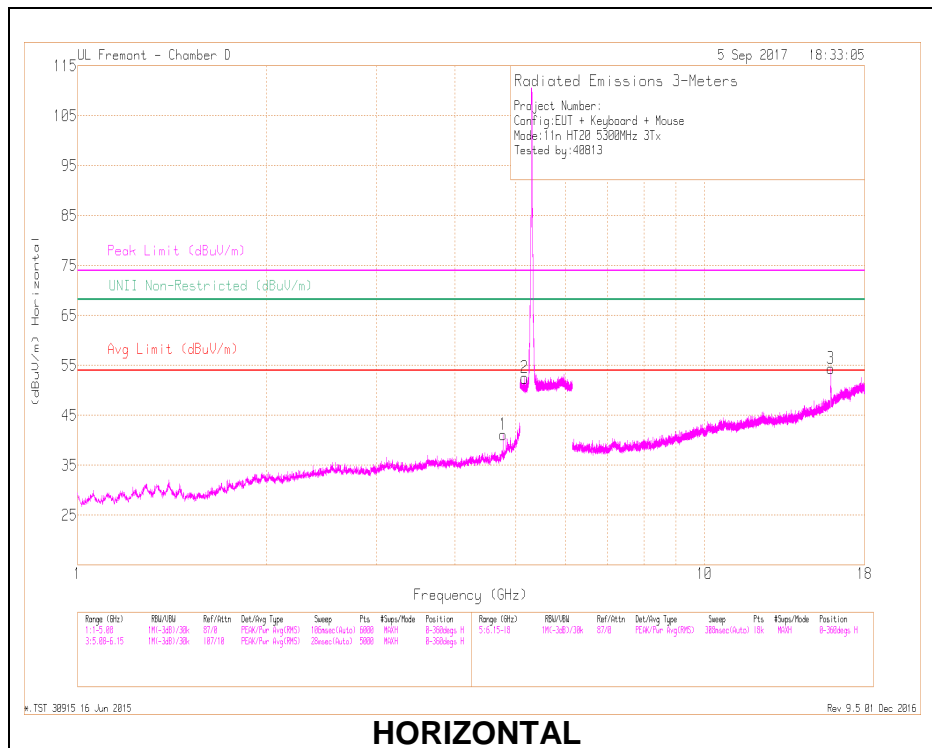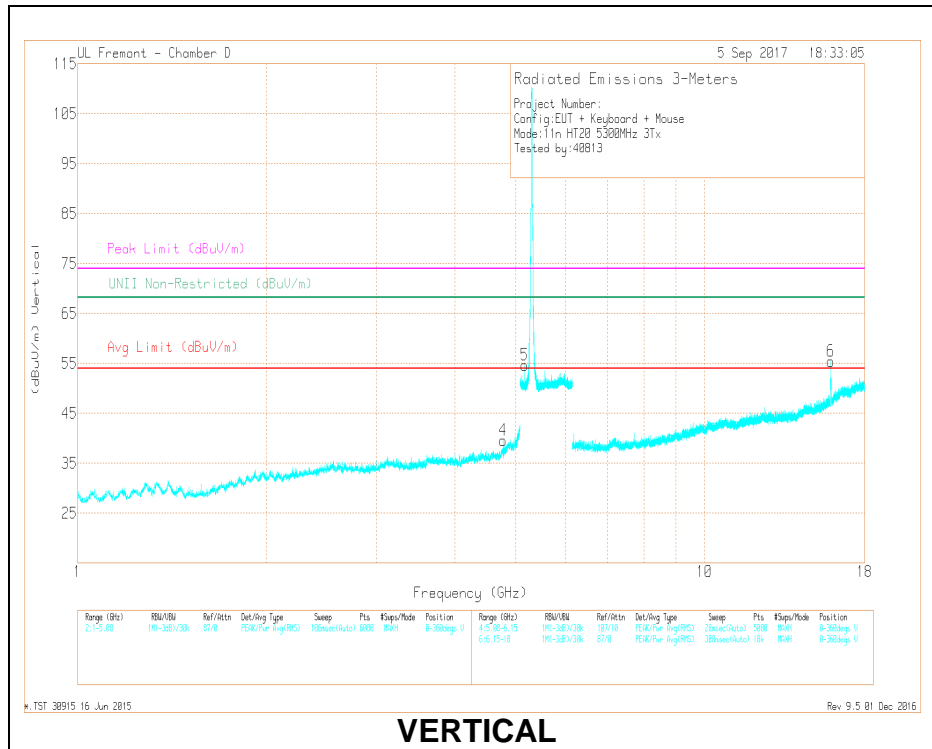

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.77	40.34	PK-U	33.9	-27.4	0	46.84	-	-	74	-27.16	-	-	222	228	H
	* 4.77	32.99	ADR	33.9	-27.4	.23	39.72	54	-14.28	-	-	-	-	222	228	H
4	* 4.77	38.96	PK-U	33.9	-27.4	0	45.46	-	-	74	-28.54	-	-	257	300	V
	* 4.77	30.8	ADR	33.9	-27.4	.23	37.53	54	-16.47	-	-	-	-	257	300	V
3	* 15.902	45.55	PK-U	40.6	-20.2	0	65.95	-	-	74	-8.05	-	-	149	272	H
	* 15.903	32.16	ADR	40.6	-20.2	.23	52.79	54	-1.21	-	-	-	-	149	272	H
6	* 15.898	44.83	PK-U	40.6	-20.2	0	65.23	-	-	74	-8.77	-	-	249	108	V
	* 15.903	31.44	ADR	40.6	-20.2	.23	52.07	54	-1.93	-	-	-	-	249	108	V
5	5.167	45.16	PK-U	34.1	-18.4	0	60.86	-	-	-	-	68.2	-7.34	227	271	V
2	5.168	43.44	PK-U	34.1	-18.4	0	59.14	-	-	-	-	68.2	-9.06	252	226	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

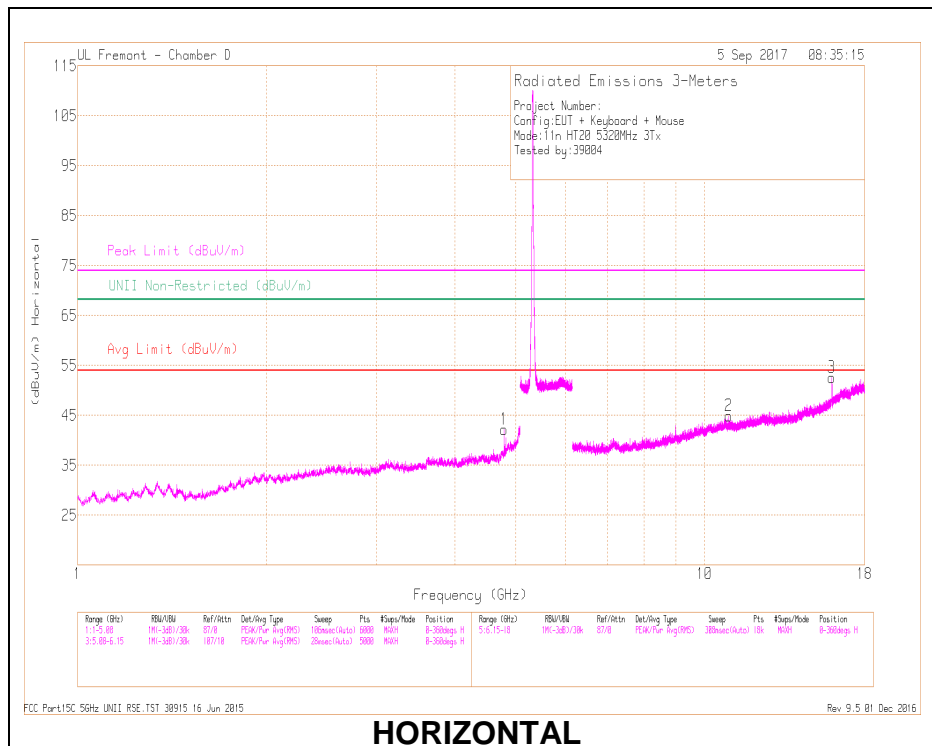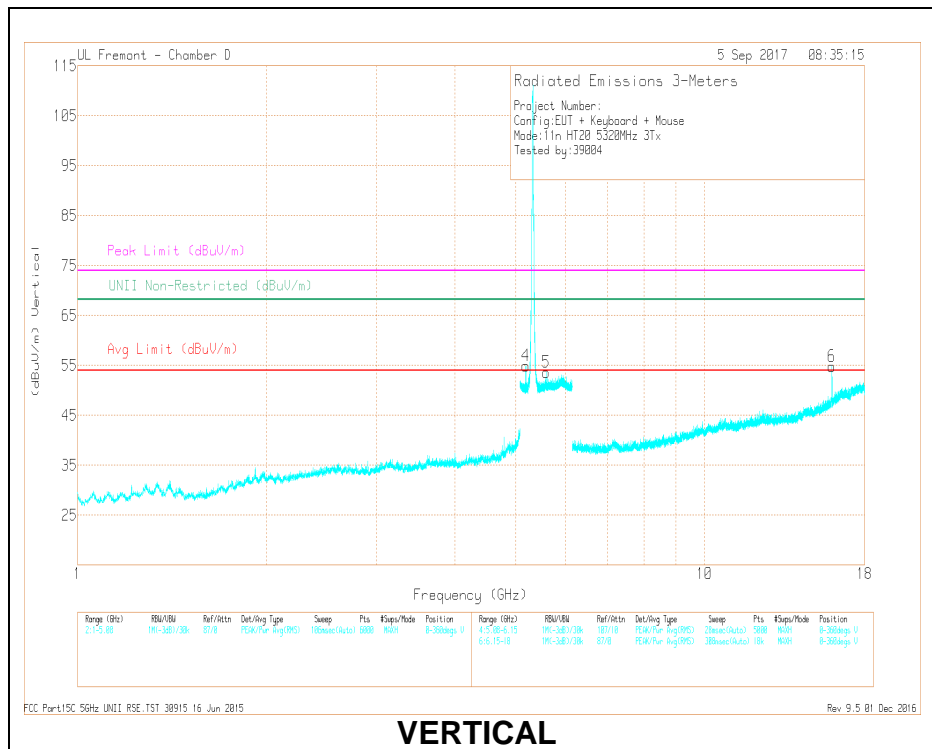

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.788	41.16	PK-U	34	-27.5	0	47.66	-	-	74	-26.34	-	-	248	206	H
	* 4.788	32.55	ADR	34	-27.5	.23	39.28	54	-14.72	-	-	-	-	248	206	H
2	* 10.922	34.06	PK-U	37.8	-21.3	0	50.56	-	-	74	-23.44	-	-	56	291	H
	* 10.922	22.34	ADR	37.8	-21.3	.23	39.07	54	-14.93	-	-	-	-	56	291	H
3	* 15.962	44.6	PK-U	40.8	-20.3	0	65.1	-	-	74	-8.9	-	-	154	309	H
	* 15.959	31.14	ADR	40.8	-20.3	.23	51.87	54	-2.13	-	-	-	-	154	309	H
6	* 15.959	42.8	PK-U	40.8	-20.3	0	63.3	-	-	74	-10.7	-	-	234	101	V
	* 15.958	29.19	ADR	40.8	-20.3	.23	49.92	54	-4.08	-	-	-	-	234	101	V
4	5.187	45.1	PK-U	34.2	-18.3	0	61	-	-	-	-	68.2	-7.2	220	202	V
5	5.586	44.17	PK-U	34.6	-17.6	0	61.17	-	-	-	-	68.2	-7.03	207	188	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 SDM Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

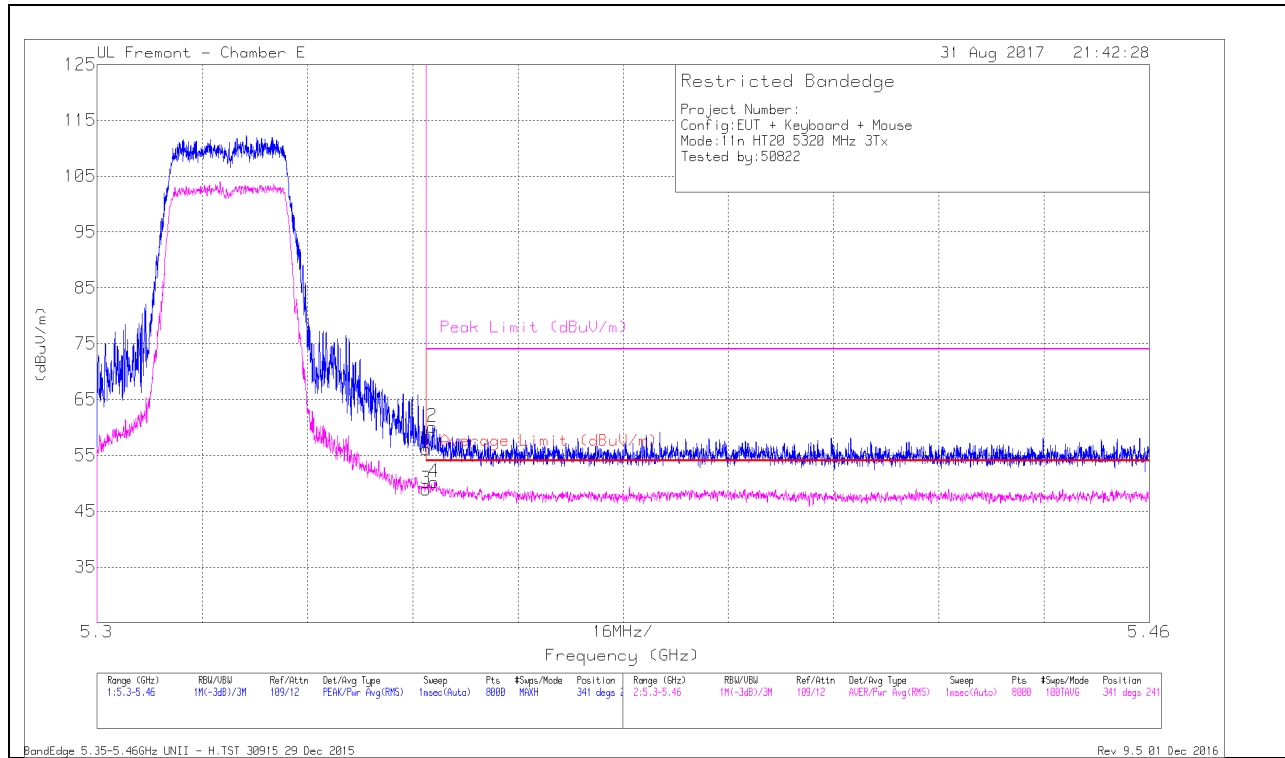


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.05	Pk	35	-18.9	0	56.15	-	-	74	-17.85	341	241	H
3	* 5.35	32.6	RMS	35	-18.9	.26	48.96	54	-5.04	-	-	341	241	H
2	* 5.351	44.04	Pk	35	-18.9	0	60.14	-	-	74	-13.86	341	241	H
4	* 5.351	33.89	RMS	35	-18.9	.26	50.25	54	-3.75	-	-	341	241	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

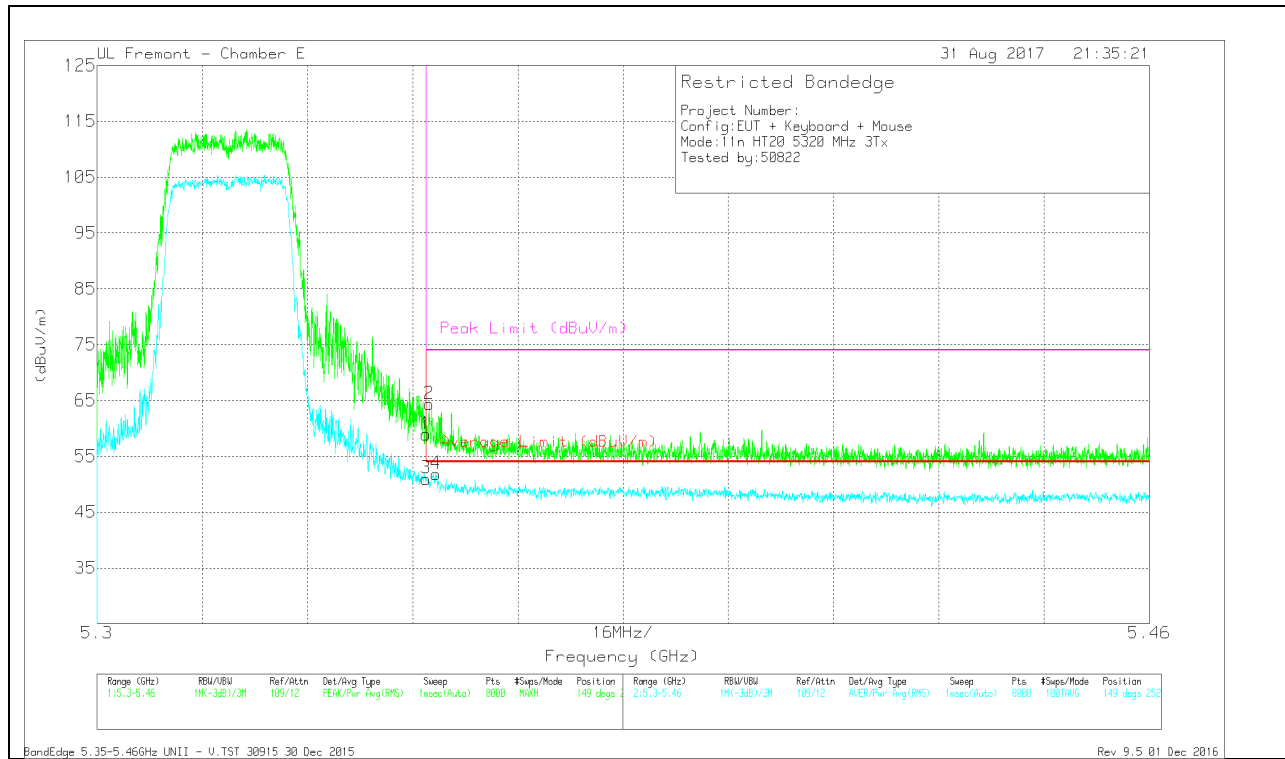


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.85	Pk	35	-18.9	0	58.95	-	-	74	-15.05	149	252	V
2	* 5.35	48.25	Pk	35	-18.9	0	64.35	-	-	74	-9.65	149	252	V
3	* 5.35	34.66	RMS	35	-18.9	.26	51.02	54	-2.98	-	-	149	252	V
4	* 5.352	35.5	RMS	35	-18.9	.26	51.86	54	-2.14	-	-	149	252	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

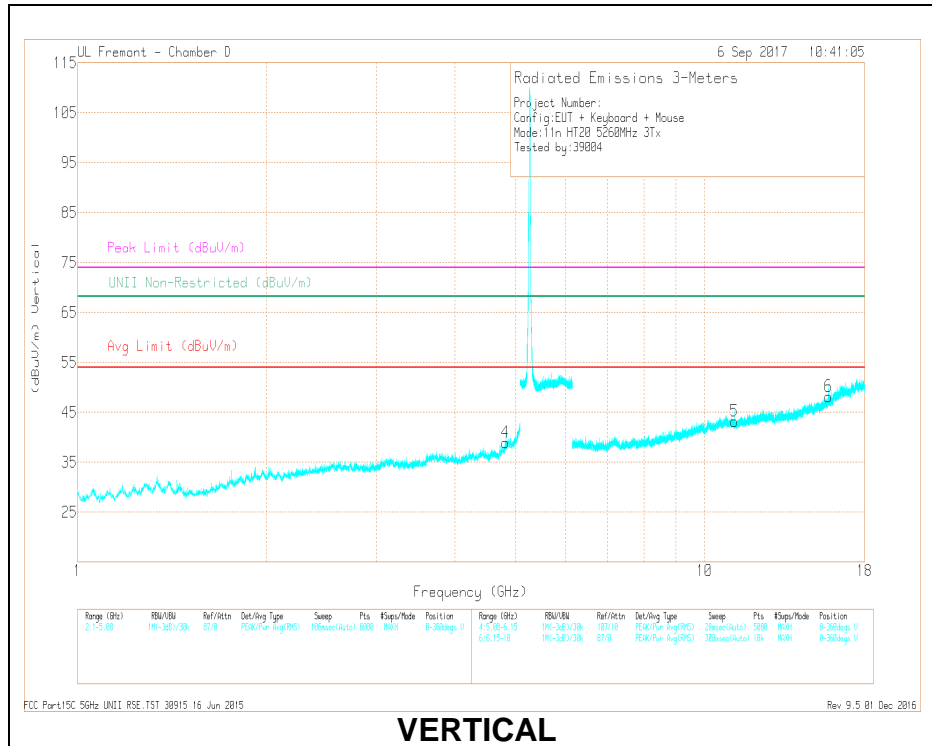

VERTICAL

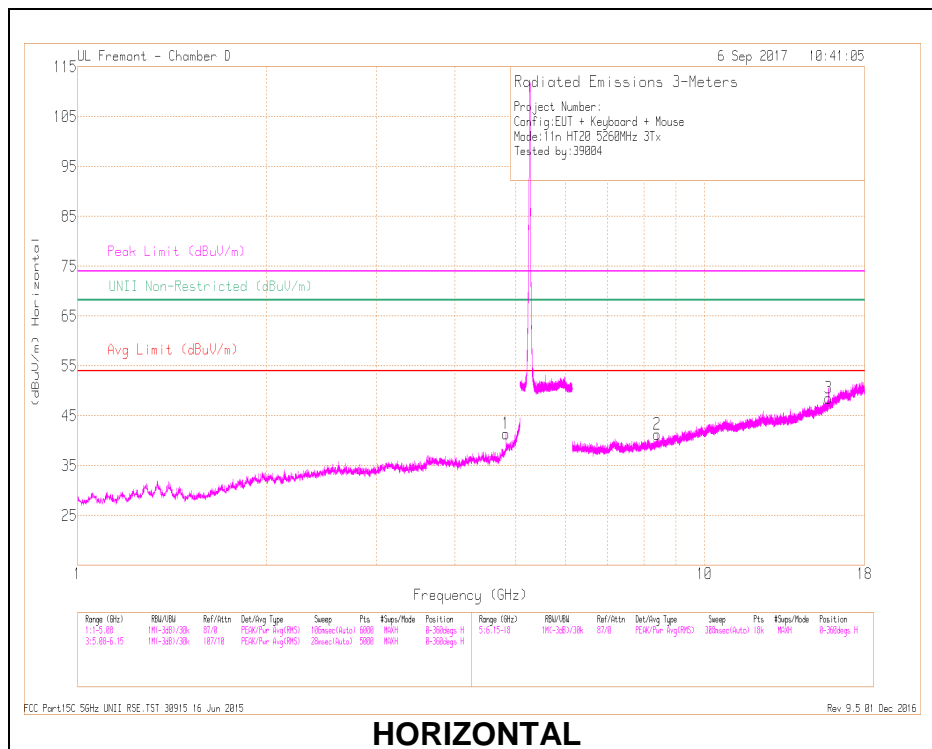

HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.821	41.11	PK-U	34	-27.1	0	48.01	-	-	74	-25.99	-	-	230	271	H
	* 4.822	32.69	ADR	34	-27.1	.26	39.85	54	-14.15	-	-	-	-	230	271	H
4	* 4.818	39.03	PK-U	34	-27.2	0	45.83	-	-	74	-28.17	-	-	37	222	V
	* 4.815	27.17	ADR	34	-27.4	.26	34.03	54	-19.97	-	-	-	-	37	222	V
2	* 8.401	35.64	PK-U	35.7	-23.6	0	47.74	-	-	74	-26.26	-	-	6	241	H
	* 8.402	23.49	ADR	35.7	-23.6	.26	35.85	54	-18.15	-	-	-	-	6	241	H
3	* 15.772	36.78	PK-U	40.5	-20.4	0	56.88	-	-	74	-17.12	-	-	287	210	H
	* 15.772	24.68	ADR	40.5	-20.4	.26	45.04	54	-8.96	-	-	-	-	287	210	H
5	* 11.16	34.35	PK-U	37.8	-21.6	0	50.55	-	-	74	-23.45	-	-	247	172	V
	* 11.157	22.42	ADR	37.8	-21.6	.26	38.88	54	-15.12	-	-	-	-	247	172	V
6	* 15.767	37.25	PK-U	40.5	-20.4	0	57.35	-	-	74	-16.65	-	-	235	130	V
	* 15.767	24.81	ADR	40.5	-20.4	.26	45.17	54	-8.83	-	-	-	-	235	130	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

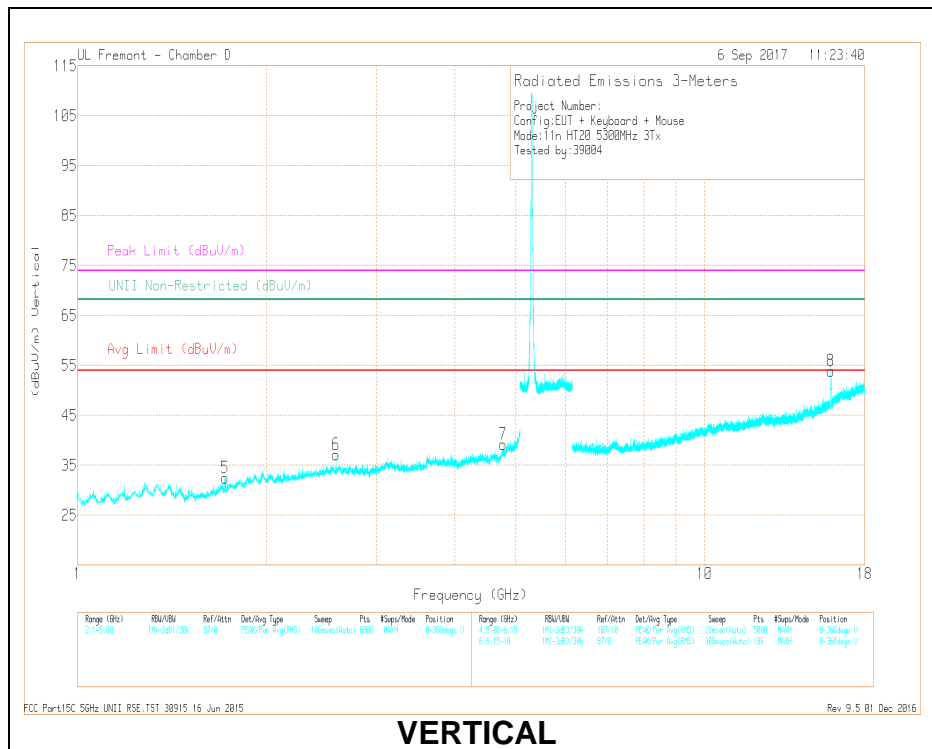

VERTICAL

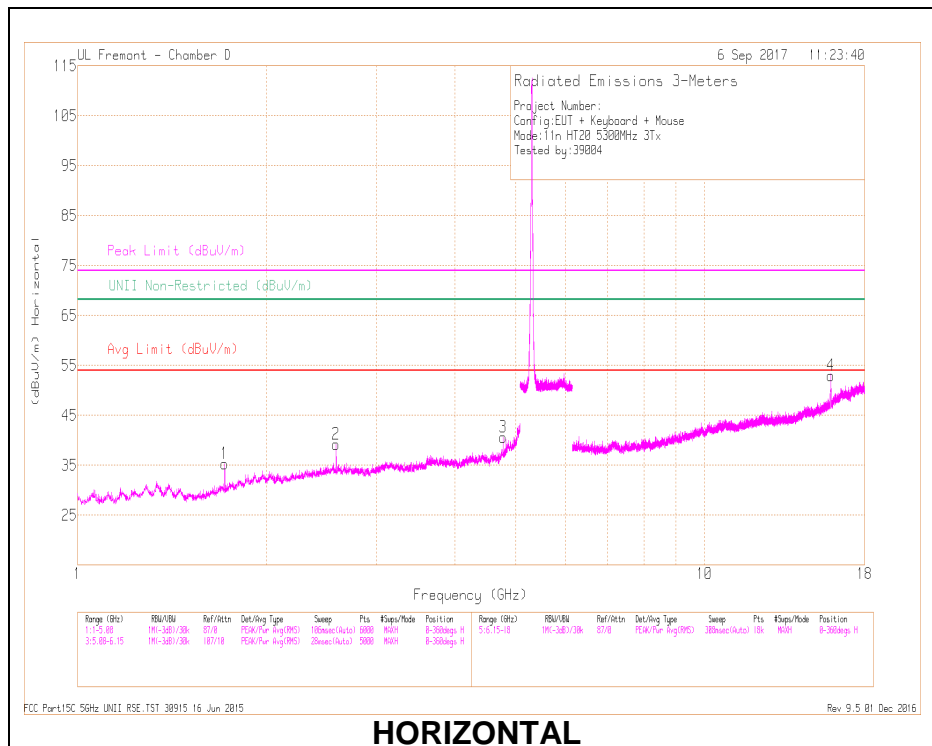

HORIZONTAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.77	40.93	PK-U	33.9	-27.4	0	47.43	-	-	74	-26.57	-	-	219	247	H
	* 4.77	32.85	ADR	33.9	-27.4	.26	39.61	54	-14.39	-	-	-	-	219	247	H
7	* 4.77	41.39	PK-U	33.9	-27.4	0	47.89	-	-	74	-26.11	-	-	57	189	V
	* 4.77	30.37	ADR	33.9	-27.4	.26	37.13	54	-16.87	-	-	-	-	57	189	V
4	* 15.906	40.78	PK-U	40.6	-20.2	0	61.18	-	-	74	-12.82	-	-	210	115	H
	* 15.905	28.4	ADR	40.6	-20.2	.26	49.06	54	-4.94	-	-	-	-	210	115	H
8	* 15.903	43.75	PK-U	40.6	-20.2	0	64.15	-	-	74	-9.85	-	-	251	109	V
	* 15.902	30.73	ADR	40.6	-20.2	.26	51.39	54	-2.61	-	-	-	-	251	109	V
1	1.717	39.73	PK-U	29.4	-31.2	0	37.93	-	-	-	-	68.2	-30.27	272	142	H
5	1.717	39.95	PK-U	29.4	-31.1	0	38.25	-	-	-	-	68.2	-29.95	150	133	V
2	2.584	38.65	PK-U	32.6	-29.6	0	41.65	-	-	-	-	68.2	-26.55	150	133	V
6	2.585	42	PK-U	32.6	-29.7	0	44.9	-	-	-	-	68.2	-23.3	272	142	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

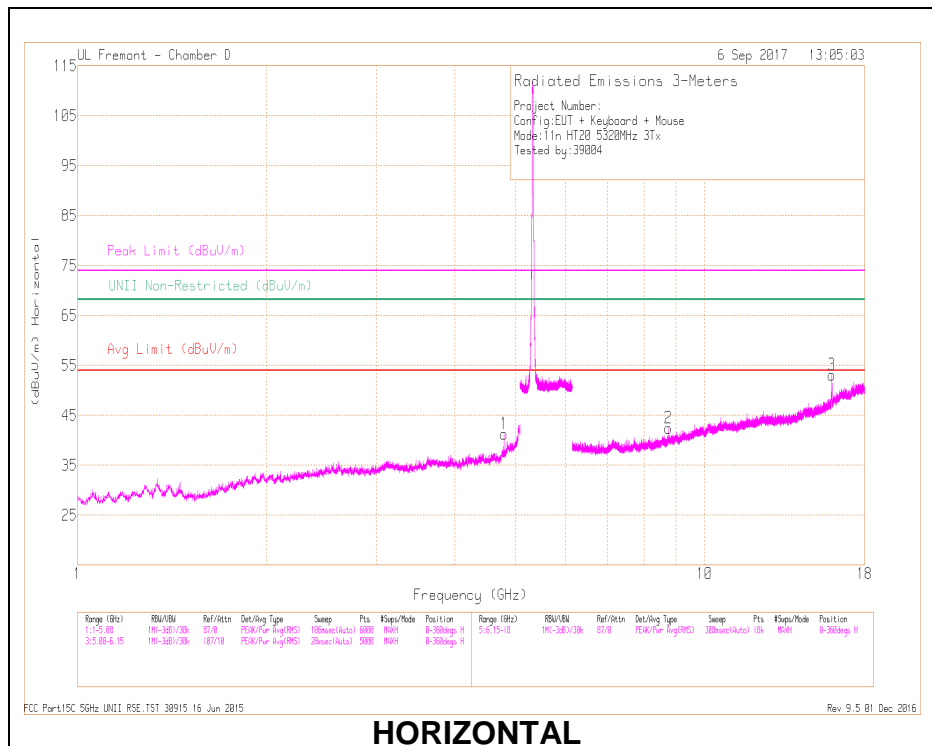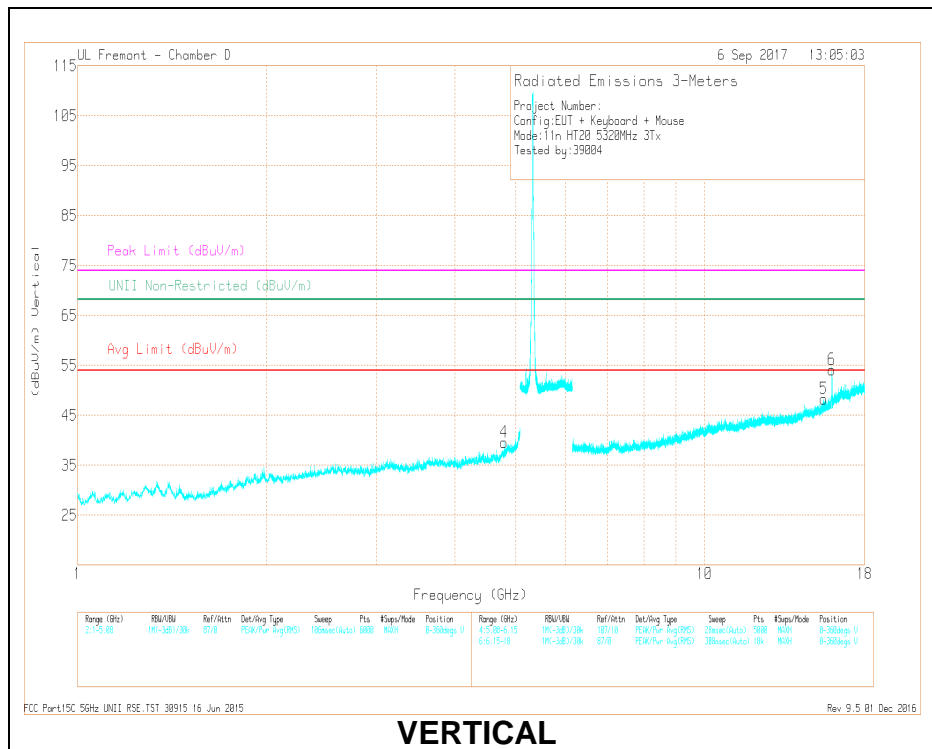

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.788	42.12	PK-U	34	-27.5	0	48.62	-	-	74	-25.38	-	-	230	221	H
	* 4.788	34.61	ADR	34	-27.5	.26	41.37	54	-12.63	-	-	-	-	230	221	H
4	* 4.788	40.84	PK-U	34	-27.5	0	47.34	-	-	74	-26.66	-	-	269	352	V
	* 4.788	32.17	ADR	34	-27.5	.26	38.93	54	-15.07	-	-	-	-	269	352	V
3	* 15.961	41.65	PK-U	40.8	-20.3	0	62.15	-	-	74	-11.85	-	-	215	101	H
	* 15.959	29.09	ADR	40.8	-20.3	.26	49.85	54	-4.15	-	-	-	-	215	101	H
5	* 15.963	42.65	PK-U	40.8	-20.3	0	63.15	-	-	74	-10.85	-	-	229	102	V
	* 15.961	30.27	ADR	40.8	-20.3	.26	51.03	54	-2.97	-	-	-	-	229	102	V
6	* 15.505	35.07	PK-U	40.3	-20.2	0	55.17	-	-	74	-18.83	-	-	352	164	V
	* 15.505	22.69	ADR	40.3	-20.2	.26	43.05	54	-10.95	-	-	-	-	352	164	V
2	8.76	34.96	PK-U	35.8	-22.6	0	48.16	-	-	-	-	68.2	-20.04	192	163	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 BF Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

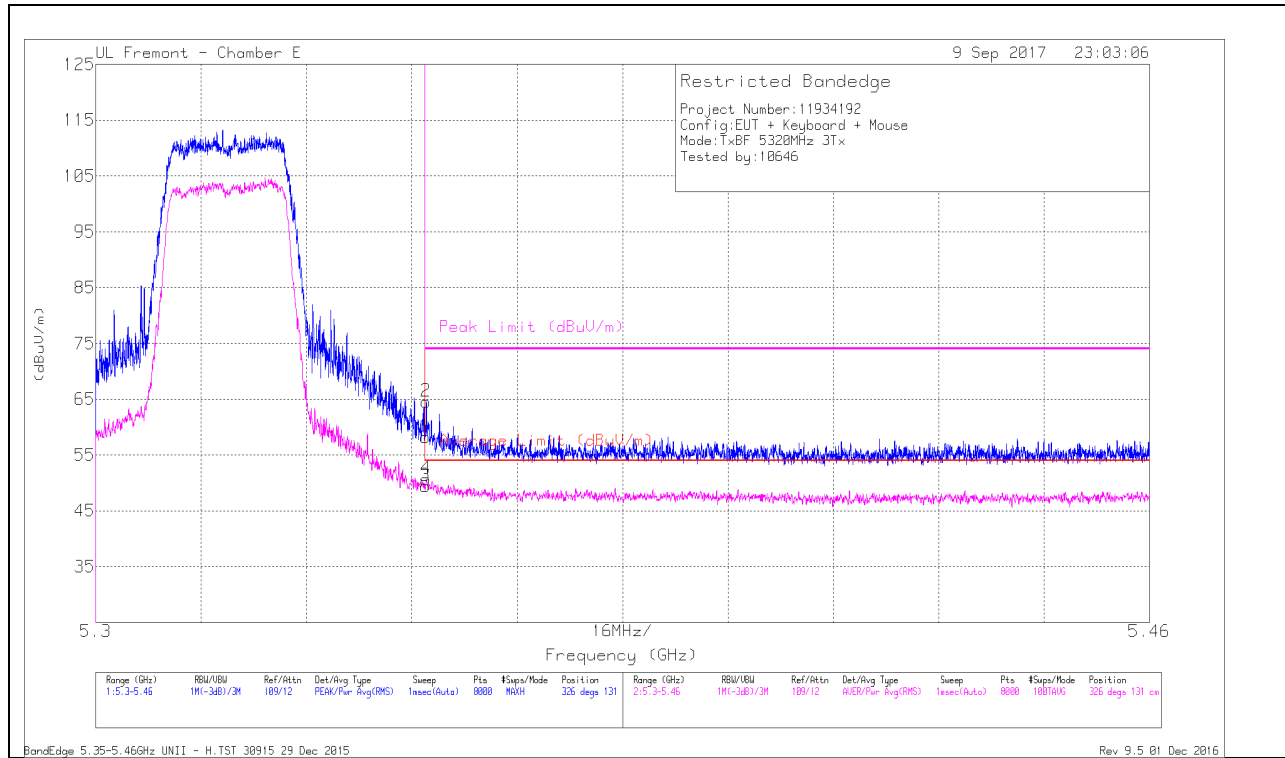


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.09	Pk	35	-18.9	0	58.19	-	-	74	-15.81	326	131	H
2	* 5.35	48.44	Pk	35	-18.9	0	64.54	-	-	74	-9.46	326	131	H
3	* 5.35	33.06	RMS	35	-18.9	.12	49.43	54	-4.72	-	-	326	131	H
4	* 5.35	34.26	RMS	35	-18.9	.12	50.63	54	-3.52	-	-	326	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

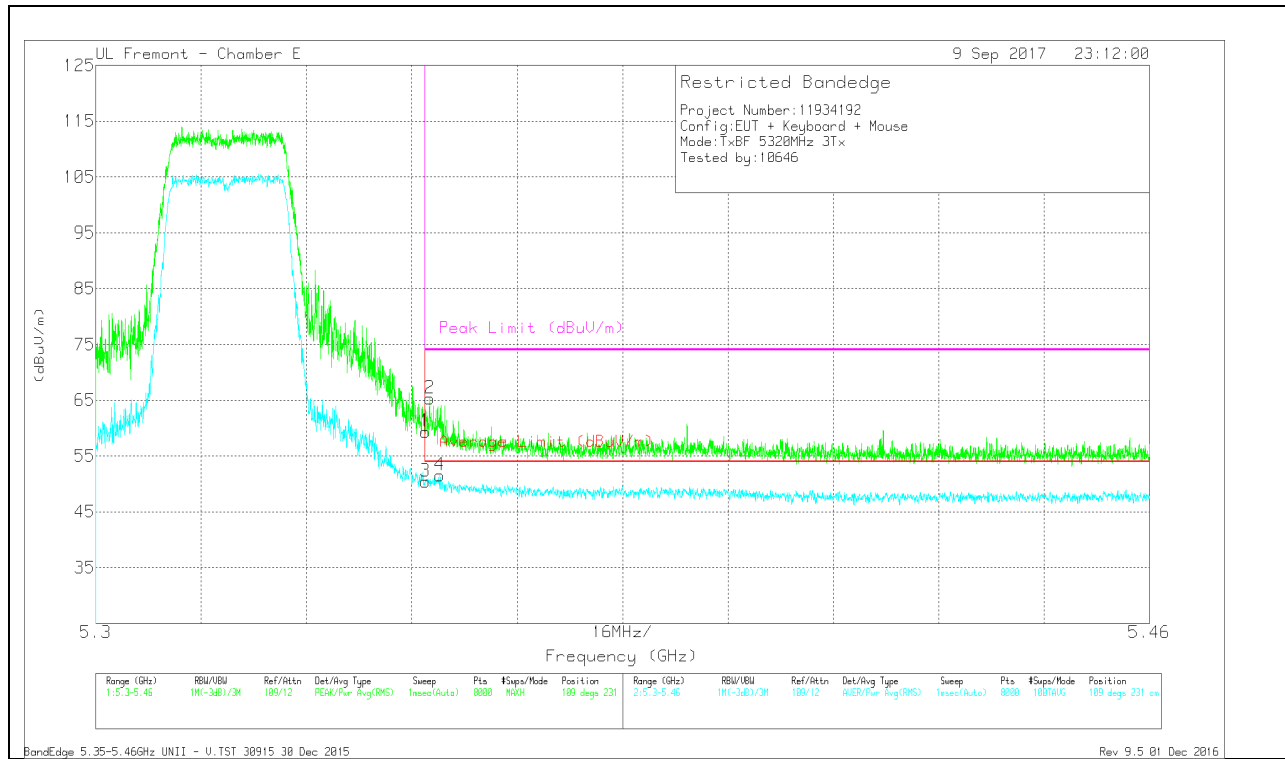


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.23	Pk	35	-18.9	0	59.33	-	-	74	-14.67	109	231	V
2	* 5.351	49.25	Pk	35	-18.9	0	65.35	-	-	74	-8.65	109	231	V
3	* 5.35	34.01	RMS	35	-18.9	.12	50.38	54	-3.77	-	-	109	231	V
4	* 5.352	35.21	RMS	35	-18.9	.12	51.58	54	-2.57	-	-	109	231	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

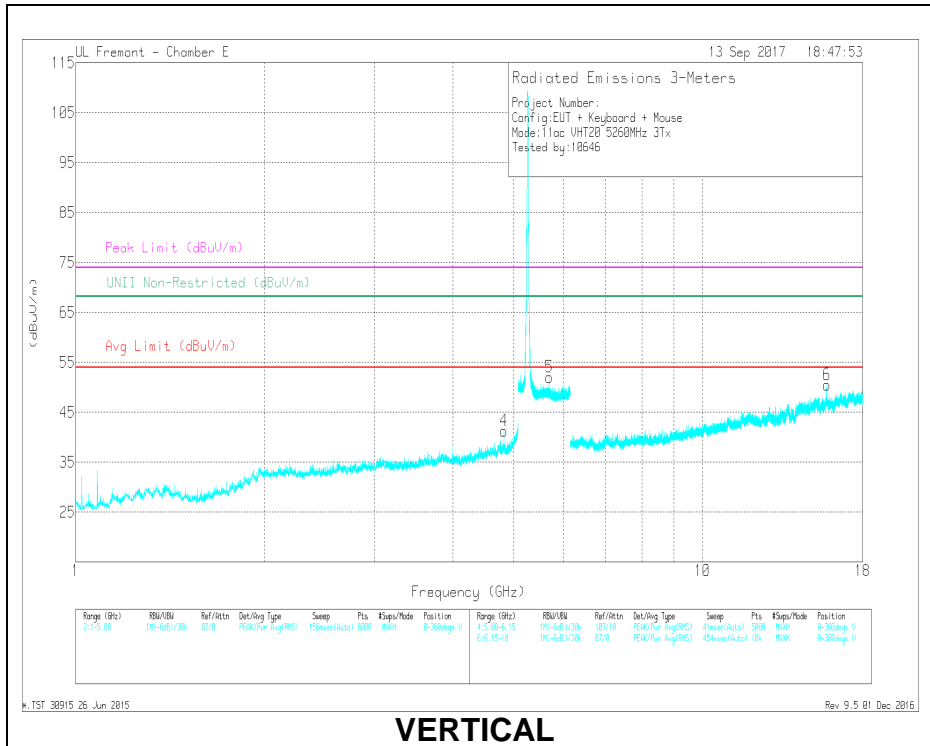

VERTICAL

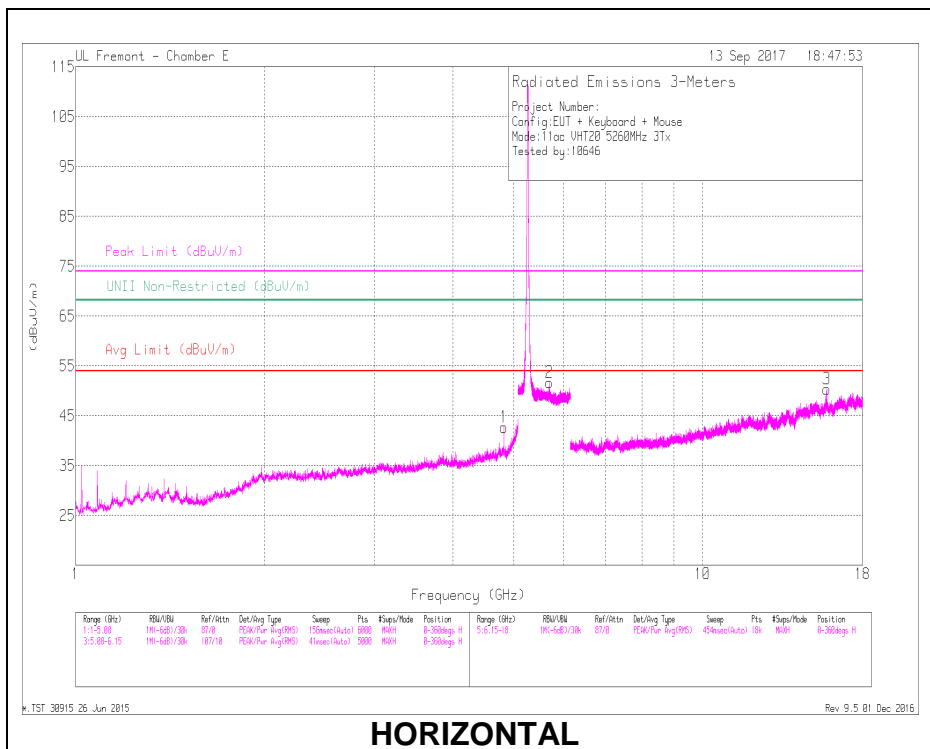

HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.821	42.38	PK-U	34.4	-28.5	0	48.28	-	-	74	-25.72	-	-	240	114	H
	* 4.822	34.27	ADR	34.4	-28.5	.12	40.59	54	-13.71	-	-	-	-	240	114	H
4	* 4.822	42.21	PK-U	34.4	-28.5	0	48.11	-	-	74	-25.89	-	-	294	109	V
	* 4.822	33.09	ADR	34.4	-28.5	.12	39.41	54	-14.89	-	-	-	-	294	109	V
3	* 15.779	40.89	PK-U	41.7	-22.9	0	59.69	-	-	74	-14.31	-	-	123	107	H
	* 15.779	28.55	ADR	41.7	-22.9	.12	47.77	54	-6.53	-	-	-	-	123	107	H
6	* 15.782	40.4	PK-U	41.7	-22.8	0	59.3	-	-	74	-14.7	-	-	152	140	V
	* 15.783	28.24	ADR	41.7	-22.8	.12	47.56	54	-6.74	-	-	-	-	152	140	V
2	5.698	42.07	PK-U	35.1	-19	0	58.17	-	-	-	-	68.2	-10.03	104	117	V
5	5.699	41.56	PK-U	35.1	-19	0	57.66	-	-	-	-	68.2	-10.54	272	331	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

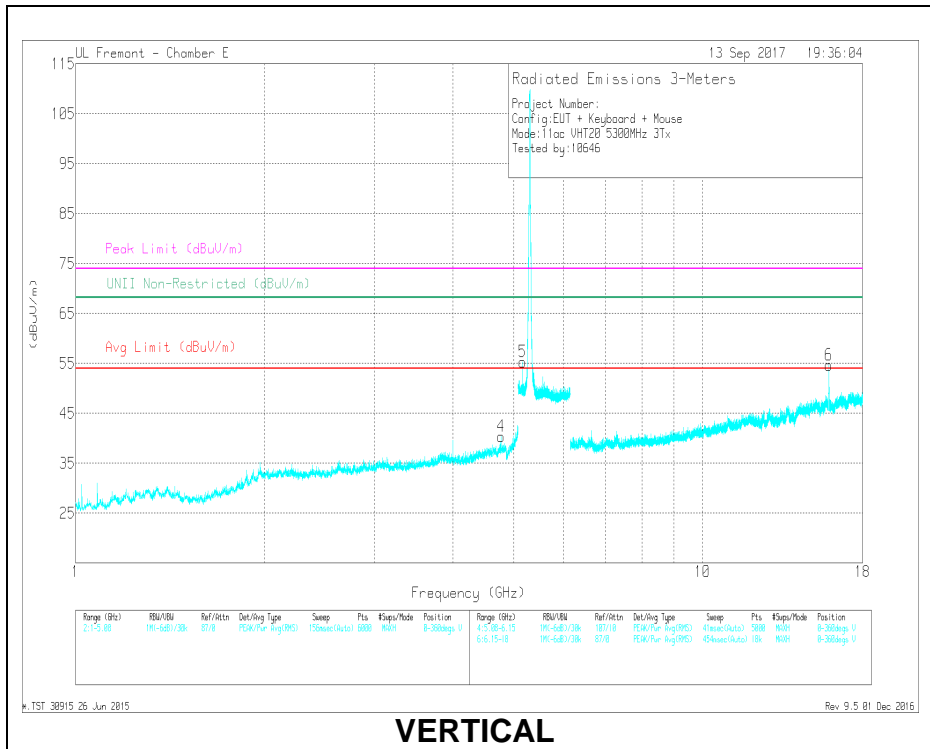

VERTICAL

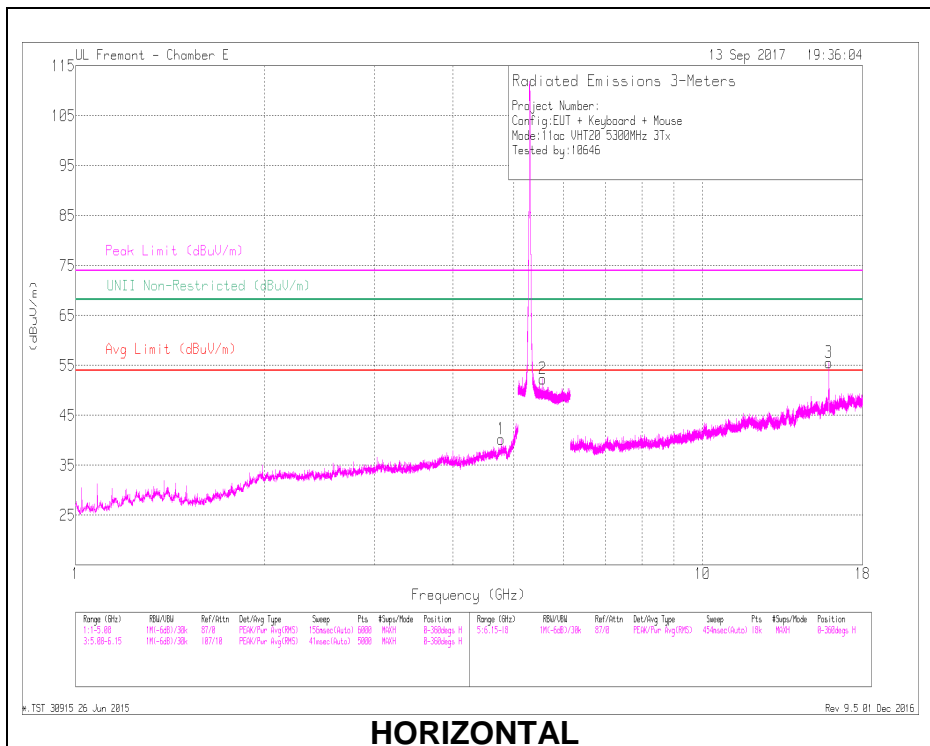

HORIZONTAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.77	42.49	PK-U	34.4	-29.1	0	47.79	-	-	74	-26.21	-	-	153	249	H
	* 4.77	34.77	ADR	34.4	-29.1	.12	40.19	54	-13.81	-	-	-	-	153	249	H
4	* 4.77	40.57	PK-U	34.4	-29.1	0	45.87	-	-	74	-28.13	-	-	15	204	V
	* 4.77	31.3	ADR	34.4	-29.1	.12	36.72	54	-17.28	-	-	-	-	15	204	V
3	* 15.902	45	PK-U	41.4	-23.1	0	63.3	-	-	74	-10.7	-	-	129	132	H
	* 15.902	31.94	ADR	41.4	-23.1	.12	50.36	54	-3.64	-	-	-	-	129	132	H
6	* 15.897	44.78	PK-U	41.4	-23.1	0	63.08	-	-	74	-10.92	-	-	155	124	V
	* 15.9	32.78	ADR	41.4	-23.1	.12	51.2	54	-2.8	-	-	-	-	155	124	V
5	5.168	44.02	PK-U	34.8	-18.4	0	60.42	-	-	-	-	68.2	-7.78	175	400	V
2	5.565	41.71	PK-U	35	-19.1	0	57.61	-	-	-	-	68.2	-10.59	285	280	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

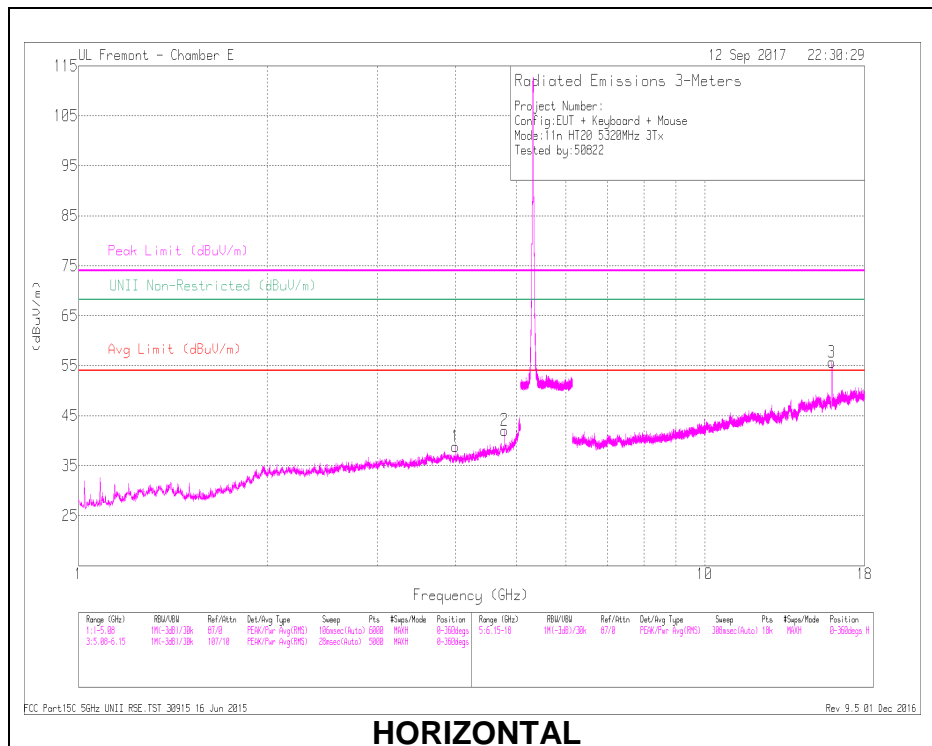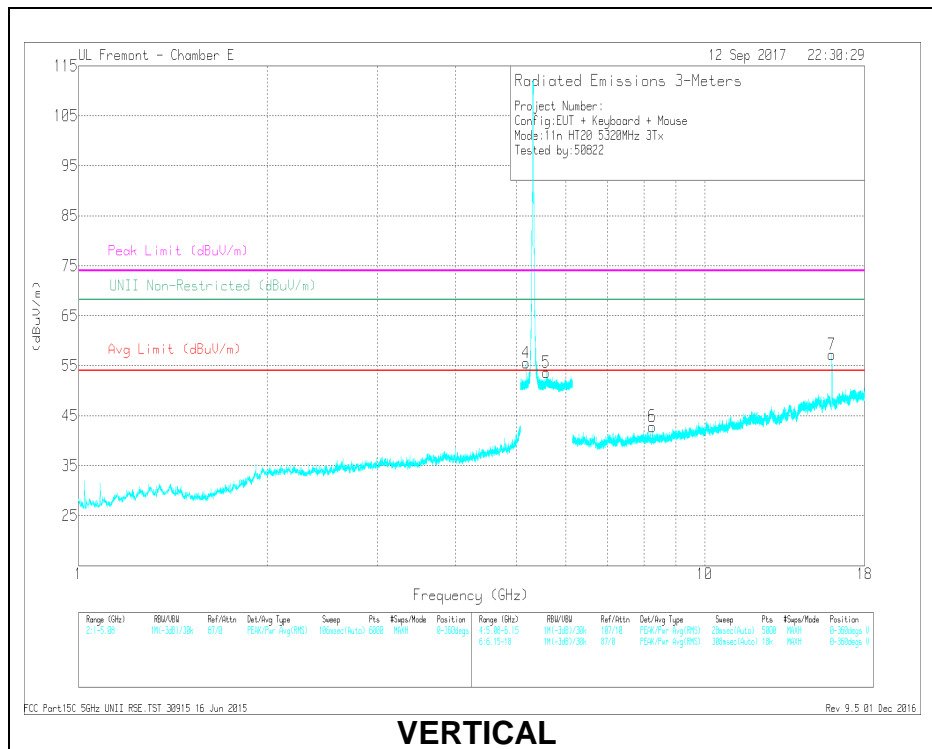

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4	41.23	PK-U	33.7	-29.5	0	45.43	-	-	74	-28.57	-	-	89	103	H
	* 4	31.95	ADR	33.7	-29.5	.12	36.27	54	-17.73	-	-	-	-	89	103	H
2	* 4.788	44.3	PK-U	34.4	-29.1	0	49.6	-	-	74	-24.4	-	-	138	207	H
	* 4.788	36.35	ADR	34.4	-29.1	.12	41.77	54	-12.23	-	-	-	-	138	207	H
3	* 15.962	39.71	PK-U	41.6	-22.5	0	58.81	-	-	74	-15.19	-	-	134	372	H
	* 15.962	28.13	ADR	41.6	-22.5	.12	47.35	54	-6.65	-	-	-	-	134	372	H
6	* 8.245	38.53	PK-U	36.5	-26.5	0	48.53	-	-	74	-25.47	-	-	33	400	V
	* 8.247	26.67	ADR	36.5	-26.5	.12	36.79	54	-17.21	-	-	-	-	33	400	V
7	* 15.965	38.52	PK-U	41.6	-22.3	0	57.82	-	-	74	-16.18	-	-	152	243	V
	* 15.962	27.02	ADR	41.6	-22.5	.12	46.24	54	-7.76	-	-	-	-	152	243	V
4	5.187	48.2	PK-U	34.8	-19.8	0	63.2	-	-	-	-	68.2	-5	164	243	V
5	5.586	45.58	PK-U	35	-19.6	0	60.98	-	-	-	-	68.2	-7.22	130	329	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

5.1.5. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX Antenna WF4

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

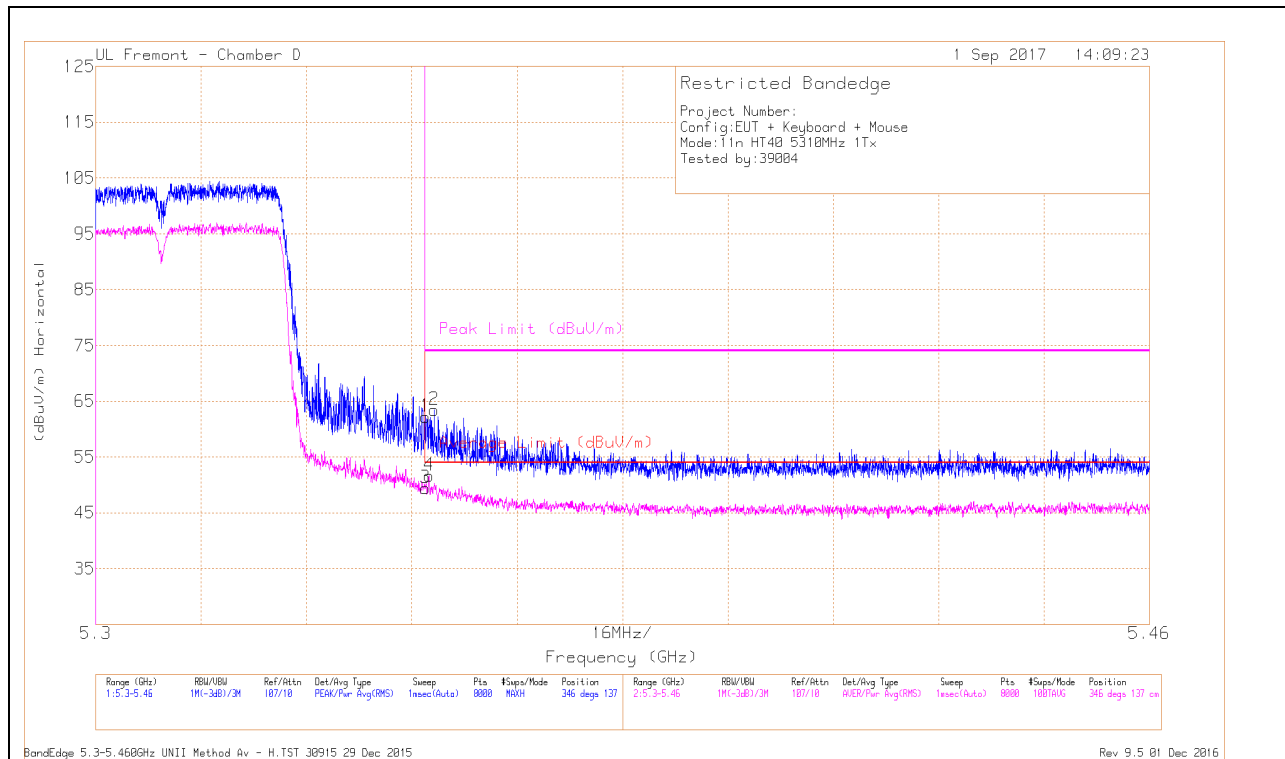

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	46.3	Pk	34.3	-18.4	0	62.2	-	-	74	-11.8	346	137	H
2	* 5.351	47.57	Pk	34.3	-18.4	0	63.47	-	-	74	-10.53	346	137	H
3	* 5.35	33.43	RMS	34.3	-18.4	.09	49.42	54	-4.58	-	-	346	137	H
4	* 5.351	35.67	RMS	34.3	-18.4	.09	51.66	54	-2.34	-	-	346	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

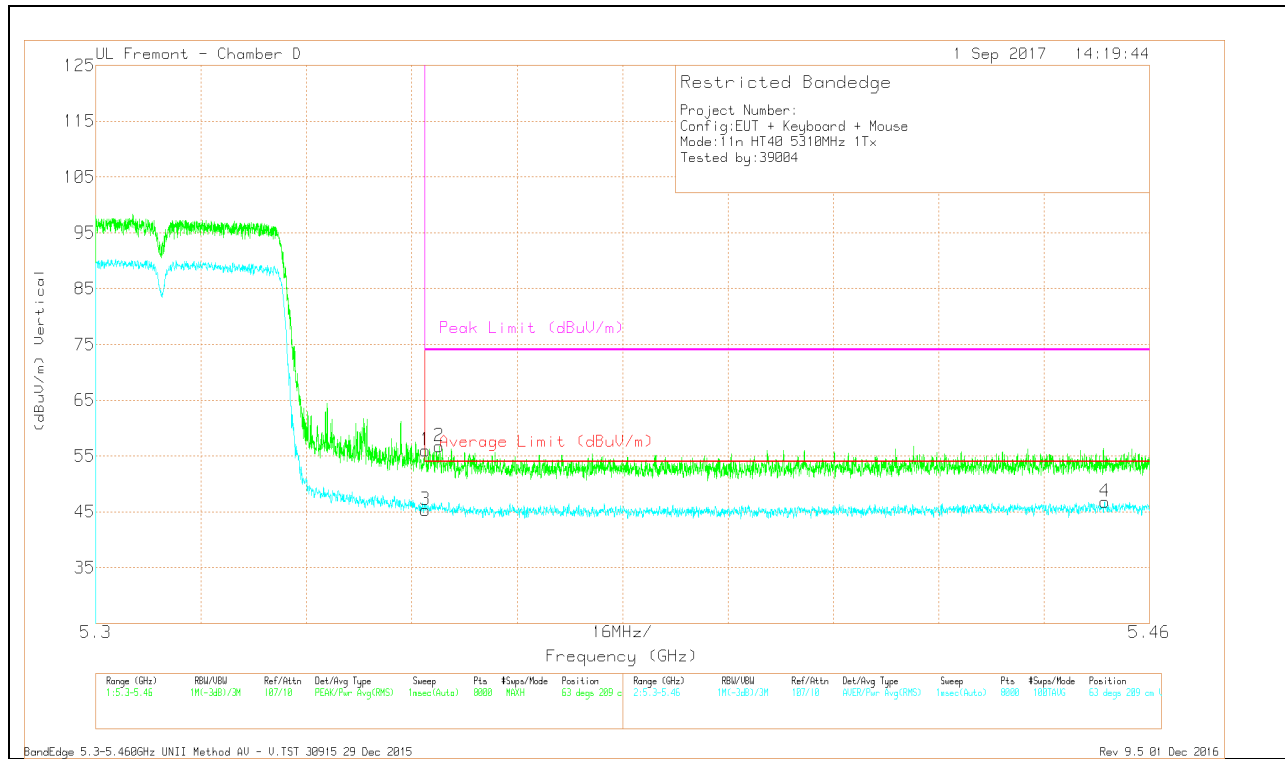


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.09	Pk	34.3	-18.4	0	55.99	-	-	74	-18.01	63	209	V
2	* 5.352	40.84	Pk	34.3	-18.4	0	56.74	-	-	74	-17.26	63	209	V
3	* 5.35	29.32	RMS	34.3	-18.4	.09	45.31	54	-8.69	-	-	63	209	V
4	* 5.453	30.35	RMS	34.4	-18	.09	46.84	54	-7.16	-	-	63	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna WF3

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

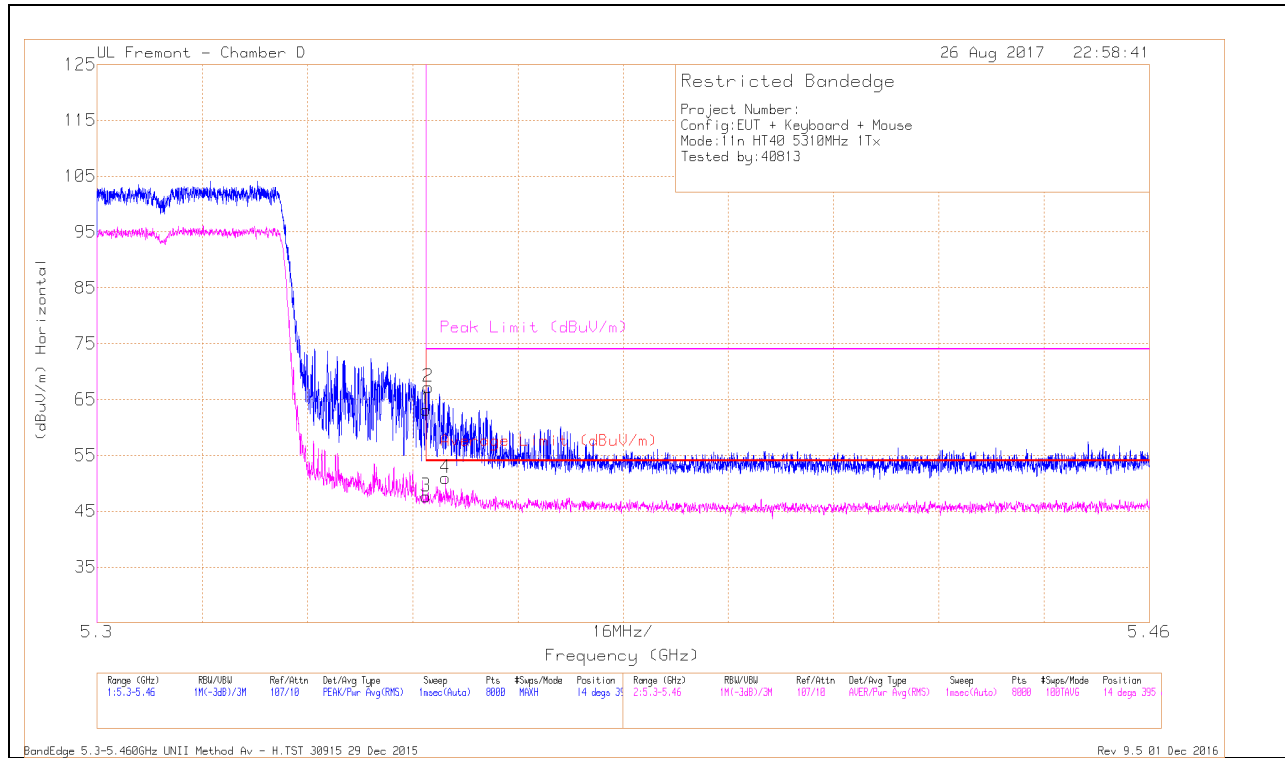


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	47.31	Pk	34.3	-18.4	0	63.21	-	-	74	-10.79	14	395	H
2	* 5.35	51.34	Pk	34.3	-18.4	0	67.24	-	-	74	-6.76	14	395	H
3	* 5.35	31.67	RMS	34.3	-18.4	.09	47.66	54	-6.34	-	-	14	395	H
4	* 5.353	34.97	RMS	34.3	-18.4	.09	50.96	54	-3.04	-	-	14	395	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

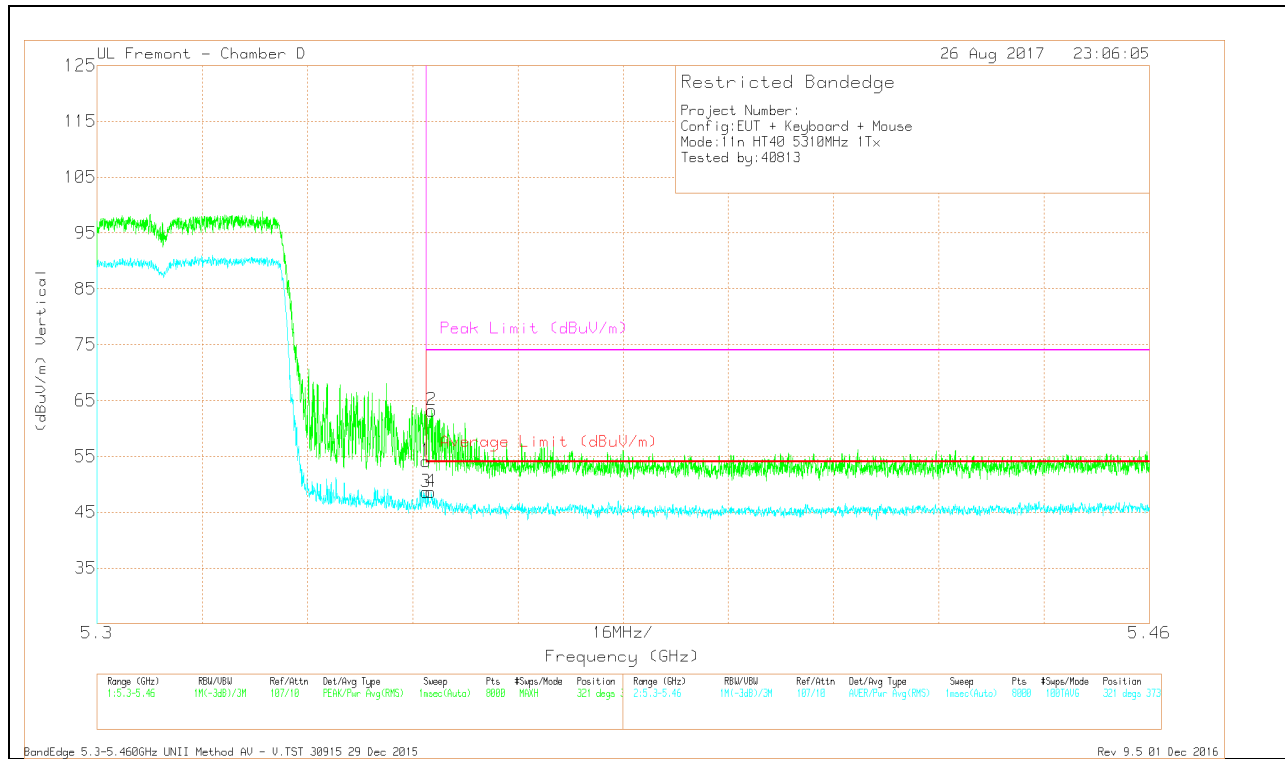


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.23	Pk	34.3	-18.4	0	54.13	-	-	74	-19.87	321	373	V
2	* 5.351	47.33	Pk	34.3	-18.4	0	63.23	-	-	74	-10.77	321	373	V
3	* 5.35	32.62	RMS	34.3	-18.4	.09	48.61	54	-5.39	-	-	321	373	V
4	* 5.351	32.6	RMS	34.3	-18.4	.09	48.59	54	-5.41	-	-	321	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna WF2

BANEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

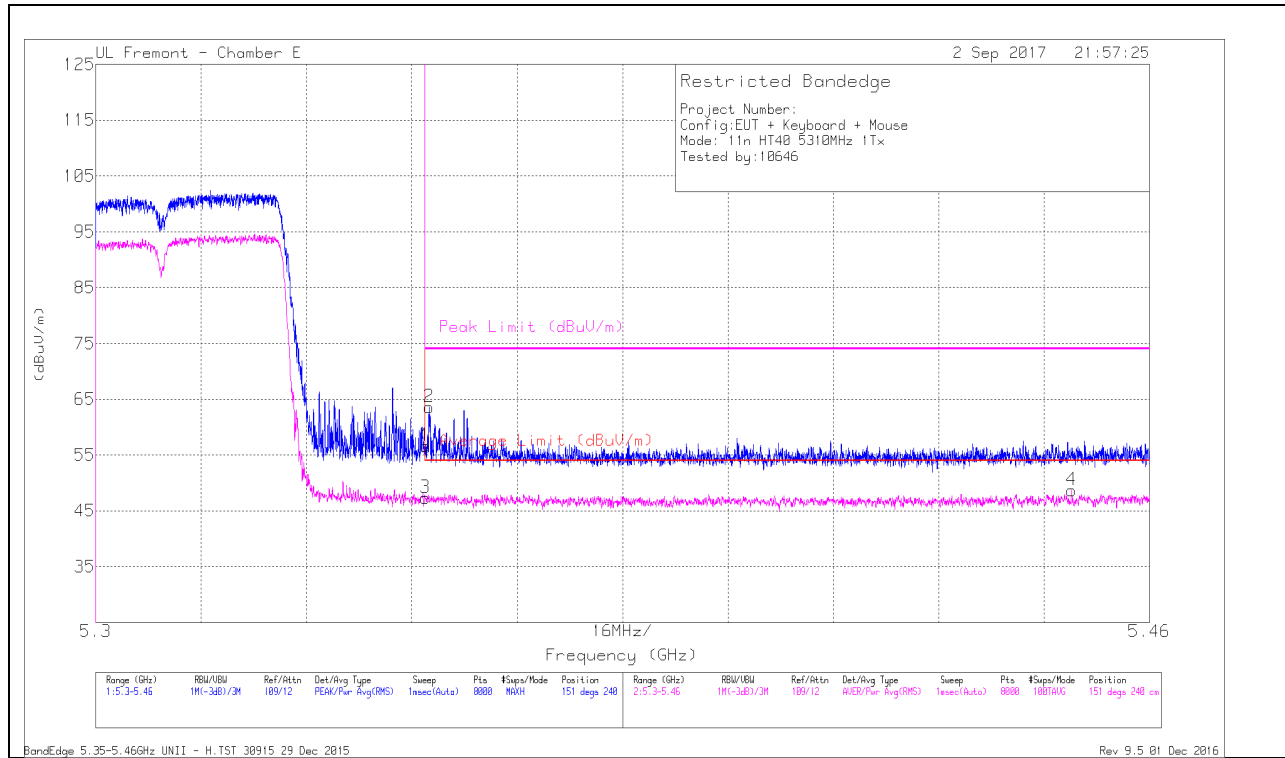


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.53	Pk	35	-18.9	0	56.63	-	-	74	-17.37	151	240	H
2	* 5.351	47.47	Pk	35	-18.9	0	63.57	-	-	74	-10.43	151	240	H
3	* 5.35	31.15	RMS	35	-18.9	.09	47.34	54	-6.66	-	-	151	240	H
4	* 5.448	32.36	RMS	35.1	-18.9	.09	48.65	54	-5.35	-	-	151	240	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

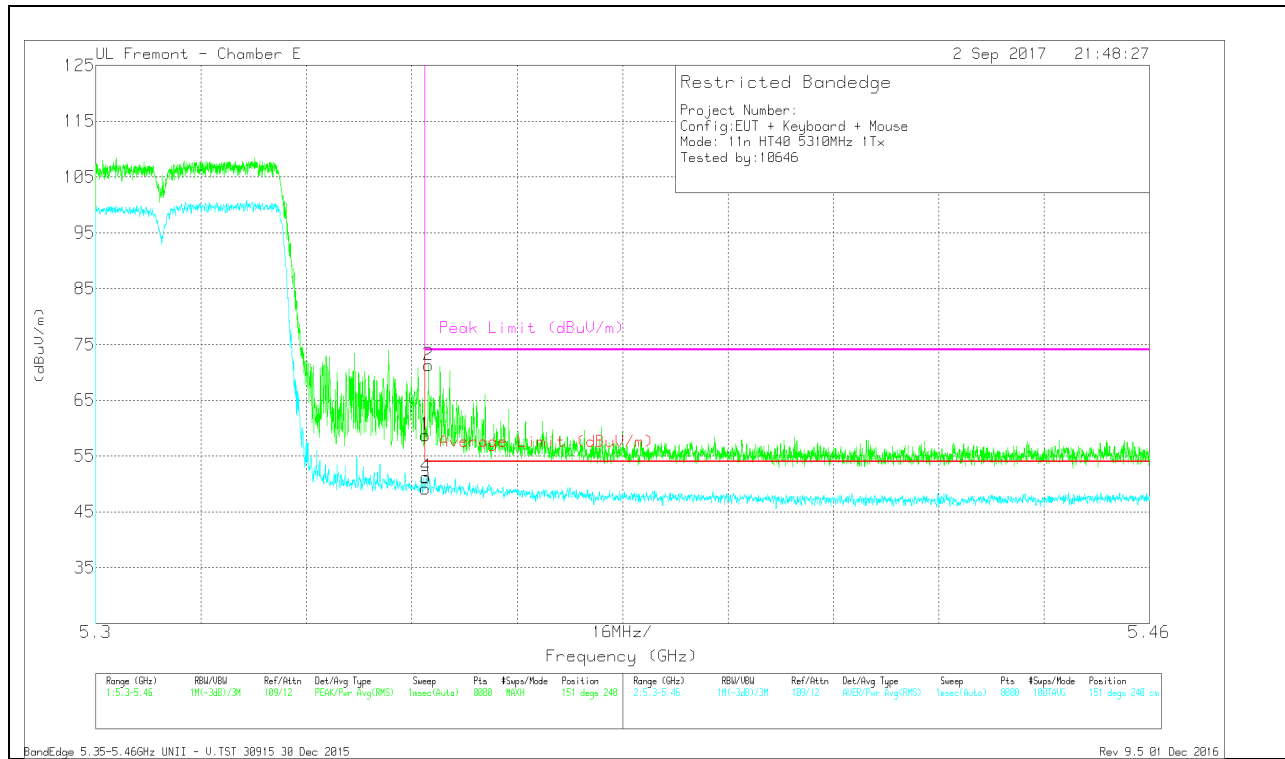


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.67	Pk	35	-18.9	0	58.77	-	-	74	-15.23	151	240	V
2	* 5.351	55.13	Pk	35	-18.9	0	71.23	-	-	74	-2.77	151	240	V
3	* 5.35	32.96	RMS	35	-18.9	.09	49.15	54	-4.85	-	-	151	240	V
4	* 5.35	35.13	RMS	35	-18.9	.09	51.32	54	-2.68	-	-	151	240	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF3 CDD Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

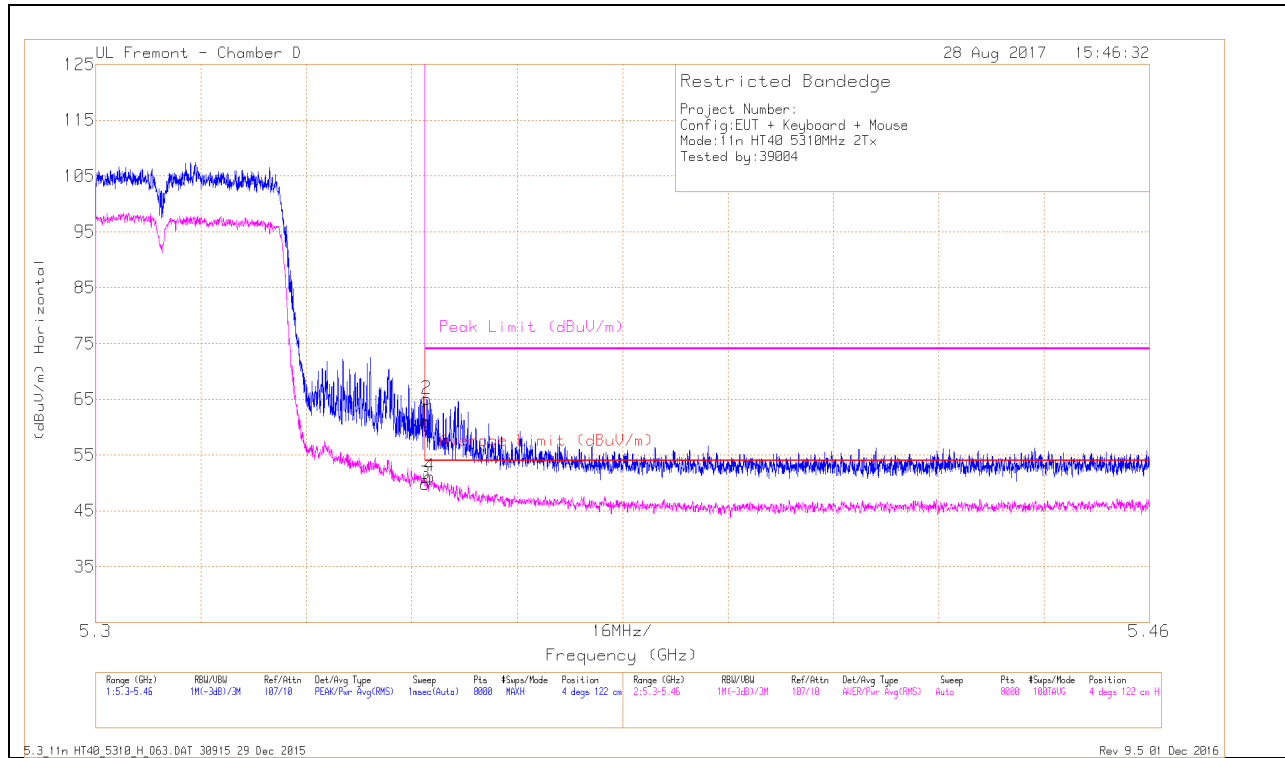


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.05	Pk	34.3	-18.4	0	60.95	-	-	74	-13.05	4	122	H
2	* 5.35	49.17	Pk	34.3	-18.4	0	65.07	-	-	74	-8.93	4	122	H
3	* 5.35	33.81	RMS	34.3	-18.4	.18	49.89	54	-4.11	-	-	4	122	H
4	* 5.351	35.14	RMS	34.3	-18.4	.18	51.22	54	-2.78	-	-	4	122	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

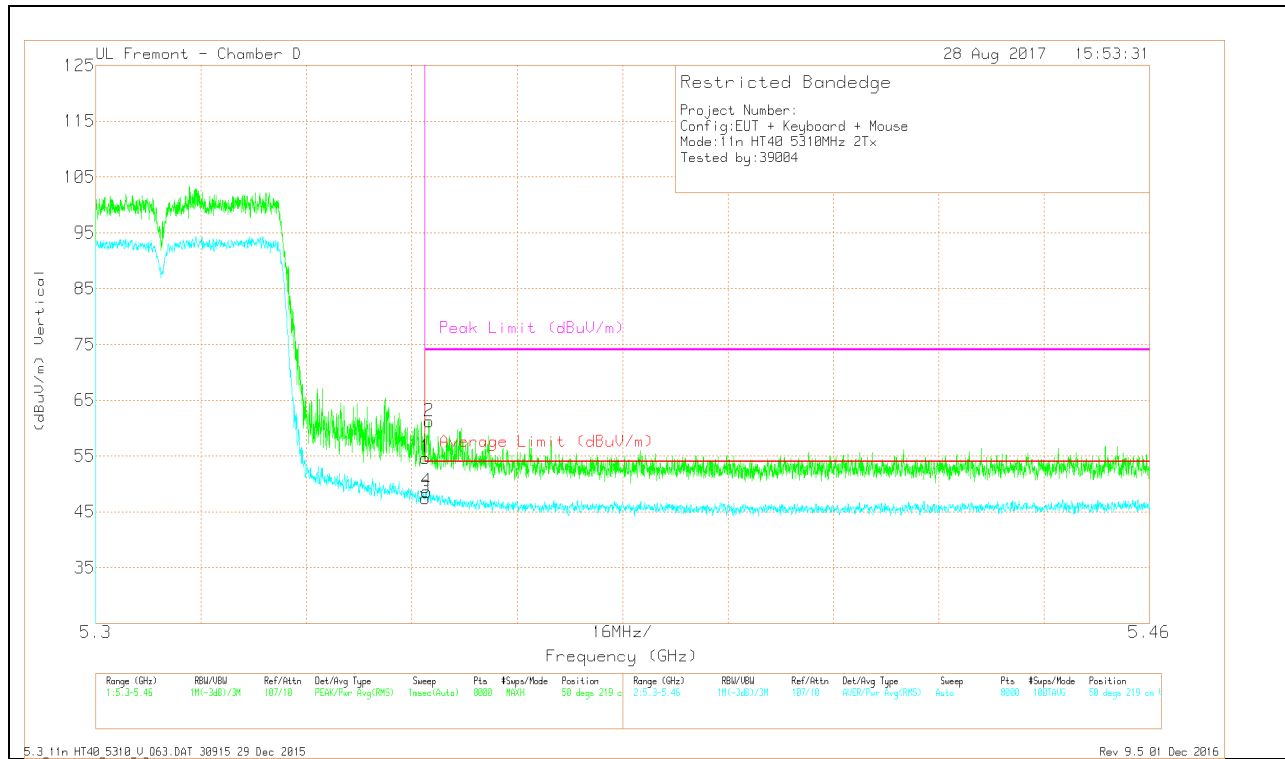


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.8	Pk	34.3	-18.4	0	54.7	-	-	74	-19.3	50	219	V
2	* 5.351	45.36	Pk	34.3	-18.4	0	61.26	-	-	74	-12.74	50	219	V
3	* 5.35	31.4	RMS	34.3	-18.4	.18	47.48	54	-6.52	-	-	50	219	V
4	* 5.35	32.63	RMS	34.3	-18.4	.18	48.71	54	-5.29	-	-	50	219	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF3 SDM Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

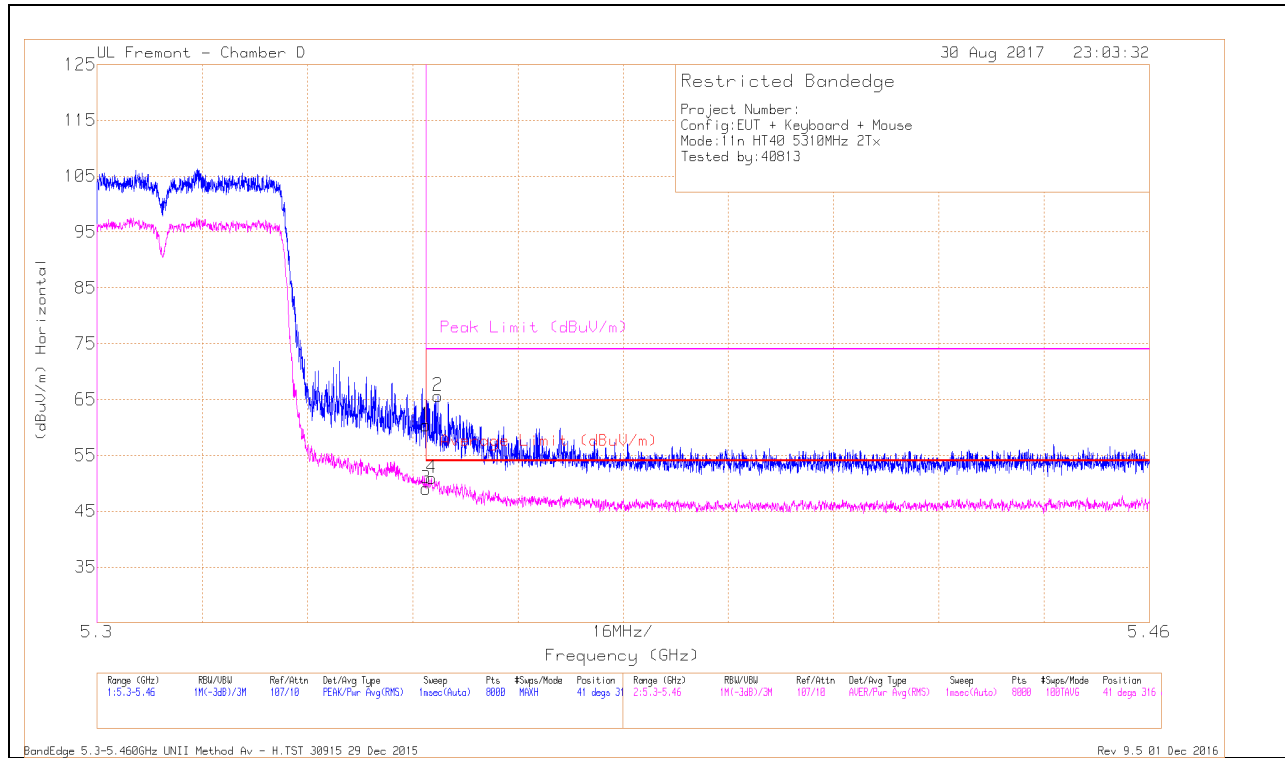


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.52	Pk	34.3	-18.4	0	60.42	-	-	74	-13.58	41	316	H
2	* 5.352	49.75	Pk	34.3	-18.4	0	65.65	-	-	74	-8.35	41	316	H
3	* 5.35	32.98	RMS	34.3	-18.4	.29	49.17	54	-4.83	-	-	41	316	H
4	* 5.351	34.85	RMS	34.3	-18.4	.29	51.04	54	-2.96	-	-	41	316	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

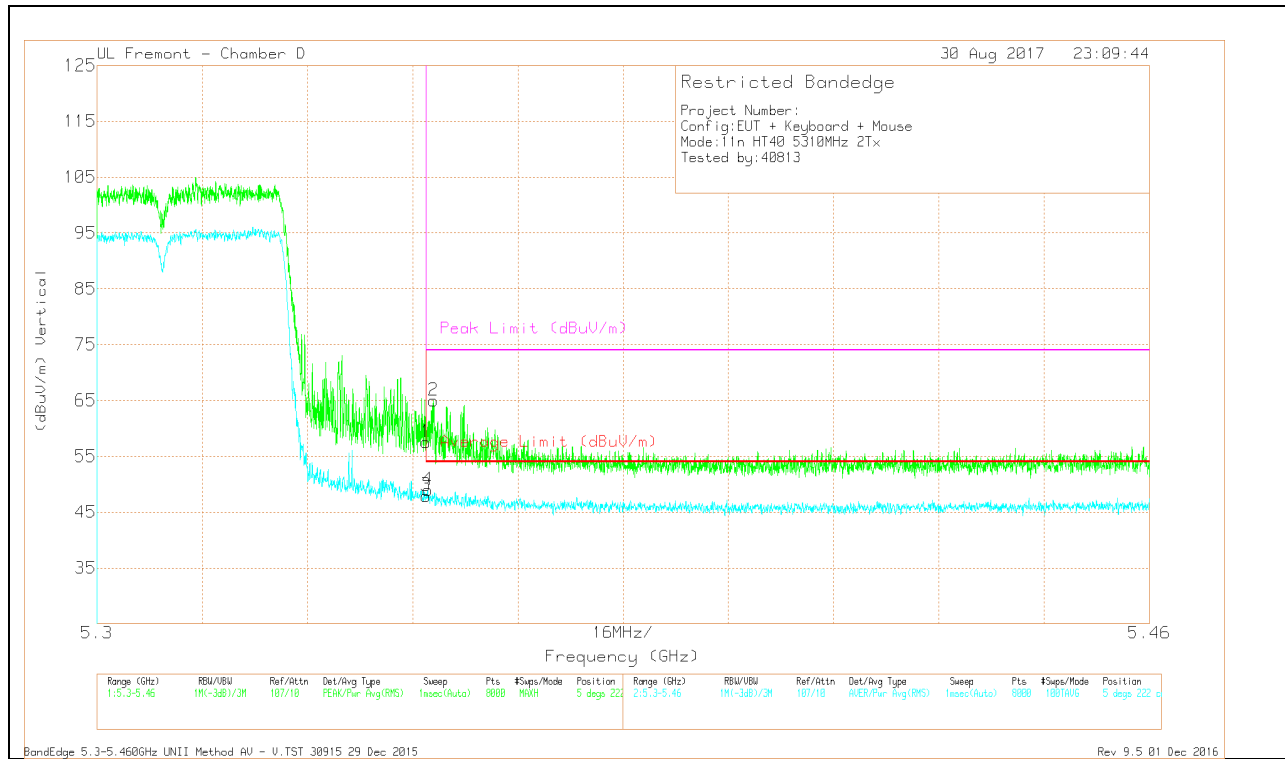


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.63	Pk	34.3	-18.4	0	57.53	-	-	74	-16.47	5	222	V
2	* 5.351	49.09	Pk	34.3	-18.4	0	64.99	-	-	74	-9.01	5	222	V
3	* 5.35	31.85	RMS	34.3	-18.4	.29	48.04	54	-5.96	-	-	5	222	V
4	* 5.35	32.92	RMS	34.3	-18.4	.29	49.11	54	-4.89	-	-	5	222	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF3 BF Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

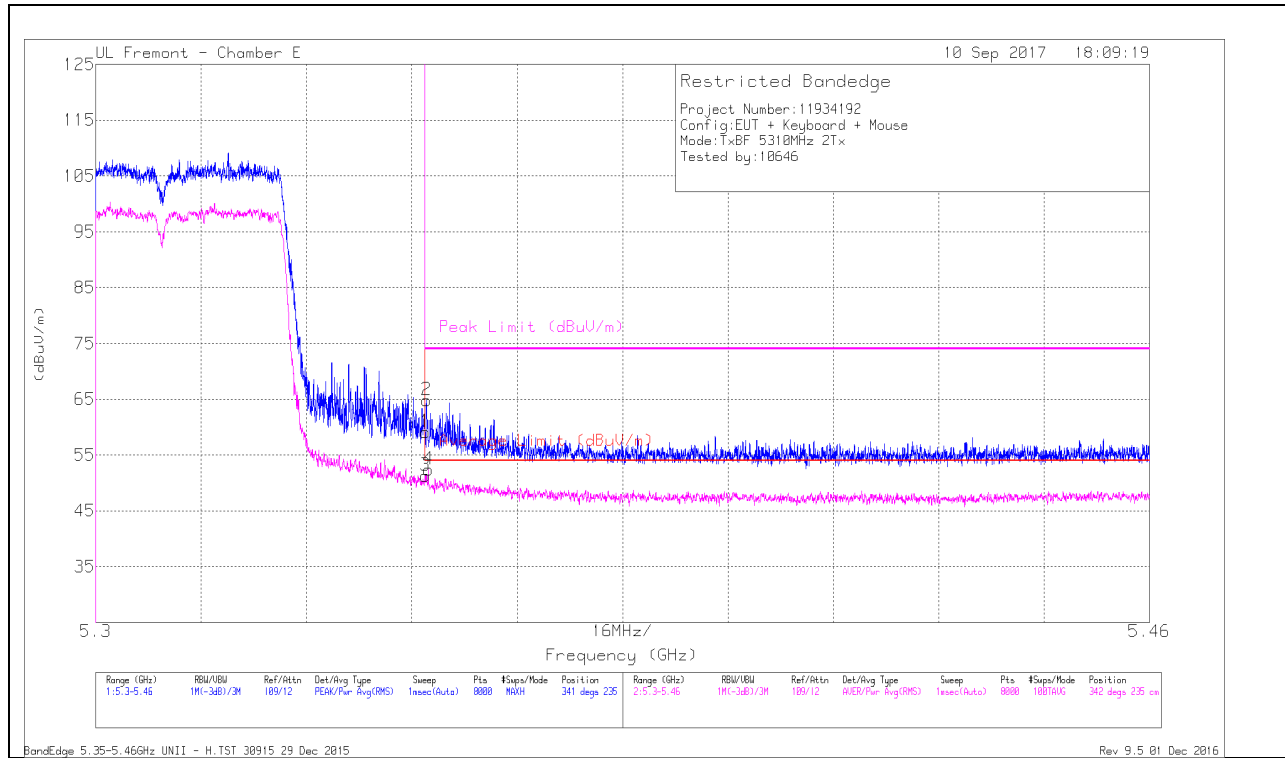


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.02	Pk	35	-18.9	0	59.12	-	-	74	-14.88	341	235	H
2	* 5.35	48.77	Pk	35	-18.9	0	64.87	-	-	74	-9.13	341	235	H
3	* 5.35	34.94	RMS	35	-18.9	.11	51.15	54	-2.85	-	-	342	235	H
4	* 5.351	35.99	RMS	35	-18.9	.11	52.2	54	-1.8	-	-	342	235	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

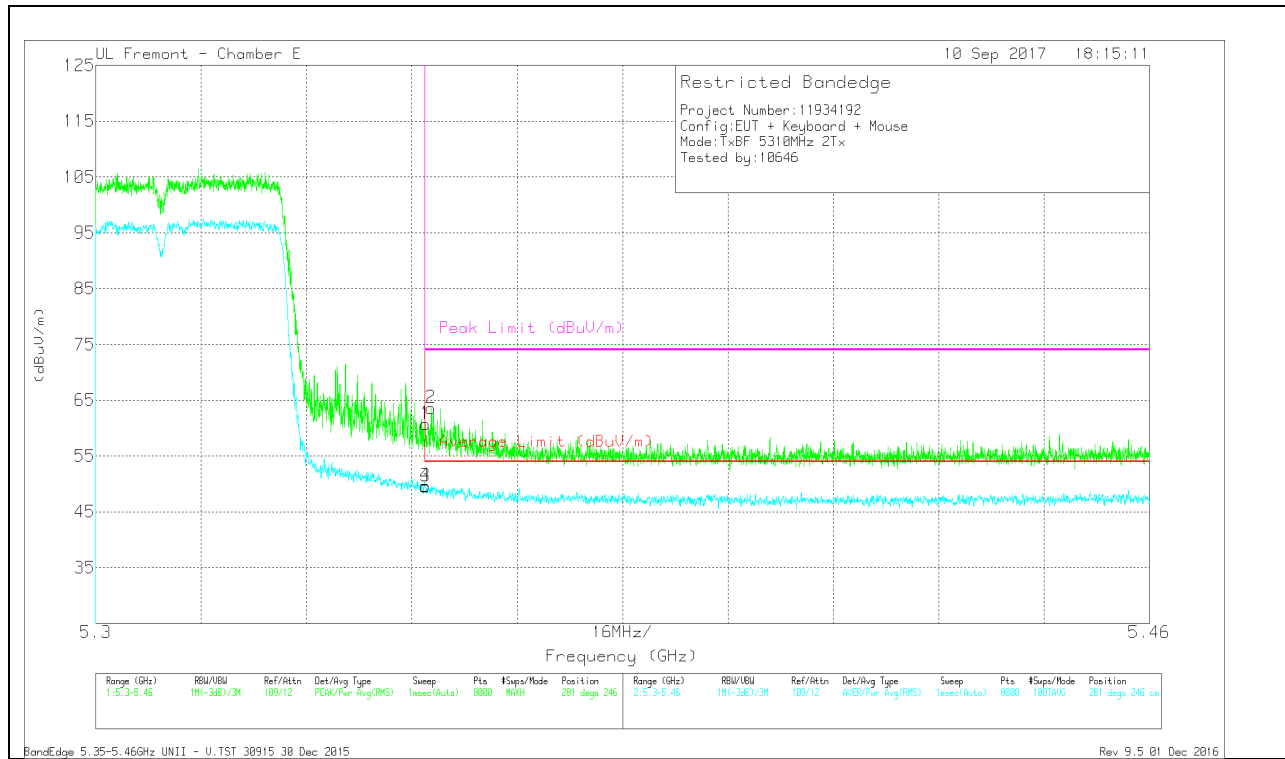


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.64	Pk	35	-18.9	0	60.74	-	-	74	-13.26	281	246	V
2	* 5.351	47.46	Pk	35	-18.9	0	63.56	-	-	74	-10.44	281	246	V
3	* 5.35	33.15	RMS	35	-18.9	.11	49.36	54	-4.64	-	-	281	246	V
4	* 5.35	33.36	RMS	35	-18.9	.11	49.57	54	-4.43	-	-	281	246	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF2 CDD Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

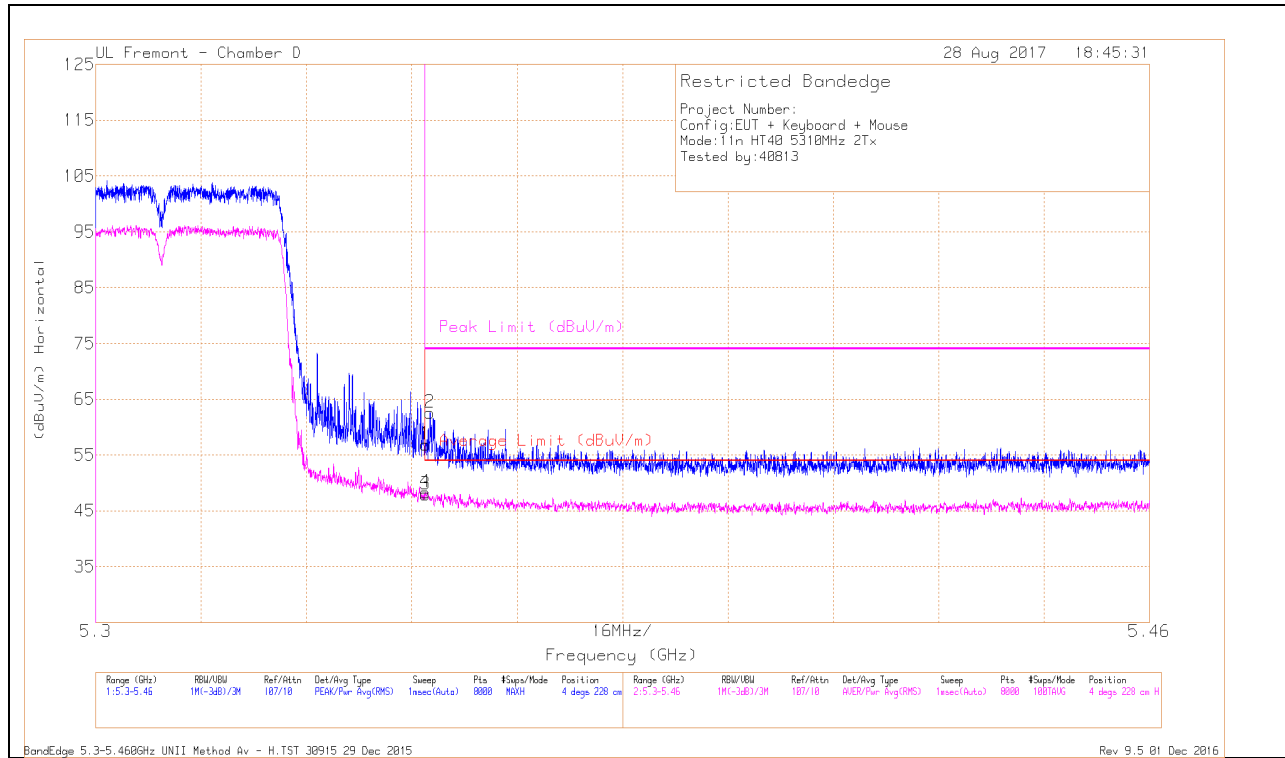


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.98	Pk	34.3	-18.4	0	56.88	-	-	74	-17.12	4	228	H
2	* 5.351	46.64	Pk	34.3	-18.4	0	62.54	-	-	74	-11.46	4	228	H
3	* 5.35	31.83	RMS	34.3	-18.4	.18	47.91	54	-6.09	-	-	4	228	H
4	* 5.35	32.2	RMS	34.3	-18.4	.18	48.28	54	-5.72	-	-	4	228	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

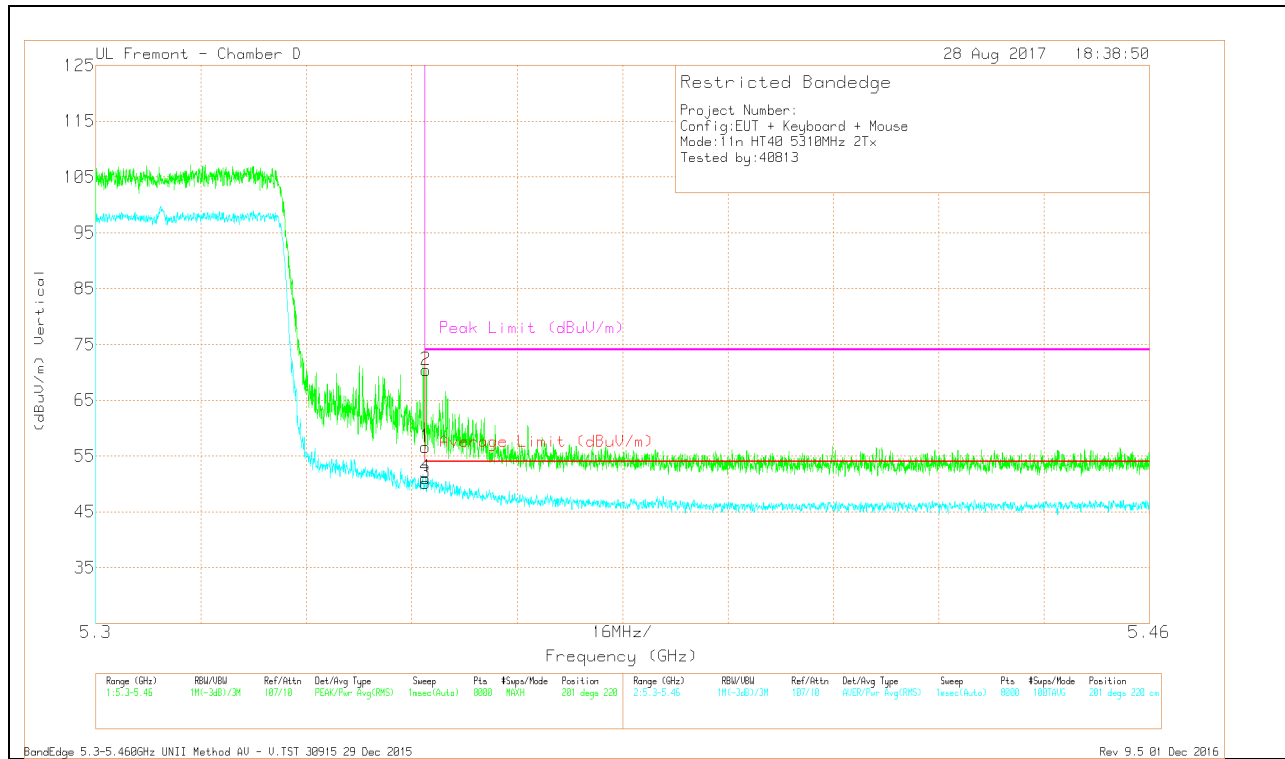


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.72	Pk	34.3	-18.4	0	56.62	-	-	74	-17.38	201	220	V
2	* 5.35	54.45	Pk	34.3	-18.4	0	70.35	-	-	74	-3.65	201	220	V
3	* 5.35	34.08	RMS	34.3	-18.4	.18	50.16	54	-3.84	-	-	201	220	V
4	* 5.35	35.02	RMS	34.3	-18.4	.18	51.1	54	-2.9	-	-	201	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF2 SDM Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

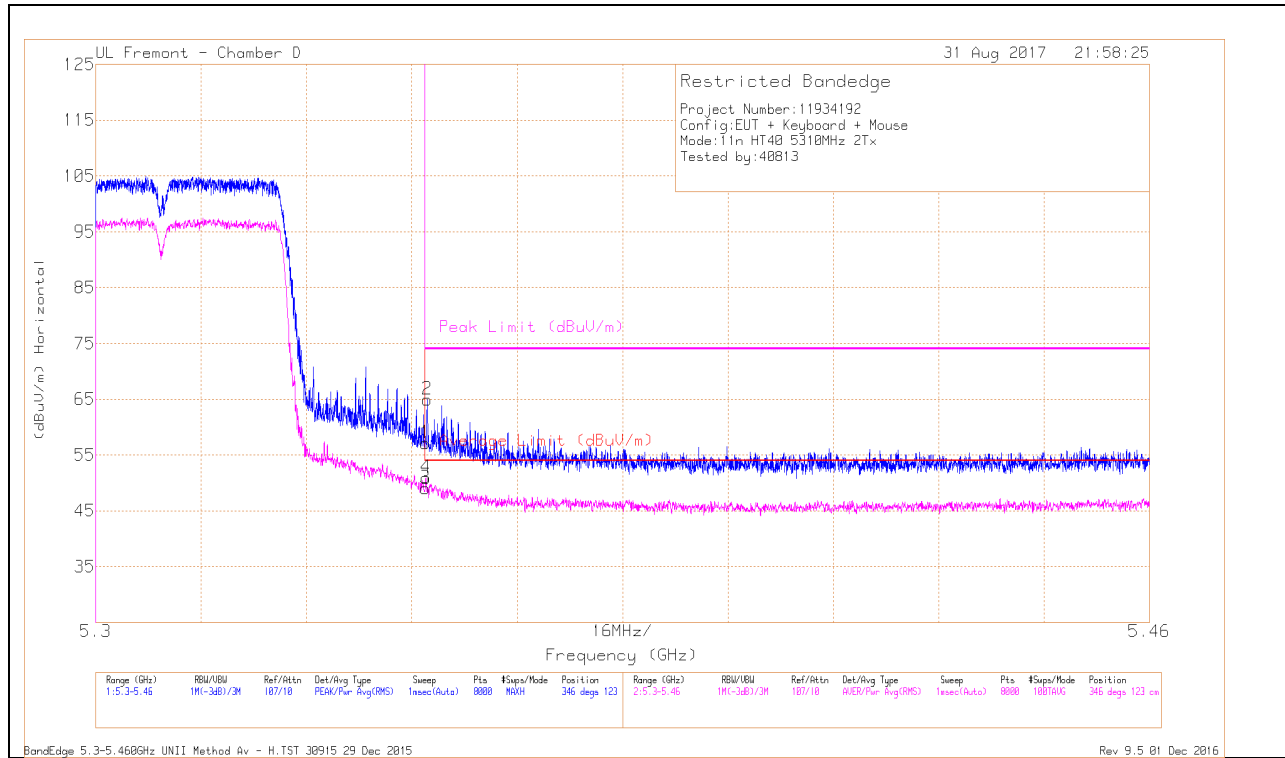


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.22	Pk	34.3	-18.4	0	57.12	-	-	74	-16.88	346	123	H
2	* 5.35	49	Pk	34.3	-18.4	0	64.9	-	-	74	-9.1	346	123	H
3	* 5.35	33.01	RMS	34.3	-18.4	.29	49.20	54	-4.8	-	-	346	123	H
4	* 5.35	34.79	RMS	34.3	-18.4	.29	50.98	54	-3.02	-	-	346	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

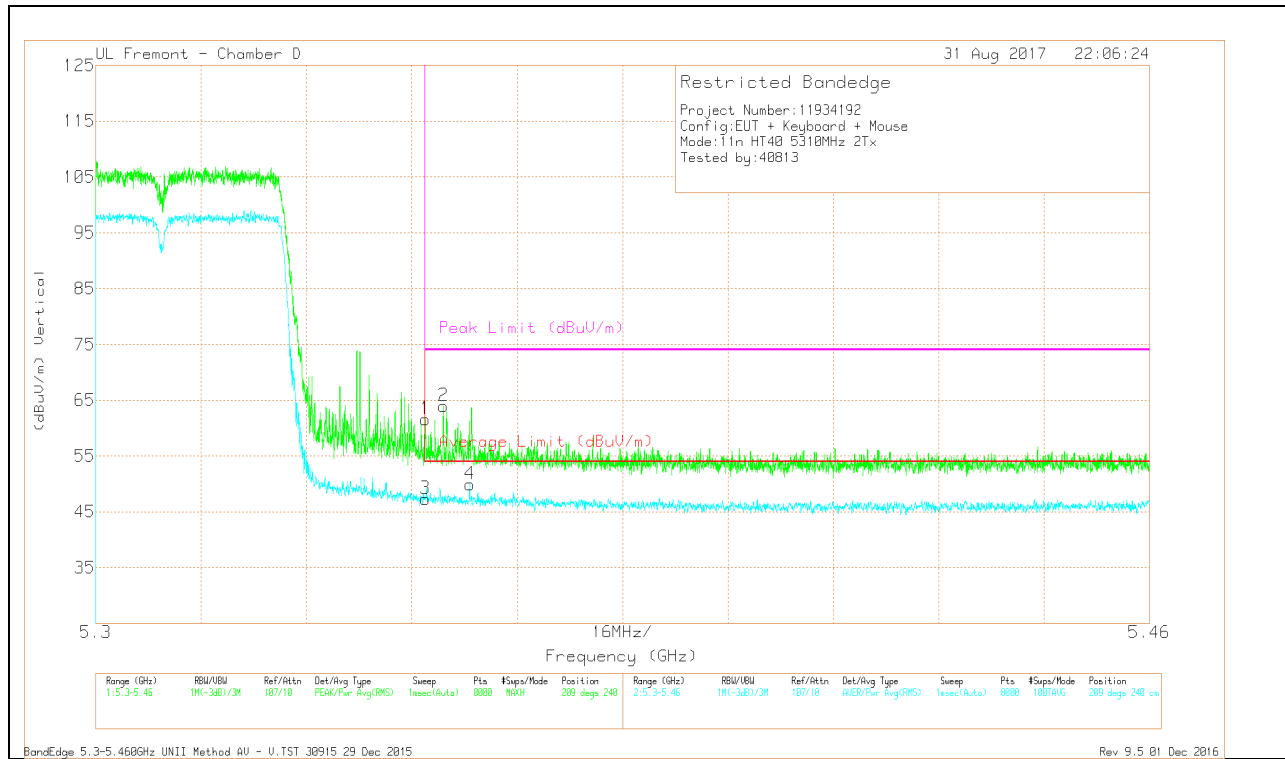


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.7	Pk	34.3	-18.4	0	61.6	-	-	74	-12.4	209	240	V
2	* 5.353	48.06	Pk	34.3	-18.4	0	63.96	-	-	74	-10.04	209	240	V
3	* 5.35	31.22	RMS	34.3	-18.4	.29	47.41	54	-6.59	-	-	209	240	V
4	* 5.357	33.81	RMS	34.3	-18.4	.29	50.0	54	-4.0	-	-	209	240	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF2 BF Mode

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

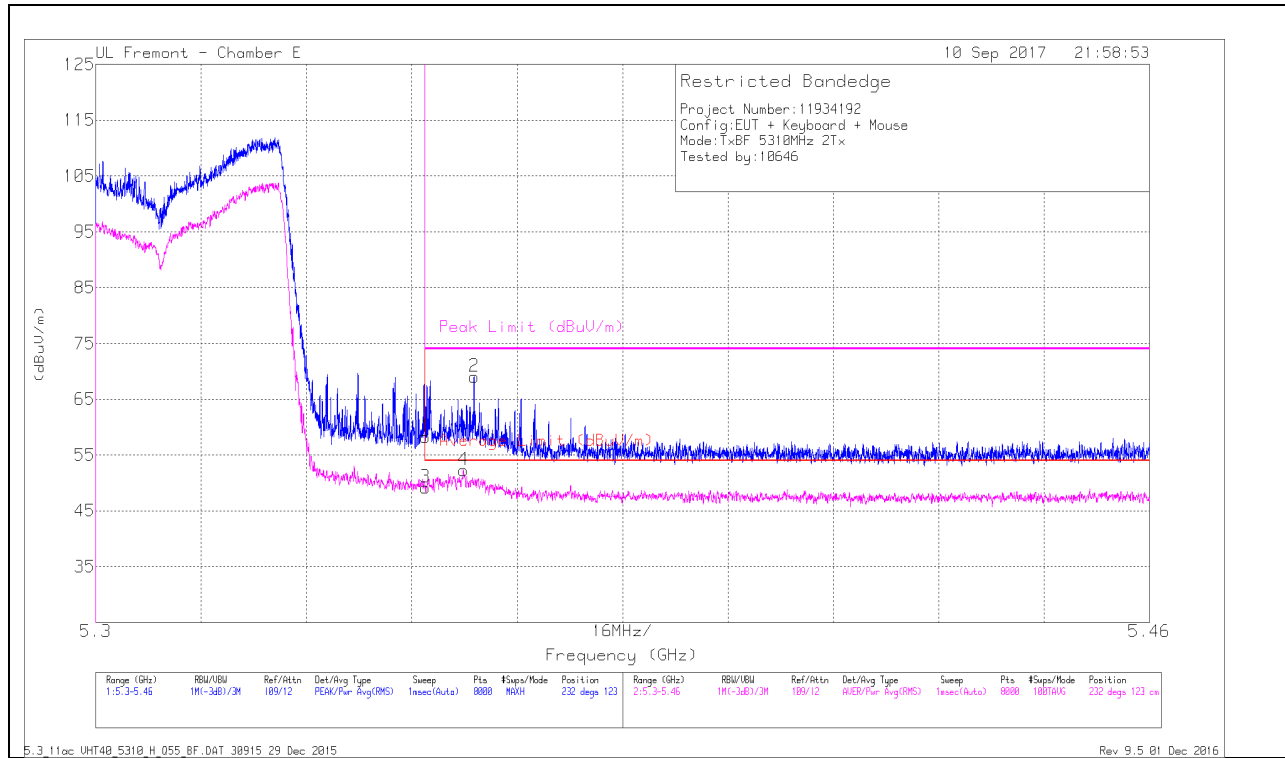

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.19	Pk	35	-18.9	0	58.29	-	-	74	-15.71	232	123	H
3	* 5.35	32.83	RMS	35	-18.9	.11	49.08	54	-4.92	-	-	232	123	H
4	* 5.356	35.95	RMS	35	-18.9	.11	52.20	54	-1.8	-	-	232	123	H
2	* 5.357	52.96	Pk	35	-18.9	0	69.06	-	-	74	-4.94	232	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

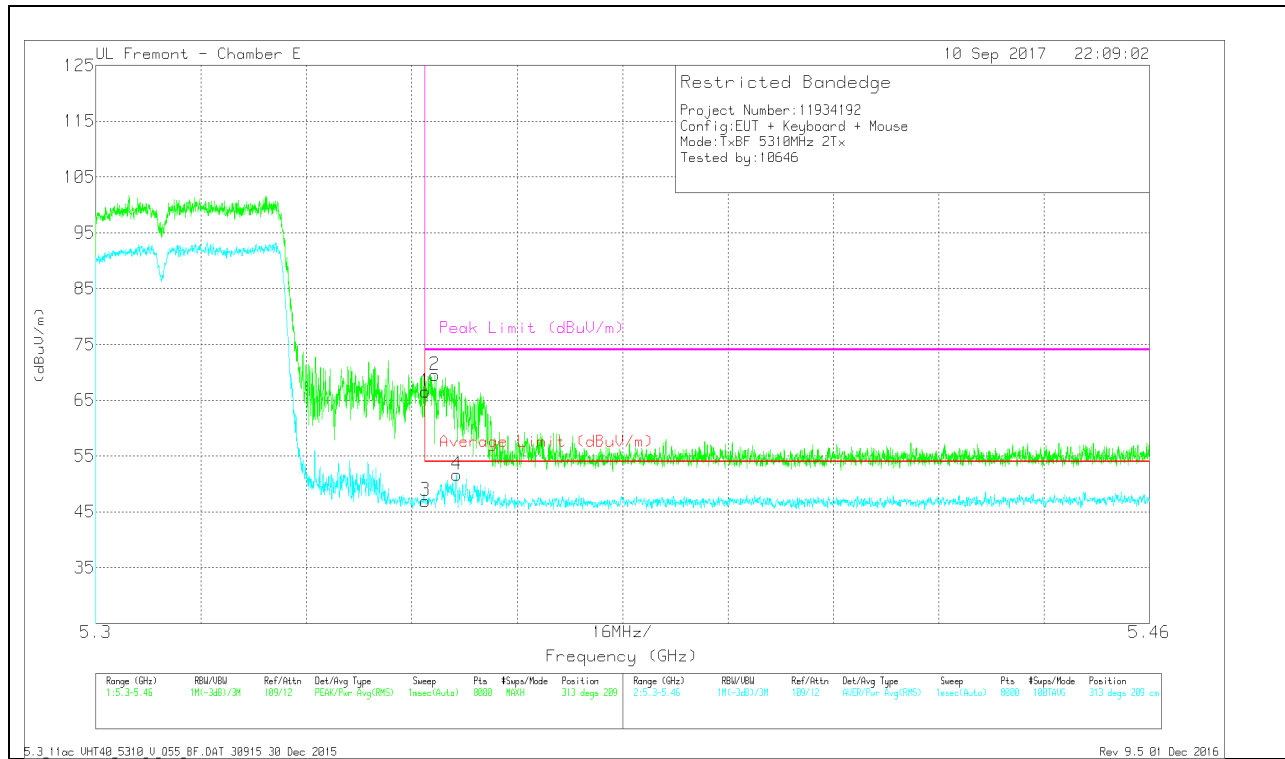


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Ftr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	50.49	Pk	35	-18.9	0	66.59	-	-	74	-7.41	313	209	V
3	* 5.35	30.64	RMS	35	-18.9	.11	46.89	54	-7.11	-	-	313	209	V
2	* 5.351	53.49	Pk	35	-18.9	0	69.59	-	-	74	-4.41	313	209	V
4	* 5.355	35.3	RMS	35	-18.9	.11	51.55	54	-2.45	-	-	313	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF3 + Antenna WF2 CDD Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

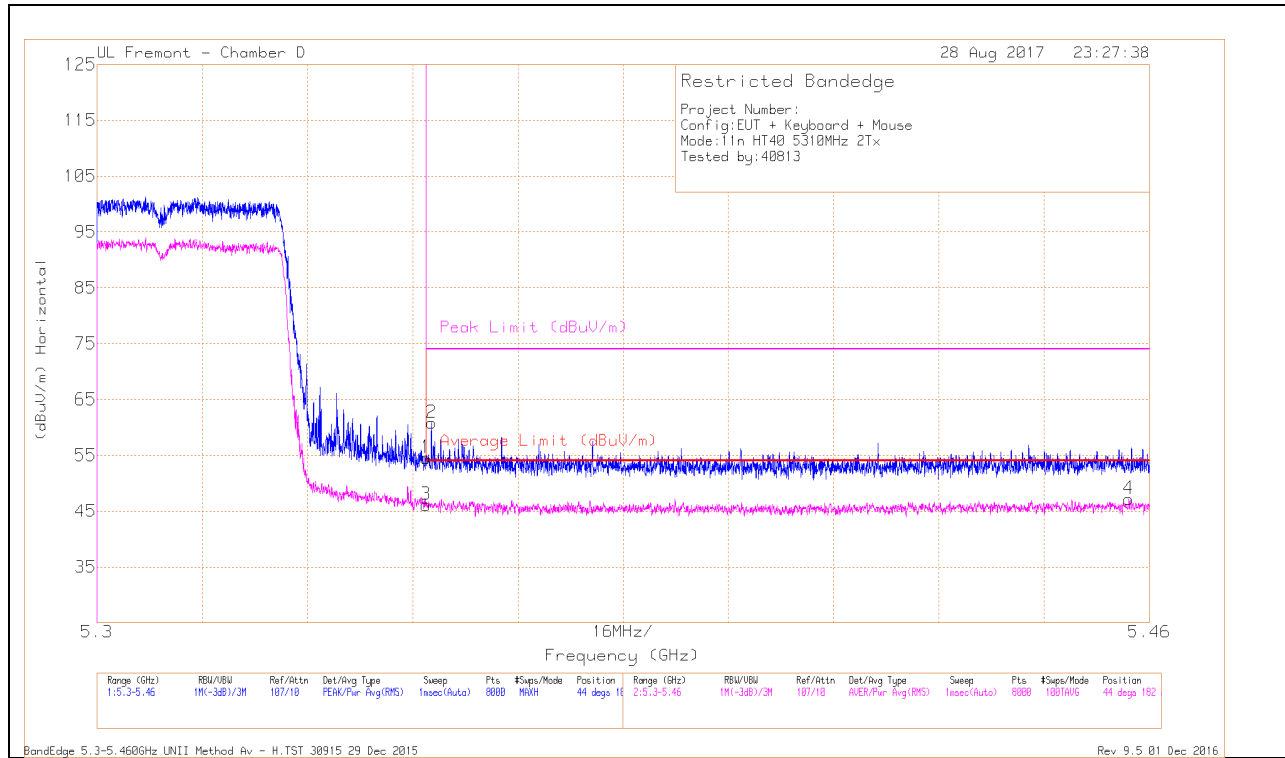


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.61	Pk	34.3	-18.4	0	54.51	-	-	74	-19.49	44	182	H
2	* 5.351	44.91	Pk	34.3	-18.4	0	60.81	-	-	74	-13.19	44	182	H
3	* 5.35	30.05	RMS	34.3	-18.4	.18	46.13	54	-7.87	-	-	44	182	H
4	* 5.457	30.6	RMS	34.4	-18	.18	47.18	54	-6.82	-	-	44	182	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

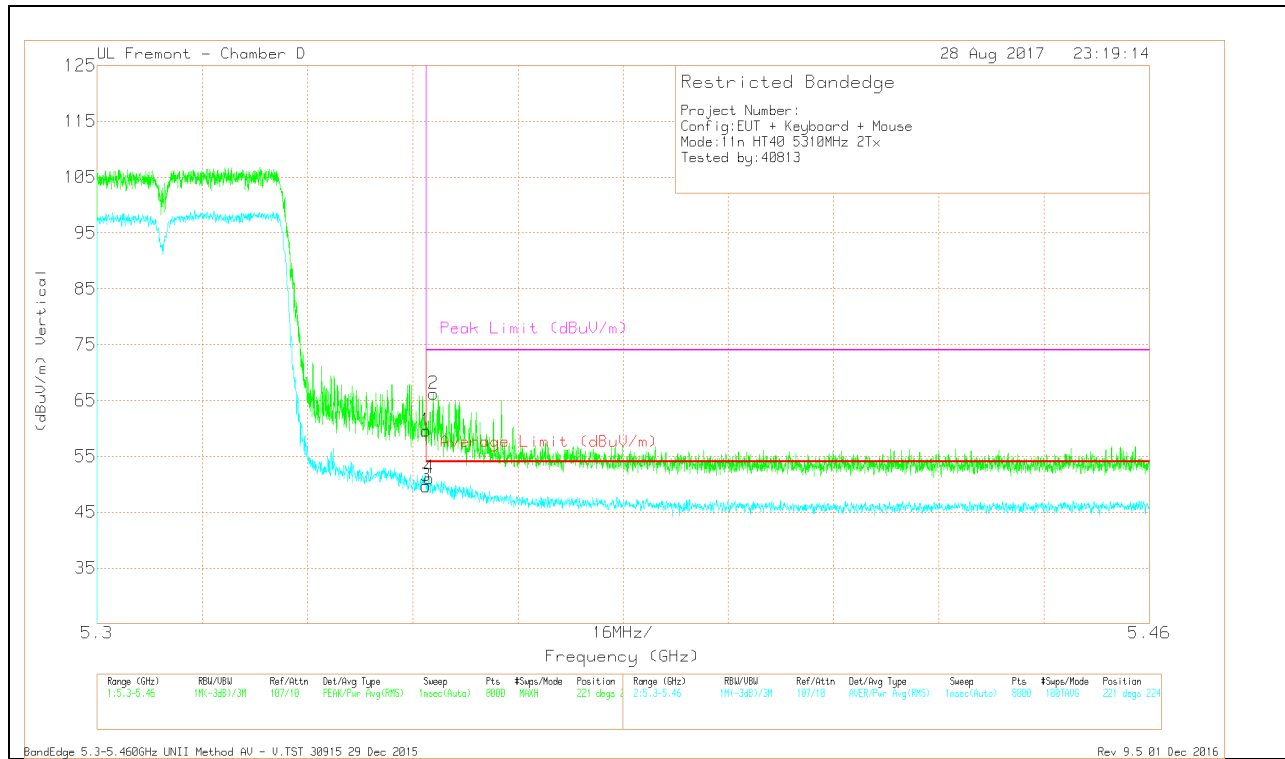


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.72	Pk	34.3	-18.4	0	59.62	-	-	74	-14.38	221	224	V
2	* 5.351	50.29	Pk	34.3	-18.4	0	66.19	-	-	74	-7.81	221	224	V
3	* 5.35	33.6	RMS	34.3	-18.4	.18	49.68	54	-4.32	-	-	221	224	V
4	* 5.35	35	RMS	34.3	-18.4	.18	51.08	54	-2.92	-	-	221	224	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF3 + Antenna WF2 SDM Mode

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

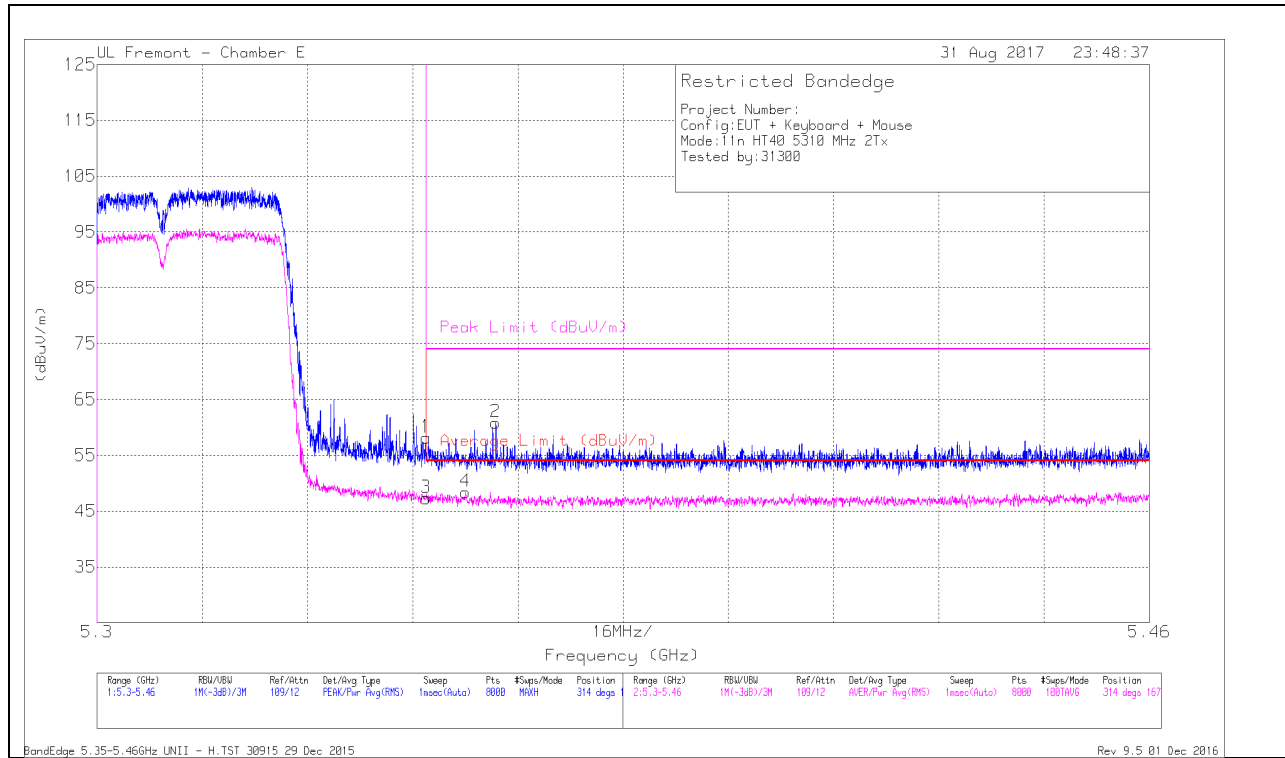

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.07	Pk	35	-18.9	0	58.17	-	-	74	-15.83	314	167	H
3	* 5.35	31.06	RMS	35	-18.9	.29	47.45	54	-6.55	-	-	314	167	H
4	* 5.356	32.15	RMS	35	-18.9	.29	48.54	54	-5.46	-	-	314	167	H
2	* 5.361	44.79	Pk	35	-18.9	0	60.89	-	-	74	-13.11	314	167	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

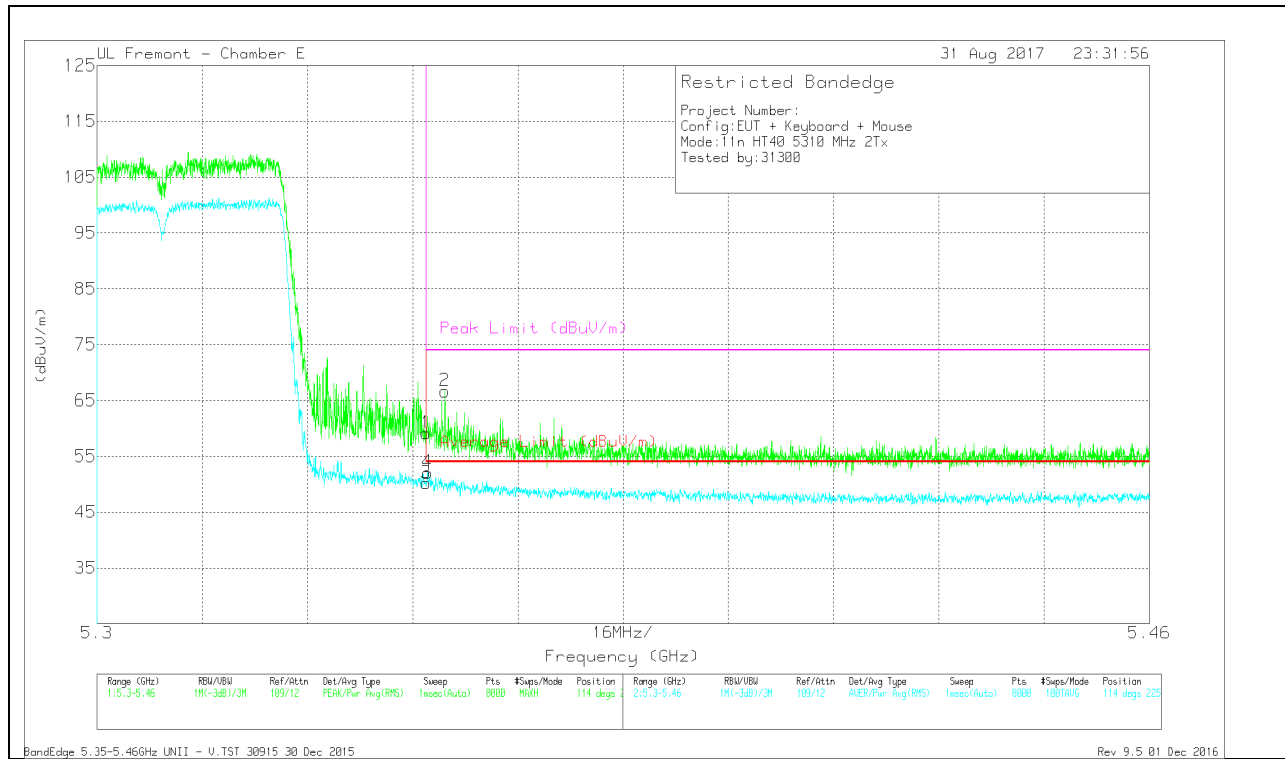


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.99	Pk	35	-18.9	0	59.09	-	-	74	-14.91	114	225	V
3	* 5.35	33.9	RMS	35	-18.9	.29	50.29	54	-3.71	-	-	114	225	V
4	* 5.35	35.79	RMS	35	-18.9	.29	52.18	54	-1.82	-	-	114	225	V
2	* 5.353	50.56	Pk	35	-18.9	0	66.66	-	-	74	-7.34	114	225	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF3 + Antenna WF2 BF Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

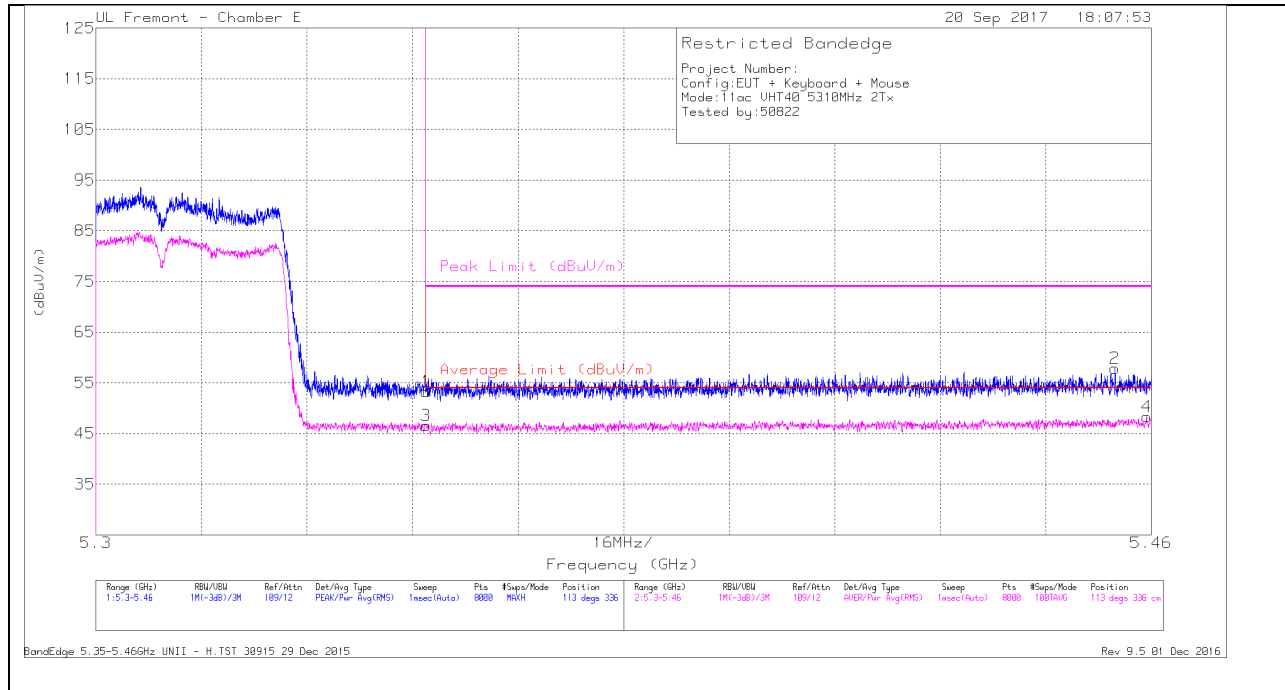


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/PA d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.18	Pk	35	-18.9	0	53.28	-	-	74	-20.72	113	336	H
3	* 5.35	30.24	RMS	35	-18.9	.11	46.45	54	-7.55	-	-	113	336	H
2	* 5.454	41.7	Pk	35.1	-18.9	0	57.9	-	-	74	-16.1	113	336	H
4	* 5.459	31.79	RMS	35.1	-18.9	.11	48.1	54	-5.9	-	-	113	336	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

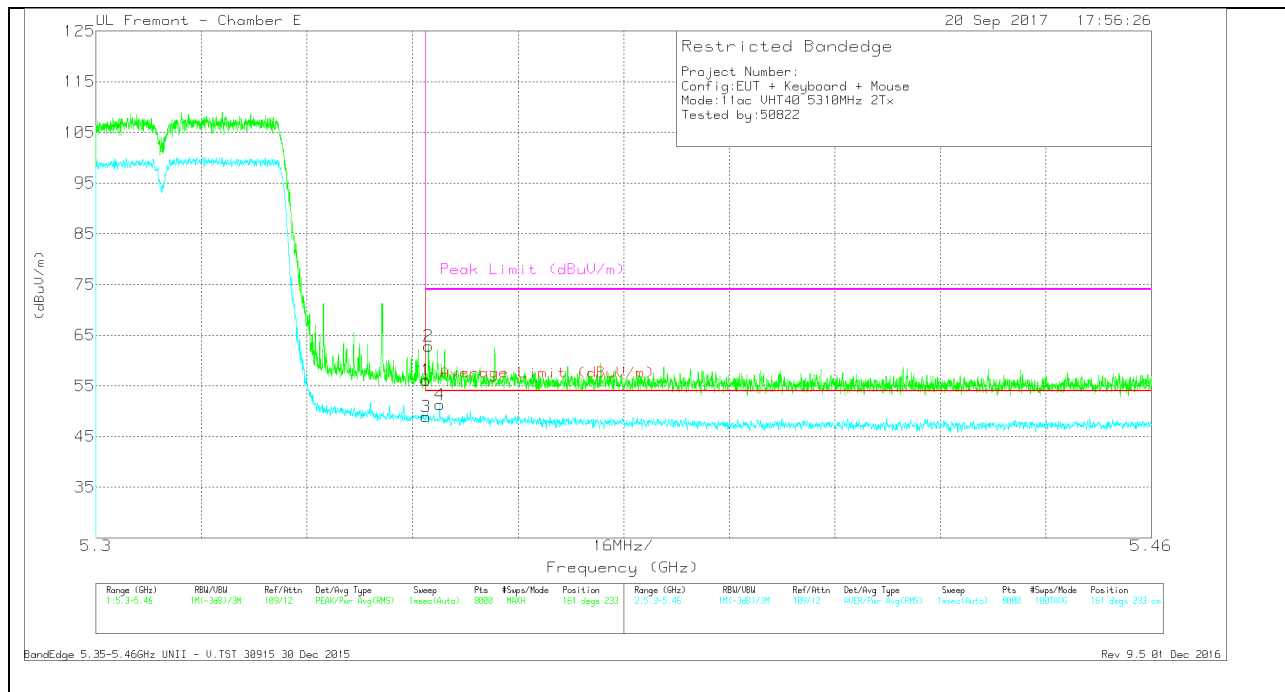


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.01	Pk	35	-18.9	0	56.11	-	-	74	-17.89	161	233	V
2	* 5.35	46.69	Pk	35	-18.9	0	62.79	-	-	74	-11.21	161	233	V
3	* 5.35	32.78	RMS	35	-18.9	.11	48.99	54	-5.01	-	-	161	233	V
4	* 5.352	35.14	RMS	35	-18.9	.11	51.35	54	-2.65	-	-	161	233	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 CDD Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

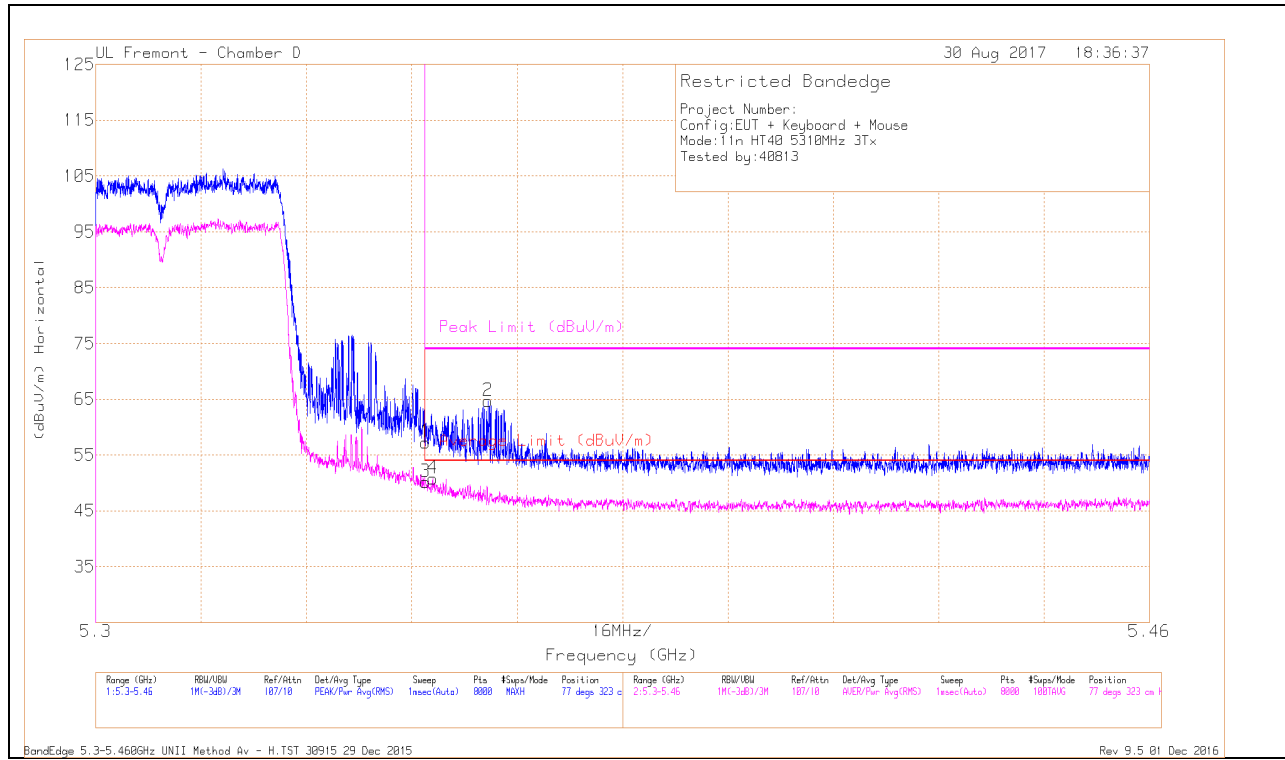


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.36	Pk	34.3	-18.4	0	57.26	-	-	74	-16.74	77	323	H
3	* 5.35	34.02	RMS	34.3	-18.4	.25	50.17	54	-3.83	-	-	77	323	H
4	* 5.351	34.65	RMS	34.3	-18.4	.25	50.8	54	-3.2	-	-	77	323	H
2	* 5.36	48.77	Pk	34.3	-18.4	0	64.67	-	-	74	-9.33	77	323	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

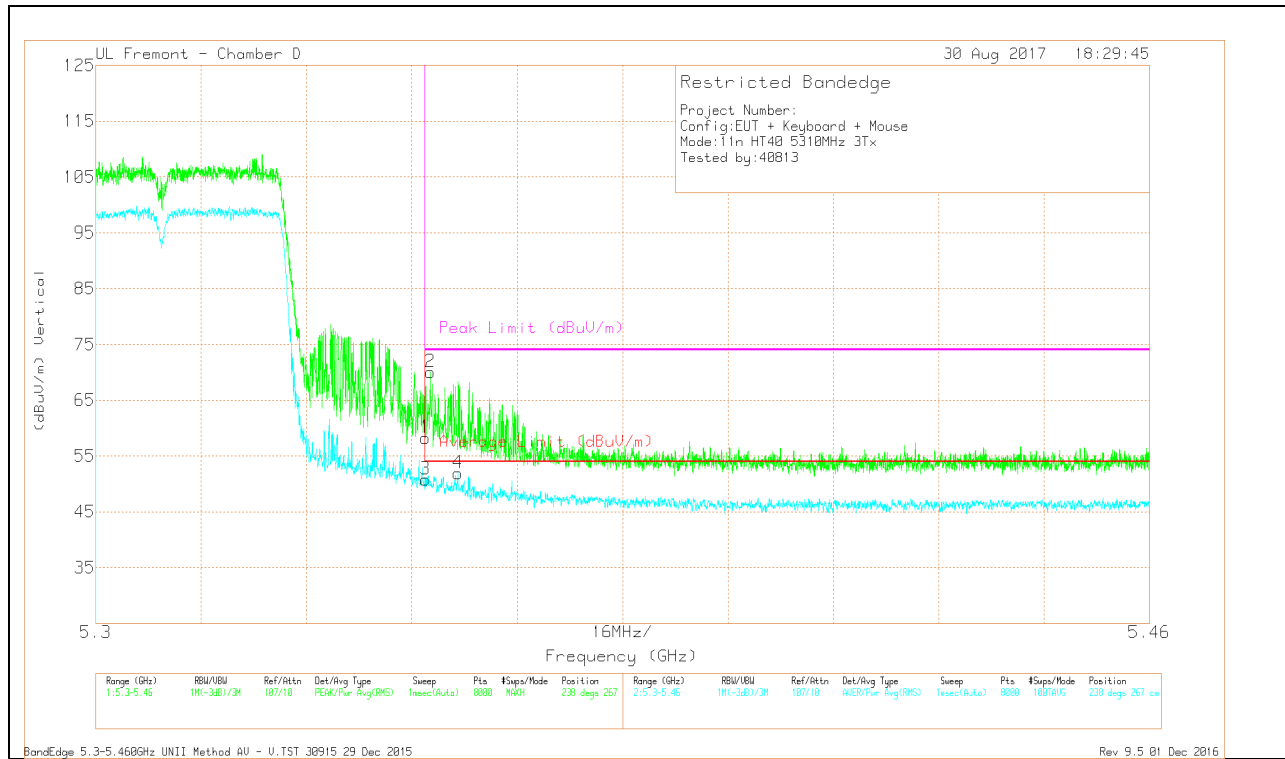


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.39	Pk	34.3	-18.4	0	58.29	-	-	74	-15.71	238	267	V
3	* 5.35	34.61	RMS	34.3	-18.4	.25	50.76	54	-3.24	-	-	238	267	V
2	* 5.351	54.08	Pk	34.3	-18.4	0	69.98	-	-	74	-4.02	238	267	V
4	* 5.355	35.77	RMS	34.3	-18.4	.25	51.92	54	-2.08	-	-	238	267	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

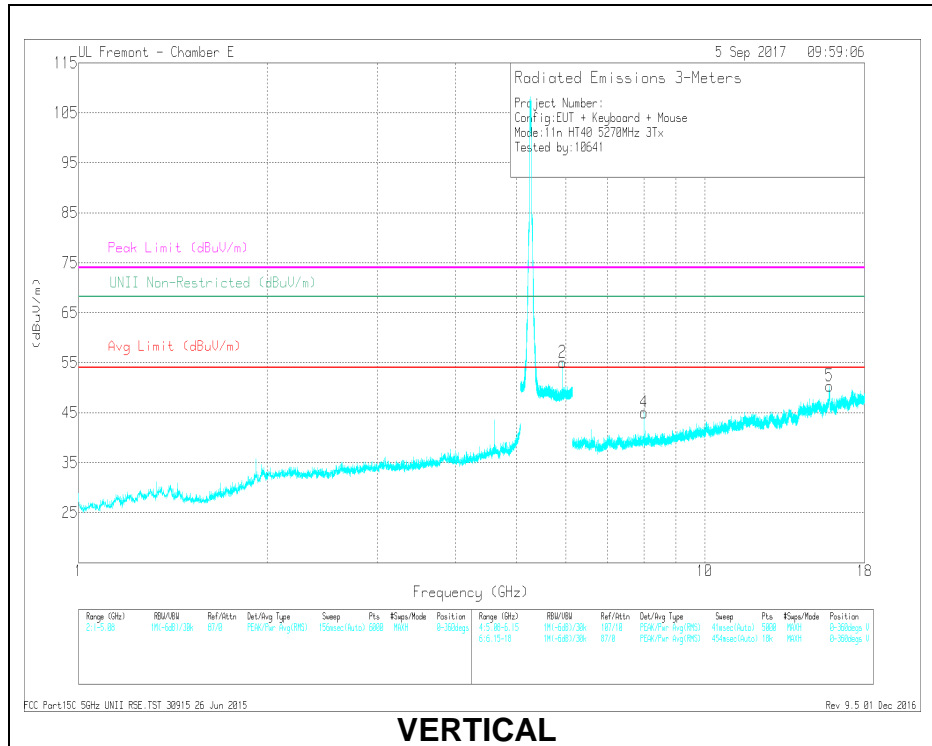

VERTICAL

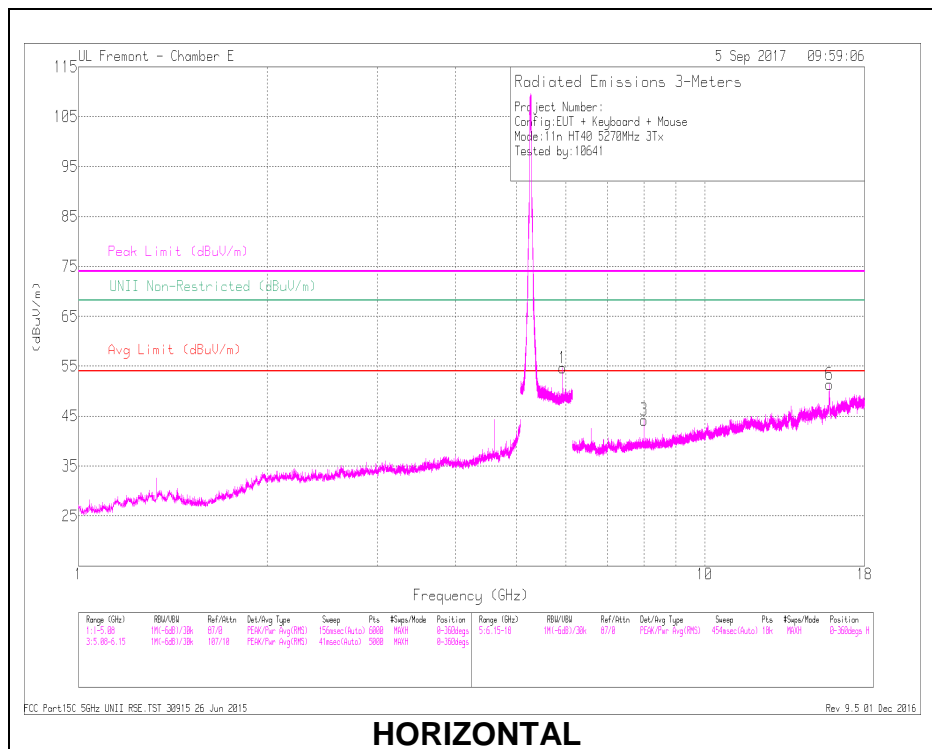

HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 15.819	41.31	PK-U	41.7	-23.1	0	59.91	-	-	74	-14.09	-	-	68	331	H
	* 15.82	29.13	ADR	41.7	-23.1	.25	47.98	54	-6.02	-	-	-	-	68	331	H
5	* 15.825	41.69	PK-U	41.6	-23	0	60.29	-	-	74	-13.71	-	-	171	161	V
	* 15.826	28.19	ADR	41.6	-23	.25	47.04	54	-6.96	-	-	-	-	171	161	V
1	5.929	43.52	PK-U	35.2	-18.8	0	59.92	-	-	-	-	68.2	-8.28	95	111	H
2	5.929	44.46	PK-U	35.2	-18.8	0	60.86	-	-	-	-	68.2	-7.34	118	216	V
3	8	40.24	PK-U	36.5	-26.4	0	50.34	-	-	-	-	68.2	-17.86	208	195	H
4	8	41.17	PK-U	36.5	-26.4	0	51.27	-	-	-	-	68.2	-16.93	164	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

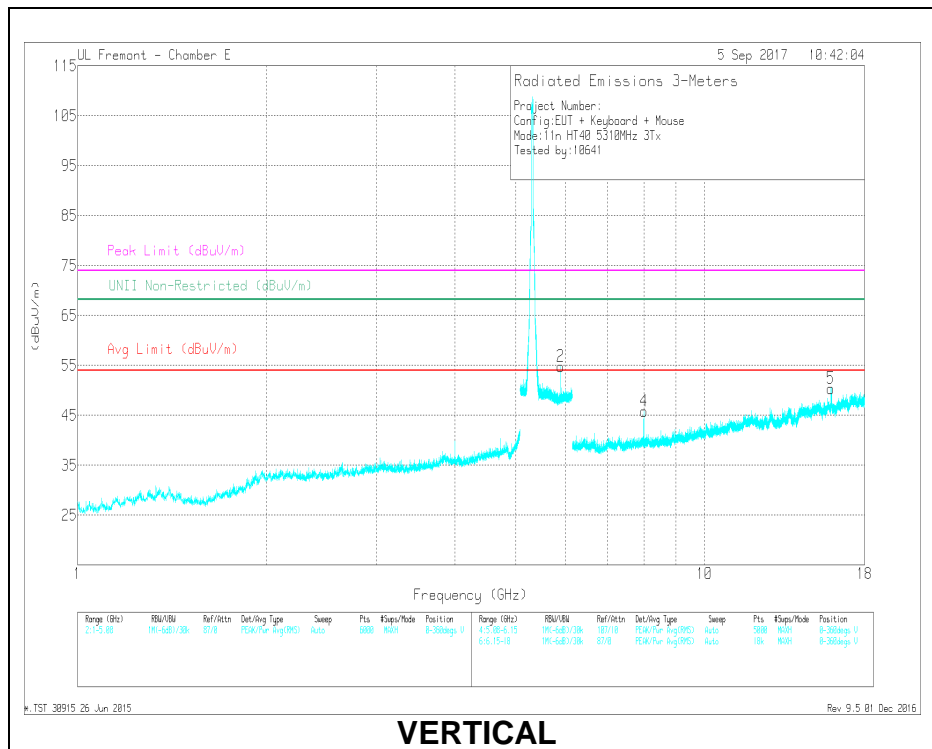

VERTICAL

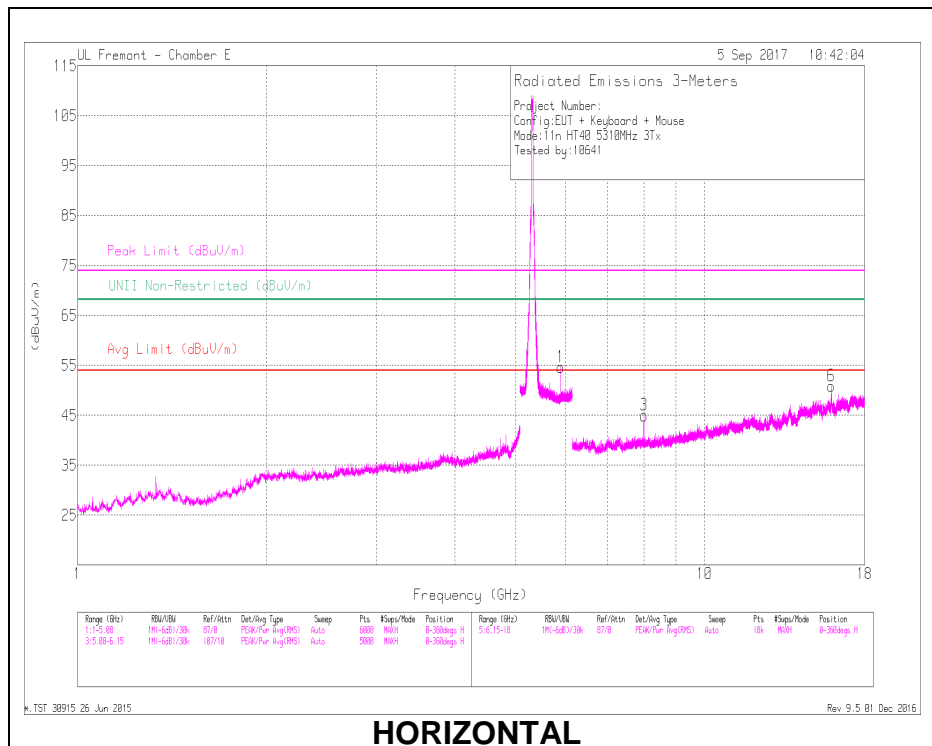

HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 15.934	40.32	PK-U	41.5	-23.3	0	58.52	-	-	74	-15.48	-	-	124	126	H
	* 15.934	28.17	ADR	41.5	-23.3	.25	46.62	54	-7.38	-	-	-	-	124	126	H
5	* 15.912	38.77	PK-U	41.4	-23.4	0	56.77	-	-	74	-17.23	-	-	173	133	V
	* 15.911	27.17	ADR	41.4	-23.4	.25	45.42	54	-8.58	-	-	-	-	173	133	V
1	5.9	43.49	PK-U	35.2	-18.8	0	59.89	-	-	-	-	68.2	-8.31	259	287	H
2	5.9	42.86	PK-U	35.2	-18.9	0	59.16	-	-	-	-	68.2	-9.04	127	166	V
3	8	39.13	PK-U	36.5	-26.4	0	49.23	-	-	-	-	68.2	-18.97	207	139	H
4	8	40.54	PK-U	36.5	-26.4	0	50.64	-	-	-	-	68.2	-17.56	161	172	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 SDM Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

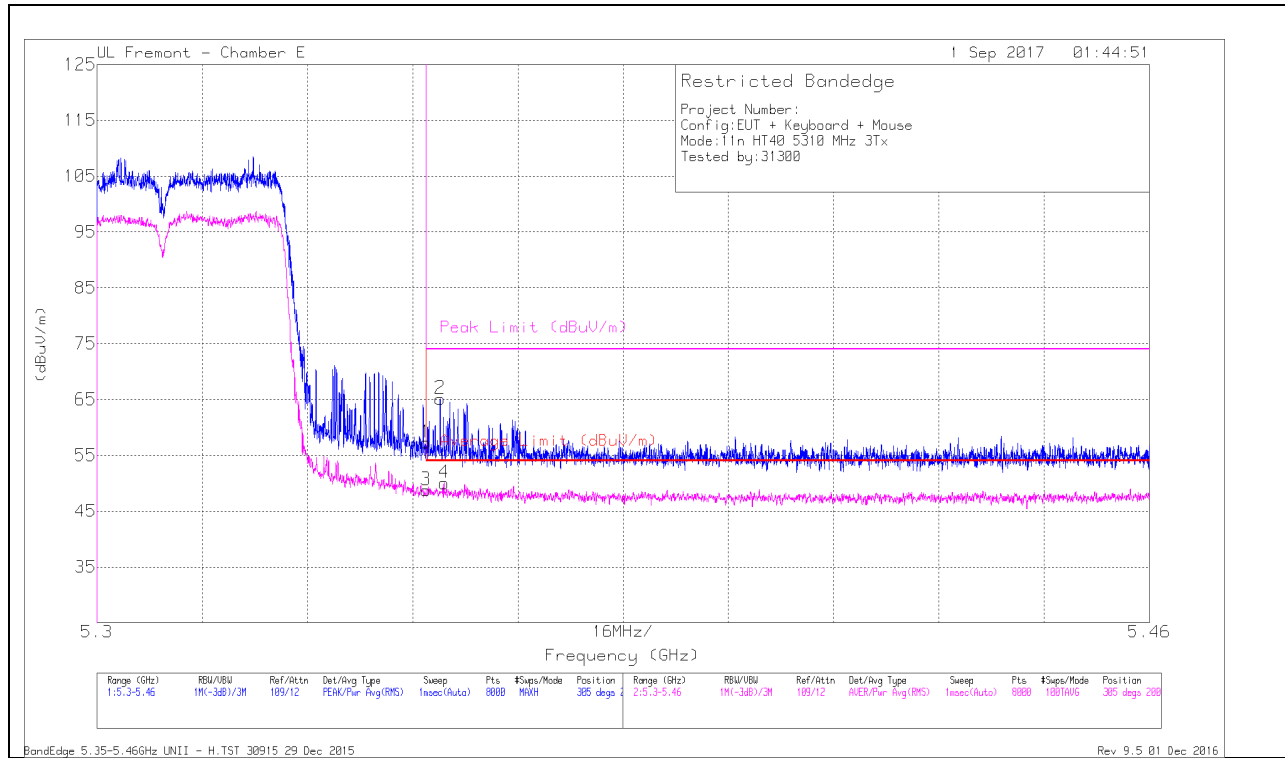


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.2	Pk	35	-18.9	0	57.3	-	-	74	-16.7	305	200	H
3	* 5.35	32.43	RMS	35	-18.9	.17	48.70	54	-5.3	-	-	305	200	H
2	* 5.352	49.04	Pk	35	-18.9	0	65.14	-	-	74	-8.86	305	200	H
4	* 5.353	33.68	RMS	35	-18.9	.17	49.95	54	-4.05	-	-	305	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

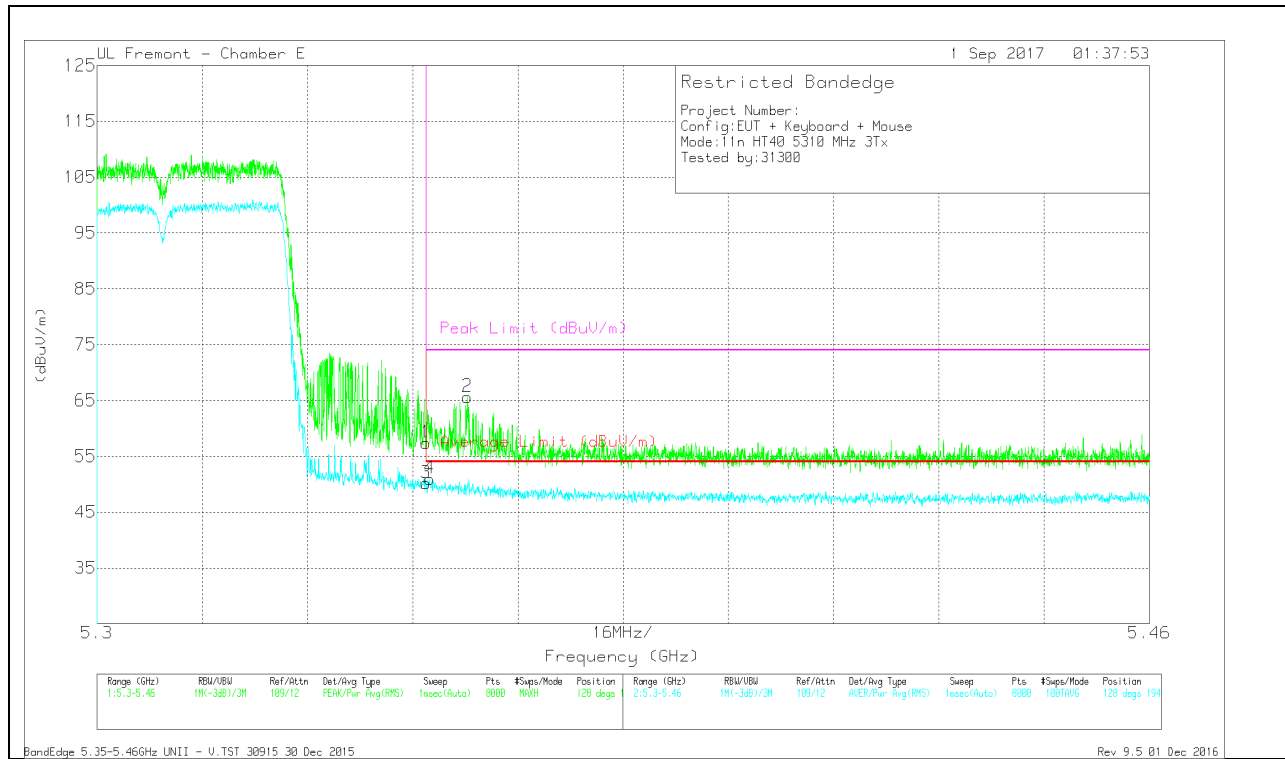


Marker	Frequen- cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.3	Pk	35	-18.9	0	57.4	-	-	74	-16.6	128	194	V
3	* 5.35	33.85	RMS	35	-18.9	.17	50.12	54	-3.79	-	-	128	194	V
4	* 5.351	34.65	RMS	35	-18.9	.17	50.92	54	-2.99	-	-	128	194	V
2	* 5.356	49.52	Pk	35	-18.9	0	65.62	-	-	74	-8.38	128	194	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

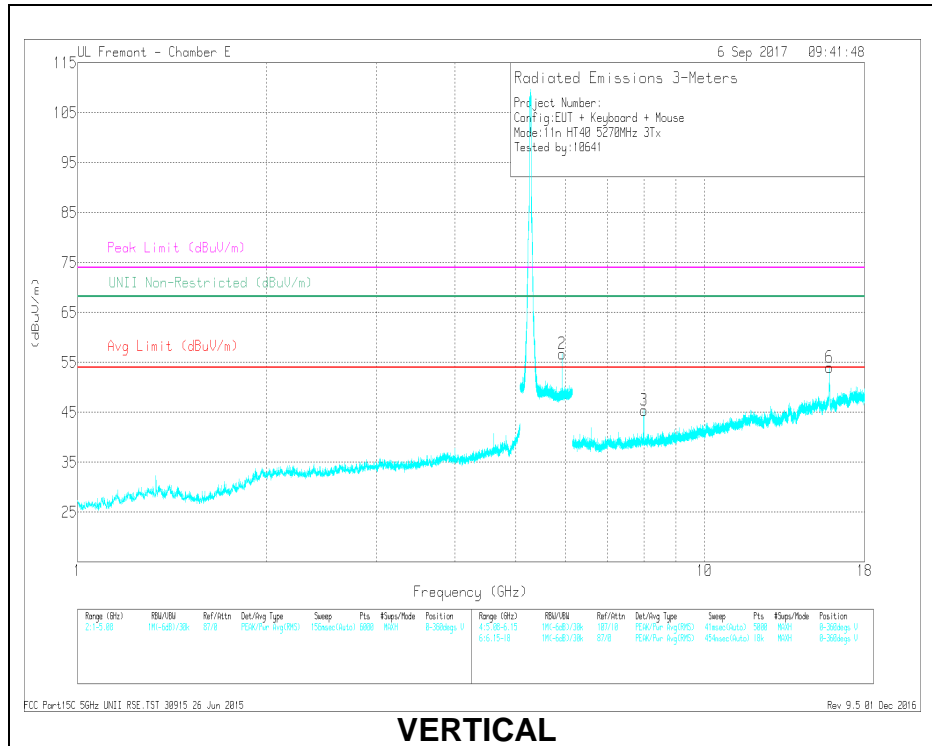

VERTICAL

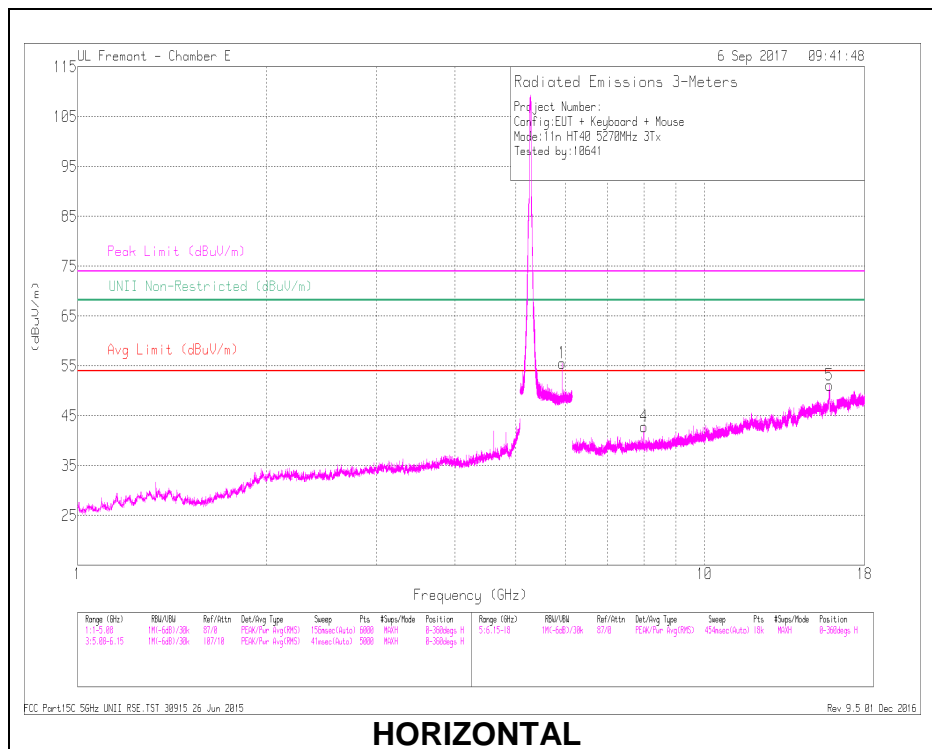

HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 15.815	41.14	PK-U	41.7	-23.2	0	59.64	-	-	74	-14.36	-	-	128	101	H
	* 15.815	28.68	ADR	41.7	-23.2	.17	47.35	54	-6.65	-	-	-	-	128	101	H
6	* 15.82	43.18	PK-U	41.7	-23.1	0	61.78	-	-	74	-12.22	-	-	143	100	V
	* 15.82	30.17	ADR	41.7	-23.1	.17	48.94	54	-5.06	-	-	-	-	143	100	V
1	5.929	43.42	PK-U	35.2	-18.8	0	59.82	-	-	-	-	68.2	-8.38	101	172	H
2	5.929	44.06	PK-U	35.2	-18.8	0	60.46	-	-	-	-	68.2	-7.74	130	218	V
4	8	39.21	PK-U	36.5	-26.4	0	49.31	-	-	-	-	68.2	-18.89	229	337	H
3	8	41.21	PK-U	36.5	-26.4	0	51.31	-	-	-	-	68.2	-16.89	330	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

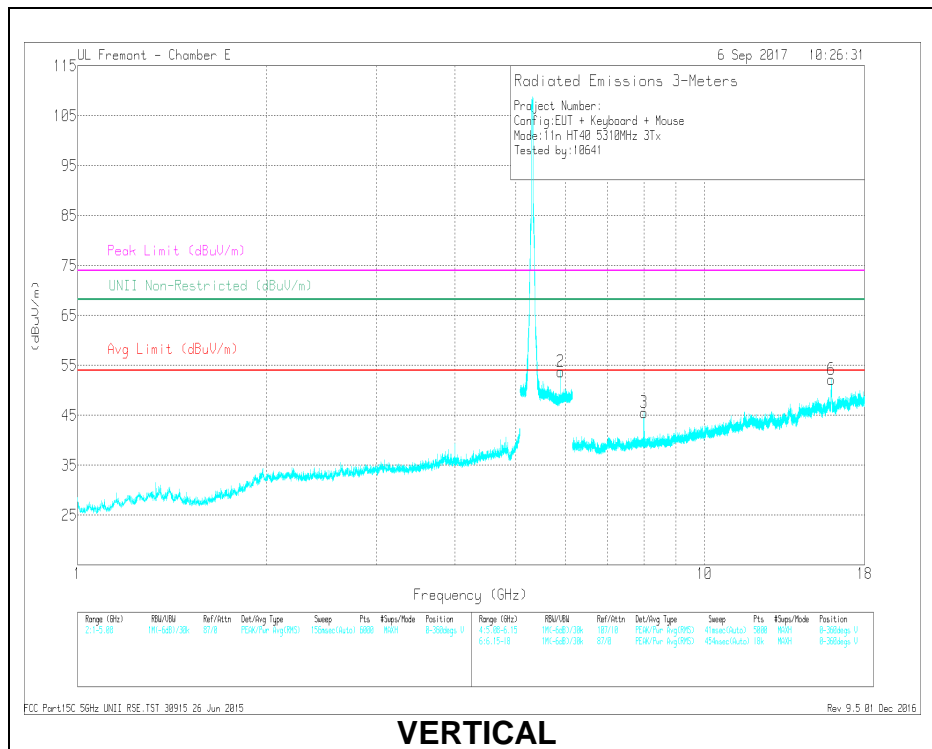

VERTICAL

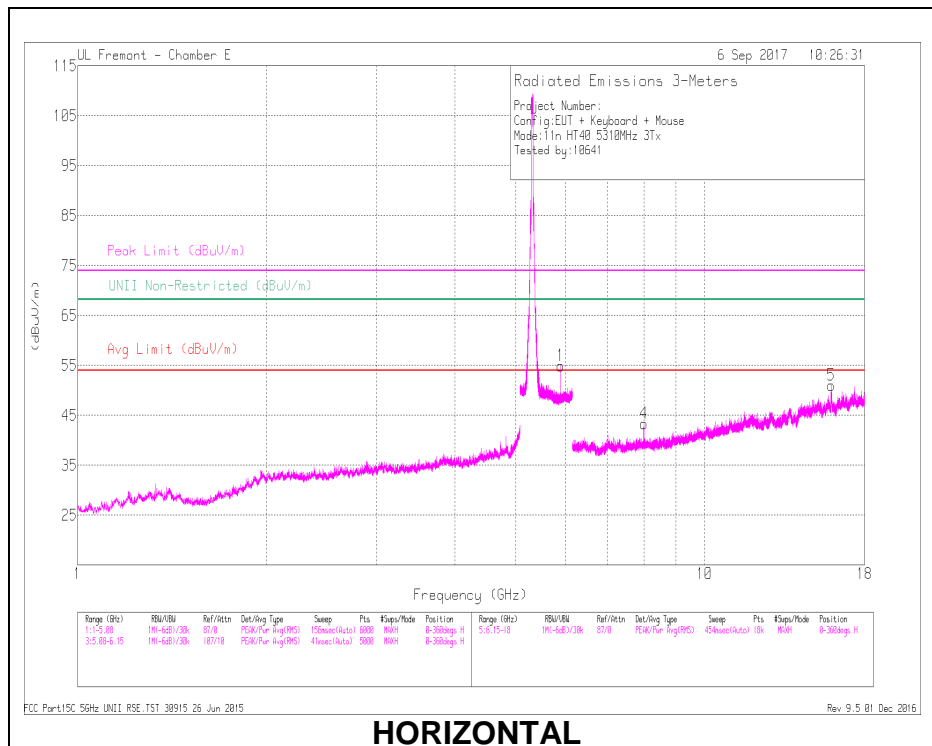

HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 15.936	39.65	PK-U	41.5	-23.3	0	57.85	-	-	74	-16.15	-	-	124	115	H
	* 15.936	26.98	ADR	41.5	-23.3	.17	45.35	54	-8.65	-	-	-	-	124	115	H
6	* 15.934	40.19	PK-U	41.5	-23.3	0	58.39	-	-	74	-15.61	-	-	134	132	V
	* 15.935	27.92	ADR	41.5	-23.3	.17	46.29	54	-7.71	-	-	-	-	134	132	V
1	5.9	44.14	PK-U	35.2	-18.8	0	60.54	-	-	-	-	68.2	-7.66	289	206	H
2	5.9	42.31	PK-U	35.2	-18.8	0	58.71	-	-	-	-	68.2	-9.49	131	141	V
4	8	39.26	PK-U	36.5	-26.4	0	49.36	-	-	-	-	68.2	-18.84	85	197	H
3	8	40.85	PK-U	36.5	-26.4	0	50.95	-	-	-	-	68.2	-17.25	330	203	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 BF Mode

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

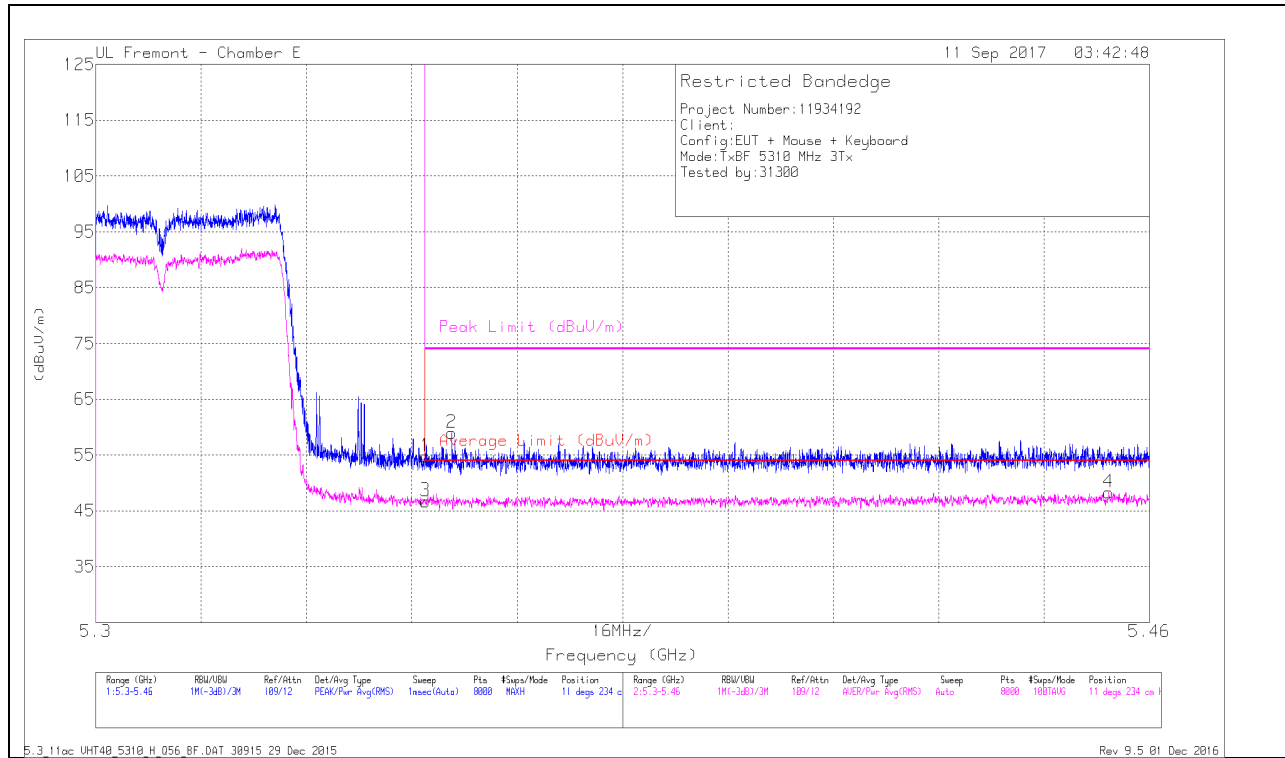


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.71	Pk	35	-18.9	0	54.81	-	-	74	-19.19	11	234	H
2	* 5.354	42.89	Pk	35	-18.9	0	58.99	-	-	74	-15.01	11	234	H
3	* 5.35	30.39	RMS	35	-18.9	.35	46.75	54	-7.16	-	-	11	234	H
4	* 5.454	31.82	RMS	35.1	-18.9	.35	48.28	54	-5.63	-	-	11	234	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


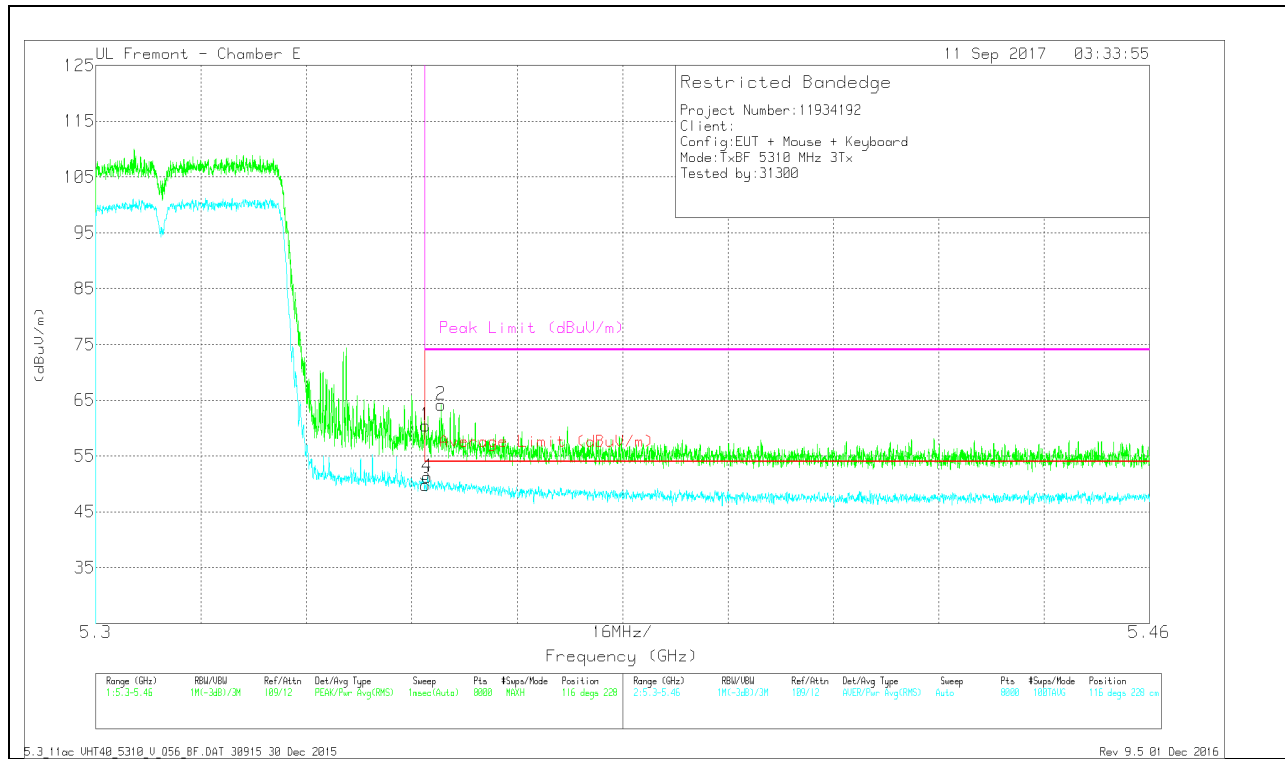


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.37	Pk	35	-18.9	0	60.47	-	-	74	-13.53	116	228	V
2	* 5.352	48.13	Pk	35	-18.9	0	64.23	-	-	74	-9.77	116	228	V
3	* 5.35	33.43	RMS	35	-18.9	.35	49.79	54	-4.12	-	-	116	228	V
4	* 5.35	34.98	RMS	35	-18.9	.35	51.34	54	-2.57	-	-	116	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

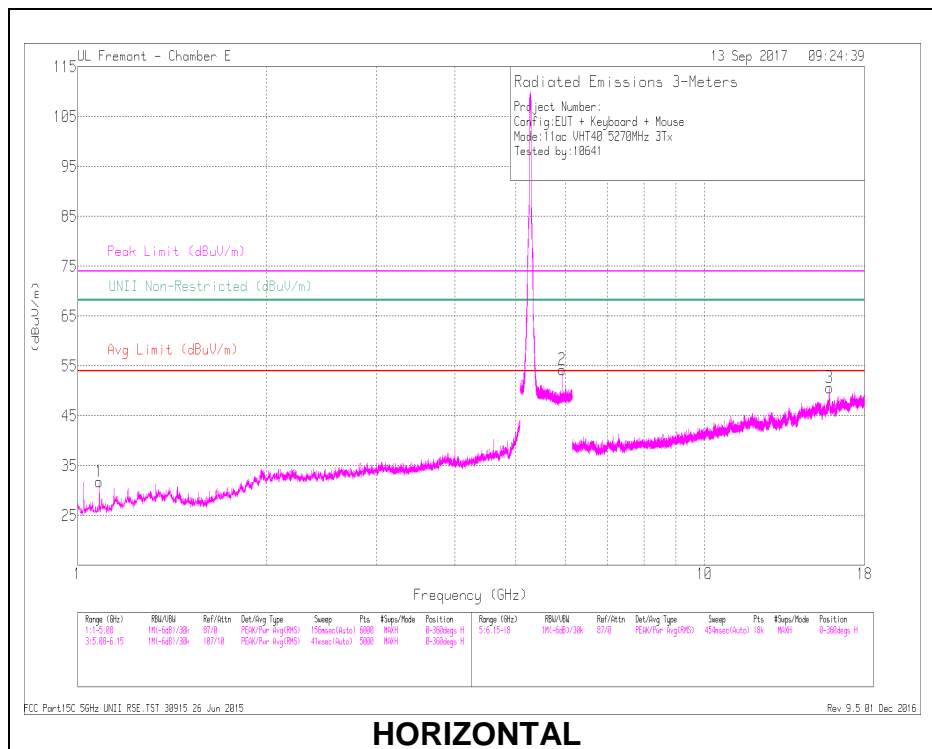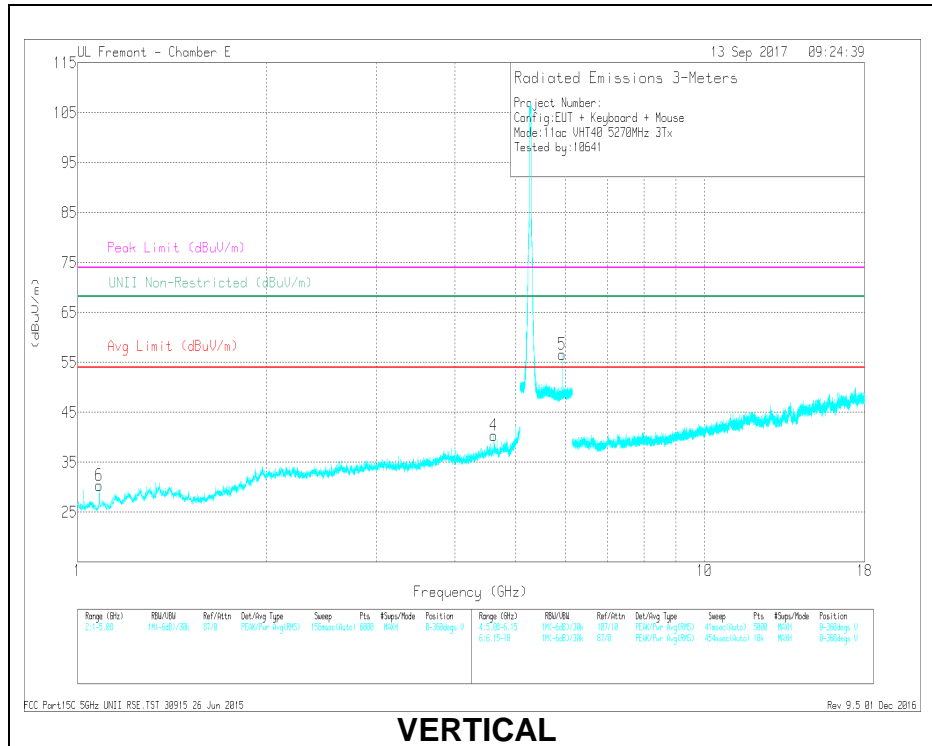

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.083	46.62	PK-U	26.4	-35.7	0	37.32	-	-	74	-36.68	-	-	122	107	H
	* 1.083	39.75	ADR	26.4	-35.7	.35	30.8	54	-23.2	-	-	-	-	122	107	H
4	* 4.611	42.02	PK-U	34.4	-29	0	47.42	-	-	74	-26.58	-	-	144	185	V
	* 4.611	33.22	ADR	34.4	-29	.35	38.97	54	-15.03	-	-	-	-	144	185	V
6	* 1.083	45.94	PK-U	26.4	-35.7	0	36.64	-	-	74	-37.36	-	-	349	382	V
	* 1.083	38.93	ADR	26.4	-35.7	.35	29.98	54	-24.02	-	-	-	-	349	382	V
3	* 15.811	38.64	PK-U	41.7	-23.1	0	57.24	-	-	74	-16.76	-	-	120	121	H
	* 15.813	26.4	ADR	41.7	-23.2	.35	45.25	54	-8.75	-	-	-	-	120	121	H
2	5.928	43.47	PK-U	35.2	-18.8	0	59.87	-	-	-	-	68.2	-8.33	94	146	H
5	5.929	43.52	PK-U	35.2	-18.8	0	59.92	-	-	-	-	68.2	-8.28	111	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

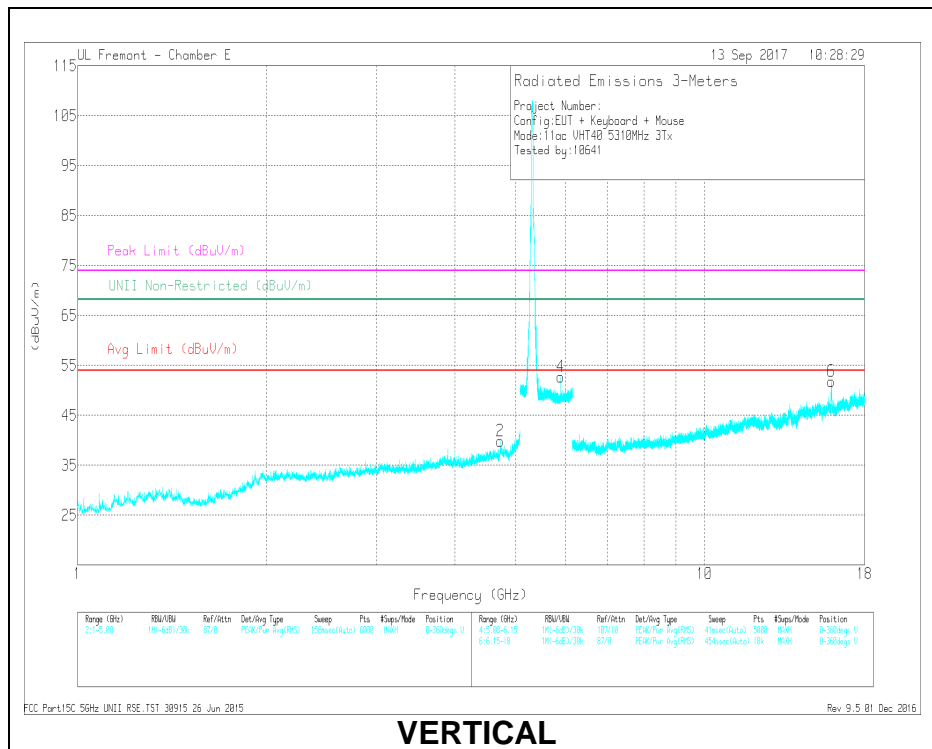

VERTICAL

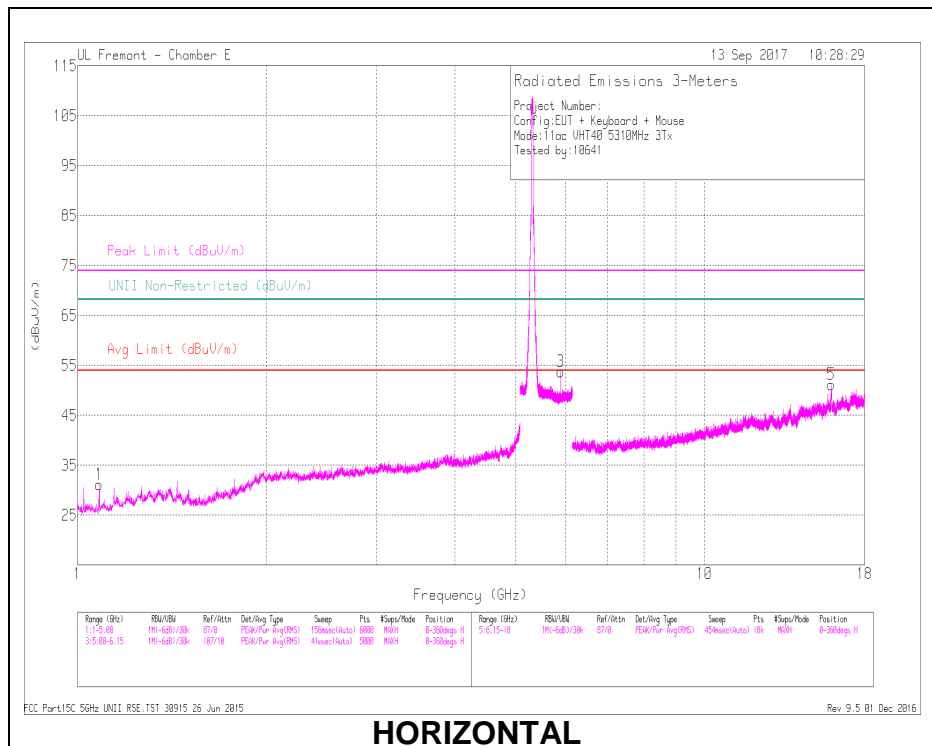

HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.083	46.26	PK-U	26.4	-35.7	0	36.96	-	-	74	-37.04	-	-	141	106	H
	* 1.083	38.28	ADR	26.4	-35.7	.35	29.33	54	-24.67	-	-	-	-	141	106	H
2	* 4.72	40.01	PK-U	34.4	-28.4	0	46.01	-	-	74	-27.99	-	-	345	263	V
	* 4.72	30.83	ADR	34.4	-28.4	.35	37.18	54	-16.82	-	-	-	-	345	263	V
5	* 15.921	40.14	PK-U	41.5	-23.3	0	58.34	-	-	74	-15.66	-	-	124	103	H
	* 15.924	28.58	ADR	41.5	-23.3	.35	47.13	54	-6.87	-	-	-	-	124	103	H
6	* 15.936	41.86	PK-U	41.5	-23.3	0	60.06	-	-	74	-13.94	-	-	147	119	V
	* 15.936	30.26	ADR	41.5	-23.3	.35	48.81	54	-5.19	-	-	-	-	147	119	V
3	5.9	41.77	PK-U	35.2	-18.8	0	58.17	-	-	-	-	68.2	-10.03	293	267	H
4	5.9	41.57	PK-U	35.2	-18.8	0	57.97	-	-	-	-	68.2	-10.23	123	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

5.1.6. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX Antenna WF4

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

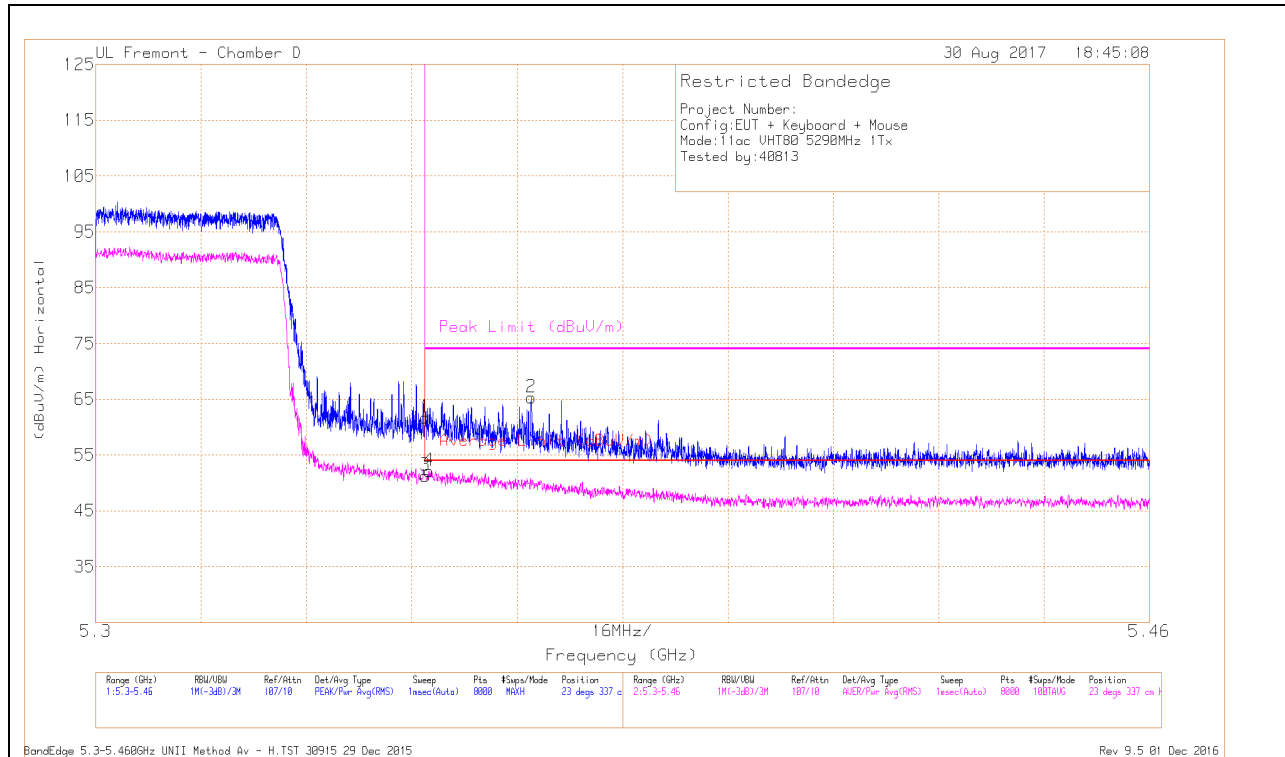


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.82	Pk	34.3	-18.4	0	61.72	-	-	74	-12.28	23	337	H
3	* 5.35	35.2	RMS	34.3	-18.4	.2	51.3	54	-2.7	-	-	23	337	H
4	* 5.351	36.04	RMS	34.3	-18.4	.2	52.14	54	-1.86	-	-	23	337	H
2	* 5.366	49.46	Pk	34.3	-18.4	0	65.36	-	-	74	-8.64	23	337	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

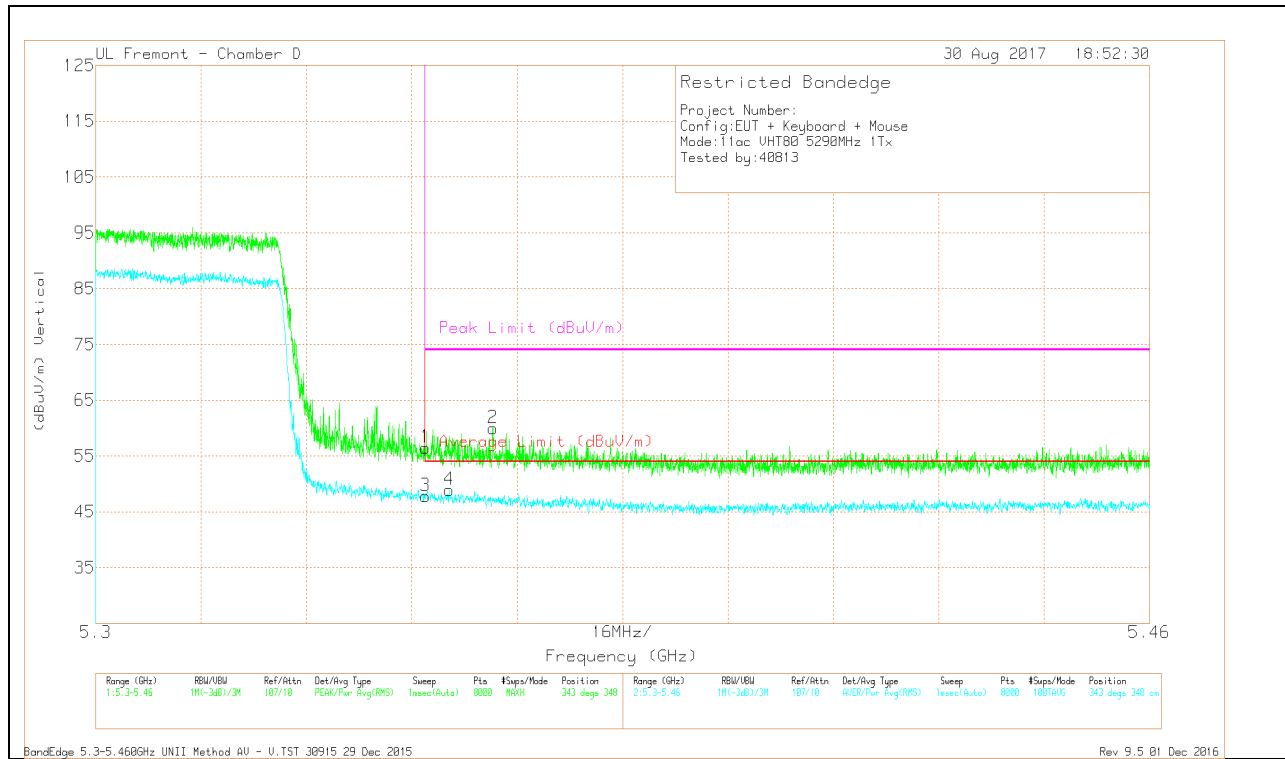


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.59	Pk	34.3	-18.4	0	56.49	-	-	74	-17.51	343	348	V
3	* 5.35	31.75	RMS	34.3	-18.4	.2	47.85	54	-6.15	-	-	343	348	V
4	* 5.354	32.77	RMS	34.3	-18.4	.2	48.87	54	-5.13	-	-	343	348	V
2	* 5.36	44.12	Pk	34.3	-18.4	0	60.02	-	-	74	-13.98	343	348	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna WF3

BANEDGE (MID CHANNEL)

HORIZONTAL RESULT

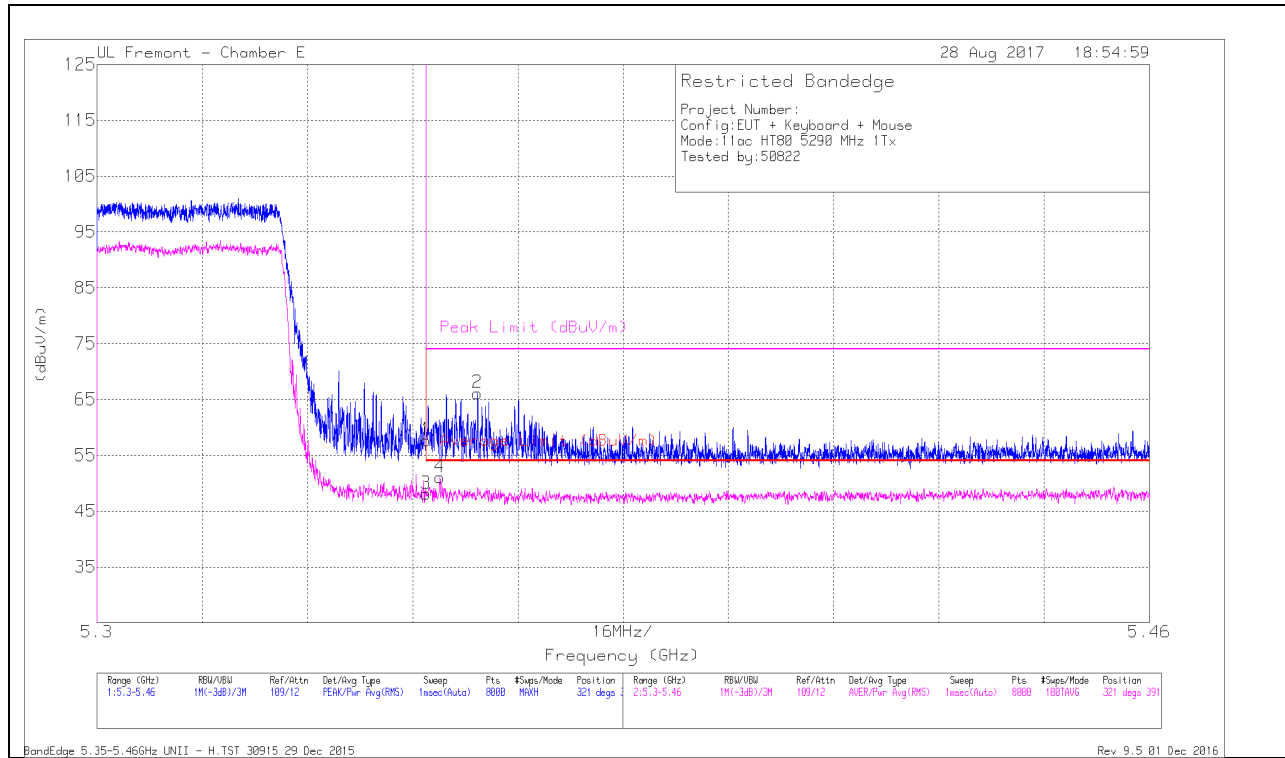


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.58	Pk	35	-18.9	0	57.68	-	-	74	-16.32	321	391	H
2	* 5.358	50.04	Pk	35	-18.9	0	66.14	-	-	74	-7.86	321	391	H
3	* 5.35	31.81	RMS	35	-18.9	.2	48.11	54	-5.89	-	-	321	391	H
4	* 5.352	34.76	RMS	35	-18.9	.2	51.06	54	-2.94	-	-	321	391	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

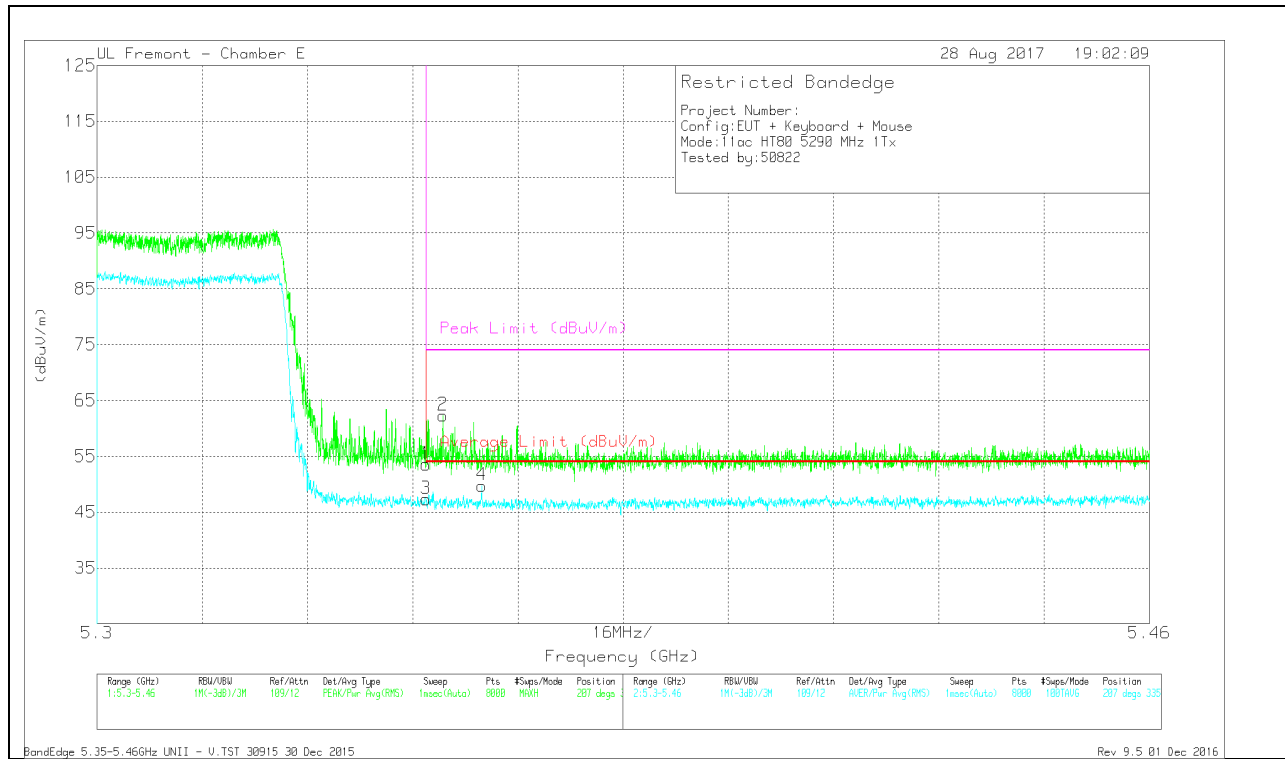


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.47	Pk	35	-18.9	0	53.57	-	-	74	-20.43	207	335	V
2	* 5.353	46.25	Pk	35	-18.9	0	62.35	-	-	74	-11.65	207	335	V
3	* 5.35	31.24	RMS	35	-18.9	.2	47.12	54	-6.88	-	-	207	335	V
4	* 5.358	33.67	RMS	35	-18.9	.2	49.57	54	-4.43	-	-	207	335	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna WF2

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

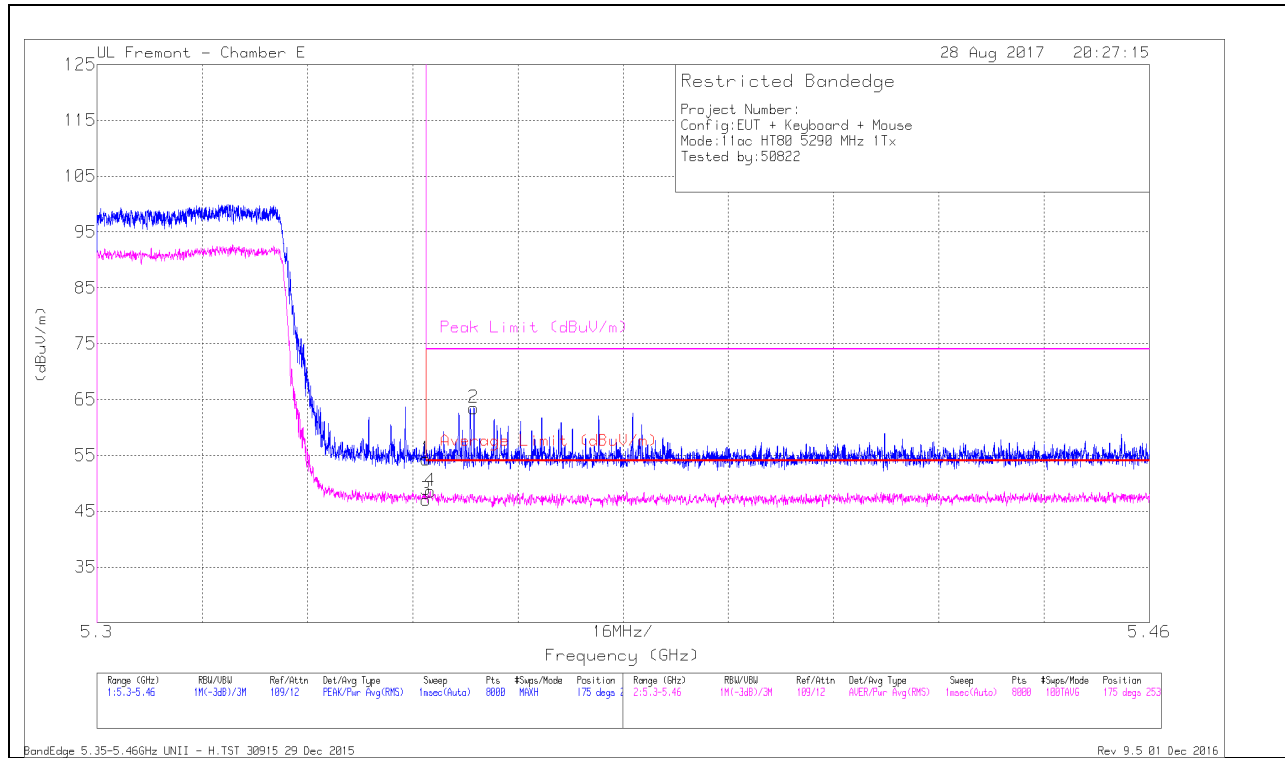


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.22	Pk	35	-18.9	0	54.32	-	-	74	-19.68	175	253	H
2	* 5.357	47.38	Pk	35	-18.9	0	63.48	-	-	74	-10.52	175	253	H
3	* 5.35	30.75	RMS	35	-18.9	.2	47.05	54	-6.95	-	-	175	253	H
4	* 5.351	32.27	RMS	35	-18.9	.2	48.57	54	-5.43	-	-	175	253	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

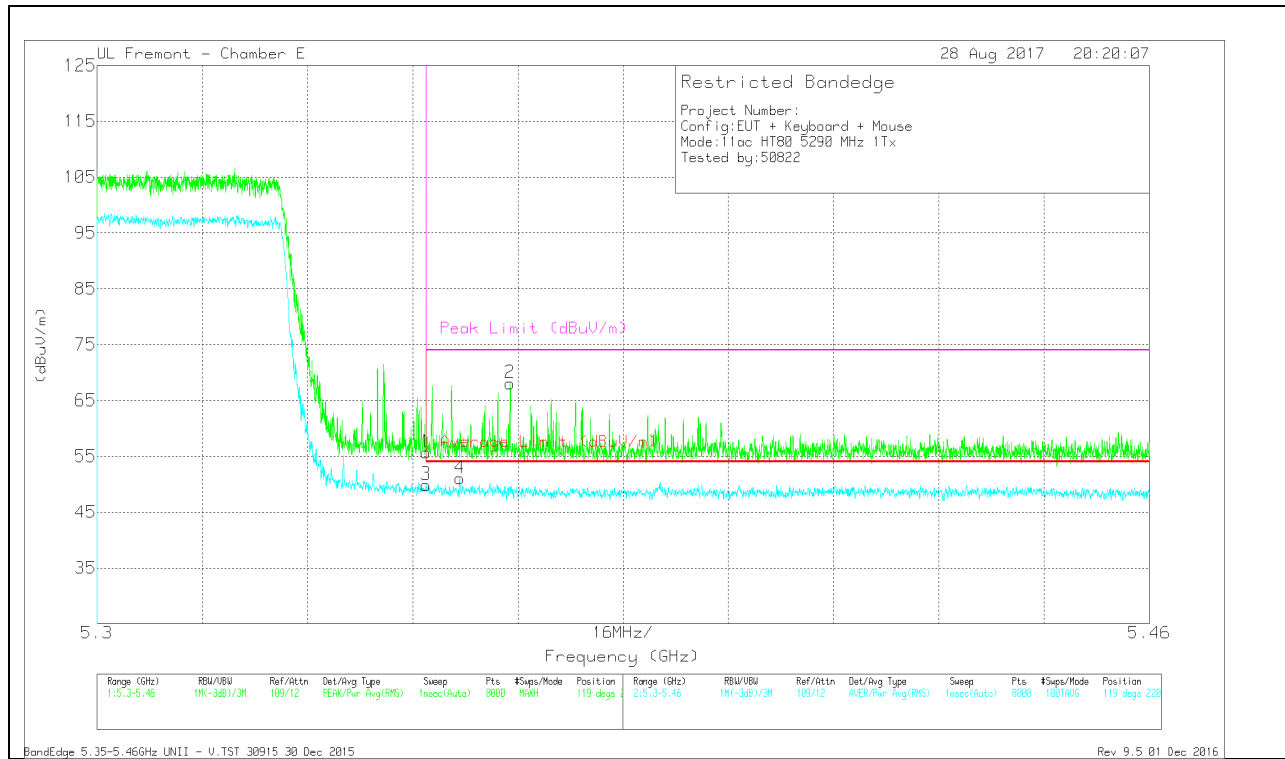


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.61	Pk	35	-18.9	0	55.71	-	-	74	-18.29	119	220	V
2	* 5.363	52	Pk	35	-18.9	0	68.1	-	-	74	-5.9	119	220	V
3	* 5.35	33.58	RMS	35	-18.9	.2	49.88	54	-4.12	-	-	119	220	V
4	* 5.355	34.76	RMS	35	-18.9	.2	51.06	54	-2.94	-	-	119	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF3 CDD Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

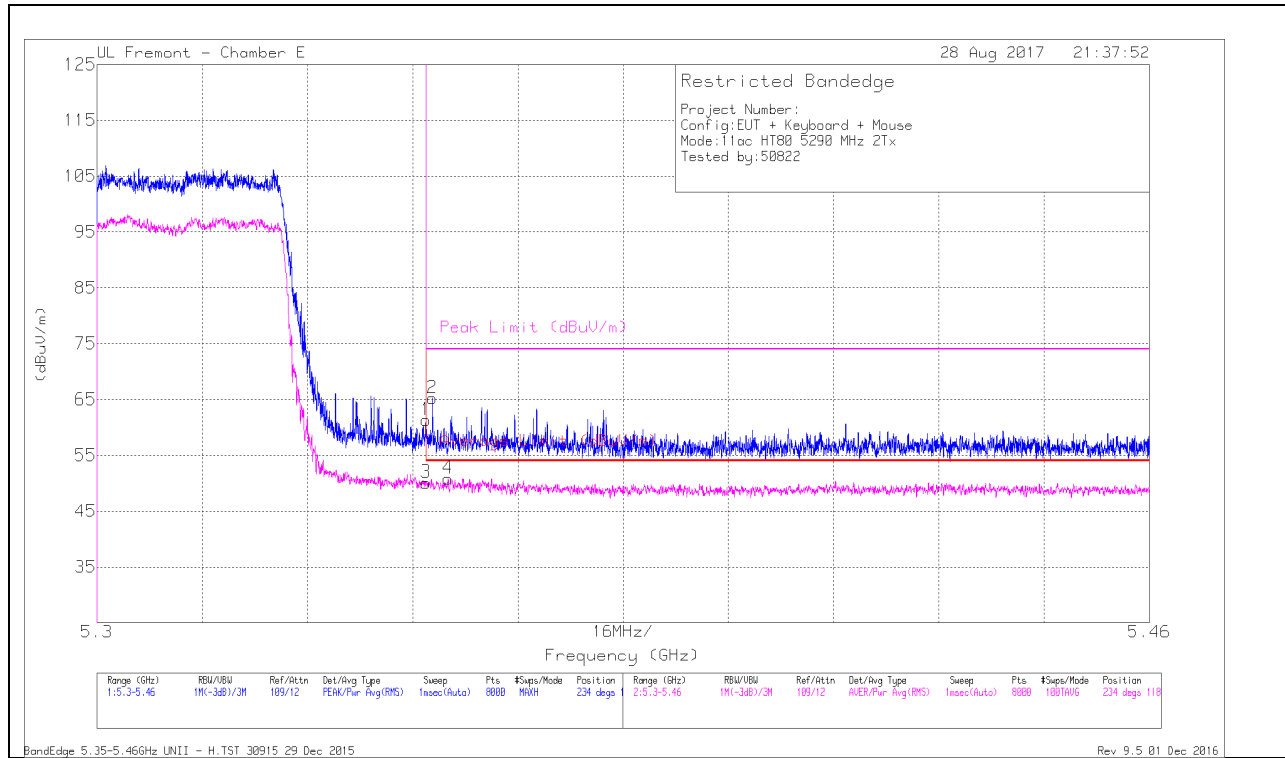


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.23	Pk	35	-18.9	0	61.33	-	-	74	-12.67	234	118	H
2	* 5.351	49.14	Pk	35	-18.9	0	65.24	-	-	74	-8.76	234	118	H
3	* 5.35	34	RMS	35	-18.9	.33	50.43	54	-3.57	-	-	234	118	H
4	* 5.353	34.74	RMS	35	-18.9	.33	51.17	54	-2.83	-	-	234	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

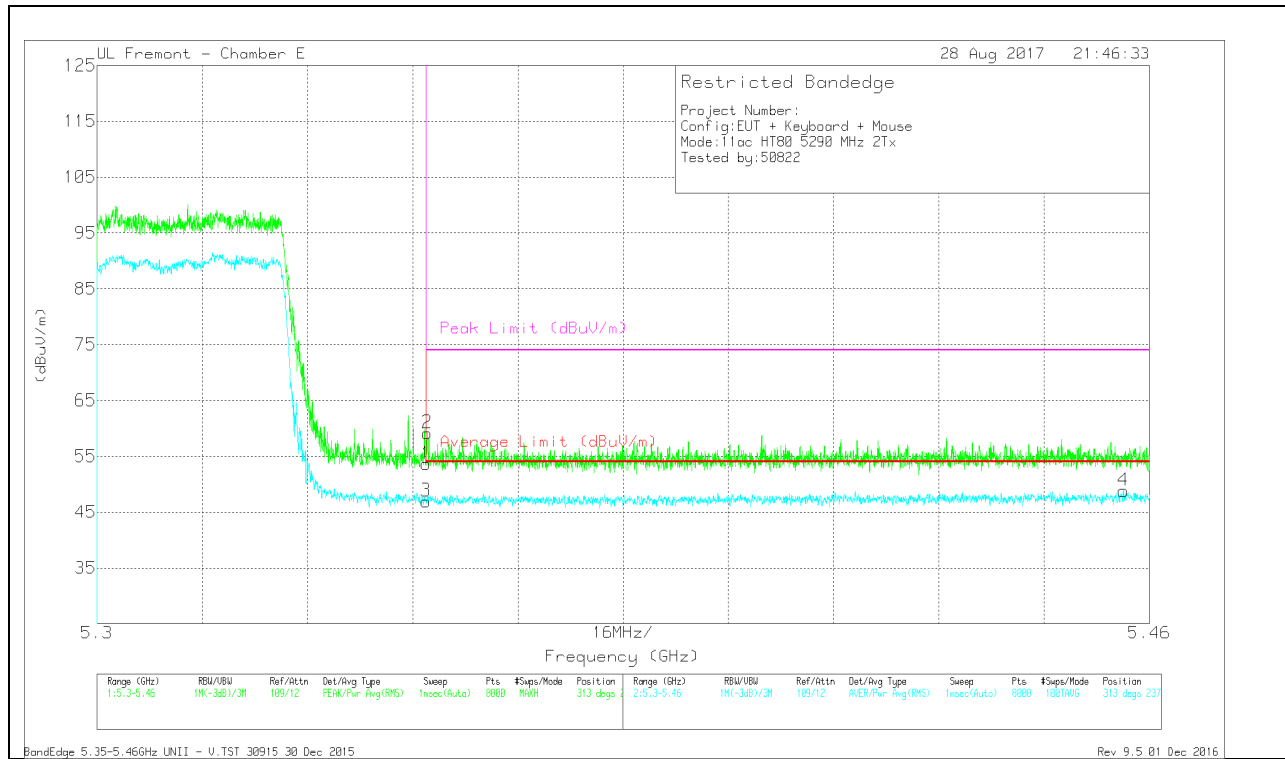


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.52	Pk	35	-18.9	0	53.62	-	-	74	-20.38	313	237	V
2	* 5.35	43.05	Pk	35	-18.9	0	59.15	-	-	74	-14.85	313	237	V
3	* 5.35	30.52	RMS	35	-18.9	.33	46.95	54	-7.05	-	-	313	237	V
4	* 5.456	32.29	RMS	35.1	-18.9	.33	48.82	54	-5.18	-	-	313	237	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF3 SDM Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

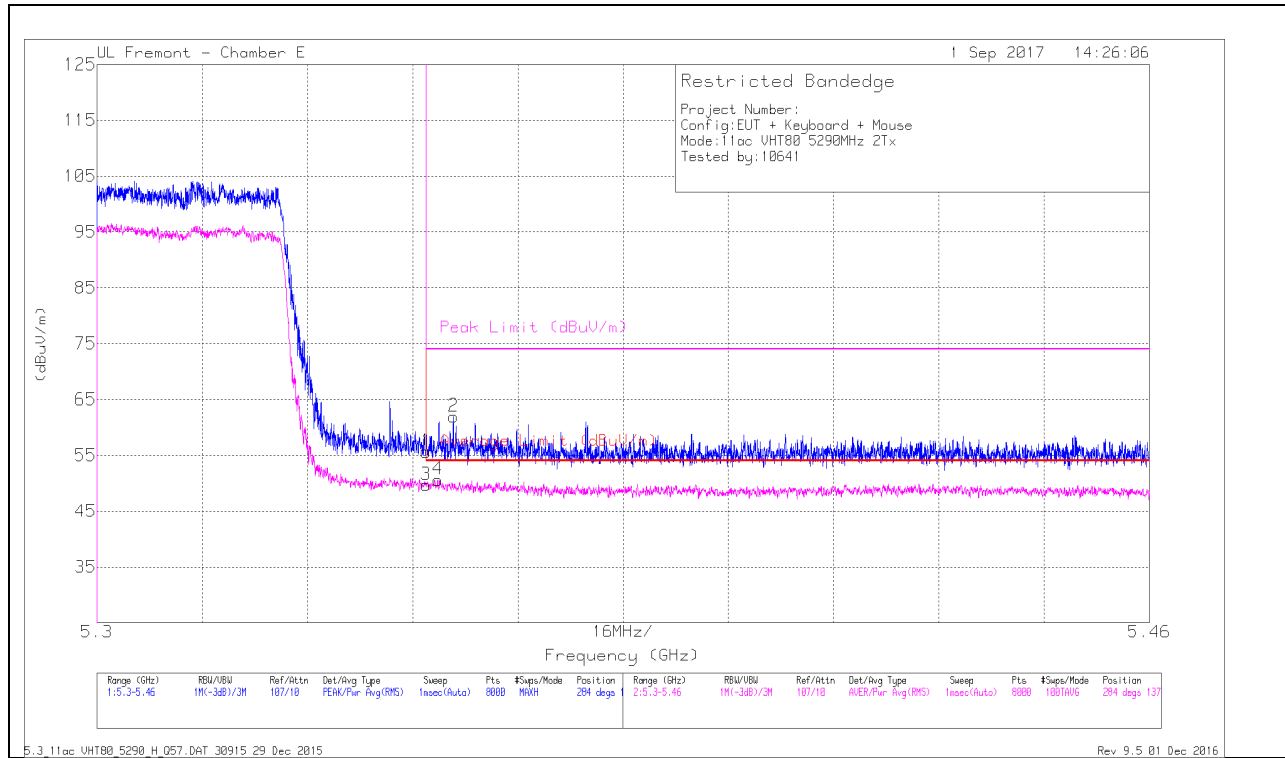


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.66	Pk	35	-20	0	55.66	-	-	74	-18.34	284	137	H
3	* 5.35	34.32	RMS	35	-20	.34	49.66	54	-4.34	-	-	284	137	H
4	* 5.352	35.24	RMS	35	-20	.34	50.58	54	-3.42	-	-	284	137	H
2	* 5.354	46.95	Pk	35	-20	0	61.95	-	-	74	-12.05	284	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

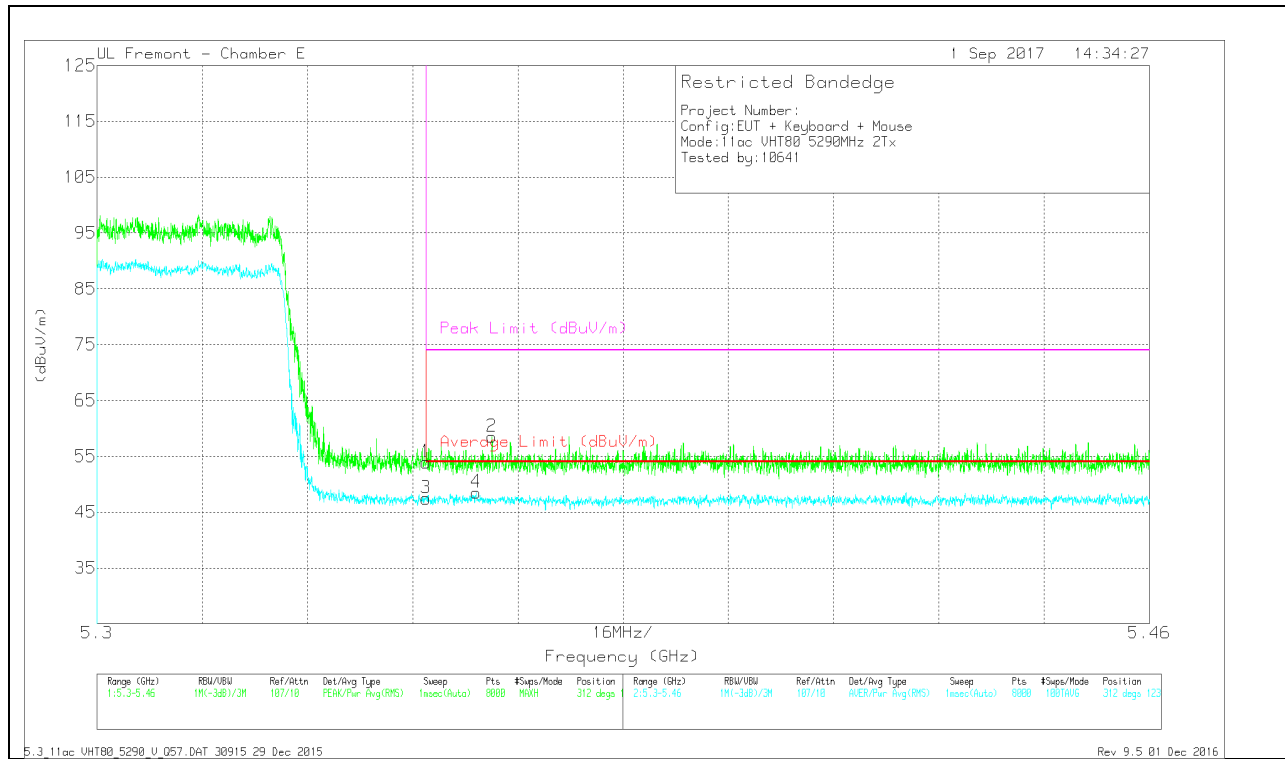


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.95	Pk	35	-20	0	53.95	-	-	74	-20.05	312	123	V
3	* 5.35	32.08	RMS	35	-20	.34	47.42	54	-6.58	-	-	312	123	V
4	* 5.358	33.12	RMS	35	-20	.34	48.46	54	-5.54	-	-	312	123	V
2	* 5.36	43.51	Pk	35	-20	0	58.51	-	-	74	-15.49	312	123	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF3 BF Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

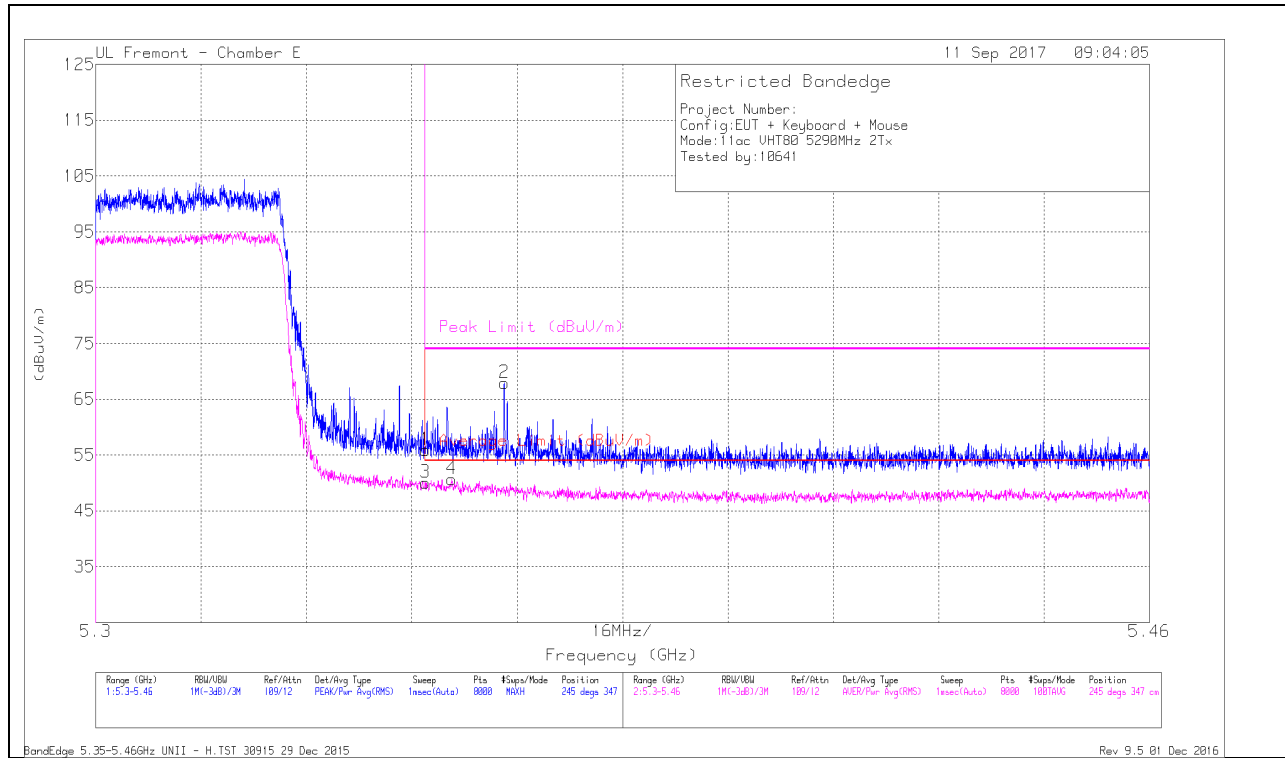


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.79	Pk	35	-18.9	0	55.89	-	-	74	-18.11	245	347	H
3	* 5.35	33.68	RMS	35	-18.9	.29	50.07	54	-3.93	-	-	245	347	H
4	* 5.354	34.28	RMS	35	-18.9	.29	50.67	54	-3.33	-	-	245	347	H
2	* 5.362	51.81	Pk	35	-18.9	0	67.91	-	-	74	-6.09	245	347	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

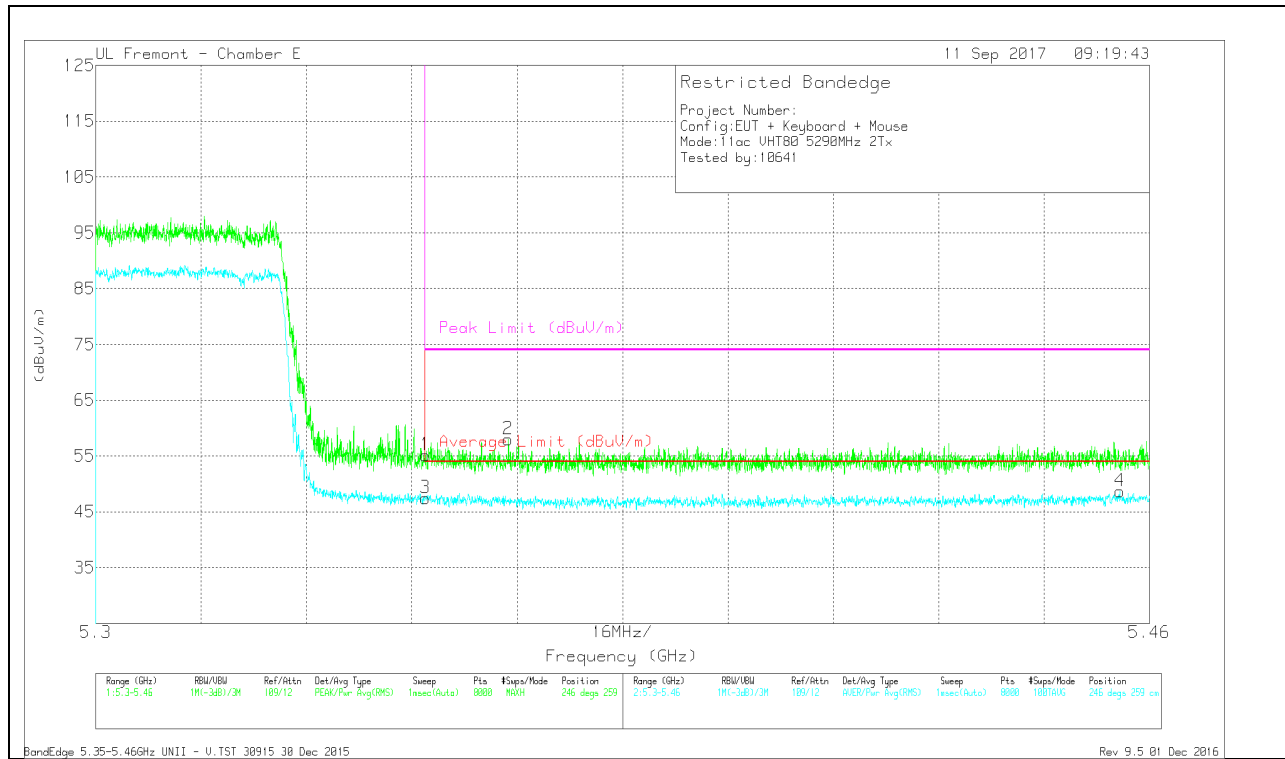


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.98	Pk	35	-18.9	0	55.08	-	-	74	-18.92	246	259	V
3	* 5.35	31.05	RMS	35	-18.9	.29	47.44	54	-6.56	-	-	246	259	V
2	* 5.363	41.86	Pk	35	-18.9	0	57.96	-	-	74	-16.04	246	259	V
4	* 5.455	32.19	RMS	35.1	-18.9	.29	48.58	54	-5.42	-	-	246	259	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF2 CDD Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

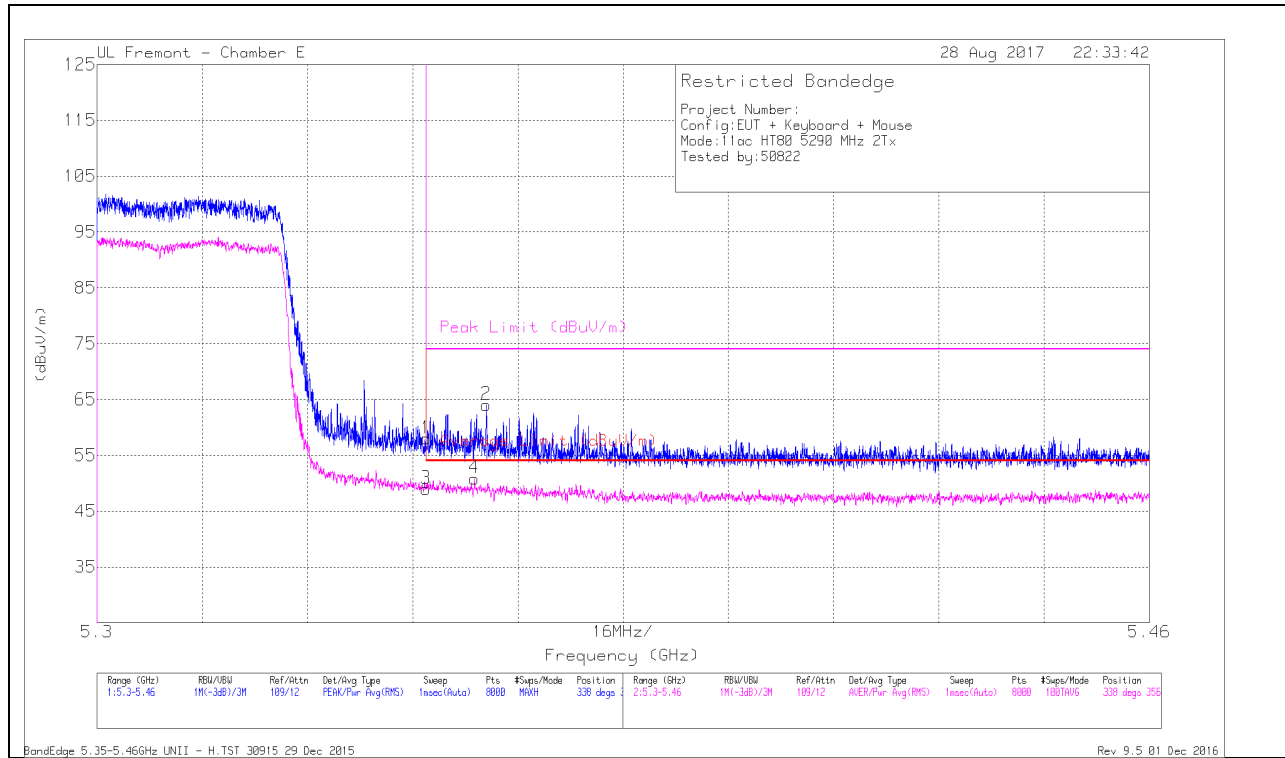


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.92	Pk	35	-18.9	0	58.02	-	-	74	-15.98	338	356	H
2	* 5.359	47.96	Pk	35	-18.9	0	64.06	-	-	74	-9.94	338	356	H
3	* 5.35	32.57	RMS	35	-18.9	.33	49	54	-5	-	-	338	356	H
4	* 5.357	34.45	RMS	35	-18.9	.33	50.88	54	-3.12	-	-	338	356	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

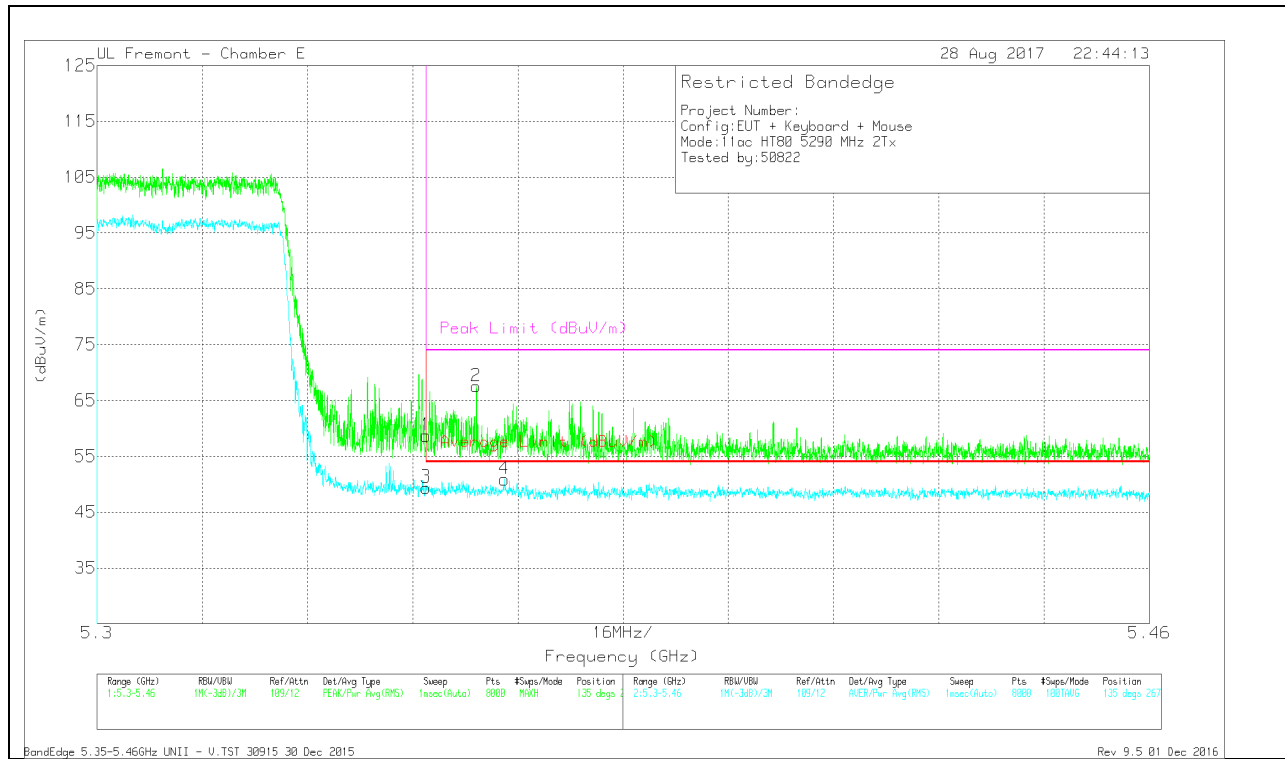


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.61	Pk	35	-18.9	0	58.71	-	-	74	-15.29	135	267	V
2	* 5.358	51.46	Pk	35	-18.9	0	67.56	-	-	74	-6.44	135	267	V
3	* 5.35	32.97	RMS	35	-18.9	.33	49.4	54	-4.6	-	-	135	267	V
4	* 5.362	34.46	RMS	35	-18.9	.33	50.89	54	-3.11	-	-	135	267	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF2 SDM Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

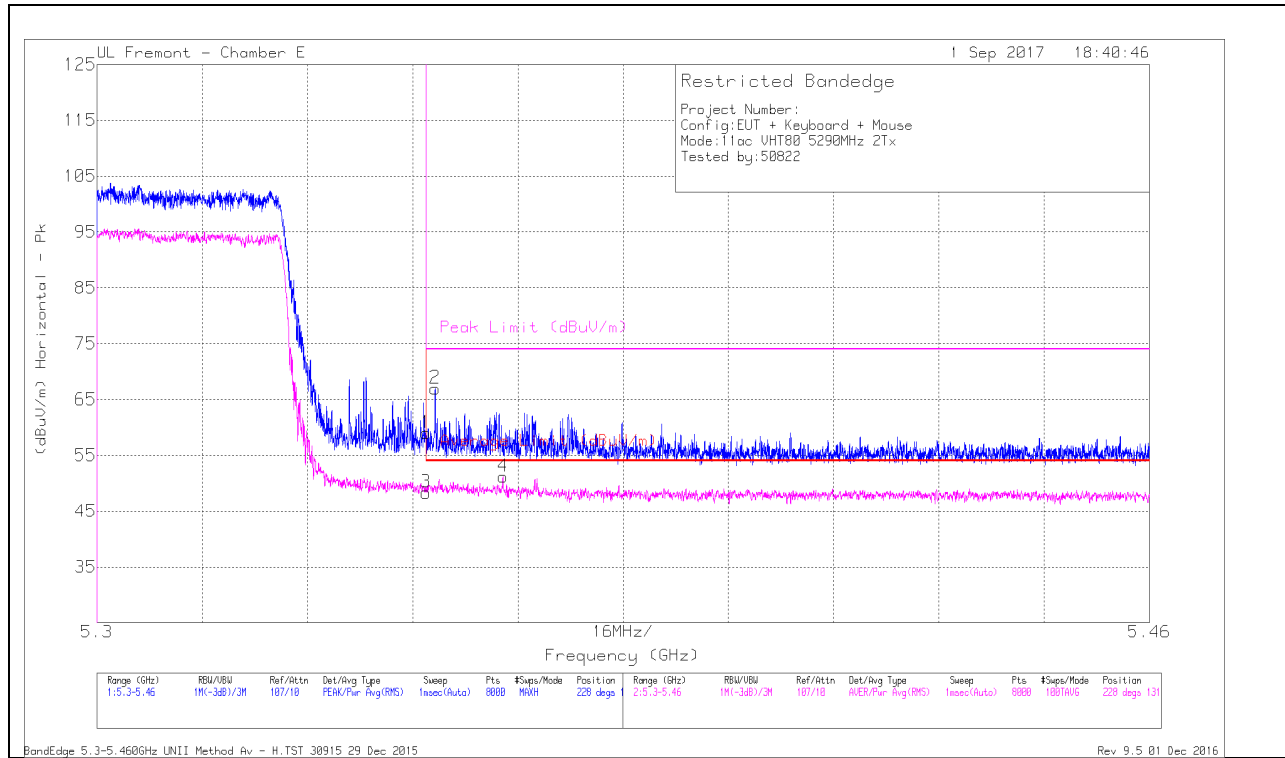


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.98	Pk	35	-20	0	58.98	-	-	74	-15.02	228	131	H
3	* 5.35	33	RMS	35	-20	.34	48.34	54	-5.66	-	-	228	131	H
2	* 5.351	51.99	Pk	35	-20	0	66.99	-	-	74	-7.01	228	131	H
4	* 5.362	35.85	RMS	35	-20	.34	51.19	54	-2.81	-	-	228	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

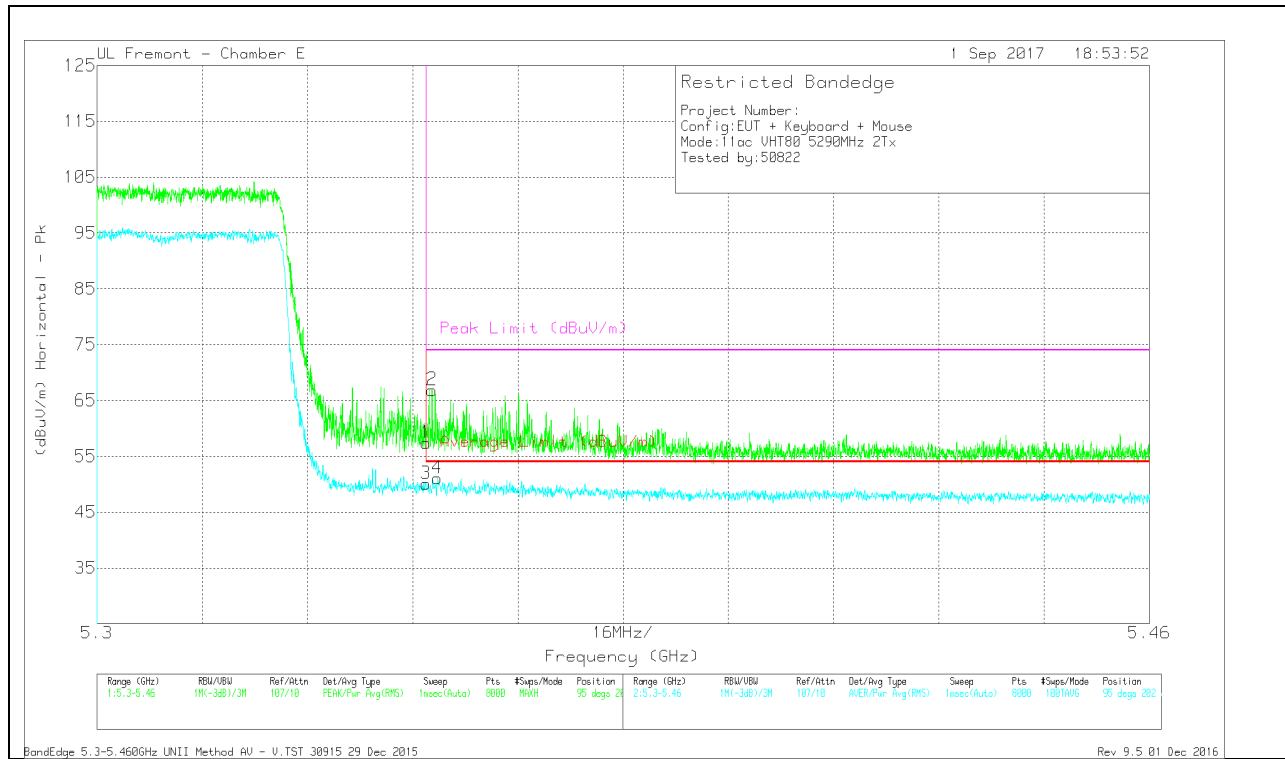


Marker	Frequen- cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Ftr/P ad (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.38	Pk	35	-20	0	57.38	-	-	74	-16.62	95	202	V
3	* 5.35	34.74	RMS	35	-20	.34	50.08	54	-3.92	-	-	95	202	V
2	* 5.351	51.86	Pk	35	-20	0	66.86	-	-	74	-7.14	95	202	V
4	* 5.352	35.71	RMS	35	-20	.34	51.05	54	-2.95	-	-	95	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF4 + Antenna WF2 BF Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

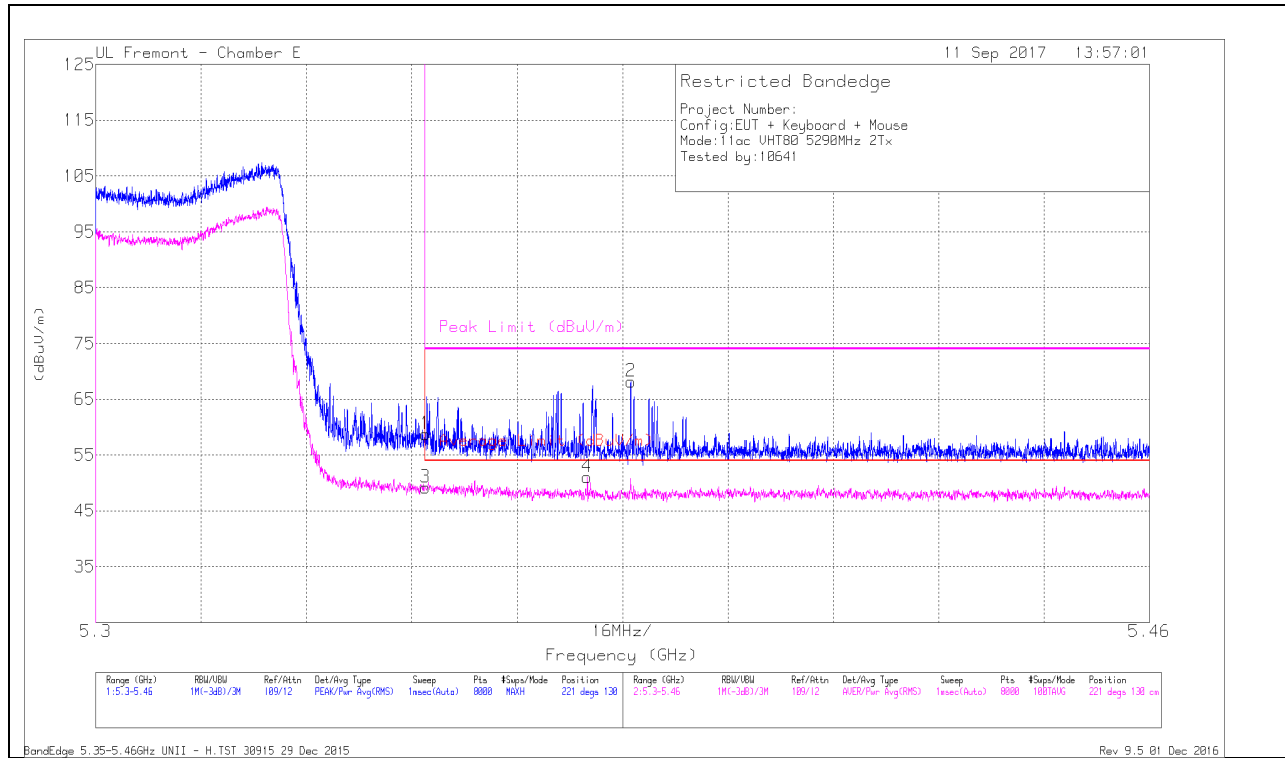


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.64	Pk	35	-18.9	0	58.74	-	-	74	-15.26	221	130	H
2	* 5.381	52.11	Pk	35	-18.9	0	68.21	-	-	74	-5.79	221	130	H
3	* 5.35	32.85	RMS	35	-18.9	.31	49.26	54	-4.74	-	-	221	130	H
4	* 5.375	34.69	RMS	35	-18.9	.31	51.10	54	-2.90	-	-	221	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

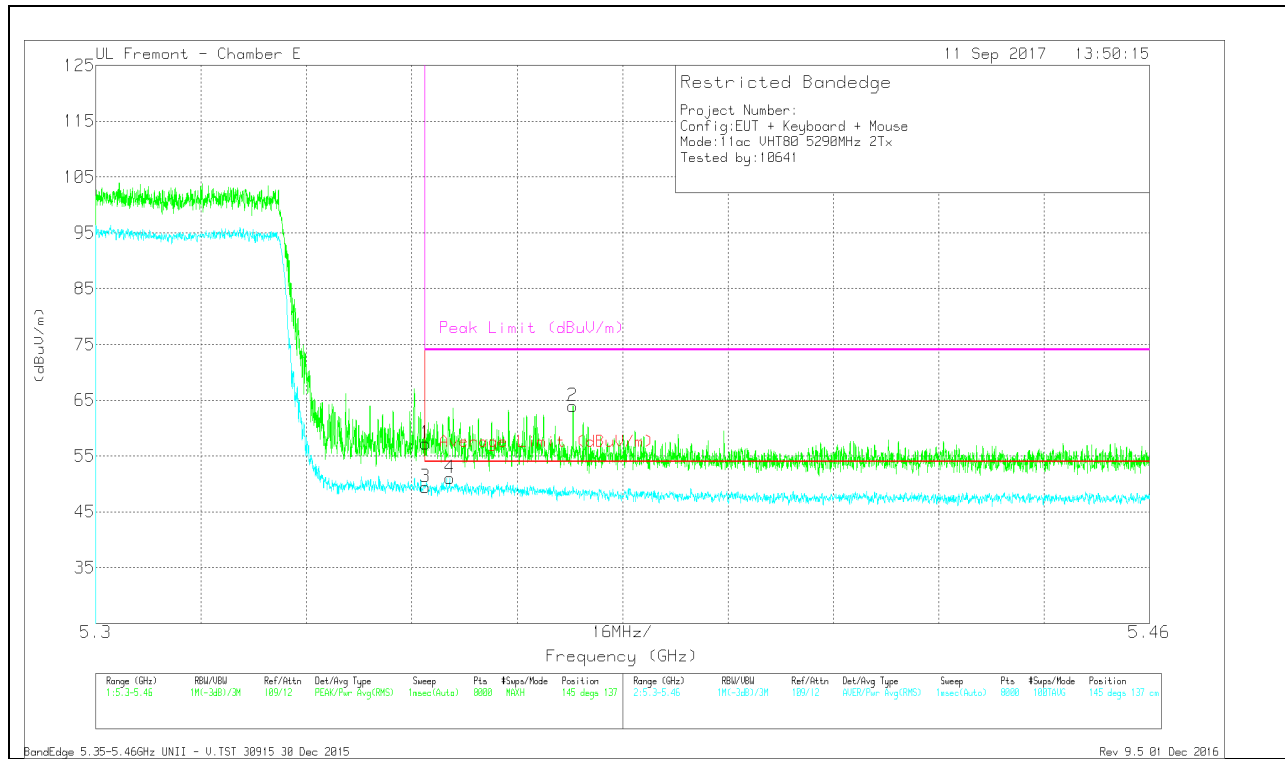


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.09	Pk	35	-18.9	0	57.19	-	-	74	-16.81	145	137	V
2	* 5.372	47.9	Pk	35	-18.9	0	64	-	-	74	-10	145	137	V
3	* 5.35	33.04	RMS	35	-18.9	.31	49.45	54	-4.55	-	-	145	137	V
4	* 5.354	34.73	RMS	35	-18.9	.31	51.14	54	-2.86	-	-	145	137	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF3 + Antenna WF2 CDD Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

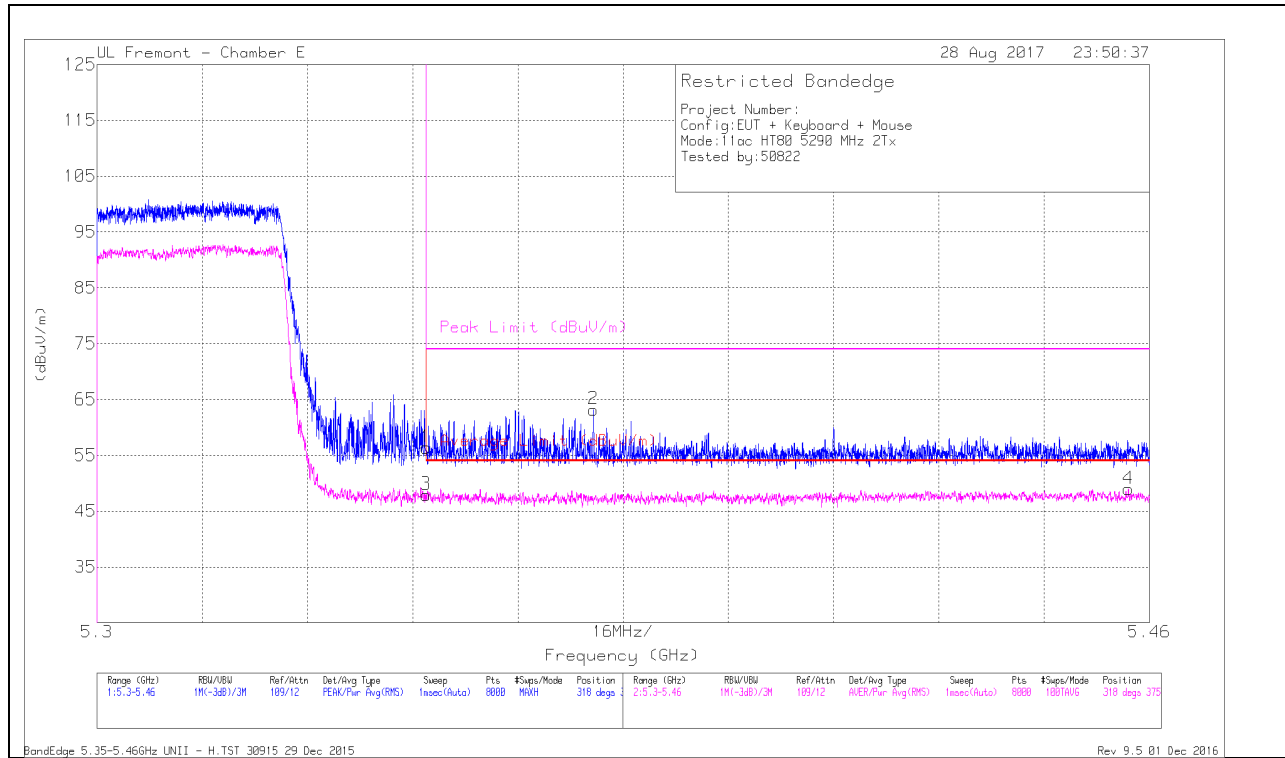


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.3	Pk	35	-18.9		56.4	-	-	74	-17.6	318	375	H
3	* 5.35	31.82	RMS	35	-18.9	0.33	48.25	54	-5.75	-	-	318	375	H
2	* 5.375	47.11	Pk	35	-18.9		63.21	-	-	74	-10.79	318	375	H
4	* 5.457	32.79	RMS	35.1	-18.9	0.33	49.32	54	-4.68	-	-	318	375	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

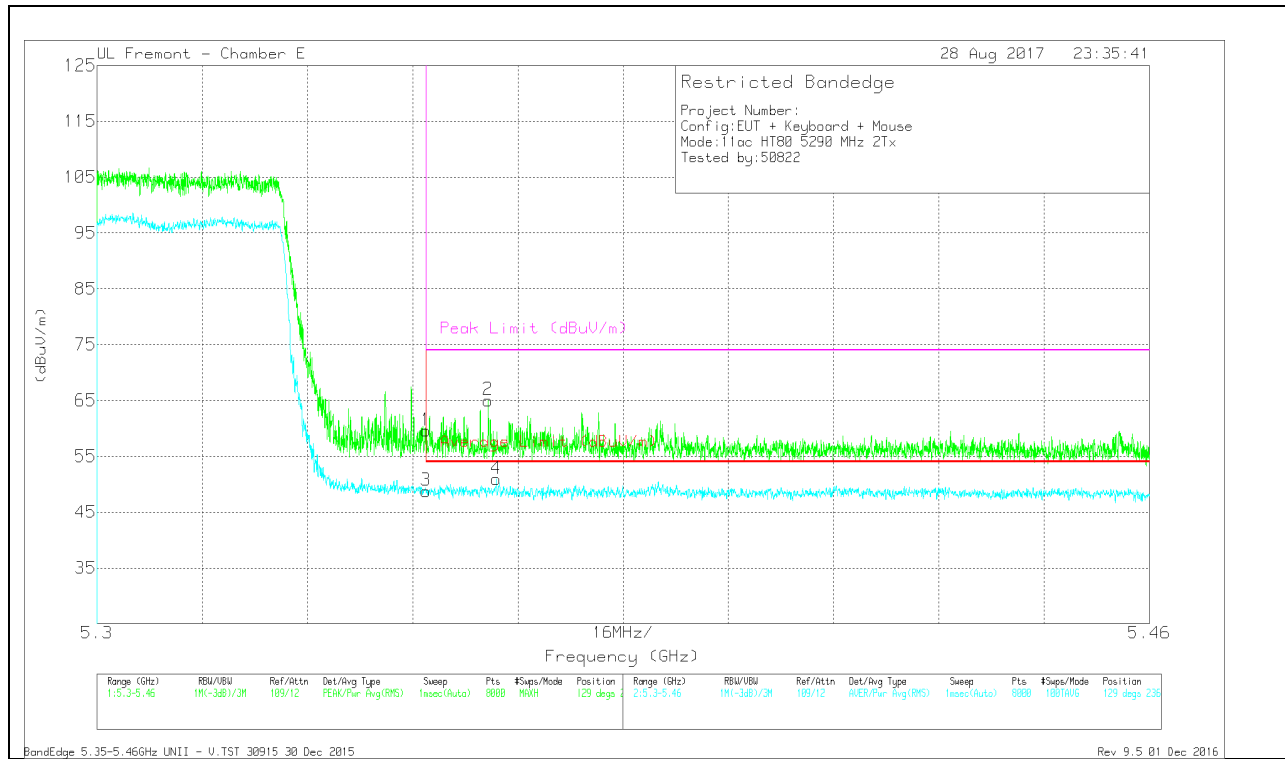


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.52	Pk	35	-18.9		59.62	-	-	74	-14.38	129	236	V
3	* 5.35	32.7	RMS	35	-18.9	0.33	49.13	54	-4.87	-	-	129	236	V
2	* 5.359	48.95	Pk	35	-18.9		65.05	-	-	74	-8.95	129	236	V
4	* 5.361	34.82	RMS	35	-18.9	0.33	51.25	54	-2.75	-	-	129	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF3 + Antenna WF2 SDM Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

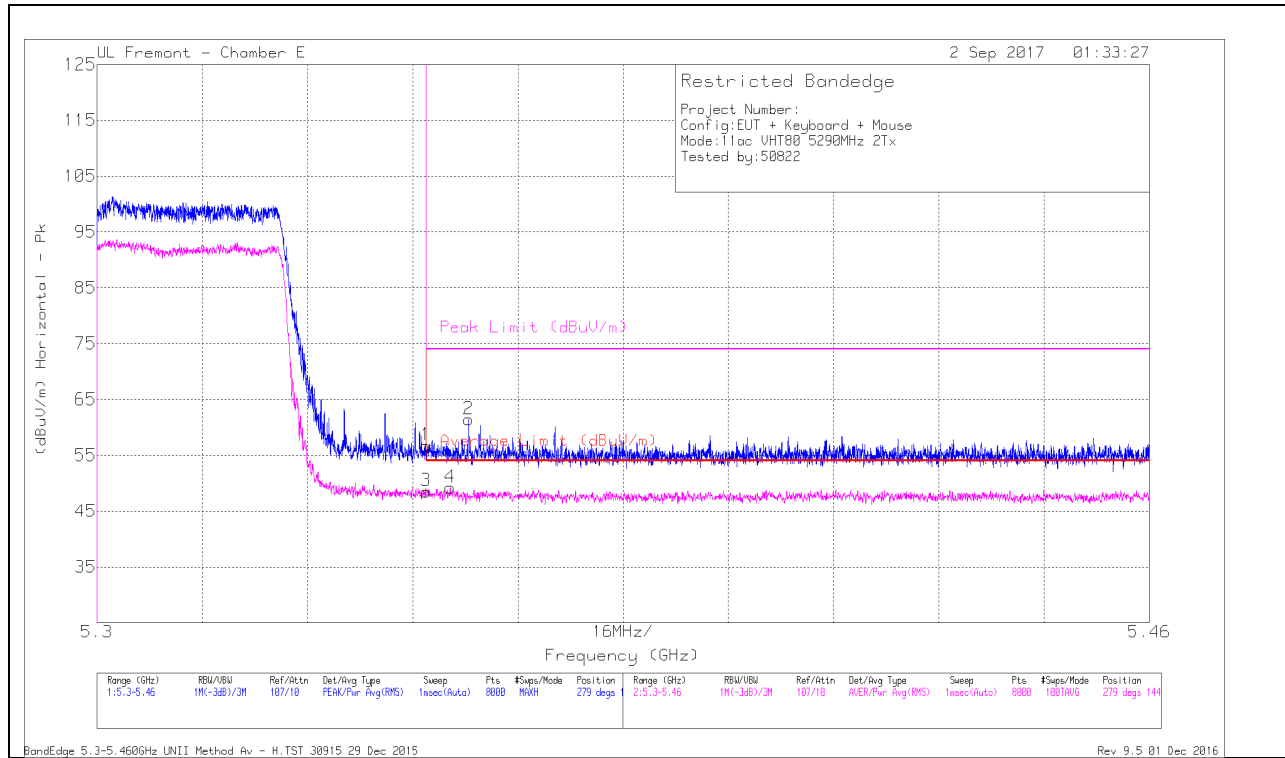


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.74	Pk	35	-20	0	56.74	-	-	74	-17.26	279	144	H
3	* 5.35	33.22	RMS	35	-20	.34	48.561	54	-5.44	-	-	279	144	H
4	* 5.354	33.88	RMS	35	-20	.34	49.22	54	-4.78	-	-	279	144	H
2	* 5.357	46.44	Pk	35	-20	0	61.44	-	-	74	-12.56	279	144	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

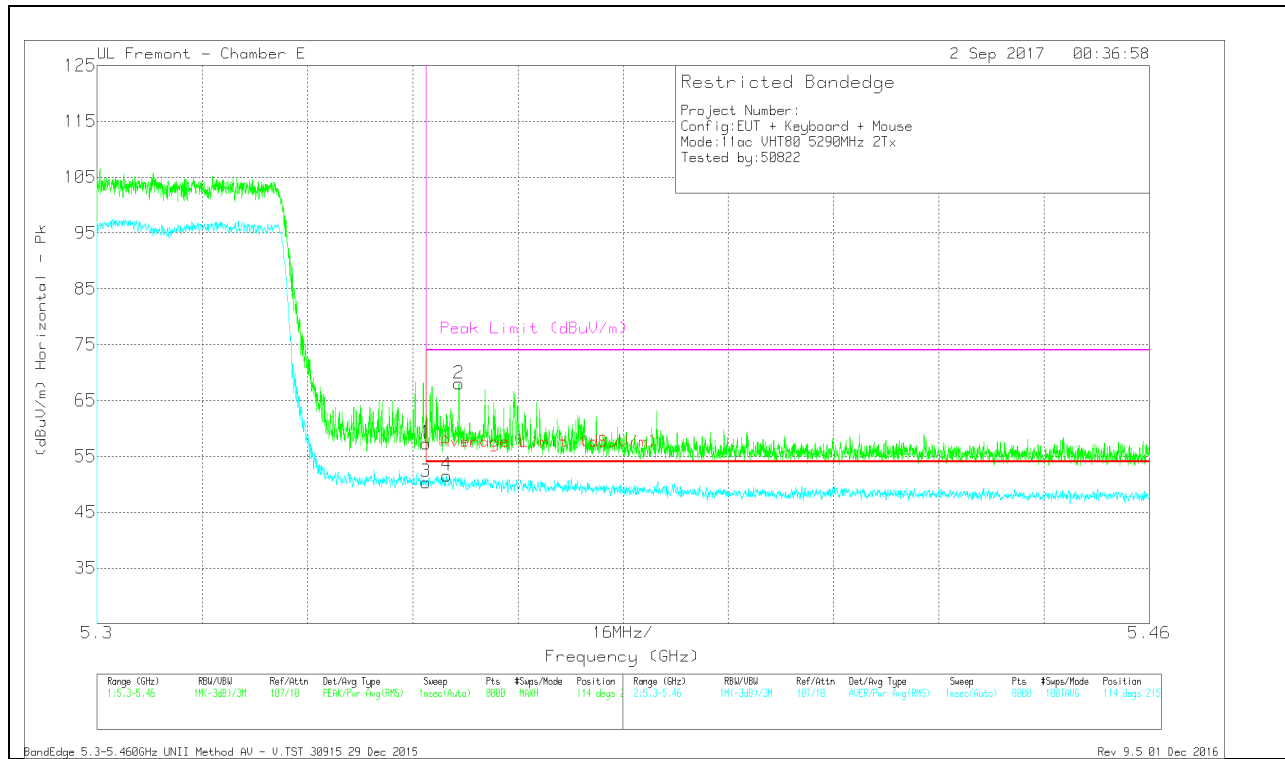


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Ftr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.34	Pk	35	-20	0	57.34	-	-	74	-16.66	114	215	V
3	* 5.35	35.05	RMS	35	-20	.34	50.39	54	-3.61	-	-	114	215	V
4	* 5.353	36.26	RMS	35	-20	.34	51.60	54	-2.40	-	-	114	215	V
2	* 5.355	53.01	Pk	35	-20	0	68.01	-	-	74	-5.99	114	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna WF3 + Antenna WF2 BF Mode

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

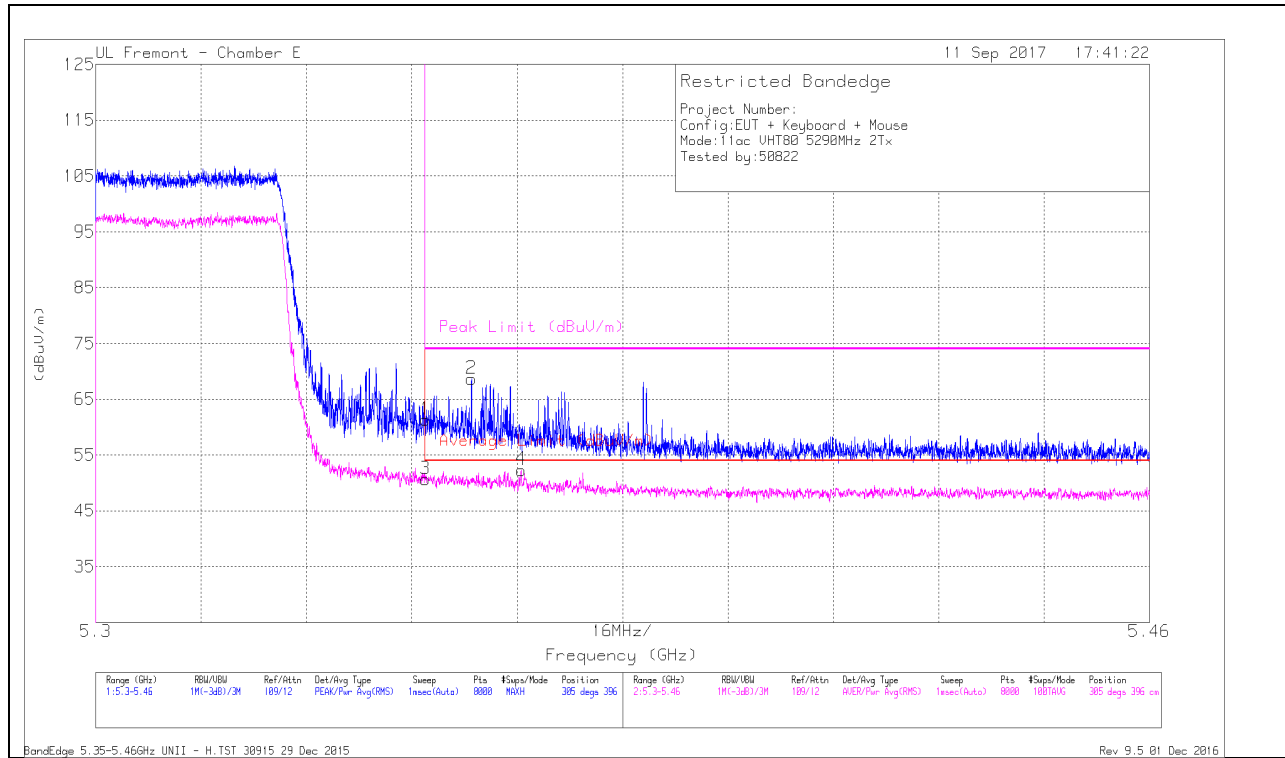

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.26	Pk	35	-18.9	0	61.36	-	-	74	-12.64	305	396	H
3	* 5.35	34.34	RMS	35	-18.9	.31	50.75	54	-3.25	-	-	305	396	H
2	* 5.357	52.55	Pk	35	-18.9	0	68.65	-	-	74	-5.35	305	396	H
4	* 5.365	35.99	RMS	35	-18.9	.31	52.40	54	-1.60	-	-	305	396	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

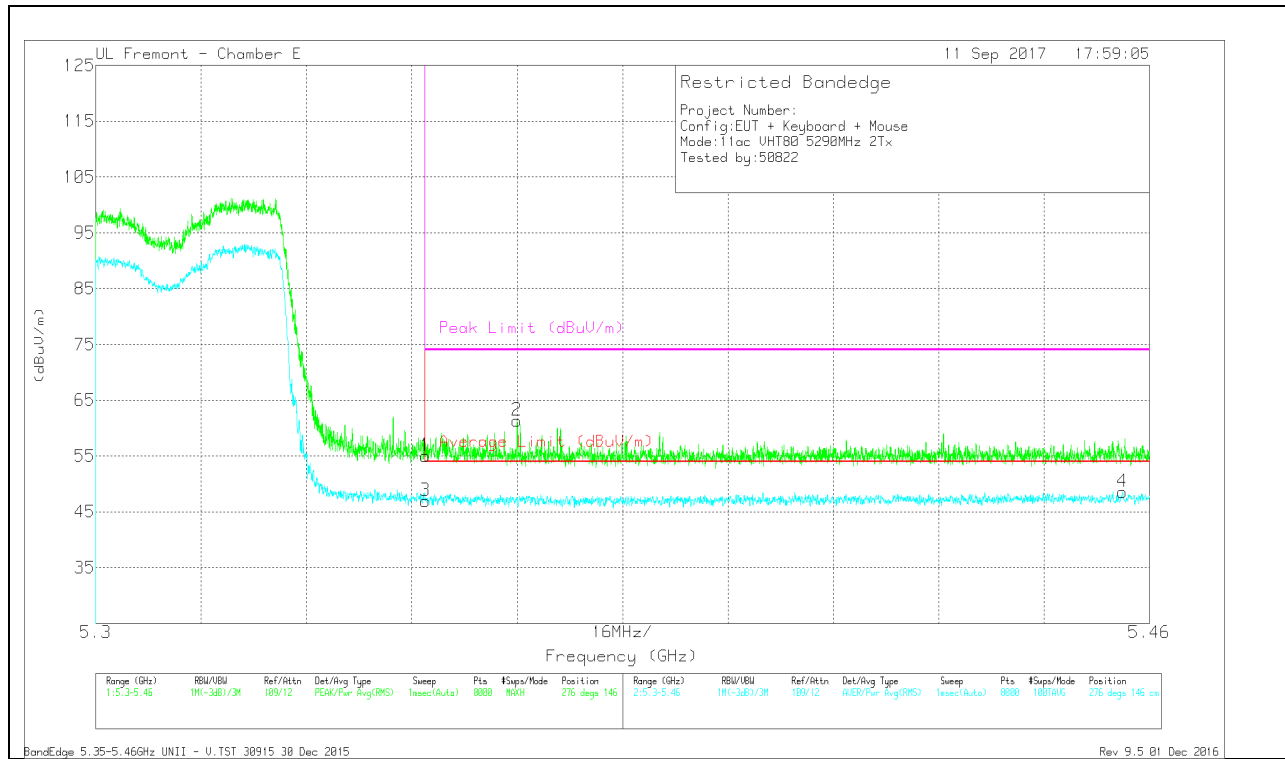


Marker	Frequen- cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.96	Pk	35	-18.9	0	55.06	-	-	74	-18.94	276	146	V
3	* 5.35	30.57	RMS	35	-18.9	.31	46.98	54	-7.02	-	-	276	146	V
2	* 5.364	45.29	Pk	35	-18.9	0	61.39	-	-	74	-12.61	276	146	V
4	* 5.456	32.14	RMS	35.1	-18.9	.31	48.65	54	-5.35	-	-	276	146	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 CDD Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

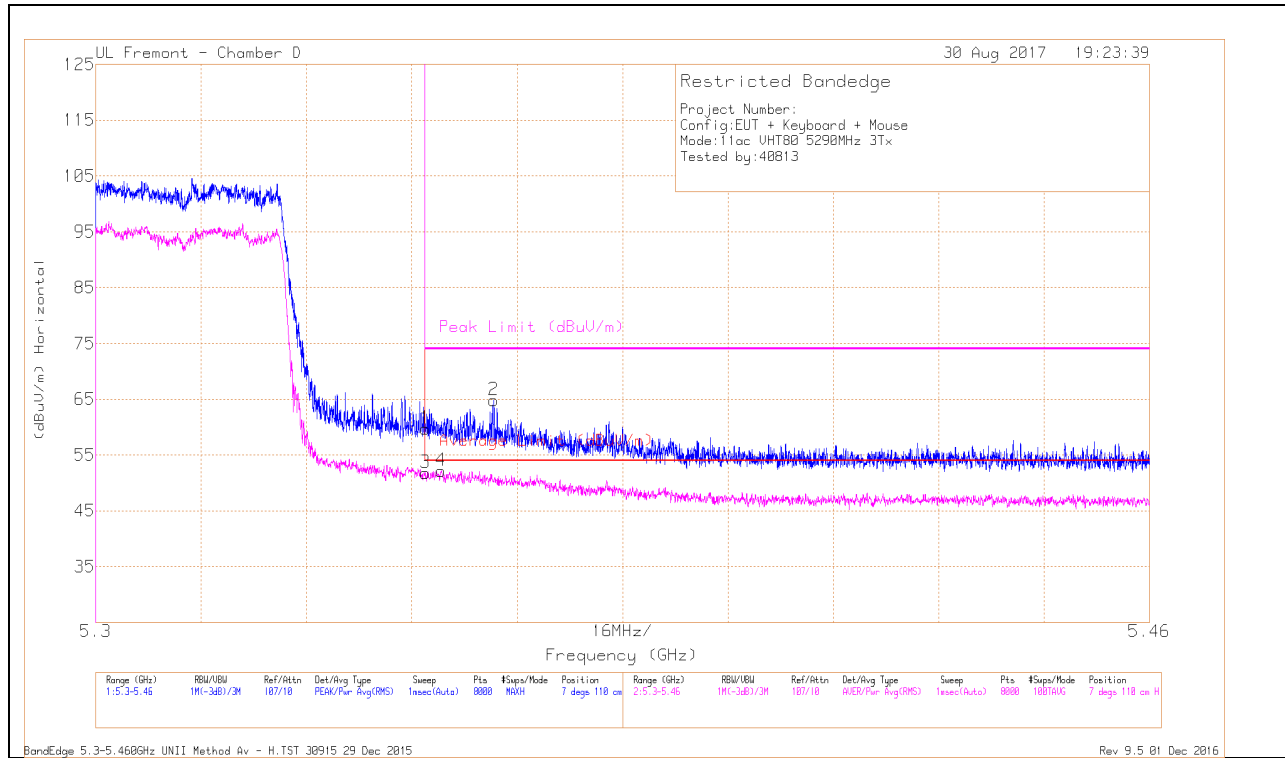


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.8	Pk	34.3	-18.4	0	59.7	-	-	74	-14.3	7	110	H
3	* 5.35	35.38	RMS	34.3	-18.4	.46	51.74	54	-2.26	-	-	7	110	H
4	* 5.352	35.83	RMS	34.3	-18.4	.46	52.19	54	-1.81	-	-	7	110	H
2	* 5.36	48.89	Pk	34.3	-18.4	0	64.79	-	-	74	-9.21	7	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

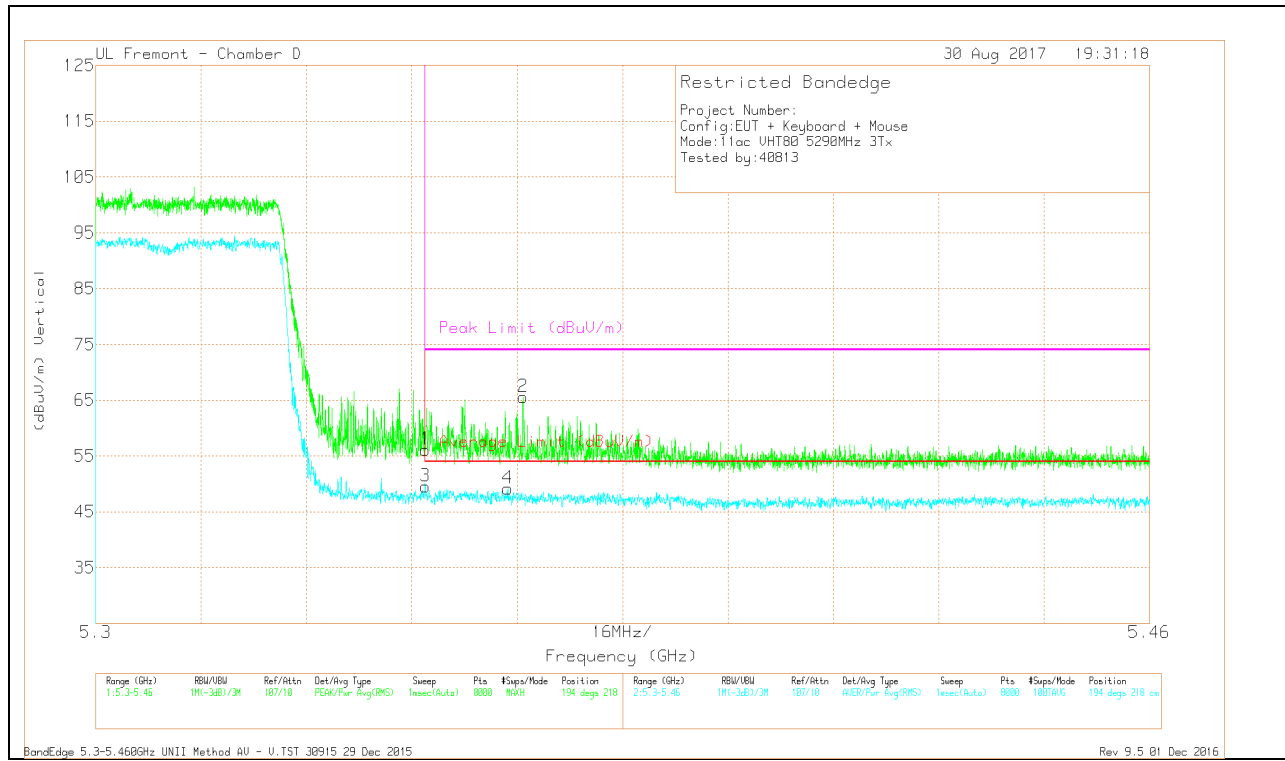


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.22	Pk	34.3	-18.4	0	56.12	-	-	74	-17.88	194	218	V
3	* 5.35	33.21	RMS	34.3	-18.4	.46	49.57	54	-4.43	-	-	194	218	V
4	* 5.363	32.85	RMS	34.3	-18.4	.46	49.21	54	-4.79	-	-	194	218	V
2	* 5.365	49.61	Pk	34.3	-18.4	0	65.51	-	-	74	-8.49	194	218	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

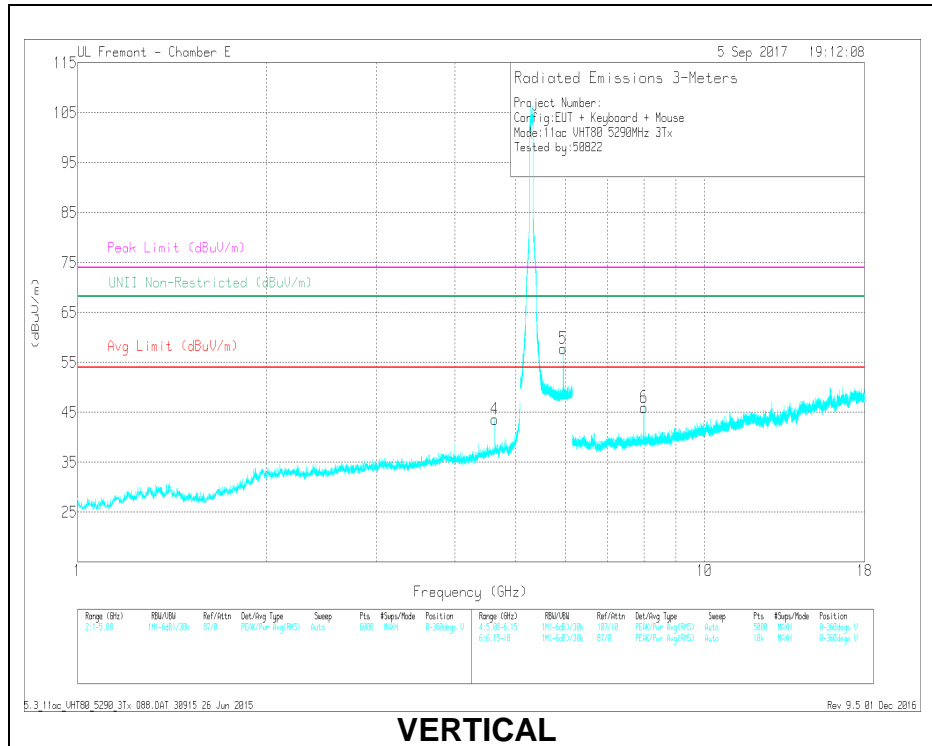

VERTICAL

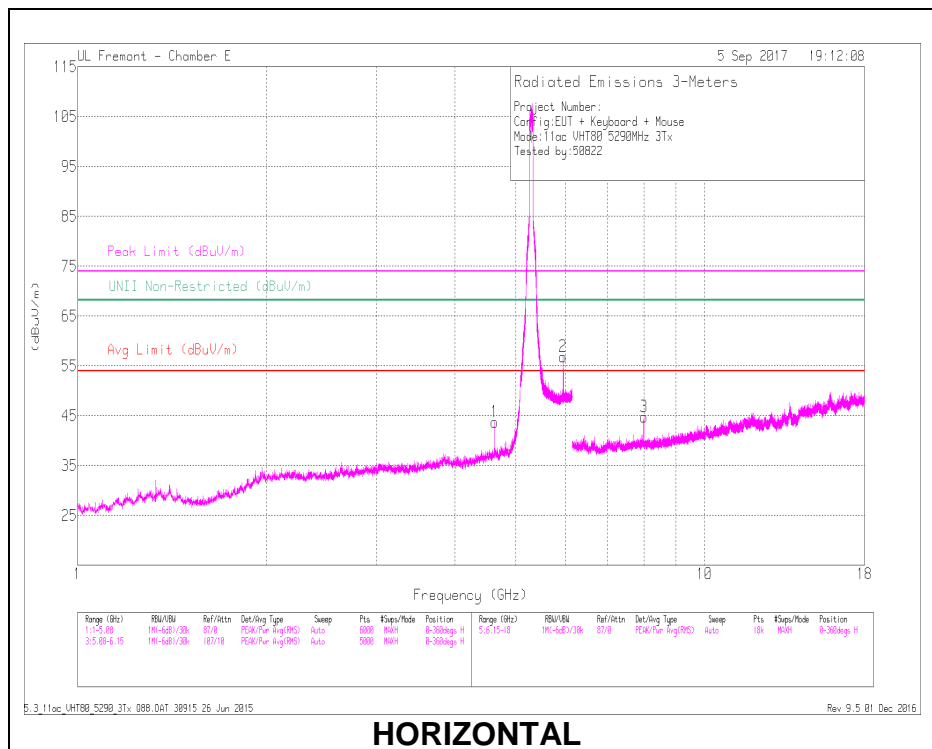

HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.629	43.47	PK-U	34.4	-29.2	0	48.67	-	-	74	-25.33	-	-	131	220	H
	* 4.629	37.37	ADR	34.4	-29.2	.46	43.03	54	-10.97	-	-	-	-	131	220	H
4	* 4.629	44.2	PK-U	34.4	-29.2	0	49.4	-	-	74	-24.6	-	-	324	242	V
	* 4.629	37.77	ADR	34.4	-29.2	.46	43.43	54	-10.57	-	-	-	-	324	242	V
2	5.951	44.31	PK-U	35.3	-18.8	0	60.81	-	-	-	-	68.2	-7.39	114	131	H
5	5.951	45.03	PK-U	35.3	-18.8	0	61.53	-	-	-	-	68.2	-6.67	111	195	V
3	8	40.31	PK-U	36.5	-26.4	0	50.41	-	-	-	-	68.2	-17.79	205	193	H
6	8	39.64	PK-U	36.5	-26.4	0	49.74	-	-	-	-	68.2	-18.46	175	204	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 SDM Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

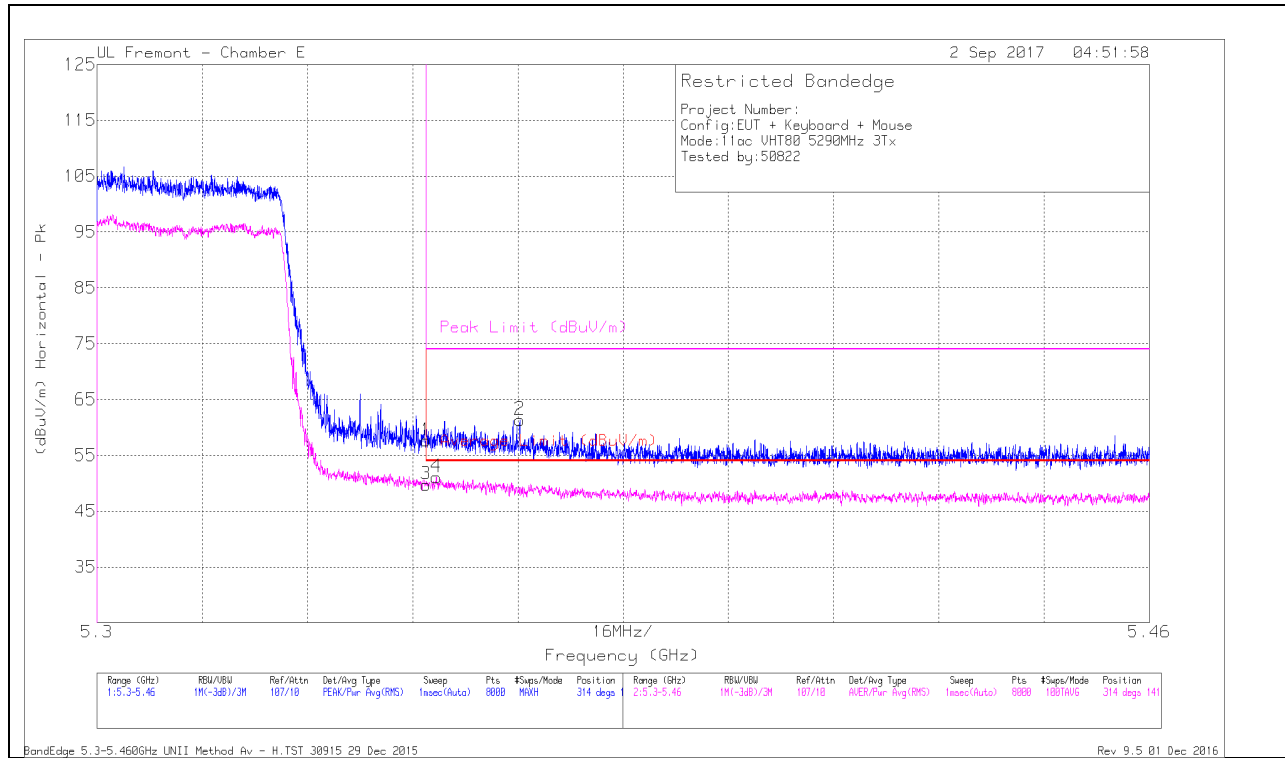


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.63	Pk	35	-20	0	57.63	-	-	74	-16.37	314	141	H
3	* 5.35	34.44	RMS	35	-20	.47	49.91	54	-4.09	-	-	314	141	H
4	* 5.352	35.78	RMS	35	-20	.47	51.25	54	-2.75	-	-	314	141	H
2	* 5.364	46.37	Pk	35	-20	0	61.37	-	-	74	-12.63	314	141	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

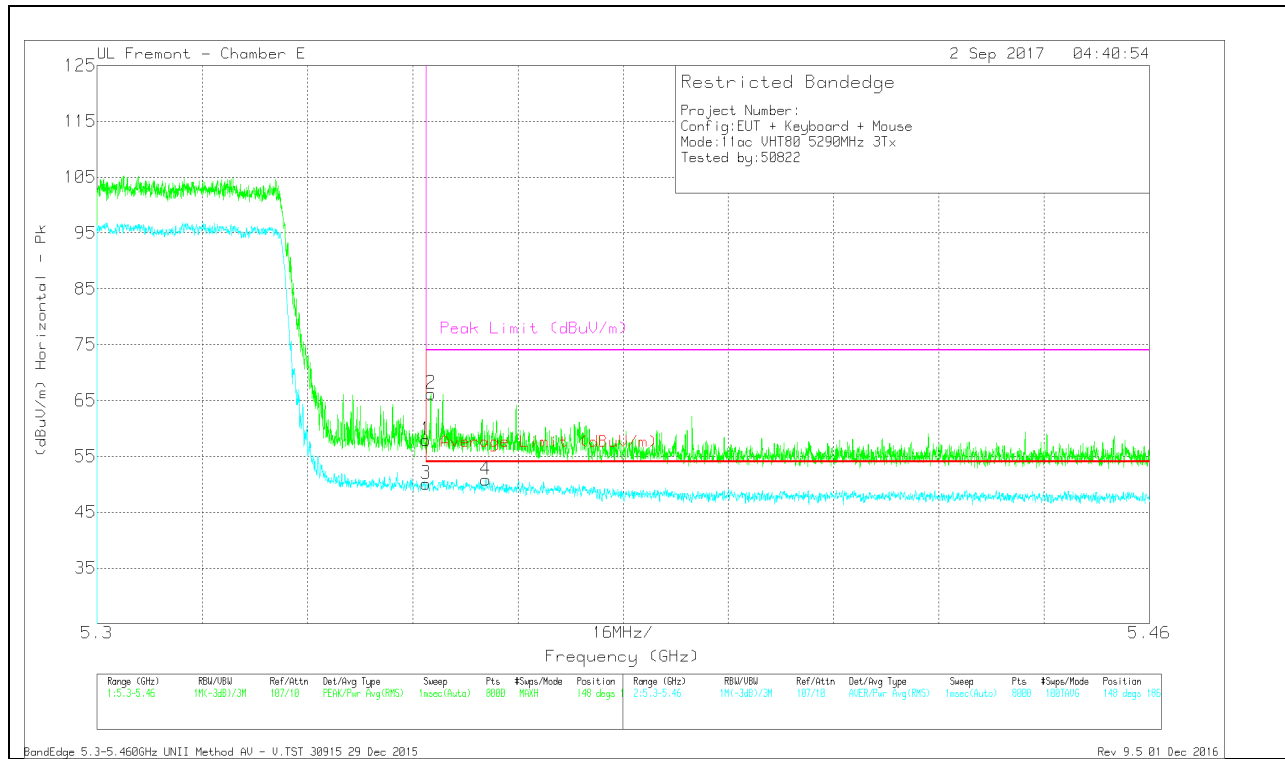


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.95	Pk	35	-20	0	57.95	-	-	74	-16.05	148	186	V
2	* 5.351	51.24	Pk	35	-20	0	66.24	-	-	74	-7.76	148	186	V
3	* 5.35	34.8	RMS	35	-20	.47	50.27	54	-3.73	-	-	148	186	V
4	* 5.359	35.52	RMS	35	-20	.47	50.99	54	-3.01	-	-	148	186	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

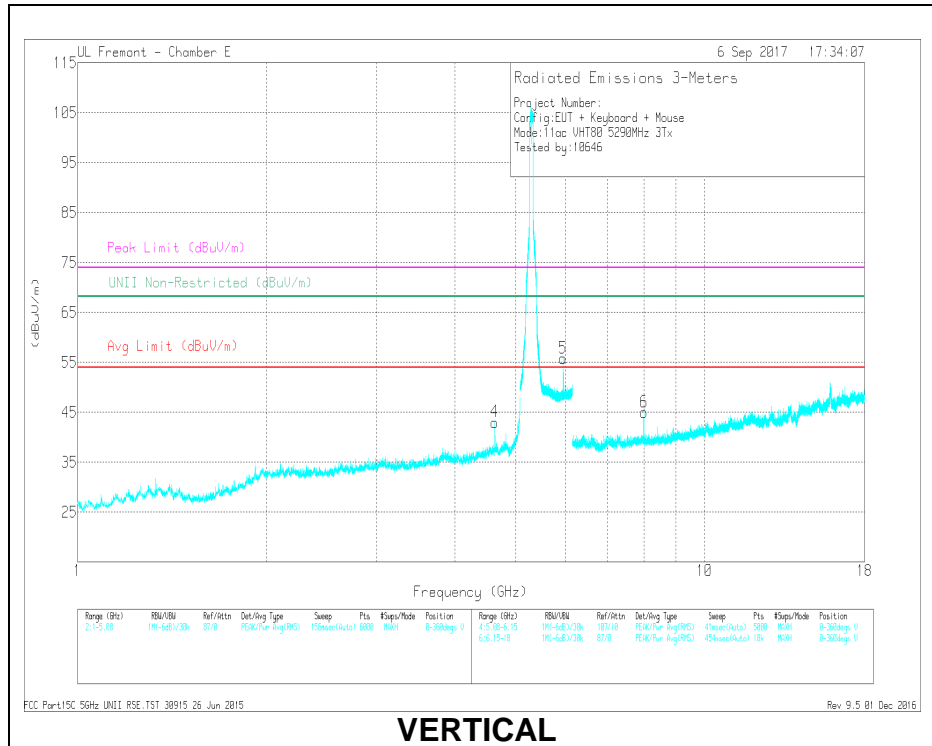

VERTICAL

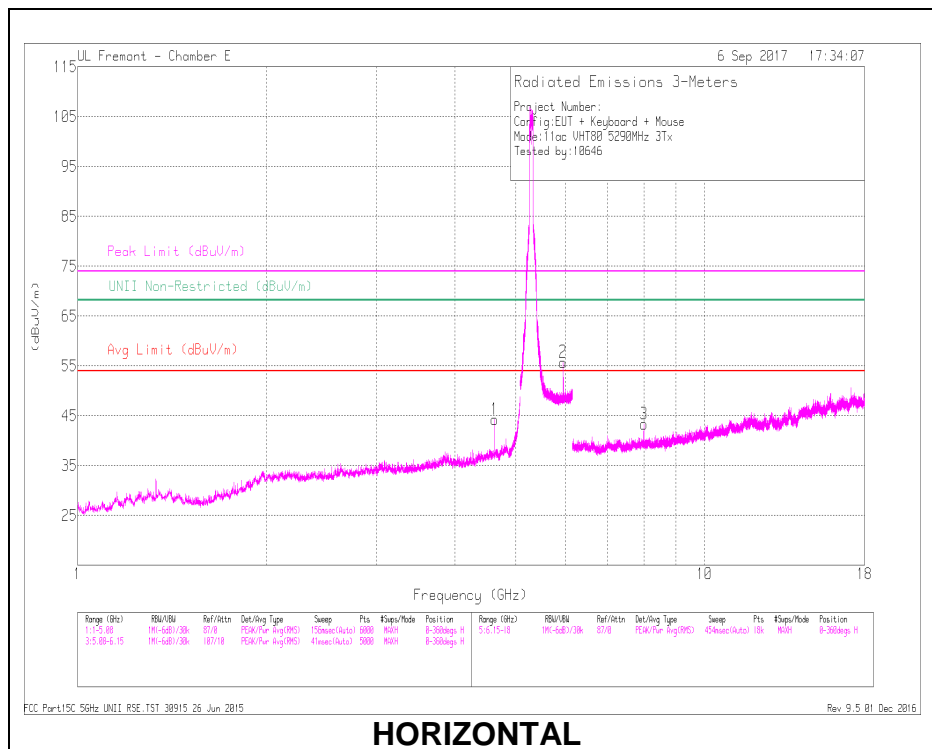

HORIZONTAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.629	44.66	PK-U	34.4	-29.2	0	49.86	-	-	74	-24.14	-	-	128	218	H
	* 4.629	38.36	ADR	34.4	-29.2	.47	44.03	54	-9.97	-	-	-	-	128	218	H
4	* 4.629	44.13	PK-U	34.4	-29.2	0	49.33	-	-	74	-24.67	-	-	165	277	V
	* 4.629	37.33	ADR	34.4	-29.2	.47	43.00	54	-11.00	-	-	-	-	165	277	V
2	5.951	43.83	PK-U	35.3	-18.8	0	60.33	-	-	-	-	68.2	-7.87	114	118	H
5	5.951	44.5	PK-U	35.3	-18.8	0	61	-	-	-	-	68.2	-7.2	126	204	V
3	8	39.13	PK-U	36.5	-26.4	0	49.23	-	-	-	-	68.2	-18.97	83	377	H
6	8	39.93	PK-U	36.5	-26.4	0	50.03	-	-	-	-	68.2	-18.17	331	203	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

3TX Antenna WF4 + Antenna WF3 + Antenna WF2 BF Mode

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

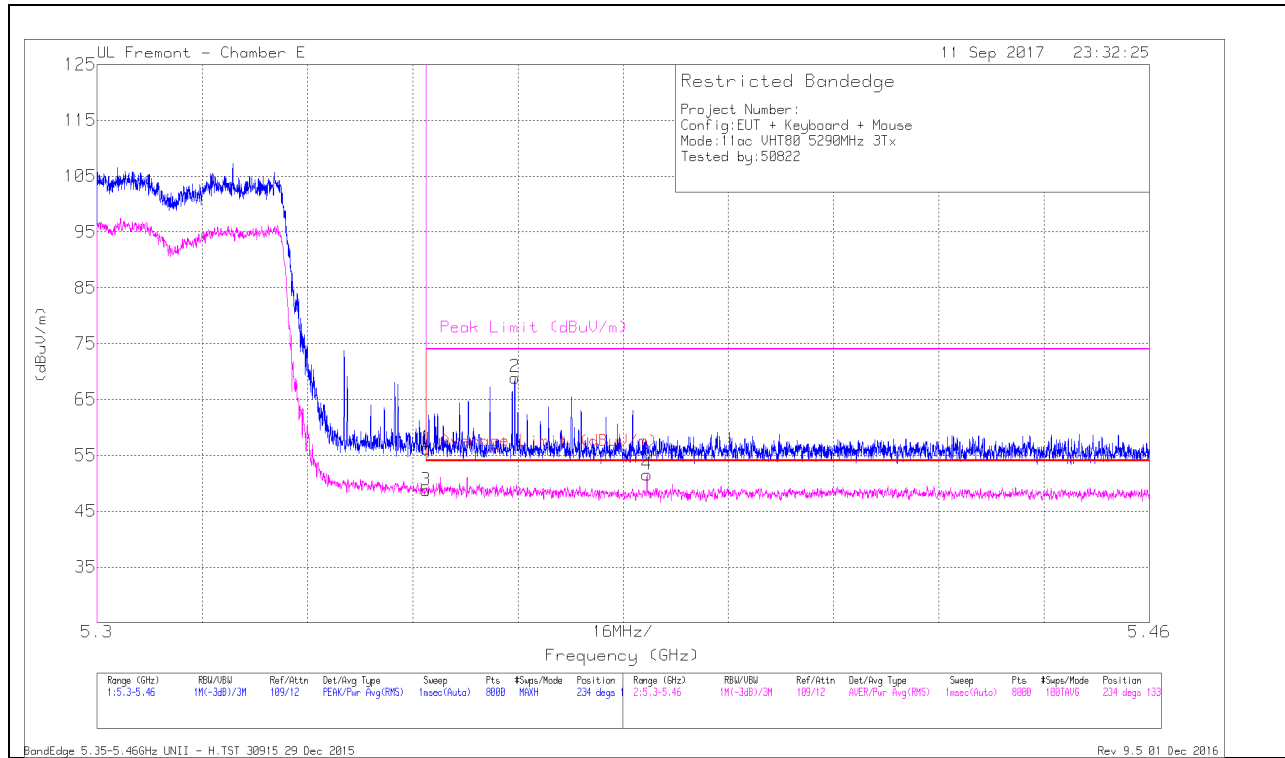


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.16	Pk	35	-18.9	0	56.26	-	-	74	-17.74	234	133	H
2	* 5.364	52.85	Pk	35	-18.9	0	68.95	-	-	74	-5.05	234	133	H
3	* 5.35	32.24	RMS	35	-18.9	.31	48.75	54	-5.35	-	-	234	133	H
4	* 5.384	35.04	RMS	35	-18.9	.31	51.55	54	-2.55	-	-	234	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

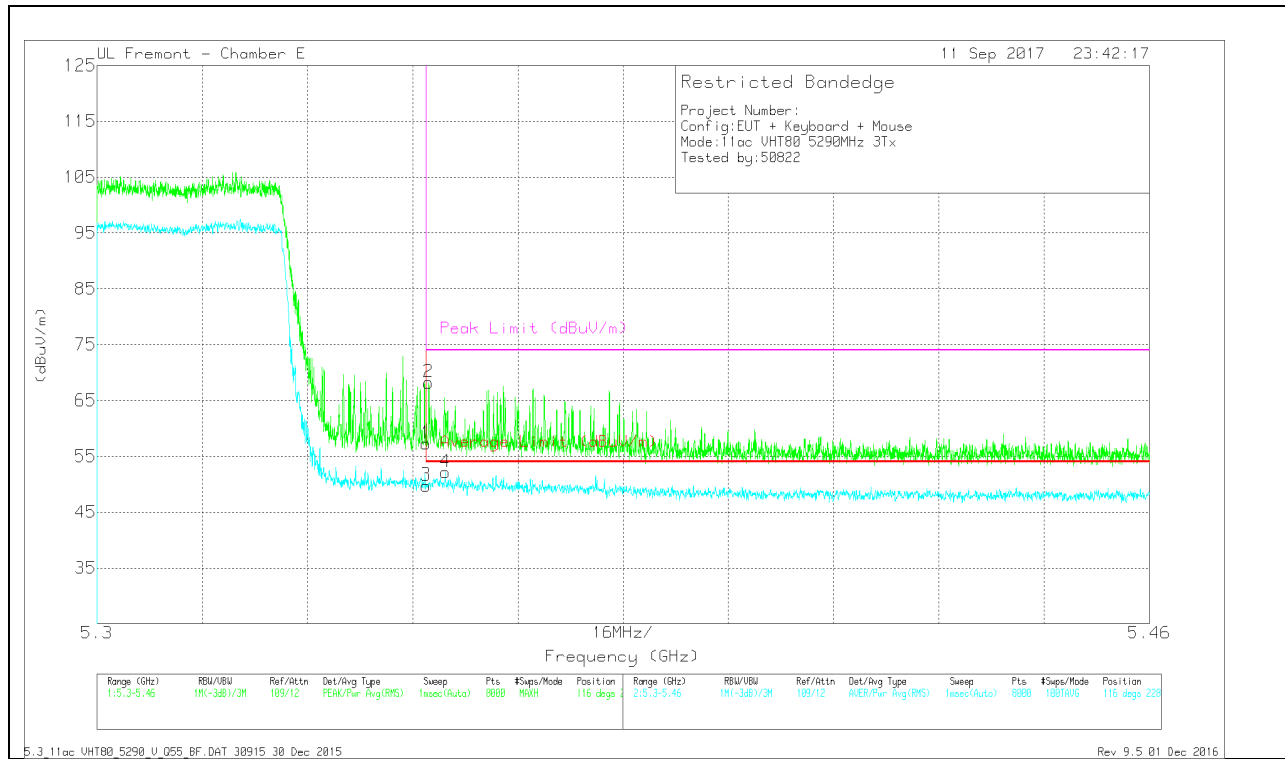


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.16	Pk	35	-18.9	0	57.26	-	-	74	-16.74	116	228	V
2	* 5.35	52.13	Pk	35	-18.9	0	68.23	-	-	74	-5.77	116	228	V
3	* 5.35	33.25	RMS	35	-18.9	.31	49.76	54	-4.34	-	-	116	228	V
4	* 5.353	35.64	RMS	35	-18.9	.31	52.15	54	-1.95	-	-	116	228	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

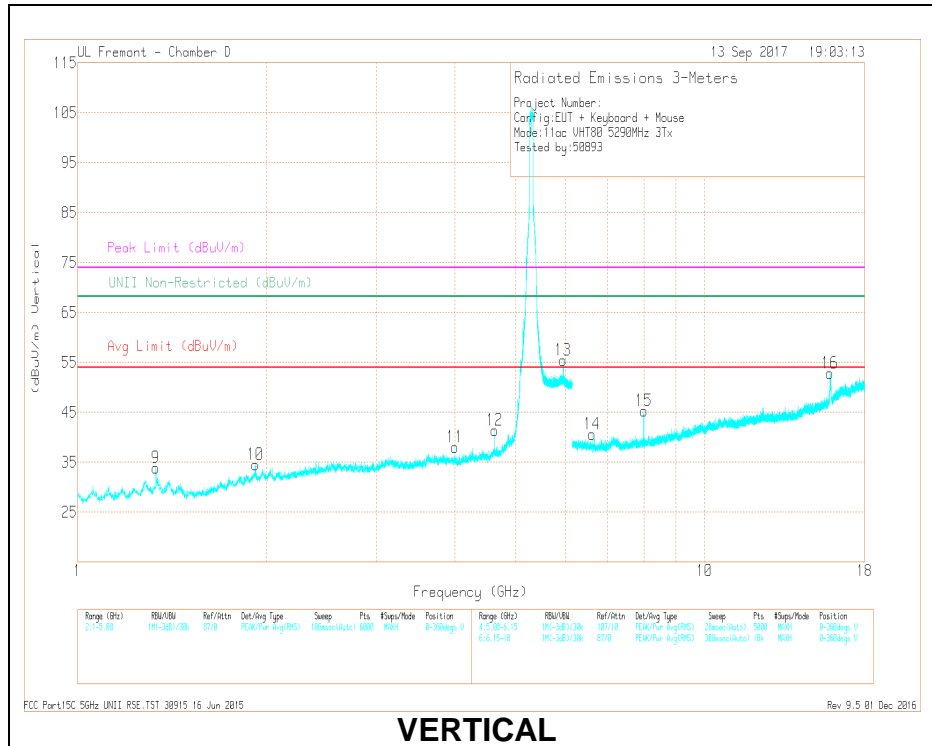

VERTICAL

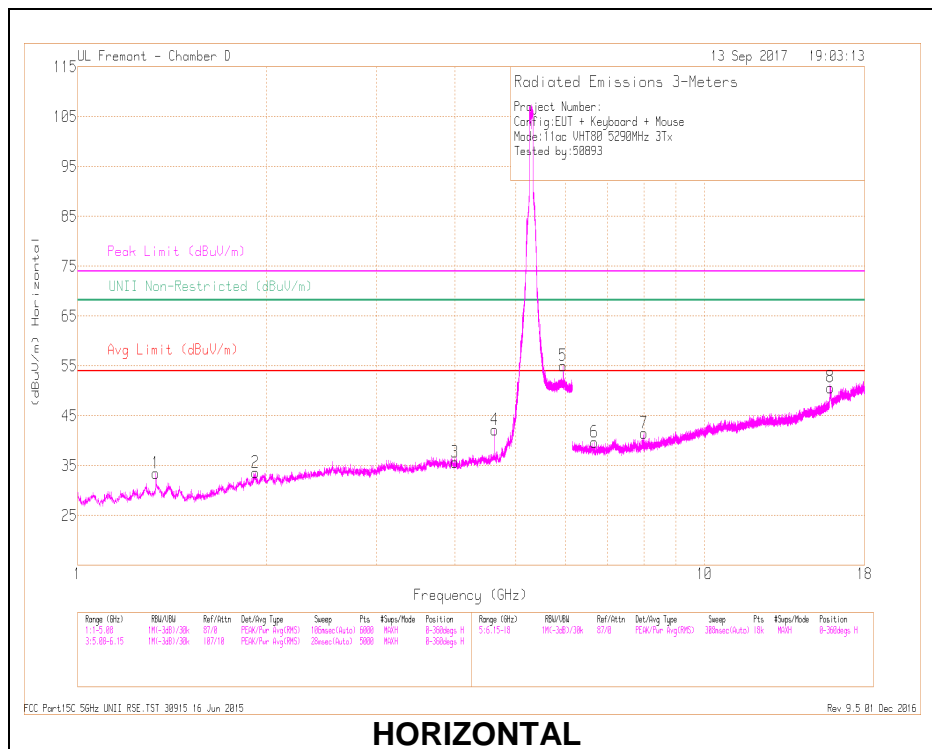

HORIZONTAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.334	41.2	PK-U	29.5	-31.3	0	39.4	-	-	74	-34.6	-	-	242	357	H
	* 1.333	31.42	ADR	29.5	-31.3	.31	29.93	54	-24.07	-	-	-	-	242	357	H
3	* 4	38.07	PK-U	33.4	-28.2	0	43.27	-	-	74	-30.73	-	-	128	107	H
	* 4	28.68	ADR	33.4	-28.2	.31	34.19	54	-19.81	-	-	-	-	128	107	H
4	* 4.629	42.97	PK-U	33.8	-26.9	0	49.87	-	-	74	-24.13	-	-	215	229	H
	* 4.629	36.99	ADR	33.8	-26.9	.31	44.2	54	-9.8	-	-	-	-	215	229	H
9	* 1.333	43.66	PK-U	29.5	-31.3	0	41.86	-	-	74	-32.14	-	-	200	118	V
	* 1.333	34.32	ADR	29.5	-31.3	.31	32.83	54	-21.17	-	-	-	-	200	118	V
11	* 4	39.44	PK-U	33.4	-28.2	0	44.64	-	-	74	-29.36	-	-	20	284	V
	* 4	31.2	ADR	33.4	-28.2	.31	36.71	54	-17.29	-	-	-	-	20	284	V
12	* 4.629	40.22	PK-U	33.8	-26.9	0	47.12	-	-	74	-26.88	-	-	243	190	V
	* 4.629	32.42	ADR	33.8	-26.9	.31	39.63	54	-14.37	-	-	-	-	243	190	V
8	* 15.865	34.98	PK-U	40.6	-20.1	0	55.48	-	-	74	-18.52	-	-	209	243	H
	* 15.894	22.96	ADR	40.6	-20.2	.31	43.67	54	-10.33	-	-	-	-	209	243	H
16	* 15.857	34.79	PK-U	40.6	-19.8	0	55.59	-	-	74	-18.41	-	-	356	140	V
	* 15.877	22.75	ADR	40.6	-20.1	.31	43.56	54	-10.44	-	-	-	-	356	140	V
2	1.92	41.72	PK-U	31.3	-31.2	0	41.82	-	-	-	-	68.2	-26.38	116	398	H
10	1.921	41.78	PK-U	31.3	-31.3	0	41.78	-	-	-	-	68.2	-26.42	39	124	V
5	5.951	43.41	PK-U	35.1	-17.3	0	61.21	-	-	-	-	68.2	-6.99	204	104	H
13	5.951	44.15	PK-U	35.1	-17.3	0	61.95	-	-	-	-	68.2	-6.25	217	211	V
14	6.596	36.73	PK-U	35.6	-25.9	0	46.43	-	-	-	-	68.2	-21.77	195	216	V
6	6.676	36.98	PK-U	35.6	-26.4	0	46.18	-	-	-	-	68.2	-22.02	6	201	H
7	8	37.82	PK-U	35.6	-24	0	49.42	-	-	-	-	68.2	-18.78	268	189	H
15	8	38.53	PK-U	35.6	-24	0	50.13	-	-	-	-	68.2	-18.07	163	213	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

5.1.7. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX Antenna WF4

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

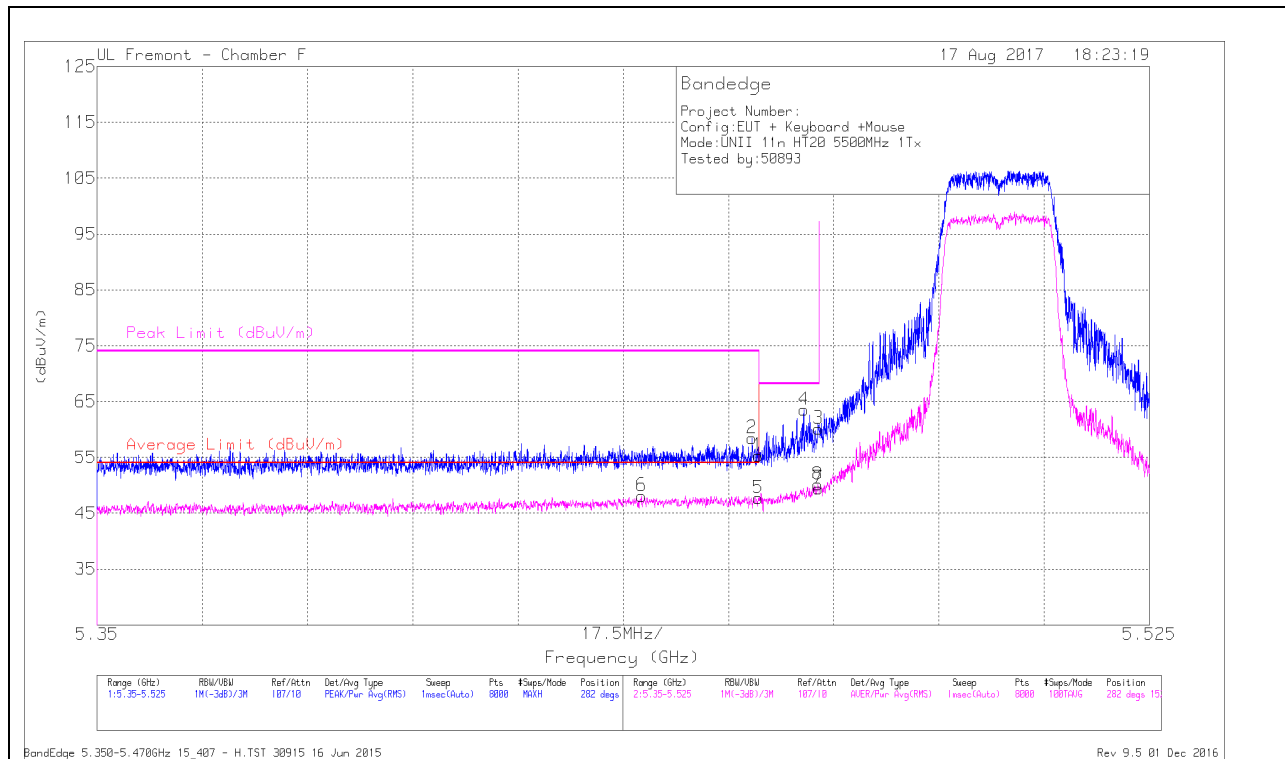

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.19	Pk	34.8	-18.7	0	55.29	-	-	74	-18.71	282	152	H
2	* 5.459	42.33	Pk	34.8	-18.7	0	58.43	-	-	74	-15.57	282	152	H
3	5.47	44.04	Pk	34.8	-18.7	0	60.14	-	-	68.2	-8.06	282	152	H
4	5.468	47.54	Pk	34.8	-18.8	0	63.54	-	-	68.2	-4.66	282	152	H
5	* 5.46	31.61	RMS	34.8	-18.7	0.23	47.94	54	-6.06	-	-	282	152	H
6	* 5.441	32.01	RMS	34.8	-18.7	0.23	48.34	54	-5.89	-	-	282	152	H
7	5.47	33.33	RMS	34.8	-18.7	0	49.43	-	-	-	-	282	152	H
8	5.47	34.03	RMS	34.8	-18.7	0	50.13	-	-	-	-	282	152	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

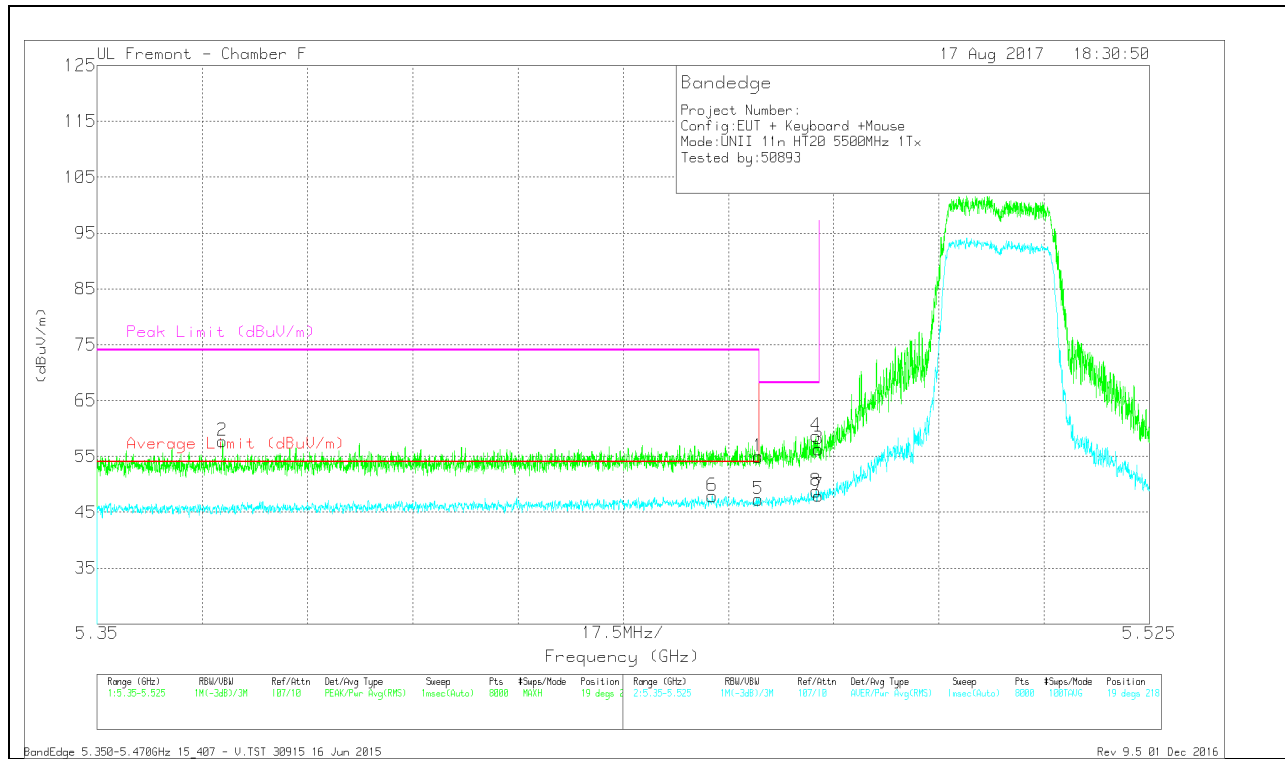

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.88	Pk	34.8	-18.7	0	54.98	-	-	74	-19.02	19	218	V
2	* 5.371	41.76	Pk	34.7	-18.7	0	57.76	-	-	74	-16.24	19	218	V
3	5.47	40.21	Pk	34.8	-18.7	0	56.31	-	-	68.2	-11.89	19	218	V
4	5.469	42.59	Pk	34.8	-18.7	0	58.69	-	-	68.2	-9.51	19	218	V
5	* 5.46	31.2	RMS	34.8	-18.7	0.23	47.53	54	-6.47	-	-	19	218	V
6	* 5.452	31.82	RMS	34.8	-18.7	0.23	48.15	54	-6.85	-	-	19	218	V
7	5.47	31.9	RMS	34.8	-18.7	0	48	-	-	-	-	19	218	V
8	5.47	32.68	RMS	34.8	-18.7	0	48.78	-	-	-	-	19	218	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

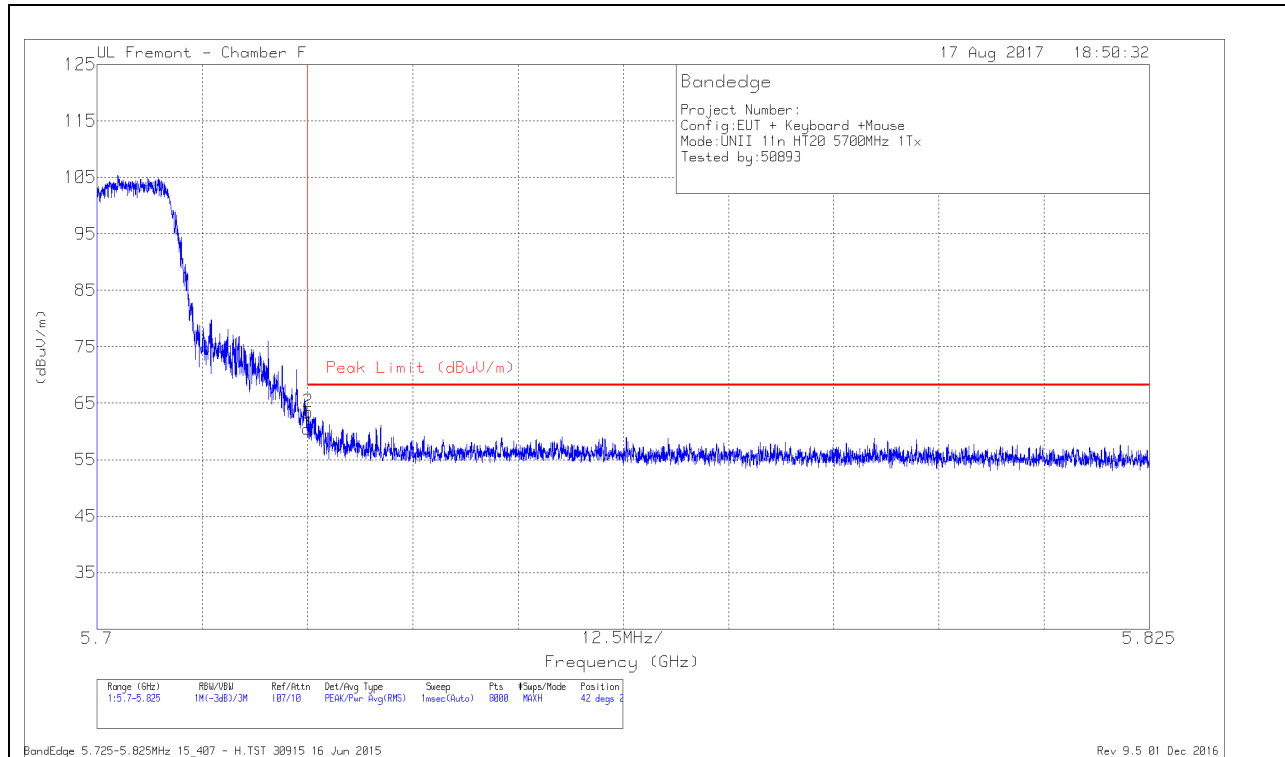

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.49	PK	35	-18	60.49	68.2	-7.71	42	292	H
2	5.725	46.45	PK	35	-18	63.45	68.2	-4.75	42	292	H

Pk - Peak detector

VERTICAL RESULT

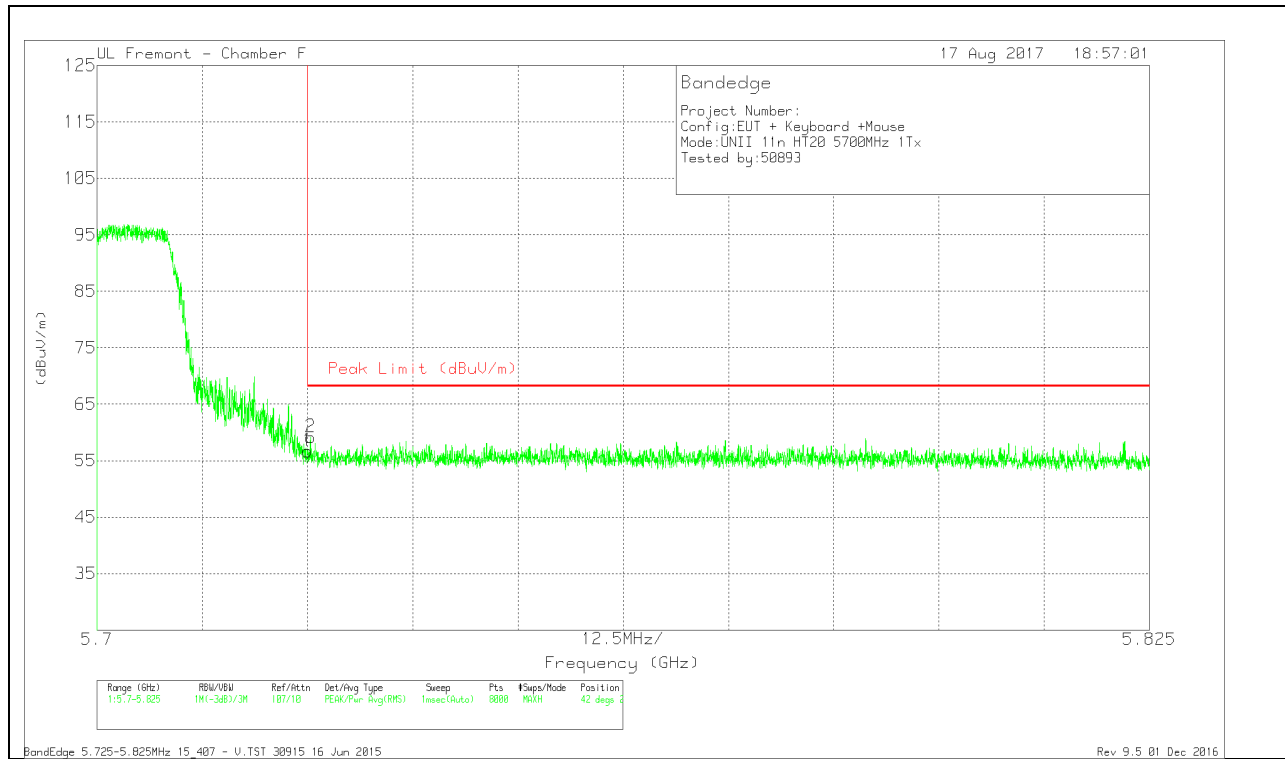


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.71	Pk	35	-18	56.71	68.2	-11.49	42	292	V
2	5.725	42.15	Pk	35	-18	59.15	68.2	-9.05	42	292	V

Pk - Peak detector

1TX Antenna WF3

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

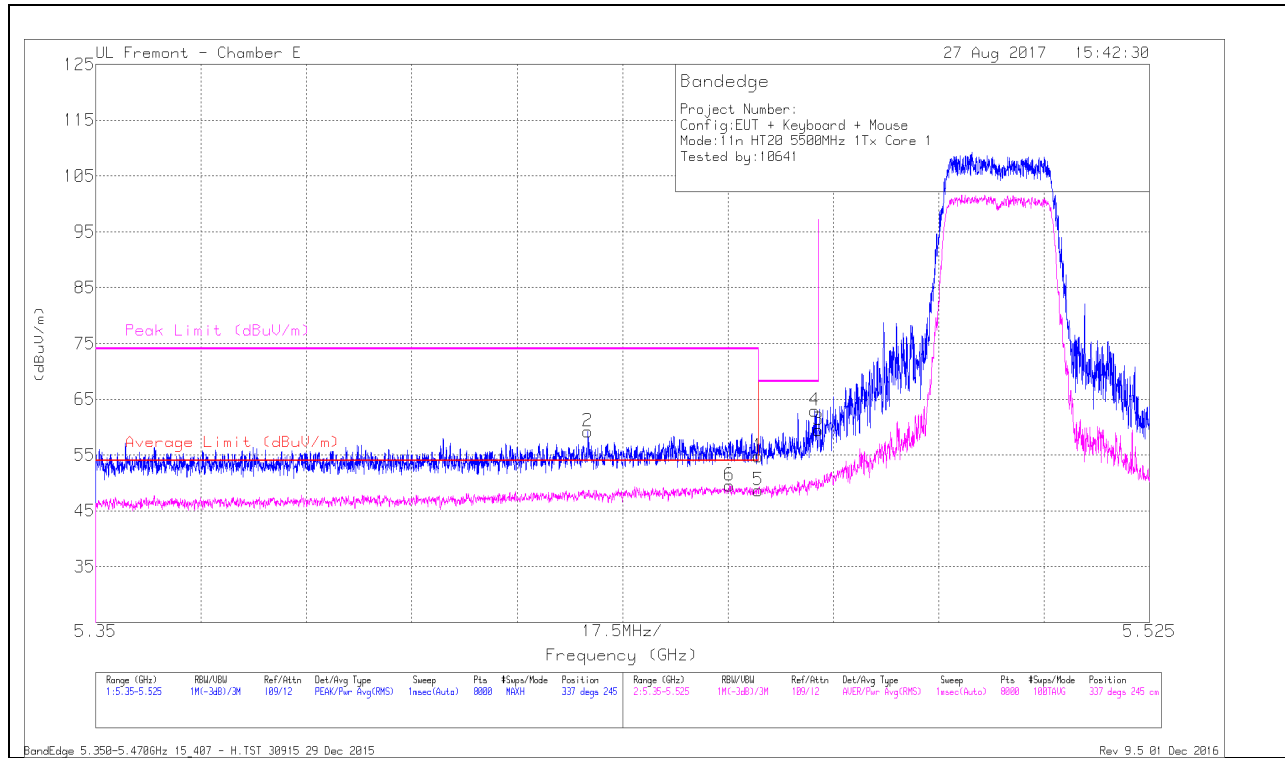


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.432	43.11	Pk	35.1	-19	0	59.21	-	-	74	-14.79	337	245	H
6	* 5.455	33.13	RMS	35.1	-18.9	.23	49.56	54	-4.44	-	-	337	245	H
1	* 5.46	38.55	Pk	35.1	-18.9	0	54.75	-	-	74	-19.25	337	245	H
5	* 5.46	32.22	RMS	35.1	-18.9	.23	48.65	54	-5.35	-	-	337	245	H
4	5.469	46.79	Pk	35.1	-18.9	0	62.99	-	-	68.2	-5.21	337	245	H
3	5.47	43.26	Pk	35.1	-18.9	0	59.46	-	-	68.2	-8.74	337	245	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

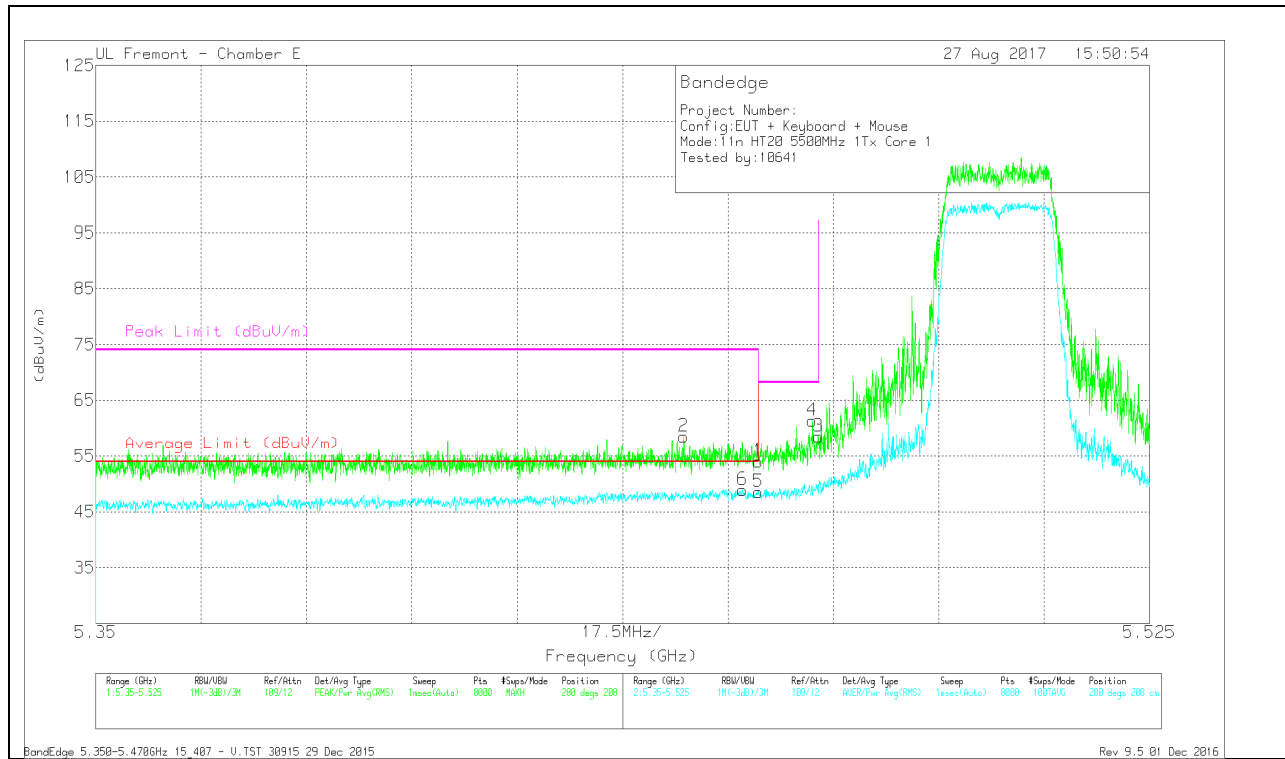


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.78	Pk	35.1	-18.9	0	53.98	-	-	74	-20.02	280	208	V
2	* 5.448	42.23	Pk	35.1	-18.9	0	58.43	-	-	74	-15.57	280	208	V
5	* 5.46	32.16	RMS	35.1	-18.9	.23	48.59	54	-5.41	-	-	280	208	V
6	* 5.457	32.55	RMS	35.1	-18.9	.23	48.98	54	-5.02	-	-	280	208	V
4	5.469	45.15	Pk	35.1	-18.9	0	61.35	-	-	68.2	-6.85	280	208	V
3	5.47	42.27	Pk	35.1	-18.9	0	58.47	-	-	68.2	-9.73	280	208	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

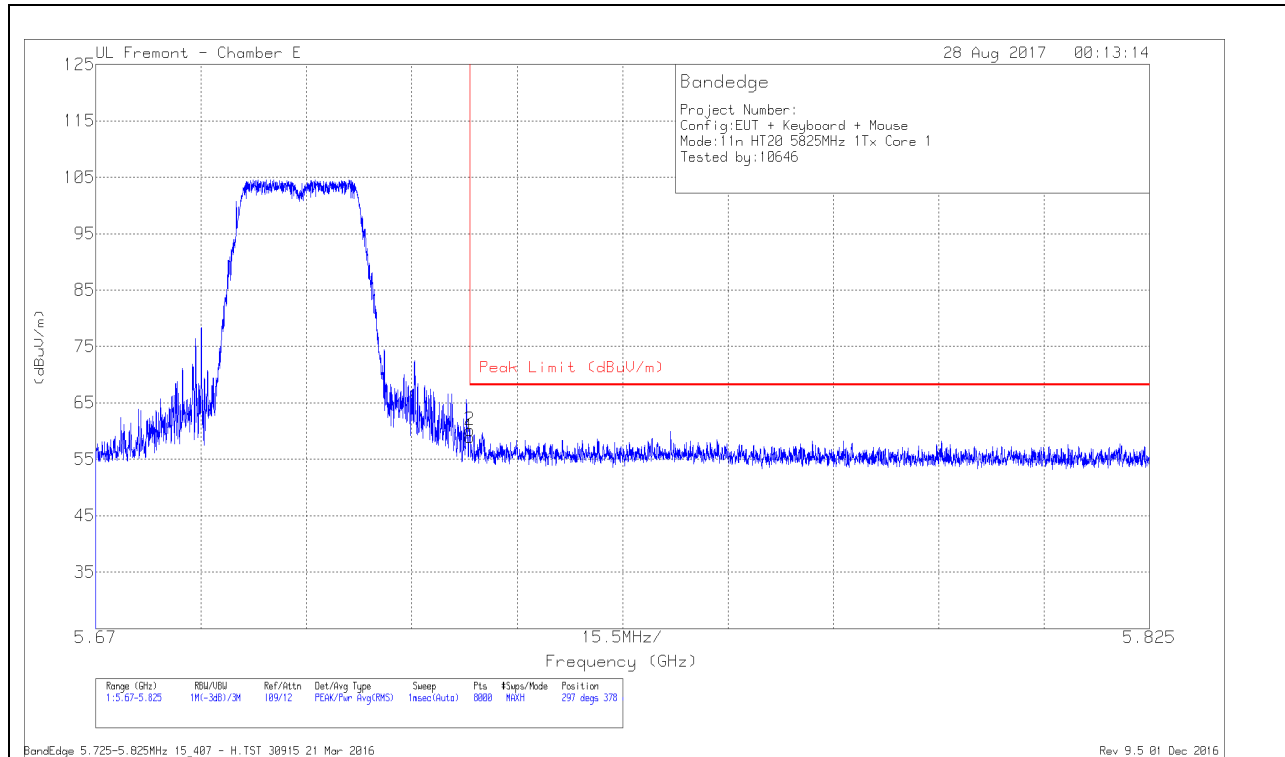

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fl tr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.01	Pk	35.1	-19.1	59.01	68.2	-9.19	297	378	H
2	5.725	44.2	Pk	35.1	-19.1	60.2	68.2	-8	297	378	H

Pk - Peak detector

VERTICAL RESULT

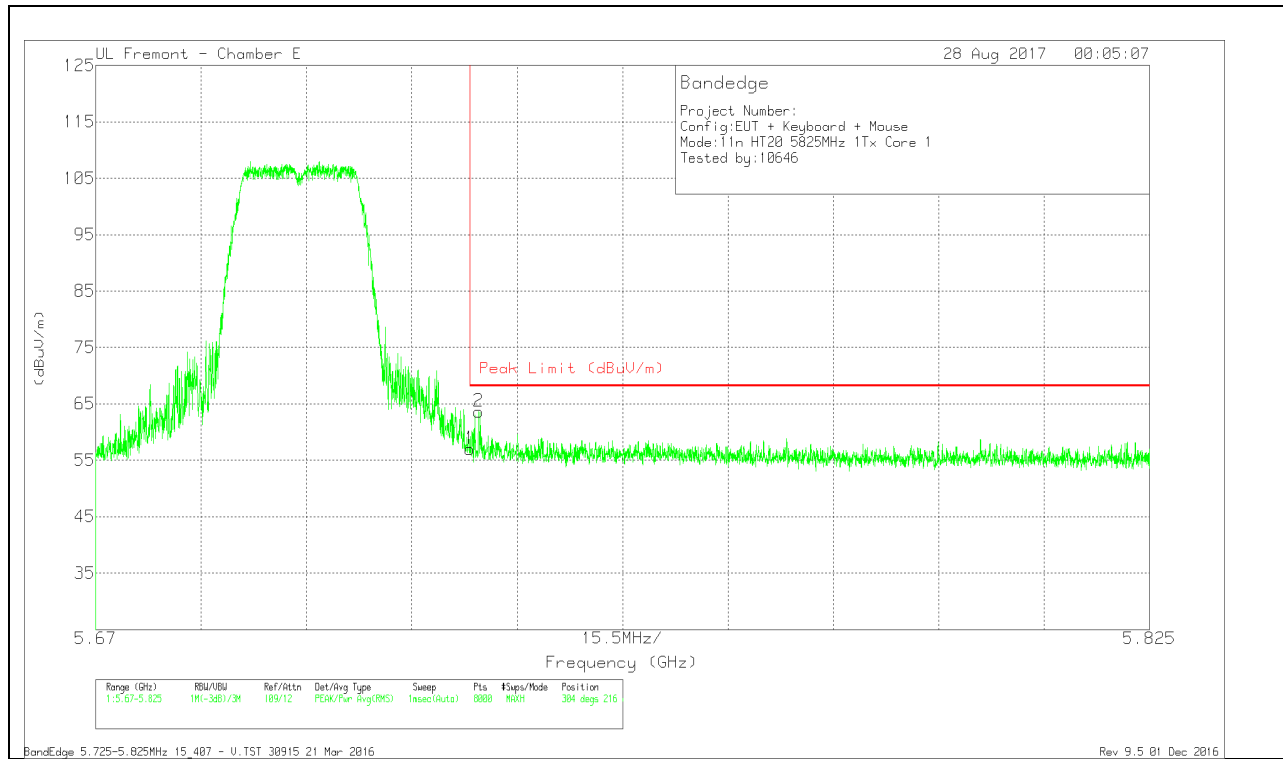


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fl tr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.97	Pk	35.1	-19.1	56.97	68.2	-11.23	304	216	V
2	5.726	47.59	Pk	35.1	-19.1	63.59	68.2	-4.61	304	216	V

Pk - Peak detector

1TX Antenna WF2

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

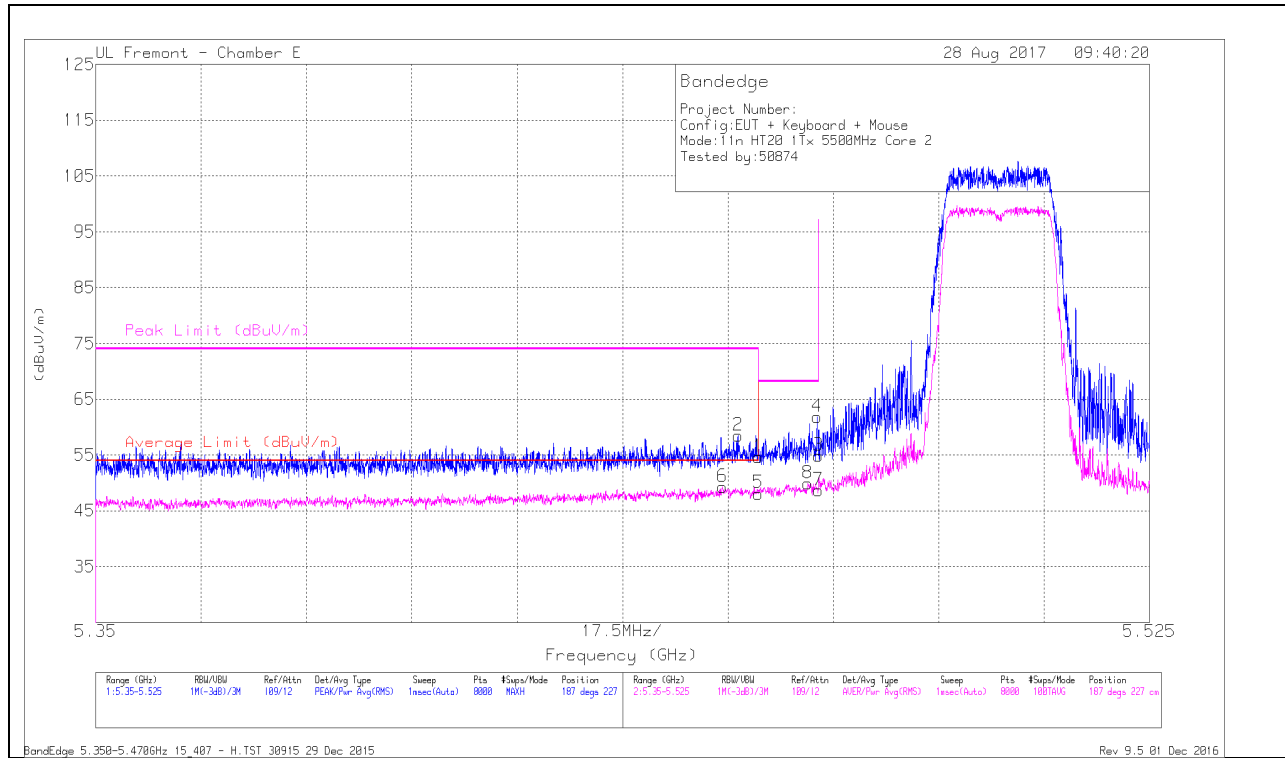


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.42	Pk	35.1	-18.9	0	54.62	-	-	74	-19.38	187	227	H
2	* 5.457	42.28	Pk	35.1	-18.9	0	58.48	-	-	74	-15.52	187	227	H
5	* 5.46	31.69	RMS	35.1	-18.9	.23	48.12	54	-5.88	-	-	187	227	H
6	* 5.454	32.82	RMS	35.1	-18.9	.23	49.25	54	-4.75	-	-	187	227	H
8	5.468	33.49	RMS	35.1	-18.9	.23	49.92	-	-	-	-	187	227	H
3	5.47	38.71	Pk	35.1	-18.9	0	54.91	-	-	68.2	-13.29	187	227	H
4	5.47	45.68	Pk	35.1	-18.9	0	61.88	-	-	68.2	-6.32	187	227	H
7	5.47	32.3	RMS	35.1	-18.9	.23	48.73	-	-	-	-	187	227	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

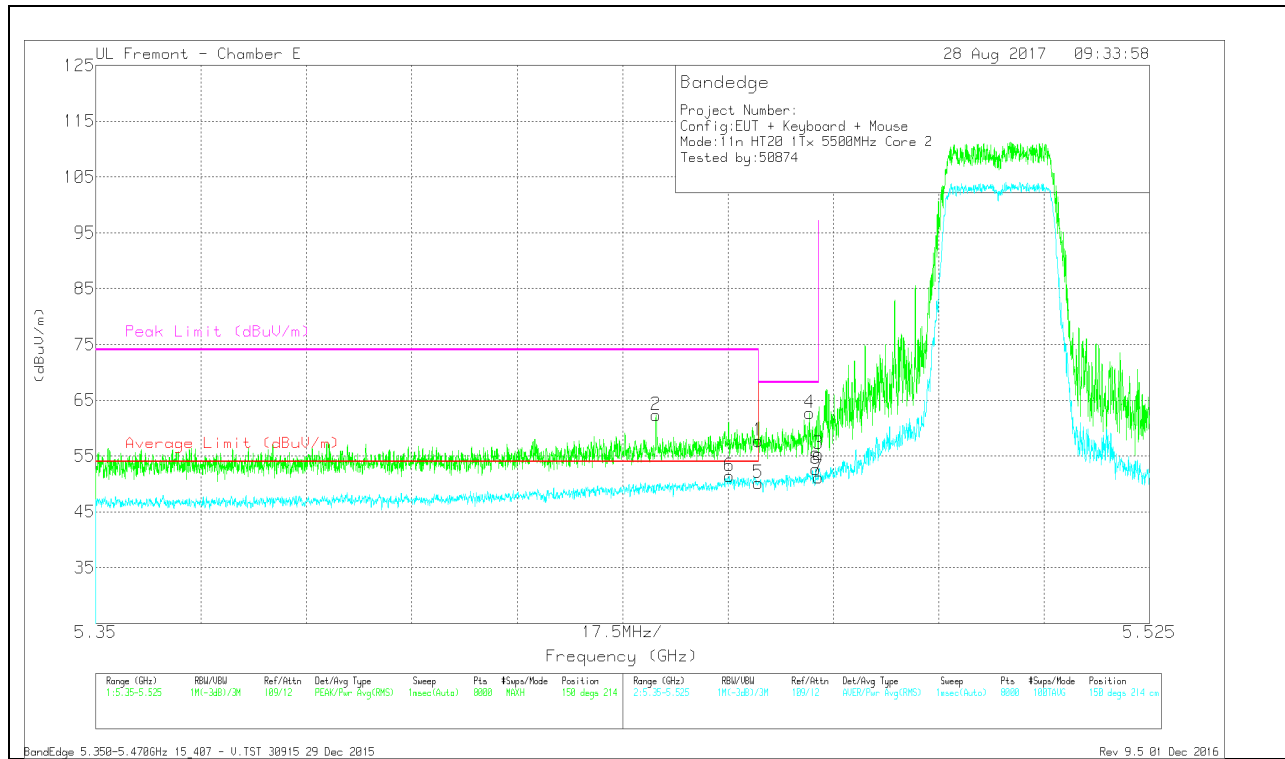


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.57	Pk	35.1	-18.9	0	57.77	-	-	74	-16.23	150	214	V
2	* 5.443	46.14	Pk	35.1	-18.9	0	62.34	-	-	74	-11.66	150	214	V
5	* 5.46	33.69	RMS	35.1	-18.9	.23	50.12	54	-3.88	-	-	150	214	V
6	* 5.455	34.95	RMS	35.1	-18.9	.23	51.38	54	-2.62	-	-	150	214	V
4	5.469	46.46	Pk	35.1	-18.9	0	62.66	-	-	68.2	-5.54	150	214	V
3	5.47	39.18	Pk	35.1	-18.9	0	55.38	-	-	68.2	-12.82	150	214	V
7	5.47	34.69	RMS	35.1	-18.9	.23	51.12	-	-	-	-	150	214	V
8	5.47	36.17	RMS	35.1	-18.9	.23	52.6	-	-	-	-	150	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

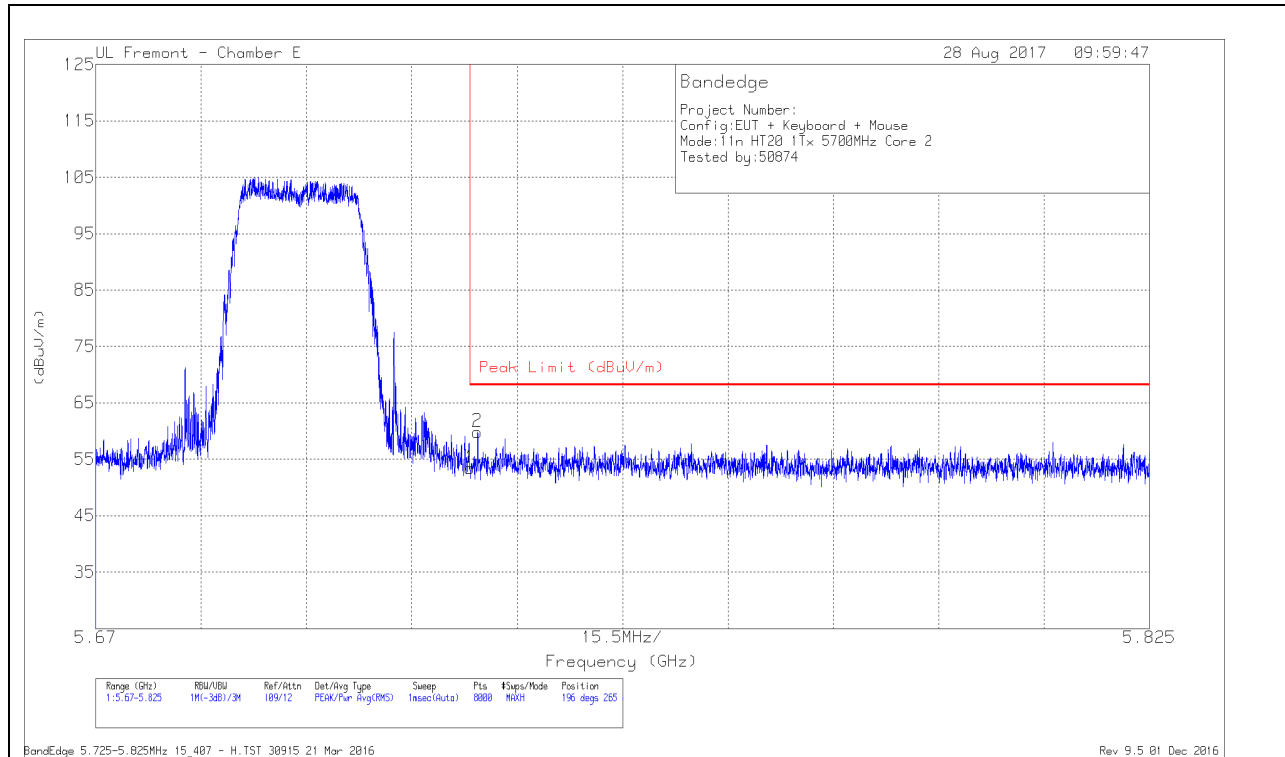

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.48	Pk	35.1	-19.1	0	53.48	68.2	-14.72	196	265	H
2	5.726	43.88	Pk	35.1	-19.1	0	59.88	68.2	-8.32	196	265	H

Pk - Peak detector

VERTICAL RESULT

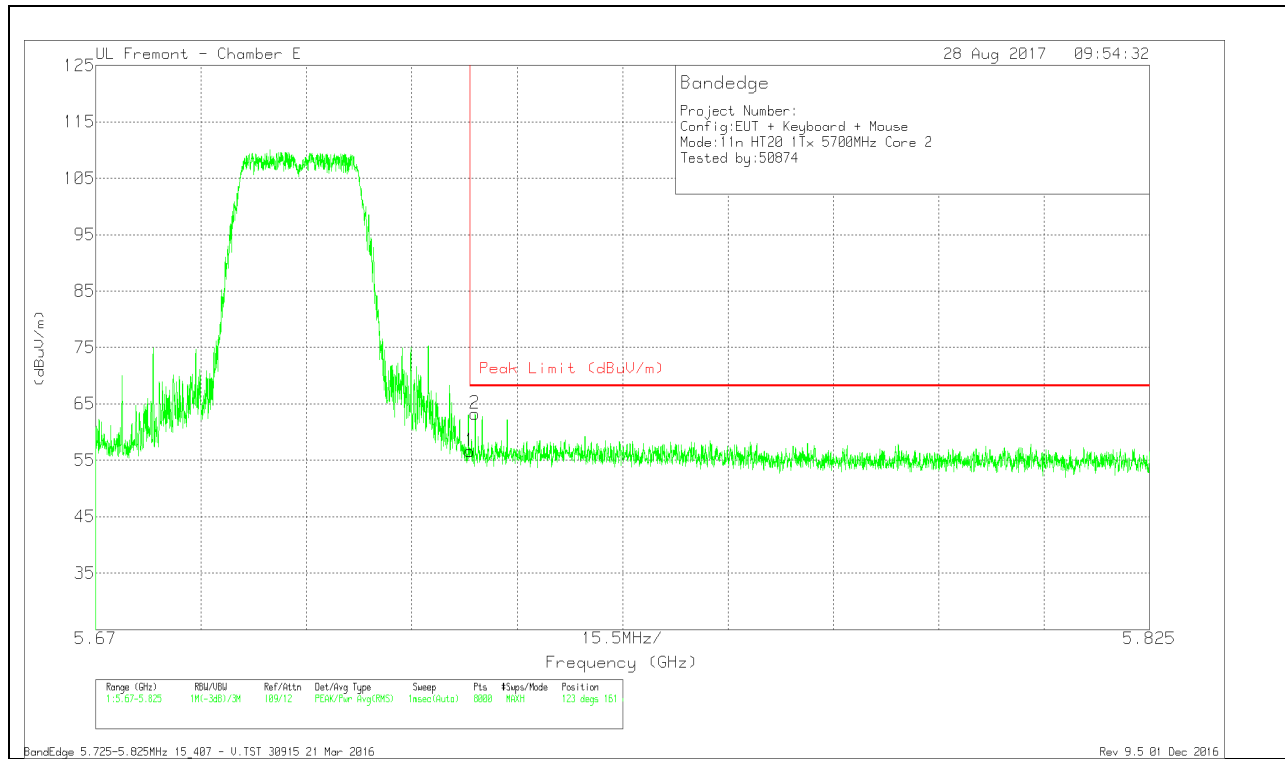


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.61	Pk	35.1	-19.1	0	56.61	68.2	-11.59	123	161	V
2	5.726	47.27	Pk	35.1	-19.1	0	63.27	68.2	-4.93	123	161	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF3 CDD Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

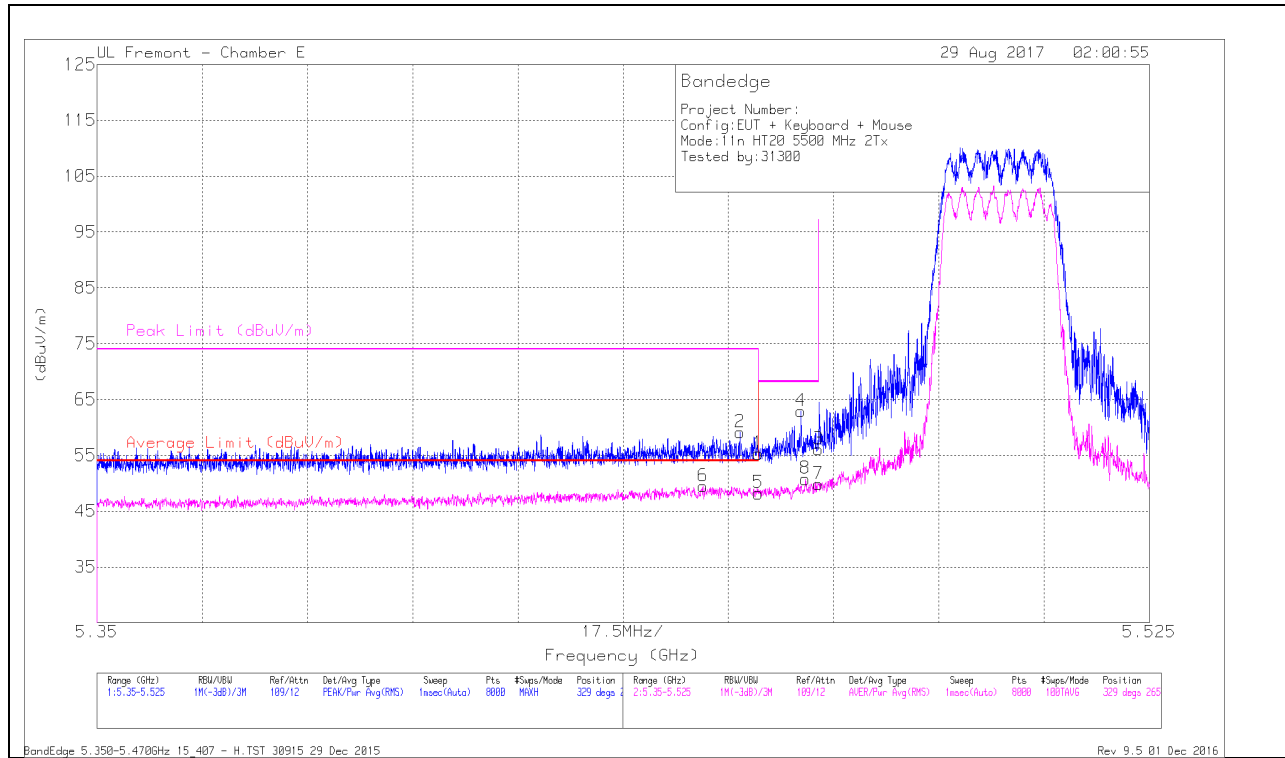


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.451	33.03	RMS	35.1	-18.9	.23	49.46	54	-4.54	-	-	329	265	H
2	* 5.457	42.92	Pk	35.1	-18.9	0	59.12	-	-	74	-14.88	329	265	H
1	* 5.46	39.1	Pk	35.1	-18.9	0	55.3	-	-	74	-18.7	329	265	H
5	* 5.46	31.77	RMS	35.1	-18.9	.23	48.2	54	-5.8	-	-	329	265	H
4	5.467	46.71	Pk	35.1	-18.9	0	62.91	-	-	68.2	-5.29	329	265	H
8	5.468	34.33	RMS	35.1	-18.9	.23	50.76	-	-	-	-	329	265	H
3	5.47	39.85	Pk	35.1	-18.9	0	56.05	-	-	68.2	-12.15	329	265	H
7	5.47	33.41	RMS	35.1	-18.9	.23	49.84	-	-	-	-	329	265	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

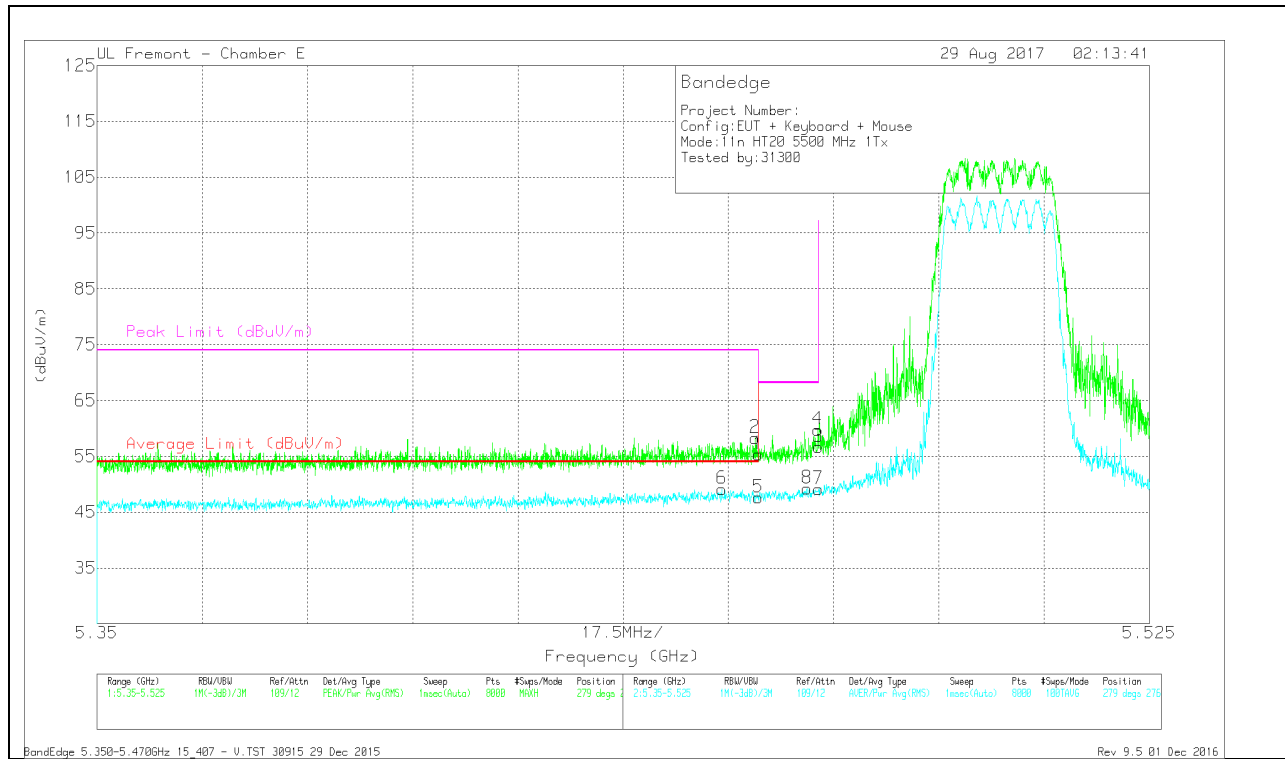


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.17	Pk	35.1	-18.9	0	55.37	-	-	74	-18.63	279	276	V
2	* 5.459	42.11	Pk	35.1	-18.9	0	58.31	-	-	74	-15.69	279	276	V
5	* 5.46	31.18	RMS	35.1	-18.9	.23	47.61	54	-6.39	-	-	279	276	V
6	* 5.454	32.73	RMS	35.1	-18.9	.23	49.16	54	-4.84	-	-	279	276	V
8	5.468	32.82	RMS	35.1	-18.9	.23	49.25	-	-	-	-	279	276	V
3	5.47	40.46	Pk	35.1	-18.9	0	56.66	-	-	68.2	-11.54	279	276	V
4	5.47	43.59	Pk	35.1	-18.9	0	59.79	-	-	68.2	-8.41	279	276	V
7	5.47	32.69	RMS	35.1	-18.9	.23	49.12	-	-	-	-	279	276	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

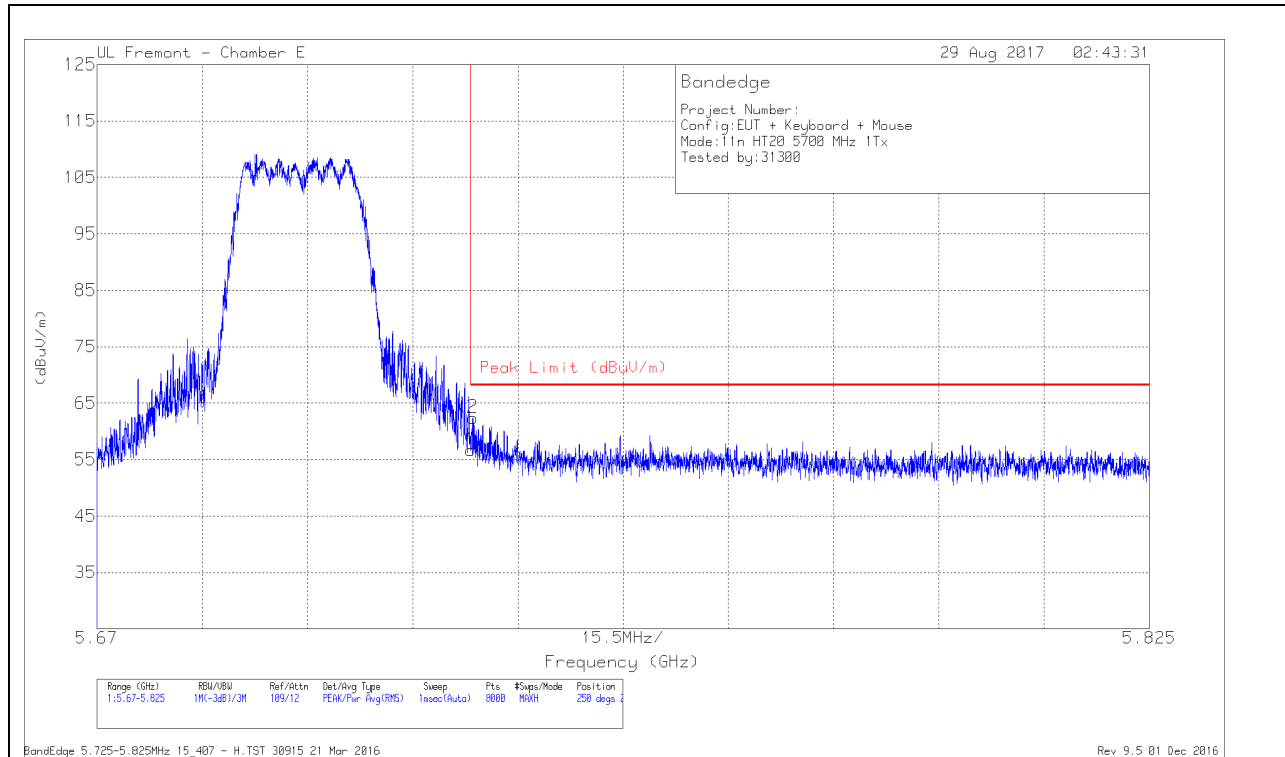

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.66	Pk	35.1	-19.1	0	56.66	68.2	-11.54	250	267	H
2	5.725	46.42	Pk	35.1	-19.1	0	62.42	68.2	-5.78	250	267	H

Pk - Peak detector

VERTICAL RESULT

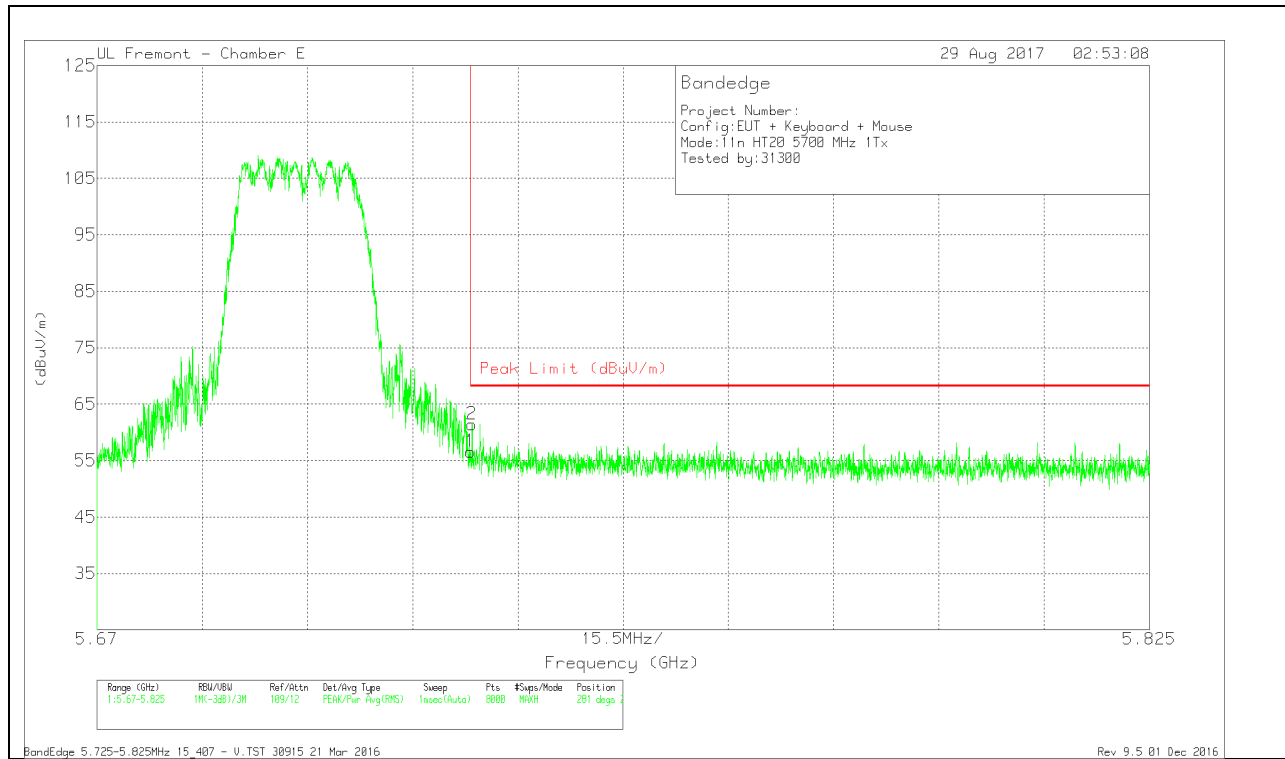


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.54	Pk	35.1	-19.1	0	56.54	68.2	-11.66	281	266	V
2	5.725	45.41	Pk	35.1	-19.1	0	61.41	68.2	-6.79	281	266	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF3 SDM Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

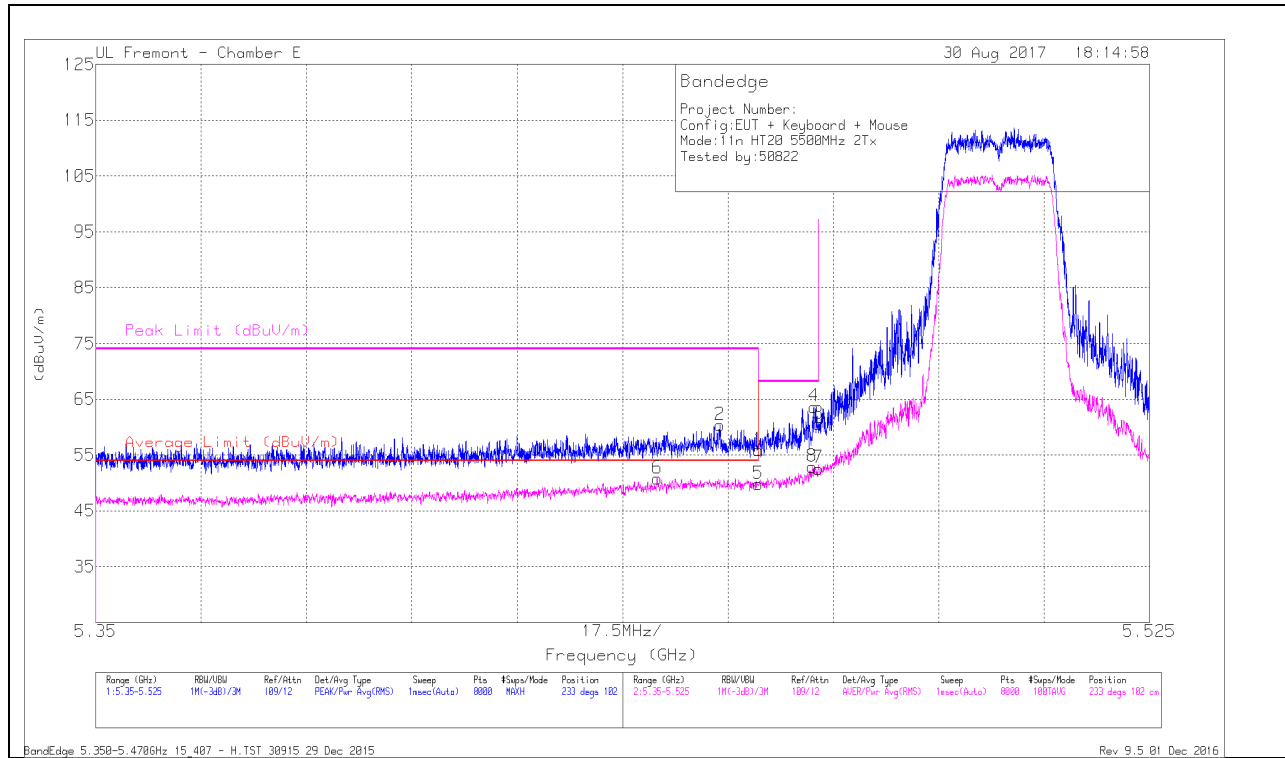


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.443	34.39	RMS	35.1	-18.9	.23	50.82	54	-3.18	-	-	233	102	H
2	* 5.454	44.19	Pk	35.1	-18.9	0	60.39	-	-	74	-13.61	233	102	H
1	* 5.46	39.7	Pk	35.1	-18.9	0	55.9	-	-	74	-18.1	233	102	H
5	* 5.46	33.32	RMS	35.1	-18.9	.23	49.75	54	-4.25	-	-	233	102	H
4	5.469	47.44	Pk	35.1	-18.9	0	63.64	-	-	68.2	-4.56	233	102	H
8	5.469	36.43	RMS	35.1	-18.9	.23	52.86	-	-	-	-	233	102	H
3	5.47	44.41	Pk	35.1	-18.9	0	60.61	-	-	68.2	-7.59	233	102	H
7	5.47	36.16	RMS	35.1	-18.9	.23	52.59	-	-	-	-	233	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

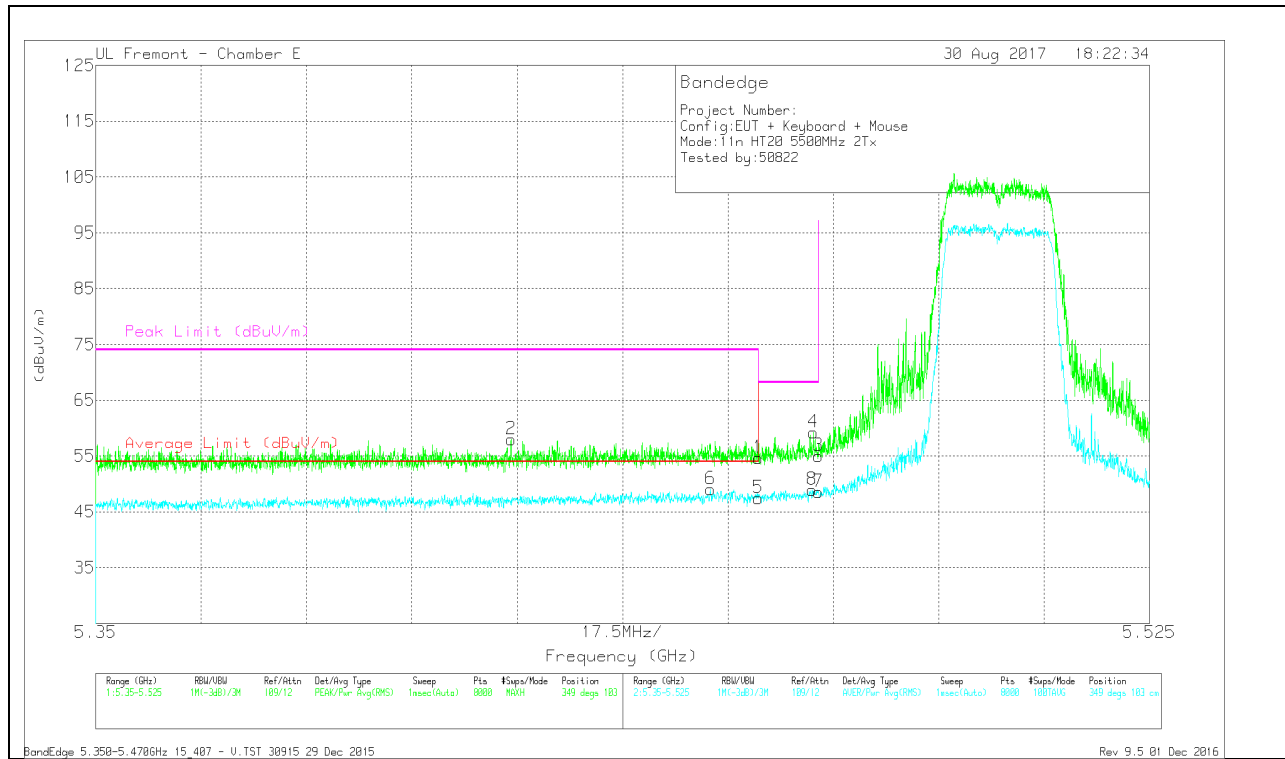


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.419	41.88	Pk	35	-18.9	0	57.98	-	-	74	-16.02	349	103	V
6	* 5.452	32.62	RMS	35.1	-18.9	.23	49.05	54	-4.95	-	-	349	103	V
1	* 5.46	38.48	Pk	35.1	-18.9	0	54.68	-	-	74	-19.32	349	103	V
5	* 5.46	31.05	RMS	35.1	-18.9	.23	47.48	54	-6.52	-	-	349	103	V
4	5.469	43	Pk	35.1	-18.9	0	59.2	-	-	68.2	-9	349	103	V
8	5.469	32.5	RMS	35.1	-18.9	.23	48.93	-	-	-	-	349	103	V
3	5.47	38.83	Pk	35.1	-18.9	0	55.03	-	-	68.2	-13.17	349	103	V
7	5.47	32.15	RMS	35.1	-18.9	.23	48.58	-	-	-	-	349	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

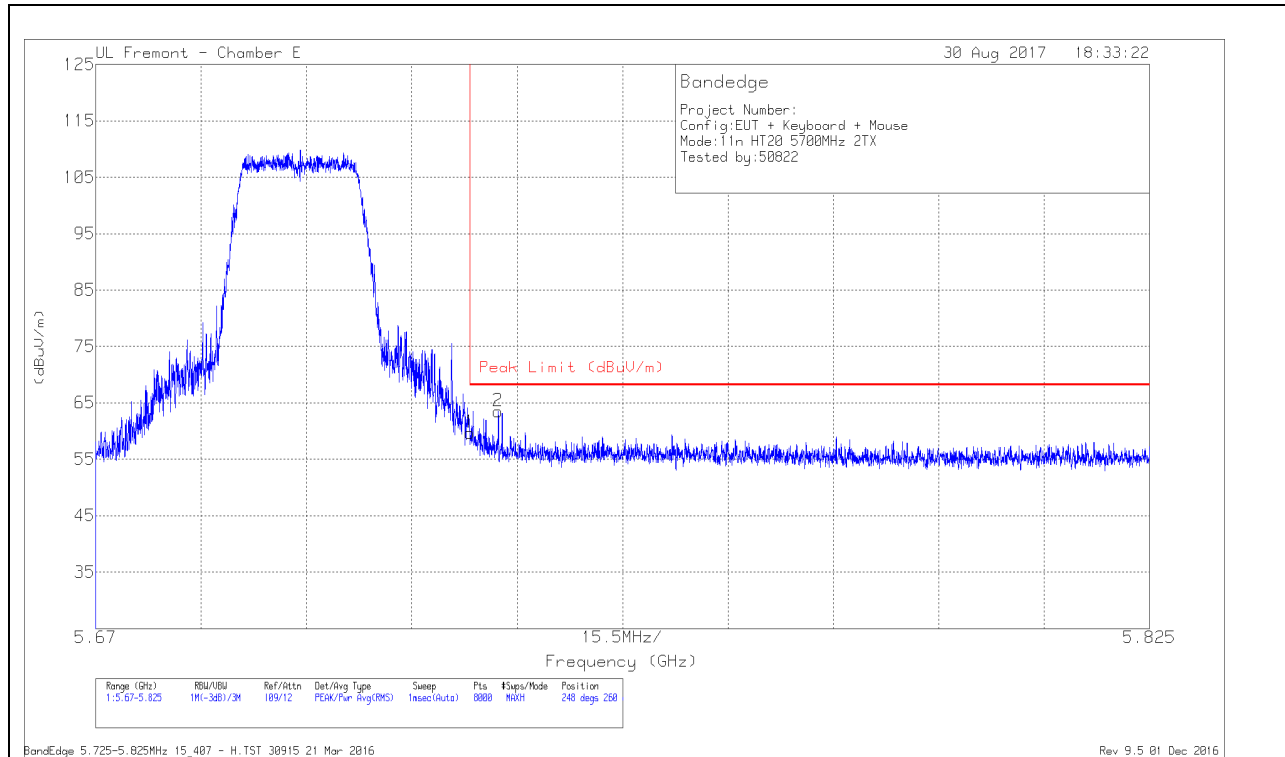

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.73	Pk	35.1	-19.1	0	59.73	68.2	-8.47	248	260	H
2	5.729	47.52	Pk	35.1	-19.1	0	63.52	68.2	-4.68	248	260	H

Pk - Peak detector

VERTICAL RESULT

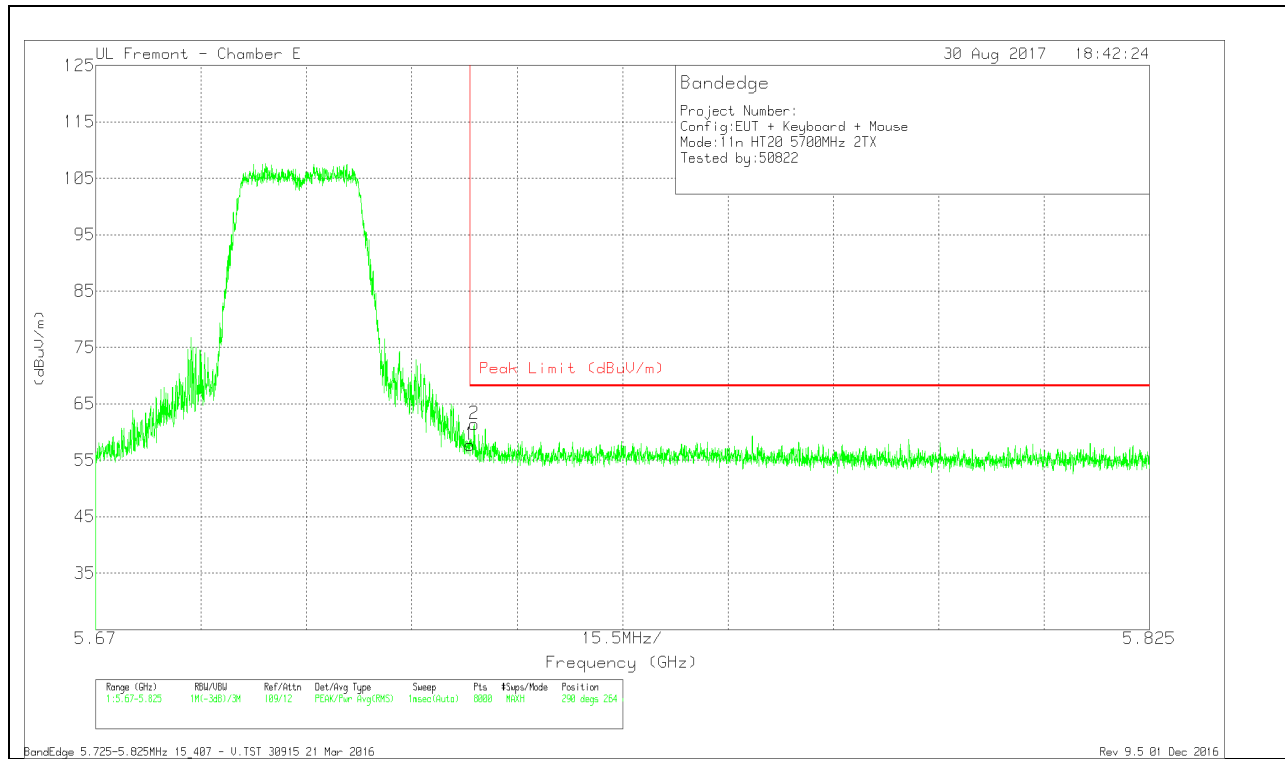


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.68	PK	35.1	-19.1	0	57.68	68.2	-10.52	290	264	V
2	5.726	45.38	PK	35.1	-19.1	0	61.38	68.2	-6.82	290	264	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF3 BF Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

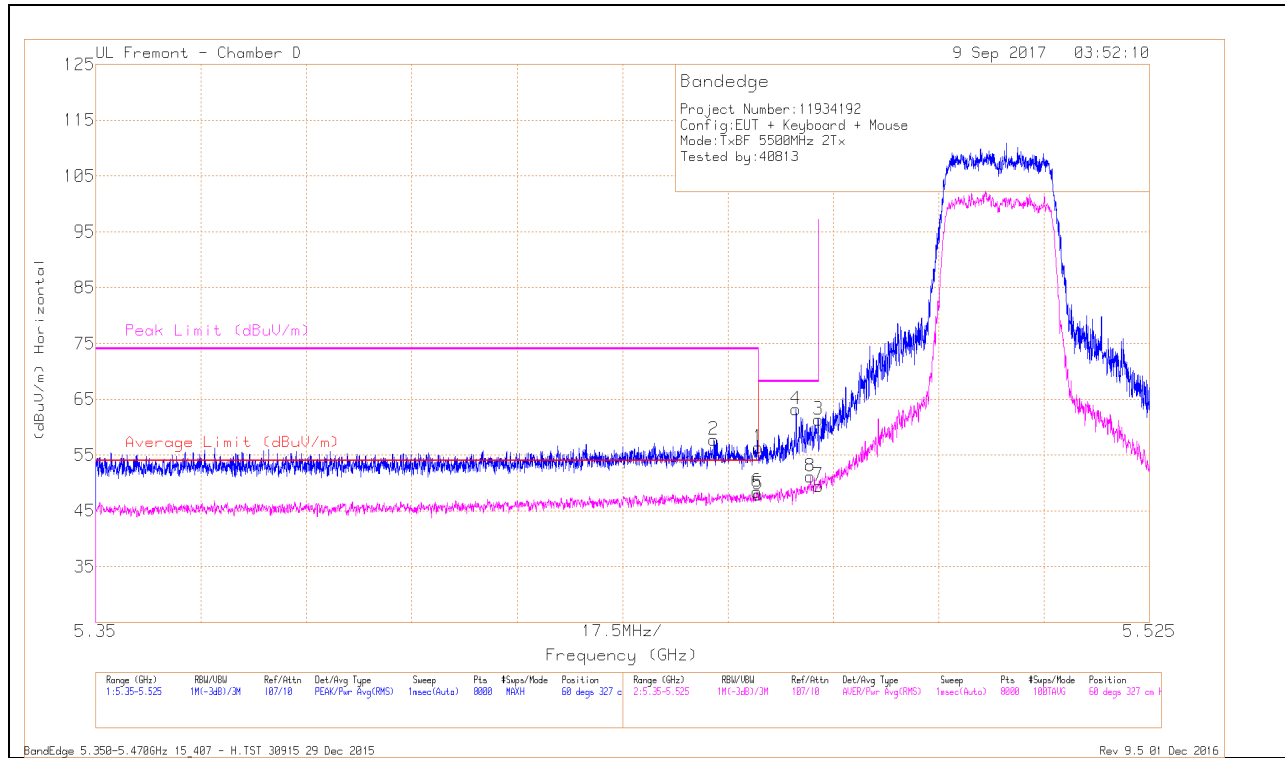


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.87	Pk	34.4	-17.9	0	56.37	-	-	74	-17.63	60	327	H
2	* 5.453	41.34	Pk	34.4	-18	0	57.74	-	-	74	-16.26	60	327	H
5	* 5.46	31.15	RMS	34.4	-17.9	.12	47.77	54	-6.23	-	-	60	327	H
6	* 5.46	31.67	RMS	34.4	-17.9	.12	48.29	54	-5.71	-	-	60	327	H
4	5.466	46.71	Pk	34.4	-17.9	0	63.21	-	-	68.2	-4.99	60	327	H
8	5.469	34.43	RMS	34.4	-17.9	.12	51.05	54	-2.95	-	-	60	327	H
3	5.47	44.88	Pk	34.4	-17.9	0	61.38	-	-	68.2	-6.82	60	327	H
7	5.47	32.73	RMS	34.4	-17.9	.12	49.35	54	-4.65	-	-	60	327	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

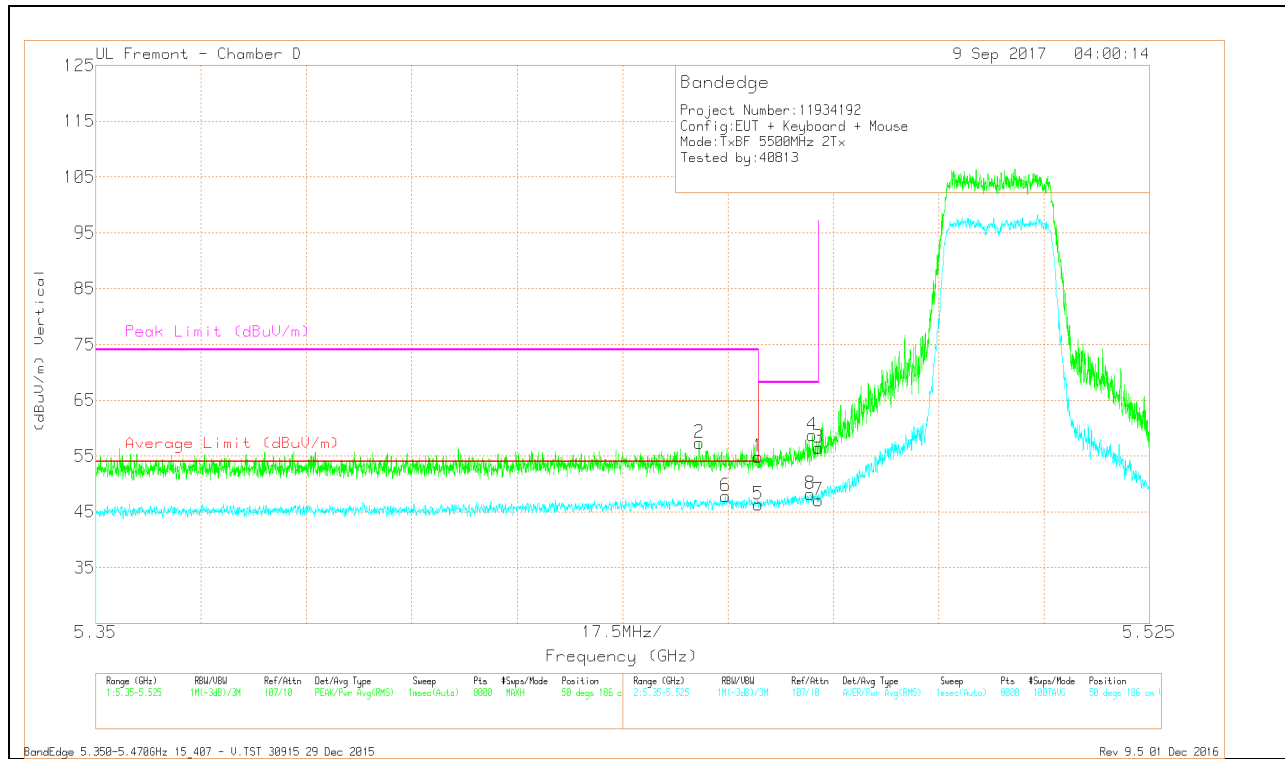


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.41	Pk	34.4	-17.9	0	54.91	-	-	74	-19.09	50	186	V
2	* 5.45	41.08	Pk	34.4	-18.1	0	57.38	-	-	74	-16.62	50	186	V
5	* 5.46	29.55	RMS	34.4	-17.9	.12	46.17	54	-7.83	-	-	50	186	V
6	* 5.455	31.13	RMS	34.4	-18	.12	47.65	54	-6.35	-	-	50	186	V
4	5.469	42.24	Pk	34.4	-17.9	0	58.74	-	-	68.2	-9.46	50	186	V
8	5.469	31.48	RMS	34.4	-17.9	.12	48.10	54	-5.90	-	-	50	186	V
3	5.47	39.95	Pk	34.4	-17.9	0	56.45	-	-	68.2	-11.75	50	186	V
7	5.47	30.31	RMS	34.4	-17.9	.12	46.93	54	-7.07	-	-	50	186	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

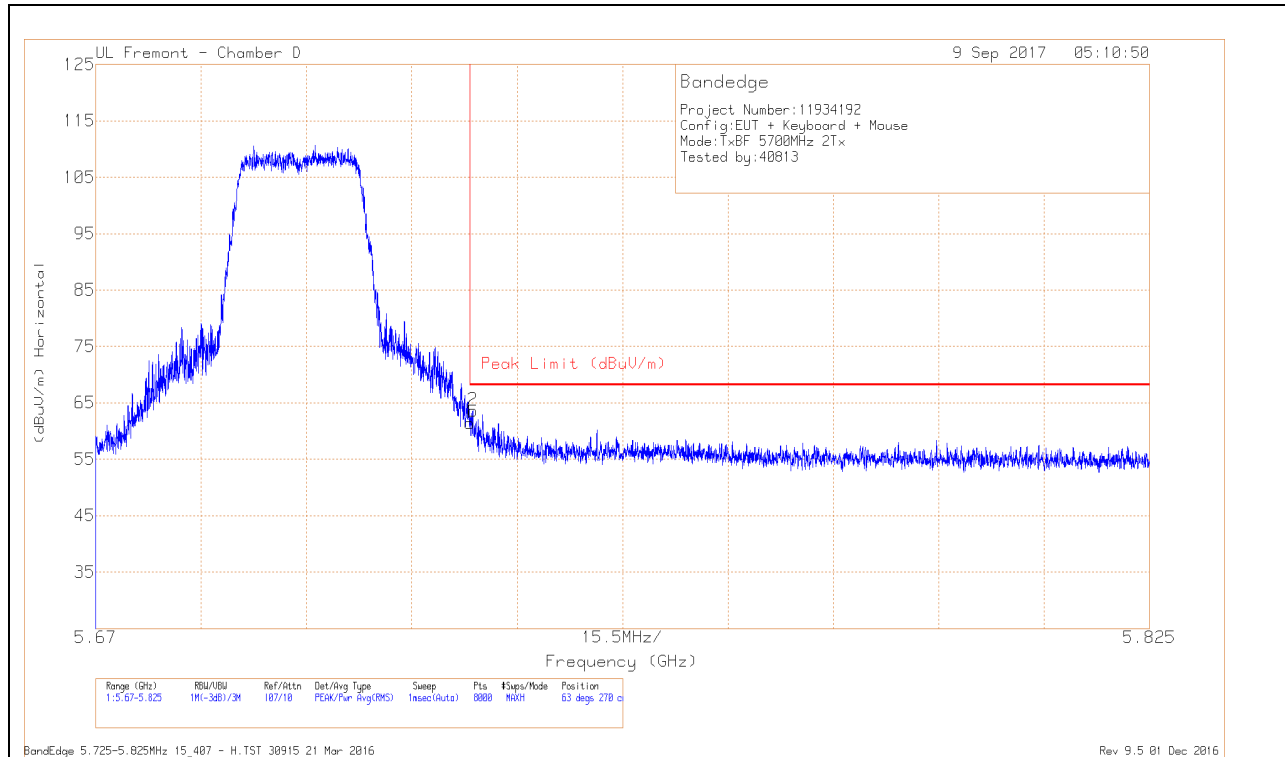

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.08	Pk	34.8	-17.5	0	61.38	68.2	-6.82	63	270	H
2	5.725	46.31	Pk	34.8	-17.5	0	63.61	68.2	-4.59	63	270	H

Pk - Peak detector

VERTICAL RESULT

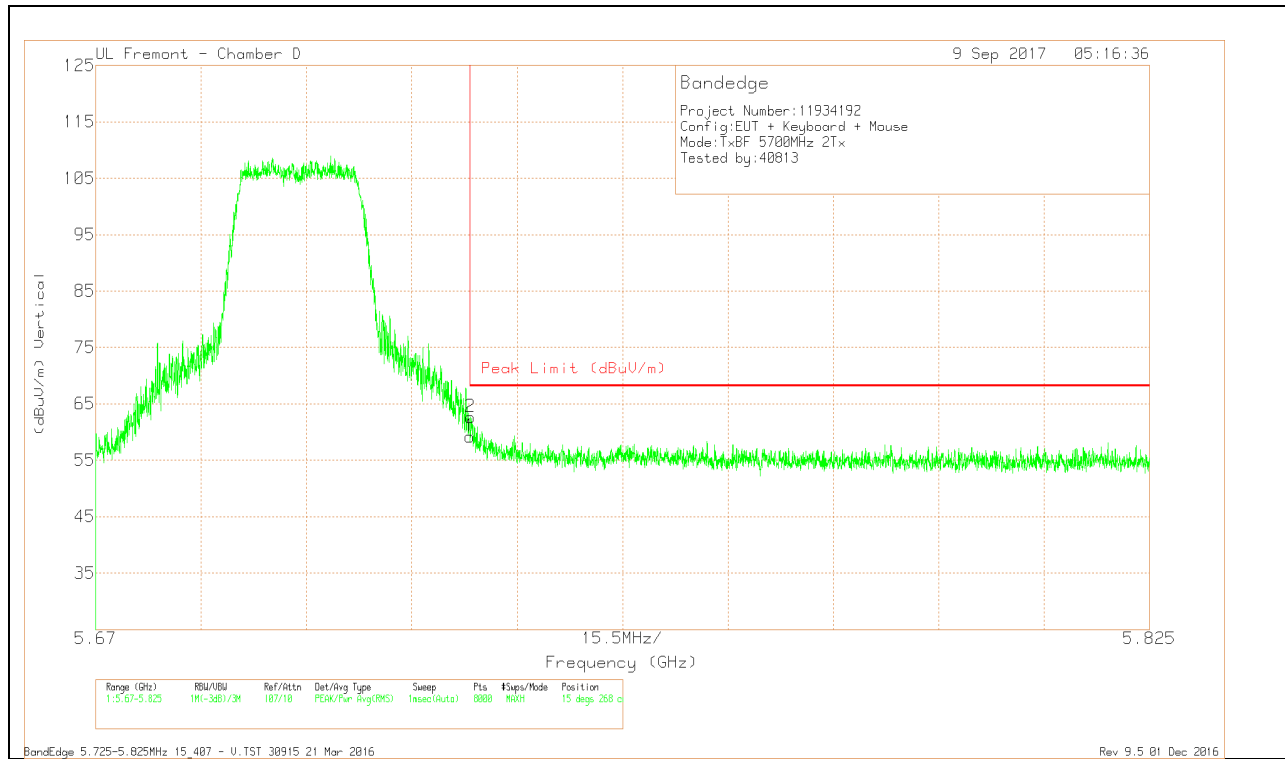


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.91	Pk	34.8	-17.5	0	59.21	68.2	-8.99	15	268	V
2	5.725	45.38	Pk	34.8	-17.5	0	62.68	68.2	-5.52	15	268	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF2 CDD Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

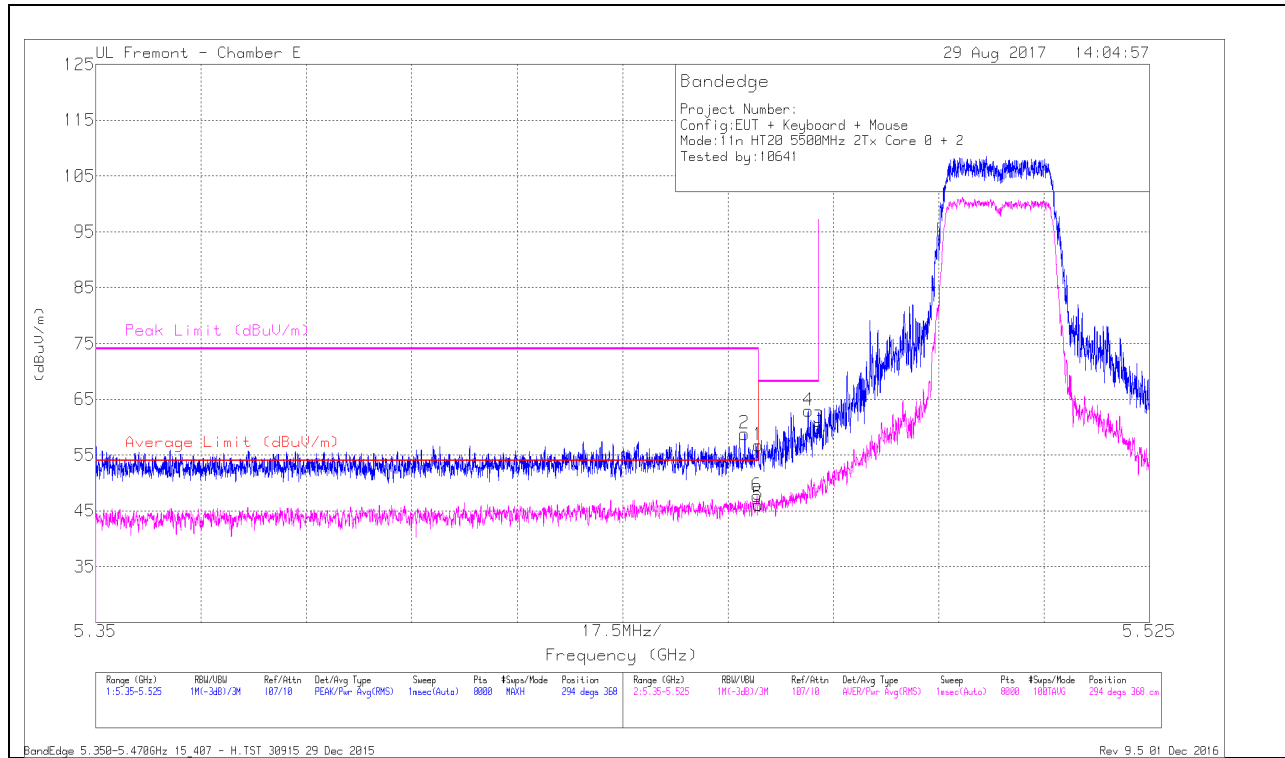


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.458	43.7	Pk	35.1	-20	0	58.8	-	-	74	-15.2	294	368	H
1	* 5.46	41.68	Pk	35.1	-20	0	56.78	-	-	74	-17.22	294	368	H
5	* 5.46	30.78	RMS	35.1	-20	.23	46.11	54	-7.89	-	-	294	368	H
6	* 5.46	32.31	RMS	35.1	-20	.23	47.64	54	-6.36	-	-	294	368	H
4	5.468	47.81	Pk	35.1	-19.9	0	63.01	-	-	68.2	-5.19	294	368	H
3	5.47	44.61	Pk	35.1	-19.9	0	59.81	-	-	68.2	-8.39	294	368	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

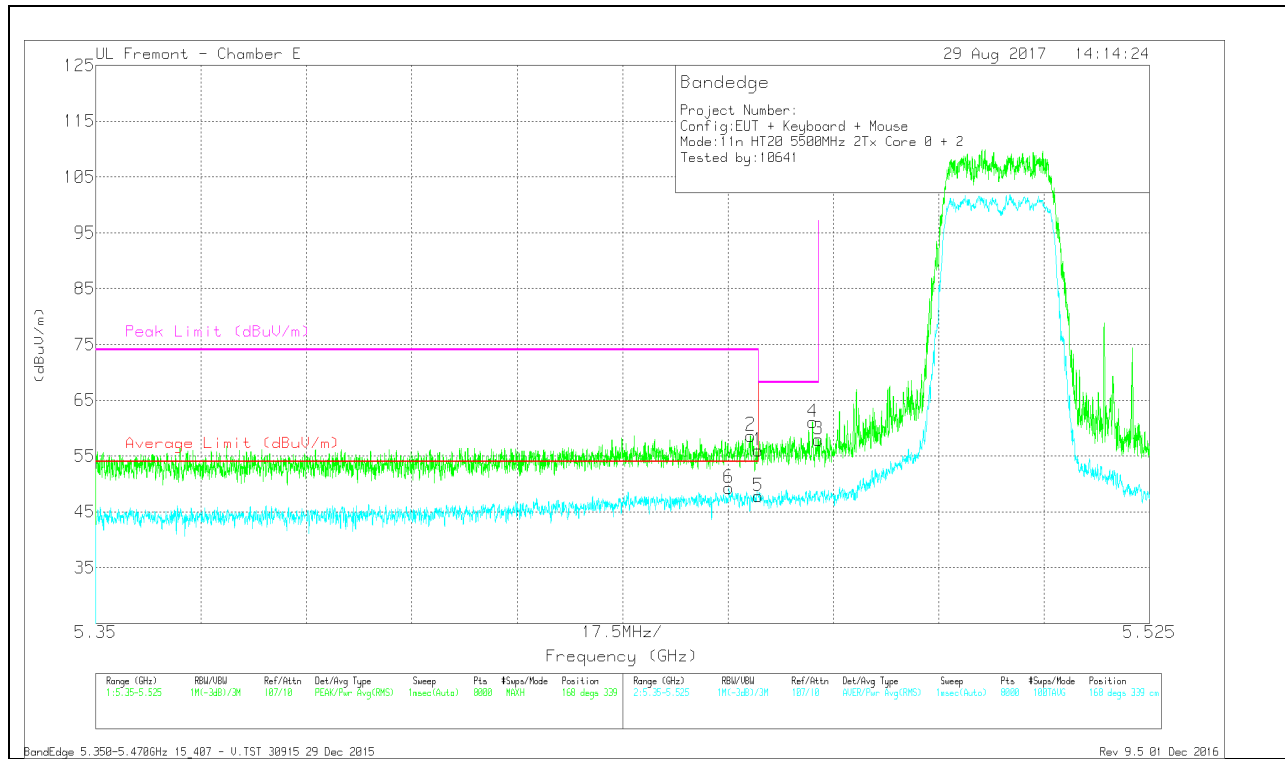


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.455	33.99	RMS	35.1	-20	.23	49.32	54	-4.68	-	-	168	339	V
2	* 5.459	43.57	Pk	35.1	-20	0	58.67	-	-	74	-15.33	168	339	V
1	* 5.46	40.88	Pk	35.1	-20	0	55.98	-	-	74	-18.02	168	339	V
5	* 5.46	32.53	RMS	35.1	-20	.23	47.86	54	-6.14	-	-	168	339	V
4	5.469	45.89	Pk	35.1	-19.9	0	61.09	-	-	68.2	-7.11	168	339	V
3	5.47	42.73	Pk	35.1	-19.9	0	57.93	-	-	68.2	-10.27	168	339	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

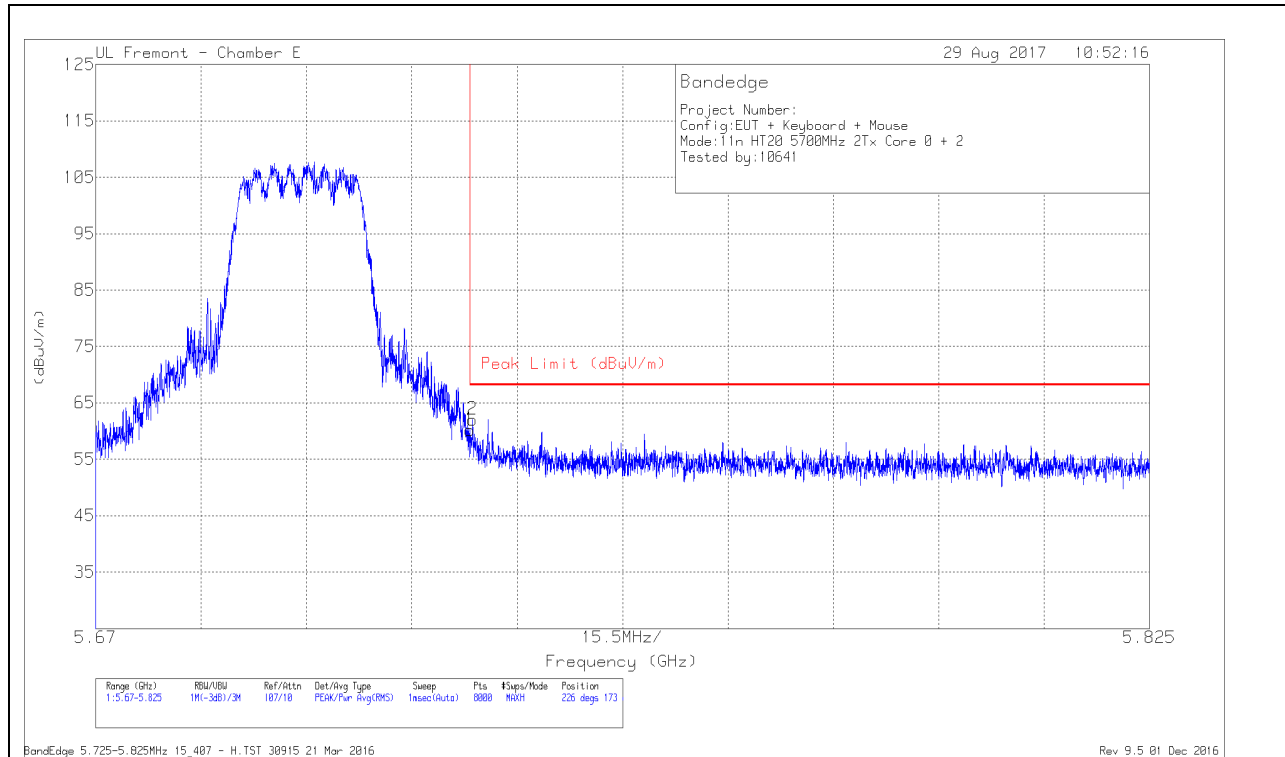

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.61	Pk	35.1	-19.5	0	60.21	68.2	-7.99	226	173	H
2	5.725	46.46	Pk	35.1	-19.5	0	62.06	68.2	-6.14	226	173	H

Pk - Peak detector

VERTICAL RESULT

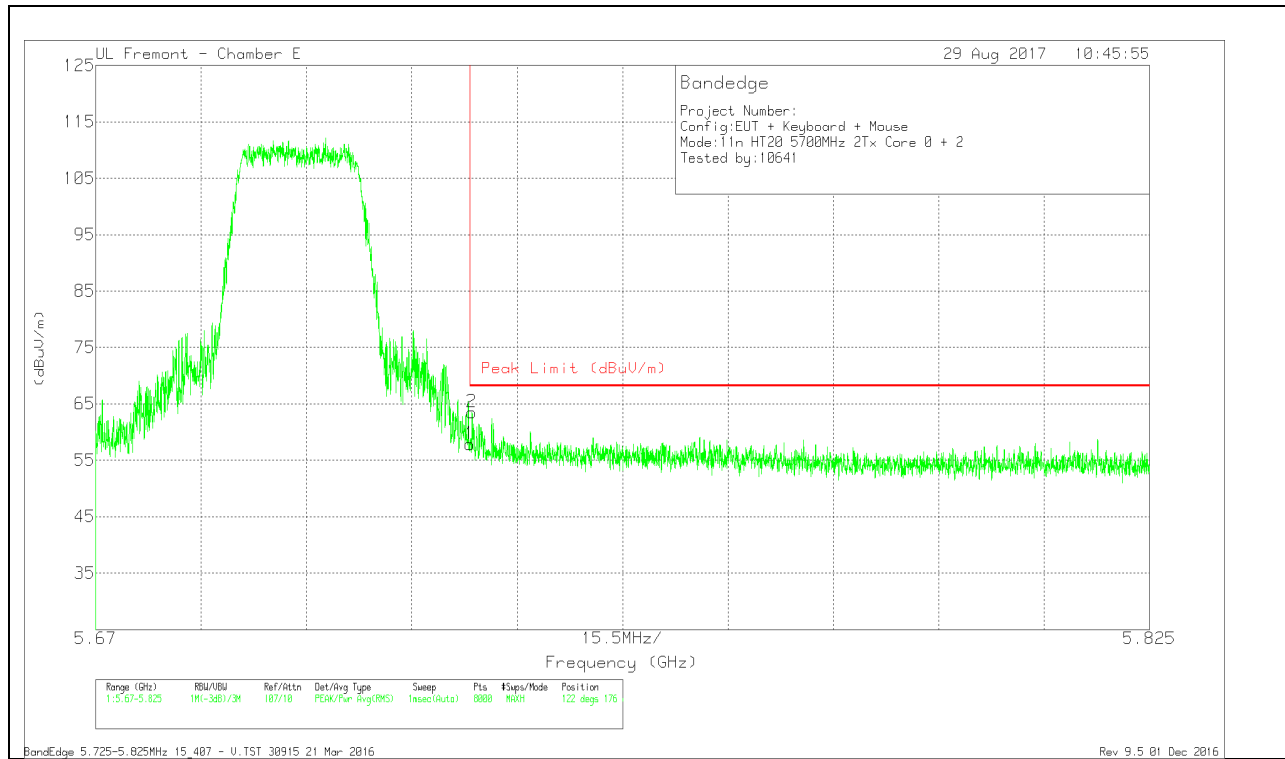


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.22	PK	35.1	-19.5	57.82	68.2	-10.38	122	176	V
2	5.725	47.85	PK	35.1	-19.5	63.45	68.2	-4.75	122	176	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF2 SDM Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

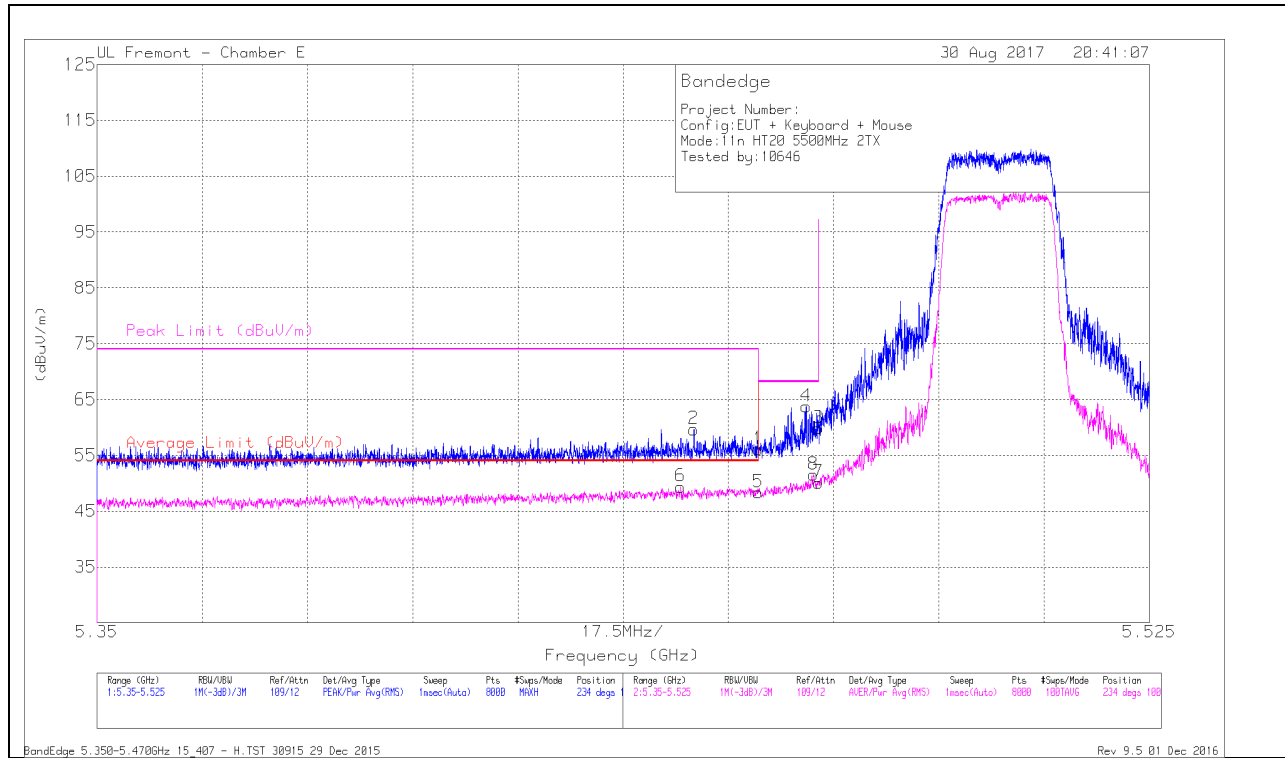


Marker	Frequen- cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.447	32.98	RMS	35.1	-18.9	.23	49.41	54	-4.59	-	-	234	100	H
2	* 5.449	43.48	Pk	35.1	-18.9	0	59.68	-	-	74	-14.32	234	100	H
1	* 5.46	39.89	Pk	35.1	-18.9	0	56.09	-	-	74	-17.91	234	100	H
5	* 5.46	31.95	RMS	35.1	-18.9	.23	48.38	54	-5.62	-	-	234	100	H
4	5.468	47.55	Pk	35.1	-18.9	0	63.75	-	-	68.2	-4.45	234	100	H
8	5.469	35.1	RMS	35.1	-18.9	.23	51.53	-	-	-	-	234	100	H
3	5.47	43.66	Pk	35.1	-18.9	0	59.86	-	-	68.2	-8.34	234	100	H
7	5.47	33.68	RMS	35.1	-18.9	.23	50.11	-	-	-	-	234	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

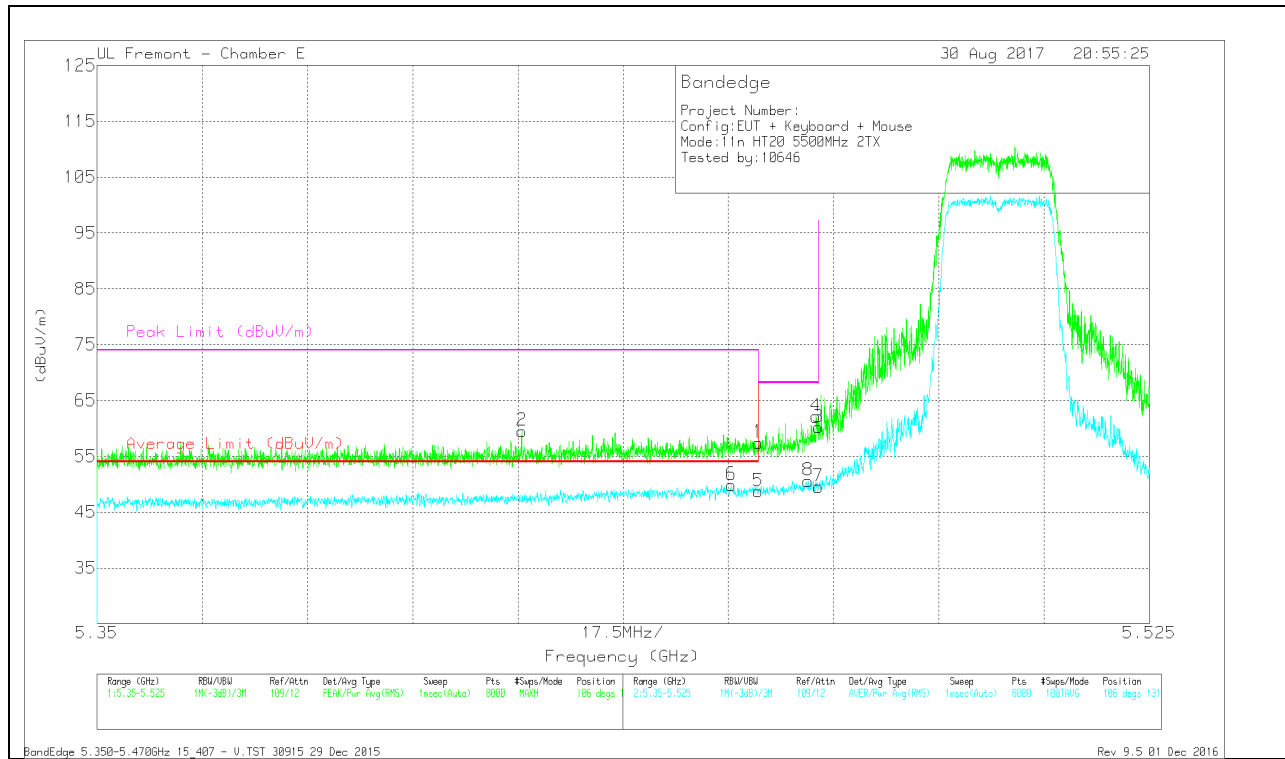


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.421	43.45	Pk	35.1	-19	0	59.55	-	-	74	-14.45	106	131	V
6	* 5.455	33.46	RMS	35.1	-18.9	.23	49.89	54	-4.11	-	-	106	131	V
1	* 5.46	41.24	Pk	35.1	-18.9	0	57.44	-	-	74	-16.56	106	131	V
5	* 5.46	32.32	RMS	35.1	-18.9	.23	48.75	54	-5.25	-	-	106	131	V
8	5.468	34.2	RMS	35.1	-18.9	.23	50.63	-	-	-	-	106	131	V
3	5.47	44.02	Pk	35.1	-18.9	0	60.22	-	-	68.2	-7.98	106	131	V
4	5.47	45.94	Pk	35.1	-18.9	0	62.14	-	-	68.2	-6.06	106	131	V
7	5.47	33.11	RMS	35.1	-18.9	.23	49.54	-	-	-	-	106	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

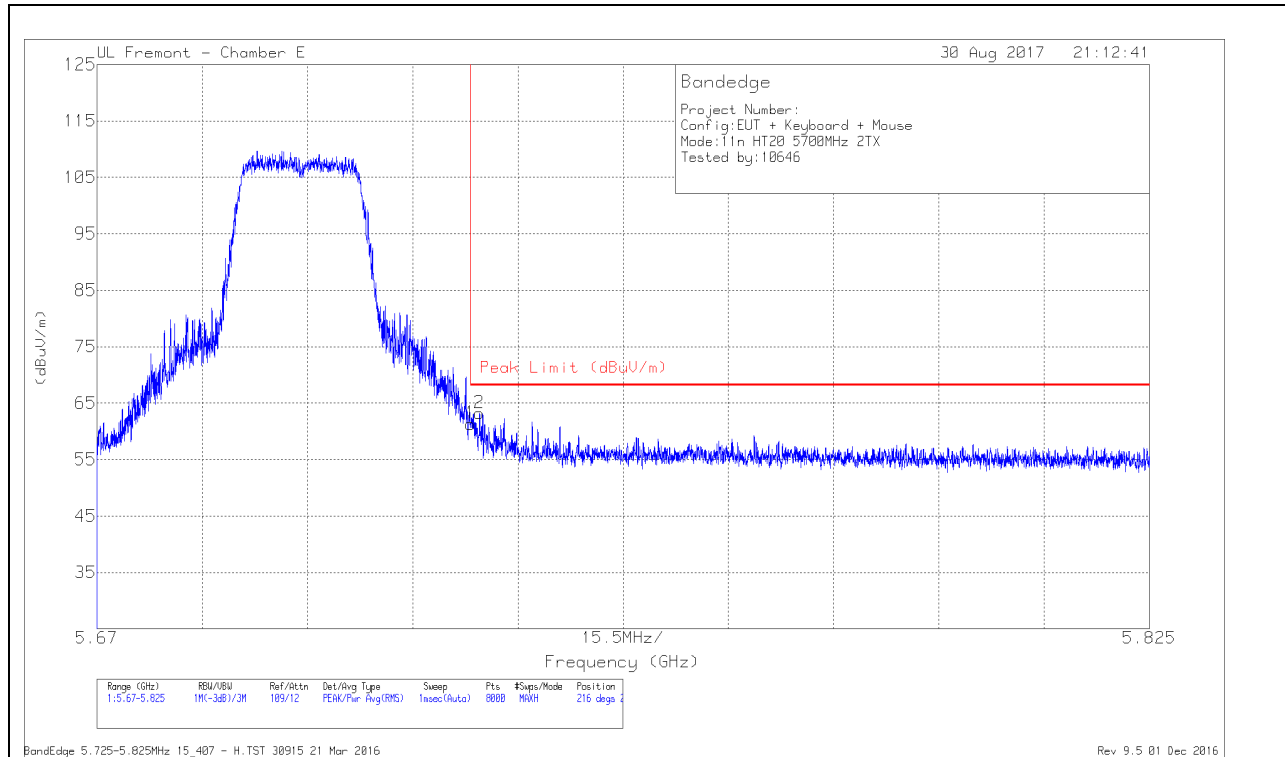

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.34	Pk	35.1	-19.1	0	61.34	68.2	-6.86	216	281	H
2	5.726	47.19	Pk	35.1	-19.1	0	63.19	68.2	-5.01	216	281	H

Pk - Peak detector

VERTICAL RESULT

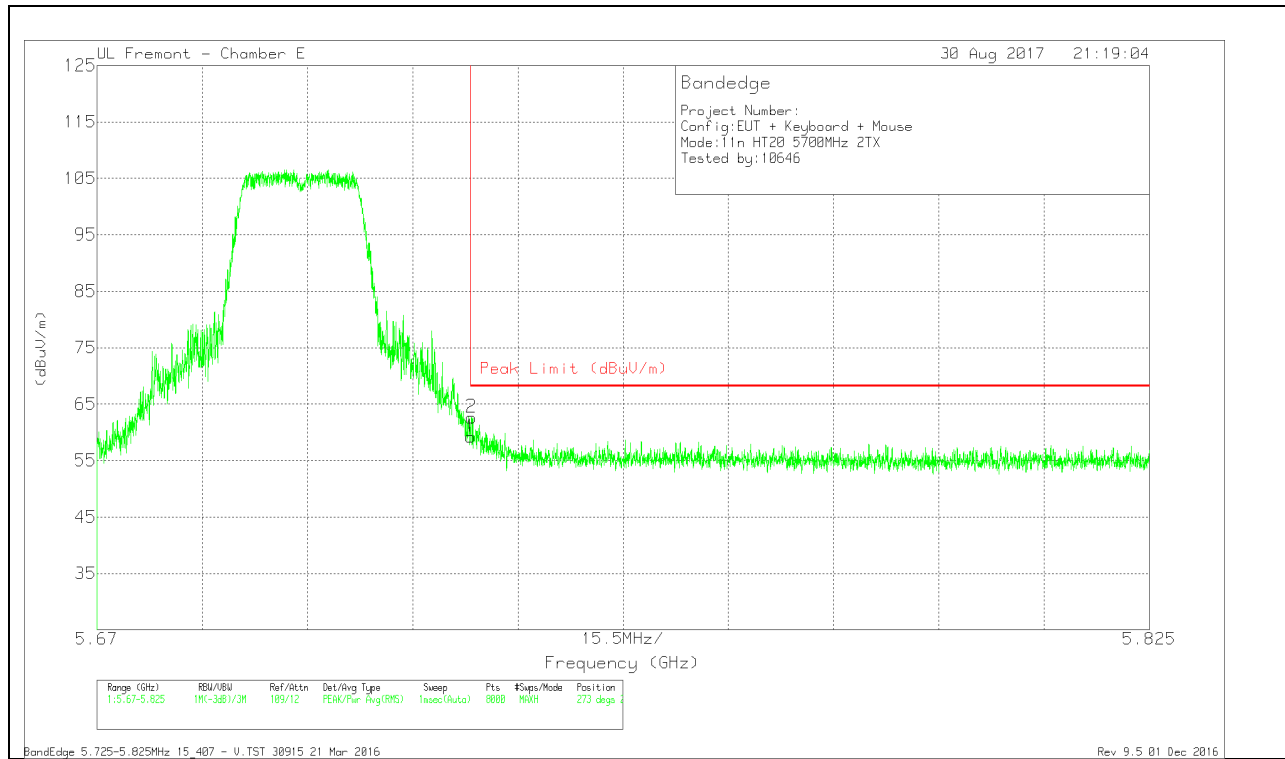


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fl tr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.22	Pk	35.1	-19.1	59.22	68.2	-8.98	273	284	V
2	5.725	46.65	Pk	35.1	-19.1	62.65	68.2	-5.55	273	284	V

Pk - Peak detector

2TX Antenna WF4 + Antenna WF2 BF Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

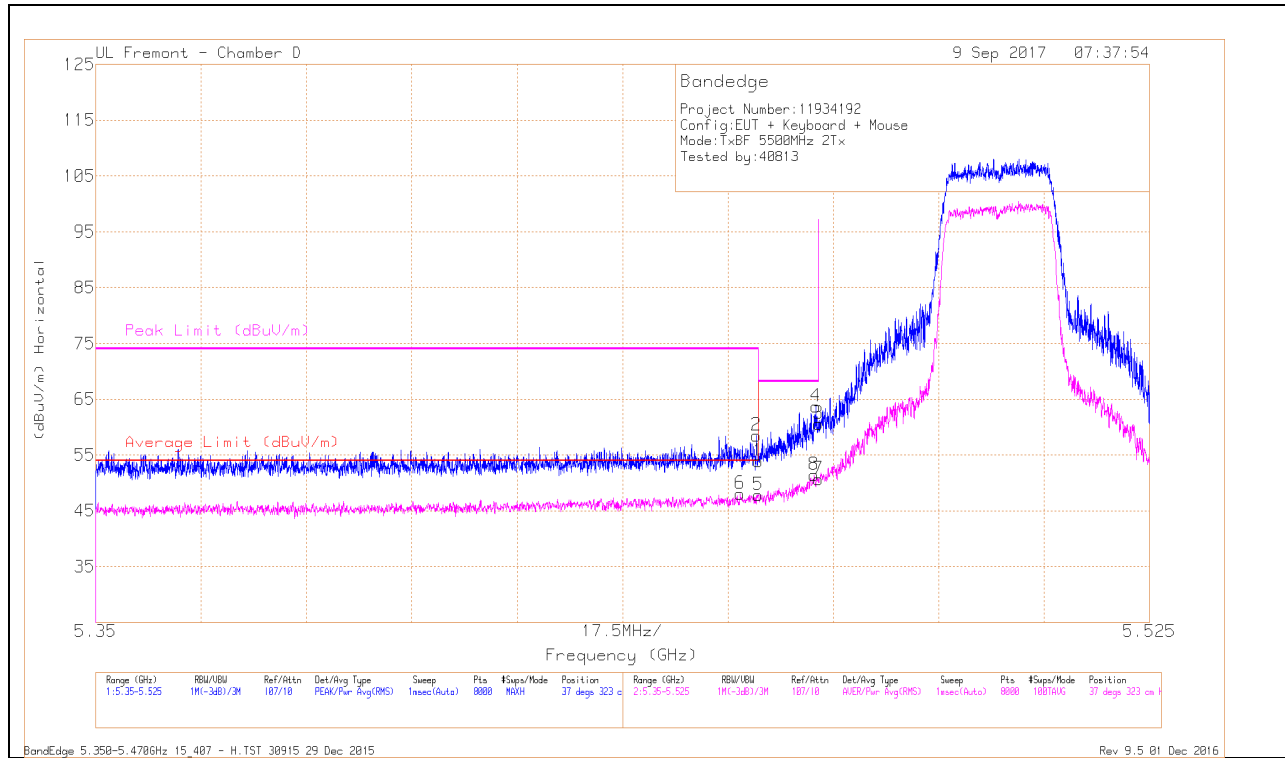


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.44	Pk	34.4	-17.9	0	53.94	-	-	74	-20.06	37	323	H
2	* 5.46	41.97	Pk	34.4	-17.9	0	58.47	-	-	74	-15.53	37	323	H
5	* 5.46	31.06	RMS	34.4	-17.9	.12	47.68	54	-6.32	-	-	37	323	H
6	* 5.457	31.36	RMS	34.4	-18	.12	47.88	54	-6.12	-	-	37	323	H
8	5.469	34.64	RMS	34.4	-17.9	.12	51.26	54	-2.74	-	-	37	323	H
3	5.47	44.05	Pk	34.4	-17.9	0	60.55	-	-	68.2	-7.65	37	323	H
4	5.47	47.18	Pk	34.4	-17.9	0	63.68	-	-	68.2	-4.52	37	323	H
7	5.47	33.86	RMS	34.4	-17.9	.12	50.48	54	-3.52	-	-	37	323	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

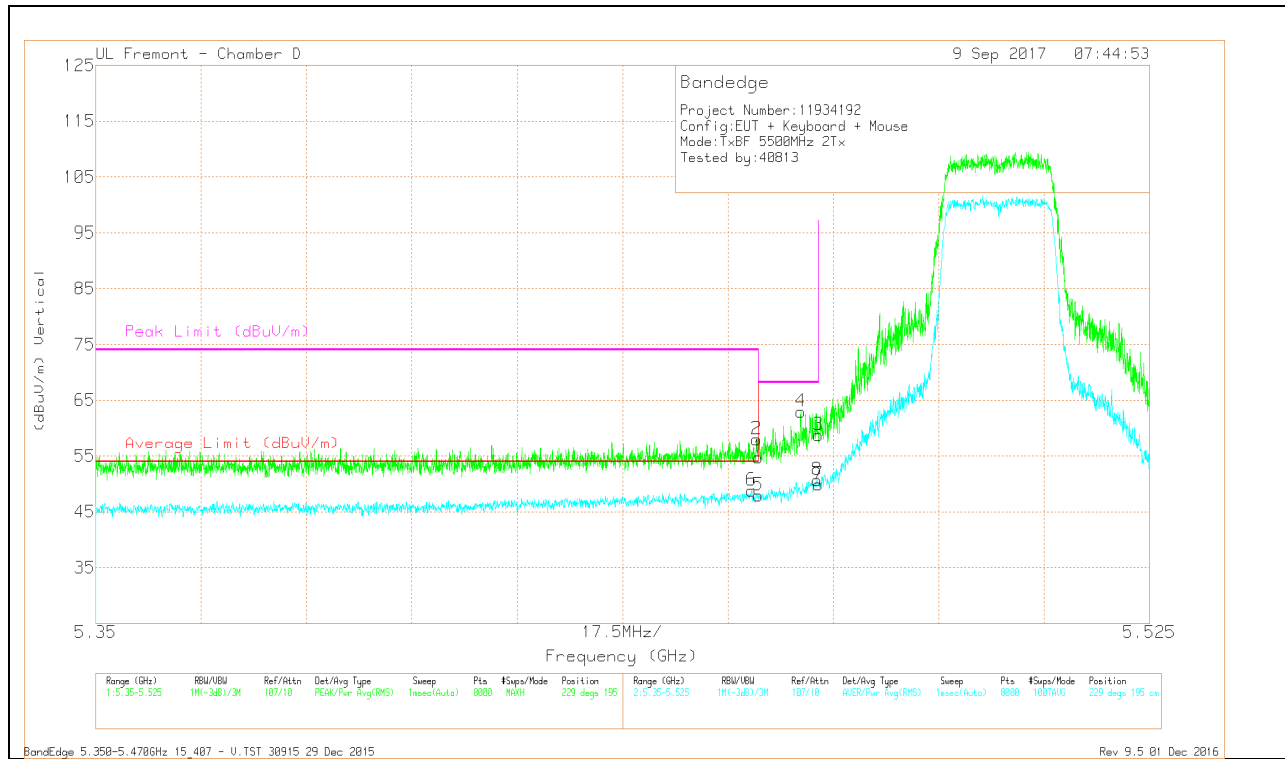


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.27	Pk	34.4	-17.9	0	54.77	-	-	74	-19.23	229	195	V
2	* 5.46	41.49	Pk	34.4	-17.9	0	57.99	-	-	74	-16.01	229	195	V
5	* 5.46	31.22	RMS	34.4	-17.9	.12	47.84	54	-6.16	-	-	229	195	V
6	* 5.459	32.15	RMS	34.4	-18	.12	48.67	54	-5.33	-	-	229	195	V
4	5.467	46.41	Pk	34.4	-17.9	0	62.91	-	-	68.2	-5.29	229	195	V
3	5.47	42.27	Pk	34.4	-17.9	0	58.77	-	-	68.2	-9.43	229	195	V
7	5.47	33.16	RMS	34.4	-17.9	.12	49.78	54	-4.22	-	-	229	195	V
8	5.47	33.91	RMS	34.4	-17.9	.12	50.53	54	-3.47	-	-	229	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

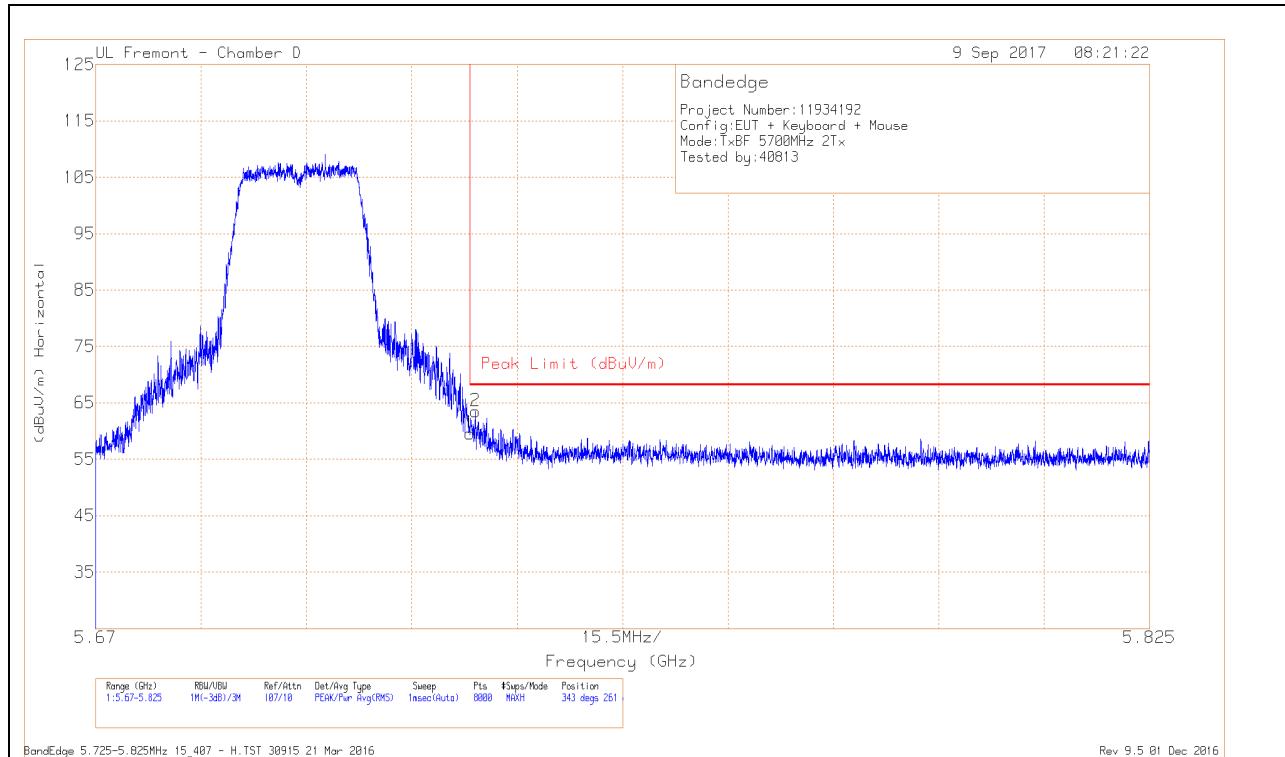

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.32	PK	34.8	-17.5	0	59.62	68.2	-8.58	343	261	H
2	5.726	46.26	PK	34.8	-17.5	0	63.56	68.2	-4.64	343	261	H

Pk - Peak detector

VERTICAL RESULT

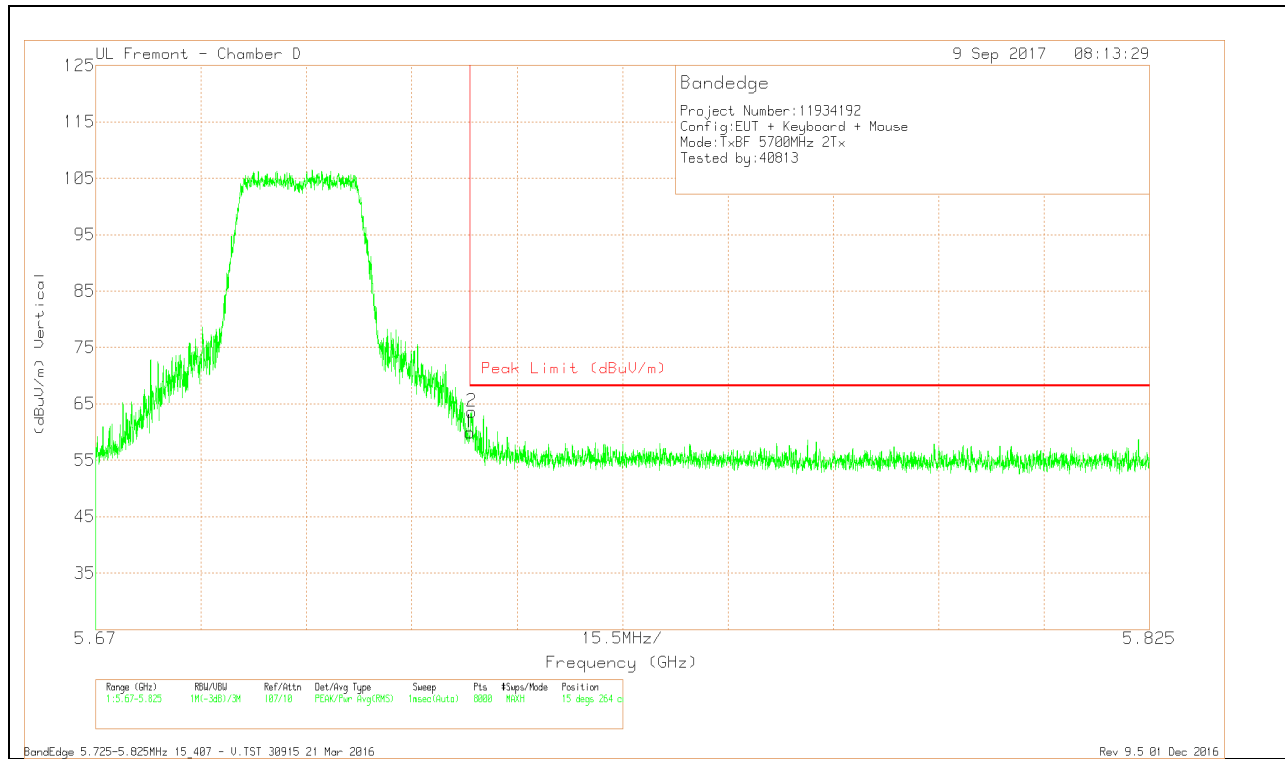


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.65	Pk	34.8	-17.5	0	59.95	68.2	-8.25	15	264	V
2	5.725	46.28	Pk	34.8	-17.5	0	63.58	68.2	-4.62	15	264	V

Pk - Peak detector

2TX Antenna WF3 + Antenna WF2 CDD Mode

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

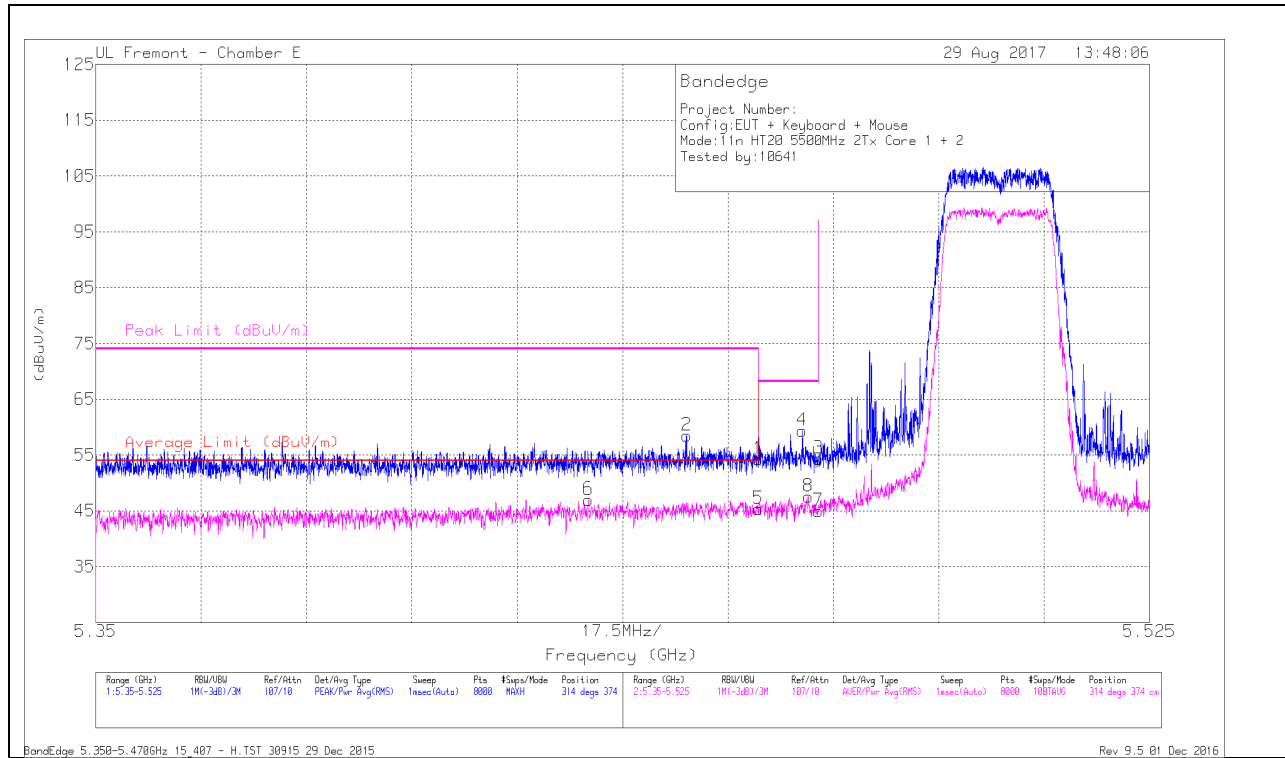


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.22	Pk	35.1	-20	0	54.32	-	-	74	-19.68	314	374	H
2	* 5.448	43.45	Pk	35.1	-20.1	0	58.45	-	-	74	-15.55	314	374	H
5	* 5.46	29.99	RMS	35.1	-20	.23	45.32	54	-8.68	-	-	314	374	H
6	* 5.432	31.77	RMS	35.1	-20.1	.23	47	54	-7	-	-	314	374	H
4	5.467	44.18	Pk	35.1	-19.9	0	59.38	-	-	68.2	-8.82	314	374	H
8	5.468	32.1	RMS	35.1	-19.9	.23	47.53	-	-	-	-	314	374	H
3	5.47	39.13	Pk	35.1	-19.9	0	54.33	-	-	68.2	-13.87	314	374	H
7	5.47	29.55	RMS	35.1	-19.9	.23	44.98	-	-	-	-	314	374	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

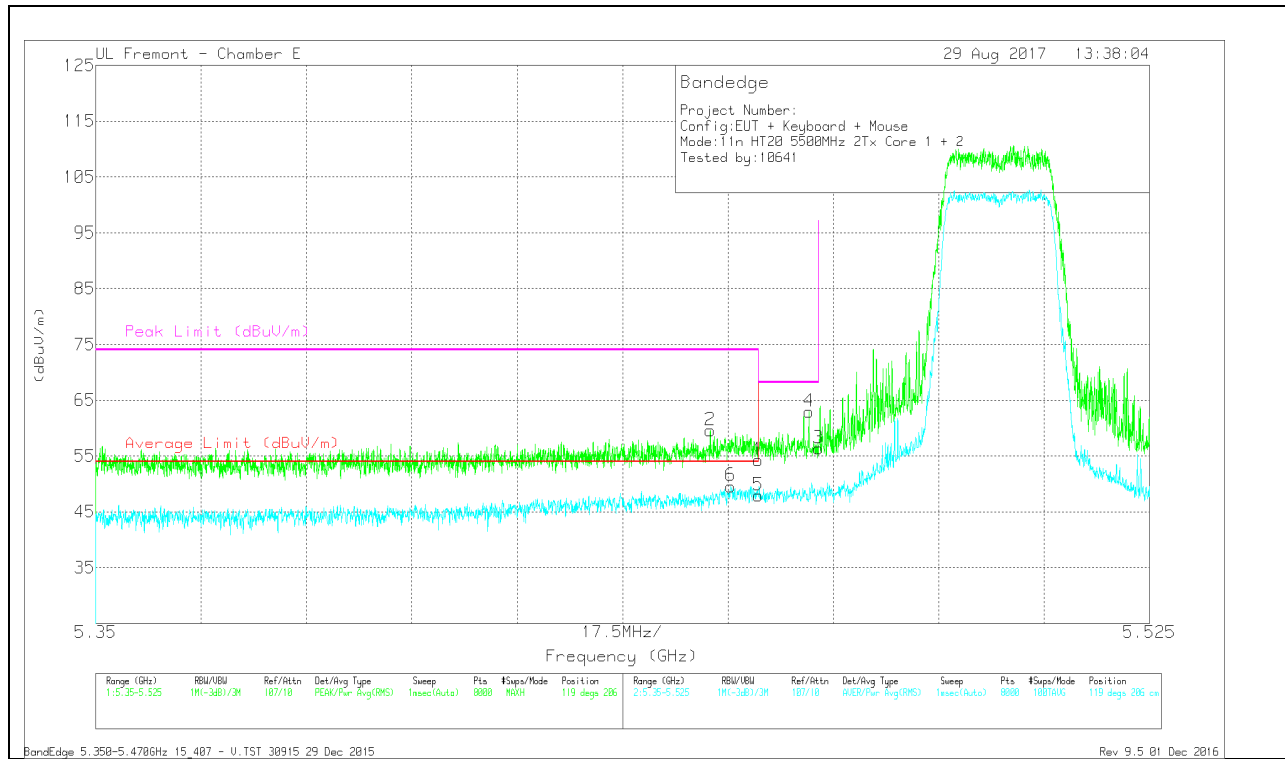

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.15	Pk	35.1	-20	0	54.25	-	-	74	-19.75	119	206	V
2	* 5.452	44.62	Pk	35.1	-20.1	0	59.62	-	-	74	-14.38	119	206	V
5	* 5.46	32.55	RMS	35.1	-20	.23	47.88	54	-6.12	-	-	119	206	V
6	* 5.455	34.28	RMS	35.1	-20	.23	49.61	54	-4.39	-	-	119	206	V
4	5.468	47.81	Pk	35.1	-19.9	0	63.01	-	-	68.2	-5.19	119	206	V
3	5.47	41.18	Pk	35.1	-19.9	0	56.38	-	-	68.2	-11.82	119	206	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection