

OPEN GPON OLT

ASGvOLT64



ASGvOLT64 is a 64 port GPON OLT virtual Optical Line Terminal (vOLT) with 2 fixed 40/100G QSFP28 uplink ports capable of breaking out to 4 x 25/10G, 8 fixed 10/25G SFP28. All interfaces are able to be accessed from the front panel. All 1G GPON ports are able to operate at line rate by default and support transceivers meeting 1G GPON ITU-T G.984 standards.

This vOLT platform supports redundant hot-swappable PSUs and fans, and is available with a front-to-back airflow direction. This open network switch is loaded with the Open Network Install Environment (ONIE), which supports the installation of compatible Network Operating System (NOS) software, including the open source plus commercial NOS offerings.

Key Features and Benefits

- High capacity 64 port GPON OLT for next generation open and disaggregated access network architecture.
- 2 x QSFP28 switch ports, each supporting 1 x 100 GbE or 1 x 40 GbE, or via breakout cables 2 x 50 GbE, 4 x 25 GbE, or 4 x 10 GbE.
- Layer 2 or Layer 3 forwarding at 300 Gbps (full duplex).
- Supports front-to-back airflow SKU.
- All ports on front; PSUs and fans accessible from rear.
- Hot-swappable, load-sharing, and redundant AC or DC PSUs.
- 3+1 redundant, hot-swappable fan modules.
- Hardware switch pre-loaded with Open Network Install Environment (ONIE) for automated loading of compatible open source and commercial NOS offerings.



Freedom
of choice



Greater
control




Rapid
innovation



Reduced
CAPEX and OPEX



Interfaces

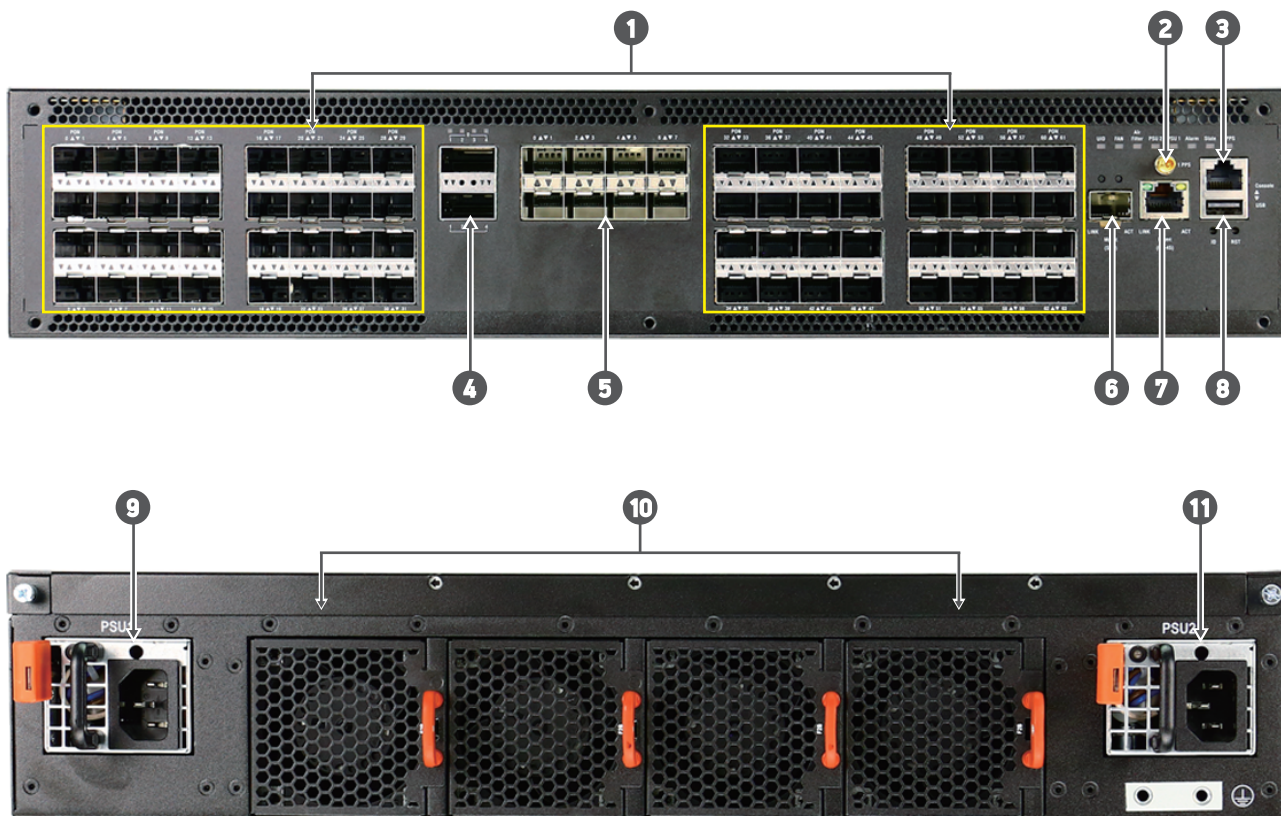

Description

- | | |
|-----------------------------|--|
| 1. 64 x SFP GPON ports | 7. 1 x RJ-45 management port |
| 2. 1pps Output | 8. 1 x USB2.0 storage port |
| 3. 1 x RJ-45 console port | 9. PSU1 |
| 4. 2 x 40/100G QSFP28 ports | 10. Hot-swappable 3 + 1 redundant fans |
| 5. 8 x 10/25 SFP28 ports | 11. PSU2 |
| 6. 1 x SFP management port | |

Ports

- Fixed Ports:
 - 64 x GPON ports (ITU-T G.984 compliant)
 - 8 x 10G/25G SFP28
 - 2 x 40G/100G QSFP28
- Management ports on port side:
 - 1 x RJ-45 serial console
 - 1 x RJ-45, and 1 x SFP Combo management ports supporting 1000BASE-T and 1000BASE-X
 - 1 x USB (storage)
- Supported Transceivers and Cables:
 - GPON Class B+/C+
 - 1000BASE-SX/LX
 - 10GBASE-SR/LR
 - 25GBASE-SR/LR
 - 40GBASE-SR4/LR4
 - 100GBASE-LR4
 - Note: More optics and detailed cabling information can be found at www.edge-core.com.

Key Components

- Switch Silicon: Broadcom BCM88470 Qumran-AX
- PON ASIC: Broadcom BCM68622
- CPU Modules:
 - Intel® Pentium® D-1519 processor 4-Core 1.5 GHz
 - DDR SDRAM: 8 GB x 2 2133 MHz with ECC (SO-DIMM) DDR4

Performance

- Switching Capability: 300 Gbps
- Jumbo frames support up to 9 Kbytes
- Packet Buffer Size: 32 K programmable wire-rate queues

Physical and Environmental

- Dimensions (WxDxH): 477 × 600 x 89 mm (18.78 x 23.62 x 3.50 in)
- Weight: 16.51 kg (36.39 lb)
- Fans: Hot-swappable 3 + 1 redundant fans
- Operating Temperature: 0°C to 40°C (32°F to 104°F)
- Storage Temperature: -40°C to 70°C (-40°F to 158°F)
- Operating Humidity: 5% to 95% non-condensing

LEDs

- SFP28/QSFP28 Port LEDs: Link Status, Activity, Rate
- Ethernet Management Port LED: Link Status, Activity
- System LEDs: Diagnostic, Locator, PSU and Fan Status

Power

- DC Input: -36 - -72V, 16-8A
- AC Input: 100-240V, 5.5-2.3A

Software

- Switch is loaded with Open Network Install Environment (ONIE) software installer
- Compatible with the following NOS options: open source options, plus commercial NOS offerings.

Regulatory Compliance

- Safety Compatibility
 - CB: IEC 60950-1 2nd & IEC62368-1 2nd
 - UL 62368-1 and CSA C22.2 No. 62368-1-14
- EMI
 - CE Mark
 - EN55032 Class A
 - EN55024/35
 - EN61000-3-2
 - EN61000-3-3
- FCC Part 15 Subpart B Class A
 - EN 300 386
- Environmental Compliance
 - Storage: ETSI 300 019-2-1 Class 1.2
 - Transportation: ETSI 300 019-2-2 Class 2.3
 - Operational: ETSI 300 019-2-3 Class 3.3
 - Altitude: IEC60068-2-40, IEC60068-2-41, IEC60068-2-13
 - Humidity: IEC60721-3-3 Class 3K4, IEC60068-2-56, IEC60068-2-30
 - Acoustic noise: ETS 300753
 - RoHS-6 Compliant

Warranty

Please check www.edge-core.com for the warranty terms in your country.

For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit www.edge-core.com.

About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at www.edge-core.com.

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2023 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.

Ordering Information

Base Model: ASGvOLT64; Intel® Pentium® D-1519 4-Core, 64 x GPON ports, 8 x 10G/25G SFP28, 2 x 40G/100G QSFP28; ONIE Software Installer.

| Model Number | Part Number | PSU | Airflow | Region (Power Cord) |
|---------------------|---------------|------------------|-----------------------|---------------------|
| ASGvOLT64-O-48V-F | FN1EC0964005Z | Dual 48 VDC PSUs | Front-to-Back Airflow | NA |
| ASGvOLT64 | FN1EC0964000Z | Dual AC PSUs | Front-to-Back Airflow | NA |
| ASGvOLT64-O-AC-F-TW | FN1EC0964T01Z | Dual AC PSUs | Front-to-Back Airflow | TW |
| ASGvOLT64-O-AC-F-US | FN1EC0964400Z | Dual AC PSUs | Front-to-Back Airflow | N. America |
| ASGvOLT64-O-AC-F-EU | FN1EC0964200Z | Dual AC PSUs | Front-to-Back Airflow | EU |
| ASGvOLT64-O-AC-F-UK | FN1EC0964300Z | Dual AC PSUs | Front-to-Back Airflow | UK |
| ASGvOLT64-O-AC-F-JP | FN1EC0964500Z | Dual AC PSUs | Front-to-Back Airflow | JP |

| Transceiver Product ID | Data Rate | Form Factor | Max. Reach | Cable Type | Media | Connector Type | Case Temp. |
|------------------------|-----------|-------------|----------------------------|--------------|-------|----------------|--------------|
| ET4202-SX | 1 Gbps | SFP | 550 m | Duplex Fiber | MMF | LC | 0°C to +70°C |
| ET4202-LX | 1 Gbps | SFP | 10 km | Duplex Fiber | SMF | LC | 0°C to +70°C |
| ET5402-SR | 10 Gbps | SFP+ | OM3: 70 km OM4: 100 km | Duplex Fiber | MMF | LC | 0°C to +70°C |
| ET5402-LR | 10 Gbps | SFP+ | 10 km | Duplex Fiber | SMF | LC | 0°C to +70°C |
| ET7302-SR | 25 Gbps | SFP28 | OM3: 70 km OM4: 100 km | Duplex Fiber | MMF | LC | 0°C to +70°C |
| ET7302-LR | 25 Gbps | SFP28 | 10 km | Duplex Fiber | SMF | LC | 0°C to +70°C |
| ET6401-SR4 | 40 Gbps | QSFP+ | OM3: 100 km OM4: 150 km | Duplex Fiber | MMF | LC | 0°C to +70°C |
| ET6401-LR4 | 40 Gbps | QSFP+ | 10 km | Duplex Fiber | SMF | LC | 0°C to +70°C |
| ET7402-LR4 | 100 Gbps | QSFP28 | 10 km | Duplex Fiber | SMF | LC | 0°C to +70°C |