


USE AND CARE GUIDE

CORNER WALL HUNG SINK

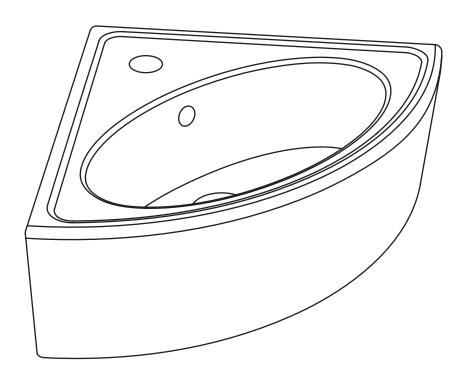

Questions, problems, missing parts? Before returning to the store, call Glacier Bay Customer Service 8 a.m. - 7 p.m., EST, Monday - Friday, 9 a.m. - 6 p.m., EST, Saturday

1-855-HD-GLACIER

HOMEDEPOT.CA

THANK YOU

Table of Contents

Table of Contents2	Installation
Safety Information	Care and Cleaning5
Warranty	
Pre-Installation3	
Planning Installation	
Tools Required	
Package Contents	

Safety Information

Please read and understand all safety precautions and instructions in this manual before you begin the installation of this product.



CAUTION: Handle with care. Vitreous chinaware is glass-like with sharp edges if broken. Do not drop or handle roughly.

NOTICE: Observe local plumbing and building codes.

Warranty

LIMITED LIFETIME WARRANTY

Glacier Bay products are manufactured with superior quality standards and workmanship and are backed by our limited lifetime warranty.

Glacier Bay products are warranted to the original consumer purchaser to be free of defects in materials or workmanship. We will replace FREE OF CHARGE any product or parts that proves defective. Simply, return the product / part to any of The Home Depot retail locations or call 1-855-HD-GLACIER to receive the replacement item. Proof of purchase (original sales receipt) from the original consumer purchaser must be made available for all Glacier Bay warranty claims.

This warranty excludes incidental/inconsequential damages and failures due to misuse, abuse or normal wear and tear. This warranty excludes all industrial, commercial & business usage, whose purchasers are hereby, extended a five year limited warranty from the date of purchase, with all other terms of this warranty applying except the duration of warranty.

Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights that vary from state to state and province to province. Please see a store or contact 1-855-HD-GLACIER for more details.

Pre-Installation




NOTE: For ADA requirements, the sink shall be installed at 34 in. (865 mm) height maximum measured from the floor to top of front rim. For complete compliance, it shall be the responsibility of the installer to comply with the local disability codes and standards prior to installing the product.

PLANNING INSTALLATION


Before beginning installation of this product, ensure all parts are present. If any part is missing or damaged, do not attempt to assemble, install, or operate the product. Contact customer service for replacement parts.

Be sure to re-inforce wall before installation. If this is a new installation, we recommend an extra 2"x 8" board securely cross-fastened to vertical wall study at desired height for your installation. Turned off the water supply before you begin installation.

TOOLS REQUIRED

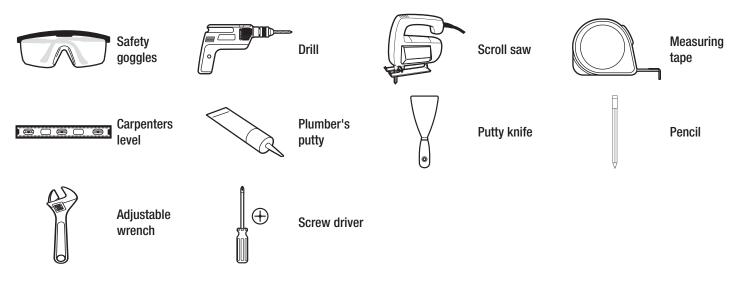

PACKAGE CONTENTS

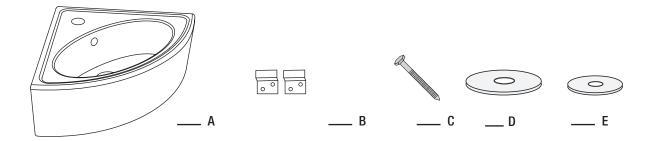

Part	Description	Quantity
Α	Corner Wall Hung Sink	1
В	Mounting Bracket	2
С	Lag Screws	6
D	Rubber Gaskets	2
E	Metal Washers (Small x4, Large x2)	6


Installation

Locate Proper Position For Sink

- Locate proper position for the corner wall hung sink (A) in your bathroom. Be sure to have access to plumbing, drain fittings and studs.
- □ The recommended height from the sink edge to the floor is 33 in. 34 in.
- With a pencil, mark the location of the sink on the wall ensuring that the sink is level on both sides.



NOTE: Two people are recommended.

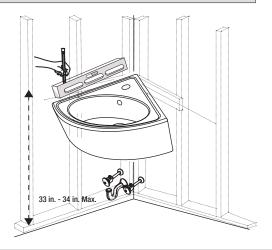


2 Mark Position of Mounting Bracket

With the sink against the wall in position with the pencil line, place the mounting bracket (B) under the sink so that it is snug against the back lip. Mark the location of both mounting bracket holes and sink mounting holes on the wall.




NOTE: Two people are recommended.

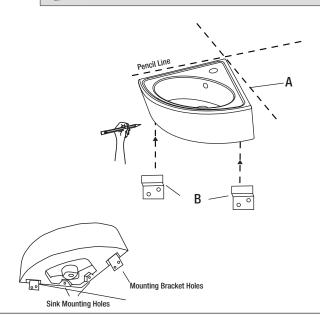

3 Secure Mounting Bracket to Wall

 Remove the sink from the wall and drill both the mounting bracket and sink holes on the wall studs. Using the attachment hardware (C, E) that is supplied, permanently secure the mounting bracket (B) to the wall.

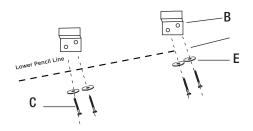

4. Mount the Faucet and Drain Assembly


 Before installing the sink, it would be convenient to mount the faucet and drain assembly (both not included) on the sink as per faucet manufacturer's instructions.



Installation (continued)


5 Install Wall to Sink

□ Lower the sink into position on the mounting bracket (B). At this point the sink (A) will be tightly positioned against the wall. Ensure the sink (A) is level. Secure sink to the wall using lag screws, rubber washers and larger metal washers (C, D, E) (included) through sink holes in the back of the sink.

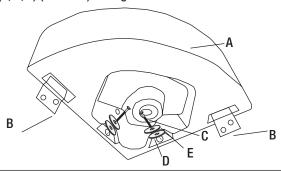

6 Connect Water Supply and P-Trap

- Connect all water supply lines to the faucet and connect the P-trap to the drain assembly (both not included) as manufacturer's instructions.
- Turn on the water supply and watch for leaks. Adjust and tighten where necessary.



Care and Cleaning

For best results in caring for your sink, we suggest the following:

- □ Clean the outside surface with mild soap, warm water and a soft cloth.
- On stubborn stains use a powdered detergent and damp sponge or nylon scouring pad.



Questions, problems, missing parts? Before returning to the store, call Glacier Bay Customer Service 8 a.m. - 7 p.m., EST, Monday - Friday, 9 a.m. - 6 p.m., EST, Saturday

1-855-HD-GLACIER

HOMEDEPOT.CA

Retain this manual for future use.