

HIKOKI

HIGH PERFORMANCE POWER TOOLS

Power tools catalogue 2024

www.hikoki-powertools.co.uk

Developing innovative technologies in Japan since 1948.

Contents

Everything you need for the highest power tool performance.

Introduction	4	Drilling
HiKOKI Warranty	5	Rotary drills 88 Impact drills 90
Index	6	Demolition
MultiVolt	10	Roatry hammer drills 93 Rotary demolition hammers 94 Demolition hammers 99
Cordless		
Screwdrivers	12	Fastening
Angle drills	13	Screwdrivers 103
Drill/drivers	14	
Combi Drills	14	
Impact drivers	17	
Impact wrenches	19	
Hammer drills	22	
Angle grinders	28	
Routers	33	
Table saw	34	
Mitre saws	35	
Circular saws	36	
Metal cutting saw	41	
Jigsaws	42	
Sanders	45	
Bandsaws	46	
Reciprocating saws	47	
Multi tool	50	
Planer	50	
Caulking gun	51	
Shear	52	
Nibbler	52	
Vibrator	53	
Mixer	53	
Rebar bender/cutter	54	
Cleaners	55	
Blower	56	
Nailers & staplers	57	
Radio	63	
Torch / Lighting	64	
Charger	70	
MultiVolt / Li-ion batteries	73	
Mains Adapter	76	
Air duster	72	
Stackable cases	78	
Chainsaw	80	
Hedge trimmer	81	
Kits	83	
Heat gun	86	

Introduction

Safety

Double-Insulation power tool, indicated by the double square  can be operated without external grounding. All HiKOKI power tools are designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

Power input

HiKOKI employ series motors whose modern design is based on our many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 110 to 240V.

General precautions

1. Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
2. Never let children use the power tool.
3. Keep others, especially children away from the tool.
4. Wear eye protection to protect the eyes.
5. Never touch blades or cutters during operation.
6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
8. Prior to operation, carefully inspect the tool to ensure all the parts are properly functioning.
9. Immediately stop operation if abnormalities are noted.
10. Ensure that motor ventilation opening is kept fully open.
11. Always keep the blades and cutters sharp and clean.
12. Have the power tool inspected at regular intervals by an authorised Service Centre.
13. Maintain the proper care and cleanliness of the power tool.
14. Consult an authorised Service Centre for repair and/or part replacement.
15. DO NOT use the power tool for any other application than those specified in the handling instructions.
16. DO NOT use the power tool for work beyond its prescribed capacity.
17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
18. Ensure that the applied voltage is the same as that specified on the nameplate.
19. Ensure that electric plug is plugged into a matching receptacle that is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances except for double insulated tools.

20. Ensure that the power supply is disconnected after operation.
21. DO NOT lift the power tool with the cord or remove the plug from receptacle by pulling the cord.
22. Always handle the power tool with care.
23. Proper posture is essential for safe operation.
24. Dress properly and work in proper clothing and shoes.
25. Always keep the work area in good order.
26. When not in use, store the power tool.
27. DO NOT stare into laser beams.

Guarantee

Our primary is the convenience and satisfaction of the customer. To this end, each HiKOKI is carefully tested and inspected, and guaranteed against any defects in workmanship and materials. Defects in workmanship and materials (not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling) will be repaired or replaced without charge.

Notes

1. Koki Holdings reserves the right to change specifications of parts and accessories of HiKOKI power tools without notice.
2. Specifications, features, accessories and parts such as power input, maximum torque, cutting capacity, length, weight brake, hook, spindle thread, chuck, blade, bore and handle, may vary from country to country.
3. Figures of battery capacity nominal values.
4. Standard accessories such as battery, charger, grinding wheel, sanding paper, blade, washer, collet chuck, chuck sleeve, side handle, dust collection adapter, protective items, wrench and carrying case, sometimes may vary from country to country. Some standard accessories may be excluded from country to country.
5. Please state required voltage and specifications when you order.
6. Orders are subject to product-availability in each country.
7. Some models in this catalogue are shown with optional accessories and fasteners such as screw, nail, bit, socket, blade, battery and grinding wheel.
8. Actual colours of products may differ from those in printed photos of this catalogue.



HI5

WARRANTY

Introducing the new HiKOKI Power Tools Hi5 extended 5 year warranty

You can register your cordless brushless power tools for an extra 2 years over the automatic 3 years heavy duty warranty

Available on:

- 18V cordless brushless tools
- 36V (Multi Volt) cordless brushless tools
- Batteries over 4.0Ah, including Multi Volt batteries

Online registration is required within 4 weeks of purchase

www.hikoki-powertools.co.uk

Index

A place for everything and everything in its place.

123		CS3630DB	80	G3613DVE	30	SV13YA	114
712650	107	CV18DA	50	G3613DVF	31	SV1813DA	45
		CV350V	111	G3615DVE	31		
				G3623DA	32	U	
A				GP18DA	32	UB18DA	64
AC18DA	51	DN18DSL	13	GP2S2	123	UR18DB	64
		DS18SDL	13			UB18DC	65
B		DS36A18	73	H		UB18DD	65
		DS36B18	74	DV36DYA	14	H41MB2	99
		BSL1850	73	DV18DC	14	H45MEY	99
		BSL1850C	74	DV18DE	14	H60MC	100
		BSL1820M	75	DH18DBL	26	H60MEY	100
		BSL1840M	75	DH18DPB	24	H655D3	101
		BSL1850MA	76	DH18DPC	24	H90SG	102
				DH1826DA	23		
C				DH1826DC	27	K	
C7SB3	104			DH3628DC	25	KC18DCJAZ	83
C7ST	103			DH3640DA	26	KC18DCJZ	83
C7U3	104			DH36DPE	26	KC18DDEJAZ	84
C8FSHG	105			DH36MA	27	KC18DFXJAZ	85
C8FSE	106			D6SH	88		
C9U3	105			D10VC3	88	M	
C10FCE2	106			D10VF	89	M8V2	112
C12RSH2	107			D13VF	89	M12VE	112
C1806DA	36			D13	90	M1808DA	33
C1806DB	37			DV18V	91	M3612DA	33
C1807DA	37			DV20VB2	92		
C3605DYA	38			DV20VD	92	N	
C3606DB	38			DH26PX2	93	N18DSL	58
C3606DPA	39			DH28PX2	93	NH18DSL	62
C3606DUM	39			DH40MC	94	NP18DSAL	58
C3607DB	40			DH40MEY2	94	NR1890C	59
C3607DRA	35			DH45MA	97	NR3675DD	59
C3610DRA	35			DH45ME	97	NT1850DF	62
C3610DRJ	34			DH52ME	98	NT1865DMA	60
CB18DBL	46			DH52MA	98	NT1865DMB	60
CB3612DA	46			DV16V	91	NT1865DM	61
CC14SF	123					NT50AE2	124
CD3605DB	41	E					
CE18DSL	52	ET36A	76			WR36DB	19
CG36DB	81			P		WR36DE	20
CH3656DA	80	G		P18DSL	50	WR36DF	20
CJ18DA	42	G10SR4	116	P20SF	113	WR36DG	21
CJ18DB	42	G12STX	117			WR36DH	21
CJ36DA	43	G12STX/CD	117	R			
CJ36DB	43	G12SR4	118	R18DB	55		
CJ90VST2	108	G12SN2	118	R18DSL	55		
CJ110MV	108	G12SE3	119	RA18DA	77		
CJ160V	109	G13SE3	119	RB18DC	56		
CM5MA	127	G18SE4	120	RH18DA	86		
CN18DSL	52	G23ST	120	RB36DA	82		
CR13V2	110	G23ST/CD	121	RB36DB	58		
CR13VBY	110	G23ST/G12STX	121	S			
CR18DA	47	G23SC4	122	SB8V2	115		
CR18DBL	48	G23MR	122	SB10V2	115		
CR18DMA	48	G1812DA	29	SB3608DA	45		
CR18DSL	49	G1812DE	29	SP18VA	116		
CR36DA	49	G3612DVE	30	SV12SG	114		

Driven by Technology.

It's our belief that innovation never stops. We make each power tool development better in every single way. Smart engineering means higher power and a longer lifetime for faster operations, less maintenance and greater comfort. Our aim is to continually improve the performance of those working in construction and make building sites safer and healthier. Today and tomorrow.




One battery that powers over 110 tools.

Our innovative MULTI VOLT battery powers a wide range of cordless power tools. Moreover, this battery is compatible with both 36V and 18V power tools, and it's even backwards compatible with your Hitachi power tool(s). Now you are able to cut, grind, drill, mow, blow, chop and trim with the same power as corded power tools, but with the ultimate freedom of working wherever you want.



36V ← → 18V

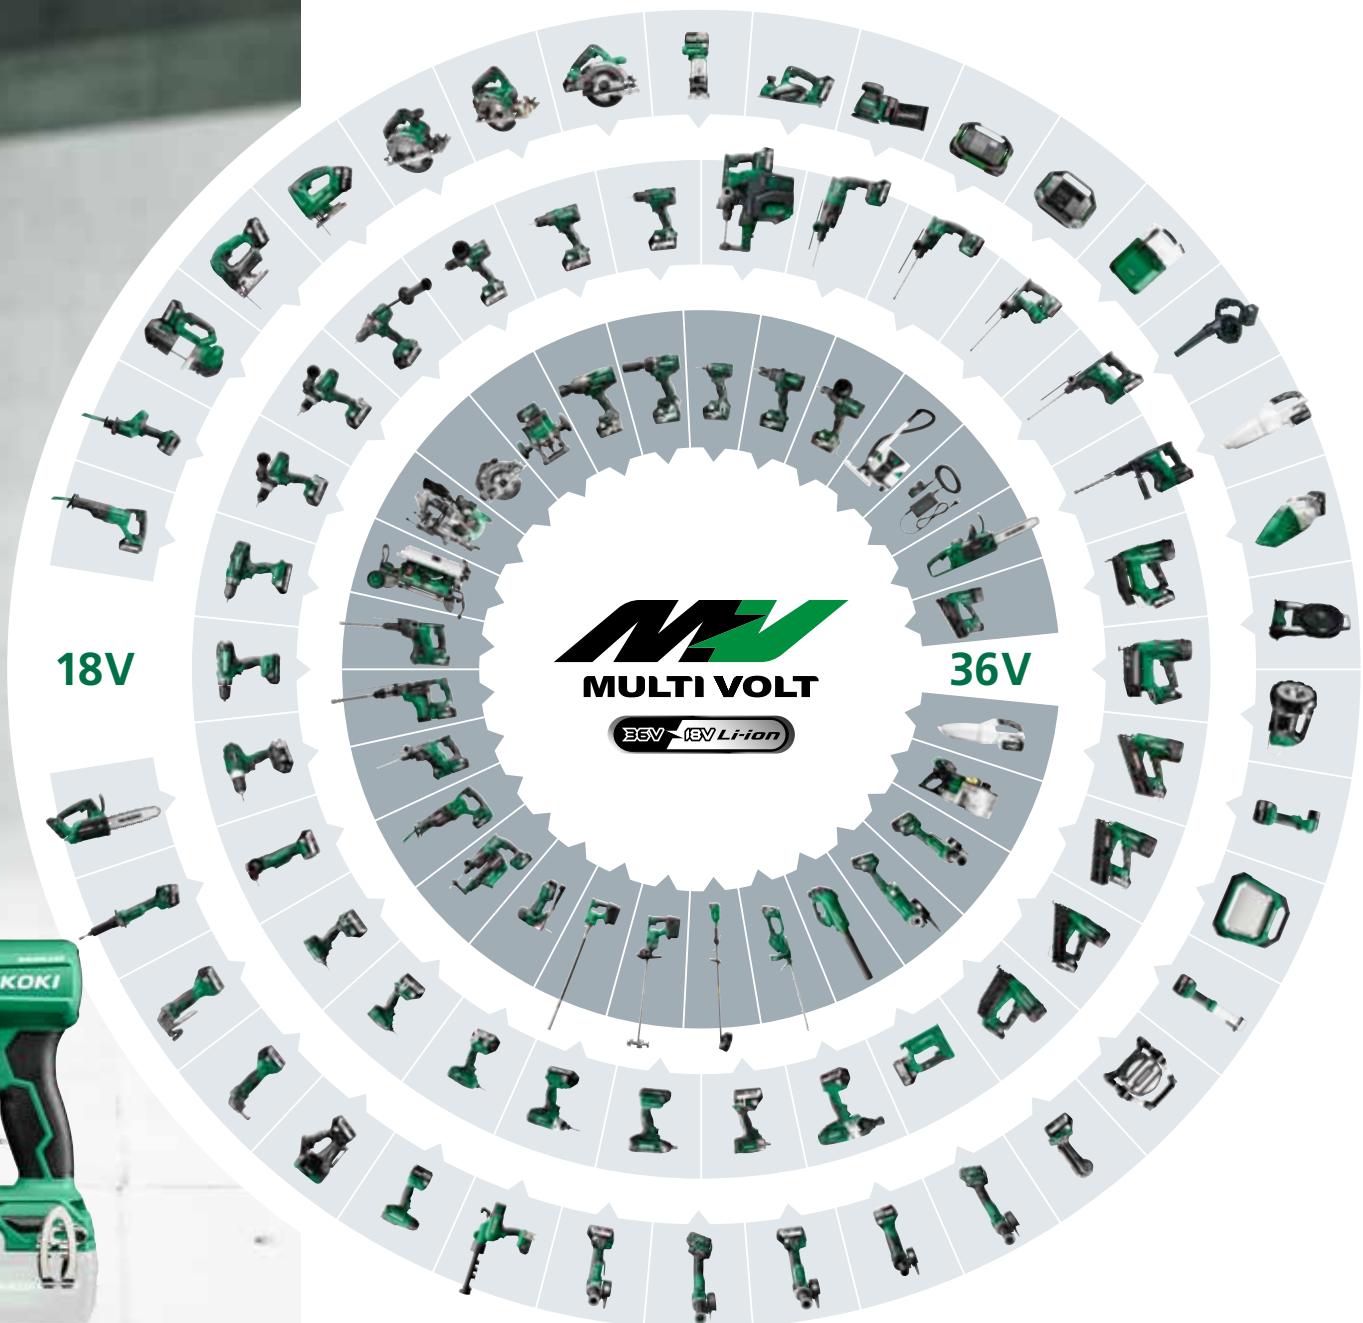

W18DA

18V Screwdriver

**NEW**

Specifications

Drive	6.35mm (1/4") hex bit shank
Capacity: Screw size	4mm
Capacity: Screw length	57mm (with magazine)
Battery voltage	18V
No load speed	0 - 5000/min
Overall length	246mm
Weight	1.4kg with BSL1820M

DN18DSL

18V Angle Drill



Specifications

Drill Chuck	10mm
Head height	88mm
Centre height	23mm
Max. Mild Steel	10mm
Max. Soft Wood	28mm
Max. Wood Screw	5.1 x 38mm
Battery voltage	18V
No load speed	0-1800/min
Max. Torque (hard)	12Nm
Overall length	362mm
Weight	1.7kg with BSL1820M

Variant	Voltage	Contents	Case	GTIN
W18DAW3Z	18V	Body only + Autofeed magazine	HSC3	4966376403837

Batteries + Screws not included

W18DB

18V Screwdriver

**NEW**

Specifications

Drive	6.35mm (1/4") hex bit shank
Capacity: Screw size	4mm
Capacity: Screw length	57mm (with magazine)
Battery voltage	18V
No load speed	0 - 3000/min
Overall length	256mm
Weight	1.5kg with BSL1820M

DV36DC

36V MultiVolt Brushless Impact Drill/Driver



Variant	Voltage	Contents	Case	GTIN
W18DBW3Z	18V	Body only + Autofeed magazine	HSC3	4966376403950

Batteries + Screws not included

Specifications

Battery Voltage	36V
Drill chuck	1.5-13mm keyless
Max. Brick	22mm
Max. Mild Steel	20mm
Max. Soft Wood	118mm
Max. Wood Screw (DxL)	16 x 100mm
Max. Machine Screw	6mm
No load speed	0-550/min / 0-2200/min
Max. Torque (Hard / Soft Joint)	155Nm / 100Nm
Slip Torque Stages	22
Impact Rate	0 - 33000/min
Dimensions (LxWxH)	190 x 267 x 70mm
Weight	2.8kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
DV36DCJRZ	36V	2 x 5.0Ah Li-ion batteries + UC18YSL3 charger + side handle + belt hook + driver bit	HSC2	4966376405411
DV36DCW2Z	36V	Body only + side handle + driver bit + belt hook	HSC2	4966376405411

DV18DC

18V Brushless Impact Drill/Driver



MV Compatible
BRUSHLESS

Specifications

Battery Voltage	18V
Drill chuck	1.5-13mm keyless
Max. Brick	20mm
Max. Metal	16mm
Max. Soft Wood	102mm
Max. Wood Screw (DxL)	12 x 100mm
Max. Machine Screw	6mm
No load speed	0-500/min / 0-2000/min
Max. Torque (Hard / Soft Joint)	140Nm / 70Nm
Slip Torque Stages	22
Impact Rate	0 - 33000/min
Dimensions (LxWxH)	190 x 267 x 70mm
Weight	2.8kg with BSI 36A18

Variant	Voltage	Contents	Case	GTIN
DV18DCJRZ	18V	2 x 5.0Ah Li-ion batteries + UC18YSL3 charger + side handle + driver bit + belt hook	HSC2	4966376405220
DV18DCWZZ	18V	Body only + side handle + driver bit + belt hook	HSC2	4966376405190

DV18DE

18V Brushless Impact Drill/Driver



MV Compatible
BRUSHLESS

Specifications

Drill chuck	1.5 - 13mm keyless
Max. Wood	52mm
Max. Steel	13mm
Max. Masonry	13mm
Battery voltage	18V
No load speed	0-550/min / 0-2000/min
Impact rate	0-30000/min
Max. Torque (Hard)	70Nm
Overall length	159mm
Weight	1.9kg with BSL1850M

Variant	Voltage	Contents	Case	GTIN
DV18DEWZ2	18V	2 x 3.0Ah Li-ion batteries + UC18YSFL charger + side handle + driver bit + belt hook	HSC2	4966376404780

D36DYA

36V Brushless Angle Drill



MV Compatible
BRUSHLESS

Specifications

ge	36V
Holesaw)	1.5-13mm keyless
Sinking)	13mm
d (low/High)	159mm
ages	118mm
xWxH)	0 - 400/min / 0 - 1500/min
	250Nm
	22
	0 - 33000/min
	664 x 198 x 95mm
	5.7kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
D36DYAW4Z	36V	Body only + side handle	X	4966376411184

Batteries + Holesaw not included

Notes

Impact tools



WH36DC

36V Brushless Impact Driver

NEW



Specifications

Max. Bolt	5-18mm
Max. HT Bolt	5-14mm
Max. Self Drilling Screw	Ø 3.5-6mm
Tightening Torque	215Nm (Power Mode)
Bit Shank Size	6.35mm (1/4") hex bit shank
Battery voltage	36V
No load speed	0-3400/min (Power Mode) 0-900/min (Soft Mode)
Full Load Impact rate	0-4100/min (Power Mode) 0-2000/min (Soft Mode)
Dimensions (LxH)	114 x 241mm
Weight	1.6kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
WH36DCW2Z	36V	Body only + belt hook	HSC2	4966376401246

WH18DA

18V Brushless Impact Drill/Driver

NEW



Specifications

Max. Bolt	M6 - M14
Max. HT Bolt	M6 - M12
Max. Machine Screws	4 - 8mm
Max. Torque	140 Nm
No load speed	0 - 2700 /min
Battery voltage	18V
Impact rate	0 - 3600 /min
Length	150mm
Weight	1.3kg with BSL1820M

Variant	Voltage	Contents	Case	GTIN
WH18DAW4Z	18V	Body only + belt hook	X	4966376400737

Batteries not included

WH18DC

18V Brushless Impact Drill/Driver

NEW
NI Compatible
BRUSHLESS

Specifications

Max. Bolt	5-18mm
Max. HT Bolt	5-14mm
Max. Self Drilling Screw	Ø 3.5-6mm
Tightening Torque	210Nm (Power Mode)
Bit Shank Size	6.35mm (1/4") hex bit shank
Battery voltage	18V
No load speed	0-3400/min (Power Mode) 0-900/min (Soft Mode)
Full Load Impact rate	0-4000/min (Power Mode) 0-1900/min (Soft Mode)
Dimensions (LxH)	114 x 241mm
Weight	1.6kg with BSL36A18

Batteries not included

WH18DE

18V Brushless Impact Drill/Driver

NEW
NI Compatible
BRUSHLESS

Specifications

Max. Screw	M4-M8
Max. Bolt	M5-M16
Max. HT Bolt	M5-M12
Battery voltage	18V
No load speed	0-3100/min
Full Load Impact rate	0-3400/min
Max. Tightening Torque	175Nm
Sound Pressure Level	73.7 dB
Head length	120mm
Weight	1.6kg with BSL36A18

Batteries not included

WR36DA

36V MultiVolt Brushless Impact Wrench


NI Compatible
BRUSHLESS

Specifications

Max. Bolt	M12 - M30
Max. HT Bolt	M10 - M24
Drive	19mm (3/4") square
Tightening Torque	1100Nm
Battery voltage	36V
No load speed:	
High / Medium mode	0-1500/min / 0-1200/min
Low 2 / Low 1 mode	0-900/min / 0-600/min
Full Load Impact rate:	
High / Medium mode	0-2900/min / 0-2300/min
Low 2 / Low 1 mode	0-1800/min / 0-1200/min
Overall length	221mm
Weight	3.7kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
WR36DAJ4Z	36V	Body only + belt hook	X	4966376323555

Socket bit not included

WR36DB

36V MultiVolt Brushless Impact Wrench


NI Compatible
BRUSHLESS

Specifications

Max. Bolt	M12 - M30
Max. HT Bolt	M10 - M24
Drive	12.7mm (1/2") square
Tightening Torque	1050Nm
Battery voltage	36V
No load speed:	
High / Medium mode	0-1500/min / 0-1200/min
Low 2 / Low 1 mode	0-900/min / 0-600/min
Full Load Impact rate:	
High / Medium mode	0-2800/min / 0-2300/min
Low 2 / Low 1 mode	0-1800/min / 0-1200/min
Overall length	221mm
Weight	3.7kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
WR36DBJ4Z	36V	Body only + belt hook	X	4966376323746

Socket bit not included

WR36DE

36V MultiVolt Brushless Impact Wrench


Compatible
BRUSHLESS

Specifications

Max. Bolt / HT Bolt	M10 - M24 / M10 - M20
Drive	12.7mm (1/2") square
Tightening Torque	770Nm
Battery voltage	36V
No load speed:	
High / Medium mode	0-2400/min / 0-2100/min
Low 2 / Low 1 mode	0-1800/min / 0-1500/min
Full Load Impact rate:	
High / Medium mode	0-3400/min / 0-3000/min
Low 2 / Low 1 mode	0-2600/min / 0-2200/min
Overall length	169mm
Weight	2.6kg with BSL36A18

WR36DG

36V MultiVolt Brushless Impact Wrench


Compatible
BRUSHLESS
NEW

Variant	Voltage	Contents	Case	GTIN
WR36DGWZ2	36V	Body only + belt hook	HSC3	496637407774

Specifications

Max. Bolt	M12 - M33
Max. HT Bolt	M10 - M27
Drive	12.7mm (1/2") square
Tightening Torque	1400Nm
Loosening Torque	2100Nm
Battery voltage	36V
No load speed:	
Mode 4 / Mode 3	0-1500/min / 0-1200/min
Mode 2 / Mode 1	0-900/min / 0-600/min
Full Load Impact rate:	
Mode 4 / Mode 3	0-2600/min / 0-2200/min
Mode 2 / Mode 1	0-1900/min / 0-1600/min
Dimensions (L x H)	221 x 290mm
Weight	3.9kg with BSL36A18

Socket bit not included

WR36DF

36V MultiVolt Brushless Impact Wrench

WR36DH

36V MultiVolt Brushless Impact Wrench

NEW
Compatible
BRUSHLESS

Specifications

Max. Bolt	M12 - M36
Max. HT Bolt	M10 - M27
Drive	3/4"
Tightening Torque	1900Nm
Loosening Torque	2400Nm
Battery voltage	36V
No load speed:	
Mode 4 / Mode 3	0-1500/min / 0-1200/min
Mode 2 / Mode 1	0-900/min / 0-600/min
Full Load Impact rate:	
Mode 4 / Mode 3	0-2600/min / 0-2200/min
Mode 2 / Mode 1	0-1900/min / 0-1600/min
Dimensions (L x H)	221 x 290mm
Weight	3.9kg

Variant	Voltage	Contents	Case	GTIN
WR36DFWZ2	36V	Body only + belt hook	HSC3	4966376407644

NEW
Compatible
BRUSHLESS

Specifications

Max. Bolt	M12 - M20
Max. HT Bolt	M10 - M16
Drive	12.7mm (1/2") square
Tightening Torque	380Nm
Battery voltage	36V
No load speed:	
High / Medium mode	0-3000/min / 0-2400/min
Low / Single mode	0-1200/min / 0-1800/min
Full Load Impact rate:	
Overall length	144mm
Weight	2.0kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
WR36DHWZ2	36V	Body only + belt hook	X	4966376410644



Cordless Hammers

DH18DPA 18V SDS Plus Hammer Drill



LVH

Specifications	
Max. Concrete	18mm
Max. Metal	13mm
Max. Wood	18mm
Bit Shank	SDS-Plus
Battery voltage	18V
No load speed:	0-800 / 0-1080/min
Impact Rate:	0-4100 / 0-5500/min
Impact Energy:	1.3 Joules
LED light	YES
Overall length	252mm
Weight	2.3kg with BSL1850C

Built in AUTOSTOP for Drill hole depth consistency

Variant	Voltage	Contents	Case	GTIN
DH18DPAJ3Z	18V	Body only + side handle + depth gauge	HSC2	4966376332816

DH1826DA 18V SDS Plus Hammer Drill

NEW



Specifications	
Max. Concrete	26mm
Max. Mild Steel	13mm
Max. Wood	27mm
Bit Shank	SDS-Plus
Battery voltage	18V
No load speed: (Low/Normal)	0-700/min / 0-950/min
Impact Rate: (Low/Normal)	0-3170/min / 0-4300/min
Impact Energy:	3.2 J
Dimensions (LxWxH)	358 x 91 x 233mm
Weight	3.7kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
DH1826DAW2Z	18V	Body only + side handle + depth gauge	HSC4	4966376405916

DH18DPB

18V Brushless SDS Plus Hammer Drill (Pistol)

NEW

MVR Compatible
BRUSHLESS

Specifications

Max. Concrete	18mm
Max. Mild Steel	13mm
Max. Wood	18mm
Bit Shank	SDS-Plus
Battery voltage	18V
No load speed: (Normal/Low)	0-800/min / 0-1080/min
Impact Rate: (Normal/Low)	0-4100/min / 0-5500/min
Impact Energy:	1.3 J
LED light	YES
AUTOSTOP	YES
Dimensions (LxWxH)	235 x 84 x 271mm
Weight	2.1kg with BSL1850C

DH3628DA

36V SDS Plus Hammer Drill

NEW

RFC
UVP
LVH

MVR Compatible
BRUSHLESS

Specifications

Max. Concrete	28mm
Max. Mild Steel	13mm
Max. Wood	32mm
Bit Shank	SDS-Plus
Battery voltage	36V
No load speed: (Low/Normal)	0-700/min / 0-950/min
Impact Rate: (Low/Normal)	0-3170/min / 0-4300/min
Full-load Vibration Level	12.1 m/s
Impact Energy:	3.2 J
Dimensions (LxWxH)	358 x 91 x 233mm
Weight	3.9kg with BSL36A18

DH18DPC

18V Brushless SDS Plus Hammer Drill (Pistol)

NEW

MVR Compatible
BRUSHLESS

Specifications

Max. Concrete	26mm
Max. Mild Steel	13mm
Max. Wood	27mm
Bit Shank	SDS-Plus
Battery voltage	18V
No load speed: (Normal/Low)	0-950/min / 0-700/min
Impact Rate: (Normal/Low)	0-4300/min / 0-3170/min
Impact Energy:	3.2 J
Selective operation modes	3
Drilling holes per charge	Ø12 x 40mm - 73
Dimensions (LxWxH)	368 x 276x 83mm
Weight	3.46 kg excl. battery

DH3628DC

36V SDS Plus Hammer Drill

NEW

RFC
UVP
LVH

MVR Compatible
BRUSHLESS

Specifications

Max. Concrete	28mm
Max. Mild Steel	13mm
Max. Wood	32mm
Bit Shank	SDS-Plus
Battery voltage	36V
No load speed: (Low/Normal)	0-700/min / 0-950/min
Impact Rate: (Low/Normal)	0-3170/min / 0-4300/min
Full-load Vibration Level	12.1 m/s
Impact Energy:	3.2 J
Dimensions (LxWxH)	389 x 91 x 232mm
Weight	4.1kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
DH18DPCWZ	18V	Body only + side handle + depth gauge	HSC4	4966376334797

Variant	Voltage	Contents	Case	GTIN
DH3628DCWZ	36V	Body only + side handle + depth gauge with SDS Plus & Keyless Drill chucks	HSC4	4966376405749

Cordless SDS Hammer Drills

DH36DPE

36V MultiVolt SDS Plus Hammer Drill (Pistol)



UVP

**MV Compatible
BRUSHLESS**

Specifications

Max. Concrete	28mm
Max. Steel	13mm
Max. Wood	32mm
Bit Shank	SDS-Plus
Battery voltage	36V
No load speed: (Normal/Low)	0-950 / 0-700/min
Impact Rate: (Normal/Low)	0-4300 / 0-3170/min
Impact Energy:	3.2 Joules
LED light	YES
AUTOSTOP	YES
Overall length	368mm
Weight	3.6kg with BSL36A18



DH3640DA

36V MultiVolt SDS Max Hammer Drill

NEW



UVP

**MV Compatible
BRUSHLESS**

Specifications

Max. Drill Bit	40mm
Max. Core Bit	105mm
Bit Shank	SDS-MAX
Battery voltage	36V
No load speed:	500/min
Full Impact Rate:	2800/min
Impact Energy:	9.2 Joules
Low vibration handle	YES
Continuous operation	YES
Kickback control	YES
Dimensions (LxHxW)	510 x 260 x 1058mm
Weight	7.4kg with BSL36A18

DH36DMA

36V MultiVolt SDS Max Hammer Drill



LVH

**MV Compatible
BRUSHLESS**

Specifications

Max. Drill Bit	40mm
Max. Core Bit	105mm
Bit Shank	SDS-MAX
Battery voltage	36V
No load speed:	260-590/min
Full Impact Rate:	1420-2860/min
Impact Energy:	8.5 Joules
Overall length	496mm
Weight	7.9kg with BSL36B18

Variant	Voltage	Contents	Case	GTIN
DH3640DAW2Z	36V	Body only + side handle + depth gauge	BM	4966376407989

Batteries not included

Variant	Voltage	Contents	Case	GTIN
DH36DMAJ3Z	36V	Body only + side handle + depth gauge	BM	4966376307630

Cordless Grinders



G1812DA 18V Brushless Angle Grinder

NEW


Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
G1812DAW4Z	18V	Body only + Low vibration handle + toolless wheel guard + cutting guard clip + wrench	X	4966376407064

G1812DE 18V Brushless Angle Grinder

NEW


Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
G1812DEW4Z	18V	Body only + Low vibration handle + toolless wheel guard + cutting guard clip + wrench	X	4966376407279

Specifications	
Wheel Diameter	115mm
Switch Type	Slide
Spindle Diameter	M14
Grip Circumference	144mm
Battery voltage	18V (Corded equivalent 750W)
No load speed:	8000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Overall length	358mm
Weight	2.7kg with BSL36A18

G3612DVE

36V Brushless Angle Grinder

NEW

Specifications

Wheel Diameter	115mm
Switch Type	Slide
Spindle Diameter	M14
Grip Circumference	144mm
Battery voltage	36V (Corded equivalent 1500W)
No load speed:	3200 - 10000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Anti Vibration Handle	YES
Overall length	389mm
Weight	3.1kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
G3612DVEW2Z	36V	Body only + Low vibration handle + toolless wheel guard + cutting guard clip + wrench	HSC3	4966376406494

G3613DVE

36V Brushless Angle Grinder

NEW

Specifications

Wheel Diameter	125mm
Switch Type	Slide
Spindle Diameter	M14
Grip Circumference	389mm
Battery voltage	36V (Corded equivalent 1500W)
No load speed:	3200 - 10,000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Anti Vibration Handle	YES
Overall length	389mm
Weight	3.1kg excl. battery

Variant	Voltage	Contents	Case	GTIN
G3613DVEW2Z	36V	Body only + low vibration handle + toolless wheel guard + cutting guard clip + wrench	HSC3	-

G3613DVF

36V Brushless Angle Grinder

NEW

Specifications

Wheel Diameter	125mm (Ø22.23mm)
Switch Type	Paddle Switch
Spindle Diameter	M14
Grip Circumference	144mm
Battery voltage	36V (Corded equivalent 1500W)
No load speed:	3200 - 10000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Anti Vibration Handle	YES
Overall length	389mm
Weight	3.1kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
G3613DVFV2Z	36V	Body only + Low vibration handle + toolless wheel guard + cutting guard clip + wrench	HSC3	4966376406883

G3615DVE

36V Brushless Angle Grinder

NEW

Specifications

Wheel Diameter	150mm
Switch Type	Slide
Spindle Diameter	M14
Grip Circumference	144mm
Battery voltage	36V (Corded equivalent 1500W)
No load speed:	3200 - 8000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Anti Vibration Handle	YES
Overall length	389mm
Weight	3.2kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
G3615DVEW2Z	36V	Body only + Low vibration handle + toolless wheel guard + cutting guard clip + wrench	HSC3	4966376406678

G3623DA

36V MultiVolt Brushless Angle Grinder



Specifications

Wheel Diameter	230mm
Hole Diameter	22.23mm
Spindle Thread	M14 x2
Battery voltage	36V
No load speed:	Transmission mode: 5300/min AUTO mode: 3200/min
Overall length	531mm
Weight	4.9kg with BSL36B18

MultiVolt Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
G3623DAW4ZUK	36V	Body only + Side handle + wrench	BM	4966376326570

Abrasive wheel not included

GP18DA

18V Die Grinder (Slide Switch)



Specifications

Collet Chuck	6mm
Max. Wheel	50mm
Battery voltage	18V
No load speed:	7000 - 29000/min
Overall length	464mm
Weight	2.3kg with BSL1850C battery 2.8kg with BSL36B18 battery

BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
GP18DAJ5Z	18V	Body only + Collet chuck + wrenches	HSC2	4966376337422

Mounted point not included

M3612DA

36V Brushless 1/2" Router


MultiVolt Compatible
BRUSHLESS

Specifications

Collet Chuck	12.7mm (1/2") / 6.35mm (1/4")
Plunge Depth	50mm
Battery voltage	36V
No load speed:	11000 -25000/min
Height	280mm
Weight	3.8kg incl. battery + dust collector

Variant	Voltage	Contents	Case	GTIN
M3612DAJPZ	36V	1 x 2.5Ah Li-ion battery + UC18YFSL charger + accessories	HSC4	4966376335954
M3612DAJ2Z	36V	Body only + 2 collet chucks, template guide + dust adaptor	HSC4	4966376335930

M1808DA

18V Brushless Trimmer


BRUSHLESS

Specifications

Collet Size	6.35mm (1/4")
Battery voltage	18V
No load speed:	10000-30000/min
Base mounting diameter	64.8mm
Run time per charge*	120 min with 5.0Ah battery
Height	229mm
Weight	1.7kg incl. BSL1850C

* Trimming 4mm depth in MDF. Values shown are for reference purposes only and may vary according to materials and conditions.

Variant	Voltage	Contents	Case	GTIN
M1808DAJPZ	18V	1 x 5.0Ah Li-ion battery + UC18YFSL charger + accessories	HSC3	4966376336135
M1808DAJ2Z	18V	Body only + dust adaptor + wrench	HSC3	4966376336111

C3610DRJ

36V MultiVolt 254mm Table Saw


Compatible
BRUSHLESS

Specifications

Blade Diameter	254mm
Cutting depth	90° - 79mm
	45° - 57mm
Braking time	3 seconds
Battery voltage	36V
No load speed:	5000 /min
Rip Fence Extension Length	Right 889 mm Left 445 mm
Main table size	730 x 560 mm
Weight	29.5 kg without battery

Variant

Voltage

Contents

Case

GTIN

C3610DRJW4Z

36V

254mm Table saw - Body only + push stick

X

4966376334506

Stand not included

**C3607DRA**

36V MultiVolt 185mm Slide Compound Mitre Saw


Compatible
BRUSHLESS

Specifications

Blade Diameter	185mm x 40T
Bore Ø	20mm
(HxW) Cross Cut: 0°	58 x 310mm
Mitre Cut: 45° L/R	58 x 218mm
Bevel Cut: 45° L	39 x 310mm
Bevel Cut: 45° R	16 x 310mm
Mitre Cut Angle:	Right 0-57° / Left 0-45°
Bevel Angle:	Right 0-45° / Left 0-45°
Battery voltage	36V
No load speed:	4000/min
Dimensions (w/o dust bag)	830 x 780 x 484mm
Weight	15.1kg with BSL36A18

Variant

Voltage

Contents

Case

GTIN

C3607DRAJGZ

36V

2 x 5.0Ah Li-ion batteries + UC18YFSL charger

X

4966376324125

C3610DRA

36V MultiVolt 254mm Slide Compound Mitre Saw


Compatible
BRUSHLESS

Specifications

Blade Diameter	255mm
Bore Ø	30mm
(HxW) Cross Cut: 0°	89 x 292mm
Mitre Cut: 45° L/R	89 x 204mm
Bevel Cut: 45° L	45 x 292mm
Bevel Cut: 45° R	25 x 292mm
Mitre Cut Angle:	Right 0-60° / Left 0-55°
Bevel Angle:	Right 0-48° / Left 0-48°
Battery voltage	36V
No load speed:	4000/min
Dimensions	778 x 792 x 686mm
Weight	20.6kg with BSL36B18

Variant

Voltage

Contents

Case

GTIN

C3610DRAW4Z

36V

254 mm Mitre saw - Body only

X

4966376324408

C1806DA

18V 165mm Circular Saw

NEW

Specifications

Blade Diameter	165mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	57mm / 38mm
Battery voltage	18V
No load speed:	0-3800/min
Overall length	291mm
Weight	3.5kg with BSL1850C

Variant	Voltage	Contents	Case	GTIN
C1806DAW4Z	18V	Body only + blade	X	4966376338283

**C1806DB**

18V Brushless 165mm Circular Saw

NEW

Specifications

Blade Diameter	165mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	66mm / 45mm
Bevel Capacity	-5° / 45°
Battery voltage	18V
No load speed:	4500/min
Deep Cut	YES
Brake	YES
Soft Start	YES
Constant Speed Control	YES
Dimensions (LxWxH)	285 x 188 x 263mm
Weight	3.3kg with BSL1850MA

Variant	Voltage	Contents	Case	GTIN
C1807DBW2Z	18V	Body only + saw blade + wrench + rip fence	HSC4	4966376408252

C1807DA

18V Brushless 190mm Circular Saw

NEW

Specifications

Blade Diameter	190mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	64.5mm / 49mm
Battery voltage	18V
No load speed:	Power Mode: 3800/min Silent Mode: 2000/min
Overall length	317mm
Weight	3.9kg with BSL1850

Variant	Voltage	Contents	Case	GTIN
C1807DAW2Z	18V	Body only + saw blade + wrench + rip fence	HSC4	4966376338375

C3605DYA

36V Brushless MultiVolt 125mm Dust Collection Circular Saw


MultiVolt Compatible
BRUSHLESS

Specifications

Blade Diameter	125mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	47mm / 30mm
Battery voltage	36V
No load speed:	Power Mode: 5000/min Silent Mode: 2600/min
Dimensions	277 x 193 x 236mm
Weight	2.8kg

Variant	Voltage	Contents	Case	GTIN
C3605DYAJ4Z	36V	Body only + blade	HSC4	4966376328291

C3606DB

36V Brushless MultiVolt 165mm Circular Saw


MultiVolt Compatible
BRUSHLESS

Specifications

Blade Diameter	165mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	66mm / 45mm
Bevel Capacity	-5° / 45°
Battery voltage	36V
No load speed:	5600/min
Deep Cut	YES
Brake	YES
Soft Start	YES
Constant Speed Control	YES
Dimensions (LxWxH)	285 x 188 x 265mm
Weight	3.4kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
C3606DBW2Z	36V	Body only + saw blade + wrench + rip fence	HSC4	4966376408160

Batteries not included

C3606DPA

36V Brushless MultiVolt 165mm Plunge Saw



MultiVolt Compatible
BRUSHLESS
NEW

Specifications

Blade Diameter	165mm
Bore Ø	20mm
Bevel Capacity	-1° to 46°
Max. Cut Depth 0°/45°	66mm / 43mm
Battery voltage	36V
No load speed:	2500 - 5200/min
Soft Start	YES
Overload Protection	YES
Overheat Protection	YES
Dimensions (LxWxH)	391 x 206 x 269mm
Weight	5.4kg with BSL36B18

Variant	Voltage	Contents	Case	GTIN
C3605DPAW2Z	36V	Body only + blade + dust bag + hex key	HSC4	4966376409198

Available as accessories

4100071 Guide rail GR800 - 800mm | **4100072** Guide rail GR1600 - 1600mm
**C3606DUM**

36V Brushless MultiVolt 165mm Circular Saw


MultiVolt Compatible
BRUSHLESS
NEW

Specifications

Blade Diameter	165mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	66mm / 43mm
Bevel Capacity	-5° / 45°
Battery voltage	36V
No load speed:	
- High mode:	5600/min
- Medium mode:	4300/min
- Silent mode:	2000/min
Guide rail compatible	YES
Dimensions (LxWxH)	314 x 198 x 263mm
Weight	4.1kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
C3606DUMW2Z	36V	Body only + saw blade + wrench + rip fence	HSC4	4966376412273

Batteries not included

C3607DB

36V Brushless MultiVolt 190mm Circular Saw

NEW



Specifications

Blade Diameter	190mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	64.5mm / 49mm
Battery voltage	36V
No load speed:	6000/min High Torque Mode: 4500/min
Soft Start / Soft Brake	YES
Guide rail compatible	YES
Dimensions (LxWxH)	313 x 221 x 280mm
Weight	4.3kg with BSL36A18

MultiVolt Compatible
BRUSHLESS

Batteries not included

CD3605DB

36V MultiVolt 150mm Metal Cutting Saw

NEW



Specifications

Blade Diameter	150mm
Bore Ø	20mm
Max. Cut Depth	47mm
Battery voltage	36V
No load speed:	0 - 7000/min
Soft Start	YES
Brake	YES
Silent Mode	YES
Dimensions	227 X 236 X 176 mm
Weight	2.8kg

MultiVolt Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
C3607DBW2Z	36V	Body only + blade + guide rail adapter + wrench	HSC4	4966376412730

Variant	Voltage	Contents	Case	GTIN
CD3605DBW2Z	36V	Body only + 150mm blade for steel + wrench	HSC4	4966376409877

CJ18DA

18V Jigsaw



Specifications

Max. Wood	135mm
Max. Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Battery voltage	18V
Length of Stroke	26mm
No load speed (stroke):	0-2500/min
Overall length	266mm
Weight	2.5kg

Variant	Voltage	Contents	Case	GTIN
CJ18DAW4Z	18V	Body only + dust collector + splinter guard + chip cover	X	4966376333622

CJ18DB

18V Barrel Grip Jigsaw

NEW

Specifications

Max. Wood	135mm
Max. Mild Steel Plate	10mm
Max. Stainless Steel	2.5mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Battery voltage	18V
Length of Stroke	26mm
No load speed (stroke):	500-2500/min
Dimensions (W x L)	300 x 174mm
Weight	2.6kg

MV Compatible

Variant	Voltage	Contents	Case	GTIN
CJ18DBW2Z	18V	Body only + blade + splinter guard + chip cover	HSC2	4966376409600
CJ18DBW4Z	18V	Body only + blade + splinter guard + chip cover	X	4966376409617

CJ36DA

36V MultiVolt Top Handle Jigsaw



Specifications

Max. Wood	160mm
Max. Mild Steel Plate	10mm
Max. Stainless Steel	3.2mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Battery voltage	36V
Length of Stroke	26mm
No load speed (stroke):	800-3500/min
Overall length	277mm
Weight	2.7kg with BSL36A18

MV Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
CJ36DAJRZ	36V	2 x BSL36A18 MultiVolt batteries + UC18YSL3 charger + blade + splinter guard + chip cover + dust adaptor	HSC3	4966376331079
CJ36DAJ4Z	36V	Body only + blade + splinter guard + chip cover + dust adaptor	HSC3	4966376332175

CJ36DB

36V MultiVolt Barrel Grip Jigsaw



Specifications

Max. Wood	160mm
Max. Mild Steel Plate	10mm
Max. Stainless Steel	3.2mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Battery voltage	36V
Length of Stroke	26mm
No load speed (stroke):	800-3500/min
Overall length	298mm
Weight	2.7kg with BSL36A18

MV Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
CJ36DBJ3Z	36V	Body only + blade + splinter guard + chip cover + dust adaptor	HSC3	4966376332182

Batteries not included

**SV1813DA**

18V 125mm Random Orbital Sander

NEW
Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
SV1813DAJ2Z	18V	Body only + dust bag + 2 x extraction adapter + sanding pad + 2 x sanding paper (P120)	SC	4966376402267

SB3608DA

36V Belt Sander

NEW
Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
SB3608DAW4Z	36V	Body only + dust bag + 2 x extraction adapter	X	4966376408696

Specifications

Pad Size Diameter	125mm
Orbit Diameter	3.0mm
Variable Speed Setting	YES
Soft Start	YES
Brake	YES
Battery voltage	18V
No load speed:	7000 - 11000/min
Dimensions	158 x 158 x 153mm
Weight	1.8kg with BSL1850C

Specifications

Belt size	76 x 533mm
No Load Belt Speed	2.0 - 7.5m/s (122-450m/min)
Variable speed	YES
Battery voltage	36V
No load speed:	4000/min
Dimensions	323 x 150 x 199mm
Weight	4.2kg with BSL36A18

Cordless Bandsaws

CB18DBL

18V Bandsaw



Specifications

Max. Cut in Round Pipe	83mm
Max. Cut Square Pipe (WxH)	80 x 80mm
Blade Speed, Standard:	1.3-3.2m/s (80-195m/min)
Auto Mode (without load):	2.0m/s (120m/min)
Auto Mode (with load):	3.2m/s (195m/min)
Battery Voltage	18V
Bandsaw Blade Dimensions (L x W x T)	900 x 12.5 x 0.5mm
Dimensions (LxWxH)	413 x 173 x 266mm
Weight	3.6kg with BSL1850 battery

BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
CB18DBLJ4Z	18V	Body only + side handle + blade + wrench	x	4966376302352

CB3612DA

36V Bandsaw

NEW



Specifications

Max. Cut in Round Pipe	127mm
Max. Cut Square Pipe (WxH)	127 x 120mm
Blade Speed, Standard:	60 - 195/min
Battery Voltage	36V
Variable speed control	YES
AUTO Mode	YES
Bandsaw Blade Dimensions	1140 x 12.5 x 0.5mm
Dimensions (LxWxH)	520 x 147 x 320mm
Weight	7.5kg

BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
CB3612DAW4Z	36V	Body only + saw blade + wrench	x	4966376410330

Reciprocating Saws



CR18DA

18V Reciprocating Saw



Specifications

Max. Cut in Pipe	50mm
Max. Cut in Steel Plate	12mm
Max. Cut in Wood	50mm
Battery Voltage	18V
Length of Stroke	13mm
No Load speed:	0 - 3200 /min
Overall length	350mm
Weight	1.7kg

Variant	Voltage	Contents	Case	GTIN
CR18DAJ4Z	18V	Body only + blade	x	4966376334049

CR18DMA

18V Brushless Reciprocating Saw

NEW**UVP**
USER VIBRATION PROTECTION**BRUSHLESS**

Specifications

Max. Cut in Pipe	130mm
Max. Cut in Wood	300mm
Battery Voltage	18V
Length of Stroke	29mm
No Load speed:	0 - 3000 /min
Variable Speed	YES
LED Light	YES
Shoe Adjustment	YES
Toolless Blade Change	YES
Dimensions (L x W x H)	246 x 207 x 87mm
Weight	2.5kg

Batteries not included

CR18DBL

18V Brushless Reciprocating Saw

Specifications

Max. Cut in Mild Steel Pipe	130mm
Max. Cut in PVC Pipe	130mm
Max. Cut in Wood	120mm
Max. Cut in Mild Steel Plate	19mm
Battery Voltage	18V
Length of Stroke	32mm
No Load speed:	0 - 2500 /min
Overall length	435mm
Weight	3.4kg with battery

BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
CR18DBLJ4Z	18V	Body only + blade + wrench	X	4966376304912

Batteries not included

CR18DSL

18V Reciprocating Saw



Specifications

Max. Cut in Pipe	90mm
Max. Cut in Steel Plate	10mm
Max. Cut in Wood	90mm
Battery Voltage	18V
Length of Stroke	28mm
No Load speed:	0 - 2100 /min
Overall length	434mm
Weight	3.4kg with BSL1850

Batteries not included

CR36DA

36V Brushless Reciprocating Saw

Specifications

Max. Cut in Pipe	130mm
Max. Cut in Mild Steel Plate	19mm
Max. Cut in Wood	300mm
Battery Voltage	36V
Length of Stroke	32mm
No Load speed:	0 - 1700 /min
	0 - 2000 /min
	0 - 2500 /min
	0 - 3000 /min
Overall length	457mm
Weight	4.5kg with BSL36A18

UVP
USER VIBRATION PROTECTION**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
CR36DAJ4Z	36V	Body only + blade	X	4966376324842

Batteries not included

CV18DA

18V Brushless Multi Tool

NEW

Specifications

Blade changing action	Universal blade - 1 action Starlock / OIS - 2 action
No load speed	6000 - 20000 /min
Battery Voltage	18V
Oscillation Angle	3.6°
LED light	YES
Overall length	327mm
Weight	1.2kg excl. battery

UVP
UNDER VIBRATION PROTECTION**MT Compatible**
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
CV18DAW2Z	18V	Body only + pad + sanding paper + blades	HSC2	4966376412518

Batteries not included

P18DSL

18V Planer



Specifications

Max. Cutting Width	82mm
Max. Cutting Depth	2mm
Battery Voltage	18V
No Load speed:	16000 /min
Overall length	332mm
Weight	3.3kg with BSL1850

AC18DA

18V Caulking Gun

NEW

Batteries not included

Specifications

Max. Push Force	3000 N
Dispensing Speed	Up to 14 mm/s
Variuable Speed Trigger	YES
Variable Speed Dial	YES
LED	YES
Toolless Piston Replacement	YES
Anti-drip Function	YES
Battery Voltage	18V
Dimensions (LxWxH)	482 x 280 x 82mm
Weight	2.3kg with BSL1820M

Variant	Voltage	Contents	Case	GTIN
P18DSLWPZ	18V	2 x 5.0Ah Li-ion batteries + UC18YSL3 charger + blade setting gauge + guide + wrench	HSC3	4966376316830
P18DSLW4Z	18V	Body only + blade setting gauge + guide + wrench	X	4966376317004

Variant	Voltage	Contents	Case	GTIN
AC18DAW4Z	18V	Body only + cartridge holder 300ml + tube 400ml + protection glasses	x	4966376403608
AC18DAW5Z	18V	Body only + cartridge holder 300ml + tube 600ml + protection glasses	x	4966376403615

CE18DSL

18V Shear



Specifications

Max. Steel	1.6mm (16ga.)
Max. Stainless	1.2mm (18ga.)
Max. Aluminium Plate	2.3mm (13ga.)
Battery Voltage	18V
Min. Cutting Radius	25mm
No Load speed:	5300/min
Overall length	295mm with BSL1850 battery
Weight	2.2kg with BSL1850 battery

UV3628DA

36V Cordless Vibrator



Specifications

Flexible Shaft Head Dia.	28mm
Available Depth	824mm
No Load Speed	12000 - 15200/min
Battery Voltage	36V
Working Time	38min (4.0Ah battery)
Overall length	1045mm
Weight	4.2kg

Variant	Voltage	Contents	Case	GTIN
CE18DSLW4Z	18V	Body only + blade set + thickness gauge	X	4966376302475

Variant	Voltage	Contents	Case	GTIN
UV3628DAJYZ	36V	1 x BSL361B18 battery + charger	X	4966376333004

CN18DSL

18V Nibbler



Specifications

Max. Steel	1.6mm (16ga.)
Max. Stainless	1.2mm (18ga.)
Max. Aluminium Plate	2.3mm (13ga.)
Battery Voltage	18V
Min. Cutting Radius	40mm
No Load speed:	2500/min
Overall length	295mm with BSL1850 battery
Weight	2.1kg with BSL1850 battery

UM36DA

36V Cordless Mixer



Specifications

Mixer Diameter	150mm
Battery Voltage	36V
Workload per charge	2.5Ah battery: 8 bags 4.0Ah battery: 13 bags
No Load speed:	High 0-1200/min Low 0-500/min
Overall length	929mm
Weight	4.4kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
CN18DSLJ4Z	18V	Body only + blade set + thickness gauge + wrench	X	5017658062996

Variant	Voltage	Contents	Case	GTIN
UM36DAJBZ	36V	1 x 2.5Ah BSL36A18 battery + charger	X	4966376333059

VB3616DA

36V Rebar Bender / Cutter



Specifications

Cutting/Bending Capacity	10mm/13mm/16mm rebar
Cuts per charge ¹	Approx 170 with BSL36B18
Bends per charge (90°) ¹	Approx 310 with BSL36B18
Cutting Time ²	2.6 secs
Bending Time (180°) ¹	3.8 secs
Multiple Cut Capacity	10mm: 2 / 13mm: 1 / 16mm: 1
Multiple Bend Capacity	10mm: 3 / 13mm: 2 / 16mm: 1
Battery Voltage	36V
Dimensions	510 x 230 x 241mm
Weight	18.9kg with BSL36A18

¹ 13mm diameter SD345 rebar² 16mm diameter SD390 rebar

 MVR Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
VB3616DAJGZ	36V	2 x BSL36B18 batteries + charger	BM	4966376331796

R18DSL

18V Cordless Wet/Dry Vac



Specifications

Dust Box Capacity	670ml
Battery Voltage	18V
Overall length	430mm
Weight	1.5kg
Continuous Operating Time 3.0Ah	29 mins

Variant	Voltage	Contents	Case	GTIN
R18DSLW4Z	18V	Body only + brush nozzle + crevice nozzle	X	4966376317349

**R18DB**

18V Cordless Cleaner



Specifications

Dust Box Capacity	560ml
Suction Work Rate	High 40W, Mid 30W, Low 16W
Battery Voltage	18V
Overall length	476mm
	1003mm with extension pipe
Weight	1.7kg with BSL36A18

Continuous Operating Time

3 (High)	Approx. 40 mins
2 (Medium)	Approx. 48 mins
1 (Low)	Approx. 60 mins

When using BSL36A18 MultiVolt battery pack

Variant	Voltage	Contents	Case	GTIN
R18DBW4Z	18V	Body only + extension pipe + floor nozzle	X	4966376335213

Cordless Cleaner / Blower

R36DB

36V MultiVolt Cordless Cleaner



Continuous Operating Times

3 (High)	Approx. 15 mins
2 (Medium)	Approx. 30 mins
1 (Low)	Approx. 60 mins

When using BSL36A18 MultiVolt battery pack

Specifications

Dust Box Capacity	560ml
Suction Work Rate	High 155W, Mid 65W, Low 35W
Battery Voltage	36V
Overall length	476mm 1008mm with extension pipe
Weight	1.9kg with BSL36A18

 Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
R36DBW4Z	36V	Body only + extension pipe + floor nozzle	X	4966376409129

RB18DC

18V Blower




Specifications

Air Volume Flow	0 - 3.5m³/min (without nozzle)
Max. Air Velocity	95m/s (with nozzle)
Average Air Velocity	78m/s (with nozzle)
Battery Voltage	18V
Overall length	490mm with BSL36A18 battery
Weight	1.8kg with BSL36A18 battery

 Compatible

Variant	Voltage	Contents	Case	GTIN
RB18DCW4Z	18V	Body only	X	4966376338689

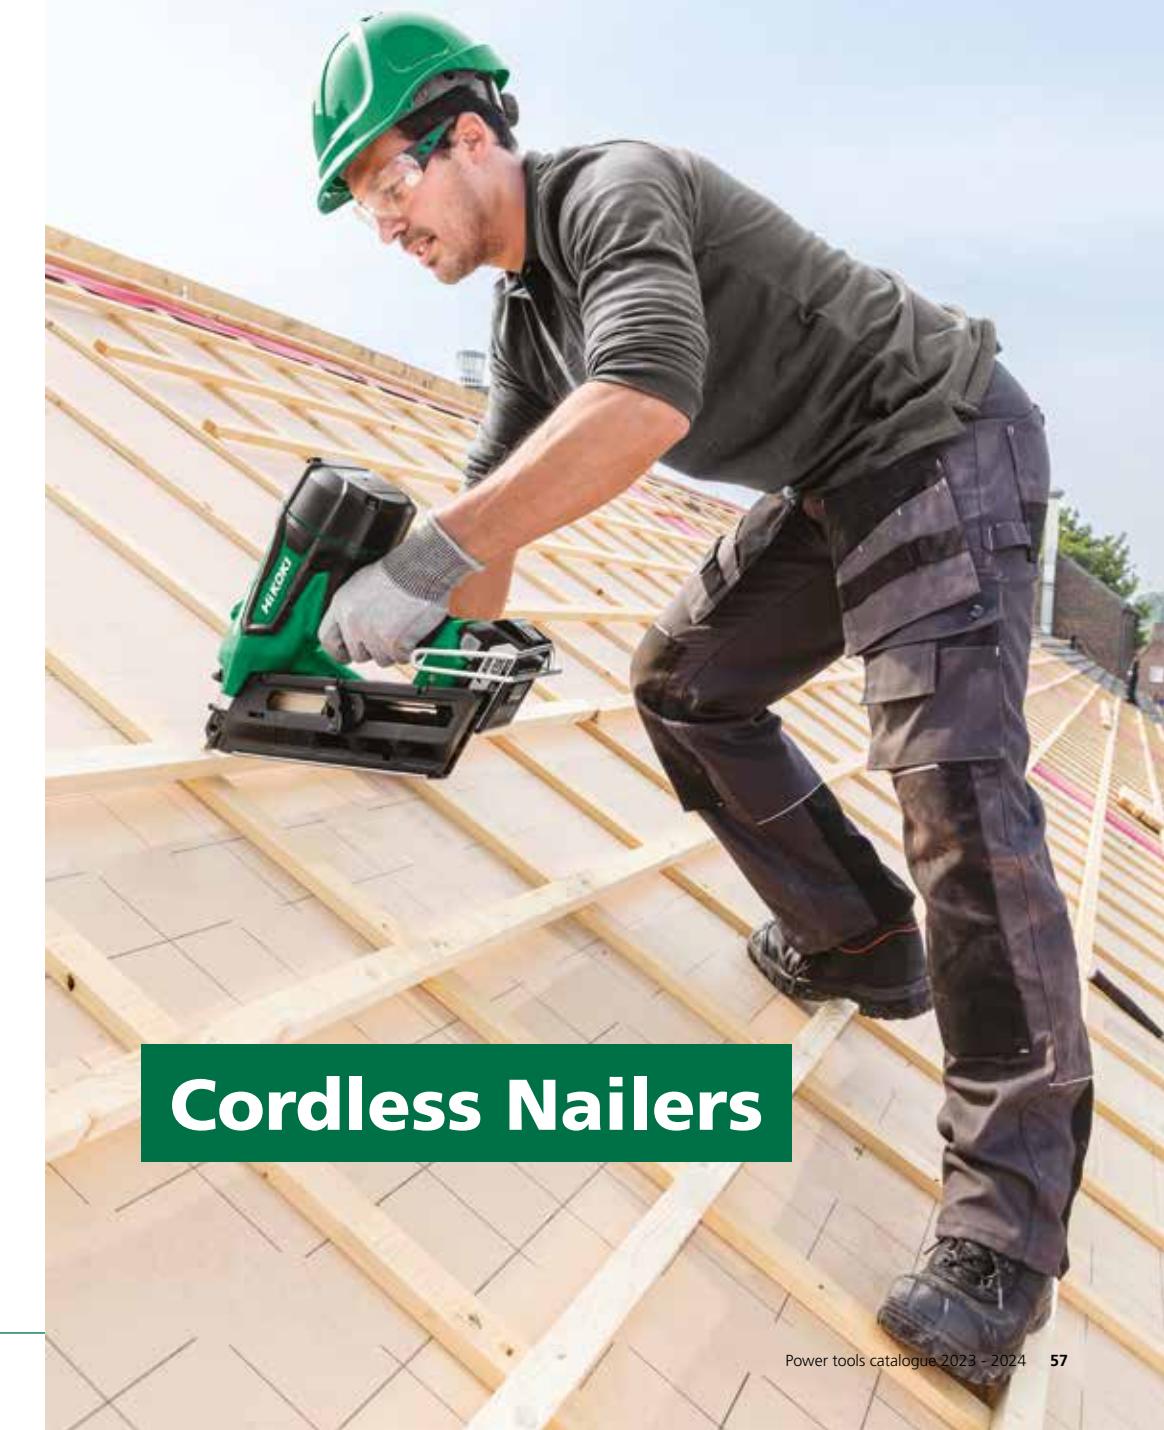

Cordless Nailers

N18DSL

18V 23 Gauge Stapler



Specifications

Staple Size	0.7 x 0.5mm
Staple Length	6-13mm
Staple Width	12mm
Battery Voltage	18V
Driving Method	Mechanical Spring
Corner Nailing Performance	3.0mm
Overall length	235mm
Weight	1.7kg excl. battery

NR1890DC

18V Cordless 1st Fix Framing Nailer



Specifications

Driving System	Air Spring
Nail Length	50mm to 90mm
Nail Diameter	2.9mm - 3.3mm
Driving Speed	1.5 to 2 nails/sec. (Intermittent)
Battery Voltage	18V
Loading Capacity	47 nails
Firing Mode	Full Sequential / Contact
Dimensions (H x L x W)	342 x 309 x 127mm
Weight	4.8kg with BSL1850 battery

Variant	Voltage	Contents	Case	GTIN
N18DSLW4Z	18V	Body only	X	4966376336340

Batteries not included

NP18DSAL

18V 23 Gauge Pin Nailer



Specifications

Pin Size	23 gauge
Nail Length	15-35mm
Battery Voltage	18V
Driving Method	Mechanical Spring
Corner Nailing Performance	3.0mm
Overall length	262mm
Weight	2.2kg excl. battery

NR3675DD

36V Cordless Duplex Nailer

NEW



Specifications

Driving System	Air Spring
Nail Shank Diameter	3.3mm
Nail Length	89/77mm
Driving Speed	2 nails/sec. (Intermittent)
Battery Voltage	36V
Loading Capacity	35 nails
Selectable Firing Modes	Full Sequential / Bump Fire
Dimensions (H x L x W)	342 x 352 x 137mm
Weight	4.9kg

Variant	Voltage	Contents	Case	GTIN
NP18DSALW4Z	18V	Body only	X	4966376336357

Variant	Voltage	Contents	Case	GTIN
NR3675DDW6Z	36V	Body only + safety glasses	HSC4	4966376409549

NT1865DMA

18V Brushless 15GA Angled Finish Nailer


HIKOKI Compatible
BRUSHLESS

Specifications

Driving System	Air Spring
Nail Length	32mm to 65mm
Driving Speed	3 nails/sec. (Intermittent)
Battery Voltage	18V
Loading Capacity	100 nails (1 strip)
Firing Mode	Full Sequential / Contact
Dimensions (H x L x W)	344 x 300 x 104mm
Weight	3.5kg with BSL1830C battery

NT1865DM

18V Brushless 16GA Straight Finish Nailer


HIKOKI Compatible
BRUSHLESS

Specifications

Driving System	Air Spring
Nail Length	25mm to 65mm
Driving Speed	3 nails/sec. (Intermittent)
Battery Voltage	18V
Loading Capacity	100 nails (2 strips)
Firing Mode	Full Sequential / Contact
Dimensions (H x L x W)	315 x 298 x 104mm
Weight	3.4kg with BSL1830C

NT1865DMB

18V Brushless 16GA Angled Finish Nailer

NEW
HIKOKI Compatible
BRUSHLESS

Specifications

Driving System	Air Spring
Nail Gauge	16 Gauge
Nail Length	32-65mm
Driving Speed	3 nails/sec. (Intermittent)
Battery Voltage	18V
Loading Capacity	100 nails
Selectable Firing Modes	Full Sequential / Contact
Dimensions (H x L x W)	315 x 298 x 108mm
Weight	3.4kg with BSL1830C

HIKOKI Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
NT1865DMBJXZ	18V	2 x 3.0Ah Li-ion batteries + charger + nose cap + safety glasses	HSC4	4966376336357



NT1850DF

18V Cordless Compact 18 Gauge Brad Nailer

NEW
NI Compatible
BRUSHLESS

Specifications

Driving System	Air Spring
Magazine Angle	0°
Applicable Nail Shank Ø	1 - 1.25mm / 18 Gauge
Applicable Nail Length	16mm to 50mm
Nail Loading Capacity	100 nails
Battery Voltage	18V
Cycle Rate	2 nails/sec
Firing Modes	Full Sequential / Contact
Toolless Depth Control	YES
Weight	2.4kg with BSL1820M

UR18DA

18V DAB/DAB+ Bluetooth Cordless Radio

NEW

Specifications

Voltage	18V
DAB+	YES
F Frequency AM	530 - 1620 kHz
Frequency FM	87.5 - 108 MHz
Bluetooth	YES
Equaliser	YES
AC Adapter	YES
Station Presets	YES
Dimensions (LxWxH)	240 x 176 x 185 mm
Weight	2.45kg with BSL1850MA

NH18DSDL

18V Cordless Auto Hammer



Specifications

Battery Voltage	18V/MultiVolt
Number of blows	4000 /min
Applicable Nail	
Length	25 - 90mm *1
Head Diameter	Ø4.0 - 8.7mm *1
Dimensions (LxWxH)	285 x 135 x 93mm
Weight	1.3kg with BSL1820M

*1: Opposing wood: SPF, cedar. May not be able to fully hammer nail into materials such as hemlock, MDF or laminated lumber.

NI Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
NH18DSLW4Z	18V	Body only + Eye protection glasses	X	4966376264391

UR18DSDL

18V DAB/DAB+ Bluetooth Site Radio



Specifications

Frequency band DAB/DAB+	174.928 to 239.200 MHz Band III
FM	87.5 to 108 MHz
AM	522 to 1629 kHz
Input terminal	AUX-IN (3.5mm)
Output terminal	USB charging jack (5V 1A)
Power supply	Slide battery DC 14.4V / 18V
Household power supply	Using provided AC adapter
Back up batteries	DC 3.0V, two AA batteries
Dimensions (LxWxH)	405 x 312 x 265mm (with antenna retracted)
Weight	4.0kg excl. battery

Variant	Voltage	Contents	Case	GTIN
UR18DSDLJ0Z	18V	Body only + mains power adapter	X	4966376319626

UB18DA

18V Cordless Search Light



Specifications

Battery Voltage	14.4V/18V/MultiVolt
Max. Output	2500 lumens
Lighting mode:	
Spot + wide	2500 lumens
Spot	1100 lumens
Wide	1300 lumens
Continuous runtime*	*using BSL1860
Spot + wide	3.0 hours
Spot	6.0 hours
Wide	5.8 hours
Wide (Eco)	22.0 hours
Dimensions (LxWxH)	203 x 280 x 204mm
Weight	1.85kg excl. battery

Variant	Voltage	Contents	Case	GTIN
UB18DAW4Z	18V	Body only	X	4966376328734

UB18DB

18V Cordless Construction Light

NEW



M1 Compatible

Specifications

Light Source	LED White
Battery Voltage	18V
Brightness Min/Max power	350 / 2000 Lumen
Light Colour	5000 K (daylight white)
Adjustable angle	360°
Run Time 5.0Ah battery:	Min. power 32 hours Max. power 6.5 hours
IP Certification	IP54
Impact Resistant	YES (IK08)
Battery display level	YES
Dimensions (L x W x h)	202 x 140 x 162mm
Weight	1.4kg excl. battery

Variant	Voltage	Contents	Case	GTIN
UB18DBW4Z	18V	Body only	X	4966376402069

UB18DC

18V Cordless Work Light

NEW



Continuous Runtime per Charge *

18V Battery	Min. Brightness 700lm	Max. Brightness 4000lm
3.0Ah	Approx. 12h	Approx. 1.5h
5.0Ah	Approx. 20h	Approx. 3.0h
8.0Ah	Approx. 30h	Approx. 4.5h

* Runtime per charge may vary according to types of battery and operating conditions

Specifications

Battery Voltage	18V
LED (White)	60 pcs
USB Port	5V, 1A
Brightness Adjustment Range	700 - 4000 lm
Dust and water resistant	IP65
Remaining battery indicator	YES
Dimensions (LxWxH)	186 x 155 x 276mm
Weight	1.9kg excl. battery

Variant	Voltage	Contents	Case	GTIN
UB18DCW4Z	18V	Body only	X	4966376402120

UB18DD

18V Cordless Construction Light

M⁺ Compatible

Variant	Voltage	Contents	Case	GTIN
UB18DDJ4Z	18V	Body only	X	4966376402151

Specifications

Light Source	LED
Battery Voltage	18V
Brightness Min/Max power	1000 / 10000 Lumen
Light Colour	4500 K (natural white)
Adjustable angle	144°
Run Time 5.0Ah battery:	Min. power 10 hours Max. power 1.5 hours
USB power output	5V / 1.0A
IP Certification	IP65
Impact Resistant	YES (IK08)
Battery display level	YES
Dimensions (L x W x h)	323 x 314 x 150mm
Weight	4.1kg excl. battery

UB18DF

18V Cordless Work Light



Specifications

Globe	LED White
Battery Voltage	18V
Brightness Mode	2 modes High & Low
Brightness Adjustment Range	Low: 320lm, High: 750lm
Lighting Range	360°
Run Time:	12H High Mode 29H Low Mode
Weight	0.4kg excl. battery

UB18DE

18V Cordless Swivel Head Torch



Specifications

LED	4.7W x 1pc.
Battery Voltage	18V
Working Time	38min (4.0Ah battery)
High Mode	250 lm
Low Mode	120 lm
Run Time:	28H High Mode (BSL1850) 63H Low Mode (BSL1850)
Dimensions (LxWxH)	92 x 79 x 250mm excl. battery
Weight	0.3kg excl. battery

UB18DG

18V Cordless Tripod Light

M⁺ Compatible

Specifications

Light Source	LED
Battery Voltage	18V
Brightness Min/Max power	1000 / 4000 Lumen
Light Colour	5000 K (daylight white)
Adjustable angle	360°
Run Time 5.0Ah battery:	Min. power 10.5 hours Max. power 2.5 hours
IP Certification	IP55
AC Adapter	YES
Dimensions (LxWxh) Extended	630 x 720 x 2150 mm
Dimensions (LxWxh) Retracted	222 x 210 x 1035 mm
Weight	8.8kg with BSL1850MA

Variant	Voltage	Contents	Case	GTIN
UB18DEW4Z	18V	Body only	X	496637640733

Variant	Voltage	Contents	Case	GTIN
UB18DGJ4Z	18V	Body only + AC Adapter	X	4966376410255

UB18DGL

18V Cordless work light



Specifications	
Brightness / Measured Distance: High Mode	250lx/1m
Brightness / Measured Distance: Low Mode	140lx/1m
LED Lamp	LED 18W (0.5W x 36pcs.)
Battery Voltage	14.4V and 18V
Dimensions (LxWxH)	198 x 256 x 252mm
Run Time - BSL1840M	
High Mode	Approx. 5 Hours
Low Mode	Approx. 11.5 Hours
Weight	0.74kg excl. battery

UB18DJL

18V Cordless LED torch



 Compatible

Specifications	
Battery Voltage	14.4V/18V/MultiVolt
Torchlight Brightness/ measured distance	6000lx/1m
Torchlight LED lamp	1 x LED 3W
Worklight Brightness/ measured distance	High: 110lx/1m, Medium: 55lx/1m Low: 27lx/1m
Worklight LED lamp	12 x LED 0.5W
Dimensions (LxWxH)	205 x 78 x 108mm excl. battery
Run Time - BSL1850	
High Mode	Approx. 16 Hours
Medium Mode	Approx. 30 Hours
Low Mode	Approx. 51 Hours
Weight	0.3kg excl. battery

Variant	Voltage	Contents	Case	GTIN
UB18DGLL0Z	18V	Body only	X	4966376317707

Variant	Voltage	Contents	Case	GTIN
UB18DJL0Z	18V	Body only + Strap + Hook	X	4966376317745

UB18DH

18V Cordless Searchlight



 Compatible

Specifications	
Light Source	LED
Battery Voltage	18V
Brightness Spot mode:	Low 400 Lumens Medium 750 Lumens High 950 Lumens
Brightness Wide mode:	Low 450 Lumens Medium 800 Lumens High 1050 Lumens
Irradiation distance	670 m
IP Certification	IP55
Strobe mode	YES
Dimensions (LxWxH) Retracted	174 x 101 x 268 mm
Weight	1.5kg with BSL1850MA

Notes

UC18YFSLJEZ

18V Starter pack 2 - 2 x BSL1840M & UC18YFSL



Battery Specifications

Voltage	18V
Capacity	4.0Ah
Energy (voltage x capacity)	72 Wh
Battery Level Indicator	YES
Charging time with UCYFSL	60min
Number of cells	5 (1Layer)
Dimensions	134 x 83 x 54mm
Weight	560g

Charger UC18YFSL

18V - max. 3.5A



Variant	Voltage	Contents	Case	GTIN
UC18YFSLJEZ	18V	2 x BSL1840M 4.0Ah batteries + UC18YFSL charger	X	4966376409723

UC18YSL3JEZ

MultiVolt Starter pack 1 - 2 x BSL36A18 & UC18YSL3



Battery Specifications

Voltage Capacity	36V - 2.5Ah / 18V - 5.0Ah
Battery Level Indicator	4 Stage
Cooling System	Yes
Charging Time	Approx. 32mins (when using UC18 YSL3)
Compatible Products 18V	All existing 18V Slide type
Compatible Products 36V	MultiVolt 36V tools
Dimensions (LxWxH)	116 x 69 x 76mm
Weight	700g



Fast Charger UC18YSL3

18V/36V - max. 8A

1 x USB charging port (2 A)

Variant	Voltage	Contents	Case	GTIN
UC18YSL3JEZ	18V/36V	2 x BSL36A18 MV batteries + UC18YSL3 Fast charger	X	4966376328611

UC18YFSLJFZ

18V Starter pack 1 - 2 x BSL1820M & UC18YFSL



Battery Specifications

Voltage	18V
Capacity	2.0Ah
Energy (voltage x capacity)	36 Wh
Battery Level Indicator	YES
Charging time with UCYFSL	35min
Number of cells	5 (1Layer)
Dimensions	116 x 76 x 49mm
Weight	380g

Charger UC18YFSL

18V - max. 3.5A



Variant	Voltage	Contents	Case	GTIN
UC18YFSLJFZ	18V	2 x BSL1820M 2.0Ah batteries + UC18YFSL charger	X	4966376409754

UC18YSL3JFZ

MultiVolt Starter pack 2 - 2 x BSL36B18 & UC18YSL3



Battery Specifications

Voltage Capacity	36V - 4.0Ah / 18V - 8.0Ah
Battery Level Indicator	4 Stage
Cooling System	Yes
Charging Time	Approx. 52mins (when using UC18 YSL3)
Compatible Products 18V	All existing 18V Slide type
Compatible Products 36V	MultiVolt 36V tools
Dimensions (LxWxH)	134 x 75 x 83mm
Weight	950g



Fast Charger UC18YSL3

18V/36V - max. 8A

1 x USB charging port (2 A)

Variant	Voltage	Contents	Case	GTIN
UC18YSL3JFZ	18V/36V	2 x BSL36B18 MV batteries + UC18YSL3 Fast charger	X	4966376332199

UC18YSL3JGZ

18V Starter pack 3 - 2 x BSL1850 & UC18YSL3



Battery Specifications

Voltage	18V
Capacity	5.0Ah
Energy (voltage x capacity)	90 Wh
Battery Level Indicator	NO
Dimensions	115 80 x 70mm
Weight	1kg

Fast Charger UC18YSL3

18V/36V - max. 8A
1 x USB charging port (2 A)

BSL1850

18V Battery



Battery Specifications

Voltage	18V
Capacity	5.0Ah
Energy (voltage x capacity)	90 Wh
Battery Level Indicator	NO
Charging time with UC18YSL3	32min
Dimensions	115 80 x 70mm
Weight	1kg

Variant	Voltage	Contents	Case	GTIN
UC18YSL3JGZ	18V/36V	2 x BSL1850 5.0Ah batteries + UC18YSL3 Fast charger	X	4966376409693

Variant	Voltage	Contents	Case	GTIN
335790	18V	BSL1850 battery only	X	4549115038844

UC18YTS1

4 Port Charger



Specifications

Charge time per battery (Rapid charge)	
6.0Ah	38 mins
5.0Ah	32 mins
3.0Ah	20 mins
Charge time per Set of 4 batteries (Simultaneous charge)	
6.0Ah	152 mins
5.0Ah	128 mins
3.0Ah	80 mins
USB Output	2 sockets, 2A total
AC Output	8A
Operating temperature	-10 °C to 50 °C

Variant	Voltage	Contents	Case	GTIN
UC18YTS1J0Z	18V/36V	Charger only	X	4966376330904

BSL36A18

MultiVolt Li-ion battery 2.5Ah/5.0Ah



Battery Specifications

Voltage Capacity	36V - 2.5Ah / 18V - 5.0Ah
Battery Level Indicator	4 Stage
Cooling System	Yes
Charging Time	Approx. 32mins (when using UC18 YSL3)
Compatible Products 18V	All existing 18V Slide type
Compatible Products 36V	MultiVolt 36V tools
Dimensions (LxWxH)	116 x 69 x 76mm
Weight	700g
Compatible Chargers	All chargers for 14.4V - 36V Slide-type Lithium-ion batteries

Variant	Voltage	Contents	Case	GTIN
371750	18V/36V	BSL36A18 battery only	X	454911515156203

BSL36B18

MultiVolt Li-ion battery 4.0Ah/8.0Ah



Battery Specifications

Voltage Capacity	36V - 4.0Ah / 18V - 8.0Ah
Battery Level Indicator	4 Stage
Cooling System	Yes
Charging Time	Approx. 52mins (when using UC18 YSL3)
Compatible Products 18V	All existing 18V Slide type
Compatible Products 36V	MultiVolt 36V tools
Dimensions (LxWxH)	134 x 75 x 83mm
Weight	950g
Compatible Chargers	All chargers for 14.4V - 36V Slide-type Lithium-ion batteries

Variant	Voltage	Contents	Case	GTIN
372120	18V/36V	BSL36B18 battery only	X	4549115160651

BSL1820M

18V Battery 2.0Ah Li-ion

NEW



Battery Specifications

Voltage	18V
Capacity	2.0Ah
Energy (voltage x capacity)	36 Wh
Battery Level Indicator	YES
Charging time with UC18 YSL3	Approx. 15min
Number of cells	5 (1Layer)
Dimensions	116 x 76 x 49mm
Weight	380g

Variant	Voltage	Contents	Case	GTIN
377796	18V	BSL1820M battery only	X	4549115251496

BSL1850C

18V 5.0Ah Li-ion Compact battery



Battery Specifications

Voltage	18V
Capacity	5.0Ah
Energy (voltage x capacity)	90 Wh
Battery Level Indicator	NO
Charging time with UC18 YSL3	32min
Number of cells	5 (1Layer)
Dimensions	97 x 76 x 71mm
Weight	550g

Variant	Voltage	Contents	Case	GTIN
376029	18V	BSL1850C battery only	X	4549115223684

BSL1840M

18V Battery 4.0Ah Li-ion

NEW



Battery Specifications

Voltage	18V
Capacity	4.0Ah
Energy (voltage x capacity)	72 Wh
Battery Level Indicator	YES
Charging time with UC18 YSL3	Approx. 28min
Number of cells	5 (1Layer)
Dimensions	134 x 83 x 54mm
Weight	560g

Variant	Voltage	Contents	Case	GTIN
378679	18V	BSL1840M battery only	X	454911515156203

BSL1850MA

18V Battery 5.0Ah Li-ion

NEW

Battery Specifications

Voltage	18V
Capacity	5.0Ah
Energy (voltage x capacity)	90 Wh
Battery Level Indicator	YES
Charging time with UC18 YSL3	Approx. 32min
Number of cells	10 (2 layers)
Dimensions	116 x 76 x 69mm
Weight	650g

Variant	Voltage	Contents	Case	GTIN
378683	18V	BSL1850MA battery only	X	4549115264441

ET36A

36V MultiVolt Mains power adapter



Specifications

Compatible tool range	MultiVolt series
Input Supply	230V
Output Voltage	36V
Peak Output Voltage	2kW
Cord Length	6.0m
Dimensions:	
Adapter	83 x 134 x 75mm
PFC Box	100 x 185 x 78mm
Weight:	
Adapter	0.8kg
PFC Box	1.2kg

Variant	Voltage	Contents	Case	GTIN
ET36AJ0Z	36V	Mains adapter only	X	4966376324521

RA18DA

18V Cordless Air Duster

NEW

Specifications

Voltage	18V
Max. Air Volume	0.7 m ³ /min
Air Velocity	122 m/sec
Type of Switch	Variable speed trigger
On-lock function	YES
LED	YES
Dimensions (LxWxH)	224 x 250 x 94mm
Weight	1.1kg excl. battery

Batteries not included



 MultiVolt Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
RA18DAW4Z	18V	Body only + Belt hook + Nozzle set	X	4966376412174

HSC1/2/3/4

Stackable Case System

- Fully stackable and interlocking system
- Cases can be stacked in any order or configuration
- Optional wheeled trolley platform
- Optional insert boxes for HSC1, perfect for screws, nuts, bolts and other small loose items
- Optional moulded trays to fit a wide variety of HIKOKI mains and cordless tools



Castor Assembly



HSC1 - 295 x 395 x 101mm



HSC2 - 295 x 395 x 158mm



HSC3 - 295 x 395 x 210mm



HSC4 - 295 x 395 x 315mm

Part No	Description	Suitable for	Fits
402544	HSC1 - empty case with upper foam lining	General use	
402545	HSC2 - empty case with upper foam lining	General use	
402546	HSC3 - empty case with upper foam lining	General use	
402547	HSC4 - empty case with upper foam lining	General use	
402538	HSC1 - with 3 boxes	Storage of small items	
402539	HSC2 - empty case with upper & lower foam lining	General use	
402540	HSC3 - empty case with upper & lower foam lining	General use	
402541	HSC4 - empty case with upper & lower foam lining	General use	
402543	Castor Tray	Transport	HSC1/2/3/4
402542	Organiser tray with 3 partitions	Storage of small items	HSC1
337746	Inner Tray	General use	HSC1
336475	Plastic tray for 14.4/18V drill driver/combi/impact	All DS/DV/WH/WR series	HSC2
339776	Plastic tray for MultiVolt drill driver/combi drill	DS36DAX/DV36DAX	HSC2
336644	Plastic tray for 10.8V drill driver/impact driver	10.8V tools	HSC1
337740	Plastic tray for jigsaw	CJ110MV	HSC1
337741	Plastic tray for 2kg hammer drill	2kg hammers	HSC1
337764	Plastic tray for palm sander	SV13YA	HSC2
337114	Plastic tray for cordless hammer drill	DH18DSL	HSC2
337110	Plastic tray for cordless jigsaw, bottom for battery & charger	CJ18DSL	HSC3
337111	Plastic tray for jigsaw, upper for machine	CJ18DSL	HSC3
337112	Plastic tray for cordless screwdriver	WF18DSL	HSC3
337937	Plastic tray for multi tool	CV18DBL/CV350V	HSC2
337288	Plastic tray for cordless angle drill	DN18DSL	HSC2
337113	Plastic tray for cordless grinder	G18DSL	HSC3
338872	Plastic tray for brushless grinder	G18DBAL	HSC3
370370	Plastic tray for MultiVolt grinder	G3612DA/G3613DB	HSC3
339368	Plastic tray for 2 pce drill/impact driver kit	Most 18V drills & impact drivers	HSC3
373646	Plastic tray for 185mm MultiVolt circular saw	C3607DA	HSC4
337742	Sponge tray for planer	P20SF/P18DSL	HSC3
337109	Sponge tray for cordless high torque impact wrench	WR18DSHL	HSC3
337658	Sponge tray for circular saw	C7UY only	HSC4
337659	Sponge tray for circular saw	C6BU2/C7U2/C7BU2	HSC4
337529	Sponge tray for cordless circular saw	C18DSL	HSC4
373135	Sponge tray for MultiVolt SDS hammer drill	DH36DPA	HSC4
373138	Sponge tray for 165mm MultiVolt circular saw	C3606DA	HSC4
373223	Sponge tray for MultiVolt impact wrench	WR36DA/WR36DB	HSC3
337763	Sponge tray for router	M8V2	HSC2
370331	Sponge tray for brushless hammer drill / framing nailer	DH18DBL/NR1890DBCL	HSC4
371895	Sponge tray for finish nailer	NT1850DBSL/NT1865DBSL/ NT1865DBAL	HSC4
336472	Latch (C217817)	Spare	HSC1/2/3/4
336473	Handle (C112759)	Spare	HSC1/2/3/4
336474	Hinge (C345573)	Spare	HSC1/2/3/4

The HSC case range are covered by the standard 12 month warranty only

CS3630DB

36V MultiVolt Top Handle Chainsaw ** ARBORISTS ONLY **



Specifications

Battery Voltage	36V
Guide Bar Length	310mm (1/2")
Chain Speed	8.3m/s
Type of Guide Bar	P012-50CR
Chain Pitch	9.5mm (3/8")
Overall length	599mm
Weight	4.3kg with BSL36A18 battery

Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
CS3630DBW4Z	36V	1 x BSL38A18 battery + UC18YSL3 charger + chain cover + chain oil + wrench	X	4966376335770

CH3656DA

36V MultiVolt Hedge Trimmer

Specifications

Battery Voltage	36V
Blade Length	620mm
Blade Length (Effective)	560mm
Blade Pitch	35mm
Overall Length	1088mm
Weight	4.1kg with BSL36A18


Compatible

Variant	Voltage	Contents	Case	GTIN
CH3656DAJ4Z	36V	Body only + Blade cover	X	4966376303458

Batteries not included

CG36DB

36V MultiVolt Cordless Grass Trimmers

(Bike handle)

CG36DBW5Z

Specifications

Battery Voltage	36V
Cutting Capacity Dia.	310mm (12")
No Load Speed	5500-6500/min
Overall length	1885mm
Weight	5.6kg with BSL36A18 battery

(Loop handle)

CG36DBW4Z

Specifications

Battery Voltage	36V
Cutting Capacity Dia.	310mm (12")
No Load Speed	5500-6500/min
Overall length	1885mm
Weight	5.8kg with BSL36A18 battery

Compatible

Variant	Voltage	Contents	Case	GTIN
CG36DBW5Z	36V	Body only + Harness + Safety Glasses + Wrenches	X	4966376336302
CG36DBW4Z	36V	Body only + Harness + Safety Glasses + Wrenches	X	4966376336296

RB36DA

36V MultiVolt Blower



Specifications

Battery Voltage	36V
Air Volume	680m³/h (800m³/h in turbo mode)
Air Velocity	45m/s (53m/s in turbo mode)
Blade Pitch	35mm
Overall Length	940mm
Weight	3.5kg with BSL36A18

MV Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
RB36DAJ4Z	36V	Body only + Nozzle	X	4966376317486

Batteries not included

KC18DCJAZ

18V Twin Pack - DV18DC & WH18DC



Kit includes
DV18DCX
WH18DC

Combi Drill
Impact Driver

Variant	Voltage	Contents	Case	GTIN
KC18DCJAZ	18V	DV18DCX / WH18DC, 2 x BSL36A18 MV batteries, UC18YSL3 charger	HSC3	4966376406227

KC18DCJCZ

18V Twin Pack - DV18DC & WR18DH



Kit includes
DV18DC
WR18DH

Comb Drill
Impact Wrench

Variant	Voltage	Contents	Case	GTIN
KC18DCJCZ	18V	DV18DCX / WR18DH, 2 x BSL36A18 MV batteries, UC18YSL3 charger	HSC3	4966376413652

KC18DEJAZ

18V Twin Pack - DV18DE / WH18DE



Kit includes

DV18DE Combi Drill
WH18DE Impact Driver


M Compatible
BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
KC18DEJAZ	18V	DV18DE & WH18DE + 2 x BSL36A18 batteries + UC18YFL charger	HSC3	4966376406111

KC18DFXJAZ

18V MultiVolt Twin Pack - DV18DFX / WH18DFX



Kit includes
DV18DFX
WH18DFX

Combi Drill
Impact Driver

Variant	Voltage	Contents	Case	GTIN
KC18DFXJAZ	18V	DV18DF & WH18DF + 2 x BSL36A18 batteries + UC18YKSL charger	PC	4966376402410

Notes

RH18DA

18V Cordless Heat Gun

NEW



Specifications

Voltage	18V
Air Volume	Step 1: 200 l/min Step 2: 300 l/min
Blowing Temperature	Step 1: 30 - 400 °C Step 2: 30 - 550 °C 10 C steps
Switch On-lock function	YES
LCD panel	YES
Quick nozzle change	YES
Hanging hook	YES
LED	YES
Dimensions (LxWxH)	165 x 78 x 217mm
Weight	1.6kg with BSL36B18

 Compatible

Variant	Voltage	Contents	Case	GTIN
RH18DAW4Z	18V	Body only + round nozzle + reflector nozzle + wide slot nozzle	X	4966376403288

Mains powered tools

D6SH

6MM Rotary Drill



Specifications

Chuck capacity	0.5 - 6.5mm
Max. Steel	6.5mm
Max. Wood	9mm
Power Input	240W
No Load Speed	4500/min
Overall length	206mm
Weight	0.9kg

D10VF

10mm Rotary Drill



Specifications

Chuck capacity	0.8 - 10mm
Max. Steel (Twist bit)	10mm
Max. Wood (Flat bit)	25mm
Holesaw	29mm
Power Input	710W
No Load Speed	0 - 3000/min
Overall length	265mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
D6SHJ1Z	230V	D6SH + Depth stop + chuck key	X	4966376271436
D6SHJ2Z	110V	D6SH + Depth stop + chuck key	X	4966376271443

D10VC3

10mm Rotary Drill



Specifications

Chuck capacity	10mm
Max. Steel (Twist bit)	10mm
Max. Wood (Flat bit)	32mm
Power Input	600W
No Load Speed	0 - 2500/min
Overall length	242mm
Weight	1.4kg



Variant	Voltage	Contents	Case	GTIN
D10VC3J6Z	230V	D10VC3 (Tool only)	X	4966376270064
D10VC3J7Z	110V	D10VC3 (Tool only)	X	4966376270071

D13VF

13mm Rotary Drill



Specifications

Chuck capacity	1.5 - 13mm
Max. Steel (Twist bit)	13mm
Max. Wood (Flat bit)	50mm
Auger bit (wood)	32mm
Holesaw	102mm
Power Input	710W
No Load Speed	0 - 850/min
Overall length	290mm
Weight	2.0kg



Variant	Voltage	Contents	Case	GTIN
D13VF3J6Z	230V	D13VF + Side handle	BM	4966376270873
D13VF3J7Z	110V	D13VF + Side handle	BM	4966376270880

D13

13mm Rotary Drill



Specifications

Chuck capacity	1.5 - 13mm
Max. Steel	13mm
Max. Wood	40mm
Power Input	720W
No Load Speed	550/min
Overall length	378mm
Weight	3.0kg



Variant	Voltage	Contents	Case	GTIN
D13J1Z	230V	D13 + side handle + chuck key	X	4966376270699
D13J2Z	110V	D13 + side handle + chuck key	X	4966376270705

FDV16VB2

16mm Impact Drill



Specifications

Chuck capacity	1.5 - 13mm
Max. Concrete	16mm
Max. Steel	13mm
Max. Wood	25mm
Power Input	550W
No Load Speed	0 - 2900/min
Full Load Impact Rate	27360/min
Overall length	289mm
Weight	1.6kg



Variant	Voltage	Contents	Case	GTIN
FDV16VB2J1Z	230V	FDV16VB2 + side handle + depth stop	BM	4966376298358
FDV16VB2J2Z	110V	FDV16VB2 + side handle + depth stop	BM	4966376298365

DV16V

16mm Impact Drill



Specifications

Chuck capacity	1.5 - 13mm
Max. Concrete	16mm
Max. Steel	13mm
Power Input	590W
No Load Speed	0 - 2900/min
Full Load Impact Rate	34500/min
Overall length	269mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
DV16VJ6Z	230V	DV16V + side handle + depth stop	BM	4966376286317
DV16VJ7Z	110V	DV16V + side handle + depth stop	BM	4966376286324

DV18V

18mm Impact Drill



Specifications

Chuck capacity	1.5 - 13mm
Max. Concrete	18mm
Max. Steel	13mm
Power Input	690W
No Load Speed	0 - 1000/0 -3000/min
Full Load Impact Rate	8400/27300/min
Overall length	333mm
Weight	2.0kg



Variant	Voltage	Contents	Case	GTIN
DV18VJ6Z	230V	DV18V + side handle + depth stop	IM	4966376287024
DV18VJ7Z	110V	DV18V + side handle + depth stop	IM	4966376287031

DV20VB2

20mm Impact Drill



Specifications

Chuck capacity	1.5 - 13mm
Max. Concrete	20mm
Max. Steel	13mm
Max. Wood	40mm
Power Input	790W
No Load Speed	0 - 1000/3000/min
Full Load Impact Rate	0 - 8000/26000/min
Overall length	333mm
Weight	2.2kg

DH26PX2

26mm SDS-Plus Rotary Hammer Drill



Specifications

Capacity Concrete:	
Drill Bit	3.4-26mm
Core Bit	25-50mm
Mild Steel	13mm
Wood	32mm
Power Input	830W
Impact Energy	3.2J
Bit Shank	SDS-plus
No Load Speed	0-1100/min
Full Load Impact Rate	0-4300/min
Overall length	349mm
Weight	2.8kg



Variant	Voltage	Contents	Case	GTIN
DV20VB2J6Z	230V	DV20VB2 + side handle + depth stop	IM	4966376287291
DV20VB2J7Z	110V	DV20VB2 + side handle + depth stop	IM	4966376287307

DV20VD

20mm Impact Drill



Specifications

Chuck capacity	1.5 - 13mm
Max. Concrete	20mm
Max. Steel	13mm
Max. Wood	40mm
Power Input	860W
No Load Speed	0 - 1100/3000/min
Full Load Impact Rate	8100/22000/min
Overall length	363mm
Weight	3.0kg



Variant	Voltage	Contents	Case	GTIN
DV20VDJ6Z	230V	DV20VD + Side handle + depth stop	BM	4966376287468
DV20VDJ7Z	110V	DV20VD + Side handle+ depth stop	BM	4966376287475

DH28PX2

28mm SDS-Plus Rotary Hammer Drill



Specifications

Capacity Concrete:	
Drill Bit	3.4-28mm
Core Bit	25-50mm
Mild Steel	13mm
Wood	32mm
Power Input	850W
Impact Energy	3.4J
Bit Shank	SDS-plus
No Load Speed	0-1100/min
Full Load Impact Rate	0-4300/min
Overall length	360mm
Weight	3.0kg

Variant	Voltage	Contents	Case	GTIN
DH28PX2J1Z	230V	DH28PX2 + side handle + depth stop	IM	4966376328536
DH28PX2J2Z	110V	DH28PX2 + side handle + depth stop	IM	4966376328543

DH40MC

40mm SDS-Max Rotary Demolition Hammer



Specifications

Capacity Concrete:

Drill Bit	40mm
Core Bit	105mm
Power Input	1100W
Impact Energy	8.5J
Bit Shank	SDS-max
No Load Speed	620/min
Full Load Impact Rate	2800/min
Overall length	448mm
Weight	7.1kg



Variant	Voltage	Contents	Case	GTIN
DH40MC	230V	DH40MC + Side handle + depth stop + grease	IM	4966376284580
DH40MC	110V	DH40MC + Side handle + depth stop + grease	IM	4966376284597

DH40MEY2

40mm SDS-Max Rotary Demolition Hammer

NEW



RHB


UVP

BRUSH

LESS



Variant	Voltage	Contents	Case	GTIN
DH40MEY2J1Z	230V	DH40MEY2 + Side handle + depth stop + grease	IM	4966376407859
DH40MEY2J2Z	110V	DH40MEY2 + Side handle + depth stop + grease	IM	4966376407866

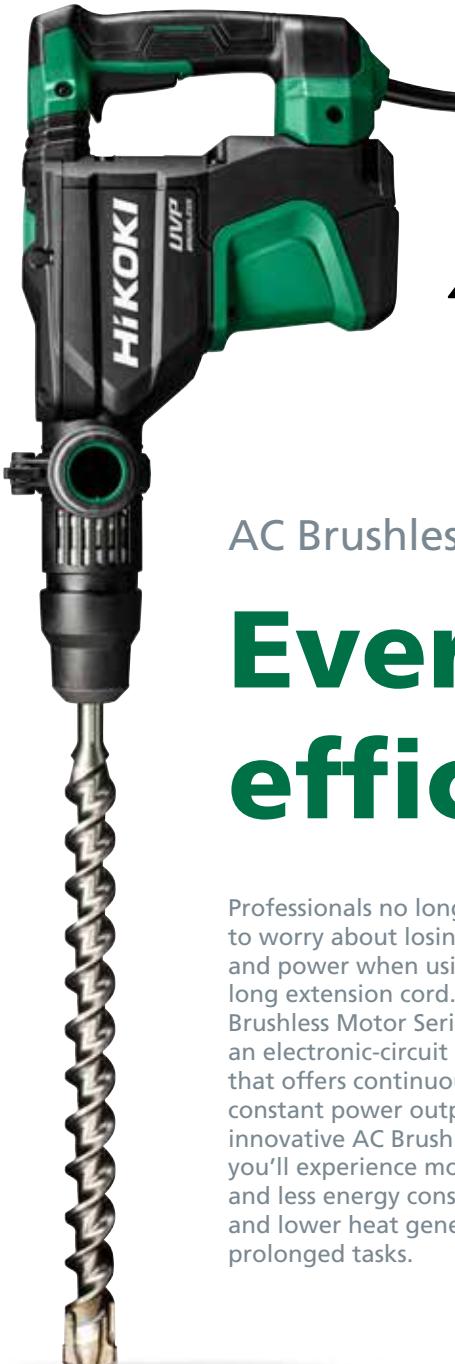

AC Brushless

**BRUSH
LESS**
Brushless Motor

AC Brushless Motor Series

**Everlasting
efficiency**

Professionals no longer have to worry about losing voltage and power when using a long extension cord. Our AC Brushless Motor Series feature an electronic-circuit control that offers continuous and constant power output. With the innovative AC Brushless Motor you'll experience more power and less energy consumption, and lower heat generation on prolonged tasks.

Demolition Hammers



DH45MA

45mm SDS-Max Rotary Demolition Hammer



LVH
LIGHT VIBRATION HAMMER



Variant	Voltage	Contents	Case	GTIN
DH45MAJ1Z	230V	DH45MA + Side handle + stopper + grease	IM	4966376402489
DH45MAJ2Z	110V	DH45MA + Side handle + stopper + grease	IM	4966376402496

DH45ME

45mm SDS-Max Rotary Demolition Hammer



AHB
ALUMINIUM HOUSING BODY

BRUSHLESS
Brushless Motor



Variant	Voltage	Contents	Case	GTIN
DH45MEJ1Z	230V	DH45ME + Side handle + depth stop + grease	IM	4966376284832
DH45MEJ2Z	110V	DH45ME + Side handle + depth stop + grease	IM	4966376284849

Specifications

Capacity Concrete:

Drill Bit	45mm
Core Bit	125mm
Power Input	1400W
Impact Energy	11.3J
Bit Shank	SDS-max
No Load Speed	380/min
Full Load Impact Rate	2900/min
Overall length	535mm
Weight	9.4kg

DH52ME

52mm SDS-Max Rotary Demolition Hammer



RHB
ALUMINIUM BODY
BRUSHLESS
Brushless Motor



Specifications

Capacity Concrete:

Drill Bit	52mm
Core Bit	160mm
Power Input	1500W
Impact Energy	22.0J
Bit Shank	SDS-max
No Load Speed: 110V	110 - 260/min
No Load Speed: 240V	110 - 280/min
Full Load Impact Rate: 110V	1000 - 2200/min
Full Load Impact Rate: 240V	1000 - 2400/min
Overall length	585mm
Weight	11.0kg

H41MB2

SDS-Max Demolition Hammer



Specifications

Power Input	950W
Impact Energy	7.0J
Bit Shank	SDS-max
Full Load Impact Rate	3000/min
Overall length	427mm
Weight	5.24kg

LVH
LOW VIBRATION HAMMER



Variant	Voltage	Contents	Case	GTIN
H41MB2J1Z	230V	H41MB2 + Bull point + Side handle	IM	4966376267750
H41MB2J2Z	110V	H41MB2 + Bull point + Side handle	IM	4966376267767

DH52MA

52mm SDS-Max Rotary Demolition Hammer



LVH
LOW VIBRATION HAMMER



Specifications

Capacity Concrete:

Drill Bit	52mm
Core Bit	160mm
Power Input	1500W
Impact Energy	15.5J
Bit Shank	SDS-max
No Load Speed	330/min
Full Load Impact Rate	2250/min
Overall length	585mm
Weight	11.8kg

H45MEY

SDS-Max Demolition Hammer



RHB
ALUMINIUM BODY
UVP
USER VIBRATION PROTECTION
BRUSHLESS
Brushless Motor



Specifications

Power Input	1150W
Impact Energy	8.5J
Bit Shank	SDS-max
Full Load Impact Rate	1430 - 2850/min
Overall length	480mm
Weight	7.3kg

Variant	Voltage	Contents	Case	GTIN
DH52MAJ1Z	230V	DH52MA + Side handle + stopper + grease	IM	4966376402601
DH52MAJ2Z	110V	DH52MA + Side handle + stopper + grease	IM	4966376402618

Variant	Voltage	Contents	Case	GTIN
H45MEYJ1Z	230V	H45MEY + Bull point + Side handle	IM	4966376288175
H45MEYJ2Z	110V	H45MEY + Bull point + Side handle	IM	4966376288182

H60MC

SDS-Max Demolition Hammer



Specifications

Power Input	1250W
Impact Energy	22.0J
Bit Shank	SDS-max
Full Load Impact Rate	1600/min
Overall length	570mm
Weight	10.2kg

RHB
PLUMINIUM HOUSING BODY

Variant	Voltage	Contents	Case	GTIN
H60MCJ1Z	230V	H60MC + Bull point + Side handle	BM	4966376288427
H60MCJ2Z	110V	H60MC + Bull point + Side handle	BM	4966376288434

H60MEY

SDS-Max Demolition Hammer

**RHB**
PLUMINIUM HOUSING BODY**UVP**
USER VIBRATION PROTECTION**BRUSHLESS**
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
H60MEYJ1Z	230V	H60MEY + Bull point + Side handle	IM	4966376288670
H60MEYJ2Z	110V	H60MEY + Bull point + Side handle	IM	4966376288687

Specifications

Power Input	1500W
Impact Energy	20.0J
Bit Shank	SDS-max
Full Load Impact Rate	1500 - 2100/min
Overall length	585mm
Weight	12.2kg

H65SD3

28mm SDS-Max Demolition Hammer



Variant	Voltage	Contents	Case	GTIN
H65SD3J2Z	110V	H65SD3 + Side handle	BM	4966376288939

H90SG

28.5mm SDS-Max Demolition Hammer

RHB
PLUMMERS HOUSING BODY
UVP
USER VIBRATION PROTECTION
BRUSHLESS
Brushless Motor



Specifications

Power Input	1560W
Impact Energy	70J
Bit Shank	SDS-max
Full Load Impact Rate	1000/min
Overall length	860mm
Weight	32.0kg



Variant	Voltage	Contents	Case	GTIN
H90SGJ2Z	110V	H90SG + wrench	X	4966376289080

W6VB3

6mm Screwdriver



Specifications

Capacity: Drywall Screw	6mm
Self-Drilling Screw	6mm
Bit Shank	6.35mm (1/4") hex
Power Input	620W
No Load Speed	0 - 2600/min
Overall length	312mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
W6VB3J2Z	110V	W6VB3 +Magnetic bit holder + sub stopper	X	4966376280681

C7ST

185mm Circular Saw



Specifications

Blade Diameter	185mm
Bore Ø	30mm
Max. Cut Depth 90°	62mm
Max. Cut Depth 45°	47.5mm
Bevel Capacity	0 - 45°
Power Input	1710W
No Load Speed	6000/min
Overall length	310mm
Weight	4.3kg



Variant	Voltage	Contents	Case	GTIN
C7STJ1Z	230V	C7ST + blade + guide + wrench	BM	4966376292578
C7STJ2Z	110V	C7ST + blade + guide + wrench	BM	4966376292585

C7SB3

185mm Circular Saw



Specifications

Blade Diameter	185mm
Bore Ø	30mm
Max. Cut Depth 90°	62mm
Max. Cut Depth 45°	47.5mm
Bevel Capacity	0 - 45°
Power Input	1710W (110V: 1670W)
No Load Speed	6000/min
Overall length	304mm
Weight	4.3kg



Variant	Voltage	Contents	Case	GTIN
C7SB3J1Z	230V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376292158
C7SB3J2Z	110V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376292165

C7U3

190mm Circular Saw



Specifications

Blade Diameter	190mm
Bore Ø	30mm
Max. Cut Depth 90°	66mm
Max. Cut Depth 45°	48mm
Power Input	1300W (110V: 1200W)
No Load Speed	5800/min
Overall length	314mm
Weight	4.7kg



Variant	Voltage	Contents	Case	GTIN
C7U3J6Z	230V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376292653
C7U3J7Z	110V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376292660

C9U3

235mm Circular Saw



Specifications

Blade Diameter	235mm
Bore Ø	30mm
Max. Cut Depth 90°	86mm
Max. Cut Depth 45°	65mm
Power Input	2000W (110V: 1670W)
No Load Speed	6000/min
Overall length	397mm
Weight	7.2kg



Variant	Voltage	Contents	Case	GTIN
C9U3J6Z	230V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376293469
C9U3J7Z	110V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376293476

C8FSHG

216mm Slide Compound Mitre Saw with LASER



Specifications

Blade Diameter	185mm
Bore Ø	30mm
Cross Cut 0°	65 x 280/54 x 305mm
Mitre Cut 45°	65 x 203/54 x 210mm
Left Bevel Cut 45°	38 x 280/26 x 305mm
Power Input	1100W
No Load Speed	5300/min
Mitre Angle	48° left/right
Bevel Angle	47° left/2° right
Weight	13.8kg



Variant	Voltage	Contents	Case	GTIN
C8FSHGJ1Z	230V	Blade + dust bag + vice assembly + ext. table + wrench	X	4966376331598
C8FSHGJ2Z	110V	Blade + dust bag + vice assembly + ext. table + wrench	X	4966376331604

C8FSE

216mm Slide Compound Mitre Saw



Specifications

Blade Diameter	185mm
Bore Ø	30mm
(H x W) Cross Cut 0°	65 x 312mm
Mitre Cut 45°	65 x 220mm
Bevel Cut 45°	45 x 312mm
Compound Mitre Cut 45° and bevel 45°	45 x 220mm
Power Input	1050W
No Load Speed	5500/min
Mitre Angle right/left	0-57° / 0-45°
Bevel Angle right/left	0-5° / 0-48°
Dimensions	565 x 790 x 485mm
Weight	16.4kg

C12RSH2

305mm Slide Compound Mitre Saw with LASER



Specifications

Blade Diameter	305mm
Bore Ø	30mm
(H x W) Cross Cut 0°	105 X 312mm
Mitre Cut Left/Right 45°	105 x 220mm
Bevel Cut 45°	68 x 312mm
Power Input	1520W
No Load Speed	4000/min
Mitre Angle right/left	0-57° / 0-45°
Bevel Angle right/left	0-45° / 0-45°
Dimensions	655 x 890 x 724mm
Weight	27kg

C10FCE2

255mm Compound Mitre Saw



Specifications

Blade Diameter	255mm
Bore Ø	30mm
(H x W) Cross Cut 0°	59 x 144mm or 89 x 101mm
Mitre Cut 45°	65 x 220mm or 89 x 70mm
Bevel Cut 45°	41 x 144mm
Compound Mitre Cut 45° and bevel 45°	41 x 102mm
Power Input	1520W
No Load Speed	5000/min
Mitre Angle right/left	0 - 52° / 0 - 52°
Bevel Angle left	0 - 45°
Dimensions	460 x 628 x 561mm
Weight	11.5kg

Variant	Voltage	Contents	Case	GTIN
C10FCE2JMZ	230V	+ dust bag + vice assembly + sub fence + wrench	X	4966376290451
C10FCE2JZZ	110V	+ dust bag + vice assembly + sub fence + wrench	X	4966376290468

712650

Universal Workstation



Specifications

Weight	27.7kg
Maximum Load	136kg
Maximum width of extension arms	2.35m
Size of extended stand (LxWxH)	1416 x 651 x 916mm

Variant	Case	GTIN
712650Z	X	8717574043532

CJ90VST2

Jigsaw



Specifications

Max. Wood:	90mm
Max. Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Power Input	705W
Length of stroke	26mm
No Load Speed (Stroke)	850 - 3000/min
Overall Length	215mm
Weight	2.2kg

Variant	Voltage	Contents	Case	GTIN
CJ90VST2J1Z	230V	CJ90VST2 + blade + wrench	BM	4966376333417
CJ90VST2J2Z	110V	CJ90VST2 + blade + wrench	BM	4966376333424

CJ110MV

Jigsaw



Specifications

Max. Wood:	110mm
Max. Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Power Input	720W
Length of stroke	26mm
No Load Speed (Stroke)	850 - 3000/min
Overall Length	246mm
Weight	2.2kg

Variant	Voltage	Contents	Case	GTIN
CJ110MVJ1Z	230V	+ blade + splinter guard + chip cover + dust adaptor	BM	4966376293636
CJ110MVJ2Z	110V	+ blade + splinter guard + chip cover + dust adaptor	BM	4966376293643

CJ160V

Jigsaw



Specifications

Max. Wood:	160mm
Max. Aluminimum	20mm
Max. Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Power Input	800W
Length of stroke	26mm
No Load Speed (Stroke)	800 - 2800/min
Overall Length	249mm
Weight	2.5kg

Variant	Voltage	Contents	Case	GTIN
CJ160VJ1Z	230V	3 blade + splinter guard + chip cover + dust adaptor	BM	4966376293841
CJ160VJ2Z	110V	3 blade + splinter guard + chip cover + dust adaptor	BM	4966376293858

Notes

CR13V2

130mm Reciprocating Saw



Specifications	
Max. Pipe	130mm
Max. Steel Plate	19mm
Max. Wood	300mm
Power Input	1010W
Length of stroke	29mm
No Load Speed (Stroke)	0 - 2800/min
Overall Length	435mm
Weight	3.3kg

CV350V

Multi Tool



Specifications	
Oscillation Frequency:	
Standard Mode (Dial 1-5)	6000 - 20000/min
AUTO Mode (Dial A)	15000 - 20000/min
Power Input	350W
Length of stroke	32mm (1-1/4")
Oscillation Angle	3.2°
Overall Length	280mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
CR13V2J1Z	230V	CR13V2 + blade + wrenches	BM	4966376282272
CR13V2J2Z	110V	CR13V2 + blade + wrenches	BM	4966376282289

CR13VBY

130mm Reciprocating Saw



Specifications	
Max. Pipe	130mm
Max. Steel Plate	19mm
Max. Wood	300mm
Power Input	1150W
Length of stroke	32mm (1-1/4")
No Load Speed (Stroke)	0 - 3000/min
Overall Length	465mm
Weight	4.4kg



Variant	Voltage	Contents	Case	GTIN
CR13VBYJ1Z	230V	CR13VBY + blade	BM	4966376282432
CR13VBYJ2Z	110V	CR13VBY + blade	BM	4966376282449

Notes

M8V2

1/4" Router



1

Variant	Voltage	Contents	Case	GTIN
M8V2J1Z	230V	M8V2 + straight guide + template guide + wrench	BM	4966376295500

M12VE

1/2" Router



1

Variant	Voltage	Contents	Case	GTIN
M12VEJ6Z	230V	M12VE + straight guide + template guide + wrench	BM	4966376295319
M12VEJ7Z	110V	M12VE + straight guide + template guide + wrench	BM	4966376295326

P20SF

Planer



1

Variant	Voltage	Contents	Case	GTIN
P20SFJ1Z	230V	P20SF + blade setting gauge + guide + wrench	BM	4966376295951

Notes

SV13YA

125mm Random Orbit Sander



Specifications

Capacity Sanding Pad	125mm
Orbit Diameter	3.2mm
Power Input	230W
No Load Speed	7000 - 12000/min
Overall Length	145mm
Weight	1.4kg

SB8V2

76mm Belt Sander



Specifications

Capacity: Belt Size	76 x 533mm
Power Input	1020W
No Load Belt Speed	250 - 450m/min
Overall Length	318mm
Weight	4.5kg



Variant	Voltage	Contents	Case	GTIN
SY13YAJ1Z	230V	SY13YA + sanding paper + dust bag	BM	4966376279845
SY13YAJ2Z	110V	SY13YA + sanding paper + dust bag	BM	4966376279852

SV12SG

Palm Sander



Specifications

Capacity Sanding Pad	110 x 100mm
Orbit Diameter	1.5mm
Power Input	200W
No Load Speed: Spindle	14000/min
No Load Speed: Orbit	28000/min
Overall Length	137mm
Weight	1.1kg

SB10V2

100mm Belt Sander



Specifications

Capacity: Belt Size	100 x 610mm
Power Input	1020W
No Load Belt Speed	250 - 420m/min
Overall Length	363mm
Weight	5.4kg



Variant	Voltage	Contents	Case	GTIN
SV12SGJ1Z	230V	SV12SG + sanding paper + dust bag + punch plate	X	4966376279555
SV12SGJ2Z	110V	SY15YC + sanding paper + dust bag + wrench	X	4966376279562



Variant	Voltage	Contents	Case	GTIN
SB10V2J1Z	230V	SB10V2 + sanding belt + dust bag	X	4966376296590
SB10V2J2Z	110V	SY15YC + sanding paper + dust bag + wrench	X	4966376296606

SP18VA

Sander/Polisher



Specifications

Capacity Sanding Disc	180mm
Wool Bonnet	180mm
Spindle Thread	M14 x 2
Power Input	1250W
No Load Speed	0 - 3400/min
Overall Length	415mm
Weight	2.8kg

G12STX

115mm Angle Grinder



Specifications

Capacity Wheel Diameter	115mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	600W
No Load Speed	11500/min: 230V 12000/min: 110V
Overall Length	254mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
SP18VAJ1Z	230V	SP18VA + loop handle + rubber pad + wool bonnet + sanding disc + wrench	X	4966376279197
SP18VAJ2Z	110V		X	4966376279203

G10SR4

100mm Angle Grinder



Specifications

Capacity Wheel Diameter	100mm
Hole Diameter Ø	16mm
Spindle Thread	M10 x 1.5
Power Input	730W
No Load Speed	10000/min
Overall Length	258mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
G10SR4J5Z	230V	G10SR4 + side handle + wrench	X	4966376271887
G10SR4J6Z	110V	G10SR4 + side handle + wrench	X	4966376271894

G12STX/CD

115mm Angle Grinder Kit



Specifications

Capacity Wheel Diameter	115mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	600W
No Load Speed	11500/min: 230V 12000/min: 110V
Overall Length	254mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G12STXJ7Z	230V	G12STX + diamond wheel + Side handle + wrench	BM	4966376273249
G12STXJ8Z	110V	G12STX + diamond wheel + Side handle + wrench	BM	4966376273256

G12SR4

115mm Angle Grinder



Specifications

Capacity Wheel Diameter	115mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	730W
No Load Speed	10000/min
Overall Length	258mm
Weight	1.8kg

G12SE3

115mm Angle Grinder



Specifications

Capacity Wheel Diameter	115mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	1400W: 230V 1200W: 110V
No Load Speed	11500/min
Overall Length	328mm
Weight	2.5kg



Variant	Voltage	Contents	Case	GTIN
G12SR4J5Z	230V	G12SR4 + Side handle + wrench	X	4966376272938
G12SR4J6Z	110V	G12SR4 + Side handle + wrench	X	4966376277294

G12SN2

115mm Angle Grinder



Specifications

Capacity Wheel Diameter	115mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	900W
No Load Speed	10500/min
Overall Length	266mm
Weight	2.0 kg

G13SE3

125mm Angle Grinder



Specifications

Capacity Wheel Diameter	125mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	1400W: 230V 1200W: 110V
No Load Speed	11500/min
Overall Length	328mm
Weight	2.5kg



Variant	Voltage	Contents	Case	GTIN
G12SN2J5Z	230V	G12SN2 + side handle + wrench	X	4966376272716
G12SN2J6Z	110V	G12SN2 + side handle + wrench	X	4966376272723



Variant	Voltage	Contents	Case	GTIN
G13SE3J1Z	230V	G13SE3 + abrasive wheel + side handle + wrench	X	4966376331468
G13SE3J2Z	110V	G13SE3 + abrasive wheel + side handle + wrench	X	4966376331475

G18SE4

180mm Angle Grinder



Specifications

Capacity Wheel Diameter	180mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No Load Speed	8500/min
Overall Length	492mm
Weight	5.98kg



Variant	Voltage	Contents	Case	GTIN
G18SE4J1Z	230V	G18SE4 + Side handle + wrench	X	4966376326136

G23ST

230mm Angle Grinder



Specifications

Capacity Wheel Diameter	230mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	2000W
No Load Speed	6600/min
Overall Length	469mm
Weight	5.1kg



Variant	Voltage	Contents	Case	GTIN
G23STJ1Z	230V	G23ST + side handle + wrench	X	4966376276677
G23STJ2Z	110V	G23ST + side handle + wrench	X	4966376276684

G23ST/CD

230mm Angle Grinder Kit



Variant	Voltage	Contents	Case	GTIN
G23STCDJ1Z	230V	G23ST + diamond wheel + side handle + wrench	BM	5017658063986
G23STCDJ2Z	110V	G23ST + diamond wheel + side handle + wrench	BM	5017658063993

G23ST/G12STX

230mm + 115mm Grinder Twin Pack



Variant	Voltage	Contents	Case	GTIN
G23ST/G12STXCDJ1Z	230V	G23ST + G12STX + side handles + wrenches	BM	5017658065034
G23ST/G12STXCDJ2Z	110V	G23ST + G12STX + side handles + wrenches	BM	5017658065401

G23SC4

230mm Angle Grinder



Specifications

Capacity Wheel Diameter	230mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No Load Speed	6600/min
Overall Length	492mm
Weight	6.1kg



Variant	Voltage	Contents	Case	GTIN
G23SC4J1Z	230V	G23SC4 + Side handle + wrench	X	4966376326020
G23SC4J2Z	110V	G23SC4 + Side handle + wrench	X	4966376326037

G23MR

230mm Angle Grinder (Aluminium Body)



Specifications

Capacity Wheel Diameter	230mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No Load Speed	6600/min
Overall Length	492mm
Weight	5.4kg



Variant	Voltage	Contents	Case	GTIN
G23MRJ1Z	230V	G23MR + side handle + wrench	X	4966376276073
G23MRJ2Z	110V	G23MR + side handle + wrench	X	4966376276080

GP2S2

Die Grinder



Specifications

Capacity Collet Chuck	6mm
Max. Wheel Diameter Ø	25mm
Spindle Thread	M14 x 2
Power Input	520W
No Load Speed	29000/min
Overall Length	360mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
GP2S2J2Z	110V	GP2S2	X	4966376277575

Mounted point not included

CC14SF

355mm Cut-off Machine



Specifications

Wheel Diameter	355mm
Wheel Bore Ø	25.4mm
Capacity Bar Diameter	65mm
Pipe Diameter	100mm
Shaped steel	100 x 100mm
Power Input	2000W
No Load Speed	3800/min
Dimensions (LxWxH)	603 x 318 x 603mm
Weight	16.5kg



Variant	Voltage	Contents	Case	GTIN
CC14SFJ1Z	230V	CC14SF + wrench	X	4966376281312
CC14SFJ2Z	110V	CC14SF + wrench	X	4966376281329

NT50AE2

50mm Brad Nailer



Specifications

Driving system	Piston Reciprocating Action
Operating Pressure Range	4.9-8.3 bar (70-120psi)
Driving Speed	3 nails/sec.
Nail Size	18 gauge
Nail Length	16-50mm
Loading Capacity	100 nails
Air Inlet	NPT 1/4 Thread
Dimensions (L x H)	254 x 233mm
Weight	1.0kg

Variant	Contents	Case	GTIN
NT50AE2L2Z	NT50AE2 + nose cap + safety glasses	BM	4966376297160



Wall Chaser

CM5MA
1900W Wall Chaser

NEW



Specifications	
Max. cutting depth	40mm
Max. cutting width	35mm
No load speed	5000/min
Max. blade diameter	125mm
Torque	6Nm
Spindle thread	M14
Rated input power	1900W
Vibrations	5.5 m/s ²
Cutting direction	Push
Restart protection	YES
Constant speed	YES
Overload protection	YES
Soft start	YES
Dimensions (LxWxH)	480 x 195 x 175mm
Weight	4.7kg

Variant	Voltage	Contents	Case	GTIN
CM5MAJ1Z	230V Only	CM5MA + Diamond cut-off wheels + chase chisel + 2-hole spanner + distance washers + case	BM	4966376338542



Available as an accessory - not included as standard

4100299 | Diamond Disc (3 Row)

Notes

Notes

HiKOKI glossary.

MV Compatible

MULTI VOLT is the most intelligent 36V battery system yet. It combines the best high-performance power tools with our most powerful batteries and accessories for your consistently high performance. One battery pack, two voltages - depending on the tool - the voltage automatically switches to 18V or 36V, making it compatible with tools of both voltages.

BRUSHLESS

Due to a more compact design than brushed motors, brushless motors allow for smaller and lighter tools. Even under heavy use, the brushless motors significantly extend the product's service life without the inconvenience of armature burn-out, short circuits or commutator wear. Plus, they do not require the regular replacement of carbon brushes.

RFC

When the tool bit is suddenly overburdened during operation, Reactive Force Control stops the motor to reduce twisting of the main unit preventing user injuries.

RHB

An internal double-insulation construction with a very sturdy aluminium die-cast body is incorporated to make the housing more rigid enhancing the durability of the motor unit significantly.

UVP

Our original, spring-type dynamic vibration absorber with a weight and two springs/spring leaf moves in the opposite direction to the vibration direction of the main body. This results in reduced vibration and improved operating efficiency.

LVH

Low Vibration Handle consists of rubber dampers and/or hinges to reduce vibration and user fatigue.

TRIPLE HAMMER

Triple hammer reduces vibration by making three impacts per rotation instead of the conventional two. The results are lower vibration levels, greater operator comfort, and ease of use with less cam-out.

IP54 IP55 IP56 IP65

The IP-code rates the degree of protection against dust and water ingress. HiKOKI tools that are IP-rated come with silicon-coated electronics protecting the tool.

IP54: Protected against dust. Protected against splash water.

IP55: Protected against dust. Protected against water jets.

IP56: Protected against dust. Protected against powerful water jets.

IP65: Completely dust tight. Protected against water jets.

AIR SPRING DRIVE SYSTEM

Our unique Air Spring Drive System uses the compressed air sealed in the main unit. It drives up to 3 nails per second with zero ramp-up time, and it sets nails flush consistently without combustion noise or gas fumes.

LED LEVEL

LED level indicates if tool is held straight to achieve precisely drilled holes.





HIGH PERFORMANCE POWER TOOLS

HiKOKI Power Tools (UK) Ltd

25 Majestic Road
Nursling Industrial Estate
Southampton
SO16 0YT

Email: info@hikoki-powertools.co.uk

**Follow us on our socials and never
miss out on HiKOKI news.**



www.hikoki-powertools.co.uk