





## ELECTROMAGNETIC COMPATIBILITY TEST REPORT

Company Logitech Far East Ltd.  
Address NO.2, Creation Rd. 4, Science-Based Industrial Park, Hsinchu  
Taiwan, R.O.C.  
Sample Name Mouse  
Model M-UE SONY2  
Data Applies To 177243111  
Date Received DEC. 09, 1999  
Date Tested DEC. 14, 1999

### MEASUREMENT REQUIREMENT USED

FCC RULES AND REGULATION PART 15 SUBPART B  
CLASS B OCTOBER 1998 AND ANSI C63.4 MAY 1992  
CISPR 22, CLASS B, 1996

WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.

	Name	Signature	Date
Testing Engineer	C.F.Wu/NVLAP		Dec. 16, 1999
Approving Manager	Laurence Chang/NVLAP		Dec. 29, 1999

### Notes

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to test, and is invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the date issued.
5. This is a NIST/NVLAP accredited report but not constituted and endorsed by US government.



## TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION.....	3
1.1 GENERAL STATEMENT.....	3
1.2 DESCRIPTION OF EUT POWER.....	3
1.3 DESCRIPTION OF PERIPHERALS.....	4
1.4 EUT & PERIPHERALS SETUP DIAGRAM.....	5
1.5 EUT OPERATING CONDITION.....	6
1.6 DESCRIPTION OF TEST SITE.....	6
2. CONDUCTED EMISSION TEST.....	7
2.1 TEST EQUIPMENTS.....	7
2.2 TEST SETUP.....	7
2.3 CONDUCTED POWER LINE EMISSION LIMIT.....	8
2.4 TEST PROCEDURE.....	8
2.5 UNCERTAINTY OF CONDUCTED EMISSION.....	8
2.6 CONDUCTED RF VOLTAGE MEASUREMENT.....	9
2.7 PHOTOS OF CONDUCTION TEST.....	10
3. RADIATED EMISSION TEST.....	11
3.1 TEST EQUIPMENTS.....	11
3.2 TEST SETUP.....	11
3.3 RADIATION LIMIT.....	12
3.4 TEST PROCEDURE.....	12
3.5 UNCERTAINTY OF RADIATED EMISSION.....	12
3.6 RADIATED RF NOISE MEASUREMENT.....	13
3.7 PHOTOS OF OPEN SITE.....	14-15



## 1. GENERAL INFORMATION

### 1.1 GENERAL STATEMENT

MEASUREMENT DEVIATION Comply with standard in full

TRACEABILITY This test result is traceable to national or international std.

### 1.2 DESCRIPTION OF EUT POWER

MANUFACTURER Logitech Far East Ltd.

SAMPLE NAME Mouse

MODEL NUMBER M-UE SONY2

SERIAL NUMBER Not applicable

POWER SUPPLY DC5V(from PC)

I/O PORT Connect to PC USB port through 55cm shielded cable

Engineering Sample ☒ Product Sample ☐ Mass Product Sample ☐ .



## 1.3 DESCRIPTION OF PERIPHERALS

### 1 PC

MODEL NUMBER	KAYAK XU 6/300
SERIAL NUMBER	SG82100177
MANUFACTURER	HP CORP.
F.C.C. ID	B94VECTRAXU6WT
POWER CORD	Unshielded , Detachable , 1.8m

### 2 MONITOR

PRODUCT NUMBER	6546-00N
SERIAL NUMBER	23-M6334
MANUFACTURER	IBM CORP.
F.C.C. ID	A3KM065
POWER CORD	Unshielded , Detachable , 1.8m
SIGNAL CORD	Shielded , Undetachable , 1.8m

### 3 KEYBOARD

PRODUCT NUMBER	SK-2501K
SERIAL NUMBER	M980167956
MANUFACTURER	HP CORP.
F.C.C. ID	GYUR38SK
SIGNAL CABLE	Shielded , Undetachable , 1.8m
POWER SOURCE	5VDC (from PC)

### 4 PRINTER


MODEL NUMBER	5152-002
SERIAL NUMBER	0754365
MANUFACTURER	IBM CORP.
FCC ID	BKM9A85152002
POWER CORD	Shielded , Detachable , 1.5m
DATA CABLE	Shielded , Detachable , 1.2m

### 5 MODEM

MODEL NUMBER	5240AM
SERIAL NUMBER	A0095240K270
MANUFACTURER	Hayes CORP
F.C.C. ID	BFJ5201AM
POWER CORD	Unshielded , Detachable , 1.8m ( 9VAC from adapter)
SIGNAL CABLE	Shielded , Detachable , 2m



## 1.4 EUT & PERIPHERALS SETUP DIAGRAM

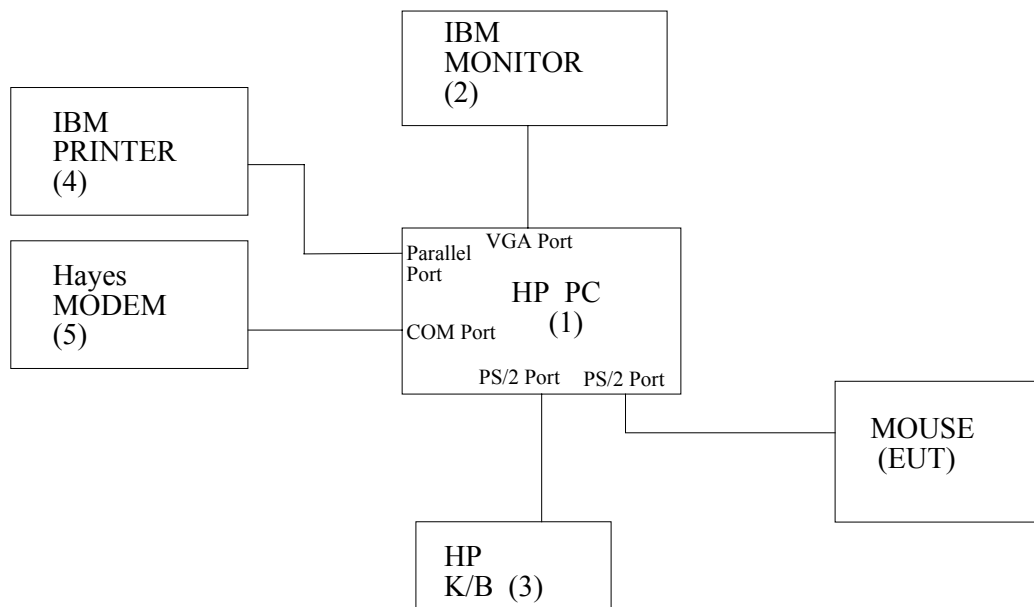

The indicated numbers (1)(2)-----please refer to item 1.3



## **1.5 EUT OPERATING CONDITION**

1. Setup whole system for test and power them on.
2. Get into window 98 operating system.
3. Run "EMITEST.EXE" program and start testing.
4. Scrolling "H" pattern will be displayed on Monitor, printer will print out "H" character continuous, MODEM will exercise sending and receiving operation PC will check keyboard and mouse function periodically.

## **1.6 DESCRIPTION OF TEST SITE**

SITE DESCRIPTION	FCC certificate NO. :31040/PRV TUV certificate NO. :I9664582-9911 Lloyd's certificate NO. :LA003 BSMI certificate NO. :SL2-IN-E-0002 NVLAP Lab code 200118-0 CNLA certificate NO. :CNLA-ZL97018 VCCI certificate NO. :R-706, C-650
NAME OF SITE	Electronics Research & Service Organization Industrial Technology Research Institute
SITE LOCATION	K500, 195-4 , sec. 4, Chung Hsing Rd., Chu-Tung Chen. Hsin-Chu, Taiwan 31015 R.O.C.




## 2. CONDUCTED EMISSION TEST

### 2.1 TEST EQUIPMENTS

The following test equipments are used during the conducted powerline tests

MANUFACTURER OR TYPE	MODEL No	SERIAL NO.	DATE OF CALIBRATION	CALIBRATION PERIOD	REMARK
SPECTRUM ANALYZER & DISPLAY	HP 8568A	2235A02320	MAR. 18, 1999	1 Year	PRETEST
QUASI-PEAK ADAPTER	HP 85650 A	2341A00672	MAR. 18, 1999	1 Year	PRETEST
ISOLATION TRANSFORMER	SOLAR 7032-1	N/A	N/A	N/A	FINAL
L.I.S.N.	EMCO 3850/2	9311-1025 9401-1028	MAR. 25, 1999 For Characteristic impedance	1 Year	FINAL
			JUN. 11, 1999 For Insertion loss		
TEST RECEIVER	R/S ESH3	8720791118	JUL. 29, 1999	1 Year	FINAL
SHIELDED ROOM	KEENE 5983	NO.1	N/A	N/A	FINAL
PULSE LIMIT	R/S EHS3Z2	357.8810.52	JUL. 22, 1999	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	JUL. 05, 1999	1 Year	FINAL
50Ω TERMINATOR	-----	-----	JUL. 14, 1999	1 Year	FINAL

### 2.2 TEST SETUP

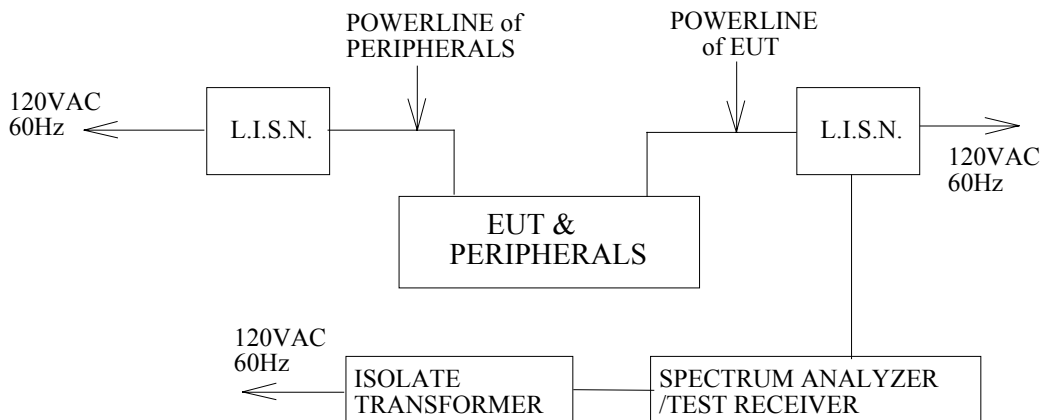



## 2.3 CONDUCTED POWER LINE EMISSION LIMIT

FREQUENCY  (MHz)	MAXIMUM RF LINE VOLTAGE (dB V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

## 2.4 TEST PROCEDURE

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room. the EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

## 2.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is  $\pm 1.36\text{dB}$ .





## 2.6 CONDUCTED RF VOLTAGE MEASUREMENT

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature 24Humidity 48% RH

FREQUENCY (MHz)	READING(dB V)				LIMITS	
	ONE END & GRD'D		THE OTHER END & GRD'D		(dB V)	
	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.
0.150					66.00	56.00
0.162	48.30		47.50		65.38	55.38
0.250	38.40		37.20		61.75	51.75
0.498	34.30		32.50		56.03	46.03
0.800	34.00		31.50		56.00	46.00
2.924	32.40		30.60		56.00	46.00
7.482	35.60				60.00	50.00
8.635			36.70		60.00	50.00
14.318			37.40		60.00	50.00
17.470	40.50				60.00	50.00
30.000					60.00	50.00

REMARKS 1. Undetectable or the Q.P.values is lower than the limits of Ave



## 2.7 PHOTOS OF CONDUCTION TEST



Comp. Logitech Far East Ltd.  
Model M-UE SONY2



### 3. RADIATED EMISSION TEST


#### 3.1 TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.

MANUFACTURER OR TYPE	MODEL NO	SERIAL NO	DATE OF CALIBRATION	CALIBRATION PERIOD	REMARK
CHASE BI-LOG ANTENNA	CBL6112B	2562	MAY.01, 1999	1 Year	FINAL
R/S TEST RECEIVER	ESMI	842088/005 841978/008	JUL.29, 1999	1 Year	FINAL
OPEN SITE	-----	No.1	JUN. 29, 1999	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	015	JUL. 06, 1999	1 Year	FINAL

#### 3.2 TEST SETUP

The diagram below shows the test setup which is utilized to make these measurements.

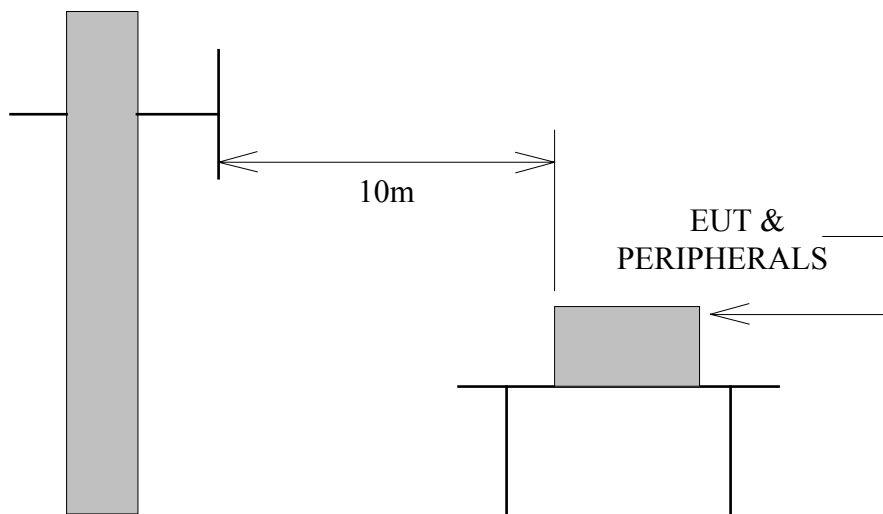

Antenna Elevation Variable



### 3.3 RADIATION LIMIT

All emanation from a class B computing device or system , including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below

FREQUENCY (MHz)	DISTANCE (METERS)	FIELD STRENGTHS(dB V/m)	
		CLASS A	CLASS B
30 230	10	40	30
230 1000	10	47	37

Note (1)The tighter limit shall apply at the edge between two frequency bands.

(2)Distance refers to the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

### 3.4 TEST PROCEDURE

The devices under test were placed on a ratable table top 0.8 meter above ground. The table was rotated 360 degrees to determine the position of the highest radiation. EUT is set 10 meters from the interference receiving antenna which is mounted on the top of a variable height mast. The antenna height is varied between one meter and four meters above ground to find the maximum value of the field strength Both horizontal polarization and vertical polarization of the antenna are set to make the measurement. The bandwidth setting on the E.M.I. meter (R/S TEST RECEIVER ESMI) is 120 KHz.

The levels are quasi peak value readings. The frequency spectrum from 30MHz to 1000MHz was investigated.

### 3.5 UNCERTAINTY OF RADIATED EMISSION

The uncertainty of radiated emission is  $\pm 2.72$ dB.



### 3.6 RADIATED RF NOISE MEASUREMENT

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature 18

Humidity 80 RH


FREQ- UENCY  (MHz)	ANTENNA FACTOR  (dB/m)	CABLE LOSS  (dB)	METER READING AT10m(dBµV)		LIMITS  (dBµV/m)	EMISSION LEVEL AT10m(dBµV/m)	
			HORIZON- TAL	VERTICAL		HORIZON- TAL	VERTICAL
30.00	18.02	1.06	i <sup>-</sup>	i <sup>-</sup>	30.00	i <sup>-</sup>	i <sup>-</sup>
71.43	6.84	1.63	11.48	12.88	30.00	19.95	21.35
208.13	10.07	2.69	12.60	9.24	30.00	25.36	22.00
208.39	10.09	2.69	8.68	4.34	30.00	21.46	17.12
214.34	10.43	2.73	4.62	1.54	30.00	17.78	14.70
220.30	10.78	2.77	12.04	8.42	30.00	25.59	21.97
244.12	12.17	2.93	9.80	7.56	37.00	24.90	22.66
250.07	12.51	2.97	6.58	6.30	37.00	22.06	21.78
256.02	12.61	3.01	7.00	4.62	37.00	22.62	20.24
733.33	19.11	5.57	3.36	2.38	37.00	28.04	27.06
750.00	19.25	5.65	2.10	0.70	37.00	27.00	25.60
866.66	20.14	6.23	2.10	0.56	37.00	28.47	26.93
1000.00	21.18	6.80	i <sup>-</sup>	i <sup>-</sup>	37.00	i <sup>-</sup>	i <sup>-</sup>

REMARKS 1. Undetectable

2. Emission level (dB  $\mu$ V/m) = Antenna Factor (dB/m) + Cable loss (dB)  
+ Meter Reading (dB  $\mu$ V).




### 3.7 PHOTOS OF OPEN SITE

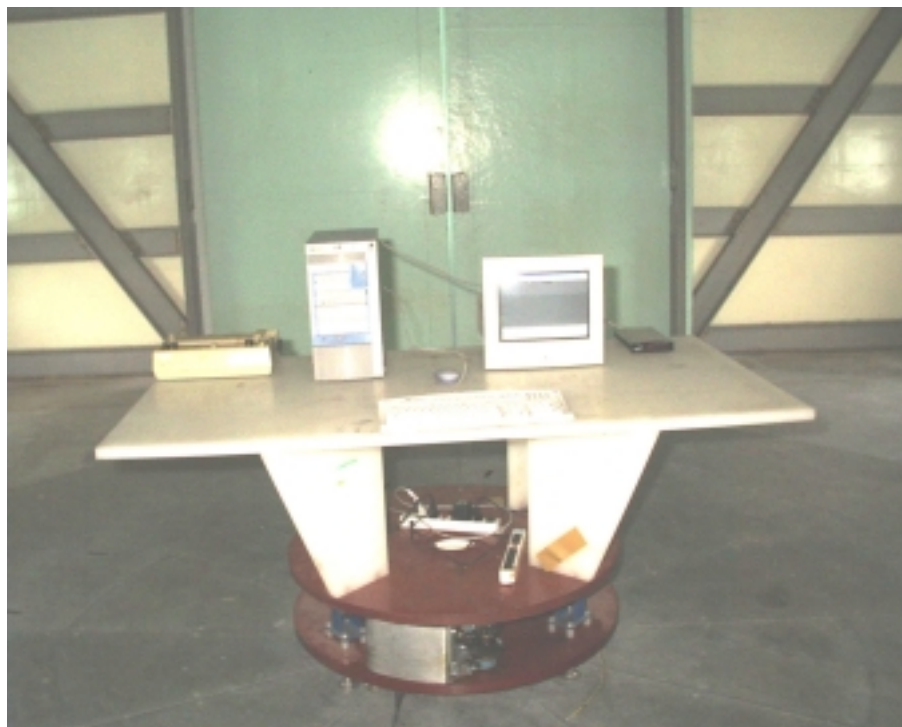

Comp. Logitech Far East Ltd.  
Model M-UE SONY2



### 3.7 PHOTOS OF OPEN SITE

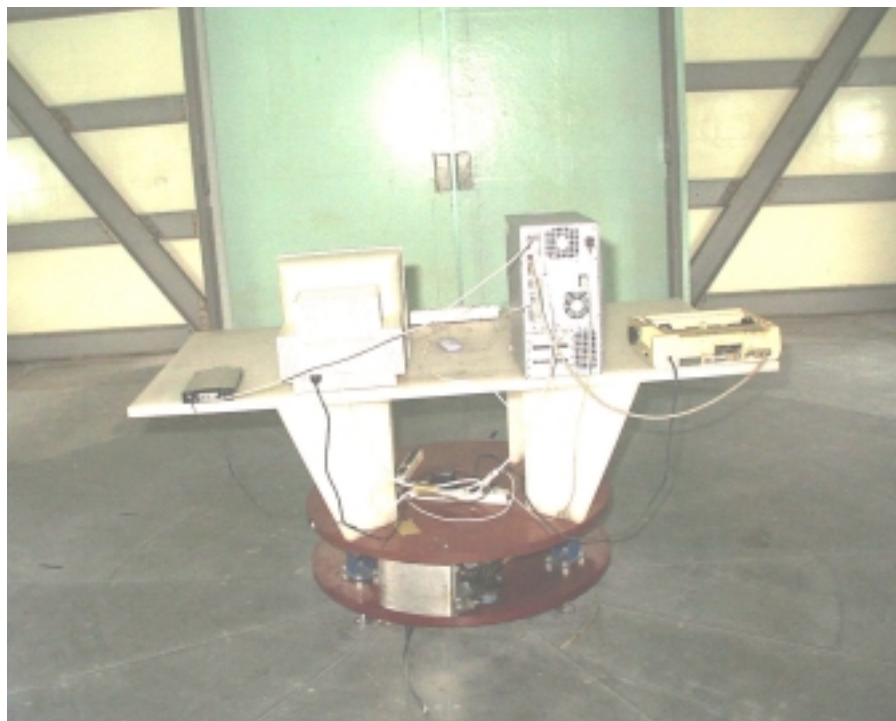

Comp. Logitech Far East Ltd.  
Model M-UE SONY2