


Part Number: 37440230

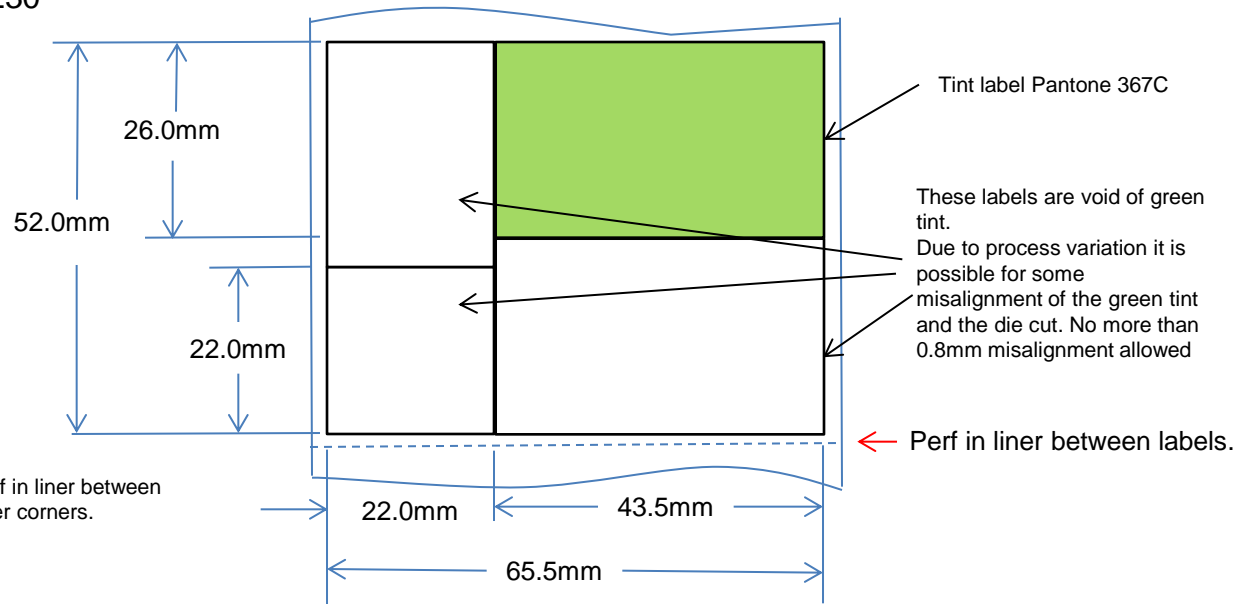

Note: 3.2 mm between labels. Perf in liner between labels. 0.4 mm radius on all 4 outer corners.

NOTES:

- 1) Labels must be suitable for use in a thermal printer. Reference material: Fasson 12906. (Contact user plants for printer models)
- 2) Blank face stock, adhesive, liner, and wax resin ribbon combination to meet the following requirements. These labels may be applied to Polystyrene, PVC, sheet metal, and corrugated cardboard.
 - A.) Peel test: 1 lb/in applied @ 180 degree angle.
 - B.) This label must pass environmental durability test specification # 1533282% for permanent labels.
- 3) Labels to be supplied on rolls with a 3 inch I.D. Core and not to exceed 8 inch O.D.
- 4) Die cut labels to have the trim removed.
- 5) Samples to be supplied to Technicolor Product Development Department for Approval. Samples are to be supplied from the first production run.
- 6) All parts on this document/drawing must comply with the requirements and procedures specified in the Technicolor green (RoHS) supplier handbook 36033050.
- 7) This label must comply with the test for permanence described in "Marking and Instructions" UI6500.

REVISIONS

Created new drawing

K.C. 08/03/2015

1

Label Specification, 52mm X 65.5mm Blank

Technicolor

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TECHNICOLOR AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION.

Sheet: 1 of 1
K. Cesnik

37440230