



SAR TEST REPORT

No. I15Z40879-SEM01

For

TCL Communication Ltd.

CDMA+LTE mobile phone for Sprint

Model Name: 5017B

With

Hardware Version: VE

Software Version: 5017BA0B

FCC ID: 2ACCJB011

Issued Date: 2015-06-11



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT
No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191
Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504
Email:cttl_terminals@catr.cn, website:www.chinattl.com



REPORT HISTORY

Report Number	Revision	Issue Date	Description
I15Z40879-SEM01	Rev.0	2015-05-26	Initial creation of test report
I15Z40879-SEM01	Rev.1	2015-05-29	Update on table14.26 and 14.27
I15Z40879-SEM01	Rev.2	2015-05-29	Update the results of Simultaneous for BT
I15Z40879-SEM01	Rev.3	2015-06-11	<ol style="list-style-type: none">1. Add the power results of more channels for LTE B41 in section 11.3 on page 312. Retest the LTE band41 with correct duty factor



TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT.....	5
1.3 PROJECT DATA	5
1.4 SIGNATURE.....	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION	8
3.1 APPLICANT INFORMATION	8
3.2 MANUFACTURER INFORMATION	8
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1 ABOUT EUT	9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	9
5 TEST METHODOLOGY	10
5.1 APPLICABLE LIMIT REGULATIONS	10
5.2 APPLICABLE MEASUREMENT STANDARDS.....	10
6 SPECIFIC ABSORPTION RATE (SAR).....	11
6.1 INTRODUCTION.....	11
6.2 SAR DEFINITION.....	11
7 TISSUE SIMULATING LIQUIDS	12
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	12
7.2 DIELECTRIC PERFORMANCE	12
8 SYSTEM VERIFICATION	17
8.1 SYSTEM SETUP.....	17
8.2 SYSTEM VERIFICATION.....	18
9 MEASUREMENT PROCEDURES	19
9.1 TESTS TO BE PERFORMED	19
9.2 GENERAL MEASUREMENT PROCEDURE.....	20
9.3 SAR MEASUREMENT FOR LTE.....	21
9.4 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR	22
9.5 POWER DRIFT.....	22
10 AREA SCAN BASED 1-G SAR.....	23
10.1 REQUIREMENT OF KDB.....	23
10.2 FAST SAR ALGORITHMS	23
11 CONDUCTED OUTPUT POWER.....	24



11.1 MANUFACTURING TOLERANCE	24
11.2 CDMA MEASUREMENT RESULT	25
11.3 LTE MEASUREMENT RESULT	26
11.4 WI-FI AND BT MEASUREMENT RESULT	35
12 SIMULTANEOUS TX SAR CONSIDERATIONS.....	36
12.1 INTRODUCTION.....	36
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES	36
12.3 SAR MEASUREMENT POSITIONS	37
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	37
13 EVALUATION OF SIMULTANEOUS.....	38
14 SAR TEST RESULT	40
14.1 SAR RESULTS FOR FAST SAR.....	40
14.2 SAR RESULTS FOR STANDARD PROCEDURE.....	46
14.3 WLAN EVALUATION	49
15 SAR MEASUREMENT VARIABILITY.....	51
16 MEASUREMENT UNCERTAINTY	53
17 MAIN TEST INSTRUMENTS.....	57
ANNEX A GRAPH RESULTS.....	58
ANNEX B SYSTEM VERIFICATION RESULTS	86
ANNEX C SAR MEASUREMENT SETUP	95
ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	101
ANNEX E EQUIVALENT MEDIA RECIPES.....	104
ANNEX F SYSTEM VALIDATION	105
ANNEX G PROBE CALIBRATION CERTIFICATE.....	106
ANNEX H DIPOLE CALIBRATION CERTIFICATE	117
ANNEX I ACCREDITATION CERTIFICATE.....	149

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

1.2 Testing Environment

Temperature:	18°C~25 °C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg


1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	May 8, 2015
Testing End Date:	June 9, 2015

1.4 Signature



Lin Xiaojun
(Prepared this test report)

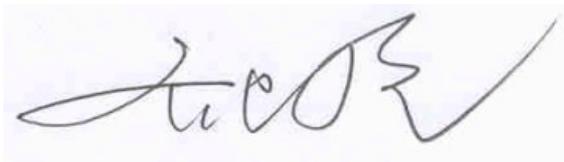

Qi Dianyuan
(Reviewed this test report)



Xiao Li
Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

The maximum results found during testing for TCL Communication Ltd. CDMA+LTE mobile phone for Sprint 5017B are as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g (W/Kg)	Equipment Class
Head (Separation Distance 0mm)	CDMA BC0	0.79	PCE
	CDMA BC1	0.70	
	CDMA BC10	0.81	
	LTE Band 25	0.46	
	LTE Band 26	0.73	
	LTE Band 41	0.92	
	WLAN 2.4 GHz	0.93	DTS
Body-worn (Separation Distance 10mm)	CDMA BC0	1.19	PCE
	CDMA BC1	1.46	
	CDMA BC10	1.24	
	LTE Band 25	1.29	
	LTE Band 26	0.93	
	LTE Band 41	1.44	
	WLAN 2.4 GHz	0.28	DTS

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of **(Table 2.1)**, and the values are: **1.46 W/kg (1g)**.

Table 2.2: The sum of reported SAR values for B41 and WLAN

	Position	B41	WLAN	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.92	0.36	1.28
	Right hand, Touch cheek	0.53	0.93	1.46
Highest reported SAR value for Body	Front	1.19	0.22	1.41
	Rear	1.02	0.28	1.30
	Bottom	1.44	/	1.44

Table 2.3: The sum of reported SAR values for main antenna and WLAN

	Band	Position	Main antenna	WLAN	Sum	Distance (mm)	Ratio
Maximum reported SAR value for Head	CDMA BC1	Right hand, Touch cheek	0.70	0.93	1.63	85.1	0.02
	CDMA BC10	Right hand, Touch cheek	0.81		1.74	78.9	0.03
	LTE Band 26	Right hand, Touch cheek	0.73		1.66	81.6	0.03
Maximum reported SAR value for Body	CDMA BC10	Rear	1.24	0.28	1.52	/	/

According to the KDB 447498 D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The ratio is determined by $(SAR_1 + SAR_2)^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

Table 2.4: The sum of reported SAR values for other antenna and Bluetooth

	Position	other antenna	BT*	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.92	0.52	1.44
Highest reported SAR value for Body	Rear	1.24	0.26	1.50
	Bottom	1.46	/	1.46

BT* - Estimated SAR for Bluetooth (see the table 13.4)

According to the above tables, the highest sum of reported SAR values is **1.74 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.



3 Client Information

3.1 Applicant Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Zhizhou Gong
Email:	zhizhou.gong@tcl.com
Telephone:	+86 21 51798260
Fax:	+86 21 61460602

3.2 Manufacturer Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Zhizhou Gong
Email:	zhizhou.gong@tcl.com
Telephone:	+86 21 51798260
Fax:	+86 21 61460602

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	CDMA+LTE mobile phone for Sprint
Model Name:	5017B
Operating mode(s):	CDMA BC0/1/10, LTE Band 25/26/41, BT, Wi-Fi
Tested Tx Frequency:	824.7 – 848.31 MHz (CDMA BC0)
	1851.25 – 1908.75 MHz (CDMA BC1)
	817.9 – 823.1 MHz (CDMA BC10)
	1850.7 – 1914.3 MHz (LTE Band25)
	814.7 – 848.3 MHz (LTE Band26)
	2498.5 – 2687.5 MHz (LTE Band41)
	2412 – 2462 MHz (Wi-Fi 2.4G)
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	089771315800065895/35820406010167	VE	5017BA0B
EUT2	089771315800065940/35820406010194	VE	5017BA0B

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1 and conducted power with the EUT 2.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	TLi020F2	/	SCUD

*AE ID: is used to identify the test sample in the lab internally.



5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

KDB447498 D01: General RF Exposure Guidance v05r02: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r02: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03: SAR Measurement Procedures for 3G Devices

KDB941225 D05 SAR for LTE Devices v02r03: SAR Evaluation Considerations for LTE Devices

KDB941225 D06 Hotspot Mode SAR v02: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227 D01 802.11 Wi-Fi SAR v02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02 RF Exposure Reporting v01r01: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency (MHz)	Liquid Type	Conductivity (σ)	$\pm 5\%$ Range	Permittivity (ϵ)	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3
2600	Head	1.96	1.86~2.06	39.01	37.06~40.96
2600	Body	2.16	2.05~2.27	52.5	49.9~55.1

7.2 Dielectric Performance


Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2015-05-08	Head	835 MHz	42.84	3.23	0.932	3.56
	Body	835 MHz	53.86	-2.43	0.93	-4.12
2015-05-09	Head	1900 MHz	38.45	-3.87	1.446	3.29
	Body	1900 MHz	51.92	-2.59	1.568	3.16
2015-05-18	Head	2450 MHz	38.23	-2.47	1.815	0.83
	Body	2450 MHz	52.63	-0.13	1.949	-0.05
2015-06-09	Head	2600 MHz	38.43	-1.49	1.903	-2.91
	Body	2600 MHz	51.01	-2.84	2.134	-1.20


Note: The liquid temperature is 22.0°C

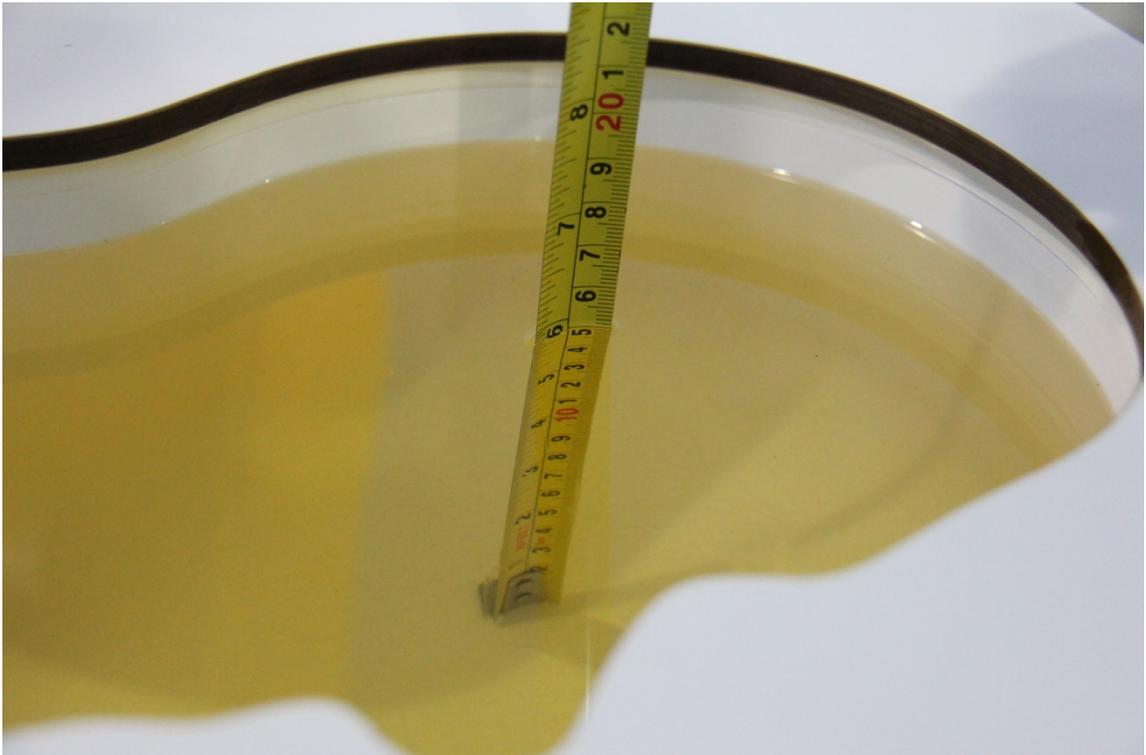


Picture 7-1: Liquid depth in the Head Phantom (835 MHz)

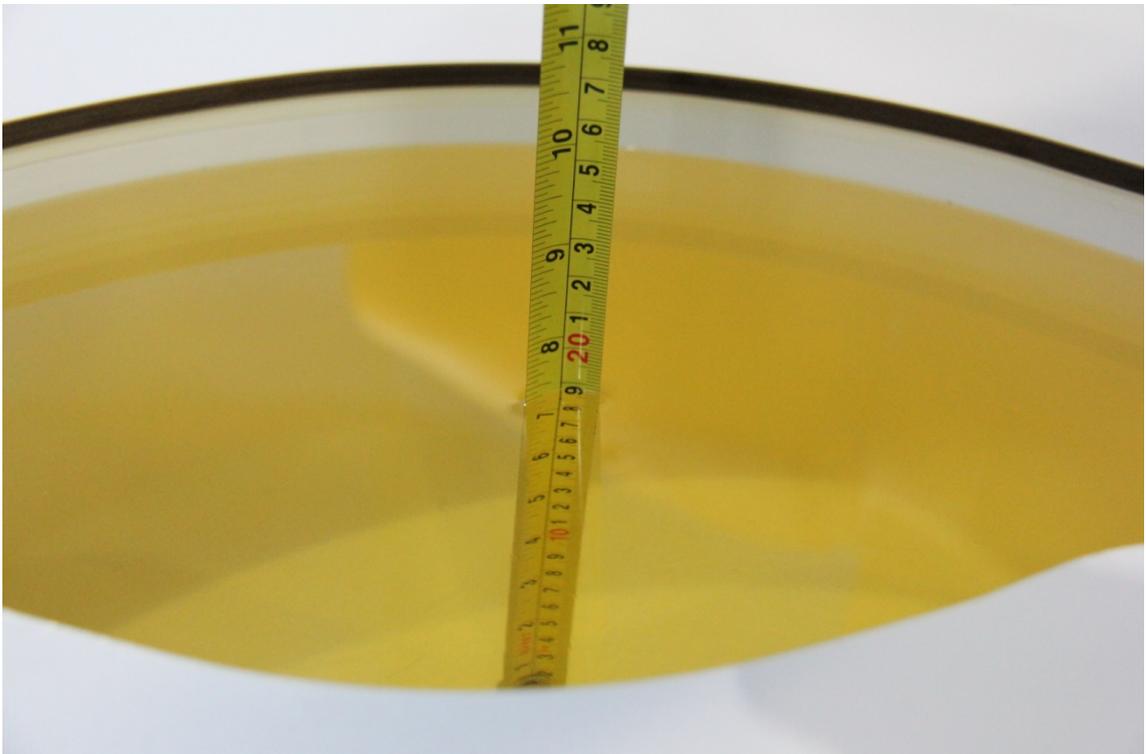


Picture 7-2: Liquid depth in the Flat Phantom (835 MHz)

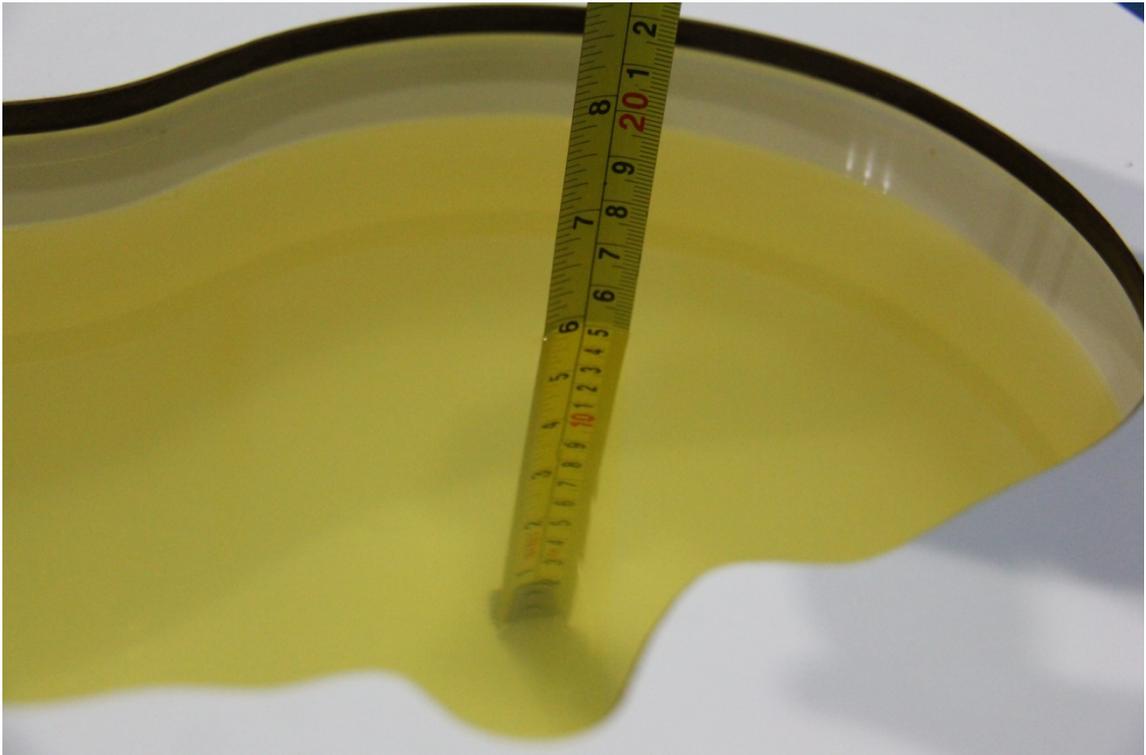


Picture 7-3: Liquid depth in the Head Phantom (1900 MHz)

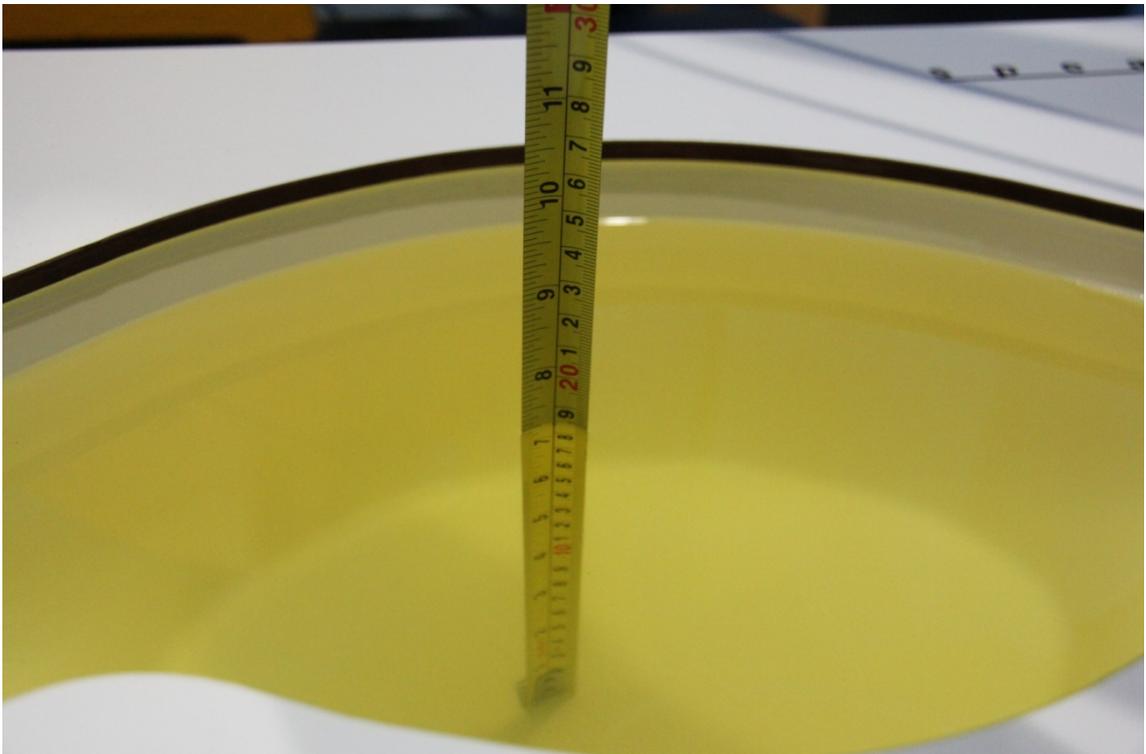

Picture 7-4 Liquid depth in the Flat Phantom (1900MHz)

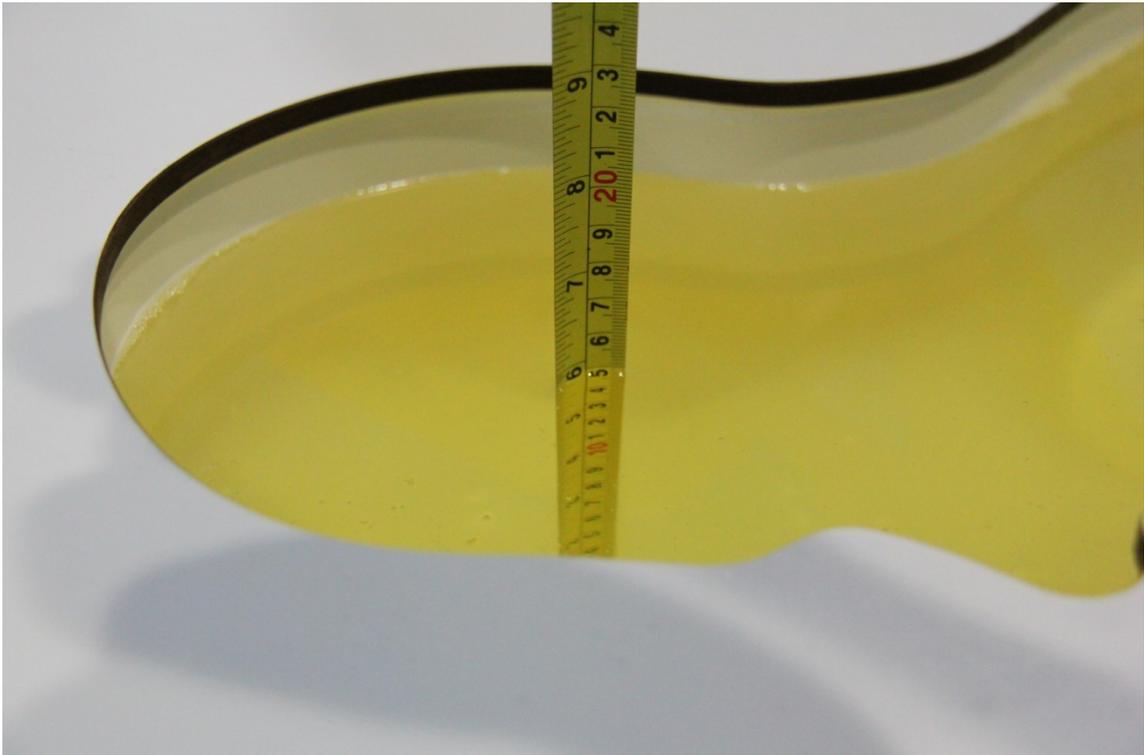


Picture 7-5 Liquid depth in the Head Phantom (2450MHz)

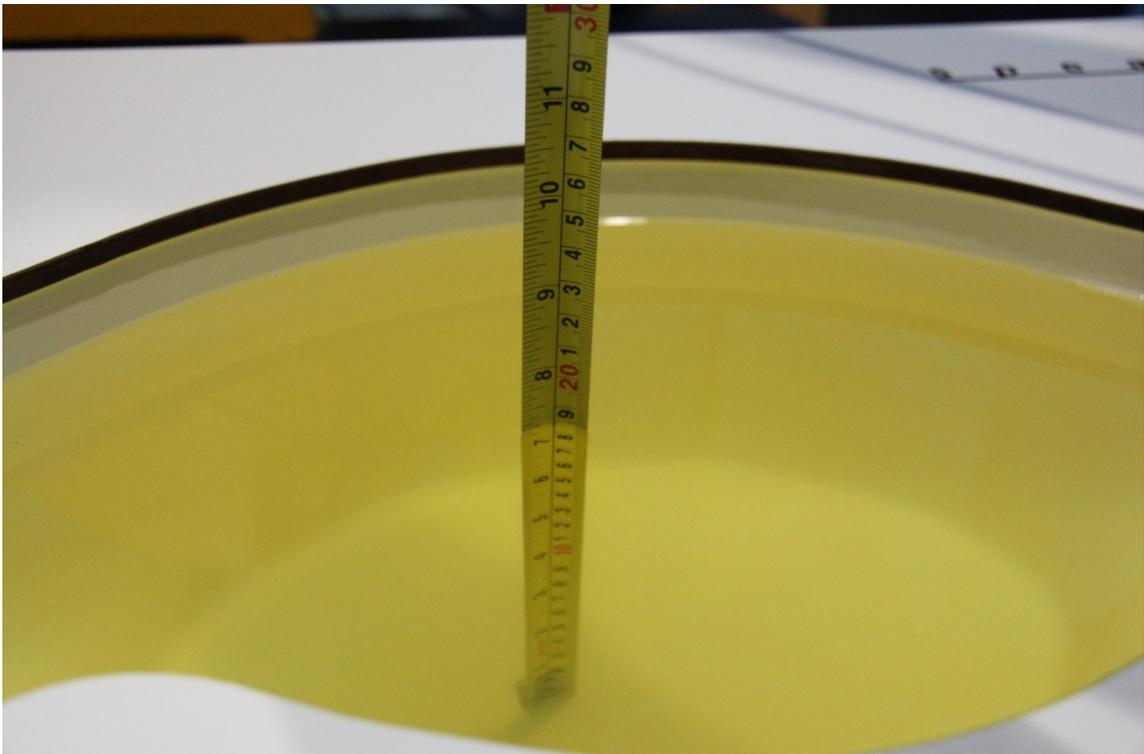

Picture 7-6 Liquid depth in the Flat Phantom (2450MHz)



Picture 7-7 Liquid depth in the Head Phantom (2600 MHz Head)

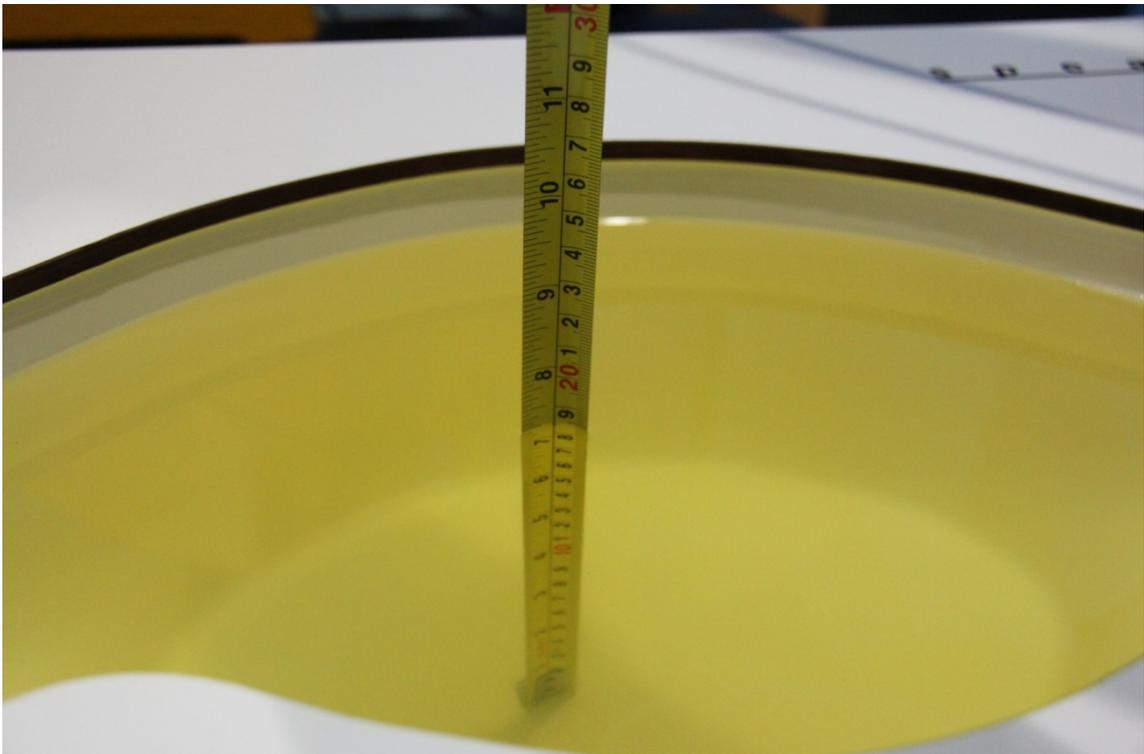


Picture 7-8 Liquid depth in the Flat Phantom (2600MHz)


8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

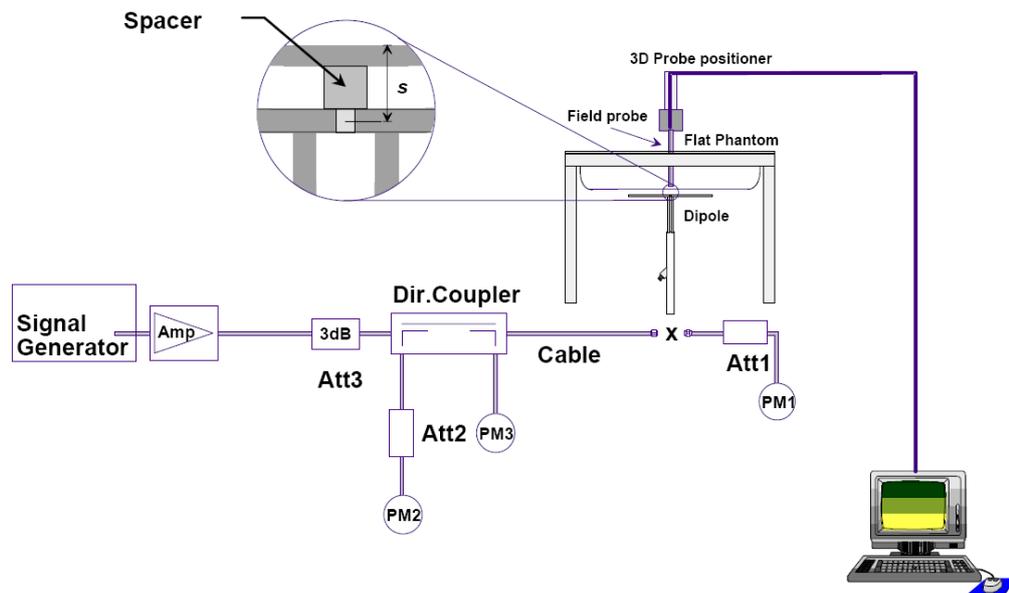

Picture 8.1 System Setup for System Evaluation

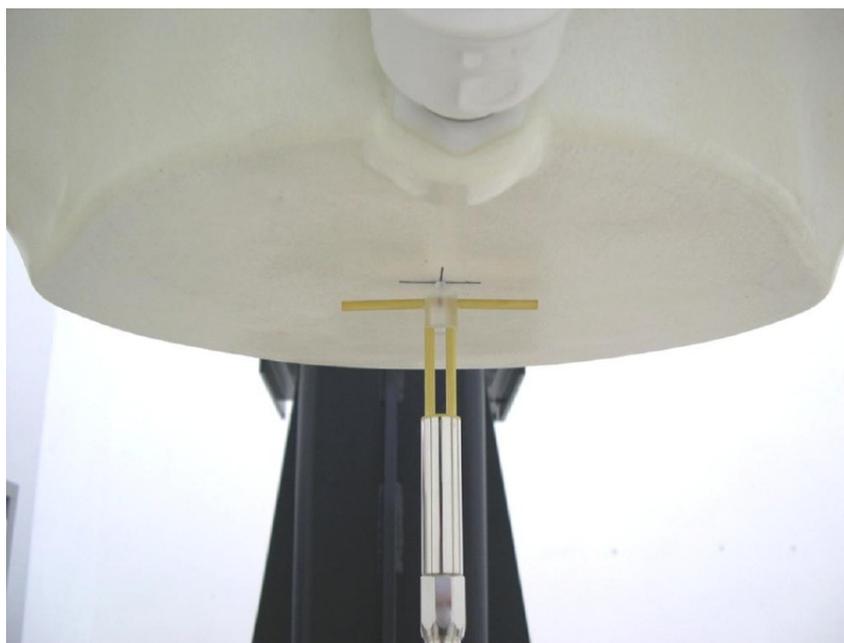

Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2015-05-08	835 MHz	6.17	9.43	6.20	9.56	0.49%	1.38%
2015-05-09	1900 MHz	21.1	40.6	20.88	39.60	-1.04%	-2.46%
2015-05-18	2450 MHz	24.7	53.2	24.76	52.80	0.24%	-0.75%
2015-06-09	2600 MHz	25.9	57.8	25.12	57.20	-3.01%	-1.04%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2015-05-08	835 MHz	6.33	9.55	6.32	9.76	-0.16%	2.20%
2015-05-09	1900 MHz	21.4	40.4	22.04	41.60	2.99%	2.97%
2015-05-18	2450 MHz	23.9	51.3	23.40	49.60	-2.09%	-3.31%
2015-06-09	2600 MHz	25.4	57.2	25.88	58.00	1.89%	1.40%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

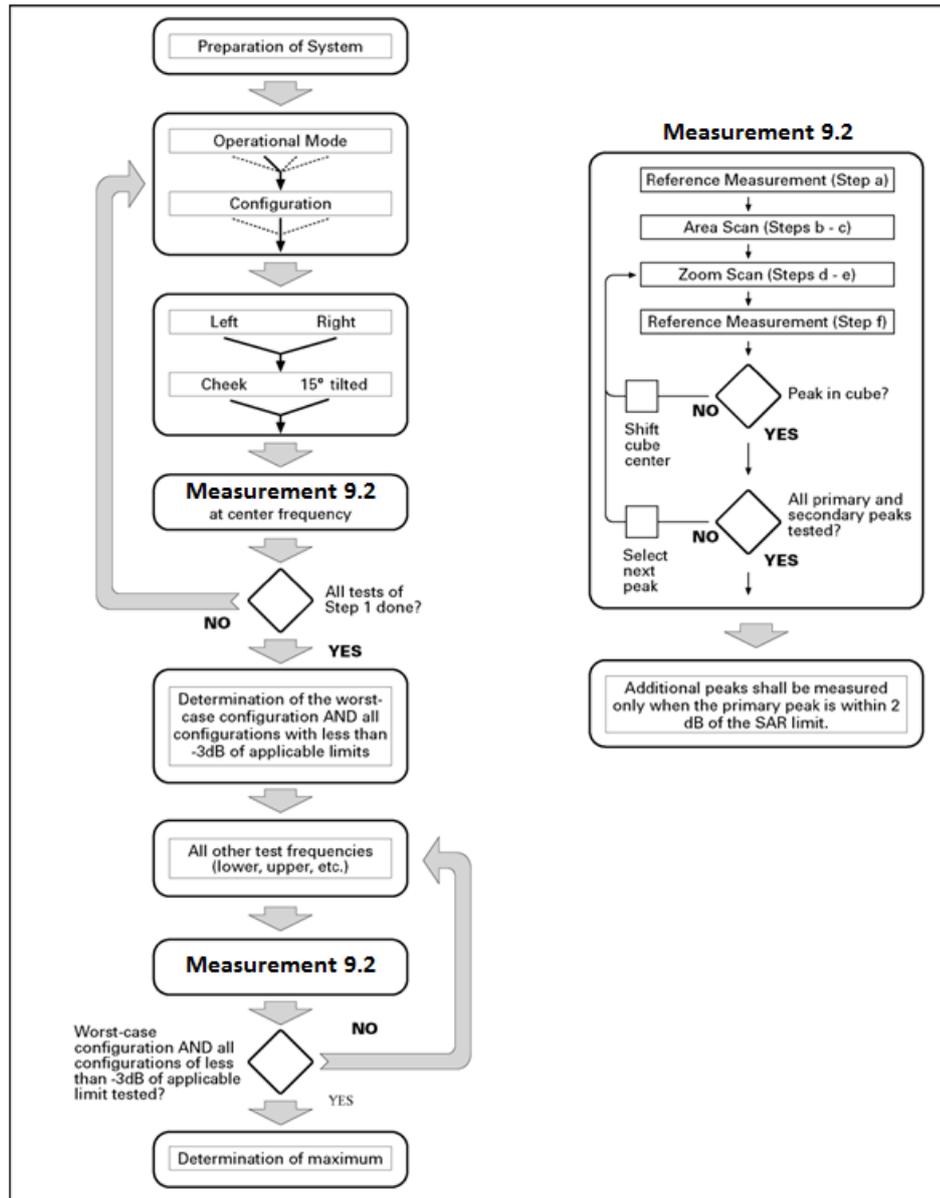

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results

when all the measurement parameters in the following table are not satisfied.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \delta \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>I-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

9.3 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Schwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the

remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.4 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.1 to Table 14.29 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

11.1 Manufacturing tolerance

Table 11.1: CDMA

CDMA BC0			
Channel	Channel 777	Channel 384	Channel 1013
Target (dBm)	23.5	23.5	23.5
Tune-up (dBm)	24.5	24.5	24.5
CDMA BC1			
Channel	Channel 1175	Channel 600	Channel 25
Target (dBm)	23.5	23.5	23.5
Tune-up (dBm)	24.5	24.5	24.5
CDMA BC10			
Channel	Channel 684	Channel 580	Channel 476
Target (dBm)	23.5	23.5	23.5
Tune-up (dBm)	24.5	24.5	24.5

Table 11.2: LTE

Mode	Target (dBm)	Tune-up (dBm)
LTE Band 25	23	24
LTE Band 26	23	24
LTE Band 41	23	24

LTE MPR will follow up 3GPP setting as below:

Modulation	Channel bandwidth / Transmission bandwidth (NRB)						MPR (dB)
	1.4MHz	3.0MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

Table 11.3: Bluetooth

Mode	Channel	Target (dBm)	Tune-up (dBm)
Bluetooth	0	9	10.5
	39	9.5	11
	78	9	10.5

Table 11.4: WiFi

Mode	Target (dBm)	Tune-up (dBm)
802.11 b	18	19
802.11 g	16.5	17.5
802.11 n-20M, MCS0	16.5	17.5
802.11 n-20M, MCS1~MCS7	14	15

11.2 CDMA Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.5: The conducted power measurement results for CDMA

CDMA BC0	Conducted Power (dBm)		
	Channel 777 (848.31MHz)	Channel 384 (836.52MHz)	Channel 1013 (824.7MHz)
SO55/RC3	23.92	23.88	23.99
SO55/RC1	23.94	23.95	23.95
SO32/RC3(FCH only)	23.91	23.85	23.98
SO32/RC3(FCH+SCH _n)	23.88	23,84	23.89
EVDO Rev.0	23.60	23.55	23.62
EVDO Rev.A	23.50	23.54	23.49
CDMA BC1	Conducted Power (dBm)		
	Channel 1175 (1908.75MHz)	Channel 600 (1880MHz)	Channel 25 (1851.25MHz)
SO55/RC3	23.45	23.46	23.47
SO55/RC1	23.50	23.54	23.55
SO32/RC3(FCH only)	23.47	23.48	23.50
SO32/RC3(FCH+SCH _n)	23.48	23.49	23.51
EVDO Rev.0	23.52	23.24	23.03
EVDO Rev.A	23.67	23.18	22.99
CDMA BC10	Conducted Power (dBm)		
	Channel 684 (823.1MHz)	Channel 580 (820.5MHz)	Channel 476 (817.9MHz)
SO55/RC3	23.90	23.92	23.95
SO55/RC1	23.93	23.98	23.99
SO32/RC3(FCH only)	23.91	23.93	23.96
SO32/RC3(FCH+SCH _n)	23.89	23.88	23.90
EVDO Rev.0	23.78	23.85	24.00
EVDO Rev.A	23.91	23.93	23.99

11.3 LTE Measurement result

Table 11.6: The conducted Power for LTE

Band 25							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
	RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	1914.3	24	22.74	0	22.04	1
		1882.5	24	23.54	0	22.64	1
		1850.7	24	23.31	0	22.52	1
	1RB Middle (3)	1914.3	24	22.80	0	22.16	1
		1882.5	24	23.52	0	22.69	1
		1850.7	24	23.44	0	22.61	1
	1RB Low (0)	1914.3	24	22.90	0	22.21	1
		1882.5	24	23.52	0	22.60	1
		1850.7	24	23.38	0	22.59	1
	3RB High (3)	1914.3	24	22.83	0	22.11	1
		1882.5	24	23.54	0	22.47	1
		1850.7	24	23.42	0	22.38	1
	3RB Middle (1)	1914.3	24	22.90	0	22.13	1
		1882.5	24	23.47	0	22.50	1
		1850.7	24	23.49	0	22.45	1
	3RB Low (0)	1914.3	24	22.89	0	22.06	1
		1882.5	24	23.40	0	22.39	1
		1850.7	24	23.48	0	22.51	1
	6RB (0)	1914.3	24	22.23	1	21.41	2
		1882.5	24	22.51	1	21.57	2
		1850.7	24	22.45	1	21.31	2
3 MHz	1RB High (14)	1913.5	24	22.57	0	22.06	1
		1882.5	24	23.48	0	22.50	1
		1851.5	24	23.33	0	22.46	1
	1RB Middle (7)	1913.5	24	22.76	0	22.22	1
		1882.5	24	23.37	0	22.40	1
		1851.5	24	23.31	0	22.45	1
	1RB Low (0)	1913.5	24	23.22	0	22.45	1
		1882.5	24	23.48	0	22.67	1
		1851.5	24	23.36	0	22.58	1
	8RB High (7)	1913.5	24	22.33	1	21.43	2
		1882.5	24	22.52	1	21.65	2
		1851.5	24	22.36	1	21.40	2
	8RB Middle (4)	1913.5	24	22.43	1	21.44	2
		1882.5	24	22.43	1	21.49	2
		1851.5	24	22.40	1	21.46	2



	8RB Low (0)	1913.5	24	22.45	1	21.50	2	
		1882.5	24	22.50	1	21.41	2	
		1851.5	24	22.36	1	21.40	2	
	15RB (0)	1913.5	24	22.40	1	21.43	2	
		1882.5	24	22.48	1	21.57	2	
		1851.5	24	22.37	1	21.41	2	
5 MHz	1RB High (24)	1912.5	24	23.08	0	22.48	1	
		1882.5	24	23.55	0	22.42	1	
		1852.5	24	23.40	0	22.59	1	
	1RB Middle (12)	1912.5	24	23.36	0	22.57	1	
		1882.5	24	23.46	0	22.74	1	
		1852.5	24	23.44	0	22.69	1	
	1RB Low (0)	1912.5	24	23.45	0	22.61	1	
		1882.5	24	23.54	0	22.72	1	
		1852.5	24	23.48	0	22.60	1	
	12RB High (13)	1912.5	24	22.52	1	21.37	2	
		1882.5	24	22.58	1	21.60	2	
		1852.5	24	22.34	1	21.52	2	
	12RB Middle (6)	1912.5	24	22.41	1	21.48	2	
		1882.5	24	22.52	1	21.57	2	
		1852.5	24	22.39	1	21.61	2	
	12RB Low (0)	1912.5	24	22.55	1	21.35	2	
		1882.5	24	22.51	1	21.59	2	
		1852.5	24	22.43	1	21.53	2	
	25RB (0)	1912.5	24	22.54	1	21.40	2	
		1882.5	24	22.55	1	21.50	2	
		1852.5	24	22.47	1	21.33	2	
	10 MHz	1RB High (49)	1910	24	23.39	0	22.47	1
			1882.5	24	23.54	0	22.62	1
			1855	24	23.35	0	22.34	1
1RB Middle (24)		1910	24	23.55	0	22.58	1	
		1882.5	24	23.57	0	22.61	1	
		1855	24	23.50	0	22.59	1	
1RB Low (0)		1910	24	23.44	0	22.37	1	
		1882.5	24	23.61	0	22.77	1	
		1855	24	23.47	0	22.59	1	
25RB High (25)		1910	24	22.54	1	21.44	2	
		1882.5	24	22.63	1	21.50	2	
		1855	24	22.37	1	21.30	2	
25RB Middle (12)		1910	24	22.55	1	21.36	2	
		1882.5	24	22.58	1	21.64	2	
		1855	24	22.47	1	21.48	2	



	25RB Low (0)	1910	24	22.49	1	21.40	2	
		1882.5	24	22.59	1	21.60	2	
		1855	24	22.50	1	21.52	2	
	50RB (0)	1910	24	22.47	1	21.52	2	
		1882.5	24	22.60	1	21.46	2	
		1855	24	22.54	1	21.53	2	
15 MHz	1RB High (74)	1907.5	24	23.30	0	22.58	1	
		1882.5	24	23.53	0	22.54	1	
		1857.5	24	23.57	0	22.44	1	
	1RB Middle (37)	1907.5	24	23.20	0	22.61	1	
		1882.5	24	23.45	0	22.55	1	
		1857.5	24	23.35	0	22.51	1	
	1RB Low (0)	1907.5	24	23.54	0	22.49	1	
		1882.5	24	23.65	0	22.73	1	
		1857.5	24	23.56	0	22.77	1	
	36RB High (38)	1907.5	24	22.50	1	21.34	2	
		1882.5	24	22.53	1	21.54	2	
		1857.5	24	22.42	1	21.58	2	
	36RB Middle (19)	1907.5	24	22.46	1	21.30	2	
		1882.5	24	22.56	1	21.37	2	
		1857.5	24	22.37	1	21.46	2	
	36RB Low (0)	1907.5	24	22.47	1	21.27	2	
		1882.5	24	22.58	1	21.66	2	
		1857.5	24	22.48	1	21.59	2	
	75RB (0)	1907.5	24	22.45	1	21.38	2	
		1882.5	24	22.58	1	21.63	2	
		1857.5	24	22.42	1	21.41	2	
	20 MHz	1RB High (99)	1905	24	23.45	0	22.63	1
			1882.5	24	23.51	0	22.72	1
			1860	24	23.48	0	22.70	1
		1RB Middle (50)	1905	24	23.27	0	22.22	1
			1882.5	24	23.78	0	22.74	1
			1860	24	23.47	0	22.52	1
1RB Low (0)		1905	24	23.56	0	22.63	1	
		1882.5	24	23.72	0	22.73	1	
		1860	24	23.60	0	22.75	1	
50RB High (50)		1905	24	22.33	1	21.29	2	
		1882.5	24	22.50	1	21.47	2	
		1860	24	22.30	1	21.20	2	
50RB Middle (25)		1905	24	22.31	1	21.29	2	
		1882.5	24	22.48	1	21.44	2	
		1860	24	22.43	1	21.48	2	

	50RB Low (0)	1905	24	22.44	1	21.37	2	
		1882.5	24	22.58	1	21.57	2	
		1860	24	22.47	1	21.46	2	
	100RB (0)	1905	24	22.35	1	21.30	2	
		1882.5	24	22.56	1	21.55	2	
		1860	24	22.45	1	21.45	2	
Band 26								
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM		
	RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR	
1.4 MHz	1RB High (5)	848.3	24	23.59	0	22.72	1	
		831.5	24	23.53	0	22.45	1	
		814.7	24	23.59	0	22.63	1	
	1RB Middle (3)	848.3	24	23.49	0	22.60	1	
		831.5	24	23.57	0	22.70	1	
		814.7	24	23.78	0	22.73	1	
	1RB Low (0)	848.3	24	23.50	0	22.75	1	
		831.5	24	23.57	0	22.42	1	
		814.7	24	23.70	0	22.85	1	
	3RB High (3)	848.3	24	23.61	0	22.53	1	
		831.5	24	23.64	0	22.49	1	
		814.7	24	23.76	0	22.46	1	
	3RB Middle (1)	848.3	24	23.58	0	22.62	1	
		831.5	24	23.53	0	22.57	1	
		814.7	24	23.84	0	22.61	1	
	3RB Low (0)	848.3	24	23.57	0	22.59	1	
		831.5	24	23.61	0	22.50	1	
		814.7	24	23.72	0	22.68	1	
	6RB (0)	848.3	24	22.68	1	21.47	2	
		831.5	24	22.51	1	21.55	2	
		814.7	24	22.85	1	21.87	2	
	3 MHz	1RB High (14)	847.5	24	23.56	0	22.76	1
			831.5	24	23.46	0	22.62	1
			815.5	24	23.59	0	22.71	1
1RB Middle (7)		847.5	24	23.61	0	22.64	1	
		831.5	24	23.53	0	22.58	1	
		815.5	24	23.64	0	22.78	1	
1RB Low (0)		847.5	24	23.46	0	22.58	1	
		831.5	24	23.56	0	22.70	1	
		815.5	24	23.72	0	22.75	1	
8RB High (7)		847.5	24	22.72	1	21.60	2	
		831.5	24	22.58	1	21.75	2	
		815.5	24	22.73	1	21.45	2	

	8RB Middle (4)	847.5	24	22.71	1	21.56	2	
		831.5	24	22.63	1	21.71	2	
		815.5	24	22.72	1	21.43	2	
	8RB Low (0)	847.5	24	22.70	1	21.86	2	
		831.5	24	22.62	1	21.68	2	
		815.5	24	22.82	1	21.65	2	
	15RB (0)	847.5	24	22.67	1	21.70	2	
		831.5	24	22.56	1	21.58	2	
		815.5	24	22.83	1	21.85	2	
5 MHz	1RB High (24)	846.5	24	23.56	0	22.77	1	
		831.5	24	23.50	0	22.70	1	
		816.5	24	23.47	0	22.61	1	
	1RB Middle (12)	846.5	24	23.62	0	22.68	1	
		831.5	24	23.54	0	22.76	1	
		816.5	24	23.63	0	22.65	1	
	1RB Low (0)	846.5	24	23.58	0	22.57	1	
		831.5	24	23.52	0	22.56	1	
		816.5	24	23.62	0	22.63	1	
	12RB High (13)	846.5	24	22.71	1	21.64	2	
		831.5	24	22.53	1	21.50	2	
		816.5	24	22.70	1	21.41	2	
	12RB Middle (6)	846.5	24	22.70	1	21.68	2	
		831.5	24	22.61	1	21.46	2	
		816.5	24	22.73	1	21.49	2	
	12RB Low (0)	846.5	24	22.72	1	21.75	2	
		831.5	24	22.64	1	21.72	2	
		816.5	24	22.78	1	21.60	2	
	25RB (0)	846.5	24	22.69	1	21.62	2	
		831.5	24	22.60	1	21.40	2	
		816.5	24	22.71	1	21.56	2	
	10 MHz	1RB High (49)	844	24	23.63	0	22.71	1
			831.5	24	23.53	0	22.50	1
			820	24	23.51	0	22.65	1
1RB Middle (24)		844	24	23.52	0	22.66	1	
		831.5	24	23.45	0	22.69	1	
		820	24	23.74	0	22.90	1	
1RB Low (0)		844	24	23.60	0	22.70	1	
		831.5	24	23.59	0	22.74	1	
		820	24	23.64	0	22.85	1	
25RB High (25)		844	24	22.66	1	21.62	2	
		831.5	24	22.52	1	21.36	2	
		820	24	22.75	1	21.72	2	

	25RB Middle (12)	844	24	22.69	1	21.47	2	
		831.5	24	22.64	1	21.50	2	
		820	24	22.73	1	21.82	2	
	25RB Low (0)	844	24	22.65	1	21.50	2	
		831.5	24	22.71	1	21.66	2	
		820	24	22.72	1	21.70	2	
	50RB (0)	844	24	22.60	1	21.42	2	
		831.5	24	22.74	1	21.62	2	
		820	24	22.73	1	21.73	2	
15 MHz	1RB High (74)	841.5	24	23.45	0	22.35	1	
		831.5	24	23.40	0	22.53	1	
		822.5	24	23.54	0	22.74	1	
	1RB Middle (37)	841.5	24	23.48	0	22.50	1	
		831.5	24	23.35	0	22.70	1	
		822.5	24	23.60	0	22.71	1	
	1RB Low (0)	841.5	24	23.57	0	22.62	1	
		831.5	24	23.70	0	22.82	1	
		822.5	24	23.63	0	22.72	1	
	36RB High (38)	841.5	24	22.68	1	21.63	2	
		831.5	24	22.47	1	21.35	2	
		822.5	24	22.64	1	21.51	2	
	36RB Middle (19)	841.5	24	22.64	1	21.45	2	
		831.5	24	22.66	1	21.48	2	
		822.5	24	22.74	1	21.70	2	
	36RB Low (0)	841.5	24	22.62	1	21.52	2	
		831.5	24	22.70	1	21.67	2	
		822.5	24	22.73	1	21.77	2	
	75RB (0)	841.5	24	22.59	1	21.45	2	
		831.5	24	22.65	1	21.50	2	
		822.5	24	22.69	1	21.65	2	
	Band 41							
	Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
		RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
	5 MHz	1RB High (24)	2687.5	24	22.85	0	21.62	1
			2640.3	24	22.88	0	21.68	1
			2593	24	22.87	0	21.74	1
2545.8			24	22.90	0	21.72	1	
2498.5			24	22.98	0	21.64	1	
1RB Middle (12)		2687.5	24	22.81	0	21.54	1	
		2640.3	24	22.78	0	21.62	1	
		2593	24	22.85	0	21.90	1	
		2545.8	24	22.92	0	21.88	1	



		2498.5	24	22.93	0	21.76	1
	1RB Low (0)	2687.5	24	22.93	0	21.81	1
		2640.3	24	22.88	0	21.70	1
		2593	24	23.04	0	21.87	1
		2545.8	24	23.02	0	21.73	1
		2498.5	24	22.96	0	21.74	1
		12RB High (13)	2687.5	24	21.79	1	20.89
	2640.3		24	21.74	1	20.70	2
	2593		24	21.97	1	21.10	2
	2545.8		24	21.93	1	21.03	2
	2498.5		24	21.77	1	21.04	2
	12RB Middle (6)	2687.5	24	21.76	1	20.83	2
		2640.3	24	21.82	1	20.94	2
		2593	24	21.91	1	21.04	2
		2545.8	24	21.90	1	20.99	2
		2498.5	24	21.83	1	21.08	2
	12RB Low (0)	2687.5	24	21.88	1	20.94	2
		2640.3	24	21.83	1	20.95	2
		2593	24	21.98	1	21.14	2
		2545.8	24	21.89	1	20.79	2
2498.5		24	21.82	1	21.09	2	
25RB (0)	2687.5	24	21.82	1	20.87	2	
	2640.3	24	21.73	1	20.83	2	
	2593	24	21.96	1	21.08	2	
	2545.8	24	21.94	1	20.97	2	
	2498.5	24	21.87	1	20.89	2	
10 MHz	1RB High (49)	2685	24	22.77	0	21.51	1
		2639	24	22.70	0	21.60	1
		2593	24	22.69	0	21.89	1
		2547	24	22.83	0	21.88	1
		2501	24	22.84	0	21.81	1
	1RB Middle (24)	2685	24	22.74	0	21.87	1
		2639	24	22.71	0	21.72	1
		2593	24	22.72	0	21.81	1
		2547	24	22.73	0	21.86	1
		2501	24	22.75	0	21.76	1
	1RB Low (0)	2685	24	22.94	0	21.97	1
		2639	24	22.80	0	21.80	1
		2593	24	22.95	0	22.08	1
		2547	24	22.87	0	21.81	1
		2501	24	22.91	0	21.86	1

	25RB High (25)	2685	24	21.82	1	20.62	2
		2639	24	21.79	1	20.74	2
		2593	24	21.91	1	20.85	2
		2547	24	21.92	1	20.92	2
		2501	24	21.93	1	20.94	2
	25RB Middle (12)	2685	24	21.77	1	20.80	2
		2639	24	21.77	1	20.85	2
		2593	24	22.03	1	20.88	2
		2547	24	21.97	1	20.87	2
		2501	24	21.92	1	20.78	2
	25RB Low (0)	2685	24	21.75	1	20.79	2
		2639	24	21.75	1	20.94	2
		2593	24	22.04	1	20.98	2
		2547	24	22.03	1	20.97	2
		2501	24	21.89	1	20.77	2
	50RB (0)	2685	24	21.89	1	20.77	2
		2639	24	21.80	1	20.70	2
		2593	24	22.02	1	21.02	2
		2547	24	21.98	1	20.89	2
		2501	24	21.91	1	20.92	2
15 MHz	1RB High (74)	2682.5	24	22.64	0	21.88	1
		2637.8	24	22.79	0	21.65	1
		2593	24	22.77	0	21.98	1
		2548.3	24	22.78	0	21.66	1
		2503.5	24	22.86	0	21.70	1
	1RB Middle (37)	2682.5	24	22.88	0	21.85	1
		2637.8	24	22.71	0	21.84	1
		2593	24	22.78	0	21.99	1
		2548.3	24	22.83	0	21.68	1
		2503.5	24	22.91	0	21.80	1
	1RB Low (0)	2682.5	24	23.10	0	22.04	1
		2637.8	24	23.01	0	21.75	1
		2593	24	23.11	0	22.32	1
		2548.3	24	23.00	0	22.21	1
		2503.5	24	23.06	0	22.02	1
	36RB High (38)	2682.5	24	21.70	1	20.78	2
		2637.8	24	21.68	1	20.87	2
		2593	24	21.92	1	20.83	2
		2548.3	24	21.86	1	20.96	2
		2503.5	24	21.88	1	21.04	2
36RB Middle (19)	2682.5	24	21.82	1	20.53	2	
	2637.8	24	21.76	1	20.75	2	

		2593	24	21.95	1	20.79	2	
		2548.3	24	21.80	1	20.90	2	
		2503.5	24	21.85	1	20.93	2	
	36RB Low (0)	2682.5	24	21.86	1	20.94	2	
		2637.8	24	21.80	1	20.74	2	
		2593	24	22.06	1	20.96	2	
		2548.3	24	22.02	1	20.80	2	
		2503.5	24	21.89	1	20.87	2	
	75RB (0)	2682.5	24	21.85	1	20.82	2	
		2637.8	24	21.75	1	20.75	2	
		2593	24	21.93	1	20.84	2	
		2548.3	24	21.92	1	20.90	2	
		2503.5	24	21.91	1	20.91	2	
	20 MHz	1RB High (99)	2680	24	22.89	0	21.55	1
			2636.5	24	22.78	0	21.89	1
2593			24	22.80	0	22.11	1	
2549.5			24	22.88	0	21.85	1	
2506			24	22.98	0	22.06	1	
1RB Middle (50)		2680	24	23.10	0	21.77	1	
		2636.5	24	22.80	0	21.72	1	
		2593	24	22.92	0	22.13	1	
		2549.5	24	23.05	0	21.87	1	
		2506	24	22.86	0	22.21	1	
1RB Low (0)		2680	24	23.03	0	21.91	1	
		2636.5	24	22.97	0	21.63	1	
		2593	24	23.17	0	22.37	1	
		2549.5	24	23.10	0	22.37	1	
		2506	24	23.09	0	21.89	1	
50RB High (50)		2680	24	21.67	1	20.64	2	
		2636.5	24	21.68	1	20.72	2	
		2593	24	21.99	1	21.02	2	
		2549.5	24	21.87	1	20.87	2	
		2506	24	21.83	1	21.12	2	
50RB Middle (25)		2680	24	21.84	1	20.70	2	
		2636.5	24	21.77	1	20.66	2	
		2593	24	21.92	1	20.93	2	
		2549.5	24	21.91	1	20.92	2	
		2506	24	21.93	1	20.91	2	
50RB Low (0)	2680	24	21.83	1	20.89	2		
	2636.5	24	21.78	1	20.80	2		
	2593	24	22.14	1	21.17	2		

		2549.5	24	21.92	1	21.14	2
		2506	24	21.97	1	21.07	2
	100RB (0)	2680	24	21.75	1	20.76	2
		2636.5	24	21.66	1	20.80	2
		2593	24	22.01	1	21.00	2
		2549.5	24	21.94	1	20.77	2
		2506	24	22.00	1	20.99	2

11.4 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)		
	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78 (2480MHz)
GFSK	9.03	10.24	8.58

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	18.38	/	/	/
6	18.25	/	/	/
11	18.54	18.53	18.51	18.51

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	16.55	16.51	16.50	16.48	16.45	16.37	16.27	16.22
6	16.23	/	/	/	/	/	/	/
11	16.24	/	/	/	/	/	/	/

802.11n (dBm) - HT20 (2.4G)


Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	16.59	14.03	14.01	13.94	13.88	13.82	13.75	13.68
6	16.26	/	/	/	/	/	/	/
11	16.23	/	/	/	/	/	/	/

12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

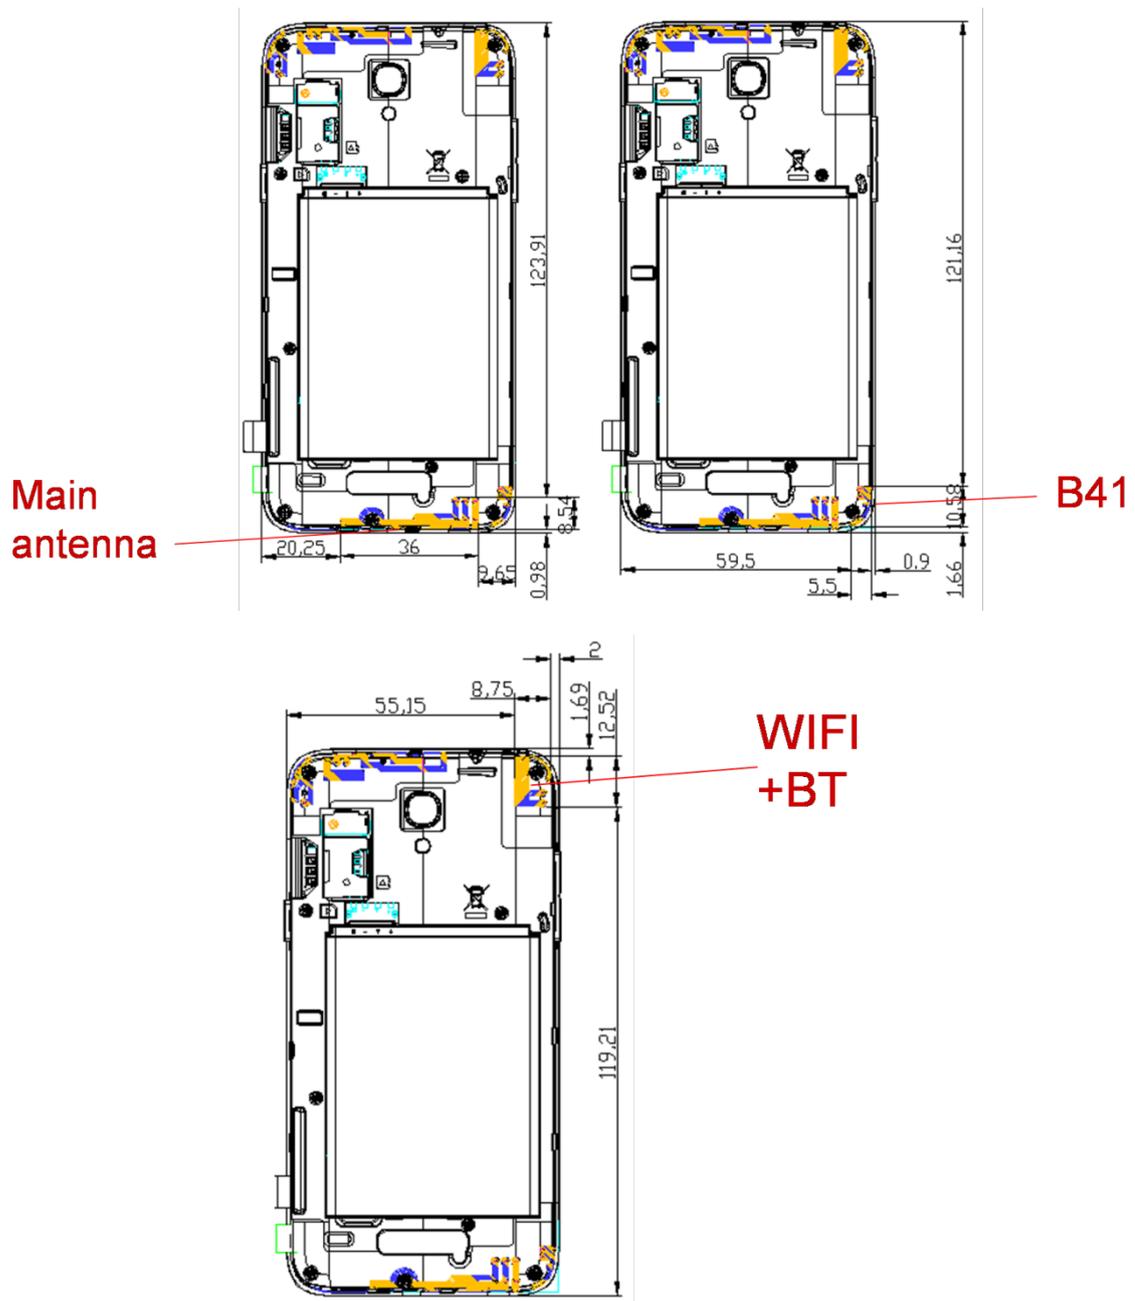

Picture 12.1 Antenna Locations

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
LTE Band 41	Yes	Yes	Yes	No	No	Yes
WLAN	Yes	Yes	Yes	No	Yes	No

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	11	12.59	No
		Body	19.20	11	12.59	Yes
2.4GHz WLAN 802.11 b	2.45	Head	9.58	19	79.42	No
		Body	19.17	19	79.42	No

The head SAR of BT is too low to be detected the results by DASY system. So the measured SAR of BT is replaced by the estimated SAR in table 13.3.

13 Evaluation of Simultaneous


Table 13.1: The sum of reported SAR values for B41 and WLAN

	Position	B41	WLAN	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.92	0.36	1.28
	Right hand, Touch cheek	0.53	0.93	1.46
Highest reported SAR value for Body	Front	1.19	0.22	1.41
	Rear	1.02	0.28	1.30
	Bottom	1.44	/	1.44

Table 13.2: The sum of reported SAR values for main antenna and WLAN


	Band	Position	Main antenna	WLAN	Sum	Distance (mm)	Ratio
Maximum reported SAR value for Head	CDMA BC1	Right hand, Touch cheek	0.70	0.93	1.63	85.1	0.02
	CDMA BC10	Right hand, Touch cheek	0.81		1.74	78.9	0.03
	LTE Band 26	Right hand, Touch cheek	0.73		1.66	81.6	0.03
Maximum reported SAR value for Body	CDMA BC10	Rear	1.24	0.28	1.52	/	/

According to the KDB 447498 D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The ratio is determined by $(SAR_1 + SAR_2)^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

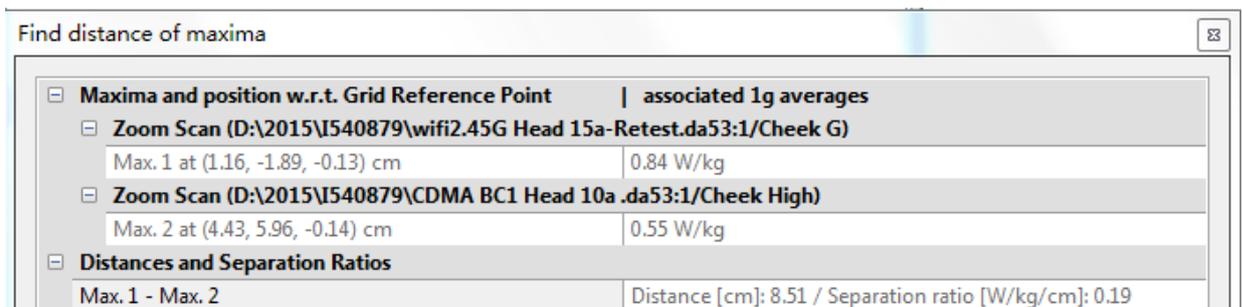

Find distance of maxima	
Maxima and position w.r.t. Grid Reference Point associated 1g averages	
Zoom Scan (D:\2015\I540879\wifi2.45G Head 15a-Retest.da53:1/Cheek G)	
Max. 1 at (1.16, -1.89, -0.13) cm	0.84 W/kg
Zoom Scan (D:\2015\I540879\CDMA BC1 Head 10a.da53:1/Cheek High)	
Max. 2 at (4.43, 5.96, -0.14) cm	0.55 W/kg
Distances and Separation Ratios	
Max. 1 - Max. 2	Distance [cm]: 8.51 / Separation ratio [W/kg/cm]: 0.19

Picture 13.1 Distance evaluation for CDMA BC1 and WLAN

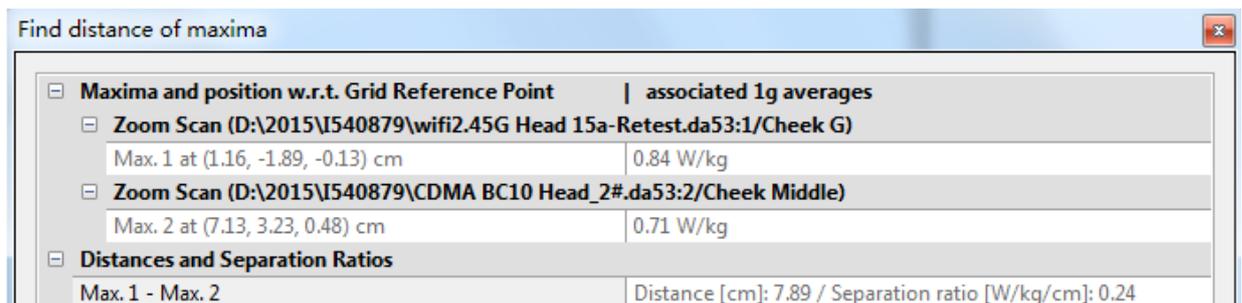

Find distance of maxima	
Maxima and position w.r.t. Grid Reference Point associated 1g averages	
Zoom Scan (D:\2015\I540879\wifi2.45G Head 15a-Retest.da53:1/Cheek G)	
Max. 1 at (1.16, -1.89, -0.13) cm	0.84 W/kg
Zoom Scan (D:\2015\I540879\CDMA BC10 Head_2#.da53:2/Cheek Middle)	
Max. 2 at (7.13, 3.23, 0.48) cm	0.71 W/kg
Distances and Separation Ratios	
Max. 1 - Max. 2	Distance [cm]: 7.89 / Separation ratio [W/kg/cm]: 0.24

Picture 13.2 Distance evaluation for CDMA BC10 and WLAN

Find distance of maxima	
<input type="checkbox"/> Maxima and position w.r.t. Grid Reference Point	associated 1g averages
<input type="checkbox"/> Zoom Scan (D:\2015\I540879\wifi2.45G Head 15a-Retest.da53:1/Cheek G)	
Max. 1 at (1.16, -1.89, -0.13) cm	0.84 W/kg
<input type="checkbox"/> Zoom Scan (D:\2015\I540879\LTE Band 26 Head_2#.da53:0/Cheek Middle 1RB Low)	
Max. 2 at (5.47, 5.03, 0.03) cm	0.68 W/kg
<input type="checkbox"/> Distances and Separation Ratios	
Max. 1 - Max. 2	Distance [cm]: 8.16 / Separation ratio [W/kg/cm]: 0.23

Picture 13.3 Distance evaluation for LTE Band26 and WLAN

Table 13.3: The sum of reported SAR values for other antenna and Bluetooth

	Position	other antenna	BT*	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.92	0.52	1.44
Highest reported SAR value for Body	Rear	1.24	0.26	1.50
	Bottom	1.46	/	1.46

BT* - Estimated SAR for Bluetooth (see the table 13.4)

Table 13.4: Estimated SAR for Bluetooth

Position	F (GHz)	Distance (mm)	Upper limit of power *		Estimated _{1g} (W/kg)
			dBm	mW	
Head	2.441	5	11	12.59	0.52
Body	2.441	10	11	12.59	0.26

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm) · [√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;
where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is < 1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or > 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

14.1 SAR results for Fast SAR

Table 14.1: SAR Values (CDMA BC0 - Head)

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 22.5 °C		Liquid Temperature: 22.0 °C				Power Drift (dB)
MHz	Ch.				Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
848.31	777	Left	Touch	/	23.92	24.5	0.293	0.33	0.449	0.51	-0.05
836.52	384	Left	Touch	/	23.88	24.5	0.319	0.37	0.489	0.56	0.01
824.7	1013	Left	Touch	Fig.1	23.99	24.5	0.455	0.51	0.703	0.79	0.13
836.52	384	Left	Tilt	/	23.88	24.5	0.103	0.12	0.147	0.17	0.07
836.52	384	Right	Touch	/	23.88	24.5	0.261	0.30	0.385	0.44	-0.08
836.52	384	Right	Tilt	/	23.88	24.5	0.116	0.13	0.167	0.19	0.08

Table 14.2: SAR Values (CDMA BC0 - Body)

Frequency		Test Position	Figure No.	Ambient Temperature: 22.5 °C		Liquid Temperature: 22.0 °C				Power Drift (dB)
MHz	Ch.			Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
848.31	777	Front	/	23.92	24.5	0.373	0.43	0.553	0.63	0.07
836.52	384	Front	/	23.88	24.5	0.498	0.57	0.741	0.85	-0.03
824.7	1013	Front	/	23.99	24.5	0.506	0.57	0.753	0.85	-0.04
848.31	777	Rear	/	23.92	24.5	0.534	0.61	0.790	0.90	-0.02
836.52	384	Rear	/	23.88	24.5	0.637	0.73	1.03	1.19	-0.05
824.7	1013	Rear	Fig.2	23.99	24.5	0.625	0.70	1.06	1.19	0.01
836.52	384	Left	/	23.88	24.5	0.121	0.14	0.179	0.21	0.09
836.52	384	Right	/	23.88	24.5	0.426	0.49	0.629	0.73	0.07
836.52	384	Bottom	/	23.88	24.5	0.213	0.25	0.418	0.48	-0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.3: SAR Values (CDMA BC1 - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	600	Left	Touch	/	23.46	24.5	0.272	0.35	0.444	0.56	-0.06
1880	600	Left	Tilt	/	23.46	24.5	0.107	0.14	0.184	0.23	-0.08
1908.75	1175	Right	Touch	Fig.3	23.45	24.5	0.326	0.42	0.549	0.70	-0.07
1880	600	Right	Touch	/	23.46	24.5	0.284	0.36	0.507	0.64	0.19
1851.25	25	Right	Touch	/	23.47	24.5	0.208	0.26	0.371	0.47	0.16
1880	600	Right	Tilt	/	23.46	24.5	0.086	0.11	0.152	0.19	0.17

Table 14.4: SAR Values (CDMA BC1 - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.										
1880	600	Front	/	23.46	24.5	0.374	0.48	0.625	0.79	0.08	
1880	600	Rear	/	23.46	24.5	0.306	0.39	0.494	0.63	-0.02	
1880	600	Left	/	23.46	24.5	0.180	0.23	0.371	0.47	-0.04	
1880	600	Right	/	23.46	24.5	0.081	0.10	0.136	0.17	-0.10	
1908.75	1175	Bottom	Fig.4	23.45	24.5	0.566	0.72	1.15	1.46	0.01	
1880	600	Bottom	/	23.46	24.5	0.537	0.68	1.08	1.37	-0.04	
1851.25	25	Bottom	/	23.47	24.5	0.383	0.49	0.813	1.03	0.00	

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.5: SAR Values (CDMA BC10 - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
820.5	580	Left	Touch	/	23.92	24.5	0.456	0.52	0.670	0.77	-0.02
820.5	580	Left	Tilt	/	23.92	24.5	0.211	0.24	0.318	0.36	0.13
823.1	684	Right	Touch	/	23.90	24.5	0.400	0.46	0.590	0.68	0.10
820.5	580	Right	Touch	Fig.5	23.92	24.5	0.548	0.63	0.710	0.81	-0.05
817.9	476	Right	Touch	/	23.95	24.5	0.351	0.40	0.522	0.59	0.11
820.5	580	Right	Tilt	/	23.92	24.5	0.307	0.35	0.443	0.51	0.01

Table 14.6: SAR Values (CDMA BC10 - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
823.1	684	Front	/	23.90	24.5	0.708	0.81	1.05	1.21	0.05
820.5	580	Front	/	23.92	24.5	0.614	0.70	0.908	1.04	0.03
817.9	476	Front	/	23.95	24.5	0.628	0.71	0.929	1.05	-0.03
823.1	684	Rear	Fig.6	23.90	24.5	0.778	0.89	1.08	1.24	0.01
820.5	580	Rear	/	23.92	24.5	0.633	0.72	0.923	1.05	-0.05
817.9	476	Rear	/	23.95	24.5	0.650	0.74	0.946	1.07	0.03
820.5	580	Left	/	23.92	24.5	0.198	0.23	0.269	0.31	0.09
820.5	580	Right	/	23.92	24.5	0.375	0.43	0.557	0.64	0.07
820.5	580	Bottom	/	23.92	24.5	0.214	0.24	0.414	0.47	-0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.7: SAR Values (LTE Band25 - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
1882.5	26365	1RB_Mid	Left	Touch	Fig.7	23.78	24.0	0.266	0.28	0.436	0.46	-0.08
1882.5	26365	1RB_Mid	Left	Tilt	/	23.78	24.0	0.086	0.09	0.143	0.15	0.09
1882.5	26365	1RB_Mid	Right	Touch	/	23.78	24.0	0.214	0.23	0.374	0.39	0.05
1882.5	26365	1RB_Mid	Right	Tilt	/	23.78	24.0	0.063	0.07	0.112	0.12	0.11
1882.5	26365	50RB_Low	Left	Touch	/	22.58	23.0	0.199	0.22	0.339	0.37	0.02
1882.5	26365	50RB_Low	Left	Tilt	/	22.58	23.0	0.069	0.08	0.116	0.13	0.05
1882.5	26365	50RB_Low	Right	Touch	/	22.58	23.0	0.171	0.19	0.302	0.33	0.08
1882.5	26365	50RB_Low	Right	Tilt	/	22.58	23.0	0.043	0.05	0.077	0.08	0.11

Note1: The LTE mode is QPSK_20MHz.

Table 14.8: SAR Values (LTE Band25 - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1905	26590	1RB_Mid	Front	/	23.27	24.0	0.542	0.64	0.952	1.13	-0.07
1882.5	26365	1RB_Mid	Front	/	23.78	24.0	0.464	0.49	0.820	0.86	0.06
1860	26140	1RB_Mid	Front	/	23.47	24.0	0.353	0.40	0.625	0.71	-0.01
1882.5	26365	1RB_Mid	Rear	/	23.78	24.0	0.380	0.40	0.634	0.67	-0.12
1882.5	26365	1RB_Mid	Left	/	23.78	24.0	0.152	0.16	0.265	0.28	0.09

1882.5	26365	1RB_Mid	Right	/	23.78	24.0	0.076	0.08	0.131	0.14	0.05
1905	26590	1RB_Mid	Bottom	Fig.8	23.27	24.0	0.541	0.64	1.09	1.29	-0.06
1882.5	26365	1RB_Mid	Bottom	/	23.78	24.0	0.490	0.52	0.966	1.02	0.13
1860	26140	1RB_Mid	Bottom	/	23.47	24.0	0.341	0.39	0.705	0.80	0.06
1882.5	26365	50RB_Low	Front	/	22.58	23.0	0.369	0.41	0.652	0.72	0.06
1882.5	26365	50RB_Low	Rear	/	22.58	23.0	0.280	0.31	0.454	0.50	0.01
1882.5	26365	50RB_Low	Left	/	22.58	23.0	0.125	0.14	0.219	0.24	0.04
1882.5	26365	50RB_Low	Right	/	22.58	23.0	0.058	0.06	0.102	0.11	0.08
1882.5	26365	50RB_Low	Bottom	/	22.58	23.0	0.337	0.37	0.703	0.77	0.05
1882.5	26365	100RB	Front	/	22.56	23.0	0.416	0.46	0.732	0.81	0.08
1882.5	26365	100RB	Bottom	/	22.56	23.0	0.384	0.42	0.810	0.90	-0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.9: SAR Values (LTE Band26 - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
831.5	26865	1RB_Low	Left	Touch	/	23.70	24.0	0.424	0.45	0.627	0.67	0.13
831.5	26865	1RB_Low	Left	Tilt	/	23.70	24.0	0.301	0.32	0.439	0.47	-0.13
831.5	26865	1RB_Low	Right	Touch	Fig.9	23.70	24.0	0.521	0.56	0.680	0.73	0.10
831.5	26865	1RB_Low	Right	Tilt	/	23.70	24.0	0.296	0.32	0.432	0.46	-0.12
822.5	26775	36RB_Mid	Left	Touch	/	22.74	23.0	0.336	0.36	0.492	0.52	0.05
822.5	26775	36RB_Mid	Left	Tilt	/	22.74	23.0	0.258	0.27	0.377	0.40	-0.12
822.5	26775	36RB_Mid	Right	Touch	/	22.74	23.0	0.336	0.36	0.482	0.51	-0.10
822.5	26775	36RB_Mid	Right	Tilt	/	22.74	23.0	0.296	0.31	0.423	0.45	-0.13

Note1: The LTE mode is QPSK_15MHz.

Table 14.10: SAR Values (LTE Band26 - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
831.5	26865	1RB_Low	Front	/	23.70	24.0	0.507	0.54	0.734	0.79	0.08
841.5	26965	1RB_Low	Rear	/	23.57	23.0	0.565	0.50	0.668	0.59	-0.05
831.5	26865	1RB_Low	Rear	Fig.10	23.70	24.0	0.493	0.53	0.866	0.93	-0.11
822.5	26775	1RB_Low	Rear	/	23.63	23.0	0.479	0.41	0.706	0.61	0.02
1882.5	26365	1RB_Low	Left	/	23.70	24.0	0.202	0.22	0.302	0.32	0.09
1882.5	26365	1RB_Low	Right	/	23.70	24.0	0.407	0.44	0.602	0.65	0.05
1905	26590	1RB_Low	Bottom	/	23.70	24.0	0.182	0.20	0.375	0.40	-0.06

822.5	26775	36RB_Mid	Front	/	22.74	23.0	0.387	0.41	0.570	0.61	-0.11
822.5	26775	36RB_Mid	Rear	/	22.74	23.0	0.505	0.54	0.445	0.47	-0.05
822.5	26775	36RB_Mid	Left	/	22.74	23.0	0.166	0.18	0.248	0.26	0.04
822.5	26775	36RB_Mid	Right	/	22.74	23.0	0.347	0.37	0.515	0.55	0.03
822.5	26775	36RB_Mid	Bottom	/	22.74	23.0	0.188	0.20	0.372	0.39	0.19
822.5	26775	75RB	Rear	/	22.69	23.0	0.452	0.49	0.621	0.67	-0.13

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_15MHz.

Table 14.11: SAR Values (LTE Band41 - Head)

Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
Ambient Temperature: 22.7 °C		Liquid Temperature: 22.3 °C										
2680	41490	1RB_Low	Left	Touch	/	23.03	24.0	0.144	0.18	0.271	0.34	0.18
2636.5	41055	1RB_Low	Left	Touch	/	22.97	24.0	0.276	0.35	0.550	0.70	-0.08
2593	40620	1RB_Low	Left	Touch	Fig.11	23.17	24.0	0.402	0.49	0.757	0.92	0.08
2549.5	40185	1RB_Low	Left	Touch	/	23.10	24.0	0.184	0.23	0.361	0.44	0.15
2506	39750	1RB_Low	Left	Touch	/	23.09	24.0	0.179	0.22	0.348	0.43	0.06
2593	40620	1RB_Low	Left	Tilt	/	23.17	24.0	0.093	0.11	0.182	0.22	-0.17
2593	40620	1RB_Low	Right	Touch	/	23.17	24.0	0.230	0.28	0.437	0.53	-0.02
2593	40620	1RB_Low	Right	Tilt	/	23.17	24.0	0.160	0.19	0.341	0.41	-0.08
2593	40620	50RB_Low	Left	Touch	/	22.14	23.0	0.270	0.33	0.530	0.65	0.10
2593	40620	50RB_Low	Left	Tilt	/	22.14	23.0	0.059	0.07	0.114	0.14	0.05
2593	40620	50RB_Low	Right	Touch	/	22.14	23.0	0.146	0.18	0.278	0.34	0.13
2593	40620	50RB_Low	Right	Tilt	/	22.14	23.0	0.104	0.13	0.223	0.27	0.00
2593	40620	100RB	Left	Touch	/	22.01	23.0	0.290	0.36	0.574	0.72	0.12

Note1: The LTE mode is QPSK_20MHz.

Table 14.12: SAR Values (LTE Band41 - Body)

Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.											
Ambient Temperature: 22.7 °C		Liquid Temperature: 22.3 °C										
2680	41490	1RB_Low	Front	/	23.03	24.0	0.316	0.40	0.619	0.77	0.08	
2636.5	41055	1RB_Low	Front	/	22.97	24.0	0.329	0.42	0.608	0.77	0.09	
2593	40620	1RB_Low	Front	/	23.17	24.0	0.525	0.64	0.986	1.19	0.01	
2549.5	40185	1RB_Low	Front	/	23.10	24.0	0.262	0.32	0.497	0.61	0.12	
2506	39750	1RB_Low	Front	/	23.09	24.0	0.171	0.21	0.319	0.39	-0.09	
2680	41490	1RB_Low	Rear	/	23.03	24.0	0.234	0.29	0.435	0.54	0.11	
2636.5	41055	1RB_Low	Rear	/	22.97	24.0	0.324	0.41	0.619	0.78	-0.14	

2593	40620	1RB_Low	Rear	/	23.17	24.0	0.459	0.56	0.843	1.02	0.07
2549.5	40185	1RB_Low	Rear	/	23.10	24.0	0.264	0.32	0.485	0.60	0.06
2506	39750	1RB_Low	Rear	/	23.09	24.0	0.157	0.19	0.279	0.34	0.03
2593	40620	1RB_Low	Left	/	23.17	24.0	0.223	0.27	0.450	0.54	-0.05
2593	40620	1RB_Low	Right	/	23.17	24.0	0.101	0.12	0.188	0.23	0.07
2680	41490	1RB_Low	Bottom	/	23.03	24.0	0.422	0.53	0.876	1.10	0.10
2636.5	41055	1RB_Low	Bottom	/	22.97	24.0	0.522	0.66	1.06	1.34	-0.03
2593	40620	1RB_Low	Bottom	Fig.12	23.17	24.0	0.601	0.73	1.19	1.44	-0.02
2549.5	40185	1RB_Low	Bottom	/	23.10	24.0	0.434	0.53	0.874	1.08	-0.11
2506	39750	1RB_Low	Bottom	/	23.09	24.0	0.286	0.35	0.574	0.71	-0.19
2593	40620	50RB_Low	Front	/	22.14	23.0	0.349	0.43	0.650	0.79	-0.03
2593	40620	50RB_Low	Rear	/	22.14	23.0	0.295	0.36	0.542	0.66	0.02
2593	40620	50RB_Low	Left	/	22.14	23.0	0.142	0.17	0.287	0.35	-0.15
2593	40620	50RB_Low	Right	/	22.14	23.0	0.062	0.08	0.115	0.14	-0.01
2680	41490	50RB_Low	Bottom	/	21.83	23.0	0.384	0.50	0.810	1.06	-0.02
2636.5	41055	50RB_Low	Bottom	/	21.78	23.0	0.427	0.57	0.877	1.16	0.05
2593	40620	50RB_Low	Bottom	/	22.14	23.0	0.469	0.57	0.963	1.17	-0.10
2549.5	40185	50RB_Low	Bottom	/	21.92	23.0	0.325	0.42	0.654	0.84	-0.15
2506	39750	50RB_Low	Bottom	/	21.97	23.0	0.242	0.31	0.487	0.62	-0.06
2593	40620	100RB	Front	/	22.01	23.0	0.321	0.40	0.612	0.77	0.04
2593	40620	100RB	Rear	/	22.01	23.0	0.308	0.39	0.570	0.72	-0.04
2593	40620	100RB	Bottom	/	22.01	23.0	0.449	0.56	0.921	1.16	0.03

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

LTE Band 41 (TDD) is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r03. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

14.2 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

Table 14.13: SAR Values (CDMA BC0 - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift (dB)
MHz	Ch.						(W/kg)	(W/kg)	(W/kg)	(W/kg)	
824.7	1013	Left	Touch	Fig.1	23.99	24.5	0.455	0.51	0.703	0.79	0.13

Table 14.14: SAR Values (CDMA BC0 - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift (dB)
MHz	Ch.					(W/kg)	(W/kg)	(W/kg)	(W/kg)	
824.7	1013	Rear	Fig.2	23.99	24.5	0.625	0.70	1.06	1.19	0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.15: SAR Values (CDMA BC1 - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift (dB)
MHz	Ch.						(W/kg)	(W/kg)	(W/kg)	(W/kg)	
1908.75	1175	Right	Touch	Fig.3	23.45	24.5	0.326	0.42	0.549	0.70	-0.07

Table 14.16: SAR Values (CDMA BC1 - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift (dB)
MHz	Ch.					(W/kg)	(W/kg)	(W/kg)	(W/kg)	
1908.75	1175	Bottom	Fig.4	23.45	24.5	0.566	0.72	1.15	1.46	0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.17: SAR Values (CDMA BC10 - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g)	Reported SAR(10g)	Measured SAR(1g)	Reported SAR(1g)	Power Drift (dB)
MHz	Ch.						(W/kg)	(W/kg)	(W/kg)	(W/kg)	
820.5	580	Right	Touch	Fig.5	23.92	24.5	0.548	0.63	0.710	0.81	-0.05

Table 14.18: SAR Values (CDMA BC10 - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
823.1	684	Rear	Fig.6	23.90	24.5	0.778	0.89	1.08	1.24	0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.19: SAR Values (LTE Band25 - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
1882.5	26365	1RB_Mid	Left	Touch	Fig.7	23.78	24.0	0.266	0.28	0.436	0.46	-0.08

Note1: The LTE mode is QPSK_20MHz.

Table 14.20: SAR Values (LTE Band25 - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1905	26590	1RB_Mid	Bottom	Fig.8	23.27	24.0	0.541	0.64	1.09	1.29	-0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.21: SAR Values (LTE Band26 - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
831.5	26865	1RB_Low	Right	Touch	Fig.9	23.70	24.0	0.521	0.56	0.680	0.73	0.10

Note1: The LTE mode is QPSK_15MHz.

Table 14.22: SAR Values (LTE Band26 - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
831.5	26865	1RB_Low	Rear	Fig.10	23.70	24.0	0.493	0.53	0.866	0.93	-0.11

Note1: The distance between the EUT and the phantom bottom is 10mm. Note2: The LTE mode is QPSK_15MHz.

Table 14.23: SAR Values (LTE Band41 - Head)

Ambient Temperature: 22.7 °C						Liquid Temperature: 22.3 °C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
2593	40620	1RB_Low	Left	Touch	Fig.11	23.17	24.0	0.402	0.49	0.757	0.92	0.08

Note1: The LTE mode is QPSK_20MHz.

Table 14.24: SAR Values (LTE Band41 - Body)

Ambient Temperature: 22.7 °C						Liquid Temperature: 22.3 °C					
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2593	40620	1RB_Low	Bottom	Fig.12	23.17	24.0	0.601	0.73	1.19	1.44	-0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

14.3 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.

Head Evaluation

Table 14.25: SAR Values (WLAN - Head) – 802.11b 1Mbps (Fast SAR)

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2462	11	Left	Touch	/	18.54	19.0	0.170	0.19	0.323	0.36	-0.19
2462	11	Left	Tilt	/	18.54	19.0	0.170	0.19	0.324	0.36	0.10
2462	11	Right	Touch	/	18.54	19.0	0.377	0.42	0.825	0.92	-0.10
2462	11	Right	Tilt	/	18.54	19.0	0.302	0.34	0.651	0.72	0.03

As shown above table, the initial test position for head is “Right Touch”. So the head SAR of WLAN is presented as below:

Table 14.26: SAR Values (WLAN - Head) – 802.11b 1Mbps (Full SAR)

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2462	11	Right	Touch	Fig.13	18.54	19.0	0.379	0.42	0.838	0.93	-0.10

Because the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel.

Table 14.27: SAR Values (WLAN - Head) at next highest output power channel – 802.11b

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2412	1	Right	Touch	/	18.38	19.0	0.290	0.33	0.630	0.73	-0.19

SAR is not required for OFDM because the 802.11b adjusted SAR \leq 1.2 W/kg.

Body Evaluation

Table 14.28: SAR Values (WLAN - Body) – 802.11b 1Mbps (Fast SAR)

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.5 °C		Liquid Temperature: 22.0 °C		Power Drift (dB)
MHz	Ch.					Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
2462	11	Front	/	18.54	19.0	0.105	0.12	0.196	0.22	0.00
2462	11	Rear	/	18.54	19.0	0.125	0.14	0.245	0.27	0.05
2462	11	Left	/	18.54	19.0	0.068	0.08	0.131	0.15	0.12
2462	11	Top	/	18.54	19.0	0.087	0.10	0.170	0.19	-0.04

As shown above table, the initial test position for body is “Rear”. So the body SAR of WLAN is presented as below:

Table 14.29: SAR Values (WLAN - Body) – 802.11b 1Mbps (Full SAR)

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.5 °C		Liquid Temperature: 22.0 °C		Power Drift (dB)
MHz	Ch.					Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
2462	11	Rear	Fig.14	18.54	19.0	0.130	0.14	0.254	0.28	0.05

SAR is not required for OFDM because the 802.11b adjusted SAR \leq 1.2 W/kg.