

### Overview



1. Integrated Front Handle
2. Dedicated 9.5mm Optical Drive Bay
3. Power Button
4. HDD Activity LED
5. Front I/O=4 USB 3.0 with Charging Port (topmost port), 1 Microphone, 1 Headset

### Overview



- |                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>6. 2 External 5.25 Bays</p> <p>7. 2 Internal 3.5 Bays</p> <p>8. 6 6Gb/s SATA Ports</p> <p>9. Rear Flip-Up Handle</p> <p>10. 925W, 90% Efficient Power Supply</p> <p>11. Rear I/O—Rear Power Button, 4 USB 3.0, 2 USB 2.0, PS/2 Ports, 1 RJ-45 to Integrated GbE, 1 Audio Line In, 1 Audio Line Out</p> | <p>12. Intel Xeon Processors—E5-1600 v3 family or E5-2600 v3 family</p> <p>13. 4 DIMM Slots for DDR4 ECC Registered Memory</p> <p>14. 2<sup>nd</sup> CPU and Memory Riser Module with 4 DIMM slots</p> <p>15. 2 PCIe x16 Gen 3 Slots</p> <p>16. 1 PCIe x8 Gen 3, 1 PCIe x1 Gen 2, 1 PCIe x4 Gen 2, 1 PCI Slot</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

<b>Form Factor</b>	Rackable Minitower
<b>Operating Systems</b>	<p>Preinstalled—</p> <ul style="list-style-type: none"> <li>• Microsoft Windows 8.1 Pro 64-bit*</li> <li>• Microsoft Windows 7 Professional 64-bit (available through downgrade rights from Windows 8.1 Pro 64-bit)**</li> <li>• Microsoft Windows 7 Professional (MSNA) 64-bit*</li> <li>• HP Installer Kit for Linux (includes drivers for 64-bit OS versions of RHEL 5 &amp; 6 and SUSE Linux Enterprise Desktop 11)</li> <li>• Red Hat® Enterprise Linux Desktop (Paper license with 1 year support—no preinstalled OS)</li> </ul> <p><a href="http://www.hp.com/support/linux_hardware_matrix">Notes—For detailed OS/hardware support information for Linux, see— http://www.hp.com/support/linux_hardware_matrix</a></p>



### Overview

\* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows functionality. See <http://www.microsoft.com>.

\*\* This system is preinstalled with Windows® 7 Pro software and also comes with a license and media for Windows 8.1 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

Name	Cores	Clock Speed (GHz)	Cache (MB)	Memory Speed (MHz)	QPI Speed (GT/s)	Hyper-Threading	Featuring Intel® vPro™ Technology	Intel® Turbo Boost Technology <sup>1</sup>	TDP (W)
Intel® Xeon® E5-1680 v3 processor	8	3.2	20	2133	–	YES	YES	3, 6	140
Intel Xeon E5-1660 v3 processor	8	3.0	20	2133	–	YES	YES	5, 3	85
Intel Xeon E5-2630 v3 processor	8	2.4	20	1866	–	YES	YES	2, 8	140
Intel Xeon E5-1650 v3 processor	6	3.5	15	2133	–	YES	YES	1, 3	140
Intel Xeon E5-1630 v3 processor	4	3.7	10	2133	–	YES	YES	1, 1	140
Intel Xeon E5-1620 v3 processor	4	3.5	10	2133	–	YES	YES	1, 1	140
Intel Xeon E5-1607 v3 processor	4	3.1	10	1866	–	NO	YES	N/A	140
Intel Xeon E5-1603 v3 processor	4	2.8	10	1866	–	NO	YES	N/A	140
Intel Xeon E5-2699 v3 processor	18	2.3	45	2133	9.6	YES	YES	5, 13	145
Intel Xeon E5-2697 v3 processor	14	2.6	35	2133	9.6	YES	YES	5, 10	145
Intel Xeon E5-2695 v3 processor	14	2.3	35	2133	9.6	YES	YES	5, 10	120
Intel Xeon E5-2683 v3 processor	14	2.0	35	2133	9.6	YES	YES	5, 10	120
Intel Xeon E5-2690 v3 processor	12	2.6	30	2133	9.6	YES	YES	5, 9	135
Intel Xeon E5-2680 v3 processor	12	2.5	30	2133	9.6	YES	YES	4, 8	120
Intel Xeon E5-2670 v3 processor	12	2.3	30	2133	9.6	YES	YES	3, 8	120
Intel Xeon E5-2660 v3 processor	10	2.6	25	2133	9.6	YES	YES	3, 7	105
Intel Xeon E5-2650 v3 processor	10	2.3	25	2133	9.6	YES	YES	3, 7	105
Intel Xeon E5-2667 v3 processor	8	3.2	20	2133	9.6	YES	YES	2, 4	135
Intel Xeon E5-2640 v3 processor	8	2.6	20	1866	8.0	YES	YES	2, 8	90

### Overview

Intel Xeon E5-2630 v3 processor	8	2.4	20	1866	8.0	YES	YES	2, 8	85
Intel Xeon E5-2643 v3 processor	6	3.4	20	2133	9.6	YES	YES	2, 3	135
Intel Xeon E5-2620 v3 processor	6	2.4	15	1866	8.0	YES	YES	2, 8	85
Intel Xeon E5-2609 v3 processor	6	1.9	15	1600	6.4	NO	YES	N/A	85
Intel Xeon E5-2603 v3 processor	6	1.6	15	1600	6.4	NO	YES	N/A	85
Intel Xeon E5-2637 v3 processor	4	3.5	15	2133	9.6	YES	YES	1, 2	135
Intel Xeon E5-2623 v3 processor	4	3.0	10	1866	8.0	YES	YES	3, 5	105

<sup>1</sup>The specifications shown in this column represent the following<sup>2</sup> (all core maximum turbo steps, one core maximum turbo steps). Turbo boost stepping occurs in 100MHz increments. Processors that do not have turbo functionality are denoted as N/A.

**NOTE:** Z640 systems configured with an E5-1600 series processor may not add a 2nd processor. To support two processors, an E5-2600 series processor must be chosen.

<b>Disclaimers</b>	Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing system required. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.
--------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>Color</b>	Hematite Brushed Aluminum and HP Black
--------------	----------------------------------------

<b>Expansion Slots</b> (see system board section for more details)	<p><b>Slot 1 (top)</b><sup>2</sup> PCI Express Gen2 x1 with open-ended connector* Full-height, Half-length (Not available when 2nd processor/memory module is installed)</p> <p><b>Slot 2</b><sup>2</sup> PCI Express Gen3 x16 Full-height, Full-length (with extender)</p> <p><b>Slot 3</b><sup>2</sup> PCI Express Gen2 x4 with open-ended connector* Full-height, Full-length (with extender)</p> <p><b>Slot 4</b><sup>2</sup> PCI Express Gen3 x8 with open-ended connector* Full-height, Full-length (with extender)</p> <p><b>Slot 5</b><sup>2</sup> PCI Express Gen3 x16 Full-height, Full-length (with extender)</p> <p><b>Slot 6</b><sup>2</sup> PCI 32bit/33MHz Full-height, Full-length (with extender) * Open-ended connector allows a greater bandwidth (e.g., x16) card to be installed physically into a lower bandwidth connector/slot.</p>
--------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>Expansion Bays</b> (see	2 internal 3.5" bays (with acoustic dampening rail assemblies preinstalled)
----------------------------	-----------------------------------------------------------------------------



### Overview

storage section for more details)	2 external 5.25" bays <ul style="list-style-type: none"> <li>• 3rd and 4th 3.5" HDD each occupy one external bay</li> <li>• 3rd and 4th 2.5" HDD/SSD occupy a single external bay within a 2" carrier</li> </ul> 1 dedicated 9.5mm slim optical disk drive bay
<b>Front I/O</b>	4 USB 3.0, 1 Headset, 1 Microphone
<b>Internal I/O</b>	1 USB 2.0 ports available by a 2x5 header. Each 2x5 header supports either one HP Internal USB Port Kit (EM165AA) or one 15-in-1 Media Card Reader. 1 USB 3.0 port available by a 2x10 header.
<b>Rear I/O</b>	4 USB 3.0, 2 USB 2.0, 2 PS/2, 1 RJ-45 (NIC), 1 Audio Line-In, 1 Audio Line-Out. Serial supported with optional connector on PCI bracket cabled to system board connector
<b>Internal USB</b>	1 USB 2.0 port available by a 2x5 header. Each 2x5 headersupports either one HP Internal USB Port Kit (EM165AA) or one 15-in-1 Media Card Reader. 1 USB 3.0 port available by a 2x10 header.
<b>Chassis Dimensions (HxWxD)</b>	17.5 x 6.75 x 18.3 in (44.45 x 17.15 x 46.48 cm) Rack utilization= 4U
<b>System Weight</b>	Actual weight depends upon configuration Minimum configuration= 15.0 kg (33.1 lbs.) Typical configuration= 17.0 kg (37.5 lbs.) Maximum configuration= 21.8 kg (48.0 lbs.)
<b>Temperature</b>	Operating= 5° to 35°C (40° to 95°F) Non-operating -40° to 60°C (-40° to 140°F)
<b>Humidity</b>	Operating= 8% to 85% relative humidity, non-condensing Non-operating 8% to 90% relative humidity, non-condensing
<b>Maximum Altitude (non-pressurized)</b>	Operating= 3,048m (10,000ft) Non-operating 9,144m (30,000ft)
<b>Power Supply</b>	Tool-free 925W 90% Efficient wide-ranging, active Power Factor Correction, with two graphics power cables  <a href="#">The Power Supply Efficiency Report for this product may be found at this link (TBD)</a>
<b>Interfaces Supported</b>	15-in-1 Media Card Reader (optional) 6-channel SATA interfaces (6 @ 6.0 Gb/s). 6 channels are eSATA configurable for use with eSATA CTO/AMO Kit (No hot plug / hot swap supported). USB 2.0, USB 3.0
<b>Workstation ISV Certifications</b>	See the latest list of certifications at <a href="http://www.hp.com/united-states/campaigns/workstations/partnerships.html">http://www.hp.com/united-states/campaigns/workstations/partnerships.html</a>

### Supported Components

#### Processors

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Intel Xeon E5-1600 v3 Series CPU</b>				
Intel Xeon E5-1680 v3 3.2 2133 8C CPU	Y	N		
Intel Xeon E5-1660 v3 3.0 2133 8C CPU	Y	N		
Intel Xeon E5-1650 v3 3.5 2133 6C CPU	Y	N		
Intel Xeon E5-1630 v3 3.7 2133 4C CPU	Y	N		
Intel Xeon E5-1620 v3 3.5 2133 4C CPU	Y	N		
Intel Xeon E5-1607 v3 3.1 1866 4C CPU	Y	N		
Intel Xeon E5-1603 v3 2.8 1866 4C CPU	Y	N		

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Z640 Intel Xeon E5-2600 v3 Series CPU</b>				
Xeon E5-2699 v3 2.3 2133 18C CPU	Y	Y	J9P85AA	
Xeon E5-2697 v3 2.6 2133 14C CPU	Y	Y	J9P86AA	
Xeon E5-2695 v3 2.3 2133 14C CPU	Y	Y	J9P87AA	
Xeon E5-2683 v3 2.0 2133 14C CPU	Y	Y	J9P90AA	
Xeon E5-2690 v3 2.6 2133 12C CPU	Y	Y	J9P88AA	
Xeon E5-2680 v3 2.5 2133 12C CPU	Y	Y	J9P91AA	
Xeon E5-2670 v3 2.3 2133 12C CPU	Y	Y	J9P92AA	
Xeon E5-2660 v3 2.6 2133 10C CPU	Y	Y	J9P94AA	
Xeon E5-2650 v3 2.3 2133 10C CPU	Y	Y	J9P95AA	
Xeon E5-2667 v3 3.2 2133 8C CPU	Y	Y	J9P89AA	
Xeon E5-2640 v3 2.6 1866 8C CPU	Y	Y	J9P97AA	
Xeon E5-2630 v3 2.4 1866 8C CPU	Y	Y	J9P98AA	
Xeon E5-2643 v3 3.4 2133 6C CPU	Y	Y	J9P93AA	
Xeon E5-2620 v3 2.4 1866 6C CPU	Y	Y	J9Q00AA	
Xeon E5-2609 v3 1.9 1600 6C CPU	Y	Y	J9Q01AA	
Xeon E5-2603 v3 1.6 1600 6C CPU	Y	Y	J9Q02AA	
Xeon E5-2637 v3 3.5 2133 4C CPU	Y	Y	J9P96AA	
Xeon E5-2623 v3 3.0 1866 4C CPU	Y	Y	J9P99AA	

**Note 1**—When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See [http://www.intel.com/products/processor\\_number/](http://www.intel.com/products/processor_number/) for details.

Multi-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits—check with software provider to determine suitability. Not all customers or software applications will necessarily benefit from use of these technologies.

64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://www.intel.com/info/em64t> for more information.

Z640 processor AMO kits include—  
 - 2nd CPU/Memory Module (riser)

### Supported Components

- processor
- heatsink

First processor (CPU0) upgrades are not supported by HP.

### Monitors / Displays

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Z Display Z30i 30-inch IPS LED Backlit Monitor				
HP Z Display Z27i 27-inch IPS LED Backlit Monitor				
HP Z Display Z24i 24-inch IPS LED Backlit Monitor				
HP Z Display Z23i 23-inch IPS LED Backlit Monitor				
HP Z Display Z22i 21.5-inch IPS LED Backlit Monitor				
HP DreamColor Z27x Professional Display				
HP DreamColor Z24x Professional Display				

### Storage / Hard Drives

#### SAS Hard Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>SAS Hard Drives for HP Workstations</b>				
600GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	VM647AA	
300GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU967AA	
HP 1.2TB SAS 10K SFF HDD	Y	Y	E2P04AA	
HP 600GB SAS 10K SFF HDD	Y	Y	A2Z21AA	
HP 300GB SAS 10K SFF HDD	Y	Y	A2Z20AA	

#### NOTES

\*For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30GB of system disk is reserved for system recovery software.

Up to (4) 3.5-inch 15K rpm SAS drives=300, 600 GB±2.4 TB max

Up to (4) 2.5-inch 10K rpm SAS drives=300, 600 GB, 1.2 TB±4.8 TB max

SAS controller add-in card required

3rd and 4th SFF SAS HDDs will be automatically installed into a single 2.5" external bay adapter Removable Boot Drive option

#### SATA Hard Drives

#### SATA (Serial ATA) Hard Drives for HP Workstations

500GB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	LQ036AA	
1TB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	LQ037AA	
2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	QB576AA	
3.0TB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	QF298AA	
500GB SATA 7.2K SED SFF HDD	Y	Y	D8N29AA	

#### NOTES

\*For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30GB of system disk is reserved for system recovery software.

### Supported Components

Up to (4) 3.5-inch 7200 rpm SATA drives<sup>1</sup>-500 GB, 1.0, 2.0, 3.0, 4.0\* TB<sup>2</sup>16.0 TB max  
 Up to (1) 2.5-inch SATA Self-Encrypting Drive (SED)<sup>3</sup>-500 GB Opal 1  
 Removable Boot Drive option  
 4TB drive planned to be available late 2014

#### SATA Solid State Drives (SSDs)      HP Solid State Drives (SSDs) for Workstations

HP 128GB SATA 6Gb/s SSD	Y	Y	A3D25AA
HP 256GB SATA 6Gb/s SSD	Y	Y	A3D26AA
HP 512GB SATA 6Gb/s SSD	Y	Y	D8F30AA
HP 1TB SATA 6Gb/s SSD	Y	Y	F3C96AA
HP 256GB SATA 6Gb/s SED SSD	Y	Y	D8N28AA
Intel Pro 1500 180GB SATA SSD	Y	Y	F5Z70AA
Samsung Enterprise 240GB SATA SSD	Y	Y	F0W94AA
Samsung Enterprise 480GB SATA SSD	Y	Y	F0W95AA

#### NOTES<sup>4</sup>

\*For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30GB of system disk is reserved for system recovery software.

Up to (4) 2.5-inch 6Gb/s SATA Solid State Drives<sup>1</sup>-128, 256, 512 GB, 1 TB<sup>2</sup>4.0 TB max  
 Up to (1) 2.5-inch 6Gb/s SATA Self-Encrypting Solid State Drive (SED SSD)<sup>3</sup>-256 GB Opal 2  
 Up to (4) 2.5-inch Intel Pro 1500 6Gb/s SATA Solid State Drive<sup>4</sup>-180 GB<sup>5</sup>720 GB max  
 Up to (4) 2.5-inch Samsung Enterprise 6Gb/s SATA Solid State Drives<sup>6</sup>-240, 480 GB<sup>7</sup>1.9 TB max  
 3rd and 4th SSDs will be automatically installed into a single 2<sup>1</sup> 5.25" external bay adapter

#### PCIe SSDs      PCIe SSDs for HP Workstations

HP Z Turbo Drive 512GB SSD	Y	Y	G3G89AA
HP Z Turbo Drive 256GB SSD	Y	Y	G3G88AA

#### NOTES<sup>8</sup>

Up to (2) PCI Express Solid State Drives<sup>9</sup>-256, 512 GB<sup>10</sup>1.0 TB max  
 PCIe SSDs are not available with SAS controller and/or SAS HDDs

Up to (2) PCI Express Solid State Drives<sup>11</sup>-256, 512 GB<sup>12</sup>1.0 TB max  
 PCIe SSDs are not available with SAS controller and/or SAS HDDs



### Supported Components

#### Hard Drive Controllers

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Integrated SATA 6.0 Gb/s Controller</b>				
Integrated SATA 6.0 Gb/s Controller	Y	N		Two ports
<b>Factory integrated RAID on motherboard for SATA drives</b>				
RAID 0 Configuration – Striped Array	Y	N		Note 1
RAID 1 Configuration – Mirrored Array	Y	N		Note 1
RAID 10 Configuration – Striped/Mirrored Array	Y	N		Note 1
RAID 0 Data Configuration -- Boot/OS Drive + 2 Drive Striped Array	Y	N		Note 1
<b>LSI 9217-4i4e 8-port SAS 6Gb/s RAID Card</b>				
LSI 9217-4i4e 8-port SAS 6Gb/s RAID Card	Y	Y	E0X20AA	
<b>LSI 9270-8i SAS 6Gb/s ROC RAID Card and iBBU9 Battery Backup Unit</b>				
LSI 9270-8i SAS 6Gb/s ROC RAID Card	Y	Y	E0X21AA	

SATA hardware RAID is supported on Linux systems that have support for the Intel RSTe technology. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix) for RAID capabilities with Linux.

All drives must be identical in type and capacity.

RAID arrays greater than 2 TB are fully supported.

**NOTE 1**-Requires hard drives with identical speed, capacity, and interface. Specific user-configured hardware SAS RAID configurations are supported on this Linux system. For details, please visit [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

**NOTE 2**-Specific user-configured hardware SAS RAID configurations are supported on this Linux system. IS=Striping of 2 or more HDDs into a single logical volume

IM=Mirroring of 2 HDDs into a single logical volume

IME=Mirroring of 3 or more HDDs into a single logical volume.

For details, please visit [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

### Supported Components

#### Graphics

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes	Supported # of cards	Mixed?
<b>Professional 2D</b>						
NVIDIA NVS 310 512MB Graphics	Y	Y	A7U59AA	Note 1, 2	4	–
NVIDIA NVS 315 1GB Graphics	Y	Y	E1U66AA	Note 2	4	–
NVIDIA NVS 510 2GB Graphics	Y	Y	C2J98AA	Note 1	2	–
<b>Graphics Cable Adapters</b>						
HP DisplayPort To DVI-D Adapter (4-Pack)	Y	N			1	–
HP DisplayPort To VGA Adapter 2nd	Y	N			1	–
HP DisplayPort To DVI-D Adapter (6-Pack)	Y	N			1	–
HP DisplayPort To DVI-D Adapter (2-Pack)	Y	N			1	–
HP DisplayPort to Dual Link DVI Adapter	Y	Y	NR078AA		1	–
HP DisplayPort To VGA Adapter	Y	Y	AS615AA		1	–
HP DisplayPort To DVI-D Adapter	Y	Y	FH973AA		1	
<b>Entry 3D</b>						
NVIDIA Quadro K620 2GB Graphics	Y	Y	J3G87AA		2	–
NVIDIA Quadro K420 1GB Graphics	Y	Y	J3G86AA		2	–
<b>Mid-range 3D</b>						
NVIDIA Quadro K2200 4GB Graphics	Y	Y	J3G88AA		2	–
AMD FirePro W2100 2GB Graphics	Y	Y	J3G91AA		2	–
AMD FirePro W5100 4GB Graphics	Y	Y	J3G92AA		2	–
<b>High End 3D</b>						
NVIDIA Quadro K4200 4GB Graphics	Y	Y	J3G89AA		2	–
NVIDIA Quadro K5200 8GB Graphics	Y	Y	J3G90AA		2	–
NVIDIA Quadro K6000 12GB Graphics	Y	Y	C2J96AA		1	No

**NOTE 1**—If 1st card is NVS 510, 2nd card must be NVS 510 or NVS 310.

**NOTE 2**—4th NVS 310 or NVS 315 supported as AMO-only

#### High Performance GPU Computing

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
NVIDIA Tesla K40 Workstation Coprocessor	Y	Y	F4A88AA	Note 1
NVIDIA Tesla K20c Compute Processor	Y	Y	C2J97AA	Note 2

**NOTE 1**—Tesla K40 is supported with QK5200, QK620 or QK2200.

Not supported with 2 graphics cards.

Not supported with OS WIN7 32-bit.

Not supported with OS WIN8.0.

**NOTE 2**—Tesla K20 is supported in combination with NVIDIA Quadro K620/K2200/K4200 1st graphics. Not supported with Win7 32-bit OS.

### Supported Components

#### Memory

#### CTO

#### DDR4-2133 ECC Registered DIMMs

	Option Kit Part Number	Support Notes
4GB DDR4-2133 ECC Registered RAM	J9P81AA	1,2
8GB DDR4-2133 ECC Registered RAM	J9P82AA	1,2
16GB DDR4-2133 ECC Registered RAM	J9P83AA	1,2
32GB DDR4-2133 ECC Load Reduced (LR) RAM	J9P84AA	1,2

#### NOTES

For details on the supported memory configurations on the HP Z640 Workstation, please refer to the System Technical Specifications - System Board section of this document.

Each processor supports up to 4 channels of DDR4 memory. To realize full performance at least 1 DIMM must be inserted into each channel.

With single-processor configurations, 4 DIMM slots are available. 4 additional DIMM slots are available with the 2nd CPU & Memory Module.

The CPUs determine the speed at which the memory is clocked. If an 1866MHz capable CPU is used in the system, the maximum speed the memory will run at is 1866MHz, regardless of the specified speed of the memory.

**NOTE 1**-Only registered DDR4 DIMMs are supported.

**NOTE 2**-Maximum memory capacities assume Windows 64-bit operating systems or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resources.

### Multimedia and Audio Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Realtek HD ALC221 Audio	Y	N		

### Optical and Removable Storage

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>HP SlimTray Optical Drives</b>				
HP 9.5mm Slim SuperMulti DVD Writer	Y	Y	K3R64AA	
HP 9.5mm Slim DVD-ROM Drive	Y	Y	K3R63AA	Note 1
HP 9.5mm Slim BDXL Blu-Ray Writer	Y	Y	K3R65AA	Note 2
<b>HP DX115 Removable Drive Enclosure</b>				
HP DX115 Removable HDD Carrier	N	Y	NB792AA	
HP DX115 Removable HDD Frame/Carrier	N	Y	FZ576AA	
<b>HP 15-in-1 Media Card Reader</b>				
HP 15-in-1 Media Card Reader	Y	Y	G1S79AA	

Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other

### Supported Components

lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

With Blu-ray, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

**NOTE 1** - Not supported as a 2nd Optical Drive.

**NOTE 2** - Cannot be ordered in combination with another Blu-ray Writer.

### Controller Cards

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP IEEE 1394b FireWire® PCIe Card	Y	Y	NK653AA	
HP Thunderbolt™ 2 PCIe 1-port I/O Card	Y	Y	F3F43AA	Note 1

**NOTE 1** - Compatible with NVIDIA Quadro K620, K2200, K4200, and K5200 only.

### Networking and Communications

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Intel I218LM PCIe GbE Controller	Y	N		
Intel Ethernet I210-T1 PCIe NIC	Y	Y	E0X95AA	
HP X520 10GbE Dual Port Adapter	Y	Y	C3N52AA	
HP 10GbE SFP+ SR Transceiver	Y	Y	C3N53AA	
HP 361T PCIe Dual Port Gigabit NIC	N	Y	C3N37AA	Note 1
Intel 7260 802.11 a/b/g/n PCIe WLAN NIC*	Y	Y	F2P07AA	

**NOTE 1** - Gigabit Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

\*Wireless access point and internet service required. Availability of public wireless access points limited.

### Racking and Physical Security

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Solenoid Hood Lock & Hood Sensor	Y	N		
HP Business PC Security Lock Kit	N	Y	PV606AA	
HP Z6/8 Adjustable Rail Rack Kit, Flush Mount	N	Y	B8S55AA	

### Supported Components

#### Input Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP PS/2 Keyboard	Y	Y	QY774AA	
HP USB Keyboard	Y	Y	QY776AA	
HP USB Smart Card Keyboard	Y	Y	E6D77AA	
HP Wireless Keyboard and Mouse	Y	Y	QY449AA	
HP PS/2 Mouse	Y	Y	QY775AA	
HP USB Optical Mouse	Y	Y	QY777AA	
HP USB 1000dpi Laser Mouse	Y	Y	QY778AA	
HP USB Optical 3-Button 2.9M OEM Mouse	Y	Y	ET424AA	
HP SpaceMouse Pro USB 3D Input Device	N	Y	B4A20AA	
HP SpacePilot Pro 3D USB Intelligent Controller	N	Y	WH343AA	

#### Other Hardware

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Internal USB Port Kit	N	Y	EM165AA	Note 1
HP eSATA PCI Cable Kit	Y	Y	GM110AA	Note 2
HP Serial Port Adapter	Y	Y	PA716A	
HP Optical Bay HDD Mounting Bracket	N	Y	NQ099AA	
HP Power Cord Kit	N	Y	DM293A	
HP Workstation Mouse Pad	Y	N		Japan only
HP ENERGY STAR® Enabled Configuration	Y	N		

**Note 1:** The HP Internal USB Port kit has a single USB 2.0 type A connector.

**Note 2:** No hot plug / hot swap supported

#### Software

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Performance Advisor	Y	Y		Note 1
HP Remote Graphics Software (RGS) 6.0	Y	Y		Note 2
Buy Office	Y	N		Note 3
Foxit PhantomPDF Express	Y	N		
Cyberlink Media Suite & PowerDVD	Y	N		Media playback/authoring software

**NOTE 1:** Available as a free download here=[www.hp.com/go/performanceadvisor](http://www.hp.com/go/performanceadvisor)

**NOTE 2:** Supported operating systems=

- Windows 7 Professional 32/64
- Windows 8 Professional 32/64

### Supported Components

- RHEL v6.5
- SLED 11 SP3

For more information, go to [www.hp.com/go/rgs](http://www.hp.com/go/rgs)

**NOTE 3**—Must select as a Configure to Order option.

### Operating Systems

### Support Notes

Windows 8.1 Pro 64-bit

Windows 7 Professional 64-bit (available through downgrade rights from Windows 8.1 64-bit)\*\*

Windows 7 Professional (MSNA) 64-Bit\*

(National Academic)

HP Linux Installer Kit

Red Hat Enterprise Linux (RHEL) Workstation - Paper License (1yr)

Note 1

\* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows functionality. See <http://www.microsoft.com>.

\*\* This system is preinstalled with Windows® 7 Pro software and also comes with a license and media for Windows 8.1 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

**NOTE 1**—This second OS must be ordered with the HP Linux Installer Kit as the first OS.

### System Technical Specifications


<b>System Board</b>	
<b>System Board Form Factor</b>	Main System Board= 24 x 31 cm 9.6 x 12.2 inches  2nd CPU/Memory Board (optional)= 14.9 x 29.2 cm 5.85 x 11.50 inches
<b>Processor Socket</b>	LGA2011R3 1st CPU on system board 2nd CPU on optional 2nd CPU/Memory Module
<b>CPU Bus Speed</b>	QPI=Up to 9.6GT/second, depending on processor
<b>Chipset</b>	Intel® C612 Chipset
<b>Super I/O Controller</b>	Nuvoton NPCD379H (SIO-12)
<b>Memory Expansion Slots</b>	4 on system board(CPU0) + 4 on optional 2nd CPU/Memory Module(CPU1)
<b>Memory Type Supported</b>	DDR4, RDIMM (Registered), ECC=4GB, 8GB and 16GB DDR4, LRDIMM (Load Reduced), ECC=32GB
<b>Memory Modes</b>	NUMA (Non-Uniform Memory Architecture), Memory Node Interleave
<b>Memory Speed Supported</b>	1600MHz, 1866MHz and 2133MHz

<b>Single Processor</b>						
		<b>CPU0</b>				
	<b>Notes</b>	<b>DIMM1</b>	<b>DIMM3</b>	<b>DIMM6</b>	<b>DIMM8</b>	<b>Rating</b>
<b>4GB</b>	*	4GB				Fair
<b>8GB</b>		4GB 8GB			4GB	Good Fair
<b>12GB</b>		4GB	4GB		4GB	Better
<b>16GB</b>		4GB 8GB	4GB	4GB	4GB 8GB	Best Good
<b>24GB</b>	~	8GB	4GB	4GB	8GB	Better
<b>32GB</b>		8GB 16GB	8GB	8GB	8GB 16GB	Best Good
<b>48GB</b>	~	16GB	8GB	8GB	16GB	Better
<b>64GB</b>		16GB 32GB	16GB	16GB	16GB 32GB	Best Good
<b>128GB</b>		32GB	32GB	32GB	32GB	Best

### System Technical Specifications

Dual Processor										
CPU0						CPU1				
	Notes	DIMM1	DIMM3	DIMM6	DIMM8	DIMM1	DIMM3	DIMM6	DIMM8	Rating
8GB		4GB				4GB				Fair
16GB		4GB			4GB	4GB			4GB	Good
		8GB				8GB				Fair
32GB	~	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	Best
		8GB			8GB	8GB			8GB	Good
		16GB				16GB				Fair
48GB	~	8GB	4GB	4GB	8GB	8GB	4GB	4GB	8GB	Better
64GB		8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	Best
96GB		16GB	8GB	8GB	16GB	16GB	8GB	8GB	16GB	Better
128GB		16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	Best
		32GB			32GB	32GB			32GB	Good
256GB		32GB	32GB	32GB	32GB	32GB	32GB	32GB	32GB	Best

#### Memory Loading Order<sup>2</sup>

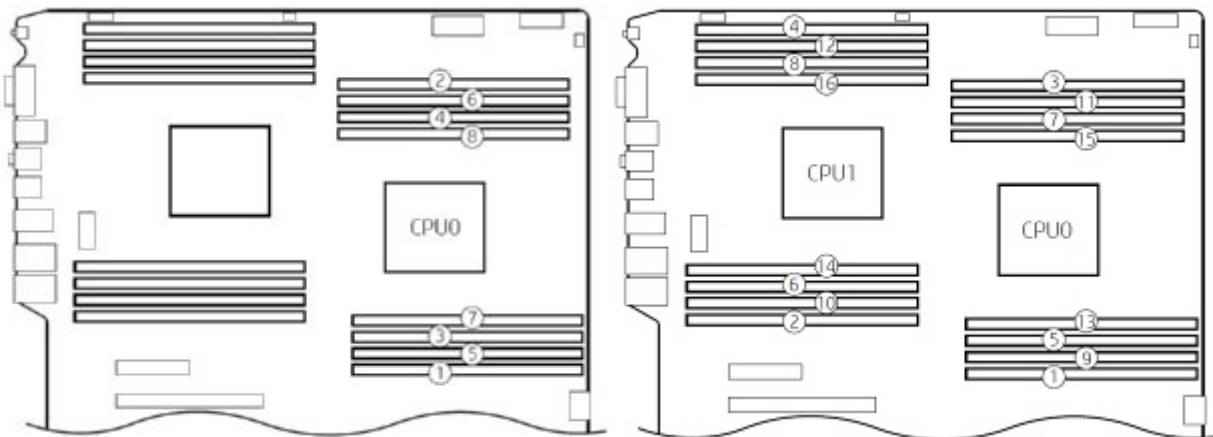

<b>Maximum Memory</b>	Supports up to 256GB with two processors
<b>Memory Configuration (Supported)</b>	<ul style="list-style-type: none"> <li>Not all memory configurations possible are represented above.</li> <li>Only Registered and LR ECC DIMMs are supported.</li> <li>Do not install memory modules into memory slots if corresponding processor is not installed.</li> <li>Dual processor configurations with memory modules installed for only one processor is not supported.</li> <li>RDIMM (Registered) and LRDIMM (Load Reduced) memory cannot be mixed. All memory installed in the system must be either RDIMM or LRDIMM.</li> </ul>
<b>PCI Express Connectors</b>	<p><b>Slot 1 (top)</b><sup>2</sup> PCI Express Gen2 x1 with open-ended connector* Full-height, Half-length (not available when 2nd CPU/Memory Module is installed)</p> <p><b>Slot 2</b><sup>2</sup> PCI Express Gen3 x16 Full-height, Full-length (with extender)</p> <p><b>Slot 3</b><sup>2</sup> PCI Express Gen2 x4 with open-ended connector*</p>



### System Technical Specifications

	Full-height, Full-length (with extender)	
	<b>Slot 4</b> PCI Express Gen3 x8 with open-ended connector* Full-height, Full-length (with extender)	
	<b>Slot 5</b> PCI Express Gen3 x16 Full-height, Full-length (with extender)	
	* Open-ended connector allows a greater bandwidth (e.g. x16) card to be installed physically into a lower bandwidth connector/slot	
<b>PCI Connectors (5.0V)</b>	<b>Slot 6</b> PCI 32bit/33MHz Full-height, Full-length (with extender)	
<b>Supported Drive Interfaces</b>	<b>SATA</b>	2 SATA @6Gb/s, supports RAID 0, 1 and NCQ. 4 sSATA @6Gb/s, Supports RAID 0,1,10 and NCQ. Factory integrated RAID is Microsoft Windows only.
	<b>Serial Attached SCSI</b>	Requires Optional PCIe card
<b>Integrated RAID</b>	SATA=RAID 0, 1 SSATA=RAID 0, 1, 10 RAID 0 configuration - striped array (supported and configure to order) RAID 1 configuration - mirrored array (supported and configure to order) RAID 5 parity striping (supported but not configure to order) RAID 10 striped and mirrored array.	
	*HW RAID functionality not supported by Linux. Use SW RAID functionality provided in the Red Hat Operating system instead	
<b>Integrated Graphics</b>	No	
<b>Network Controller</b>	Integrated Intel I-218 Gbit LAN Memory Integrated 3KB receive buffer and 3KB transmit buffer Data rates supported 10/100/1000 Mb/s Compliance IEEE 802.1as, 802.1p, 802.1Q, 802.3, 802.3ab, 802.3az, 802.3i 802.3u, 802.3x, 802.3z Bus architecture PCIe 1.0 x1 and SMBus Power requirement 0.5 watts Boot ROM support Network transfer rates= <ul style="list-style-type: none"> <li>10BASE-T (half-duplex) 10 Mb/s</li> <li>10BASE-T (full-duplex) 20 Mb/s</li> <li>100BASE-TX (half-duplex) 100 Mb/s</li> <li>1000BASE-T (full-duplex) 2000 Mb/s</li> <li>100BASE-TX (full-duplex) 200 Mb/s</li> </ul> Management capabilities=WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostics. AMT 9.1 support, vPro compliant	
<b>SATA Connectors</b>	Supported on all SATA and sSATA ports configurable with optional eSATA* After-Market Option cable kit) * hot plug / hot swap not supported with eSATA	
<b>IEEE 1394 Connector(s)</b>	<b>Front</b>	None
	<b>Rear</b>	2 IEEE 1394b (requires optional PCIe card)
	<b>Internal</b>	None
<b>USB Connector(s)</b>	<b>Front</b>	4 - USB 3.0

### System Technical Specifications

	<b>Rear</b>	4 - USB 3.0 2 - USB 2.0
	<b>Internal</b>	One 2x5 header with two USB 2.0 ports. One 2x10 header with one USB 3.0 and one USB 2.0 port. Supports either one HP Internal USB Port Kit or one USB Media Card Reader. Each Internal Port Kit has one USB 2.0 connector.
<b>HD Integrated Audio</b>	Realtek ALC221	
<b>Flash ROM</b>	Yes	
<b>CPU Fan Header</b>	One for each CPU socket	
<b>Chassis Fan Header</b>	Rear System Chassis Fan Header Front System Chassis Fan Header	
<b>CMOS Battery Holder - Lithium</b>	Yes	
<b>Power Supply Headers</b>	Yes	
<b>Power Switch, Power LED &amp; Hard Drive LED Header</b>	Yes (includes speaker and intrusion sensor signals)	
<b>Clear Password Jumper</b>	Yes	
<b>Serial Port</b>	One internal header	
<b>Parallel Port</b>	No	
<b>Keyboard/Mouse</b>	PS/2	

### Z640 Required Power Supply Info

<b>Power Supply</b>	<b>925W 90% Efficient, Custom PSU (Wide Ranging, Active PFC)</b>	
<b>Operating Voltage Range</b>	<b>90–269 VAC</b>	
<b>Rated Voltage Range</b>	<b>100–240 VAC</b>	<b>118 VAC</b>
<b>Rated Line Frequency</b>	<b>50–60 Hz</b>	<b>400 Hz</b>
<b>Operating Line Frequency Range</b>	<b>47–66 Hz</b>	<b>393-407 Hz</b>
<b>Rated Input Current</b>	<b>11.3 A @ 100-240 V</b>	<b>11.3 A @ 400 V</b>
<b>Heat Dissipation (Configuration and software dependent)</b>	<b>Typical = 2105 btu/hr (530 kcal/hr) Maximum = 3629 btu/hr (914 kcal/hr)</b>	
<b>Power Supply Fan</b>	<b>92x25 mm variable speed</b>	
<b>ENERGY STAR Qualified (Configuration dependent)</b>	<b>Yes</b>	
<b>80 PLUS® Compliant</b>	<b>Yes, 90% Efficient</b>  <b>The Z640 925W power supply efficiency report can be found at this link= TBD</b>	
<b>FEMP Standby Power Compliant @115V (&lt;2W in S5 - Power Off)</b>	<b>Yes</b>	
<b>EuP Compliant @ 230V (&lt;0.5 W in S5 - Power Off)</b>	<b>Yes</b>	
<b>CECP Compliant @ 220V (&lt;4W in S3 - Suspend to RAM)</b>	<b>Yes Configuration dependent</b>	
<b>Power Consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3) (Instantly Available PC)</b>	<b>&lt;20W</b>	
<b>Built-in Self Test LED</b>	<b>Yes</b>	

### System Technical Specifications

<b>Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)</b>	<b>Yes</b>
---------------------------------------------------------------------------------------	------------

<b>Access Panel Solenoid Lock Header</b>	<b>Yes</b>
<b>Access Panel Intrusion</b>	<b>Yes</b>
<b>Sensor Header</b>	<b>Integrated in Front User Interface (Power Switch, Power LED, HDD LED, Speaker) Cable</b>
<b>Multibay Header</b>	<b>No</b>
<b>Integrated Gigabit Ethernet</b>	<b>Integrated Intel I-218 Gbit LAN</b>
<b>Wake on LAN</b>	<b>Yes</b>
<b>ASF 1.0/2.0 (Alert Standard Format)</b>	<b>No</b>
<b>TPM</b>	<b>Infineon TPM 1.2 Certified</b>
<b>Password Clear Header</b>	<b>Yes</b>
<b>AUX IN (audio)</b>	<b>No</b>
<b>Clear CMOS Button</b>	<b>Yes</b>
<b>Memory Fan Header</b>	<b>CPU0 Memory Fan Header†CPU1 Memory Fan Header</b>

### SYSTEM CONFIGURATION

<b>Example Z640 Configuration #1</b>  <b>ENERGY STAR QUALIFIED</b>	Processor	1x Intel Xeon E5-1603 v3 (Quad-core)					
	Memory	1x 4GB DDR4-2133 (Registered DIMM)					
	Graphics	1x NVIDIA NVS 310					
	Disks/Optical	1x 500GB SATA 7200 †1x Slim DVD-ROM SATA					
	Power Supply	925W 90% Custom PSU					
	Other	N/A					
	<b>Energy Consumption</b>		115 VAC		230 VAC		100 VAC
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)		56.68 W		55.98 W		55.96 W	
Windows Busy Typ (S0)		110.76 W		106.57 W		110.89 W	
Windows Busy Max (S0)		114.16 W		112.25 W		114.16 W	
Sleep (S3)		2.26 W	2.16 W	2.49 W	2.39 W	2.25 W	2.15 W
Off (S5)		0.924 W	0.805 W	1.02 W	0.992 W	0.815 W	0.792 W
Zero Power Mode (ErP)		0.203 W		0.388 W		0.201 W	
<b>Heat Dissipation**</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	193.39 btu/hr		191.00 btu/hr		190.94 btu/hr	
	Windows Busy Typ (S0)	377.91 btu/hr		363.61 btu/hr		378.36 btu/hr	
	Windows Busy Max (S0)	389.51 btu/hr		383.00 btu/hr		389.51 btu/hr	
	Sleep (S3)	7.72 btu/hr	7.37 btu/hr	8.51 btu/hr	8.17 btu/hr	7.69 btu/hr	7.33 btu/hr
	Off (S5)	3.15 btu/hr	2.75 btu/hr	3.48 btu/hr	3.38 btu/hr	2.78 btu/hr	2.70 btu/hr
	Zero Power Mode (ErP)	0.695 btu/hr		1.325 btu/hr		0.668 btu/hr	

### System Technical Specifications

<b>Example Z640 Configuration #2</b>	Processor	2x Intel Xeon E5-2643 v3 (Dual Six-core)					
	Memory	8x 8GB DDR4-2133 (Registered DIMM)					
	Graphics	1x NVIDIA Quadro K5200					
	Disks/Optical	4x 2TB SATA 7200 71x Slim SuperMulti DVDRW SATA					
	Power Supply	925W 90% Custom PSU					
	Other	N/A					
<b>Energy Consumption</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	82.62 W		82.36 W		83.10 W	
	Windows Busy Typ (S0)	399.09 W		397.52 W		399.46 W	
	Windows Busy Max (S0)	497.57 W		495.56 W		492.48 W	
	Sleep (S3)	4.718 W	4.612 W	4.864 W	4.759 W	4.699 W	4.581 W
	Off (S5)	0.992 W	0.813 W	1.042 W	0.988 W	0.823 W	0.793 W
	Zero Power Mode (ErP)	0.204 W		0.384 W		0.202 W	
<b>Heat Dissipation**</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	281.90 btu/hr		281.01 btu/hr		283.54 btu/hr	
	Windows Busy Typ (S0)	1361.70 btu/hr		1356.34 btu/hr		1362.95 btu/hr	
	Windows Busy Max (S0)	1697.71 btu/hr		1690.85 btu/hr		1680.34 btu/hr	
	Sleep (S3)	16.09 btu/hr	15.74 btu/hr	16.60 btu/hr	16.24 btu/hr	16.03 btu/hr	15.63 btu/hr
	Off (S5)	3.15 btu/hr	2.77 btu/hr	3.56 btu/hr	3.37 btu/hr	2.81 btu/hr	2.71 btu/hr
	Zero Power Mode (ErP)	0.694 btu/hr		1.311 btu/hr		0.689 btu/hr	

### DECLARED NOISE EMISSIONS

<b>System Configuration (Entry level)</b>	<b>Processor Info</b>	1x Intel Xeon E5-2650 v3 2.30 GHz
	<b>Memory Info</b>	2x 8 GB DDR4-2133 MHz RDIMM
	<b>Graphics Info</b>	1x NVIDIA NVS 310
	<b>Disks/Optical/Floppy</b>	1x 1 TB SATA 7200 RPM 1x Slim ODD

<b>Declared Noise Emissions</b> (in accordance with ISO 7779 and ISO 9296)		<b>Sound Power</b> (LWAd, bels)	<b>Deskside Sound Pressure</b> (LpAm, decibels)
	<b>Idle</b>	3.3	16
	<b>Hard drive Operating</b> (random reads)	3.5	17
	<b>DVD-ROM Operating</b> (sequential reads)	4.5	31

<b>System Configuration (High-end)</b>	<b>Processor Info</b>	2x Intel Xeon E5-2697 v3 2.60 GHz
	<b>Memory Info</b>	8x 16 GB DDR4-2133 MHz RDIMM
	<b>Graphics Info</b>	1x NVIDIA Quadro K4200
	<b>Disks/Optical/Floppy</b>	2x 600 GB SAS 15K RPM 3.5" HDD 1x Slim ODD

### System Technical Specifications

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	4.4	16
	Hard drive Operating (random reads)	3.5	17
	DVD-ROM Operating (sequential reads)	4.5	31

### ENVIRONMENTAL DATA

Environmental Requirements	Temperature	Operating=5° to 35° C (40° to 95° F) Non-operating=-40° to 60° C (-40° to 140° F)
	Humidity	Operating=8% to 85% RH, non-condensing Non-operating=8% to 90% RH, non-condensing
	Maximum Altitude	Operating=3,000 m (10,000 feet) Non-operating=9,100 m (30,000 feet)
	Dynamic (new)	<p><b>Shock</b></p> <p>Operating=½-sine=40g, 2-3ms (~62 cm/sec) Non-operating=½-sine=160 cm/s, 2-3ms (~105g) square=20 g, 422 cm/s</p> <p><b>NOTE=</b> Values represent individual shock events and do not indicate repetitive shock events.</p> <p><b>Vibration</b></p> <p>Operating random=0.5g (rms), 5-300 Hz, up to 0.0025g<sup>2</sup>/Hz Non-operating random=2.0g (rms), 5-500 Hz, up to 0.0150 g<sup>2</sup>/Hz</p> <p><b>NOTE=</b> Values do not indicate continuous vibration.</p>
	Cooling	Above 1524m (5,000 ft.) altitude, maximum operating temperature is de-rated by 1°C (1.8°F) per 305m (1,000 ft.) elevation increase

### Physical Security and Serviceability

Access Panel	Tool-less Includes system board and memory information
Optical Drive	Tool-less, no carrier or rails required
Hard Drives	Tool-less  Integrated blind-mate drive carriers  Optional 5.25" external bay carriers
Expansion Cards	Tool-less
Processor Socket	1st socket on main system board. 2nd socket on optional 2nd CPU/Memory Module.
Green User Touch Points	Yes, on primary serviceable components
Color-coordinated Cables and Connectors	Yes
Memory	Tool-less
System Board	Tool-less 2nd CPU/Memory Module=Tool-less
Dual Color Power and HD LED on Front of Computer	Yes

### System Technical Specifications

<b>Configuration Record SW</b>	Yes
<b>Over-Temp Warning on Screen</b>	Yes, at POST screen on reboot
<b>Restore CD/DVD Set</b>	Yes, restores the computer to its original factory shipping image - Can be obtained via HP Support.
<b>Dual Function Front Power Switch</b>	Yes, also acts as a reset switch when held for 4 seconds.
<b>Padlock Support</b>	No
<b>Cable Lock Support</b>	Yes, Kensington Cable Lock (optional)-Prevents entire system theft only. 3mm x 7mm slot at rear of system
<b>Universal Chassis Clamp Lock Support</b>	No
<b>Solenoid Lock and Hood Sensor</b>	Access Panel Solenoid Lock-Yes (optional). Activated remotely to prevent system entry. Access Panel Intrusion Sensor-Yes (optional).
<b>Rear Port Control Cover</b>	No
<b>Removable Media Write/Boot Control</b>	Yes, user can prevent the workstation from writing to or booting from removable media.
<b>Power-On Password</b>	Yes, prevents an unauthorized person from booting up the computer.
<b>Setup Password</b>	Yes, prevents an unauthorized person from changing the system configuration.
<b>3.3V Aux Power LED on System PCA</b>	Yes
<b>NIC LEDs (integrated) (Green &amp; Amber)</b>	Yes
<b>CPUs and Heatsinks</b>	CPU heatsink removal requires a T-15 Torx or flat blade screwdriver. CPU removal is tool-less.
<b>Power Supply Diagnostic LED</b>	Yes
<b>Front Power Button</b>	Yes
<b>Rear Power Button</b>	Yes
<b>Front Power LED</b>	Yes, white (normal), red (fault)
<b>Front Hard Drive Activity LED</b>	Yes, green
<b>Front ODD Activity LED</b>	Yes
<b>Internal Speaker</b>	Yes
<b>System/Emergency ROM</b>	Recovers corrupted system BIOS
<b>Flash Recovery</b>	
<b>Cooling Solutions</b>	Air cooled forced convection
<b>Power Supply Fans</b>	1 - 92mm
<b>CPU Heatsink Fan</b>	1st CPU-1 - 92mm Optional 2nd CPU-1 - 92mm
<b>Memory Heatsink Fan</b>	Optional 2nd CPU/Memory Module-rear bank-1 - 80mm.
<b>HP Advanced System Diagnostics Offline Edition</b>	<p>HP Vision Diagnostics Offline Edition The diagnostics utility enables you to perform testing and to view critical computer hardware and software configuration information from various sources. This utility enables you to-</p> <ul style="list-style-type: none"> <li>• Run diagnostics</li> <li>• View the hardware configuration of the system</li> </ul> <p>Key features and benefits HP Vision Diagnostics simplifies the process of effectively identifying, diagnosing, and isolating the</p>



### System Technical Specifications

	<p>hardware issues. In addition to robust management tools, service tools can be invaluable in quickly resolving system problems. To streamline the service process and resolve problems quickly, it is necessary to have the right information available at the time that a service call is placed. The primary information requirement, which is also the one that provides the greatest Vision into potential system issues, is the configuration of the system. Vision diagnostics helps provide higher system availability.</p> <p>Typical uses of the Vision Diagnostics are<sup>2</sup></p> <ul style="list-style-type: none"> <li>• Testing and diagnosing apparent hardware failures</li> <li>• Documenting system configurations for upgrade planning, standardization, inventory tracking, disaster recovery, and maintenance</li> <li>• Sending configuration information to another location for more in-depth analysis</li> <li>• Entered using F2</li> </ul>
<b>Access Panel Key Lock</b>	Yes, prevents removal of the access panel and all internal components including devices installed in the external 5.25" bays.
<b>Trusted Platform Module Chip with optional ProtectTools Software</b>	Yes, Infineon TPM 1.2 Certified
<b>Integrated Chassis Handles</b>	Yes
<b>Power Supply</b>	Tool-less. Includes integrated handle.
<b>PCI Card Retention</b>	Yes, tool-less Rear (all) Middle (full-height cards) Front (full-length cards with extender)\
<b>Flash ROM</b>	Yes
<b>Diagnostic Power Switch LED on board</b>	Yes
<b>Clear Password Jumper</b>	Yes
<b>Clear CMOS Button</b>	Yes
<b>CMOS Battery Holder</b>	Yes
<b>DIMM Connectors</b>	Yes

### BIOS

<b>BIOS 32-bit Services</b>	Standard BIOS 32-Bit Service Directory Proposal v0.4
<b>PCI 3.0 Support</b>	Full BIOS support for PCI Express through industry standard interfaces
<b>ATAPI</b>	ATAPI Removable Media Device BIOS Specification Version 1.0
<b>BBS</b>	BIOS Boot Specification v1.01.
<b>WMI Support</b>	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
<b>BIOS Boot Spec 1.01+</b>	Provides more control over how and from what devices the workstation will boot
<b>BIOS Power On</b>	Users can define a specific date and time for the system to power on
<b>ROM Based Computer Setup Utility (F10)</b>	Review and customize system configuration settings controlled by the BIOS

### System Technical Specifications

<b>System/Emergency ROM Flash Recovery with Video</b>	Recovers system BIOS in corrupted Flash ROM
<b>Replicated Setup</b>	Saves BIOS settings to diskette or USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).
<b>SMBIOS</b>	System Management BIOS 2.7 for system management information
<b>Boot Control</b>	Disables the ability to boot from removable media on supported devices
<b>Memory Change Alert</b>	Alerts management console if memory is removed or changed
<b>Thermal Alert</b>	Monitors the temperature state within the chassis. Three modes <sup>-</sup> <ul style="list-style-type: none"> <li>• NORMAL - normal temperature ranges.</li> <li>• ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown.</li> <li>• SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs</li> </ul>
<b>Remote ROM Flash</b>	Provides secure, fail-safe ROM image management from a central network console
<b>ACPI (Advanced Configuration and Power Management Interface)</b>	Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 2.0 for full compatibility with 64-bit operating systems.
<b>Ownership Tag</b>	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
<b>Remote Wakeup/ Remote Shutdown</b>	System administrators can power on, restart, and power off a client computer from a remote location
<b>Instantly Available PC (Suspend to RAM - ACPI sleep state S3)</b>	Allows for very low power consumption with quick resume time
<b>Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)</b>	Allows a new or existing system to boot over the network and download software, including the operating system
<b>ROM revision levels</b>	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS) so that management SW applications can use and report this information.
<b>System board revision level</b>	Allows management SW to read revision level of the system board Revision level is digitally encoded into the HW and cannot be modified
<b>Start-up Diagnostics (Power-on Self-Test)</b>	Assesses system health at boot time with selectable levels of testing
<b>Auto Setup when new hardware installed</b>	System automatically detects the addition of new hardware
<b>Keyboard-less Operation</b>	The system can be booted without a keyboard
<b>Localized ROM Setup</b>	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 12 languages with local keyboard mappings
<b>Asset Tag</b>	Allows the user or MIS to set a unique tag string in non-volatile memory
<b>Per-slot Control</b>	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually
<b>Adaptive Cooling</b>	Fan control parameters are set according to detected hardware configuration for optimal acoustics
<b>Pre-boot Diagnostics</b>	Early (pre-video) critical errors are reported via beeps and blinks on the power LED



### System Technical Specifications

Industry Standard Specification Support	
<b>UEFI Specification Revision</b>	2.3.1
<b>Industry Standard Revision</b>	Supported by the BIOS
<b>ACPI</b>	Advanced Configuration and Power Management Interface, Version 2.0
<b>ATA (IDE)</b>	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
<b>CD Boot</b>	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
<b>EDD</b>	<ul style="list-style-type: none"> <li>Enhanced Disk Drive Specification Version 1.1</li> <li>BIOS Enhanced Disk Drive Specification Version 3.0</li> </ul>
<b>EHCI</b>	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
<b>PCI</b>	<ul style="list-style-type: none"> <li>PCI Local Bus Specification, Revision 2.3</li> <li>PCI Power Management Specification, Revision 1.1</li> <li>PCI Firmware Specification, Revision 3.0, Draft 0.7</li> </ul>
<b>PCI Express</b>	PCI Express Base Specification, Revision 2.0 PCI Express Base Specification, Revision 3.0
<b>PMM</b>	POST Memory Manager Specification, Version 1.01
<b>SATA</b>	<ul style="list-style-type: none"> <li>Serial ATA Specification, Revision 1.0a</li> <li>Serial ATA 3 Gb/s<sup>2</sup>-Serial ATA Specification, Revision 2.5</li> <li>Serial ATA 6 Gb/s<sup>2</sup>-Serial ATA Specification, Revision 3.0</li> </ul>
<b>SPD</b>	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
<b>TPM</b>	Trusted Computing Group TPM Specification Version 1.2
<b>UHCI</b>	Universal Host Controller Interface Design Guide, Revision 1.1
<b>USB</b>	Universal Serial Bus Revision 1.1 Specification  Universal Serial Bus Revision 2.0 Specification  Universal Serial Bus Revision 3.0 Specification
<b>SMBIOS</b>	System Management BIOS Reference Specification, Version 2.7

External BIOS simulator found at <http://h20464.www2.hp.com/index.html>

### Social and Environmental Responsibility

<b>Eco-Label Certifications &amp; Declarations</b>	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks <sup>2</sup> <ul style="list-style-type: none"> <li>ENERGY STAR<sup>®</sup> (energy-saving features available on selected configurations-Windows only)</li> <li>US Federal Energy Management Program (FEMP)</li> <li>China Energy Conservation Program</li> <li>The ECO declaration (TED)</li> </ul>
<b>Batteries</b>	The battery in this product complies with EU Directive 2006/66/EC Battery size=CR2032 (coin cell) Battery type=Lithium Metal  The battery in this product does not contain <sup>2</sup> <ul style="list-style-type: none"> <li>Mercury greater than 5ppm by weight</li> <li>Cadmium greater than 10ppm by weight</li> <li>Lead greater than 40ppm by weight</li> </ul>

### System Technical Specifications

<b>Restricted Material Usage</b>	<p>This product meets the material restrictions specified in HP's General Specification for the Environment. <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf</a></p> <p>Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis.</p>
<b>Low Halogen Statement</b>	<p>This product is low-halogen except for power cords, external cables and peripherals. The following customer-configurable internal components may not be low-halogen: 3 1/2" SAS HDDs, LSI 9270-8i SAS ROC RAID Card, and LSI 9217-4i4e SAS ROC RAID Card. Service parts obtained after purchase may not be low-halogen.</p>
<b>End-of-Life Management and Recycling</b>	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to <a href="http://www.hp.com/recycle">http://www.hp.com/recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. This product is greater than 90% recyclable by weight when properly disposed of at end of life.</p>
<b>Hewlett-Packard Corporate Environmental Information</b>	<p>For more information about HP's commitment to the environment—</p> <p>Global Citizenship Report <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a></p> <p>Eco-label certifications <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html">http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</a></p> <p>ISO 14001 certificates— <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html">http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</a></p>
<b>Additional Information</b>	<ul style="list-style-type: none"> <li>• This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.</li> <li>• <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdata/disassemblyworkstatio.html">http://www.hp.com/hpinfo/globalcitizenship/environment/productdata/disassemblyworkstatio.html</a></li> <li>• Plastic parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.</li> <li>• EPEAT Gold - ENERGY STAR qualified configurations of this product are in compliance with the IEEE 1680 (EPEAT) standard at the Gold level where HP registers workstation products. See <a href="http://ww2.epeat.net/CompanyDetail.aspx?CompanyID=24">http://ww2.epeat.net/CompanyDetail.aspx?CompanyID=24</a> for registration status in your country.</li> </ul>
<b>Packaging</b>	<p>HP Workstation product packaging meets the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/society/gen_specifications.html">http://www.hp.com/hpinfo/globalcitizenship/society/gen_specifications.html</a></p> <ul style="list-style-type: none"> <li>• Does not contain restricted substances listed in HP Standard 011-1 General Specification for the Environment</li> <li>• Does not contain ozone-depleting substances (ODS)</li> <li>• Does not contain heavy metals (lead, mercury, cadmium or hexavalent chromium) in excess of 100 ppm sum total for all heavy metals listed</li> <li>• Maximizes the use of post-consumer recycled content materials in packaging materials</li> <li>• All packaging material is recyclable</li> <li>• All packaging material is designed for ease of disassembly</li> <li>• Reduced size and weight of packages to improve transportation fuel efficiency</li> <li>• Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards formatting</li> </ul>
<b>Packaging Materials</b>	
<b>Internal</b>	Cushions and plastic bags made of low density polyethylene (LDPE).
<b>External</b>	Outer carton, accessories carton, and insert made of corrugated paper board.

### Manageability

<b>Industry Standard Specifications</b>	<p>This product meets the following industry standard specifications for manageability functionality—</p> <ul style="list-style-type: none"> <li>• DASH 1.1 (via Intel® LAN on motherboard)</li> </ul>
<b>Intel Active Management Technology (AMT)</b>	<p>Intel® Active Management Technology (AMT) 9.1</p> <p>An advanced set of remote management features and functionality providing IT administrators the latest</p>



### System Technical Specifications

	<p>and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 9.1 includes the following advanced management functions<sup>2</sup></p> <ul style="list-style-type: none"> <li>• Power Management (on, off, reset, graceful shutdown, sleep and hibernate)</li> <li>• Support in Max Power Savings (Shutdown and Hibernate Modes)</li> <li>• Hardware Inventory (includes BIOS and firmware revisions)</li> <li>• Hardware Alerting</li> <li>• Agent Presence</li> <li>• System Defense Filters</li> <li>• Serial Over LAN (SOL)</li> <li>• IDE Redirect</li> <li>• ME Wake-on-LAN (WOL)</li> <li>• DASH 1.1 compliance</li> <li>• IPv6 Support</li> <li>• Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection</li> <li>• Remote Scheduled Maintenance - pre-schedule when the system connects to the IT or service provider console for maintenance.</li> <li>• Remote Alerts - automatically alert IT or service provider if issues arise</li> <li>• Access Monitor - Provides oversight into Intel® AMT actions to support security requirements</li> <li>• PC Alarm Clock</li> <li>• Microsoft NAP Support</li> <li>• Host Base set-up and configuration</li> <li>• Management Engine (ME) firmware roll back</li> <li>• Local Time Sync to UTC</li> <li>• Remote Memory Dump Command - Creates memory dump for debug</li> </ul>
<b>Intel® vPro™ Technology</b>	<p>The HP Z640 Workstation supports Intel® vPro™ technology when configured as outlined below<sup>2</sup></p> <ul style="list-style-type: none"> <li>• Intel® Xeon® processor E5-1600 v3 product family or E5-2600 v3 product family featuring Intel® vPro™ Technology</li> <li>• Intel® C612 chipset</li> <li>• Intel® I218LM GbE LAN</li> </ul>
<b>Remote Manageability Software Solutions</b>	<p>The HP Z640 Workstation is supported on the following remote manageability software consoles<sup>2</sup></p> <ul style="list-style-type: none"> <li>• LANDesk Management Suite (HP recommended solution)</li> <li>• Microsoft System Center Configuration Manager</li> <li>• HP Client Automation Enterprise</li> </ul> <p>For questions or support for manageability needs, please visit <a href="http://www.hp.com/go/easydeploy">http://www.hp.com/go/easydeploy</a></p>
<b>System Software Manager</b>	<p>For questions or support for SSM, please visit<sup>2</sup> <a href="http://www.hp.com/go/ssm">http://www.hp.com/go/ssm</a></p>
<b>Service, Support, and Warranty</b>	<p>On-site Warranty and Service (<b>Note 1</b>)<sup>2</sup>-Three-years, limited warranty and service offering delivers on-site, next business-day (<b>Note 2</b>) service for parts and labor and includes free telephone support (<b>Note 3</b>) 8am - 5pm. Global coverage (<b>Note 2</b>) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering</p> <p><b>NOTE 1</b><sup>2</sup>-Terms and conditions may vary by country. Certain restrictions and exclusions apply.</p> <p><b>NOTE 2</b><sup>2</sup>-On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.</p> <p><b>NOTE 3</b><sup>2</sup>-Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some countries.</p> <p>HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at <a href="http://www.hp.com/go/lookuptool">http://www.hp.com/go/lookuptool</a>. Additional HP Care Pack Services information by product is available at <a href="http://www.hp.com/hps/carepack">http://www.hp.com/hps/carepack</a>. Service levels and response times for HP Care</p>

### System Technical Specifications

	<a href="#">Packs may vary depending on your geographic location.</a>
<b>Product Change Notification</b>	<ul style="list-style-type: none"><li>• Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile.</li><li>• PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition.</li><li>• Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.</li></ul>

### Stable & Consistent Offerings

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of components designed and tested to work with HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section.

HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers-no special programs, no additional cost-no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

#### Processors

Product #	Offering
J6F20AV	Intel Xeon E5-1620 v3 3.5GHz 4-core 10MB 2133
J6F31AV	Intel Xeon E5-2643 v3 3.4GHz 6-core 20MB 2133 1st
J6F49AV	Intel Xeon E5-2643 v3 3.4GHz 6-core 20MB 2133 2nd
J6F38AV	Intel Xeon E5-2620 v3 2.4GHz 6-core 15MB 1866 1st
J6F56AV	Intel Xeon E5-2620 v3 2.4GHz 6-core 15MB 1866 2nd
J6F36AV	Intel Xeon E5-2630 v3 2.4GHz 8-core 20MB 1866 1st
J6F54AV	Intel Xeon E5-2630 v3 2.4GHz 8-core 20MB 1866 2nd

#### Hard Drives

Product #	Offering
J3J74AV	500GB 7200 RPM SATA 1st Hard Disk Drive
J3J95AV	500GB 7200 RPM SATA 2nd Hard Disk Drive
J3K16AV	500GB 7200 RPM SATA 3rd Hard Disk Drive
J3K36AV	500GB 7200 RPM SATA 4th Hard Disk Drive
J3J75AV	1TB 7200 RPM SATA 1st Hard Disk Drive
J3J96AV	1TB 7200 RPM SATA 2nd Hard Disk Drive
J3K17AV	1TB 7200 RPM SATA 3rd Hard Disk Drive
J3K37AV	1TB 7200 RPM SATA 4th Hard Disk Drive

#### Graphics

Product #	Offering
J1P91AV	NVIDIA NVS 510 2GB 1st Graphics
J1Q03AV	NVIDIA NVS 510 2GB 2nd Graphics
J1P93AV	NVIDIA Quadro K620 2GB 1st Graphics
J1Q05AV	NVIDIA Quadro K620 2GB 2nd Graphics
J1P94AV	NVIDIA Quadro K2200 4GB 1st Graphics
J1Q06AV	NVIDIA Quadro K2200 4GB 2nd Graphics
J1P98AV	AMD FirePro W2100 2GB 1st Graphics
J1Q09AV	AMD FirePro W2100 2GB 2nd Graphics

#### Memory

Product #	Offering
G8X26AV	8GB DDR4-2133 (1x8GB) Registered RAM 1CPU
G8X30AV	16GB DDR4-2133 (2x8GB) Registered RAM 1CPU
G8X37AV	16GB DDR4-2133 (2x8GB) Registered RAM 2CPU
G8X31AV	32GB DDR4-2133 (4x8GB) Registered RAM 1CPU
G8X38AV	32GB DDR4-2133 (4x8GB) Registered RAM 2CPU
G8X41AV	64GB DDR4-2133 (8x8GB) Registered RAM 2CPU

### Stable & Consistent Offerings

G8X32AV	32GB DDR4-2133 (2x16GB) Registered RAM 1CPU
G8X40AV	32GB DDR4-2133 (2x16GB) Registered RAM 2CPU
G8X33AV	64GB DDR4-2133 (4x16GB) Registered RAM 1CPU
G8X42AV	128GB DDR4-2133 (8x16GB) Registered RAM 2CPU

### Optical and Removable Storage

Product #	Offering
F2D70AV	Slim SuperMulti DVDRW SATA 1st Optical Disk Drive
G8U64AV	Slim SuperMulti DVDRW SATA 2nd Optical Disk Drive

### Technical Specifications - Hard Drives

<b>HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations</b>	<b>600GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	600GB		
		<b>Height</b>	1 in±2.54 cm		
		<b>Width</b>		<b>Media Diameter</b> 3.5 in±8.9 cm	
				<b>Physical Size</b>	4 in±10.17 cm
			<b>Interface</b>	SAS	
			<b>Synchronous Transfer Rate (Maximum)</b>	6.0 Gb/s	
			<b>Buffer</b>	16 MB	
			<b>Seek Time (typical reads, includes controller overhead, including settling)</b>		<b>Single Track</b> 0.2 ms
					<b>Average</b> 3.4 ms
					<b>Full Stroke</b> 6.6 ms
			<b>Rotational Speed</b>	15,000 rpm	
			<b>Logical Blocks</b>	1,172,123,568 - 512 byte blocks	
			<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)	
	<b>300GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	300GB		
		<b>Height</b>	1 in±2.54 cm		
		<b>Width</b>		<b>Media Diameter</b> 3.5 in±8.9 cm	
				<b>Physical Size</b>	4 in±10.17 cm
			<b>Interface</b>	SAS	
			<b>Synchronous Transfer Rate (Maximum)</b>	6Gb/s	
			<b>Buffer</b>	16MB	
			<b>Seek Time (typical reads, includes controller overhead, including settling)</b>		<b>Single Track</b> 0.2 ms
					<b>Average</b> 3.4 ms
					<b>Full Stroke</b> 6.6 ms
			<b>Rotational Speed</b>	15,000 rpm	
			<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)	
		<b>300GB SAS 10K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	300GB	
	<b>Height</b>		0.6 in±1.53 cm		
	<b>Width</b>			<b>Media Diameter</b> 2.5 in±6.36 cm	
				<b>Physical Size</b>	2.75 in±6.99 cm
			<b>Interface</b>	SAS 6Gb/s	
			<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s	
			<b>Buffer</b>	64MB	
			<b>Cache</b>	multi-segmentable cache buffer	
			<b>Seek Time (typical reads, includes controller overhead, including settling)</b>		<b>Single Track</b> 0.4 ms (max)
					<b>Average</b> 3.6 ms
					<b>Full Stroke</b> 7.3 ms
			<b>Rotational Speed</b>	10,000 rpm	
			<b>Logical Blocks</b>	585,937,500	

### Technical Specifications - Hard Drives

	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)		
<b>HP 600GB SAS 10K SFF HDD</b>	<b>Capacity</b>	600GB		
	<b>Height</b>	0.6 in <sup>±</sup> 1.53 cm		
	<b>Width</b>	<b>Media Diameter</b>	2.5 in <sup>±</sup> 6.36 cm	
		<b>Physical Size</b>	2.75 in <sup>±</sup> 6.99 cm	
	<b>Interface</b>	SAS 6Gb/s		
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s		
	<b>Buffer</b>	64MB		
	<b>Cache</b>	multi-segmentable cache buffer		
	<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	0.4 ms (max)	
		<b>Average</b>	3.6 ms	
		<b>Full Stroke</b>	7.3 ms	
	<b>Rotational Speed</b>	10,000 rpm		
	<b>Logical Blocks</b>	1,172,123,568		
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)		
<b>HP 1.2TB SAS 10K SFF HDD</b>	<b>Capacity</b>	1.2TB		
	<b>Height</b>	0.6 in <sup>±</sup> 1.53 cm		
	<b>Width</b>	<b>Media Diameter</b>	2.5 in <sup>±</sup> 6.36 cm	
		<b>Physical Size</b>	2.75 in <sup>±</sup> 6.99 cm	
	<b>Interface</b>	SAS 6Gb/s		
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s		
	<b>Buffer</b>	64MB		
	<b>Cache</b>	multi-segmentable cache buffer		
	<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	0.18ms (max)	
		<b>Average</b>	3.5ms	
		<b>Full Stroke</b>	7.17ms	
	<b>Rotational Speed</b>	10,000 rpm		
	<b>Logical Blocks</b>	2,344,225,968		
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)		

<b>SATA (Serial ATA) Hard Drives for HP Workstations</b>	<b>500GB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	500GB	
		<b>Height</b>	1 in <sup>±</sup> 2.5 cm	
	<b>Width</b>	<b>Media Diameter</b>	3.5 in <sup>±</sup> 8.9 cm	
		<b>Physical Size</b>	4 in <sup>±</sup> 10.17 cm	
	<b>Interface</b>	Serial ATA (6.0Gb/s), NCQ enabled		
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s		
	<b>Buffer</b>	16 MB		



### Technical Specifications - Hard Drives

	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2 ms
		<b>Average</b>	11 ms
		<b>Full Stroke</b>	21 ms
	<b>Rotational Speed</b>		7,200 rpm
	<b>Logical Blocks</b>		976,773,168
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>1TB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>		1TB
	<b>Height</b>		1 in±2.54 cm
	<b>Width</b>	<b>Media Diameter</b>	3.5 in±8.9 cm
		<b>Physical Size</b>	4 in±10.17 cm
	<b>Interface</b>		Serial ATA (6.0Gb/s), NCQ enabled
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600 MB/s
	<b>Buffer</b>		64MB
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2 ms
		<b>Average</b>	11 ms
		<b>Full Stroke</b>	21 ms
	<b>Rotational Speed</b>		7,200 rpm
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>		2.0TB
	<b>Height</b>		1 in±2.54 cm
	<b>Width</b>	<b>Media Diameter</b>	3.5 in±8.9 cm
		<b>Physical Size</b>	4 in±10.17 cm
	<b>Interface</b>		Serial ATA (6.0 Gb/s), NCQ Enabled
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600 MB/s
	<b>Buffer</b>		64MB
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.0 ms
		<b>Average</b>	11 ms
		<b>Full Stroke</b>	18 ms
	<b>Rotational Speed</b>		7,200 rpm
	<b>Logical Blocks</b>		3,907,029,168
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>3.0TB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>		3.0TB
	<b>Height</b>		1 in±2.54 cm
	<b>Width</b>	<b>Media Diameter</b>	3.5 in±8.9 cm
		<b>Physical Size</b>	4.0 in±10.17 cm
	<b>Interface</b>		Serial ATA (6.0Gb/s), NCQ enabled
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 6.0 Gb/s
	<b>Buffer</b>		64MB

### Technical Specifications - Hard Drives

<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.6 ms
	<b>Average</b>	11 ms
	<b>Full Stroke</b>	Not Specified
<b>Rotational Speed</b>		7,200 rpm
<b>Operating Temperature</b>		41° to 140° F (5° to 60° C)

<b>500GB SATA 7.2K SED SFF HDD</b>	<b>Capacity</b>	500GB	
	<b>Height</b>	0.275 in±0.7 cm	
	<b>Width</b>		
		<b>Media Diameter</b>	2.5 in±6.36 cm
		<b>Physical Size</b>	2.75 in±6.99 cm
	<b>Interface</b>	Serial ATA (6Gb/s)	
	<b>Synchronous Transfer Rate</b> (Maximum)	Up to 600MB/s	
	<b>Buffer</b>	32MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1 ms
		<b>Average</b>	4.2ms
		<b>Full Stroke</b>	25ms (typical)
	<b>Rotational Speed</b>		7,200 rpm
	<b>Operating Temperature</b>		32° to 140° F (0° to 60° C)

#### HP Solid State Drives (SSDs) for Workstations

<b>HP 128GB SATA 6Gb/s SSD</b>	<b>Capacity</b>	128GB	
	<b>Height</b>	0.28 in±0.7 cm	
	<b>Width</b>		
		<b>Physical Size</b>	2.5 in±6.36 cm
	<b>Interface</b>	SATA 6Gb/s	
	<b>Synchronous Transfer Rate</b> (Maximum)	Up to 500MB/s (Sequential Read)	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	

<b>HP 256GB SATA 6Gb/s SSD</b>	<b>Capacity</b>	256GB
	<b>Height</b>	0.28 in±0.7 cm
	<b>Interface</b>	SATA 6Gb/s
	<b>Synchronous Transfer Rate</b> (Maximum)	Up to 500MB/s (Sequential Read)
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)

<b>HP 512GB SATA 6Gb/s SSD</b>	<b>Capacity</b>	512GB	
	<b>Height</b>	0.28 in±0.7 cm	
	<b>Width</b>		
		<b>Physical Size</b>	2.5 in±6.36 cm
	<b>Interface</b>	6Gb/s SATA	
	<b>Synchronous Transfer Rate</b> (Maximum)	Up to 500MB/s (Sequential Read)	
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)		

### Technical Specifications - Hard Drives

	<b>HP 1TB SATA 6Gb/s SSD</b>	<b>Capacity</b>	1TB
		<b>Height</b>	0.28 in <sup>±</sup> 0.7 cm
		<b>Width</b>	<b>Physical Size</b> 2.5 in <sup>±</sup> 6.36 cm
		<b>Interface</b>	6Gb/s SATA
		<b>Synchronous Transfer Rate (Maximum)</b>	Up to 550MB/s (Sequential Read)
		<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
	<b>Samsung Enterprise 240GB SATA SSD</b>	<b>Capacity</b>	240GB
		<b>Width</b>	<b>Physical Size</b> 2.5 in <sup>±</sup> 6.36 cm
		<b>Interface</b>	SATA 6Gb/s
		<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s
	<b>Samsung Enterprise 480GB SATA SSD</b>	<b>Capacity</b>	480GB
		<b>Width</b>	<b>Physical Size</b> 2.5 in <sup>±</sup> 6.36 cm
		<b>Interface</b>	SATA 6Gb/s
		<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s
	<b>Intel Pro 1500 180GB SATA SSD</b>	<b>Capacity</b>	180GB
		<b>Width</b>	<b>Physical Size</b> 2.5 in <sup>±</sup> 6.36 cm
		<b>Interface</b>	6Gb/s SATA
		<b>Synchronous Transfer Rate (Maximum)</b>	600 Mb/s
		<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
<b>PCIe SSDs for HP Workstations</b>	<b>HP Z Turbo Drive 256GB SSD</b>	<b>Capacity</b>	256GB
		<b>Interface</b>	PCI Express 2.0 x4 electrical x4 physical
		<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
	<b>HP Z Turbo Drive 512GB SSD</b>	<b>Capacity</b>	512GB
		<b>Interface</b>	PCI Express 2.0 x4 electrical x4 physical
		<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)

### Technical Specifications - Hard Drive Controllers

<b>LSI 9217-4i4e 8-port SAS 6Gb/s RAID Card</b>	<b>PCI Bus</b>	8 lanes, PCI Express 3.0
	<b>RAID Levels</b>	Offers Integrated RAID (0, 1, 1E and 10)
	<b>PCI Data Burst Transfer Rate</b>	Half Duplex x8, PCIe, 8000 MB/s
	<b>SAS Bandwidth</b>	<b>Half Duplex</b> 600 MB/s per lane
	<b>PCI Card Type</b>	3.3V Add-in card
	<b>PCI Voltage</b>	12 V ± 10%
	<b>PCI Power</b>	9.8W typical, Airflow min 200 LFM
	<b>Bracket</b>	Full height and low profile
	<b>Certification Level</b>	PCI Express 3.0 compliant
	<b>SAS Processor</b>	LSI SAS2308/ Fusion MPT 2.0
	<b>Internal Connectors</b>	One x4 internal mini-SAS (SFF8087)
	<b>External Connectors</b>	One x4 external mini-SAS (SFF8088)
	<b>Maximum Number of SCSI Devices</b>	256 Non-RAID SAS/SATA devices
	<b>LED Indicators</b>	N/A
	<b>LSI 9270-8i SAS 6Gb/s ROC RAID Card and iBBU9 Battery Backup Unit</b>	<b>PCI Bus</b>
<b>RAID Levels</b>		RAID 0, 1, 5, and 6 RAID spans 10, 50 and 60
<b>PCI Card Type</b>		Low profile, single PCIe slot design with full height bracket.
<b>PCI Voltage</b>		+3.3V Add-in Card
<b>PCI Power</b>		+3.3V, +12V
<b>Certification Level</b>		PCI-Express 3.0
<b>IO Bus</b>		Eight 6Gb/s and 3Gb/s compatible SAS/SATA ports
<b>SAS Processor</b>		LSISAS2208 Dual-Core RAID on Chip (ROC)
<b>Internal Connectors</b>		Two SAS SFF8087 x4 (Mini-SAS)
<b>External Connectors</b>		None
<b>Maximum Number of SCSI Devices</b>		Up to 128 SAS and/or SATA hard drives and SSDs <b>NOTE=HP Workstations do not support this many internal drives.</b>
<b>LED Indicators</b>		Heartbeat LED on card

### Technical Specifications - Graphics

#### NVIDIA NVS 310 512MB Graphics

<b>Form Factor</b>	Low Profile <sup>-</sup> 2.7 inches (H) x 5.7 inches (L), Half-Height
<b>Weight</b>	~142 grams
<b>Graphics Controller</b>	NVIDIA NVS 310 GPU=GF119-825
<b>Bus Type</b>	PCI Express x16, 2.0 compliant
<b>Memory</b>	Size=512MB DDR3 Clock=875Mhz Memory Bandwidth=14GB/s
<b>Connectors</b>	2 x DisplayPort
<b>Maximum Resolution</b>	Up to 2560 x 1600 (digital display) per display.
<b>Image Quality Features</b>	The following video formats are supported <sup>-</sup> - MPEG2 - MPEG4 Part 2 Advanced Simple Profile - H.264 SVC codec support - Support for 3D Blu Ray - VC1 - DivX version 3.11 and later - MVC

A full range of video resolutions are supported including 1080p, 1080i, 720p, 480p and 480i. The NVS 310 GPU provides hardware acceleration for the computationally intensive parts of video processing, as well as provides improved video playback speeds via faster decode and transcode.

#### Display Output

Up to 2 displays in the following configurations<sup>-</sup>

##### DisplayPort output<sup>-</sup>

- Drives two DisplayPort enabled digital display at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card
- Supports 2 monitors up to resolution of 1920 x 1200 at 60 Hz with reduced blanking using DisplayPort 1.2 multi stream topology technology.

##### DVI-D output<sup>-</sup>

- Drives two digital display at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors
- Drives two digital display at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors

##### HDMI output<sup>-</sup>

- NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 x 1080P at 60 Hz using DisplayPort to HDMI cable adaptors

##### VGA display output<sup>-</sup>

- Drives two analog display at resolutions up to 1920 x 1200 at 60 Hz using DisplayPort to VGA cable adaptors

<b>Shading Architecture</b>	Shader Model 5.0
<b>Supported Graphics APIs</b>	DX11, OpenGL 4.1
<b>Available Graphics</b>	Windows 8

### Technical Specifications - Graphics

<b>Drivers</b>	<p>Genuine Windows 7 Professional (64-bit and 32-bit)            Microsoft Windows XP Professional (64-bit and 32-bit)            Red Hat Enterprise Linux(RHEL)            SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)</p> <p>HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site-  <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a></p> <p>SUSE Linux Enterprise drivers may also be obtained from-  <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a></p>
<b>Power Consumption</b>	19.5 Watts
<b>Note</b>	<ol style="list-style-type: none"> <li>1. The thermal solution used on this card is an active fan heatsink.</li> <li>2. Factory configured NVS 310 graphics card have no cable adapters included. Adapters must be ordered separately.</li> <li>3. Option kit NVS 310 includes 2 DP to DVI-D cable adapters.</li> </ol>

#### NVIDIA NVS 315 1GB Graphics (for HP Workstations)

<b>Form Factor</b>	<p>Low Profile-            2.713 inches in height × 5.7 inches in length            Weight-~142 grams</p>
<b>Graphics Controller</b>	<p>NVIDIA NVS 315 (using GF119-825 GPU)            Number of Cores-48 CUDA cores            Max. Power-19.3W            Cooling Solution-Active fan heatsink</p>
<b>Bus Type</b>	PCI Express x16, 2.0 compliant
<b>Memory</b>	<p>Size-1GB DDR3            Clock-875Mhz            Memory Bandwidth-14GB/s</p>
<b>Connectors</b>	<p>DMS-59 output            Cables included-            - For CTO-DMS-59 to DVI cable            - For AMO-DMS-59 to DVI cable and DMS-59 to VGA cable</p>
<b>Maximum Resolution</b>	<p>Maximum number of displays supported-2</p> <p>Maximum Resolution Support-            - DMS-59 to VGA-2048 x 1536 @ 85Hz            - DMS-59 to DVI-1980 x 1200 @ 60Hz            - DMS-59 to DP-2560 x 1600 @ 60Hz</p>
<b>Image Quality Features</b>	<p>See Display Output section.</p> <p>The following video formats are supported-            - MPEG2            - MPEG4 Part 2 Advanced Simple Profile            - H.264 SVC codec support            - Support for 3D Blu Ray            - VC1            - DivX version 3.11 or later</p> <p>A full range of video resolutions are supported including 1080p, 1080i, 720p, 480p and 480i. The NVS 315 GPU provides hardware acceleration for the computationally intensive parts of video processing, as well as provides improved video playback speeds via faster decode and transcode.</p>
<b>Display Output</b>	<p>Up to 2 displays using one of the following DMS-59 cables-            DMS-59 to DVI            DMS-59 to VGA</p>

### Technical Specifications - Graphics

DMS-59 to DP

DisplayPort output<sup>2</sup>

- Drives two DisplayPort enabled digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking, when connected via the DMS-59 to DP adapter.

DVI-D output<sup>2</sup>

- Drives two digital display at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DMS-59 to DVI-D single-link cable adaptor

VGA display output<sup>2</sup>

- Drives two analog display at resolutions up to 2048 × 1536 at 85 Hz using DMS-59 to VGA cable adaptor.

**Shading Architecture**

Shader Model 5.0

**Supported Graphics APIs**

DX11, OpenGL 4.3

**Available Graphics Drivers**

Windows 8  
 Microsoft Windows 7 Professional (64-bit and 32-bit)  
 Microsoft Windows XP Professional (64-bit and 32-bit)  
 Red Hat Enterprise Linux(RHEL)  
 SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site<sup>2</sup>

<http://welcome.hp.com/country/us/en/support.html>

SUSE Linux Enterprise drivers may also be obtained from<sup>2</sup>

<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

**Notes**

1. The thermal solution used on this card is an active fan heatsink.
2. Factory configured graphics card includes DMS-59 to DVI cable.
3. Option kit graphics card includes DMS-59 to DVI and DMS-59 to VGA cables (one each).

**NVIDIA NVS 510 2GB Graphics**

**Form Factor**

Low Profile, 2.713 inches × 6.3 inches, single slot

**Graphics Controller**

NVS 510 GPU  
 Core Clock<sup>2</sup>-797 Mhz  
 Memory Clock<sup>2</sup>-891 Mhz  
 CUDA Cores<sup>2</sup>-192

**Bus Type**

PCI Express x16, Generation 2.0

**Memory**

2GB DDR3

**Connectors**

Four mini-DisplayPort.  
 Four mini-DisplayPort to DisplayPort adapters included.  
 (DisplayPort to DVI-D, DisplayPort to VGA, DisplayPort to HDMI, and DisplayPort to Dual-Link DVI adapters available as separate accessories)

**Maximum Resolution**

Mini-DisplayPort connectors support ultra-high-resolution panels (up to 3840 x 2160 @ 60Hz)

**NOTE**- This card supports up to four displays. For Windows XP, only 2 active displays are supported.

**Image Quality Features**

10-bit internal display processing, including hardware support for 10-bit scan-out

### Technical Specifications - Graphics

#### Display Output

DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2) support.

#### Digital Display Support

##### DisplayPort Output

- Drives four DisplayPort enabled digital display at resolutions up to 3840 × 2160 at 60 Hz with reduced blanking, when connected natively using the 4 DisplayPort connectors on the NVS 510 graphics card.
- DisplayPort Multi-Stream Topology (MST) Technology-Supports various combinations of display resolutions and number of displays when using DisplayPort multi stream topology technology - up to a maximum of 4 monitors at a resolution of 1920 × 1200 at 60 Hz with reduced blanking.

##### DVI-D Output

- Drives four digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors.
- Drives four digital displays at resolutions up to 2560× 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors.

##### HDMI Output

- The NVS 510 graphics board is capable of driving four high definition (HD) panels up to resolutions of 1920 × 1080P at 60 Hz using DisplayPort to HDMI cable adaptors.

#### Analog Display Support

##### VGA display output

- Drives four analog displays at resolutions up to 1920 × 1200 at 60 Hz using DisplayPort to VGA cable adaptors.

#### Supported Graphics APIs

Full Microsoft DirectX 11, Shader Model 5.0 support  
Full OpenGL 4.3 support

#### Available Graphics Drivers

Genuine Windows 7 Professional (64-bit and 32-bit)  
Microsoft Windows XP Professional (64-bit and 32-bit)  
Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation  
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site-

<http://welcome.hp.com/country/us/en/support.html>

#### Note

Heatsink cooler design is active.



### Technical Specifications - Graphics

#### Graphics Cable Adapters **Note**

Graphics Cable Adapter option choice is available starting Feb 1 2013 for the following graphics cards-

NVS 310, Quadro 410, Quadro K5000, FirePro V3900, FirePro W7000

New Graphics Cards introduced after Feb 1 2013 will be eligible for choosing Graphics Cable Adapters, unless otherwise specified.

No cable choice for NVS 300, NVS 510.

Maximum number of cables allowed is 8.

#### NVIDIA Quadro K420 1GB Graphics

##### Form Factor

Low Profile-  
2.713 inches × 6.3 inches, single slot

##### Graphics Controller

NVIDIA Quadro K420  
GPU=GK107

##### Bus Type

PCI Express x16, 2.0 compliant

##### Memory

Size=1GB DDR3  
Clock=891MHz  
Memory Bandwidth=29GB/s

##### Connectors

One dual-link DVI-I connector  
One DisplayPort connector

##### Maximum Resolution

VGA (via adapter cable)-  

- 2048 × 1536 × 32 bpp at 85 Hz

Dual-link DVI

- 2560 × 1600 × 32 bpp at 60 Hz (reduced blanking)

Single-link DVI

- 920 × 1200 × 32 bpp at 60 Hz (reduced blanking)

DisplayPort 1.2

- 3840 × 2160 × 30 bpp at 60 Hz

##### RAMDAC

400 MHz integrated RAMDAC

##### Display Output

Maximum number of displays supported=2

##### Shading Architecture

Shader Model 5.0

##### Supported Graphics APIs

DX11, OpenGL 4.4  
Programming support for CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Python, and Fortran

##### Available Graphics Drivers

Microsoft Windows 8.1  
Microsoft Windows 8  
Microsoft Windows 7  
Linux

##### Notes

1. Factory configured Quadro K420 does not include any video adapters. Adapters must be ordered separately.
2. Option kit Quadro K420 includes one DP to DVI-D adapter.

### Technical Specifications - Graphics

<b>NVIDIA Quadro K620 2GB Graphics</b>	<b>Form Factor</b>	2.713H x 6.3L Single Slot, Low Profile Full Height Profile bracket installed Low Profile bracket included Weight=133 grams
	<b>Graphics Controller</b>	NVIDIA Quadro K620 Graphics Card GM107 GPU 384 CUDA cores Max Power=45 Watts
	<b>Bus Type</b>	PCI Express 2.0 x16
	<b>Memory</b>	2 GB GDDR3, 900 MHz 128-bit memory I/O path 29 GB/s memory bandwidth
	<b>Connectors</b>	1 DL-DVI(I) output, 1 DisplayPort output Factory Configured=No video cable adapter included Option Kit=One DP-to-DVI adapter included with card
	<b>Maximum Resolution</b>	Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as Factory Configuration or Option Kit accessories. DisplayPort 1.2= <ul style="list-style-type: none"> <li>- up to 4096x2160 x 30 bpp @ 60Hz</li> <li>- supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)</li> </ul> Dual Link DVI(I) output= <ul style="list-style-type: none"> <li>- up to 2560 x 1600 x 32 bpp @ 60Hz</li> </ul> Single Link-DVI(I) output= <ul style="list-style-type: none"> <li>- up to 1920 x 1200 x 32 bpp @ 60Hz</li> </ul>
	<b>Image Quality Features</b>	10-bit internal display processing pipeline 10-bit scan-out support
	<b>Display Output</b>	1 Dual-link DVI-I connector 1 Display Port connector
	<b>Shading Architecture</b>	Full Microsoft DirectX 11.1 Shader Model 5.0
	<b>Supported Graphics APIs</b>	OpenGL 4.4 DirectX 11.1 API support includes= <ul style="list-style-type: none"> <li>CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran</li> </ul>
	<b>Available Graphics Drivers</b>	Microsoft Windows 8.1 Microsoft Windows 8 Microsoft Windows 7 Linux  HP qualified drivers may be preloaded or available from the HP support Web site= <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
	<b>Notes</b>	<ol style="list-style-type: none"> <li>1. Factory configured Quadro K620 does not include a video cable adapter. Video cable adapters must be ordered separately.</li> <li>2. Quadro K620 offered as an Option Kit (AMO) includes one DP-to-DVI video cable adapter. Additional cables must be ordered separately.</li> </ol>

---

<b>NVIDIA Quadro K2200 4 GB Graphics</b>	<b>Form Factor</b>	4.38H x 7.97L Single Slot, Full Height
	<b>Weight</b>	240 grams

### Technical Specifications - Graphics

<b>Graphics Controller</b>	NVIDIA Quadro K2200 Graphics Card GM107 GPU 640 CUDA cores Max Power=67.7 Watts
<b>Bus Type</b>	PCI Express 2.0 x16
<b>Memory</b>	4 GB GDDR5, 2500 Mhz 128-bit memory I/O path 80 GB/s memory bandwidth
<b>Connectors</b>	1 DL-DVI(I) output, 2 DisplayPort outputs Factory Configured Option=No video cable adapter included Option Kit=One DP-to-DVI adapter included with card  Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as accessories
<b>Maximum Resolution</b>	DisplayPort= <ul style="list-style-type: none"> <li>- up to 4096 x 2160 x 30 bpp @ 60Hz</li> <li>- supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)</li> </ul> DL-DVI(I) output= <ul style="list-style-type: none"> <li>- up to 2560 x 1600 x 32 bpp @ 60Hz</li> </ul>
<b>Image Quality Features</b>	10-bit internal display processing pipeline 10-bit scan-out support
<b>Display Output</b>	VGA= <ul style="list-style-type: none"> <li>• requires use of DVI-to-VGA and/or DP-to-VGA video cable adapters</li> <li>• 400 MHz integrated RAMDAC</li> <li>• Max resolution=2048 x 1536 x 32 bpp @ 85 Hz</li> </ul> DL-DVI(I)= <ul style="list-style-type: none"> <li>• Max resolution=2560 x 1600 x 32 bpp @ 60 Hz</li> </ul> SL-DVI(I)= <ul style="list-style-type: none"> <li>• Max resolution=1920 x 1200 x 32 bpp @ 60 Hz</li> </ul> DisplayPort= <ul style="list-style-type: none"> <li>• Supports HBR2 and MST</li> <li>• Max resolution=4096 x 2160 x 30 bpp @ 60 Hz (only one monitor can be connected to a Quadro K2200 DisplayPort connector at this resolution)</li> <li>• Max number of DisplayPort daisy-chained monitors or hub connected monitors from a single Quadro K2200 DisplayPort connector=4 with maximum resolution of 1920 x 1200</li> </ul> Maximum number of monitors across all available Quadro K2200 outputs is 4.
<b>Shading Architecture</b>	Full Microsoft DirectX 11.1 Shader Model 5.0
<b>Supported Graphics APIs</b>	OpenGL 4.4 DirectX 11.1 API support includes= <ul style="list-style-type: none"> <li>CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran</li> </ul>
<b>Available Graphics Drivers</b>	Microsoft Windows 8.1 Microsoft Windows 8 Microsoft Windows 7 Linux  HP qualified drivers may be preloaded or available from the HP support Web

### Technical Specifications - Graphics

#### Notes

site-

<http://welcome.hp.com/country/us/en/support.html>

1. Quadro K2200 offered as Factory Configured Option does not include a video cable adapter. Video cable adapters must be ordered separately.
2. Quadro K2200 offered as an Option Kit includes one DP-to-DVI video cable adapter. Additional cables must be ordered separately.
3. A total maximum of 4 active monitors are supported across all display output types. This may be accomplished by using daisy chained DisplayPort 1.2 displays or a DisplayPort 1.2 hub device.
4. A DisplayPort hub device may be used to connect multiple DisplayPort monitors to a single Quadro K2200 DisplayPort output.

#### AMD FirePro W2100 2GB Graphics

##### Form Factor

Low Profile, half length (full-height bracket included)

##### Graphics Controller

AMD FirePro™ W2100 professional graphics

Power<50W

Cooling-Active

##### Bus Type

PCI Express® x8, Generation 3.0

##### Memory

2GB DDR3 memory

Memory Bandwidth-14.4 GB/s

##### Connectors

2x Display Port 1.2 connectors

Factory Configured-No video cable adapter included

Option Kit-One DP-to-DVI adapter included with card

Additional DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as Factory Configuration or Option Kit accessories.

##### Maximum Resolution

DisplayPort 1.2-

- up to 4096x2160 x 30 bpp @ 60Hz

Dual Link DVI(I) (requires adapter cable)-

- up to 2560 x 1600 x 32 bpp @ 60Hz

Single Link-DVI(I)(requires adapter)-

- up to 1920 x 1200 x 32 bpp @ 60Hz

VGA(requires adapter)-

- up to 1920 x 1200 x 32 bpp @ 60Hz

##### Display Output

2 x DisplayPort® 1.2

##### Shading Architecture

Shader Model 5.0

##### Supported Graphics APIs

OpenCL™ 1.2, DirectX® 11 and OpenGL 4.4

##### Available Graphics Drivers

Windows 8.1 (64-bit and 32-bit)

Windows 7 (64-bit and 32-bit)

Red Hat Enterprise Linux (RHEL)

SUSE Linux Enterprise Desktop 11(64-bit and 32-bit)

Ubuntu

HP qualified drivers may be preloaded or available from the HP support Web site-

<http://welcome.hp.com/country/us/en/support.html>

### Technical Specifications - Graphics

**Notes**

Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See [www.amd.com/firepro](http://www.amd.com/firepro) for details

**NVIDIA Quadro K4200 4GB Graphics**

<b>Form Factor</b>	4.376" H x 9.5" L Single Slot, Full Height
<b>Weight</b>	~458 grams (without extender)
<b>Graphics Controller</b>	NVIDIA Quadro K4200 Graphics Card Kepler GK104 GPU 1344 CUDA cores Max Power=108 Watts
<b>Bus Type</b>	PCI Express 2.0 x16
<b>Memory</b>	4 GB GDDR5, 2700 MHz 256-bit memory I/O path 173 GB/s memory bandwidth
<b>Connectors</b>	1 DL-DVI(I) output, 2 DisplayPort outputs CTO=No video cable adapter included AMO=One DP-to-DVI adapter included with card
<b>Maximum Resolution</b>	Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as accessories  DisplayPort= <ul style="list-style-type: none"> <li>- up to 3840 x 2160 x 30 bpp @ 60Hz</li> <li>- supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)</li> </ul>
<b>Image Quality Features</b>	DL-DVI(I) output= <ul style="list-style-type: none"> <li>- up to 2560 x 1600 x 32 bpp @ 60Hz</li> </ul> 10-bit internal display processing pipeline 10-bit scan-out support
<b>Display Output</b>	VGA= <ul style="list-style-type: none"> <li>• requires use of DVI-to-VGA and/or DP-to-VGA video cable adapters</li> <li>• 400 MHz integrated RAMDAC</li> <li>• Max resolution=2048 x 1536 x 32 bpp @ 85 Hz</li> </ul> DL-DVI(I)= <ul style="list-style-type: none"> <li>• Max resolution=2560 x 1600 x 32 bpp @ 60 Hz</li> </ul> SL-DVI(I)= <ul style="list-style-type: none"> <li>• Max resolution=1920 x 1200 x 32 bpp @ 60 Hz</li> </ul> DisplayPort= <ul style="list-style-type: none"> <li>• Supports HBR2 and MST</li> <li>• Max resolution=3840 x 2160 x 30 bpp @ 60 Hz (only one monitor can be connected to a Quadro K4200 DisplayPort connector at this resolution)</li> <li>• Max number of DisplayPort daisy-chained monitors or hub connected monitors from a single Quadro K4200 DisplayPort connector=4 with maximum resolution of 1920 x 1200</li> </ul> HDMI= <ul style="list-style-type: none"> <li>• Requires use of DP-to-HDMI cable</li> <li>•</li> </ul>

### Technical Specifications - Graphics

	<ul style="list-style-type: none"> <li>• Max Resolution=1920 x 1080 x 32 bpp @ 60Hz</li> </ul>
	Maximum number of monitors across all available Quadro K4200 outputs is 4.
<b>Shading Architecture</b>	Full Microsoft DirectX 11 Shader Model 5.0
<b>Supported Graphics APIs</b>	OpenGL 4.4 DirectX 11.1 API support includes= <ul style="list-style-type: none"> <li>• CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran</li> </ul>
<b>Available Graphics Drivers</b>	Microsoft Windows 8.1 Microsoft Windows 8 Microsoft Windows 7 Linux
	HP qualified drivers may be preloaded or available from the HP support Web site= <p><a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a></p>
<b>Notes</b>	<ol style="list-style-type: none"> <li>1. Quadro K4200 offered as CTO does not include a video cable adapter. Video cable adapters must be ordered separately.</li> <li>2. Quadro K4200 offered as AMO includes one DP-to-DVI video cable adapter. Additional cables must be ordered separately.</li> <li>3. A total maximum of 4 active monitors are supported across all display output types. This may be accomplished by using daisy chained DisplayPort 1.2 displays or a DisplayPort 1.2 hub device.</li> <li>4. A DisplayPort hub device may be used to connect multiple DisplayPort monitors to a single Quadro K4200 DisplayPort output.</li> </ol>

<b>NVIDIA Quadro K5200 8GB Graphics</b>	<b>Form Factor</b>	4.3768H x 10.58L Dual Slot
	<b>Weight</b>	~880 grams
	<b>Graphics Controller</b>	NVIDIA Quadro K5200 GK 110 GPU 2304 CUDA cores Max Power=150 Watts
	<b>Bus Type</b>	PCI Express 3.0 x16
	<b>Memory</b>	8GB GDDR5 256-bit memory I/O path 192 GB/s memory bandwidth
	<b>Connectors</b>	DVI-I (1), DVI-D (1), DP (2),  Factory configured option=No adapter included with card. Option Kit=No adaptor included with card.
	<b>Image Quality Features</b>	DVI to VGA, DisplayPort to VGA, DisplayPort to DVI, and DisplayPort to Dual-Link DVI adapters available as accessories. <ul style="list-style-type: none"> <li>• DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2), HDMI 1.4, and HDCP support</li> <li>• NVIDIA 3D Vision™ technology</li> </ul>
	<b>Display Output</b>	400 MHz integrated RAMDAC <ul style="list-style-type: none"> <li>• Maximum resolution over VGA (through DVI to VGA cable)=2048 × 1536 × 32 bpp at 85 Hz</li> </ul> Dual-link internal TMDS (DVI 1.0) <ul style="list-style-type: none"> <li>• Maximum resolution over digital port (single GPU and SLI mode)=2560 ×</li> </ul>

### Technical Specifications - Graphics

	1600 × 32 bpp at 60 Hz (reduced blanking)
	Single-link internal TMDS (DVI 1.0)
	<ul style="list-style-type: none"> <li>Maximum resolution over digital port (single GPU and SLI mode)~1920 × 1200 × 32 bpp at 60 Hz (reduced blanking)</li> </ul>
	DisplayPort with MST and HBR2.
	<ul style="list-style-type: none"> <li>Maximum resolution~4096 × 2160 × 30 bpp at 60Hz</li> <li>Maximum resolution~2560 x 1600 x 30bpp at 120Hz</li> </ul>
	HDMI
	<ul style="list-style-type: none"> <li>Maximum resolution~1920 × 1080 × 32 bpp at 60Hz</li> </ul>
<b>Shading Architecture</b>	Shader Model 5.0
<b>Supported Graphics APIs</b>	OpenGL 4.4 DirectX 11 API support for NVIDIA's CUDA™ C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Available Graphics Drivers</b>	Windows 8 Windows 7 Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation (64-bit) SUSE Linux Enterprise Desktop 11 SP3(64-bit and 32-bit)
	HP qualified drivers may be preloaded or available from the HP support Web site~ <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
<b>Notes</b>	<ol style="list-style-type: none"> <li>NVIDIA GRID VGX Pass Through feature supported on NVIDIA Quadro K5200 to enable direct mapping of GPU to Virtual Machine.</li> <li>No display output adapter included.</li> </ol>

<b>NVIDIA Quadro K6000 12GB Graphics</b>	<b>Form Factor</b>	4.376 <sup>H</sup> x 10.5 <sup>L</sup> Dual Slot Power~234 Watts
	<b>Weight</b>	~880 grams
	<b>Graphics Controller</b>	NVIDIA Quadro K6000 Graphics Card based on the GK180 GPU Core Count~2880 Base Clock~797 MHz Boost Clock~902 MHz
	<b>Bus Type</b>	PCI Express 3.0 x16
	<b>Memory</b>	12GB GDDR5 384-bit memory I/O path 288 GB/s memory bandwidth ECC Memory
	<b>Connectors</b>	DVI-I (1), DVI-D (1), DP (2), Optional 3D Stereo bracket with 3-pin mini-DIN connector.
		Factory configured option~No adapter included with card. Option Kit~No adaptor included with card.
	DVI to VGA, DisplayPort to VGA, DisplayPort to DVI, and DisplayPort to Dual-Link DVI adapters available as accessories.	

### Technical Specifications - Graphics

<b>Image Quality Features</b>	<ul style="list-style-type: none"><li>• DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2), HDMI 1.4, and HDCP support</li><li>• NVIDIA 3D Vision™ technology</li><li>• NVIDIA Premium Mosaic and nView</li></ul>
<b>Display Output</b>	<p>400 MHz integrated RAMDAC</p> <ul style="list-style-type: none"><li>• Maximum resolution over VGA (through DVI to VGA cable) = 2048 × 1536 × 32 bpp at 85 Hz</li></ul> <p>Dual-link internal TMDS (DVI 1.0)</p> <ul style="list-style-type: none"><li>• Maximum resolution over digital port (single GPU and SLI mode) = 2560 × 1600 × 32 bpp at 60 Hz (reduced blanking)</li></ul> <p>Single-link internal TMDS (DVI 1.0)</p> <ul style="list-style-type: none"><li>• Maximum resolution over digital port (single GPU and SLI mode) = 1920 × 1200 × 32 bpp at 60 Hz (reduced blanking)</li></ul> <p>DisplayPort with MST and HBR2.</p> <ul style="list-style-type: none"><li>• Maximum resolution = 3840 × 2160 × 36 bpp at 60Hz</li></ul> <p>HDMI</p> <ul style="list-style-type: none"><li>• Maximum resolution = 1920 × 1080 × 32 bpp at 60Hz</li></ul>
<b>Shading Architecture</b>	Shader Model 5.0 Full IEEE 764-2008 32-bit and 64-bit precision
<b>Supported Graphics APIs</b>	Full OpenGL 4.3 Full DirectX 11 CUDA API support includes = CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Available Graphics Drivers</b>	Windows 8 Windows 7 Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
	HP qualified drivers may be preloaded or available from the HP support Web site = <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
	Novell SUSE Linux Enterprise drivers may also be obtained from = <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Notes</b>	<ol style="list-style-type: none"><li>1. NVIDIA GRID VGX Pass Through feature supported on NVIDIA Quadro K6000 to enable direct mapping of GPU to Virtual Machine.</li><li>2. No display output adapter included.</li></ol>



### Technical Specifications - High Performance GPU Computing

<b>NVIDIA Tesla K40 Workstation Compute Processor</b>	<b>Form Factor</b>	Size=4.376 inches by 10.5 inches Slots=Dual Slot Power Connectors=One 6-pin and one 8-pin
	<b>Weight</b>	~826 grams
	<b>System Interface</b>	PCI Express Gen3 ×16
	<b>Video Outputs</b>	None.
	<b>Memory</b>	12GB GDDR5, memory path=384-bit memory clock=3Ghz
	<b>Peak Memory Bandwidth</b>	288 GB/s
	<b>Supported APIs</b>	CUDA, OpenACC, OpenCL 1.2 API support includes= C, C++, Java, Python, and Fortran
	<b>Supported Operating Systems</b>	Windows 8 (64-bit) Genuine Windows 7 Professional (64-bit) Red Hat Enterprise Linux (RHEL) 5, 6 Desktop/Workstation (64-bit) SUSE Linux Enterprise Desktop 11 (64-bit)
		HP qualified drivers may be preloaded or available from the HP support Web site= <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
		Novell SUSE Linux Enterprise drivers may also be obtained from= <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Processor Cores</b>	GK110B GPU Base Clock=745 MHz Boost Clock=up to 875 MHz 2888 CUDA cores	
<b>Power Consumption</b>	~235 Watts	
	<b>Note 1</b> -A 1125W PSU is required for any K40 configuration on the Z820	
<b>NVIDIA Tesla K20c Compute Processor</b>	<b>Form Factor</b>	4.376 inches by 10.5 inches Dual Slot
	<b>System Interface</b>	PCI Express Gen2 ×16
	<b>Video Outputs</b>	None.
	<b>Memory</b>	5GB GDDR5, 320-bit memory path
	<b>Peak Memory Bandwidth</b>	208 GB/s (with ECC off)
	<b>Supported APIs</b>	CUDA and OpenACC API support includes= CUDA C, CUDA C++, Java, Python, and Fortran
	<b>Supported Operating Systems</b>	Windows 8 (64-bit) Genuine Windows 7 Professional (64-bit) Red Hat Enterprise Linux (RHEL) 5, 6 Desktop/Workstation (64-bit) SUSE Linux Enterprise Desktop 11 (64-bit)
		HP qualified drivers may be preloaded or available from the HP support Web site= <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>
		Novell SUSE Linux Enterprise drivers may also be obtained from= <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
	<b>Processor Cores</b>	GK110 GPU, 706 MHz clock 2496 CUDA cores

## Technical Specifications - High Performance GPU Computing

**Power Consumption** ~225 Watts

**Note 1**-A 1125W PSU is required for any K20 configuration on the Z820

### Technical Specifications - Optical and Removable Storage

<b>HP DX115 Removable Drive Enclosure</b>	<b>Interface Type</b>	Compatible with SAS or SATA controllers. Offers 6Gb/s performance when used with 6Gb/s HDDs.
	<b>Dimensions (WxHxD)</b>	147.6mm W x 41.1mm H x 205mm D (5.81 <del>W</del> x 1.62 <del>H</del> x 8.08 <del>D</del> )
	<b>Weight</b>	Frame and Carrier=1.73 kg (3.8 lbs.) Carrier=0.45 kg (1 lbs.)
<b>HP 15-in-1 Media Card Reader</b>	<b>Description</b>	Supports hardware ECC (Error Correction Code) function Supports hardware CRC (Cyclic Redundancy Check) function Supports MS 4-bit parallel transfer mode Supports MS-PRO 4-bit parallel transfer mode Supports MS PRO-HG Duo 4-bit parallel transfer mode Supports SD 4-bit parallel transfer mode Supports UHS-104 SD 4-bit card (version 3.0) Supports CF v6.0 with PIO mode 6 and Ultra DMA 7 mode
	<b>Interface Type</b>	USB 3.0 High-speed interface <b>NOTE</b> -If there is a USB2 connection, USB2 transfer speeds are supported.
	<b>Dimensions (WxHxD)</b>	4.9 x 4 x 1 in (124.5 x 101.6 x 25.4 mm) Fits conveniently in the 5.25" drive bay.
	<b>Supported Media Types</b>	CompactFlash Type I CompactFlash Type II Microdrive Secure Digital Card (SD) Secure Digital High Capacity (SDHC) SD Extended Capacity Memory Card (SDXC) SD Ultra High Speed II(SD UHSII) Memory Stick Memory Stick Select Memory Stick Duo (MS Duo) Memory Stick PRO (MS PRO) Memory Stick PRO Duo (MS PRO Duo) Memory Stick PRO-HG Duo MagicGate Memory Stick (MG) MagicGate Memory Stick Duo  These additional media types are supported with a card adapter. Memory Stick Micro (M2) miniSD miniSD High Capacity Micro SD Memory Card (MicroSD) Micro SD High Capacity Memory Card (MicroSDHC)
<b>Operating Systems Supported</b>	<b>Test Parameters/Conditions - Power applied, unit operating on system ±5%</b> Windows 8 Pro (64-bit)* Windows 8.1 (64-bit)* Windows 8 (64-bit)* Windows 7 Ultimate (32-bit)** Windows 7 Ultimate (64-bit)** Windows 7 Professional (32-bit)** Windows 7 Professional (64-bit)** Windows 7 Home Basic** Windows 7 Home Premium (32-bit)** Windows 7 Home Premium (64-bit)** Windows Vista Business 64 Windows Vista Business 32	

### Technical Specifications - Optical and Removable Storage

Windows Vista Home Basic 32  
Windows XP Professional  
Windows XP Home 32

No driver is required for this device. Native support is provided by the operating system.

Not all features are available in all editions of Windows 8. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8 functionality. See <http://www.microsoft.com>.

Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

**Kit Contents**

Media card reader, 5.25" drive bracket/rails/bezel, Install Guide, IO & Security Software and Documentation CD

**Approvals**

USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0,  
Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.3, FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUVT

**Weight**

0.35 lbs. (0.16 kg)

### Technical Specifications - Controller Cards

<b>HP IEEE 1394b FireWire PCIe Card</b>	<b>Data Transfer Rate</b>	Supports up to 800 Mbps
	<b>Devices Supported</b>	IEEE-1394 compliant devices
	<b>Bus Type</b>	PCIe card full height PCIe slots
	<b>Ports</b>	Two IEEE-1394b external 9-Pin connectors (Rear)
	<b>Internal Connectors</b>	One 10-Pin header Custom Connector
	<b>System Requirements</b>	Windows 8.1 64-bit, Windows 7 Professional 32-bit and 64-bit, SLED 11 and RHEL 6. Intel i5 series or higher processor, min 2GB of RAM, 20GB Hard Drive, CD-ROM drive, built in sound system, Available PCIe slot.
	<b>Temperature – Operating</b>	50° to 131° F (10° to 55° C)
	<b>Temperature – Storage</b>	-22° to 140° F (-30° to 60° C)
	<b>Relative Humidity – Operating</b>	20% to 80%
	<b>Compliances</b>	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	<b>Operating Systems Supported</b>	Windows 8.1 64-bit, Windows 7 Professional 32-bit and 64-bit
<b>HP Thunderbolt-2 PCIe 1-port I/O Card</b>	<b>Data Transfer Rate</b>	Supports up to 20 Gb/s (20,000 Mb/s)
	<b>Devices Supported</b>	Thunderbolt™ certified devices
	<b>Bus Type</b>	PCIe card, full or half height PCIe slots
	<b>Ports</b>	One Thunderbolt™ 2 external 20-Pin output connectors (Rear) One full size DisplayPort input connector (Rear)
	<b>Internal Connectors</b>	One 5-Pin header connector
	<b>System Requirements</b>	Genuine Windows 7 Professional 64-bit, Genuine Windows 8.1 64-bit, Intel i5 series or higher processor, 4-GB RAM, 20-GB Hard Drive, available PCIe slot.
	<b>Temperature - Operating</b>	50° to 131° F (10° to 55° C)
	<b>Temperature - Storage</b>	-22° to 140° F (-30° to 60° C)
	<b>Relative Humidity - Operating</b>	20% to 80%
	<b>Compliances</b>	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	<b>Operating Systems Supported</b>	Genuine Windows 7 Professional 64-bit, Genuine Windows 8.1 64-bit.
<b>Kit Contents</b>	HP Thunderbolt™ 2 PCIe 1-port I/O Card, full height and half height bracket, DisplayPort to DisplayPort cable, internal header cables (2), user documentation and warranty card.	

### Technical Specifications - Networking and Communications

<b>Integrated Intel I218LM PCIe GbE Controller</b>	<b>Connector</b>	RJ-45 (motherboard integration)
	<b>Controller</b>	Intel I218LM GbE platform LAN connect networking controller
	<b>Memory</b>	3 KB FIFO packet buffer memory (both Tx and Rx)
	<b>Data Rates Supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	802.1as, 802.1p, 802.1Q, 802.3, 802.3ab, 802.3az, 802.3i, 802.3u, 802.3x, 802.3z
	<b>Bus Architecture</b>	PCI Express 1.1 (x1) and SMBus
	<b>Data Path Width</b>	X1, 250 MB/s, Bi-directional interface
	<b>Data Transfer Mode</b>	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
	<b>Power Requirement</b>	Requires 3.3V only (integrated regulators)
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	<b>Management Capabilities</b>	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostics AMT 9.1 support, vPro compliant

<b>HP X520 10GbE Dual Port Adapter</b>	<b>Hardware Certifications</b>	FCC B, UL, CE, VCCI, BSMI, CTICK, KCC
----------------------------------------	--------------------------------	---------------------------------------

<b>HP 10GbE SFP+ SR Transceiver</b>	<b>Operating Temperature</b>	0°C to 45°C (32°F to 113°F)
	<b>Operating Humidity</b>	0% to 85%, noncondensing
	<b>Dimensions (H x W x D)</b>	0.47(h) x 0.54(w) x 2.19(d) inches (1.19 x 1.38 x 5.57 cm)

<b>HP 361T PCIe Dual Port Gigabit NIC</b>	<b>Connector</b>	Two RJ-45
	<b>Controller</b>	Intel® Ethernet I350 Controller
	<b>Data Rates Supported</b>	10/100/1000 Mbps, Half- and full-duplex
	<b>Compliance</b>	802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q, 802.3az, IEEE 1588 PCIe v2.0 standard RoHS (6 of 6) FCC (U.S. only) Class B DOC (Canada) Class B CE EN 55024, EN55022 Class B VCCI Class II UL 1950 CSA 950 EN 60950 CE ACPI 1.1a Microsoft WHQL (Windows Hardware Quality Labs)
	<b>Data Path Width</b>	Four lane (x4) PCI Express compatible with x4, x8, and x16 PCI Express slots

### Technical Specifications - Networking and Communications

<b>Power Requirement</b>	4.1W idle without EEE link partner 3.2W idle with EEE link partner 4.2W maximum
<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mb/s 10BASE-T (full-duplex) 20 Mb/s 100BASE-TX (half-duplex) 100 Mb/s 100BASE-TX (full-duplex) 200 Mb/s 1000BASE-T (full-duplex) 2000 Mb/s
<b>Operating Temperature</b>	32° to 131°F (0° to 55° C)
<b>Operating Humidity</b>	10% to 95% non-condensing
<b>Dimensions (H x W x D)</b>	5.3 x 2.5 in (13.50 cm x 6.4 cm) (without brackets)
<b>Operating System Driver Support</b>	Windows 7 Professional 32-bit and 64-bit. Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation Novell SLED 10 & SLED 11
<b>Kit Contents</b>	HP 361T PCIe Dual Port Gigabit NIC PCA with a standard height bracket attached to it (the low profile bracket is included in the clamshell that the PCA ships in) Product Warranty statement and the Quick Install Card (QIC).

<b>Intel 7260 802.11 a/b/g/n PCIe WLAN NIC</b>	<b>Operating Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
	<b>Dimensions (H x W x D)</b>	Native HMC=26.8 x 30.0 x 2.4 mm Carrier Card Assembly 3.3 x 4.7 in (84 x 119 mm)
	<b>Kit Contents</b>	PCIe x1 card with full height bracket, rf antenna, antenna cable, separate low profile bracket, software CD and warranty.
	<b>Notes</b>	<ol style="list-style-type: none"> <li>1. <a href="#">WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</a></li> <li>2. <a href="#">Check latest software/driver release for updates on supported security features.</a></li> <li>3. <a href="#">Maximum output power may vary by country according to local regulations.</a></li> <li>4. <a href="#">In Power Save Polling mode and on battery power.</a></li> <li>5. <a href="#">Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</a></li> </ol>

© 2014 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and Thunderbolt are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Red Hat is a registered trademark of Red Hat, Inc. in the United States and other countries. Firewire is a trademark of Apple Inc. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.