



2.27. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:1, RB Position:0)

| Center Frequency(MHz) | PAR Percent (%) | RBW (MHz) | PAR (dB) | Upper Limit (dB) | Verdict |
|-----------------------|-----------------|-----------|----------|------------------|---------|
| 1770 | 0.1 | 20 | 6.42 | 13 | Pass |

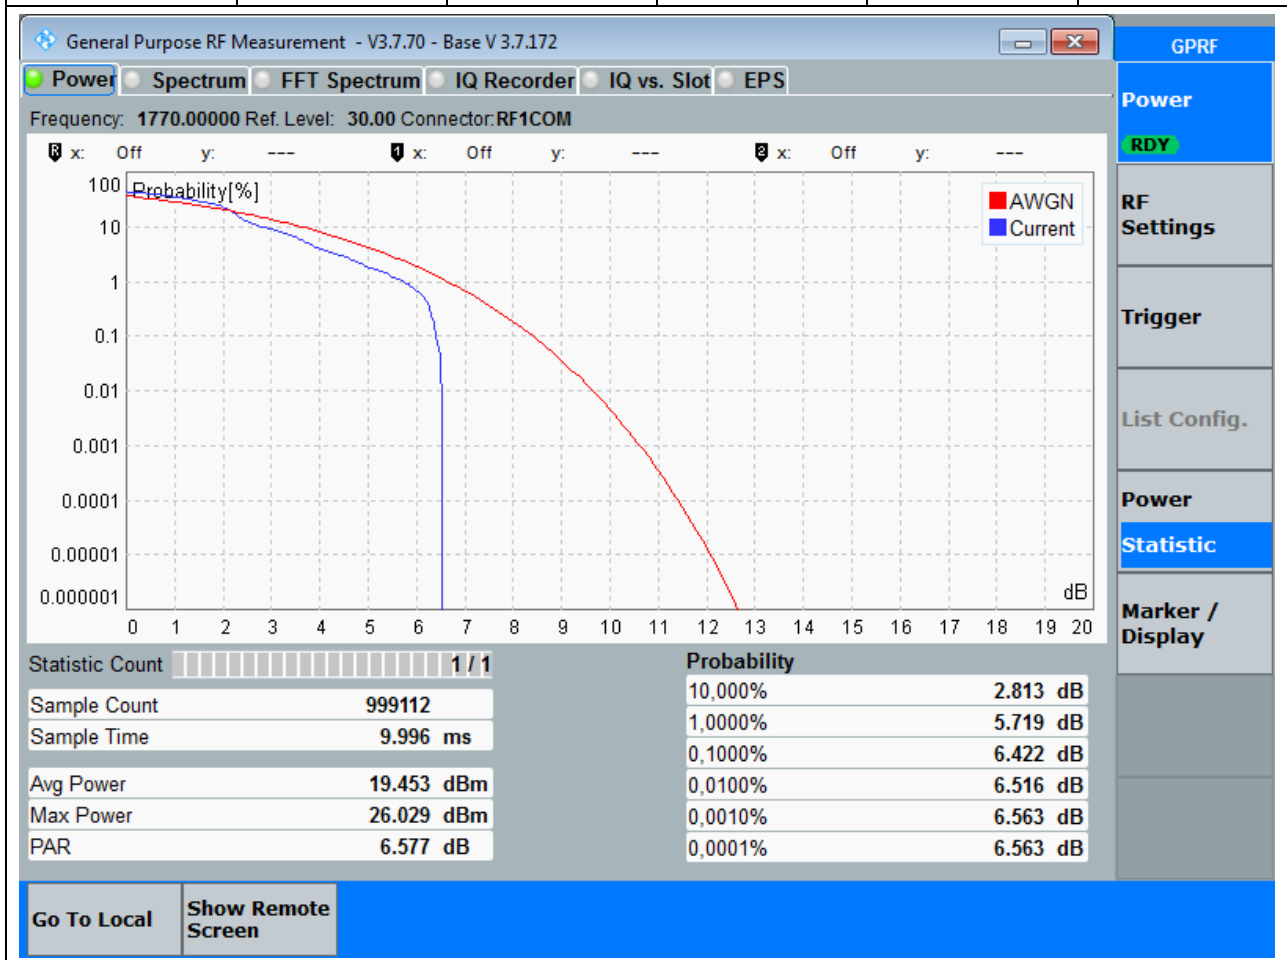


2.28. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:100, RB Position:0)

| Center Frequency(MHz) | PAR Percent (%) | RBW (MHz) | PAR (dB) | Upper Limit (dB) | Verdict |
|-----------------------|-----------------|-----------|----------|------------------|---------|
| 1770 | 0.1 | 20 | 6.42 | 13 | Pass |

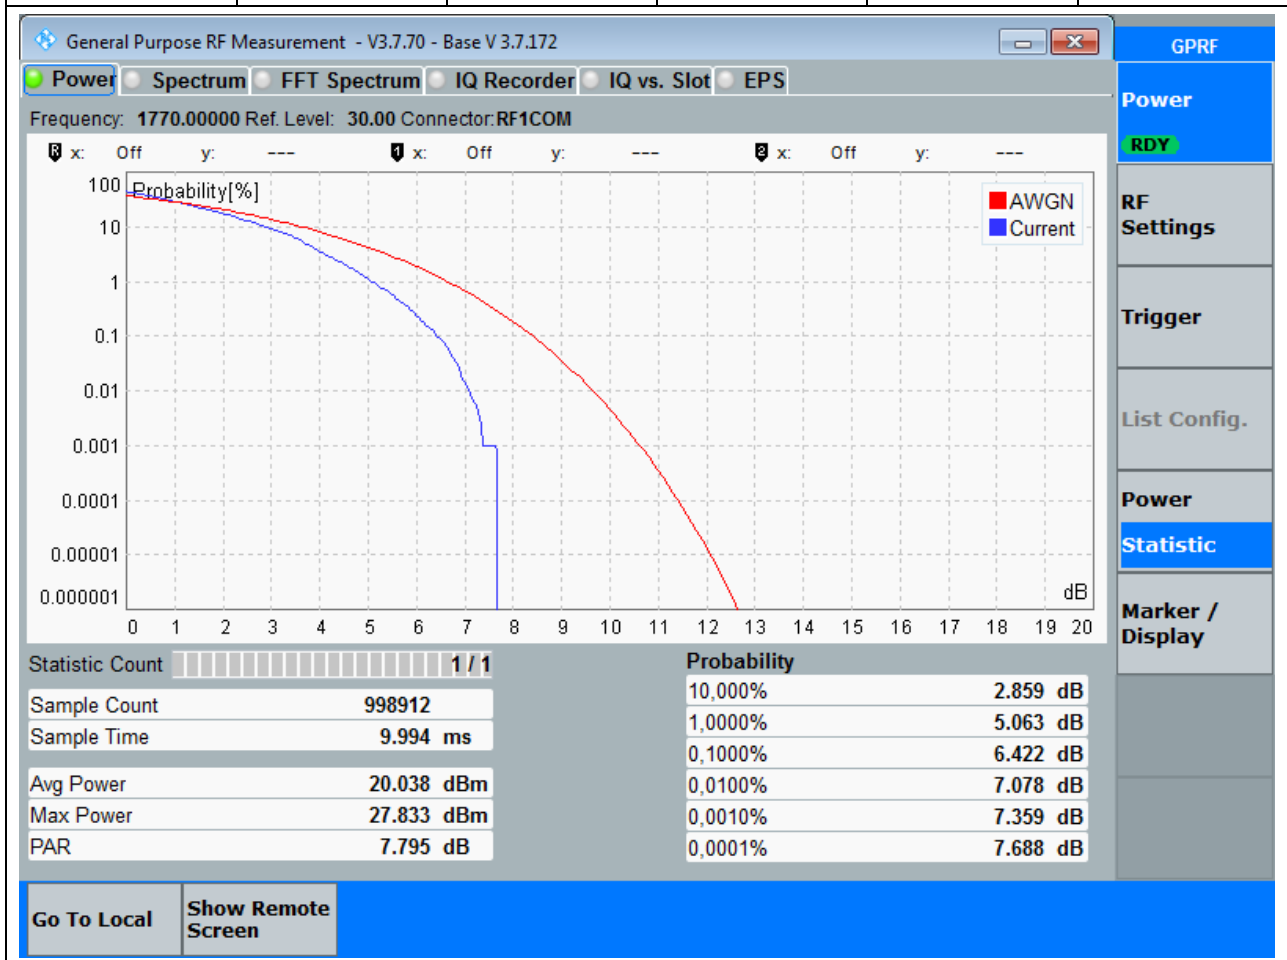


2.29. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:1, RB Position:0)

| Center Frequency(MHz) | PAR Percent (%) | RBW (MHz) | PAR (dB) | Upper Limit (dB) | Verdict |
|-----------------------|-----------------|-----------|----------|------------------|---------|
| 1770 | 0.1 | 20 | 6 | 13 | Pass |

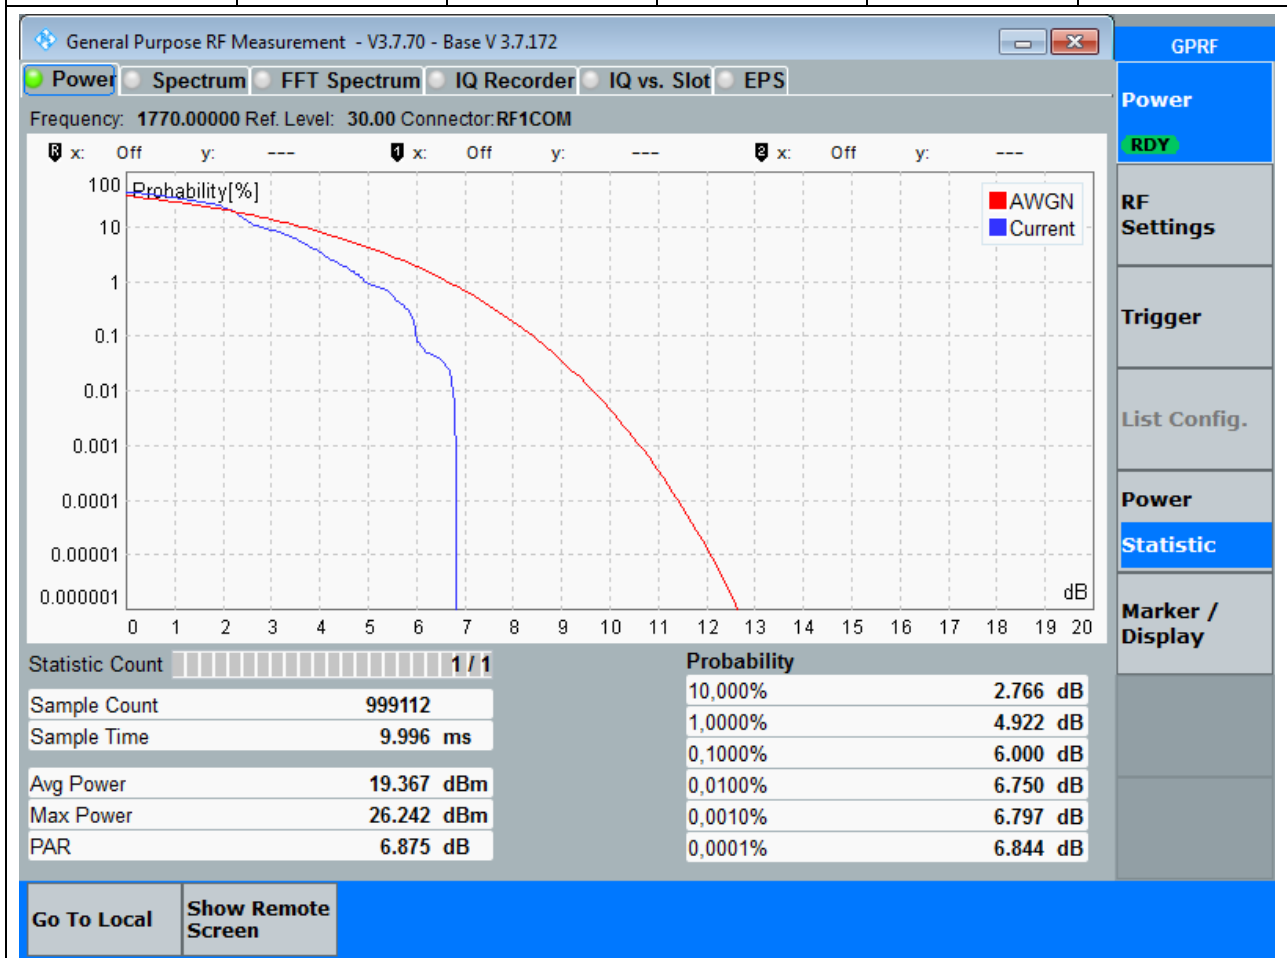

2.30. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:100, RB Position:0)

| Center Frequency(MHz) | PAR Percent (%) | RBW (MHz) | PAR (dB) | Upper Limit (dB) | Verdict |
|-----------------------|-----------------|-----------|----------|------------------|---------|
| 1770 | 0.1 | 20 | 6.42 | 13 | Pass |

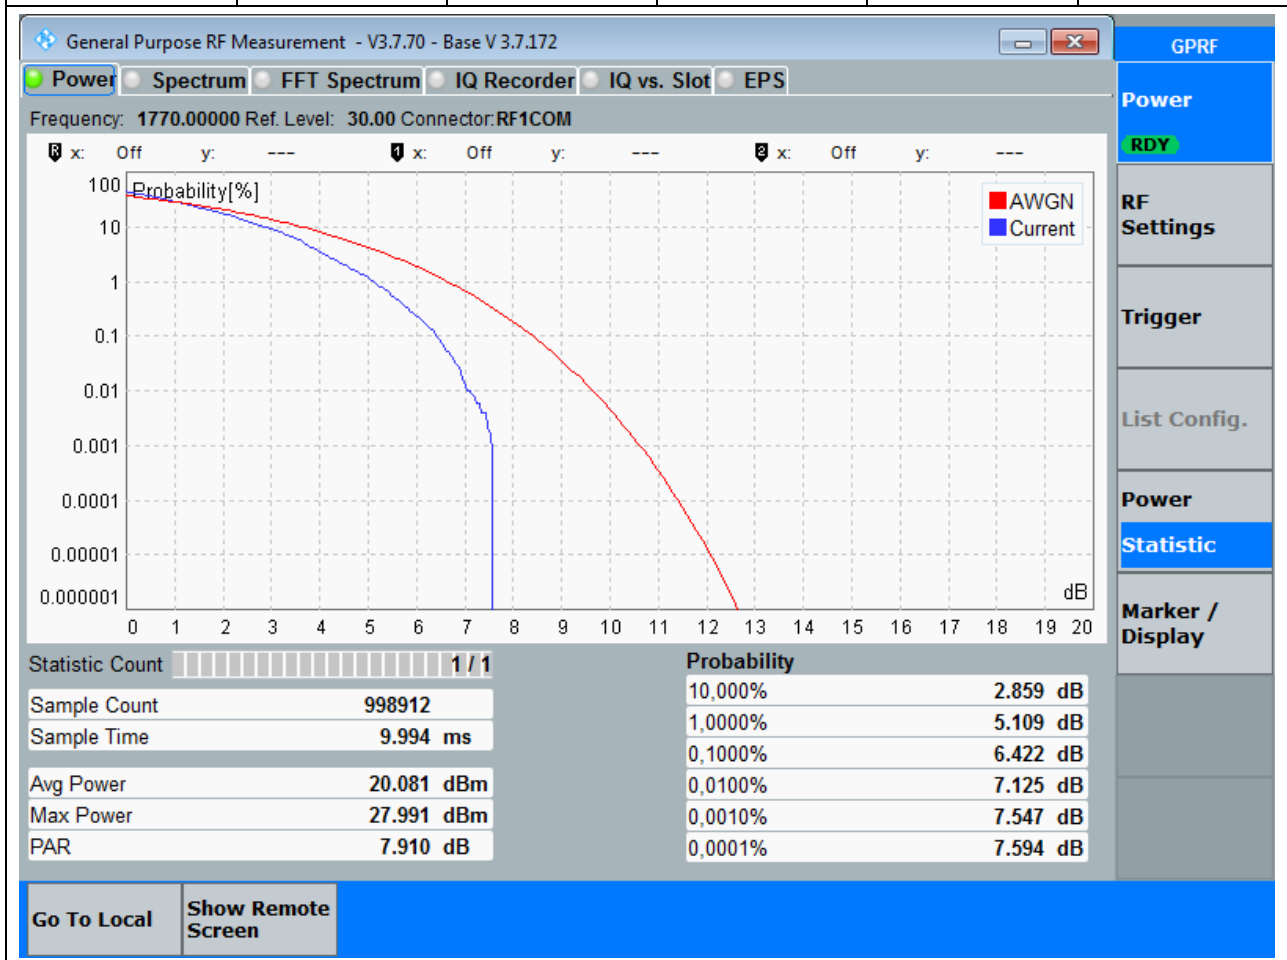

--BLANK BELOW--