Data Sheet CNS100 | CNS150 | CNS200 | CNS250



Convection wall mounted panel heater Slim line design and even heat distribution



CNS200

The advantages

- > Safety thermal safety cut out
- > Thermostat setting between 6-30°C
- > Slim line design
- > Frost protection setting for operation in cold climates
- > Silent operation
- > Heat distributed evenly by natural air circulation
- > Easy wall mounted installation
- > Durable stainless steel tubular element
-) Operates on standard GPO 10 Amp 240V

Warranty


For full warranty information please visit www.stiebel.com.au.

Technical Support

Stiebel Eltron (Aust) Pty Ltd Free Call (Australia): 1800 153 351 Telephone: (03) 9645 1833 Website: stiebel.com.au

	WALL PIOUNIED PANEL HEATER			
Model number	CNS100	CNS150	CNS200	CNS250
Power consumption	1kW	1.5kW	2.0kW	2.4kW
Connectable load	1/N~220-240V	1/N~220-240V	1/N~220-240V	1/N~220-240V
Temperature adjustment range	≈ 6-30°C			
IP rating	IP24, splash water protected			
Height	450 mm	450 mm	450 mm	450 mm
Width	440 mm	590 mm	740 mm	890 mm
Depth	78 mm	78 mm	78 mm	78 mm
Depth with wall bracket	100 mm	100 mm	100 mm	100 mm
Weight	4.2 kg	5.6 kg	7.0 kg	8.4 kg
Colour	White	White	White	White

WALL MOUNTED PANEL HEATER

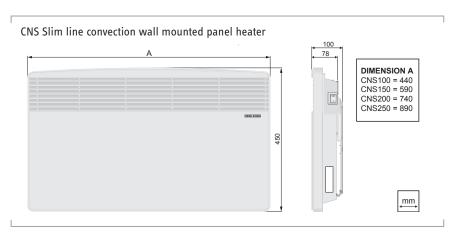

STIEBEL ELTRON is committed to our policy of continual improvement, some features may have subsequently been changed or even removed. Our advisors will be happy to consult with you regarding the currently applicable equipment features. The images used in this brochure are for reference only.