



UC4000P Series

Self-Contained Compact Undercounter Refrigerator

UC4000P Series: Self-Contained Compact Undercounter Refrigerator

Models

- UC4048P-STAR - 115V two section undercounter refrigerator



UC4048P-STAR

Standard Features

- Features Delfield's exclusive ABS interior. ABS is extremely durable - it won't dent, chip or corrode and is backed by a limited lifetime warranty
- Stainless steel front, sides and top
- Environmentally friendly R290 refrigerant
- Fully insulated with high-density foamed-in-place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane
- Four epoxy coated wire shelves standard installed per unit
- Black recessed quick grip handle
- Door hinging available on either right or left, right side is standard
- 6' cord and plug supplied
- Three year parts and labor warranty and an additional two year compressor parts warranty

Options & Accessories

- Stainless steel back
- Plastic laminate on front
- Additional wire shelves
- 3" (7.6cm) diameter casters
- 5" (13cm) diameter casters
- Door lock

Specifications

Exterior top shall be one-piece, 22-gauge stainless steel with front edge turned down to form nosing and rear edge turned down.

Exterior bottom shall be one-piece, 14-gauge galvanized metal. Exterior ends shall be 22-gauge stainless steel.

Base interior shall be one-piece thermoformed ABS plastic material, with integral shelf supports. ABS interior is backed by a limited lifetime warranty. Cabinet shall have (4) epoxy-coated wire shelves installed. Base shall be fully insulated with high-density foamed-in-place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.

Doors shall have a 22-gauge stainless steel exterior, with a thermoformed ABS plastic interior liner, and shall be fully insulated with foamed-in-place polyurethane. Door handles shall be black, recessed ABS.

Refrigeration system shall use R290 refrigerant. Compressor shall be 1/5 h.p., with condenser coil and hot gas condensate evaporator mounted on rear of cabinet. Evaporator coil and temperature control shall be mounted on the interior rear wall of the cabinet. Refrigerant flow shall be controlled by a capillary tube. Cabinet shall maintain 36°F to 40°F (2°C to 4°C) interior cabinet temperature.

Electrical connections shall be 115 volt, 60 Hertz, single phase. Unit shall have a 6' (1.8m) long electrical cord and NEMA 5-15P plug. Cord and plug shall be located on rear of cabinet, 16" (40.6cm) above floor, 12" from left side. 220v, 50Hz electrical system is optional.


Equipment is shipped with 2" (5cm) diameter casters installed.






UC4000P Series


Self-Contained Compact Undercounter Refrigerator

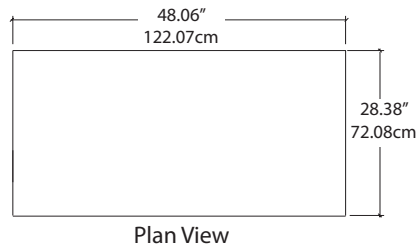


Plan View

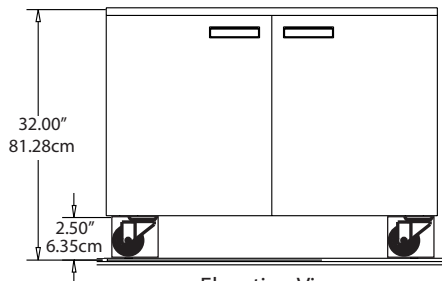


Elevation View

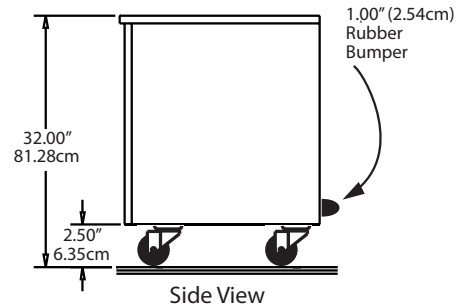


Side View

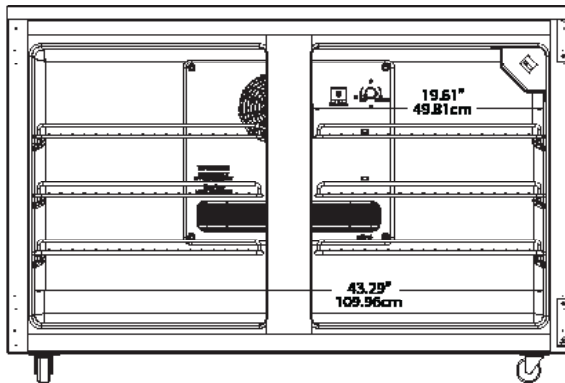


Interior Elevation View

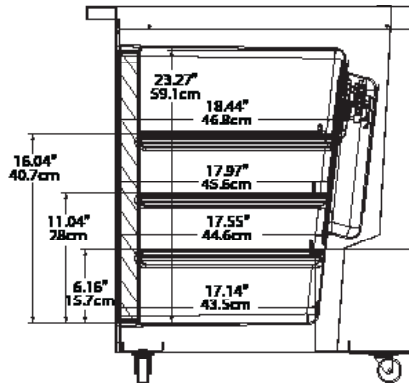

Interior Side View

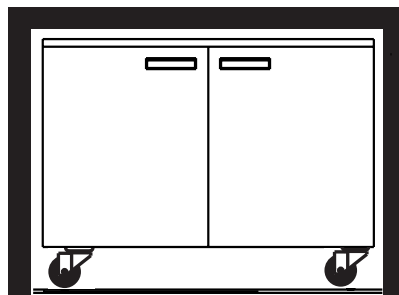

1.00" (2.54cm) Clearance on Top and Sides
3.00" (7.62cm) Clearance on Back



Door Clearance Detail

Installation Note:

Refrigeration system is designed so that air will flow under the unit, through the compressor area and out the top rear of the unit. Any restriction to this air flow path will void the warranties.

Specifications

Model	V/Hz/Ph	# Of Shelves	Shelf Area	Volume	H.P.	Amps	NEMA Plug	Ship Weight	Total Watts	Energy (KWH/Day)
UC4048P-STAR	115/60/1	4	8.0ft ²	10.80ft ³	1/5	4.0	5-15P	236lbs/107kg	-	1.38

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
5881A_DEL_UC4048PSTAR
03/16

