



# ENDURE MULTI SERIES SUBMITTAL

## 18000 BTU/HR WALL MOUNTED INVERTER DRIVEN HEAT PUMP SYSTEM ASYW18URDWA

Job Name: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Submitted By: \_\_\_\_\_  
 Unit: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_




Electrical Requirement	
Power Supply	208/230V, 1 Phase, 60 HZ
Operating Voltage Range	187-253 VAC

Performance	
Rated Cooling Capacity	19,000 BTU
Rated Heating Capacity	20,400 BTU

Piping	
Flare Connections	Liquid: 1/4" Vapor: 1/2"

Indoor Unit	
Uncrated Dimension (HxWxD)	14 3/8 x 43 7/8 x 9 5/8 in (366 x 1115 x 243 mm)
Crated (HxWxD)	16 1/2 x 47 1/2 x 13 1/2 in (418 x 1206 x 342 mm)
Airflow CFM (Turbo/High/Med/Low/Quiet)	710/650/560/440/410
Indoor Sound Level dB (Turbo/High/Med/Low/Quiet)	49/47/42/36/34
Motor Rating (HP)	0.094
Heat Exchanger Fin Type	Blue Fin
Weight (Ship/Net)	45.4/37.5 lbs

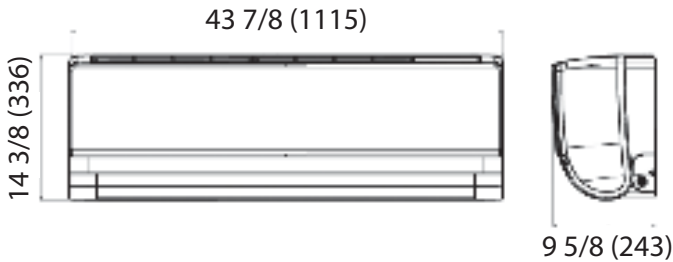

### Accessories

**Remote Controller**  
 Ships with WJ01X24721 (YR-HG)

**Wired Controller**  
 Compatible with ACT17CWA when paired with WK-B

**WiFi**  
 Compatible with WiFi adapter QAWF01A