

Monster, LLC.

Application
For
Certification

FCC ID: RJE191325

Monster Bluetooth Speaker

Model: 191325

Brand name: MONSTER

2.4GHz Transceiver

Report No.: 170807037SZN-003

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-16]

Prepared and Checked by:

Approved by:

Sign on file

Damon Wang
Engineer

Kidd Yang
Senior Project Engineer
Date: August 31, 2017

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF no.: FCC 15C_Tx_c

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	Summary of Tests
<i>EXHIBIT 2:</i>	General Description
<i>EXHIBIT 3:</i>	System Test Configuration
<i>EXHIBIT 4:</i>	Measurement Results
<i>EXHIBIT 5:</i>	Equipment Photographs
<i>EXHIBIT 6:</i>	Product Labeling
<i>EXHIBIT 7:</i>	Technical Specifications
<i>EXHIBIT 8:</i>	Instruction Manual
<i>EXHIBIT 9:</i>	Miscellaneous Information
<i>EXHIBIT 10:</i>	Test Equipment List

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Monster, LLC. - MODEL: 191325

Monster Bluetooth Speaker

FCC ID: RJE191325

This report concerns (check one) Original Grant Class II Change

Equipment Type: DTS - Part 15 Digital Transmission Systems (Bluetooth LE portion)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until : _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-16 Edition] provision.

Report prepared by:

Damon Wang
Intertek Testing Services Shenzhen Ltd. Longhua Branch
1F/2F, Building B, QiaoAn Scientific Technology Park,
Shangkeng Community, Guanhu Subdistrict, Longhua
District, Shenzhen, P.R. China
Tel / Fax: 86-755-8601 6288/86-755-8601 6751

INTERTEK TESTING SERVICES

Table of Contents

1.0	Summary of Test results	2
2.0	General Description	4
2.1	Product Description	4
2.2	Related Submittal(s) Grants	4
2.3	Test Methodology.....	5
2.4	Test Facility	5
3.0	System Test Configuration	7
3.1	Justification.....	7
3.2	EUT Exercising Software.....	7
3.3	Special Accessories	7
3.4	Measurement Uncertainty	8
3.5	Equipment Modification.....	8
3.6	Support Equipment List and Description.....	8
4.0	Measurement Results	10
4.1	Maximum Conducted Output Power at Antenna Terminals.....	10
4.2	Minimum 6 dB RF Bandwidth.....	11
4.3	Maximum Power Density Reading	14
4.4	Out of Band Conducted Emissions.....	17
4.5	Out of Band Radiated Emissions.....	24
4.6	Transmitter Radiated Emissions in Restricted Bands.....	25
4.7	Field Strength Calculation.....	26
3.1.2	Radiated Emission Configuration Photograph.....	27
3.1.3	Radiated Emission	27
3.1.4	Transmitter Spurious Emissions (Radiated)	29
4.9	Conducted Emission	33
4.10	Radiated Emissions from Digital Section of Transceiver.....	36
4.11	Transmitter Duty Cycle Calculation and Measurements	37
5.0	Equipment Photographs	39
6.0	Product Labelling	41
7.0	Technical Specifications	43
8.0	Instruction Manual	45
9.0	Confidentiality Request	47
10.0	Discussion of Pulse Desensitization	49
11.0	Test Equipment List	51

INTERTEK TESTING SERVICES

List of attached file

Exhibit Type	File Description	Filename
Cover Letter	Letter of Agency	agency.pdf
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

SUMMARY OF TEST RESULTS

INTERTEK TESTING SERVICES

1.0 Summary of Test

Monster, LLC. - MODEL: 191325

FCC ID: RJE191325

TEST	REFERENCE	RESULTS
Max. Output power	15.247(b)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d)	Pass
AC Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

INTERTEK TESTING SERVICES

EXHIBIT 2

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

2.0 General Description

2.1 Product Description

The equipment under test (EUT) is a Monster Bluetooth Speaker with Bluetooth function operating in 2402-2480MHz. The EUT is powered by Rechargeable battery (DC 7.4V, 2200mAh) which can be charged by USB port (DC 5V). The USB port is only use for charging purpose. The NFC tag is passive. For more detail information pls. refer to the user manual.

Bluetooth Version: 4.2 (dual-mode)

Antenna Type: Integral antenna

Antenna Gain: 0 dBi

Modulation Type: GFSK, $\pi/4$ -DQPSK and 8-DPSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of transceiver for Monster Bluetooth Speaker which has Bluetooth function (BLE mode), and for the classic Bluetooth mode was tested and demonstrated in report 170807037SZN-002.

INTERTEK TESTING SERVICES

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013) and KDB 558074 D01 v04. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

EXHIBIT 3
SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

3.0 System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by Rechargeable battery (DC 7.4V, 2200mAh) which was charged by adapter or PC with 120V/60Hz input during the test.

All packets DH1, DH3 & DH5 mode in modulation type GFSK was tested and only the worst data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit was flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

3.3 Special Accessories

No special accessory attached.

INTERTEK TESTING SERVICES

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.5 Equipment Modification

Any modifications installed previous to testing by Monster, LLC. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.6 Support Equipment List and Description

This product was tested in the following configuration:

Description	Manufacturer	Model No.
iPod	Apple	A1367
Aux In Cable	N/A	Unshielded, Length 100cm
USB cable	Monster, LLC.	N/A
PC	HP	430
Resistance	N/A	5Ω
AC Adapter	G-TiDE	HJ-050100

INTERTEK TESTING SERVICES

EXHIBIT 4

MEASUREMENT RESULTS

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
Date of Test: August 31, 2017
Model: 191325

4.0 **Measurement Results**

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

[x] The antenna power of the EUT was connected to the input of a broadband peak RF power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

For antennas with gains of 6 dBi or less, maximum allowed Transmitter output is 1 watt (+30 dBm).

Packet: DH1

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2402	6.48	4.45
Middle Channel: 2440	8.28	6.73
High Channel: 2480	9.02	7.98

Cable loss: 1.0 dB External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function

EUT dBm max. output level = 9.02dBm

For RF Exposure, the information is saved with filename: analysis report.pdf.

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
Date of Test: August 31, 2017
Model: 191325

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 KHz according to FCC KDB 558074 D01 v04. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Limit: The 6 dB Bandwidth is at least 500 kHz.


Packet: DH1

Frequency (MHz)	6 dB Bandwidth (KHz)
2402	707.7
2440	699.0
2480	712.0


The test plots are attached as below.

INTERTEK TESTING SERVICES

Low Channel

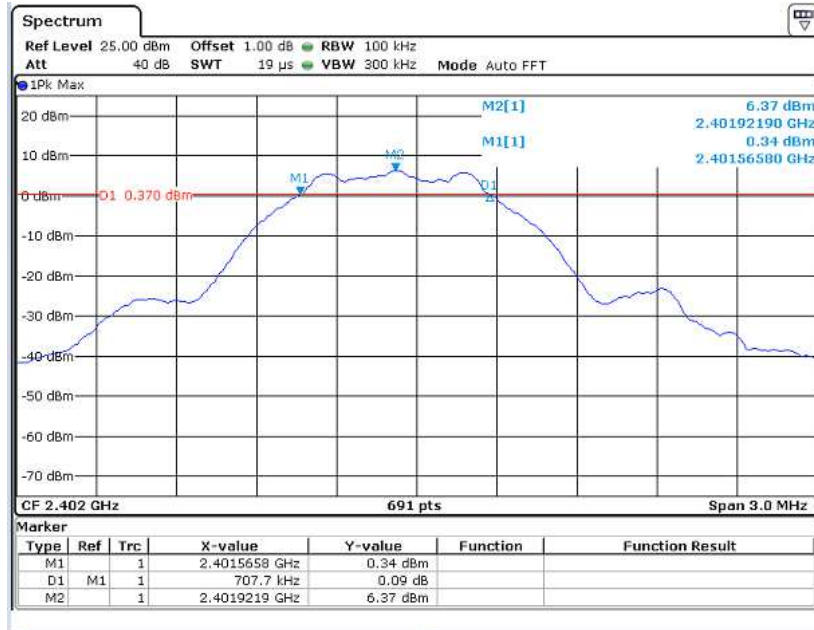


Middle Channel

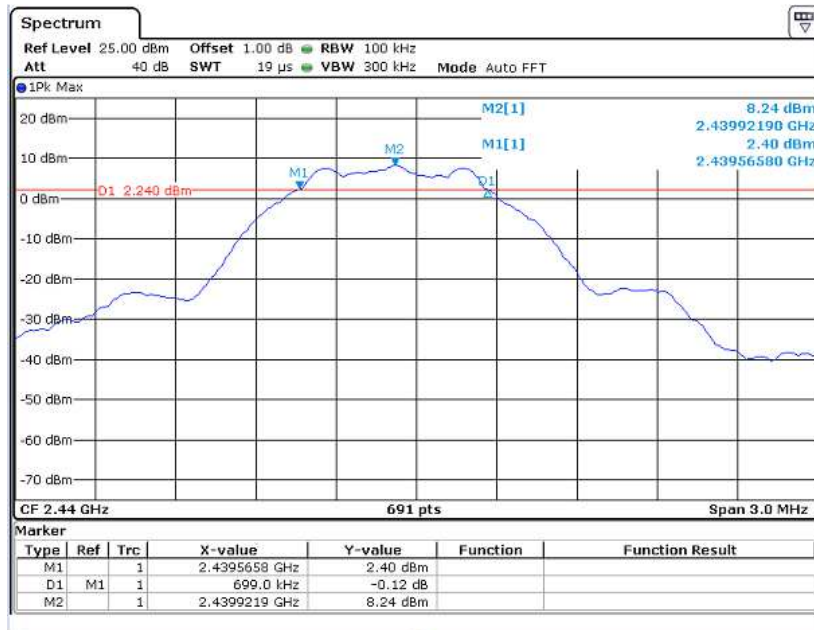

INTERTEK TESTING SERVICES

High Channel

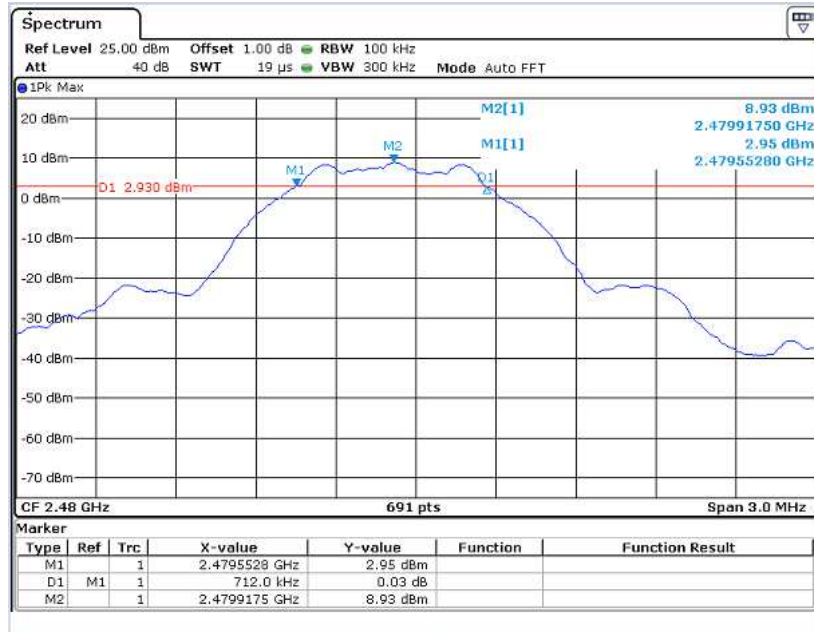

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
Date of Test: August 31, 2017
Model: 191325

4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The Measurement Procedure PKPSD was set according to the FCC KDB 558074 D01 v04.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/ 3 kHz.


Packet: DH1

Frequency (MHz)	Power Density with RBW 3KHz
2402	-9.61
2440	-8.90
2480	-7.34


The test plots are attached as below.

INTERTEK TESTING SERVICES

Low Channel

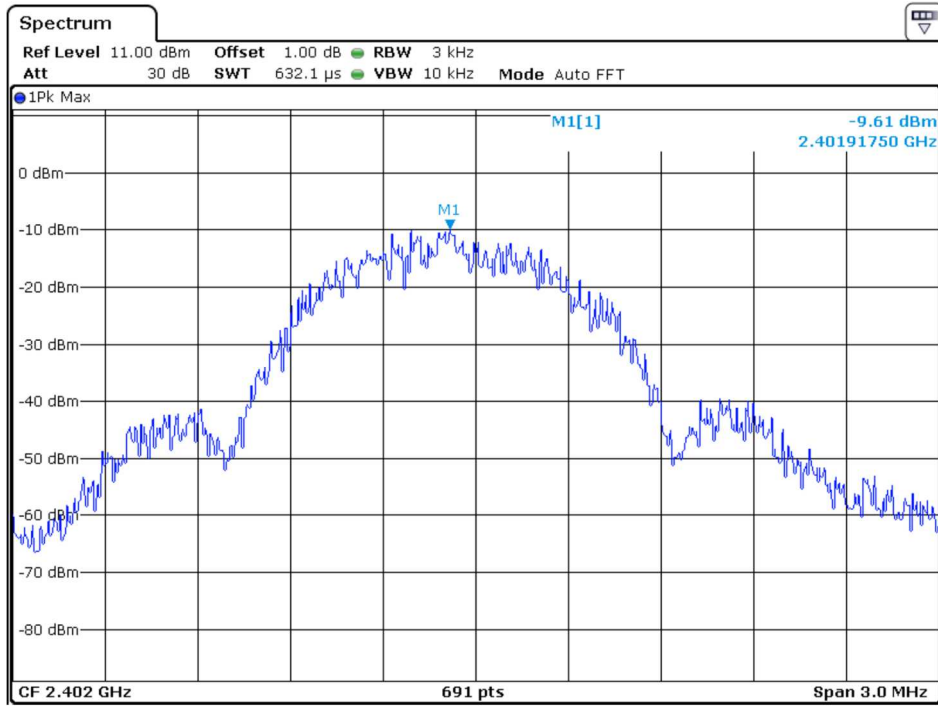


Middle Channel

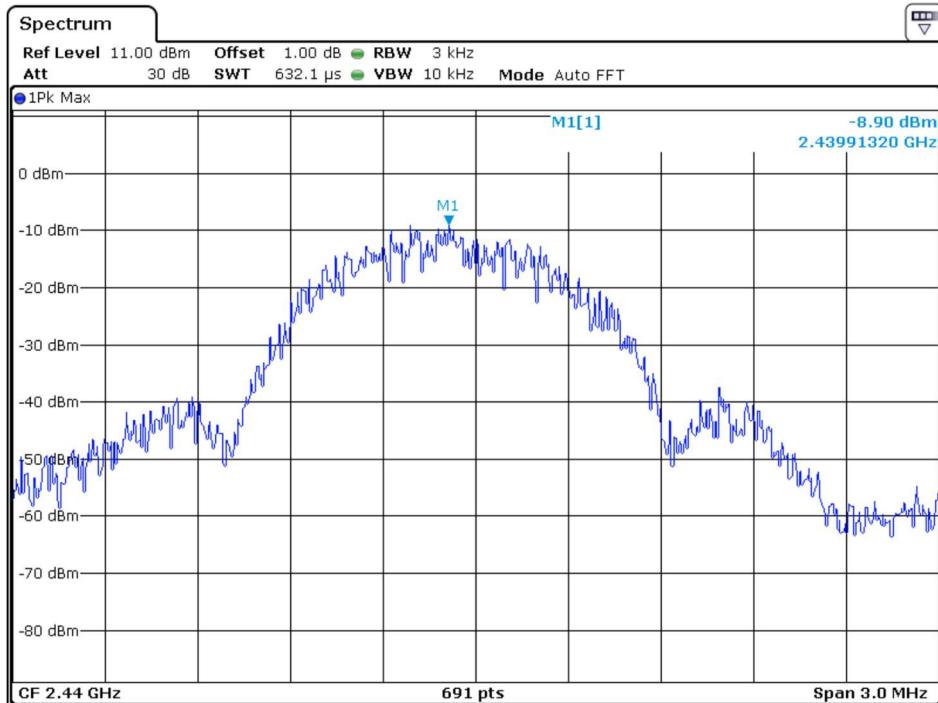

INTERTEK TESTING SERVICES

High Channel

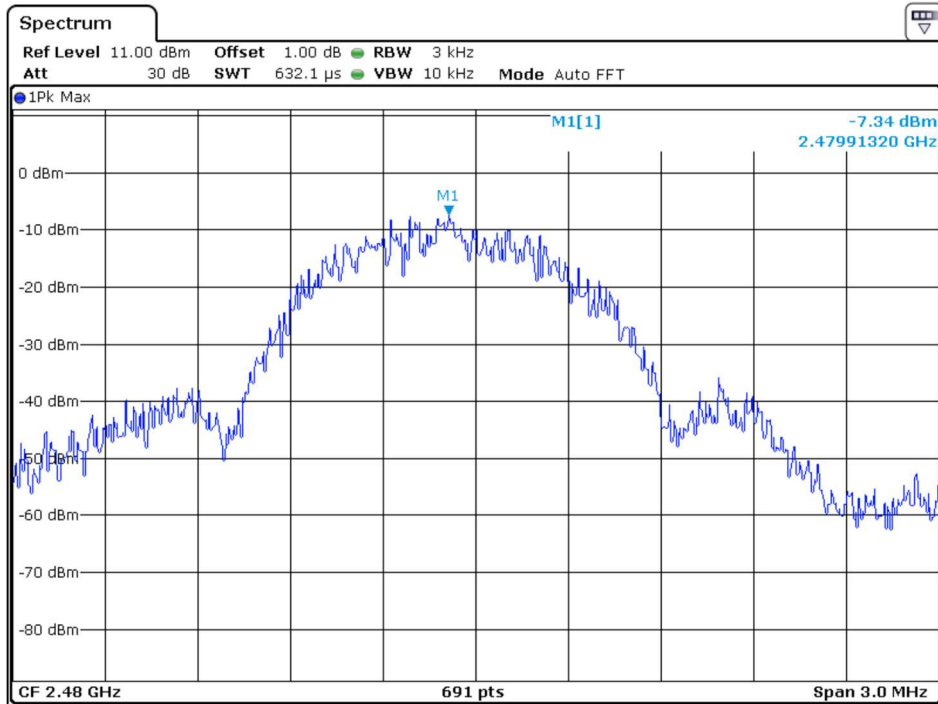

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
Date of Test: August 31, 2017
Model: 191325

4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20dB below that of the maximum in-band 100 kHz emission, or else shall meet the general limits for radiated emissions at frequencies outside the passband, whichever results in lower attenuation. The Measurement Procedure was set according to the FCC KDB 558074 D01 v04.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.



Refer to the attached test plot for out of band conducted emissions data with Packet: DH1

The test plots showed all spurious emission and up to the tenth harmonic were measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.



The test plots are attached as below.

INTERTEK TESTING SERVICES

Low Channel Reference Level: 6.34dBm

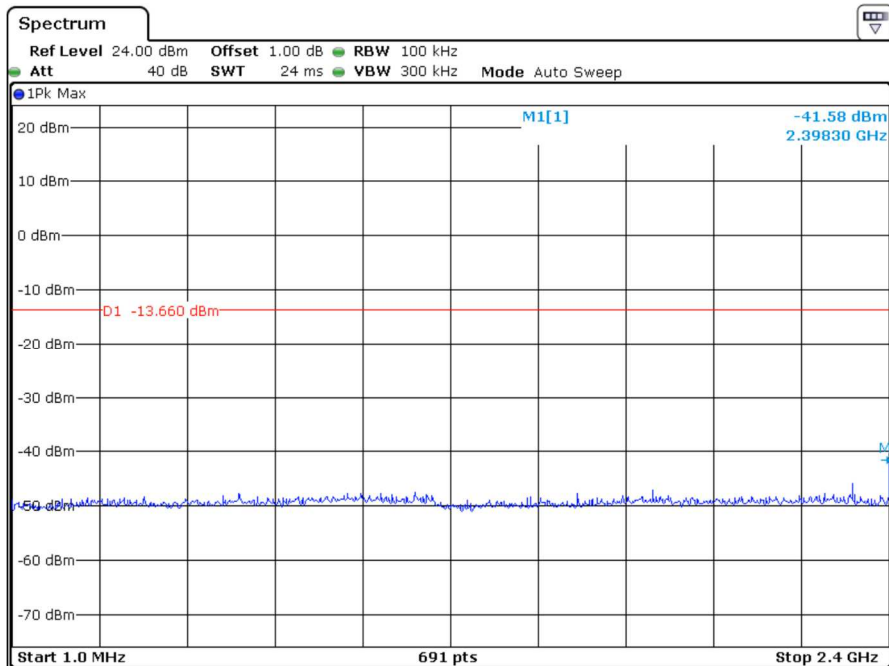
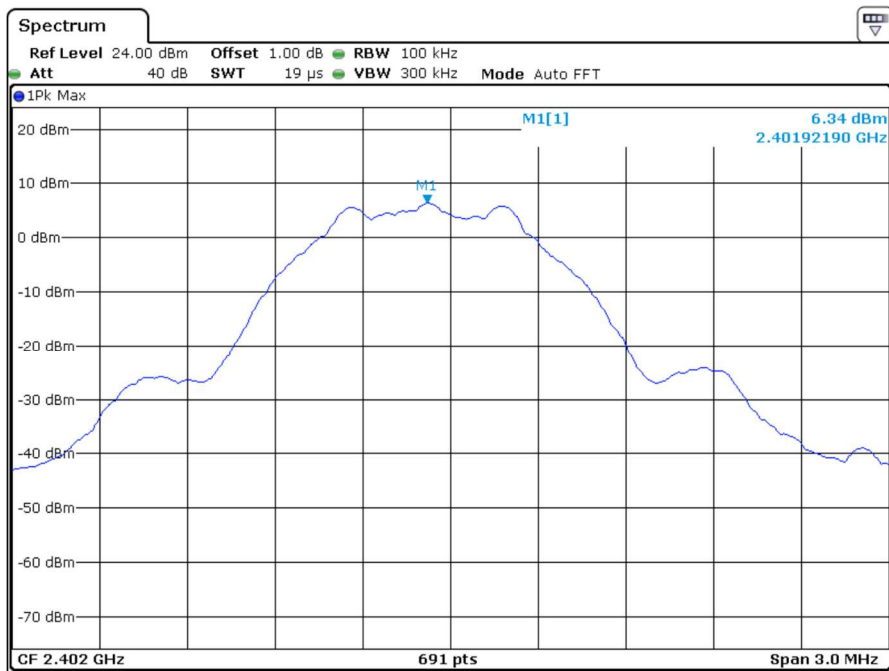


INTERTEK TESTING SERVICES

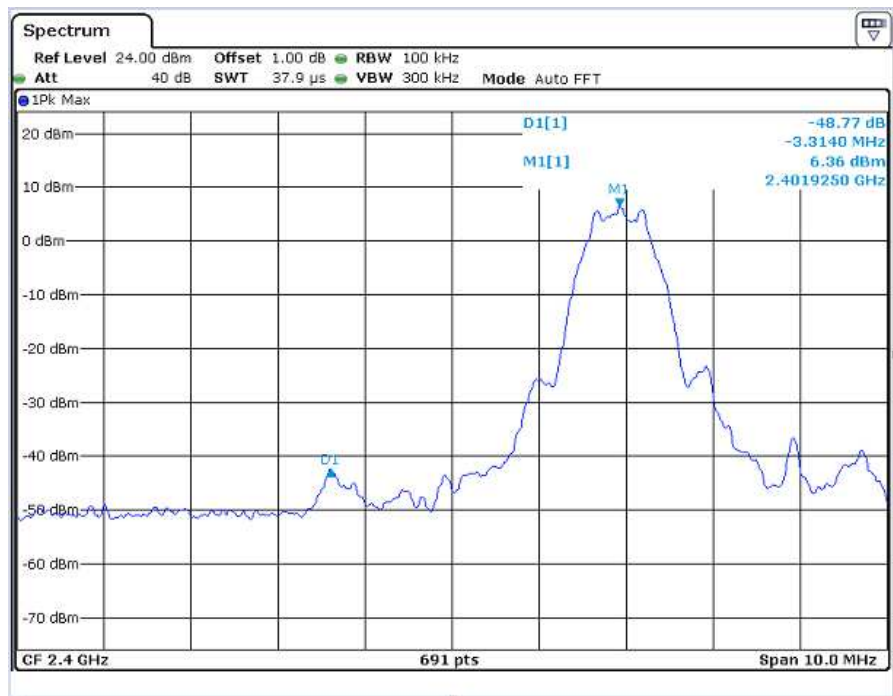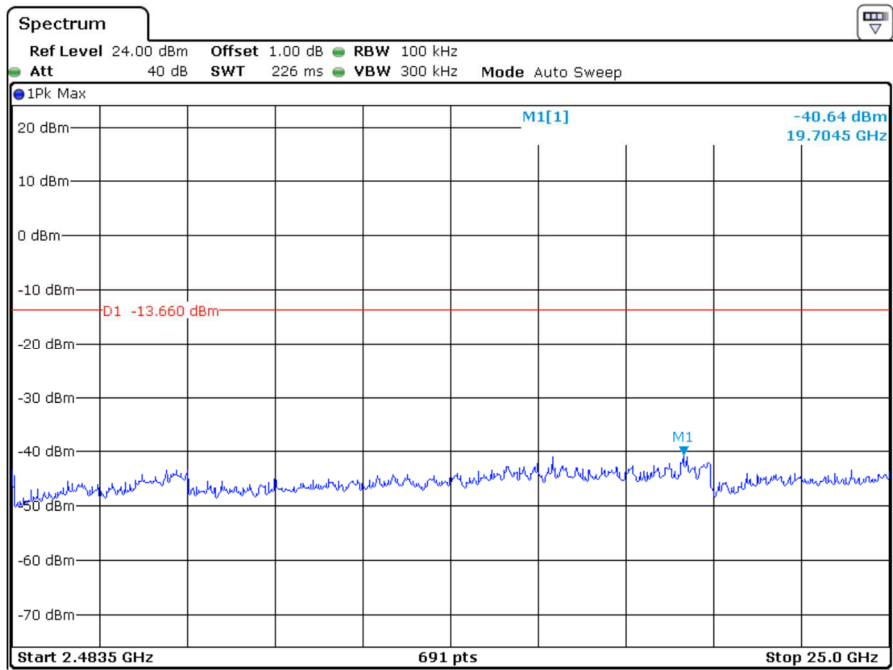


INTERTEK TESTING SERVICES

Middle Channel Reference Level: 8.21dBm

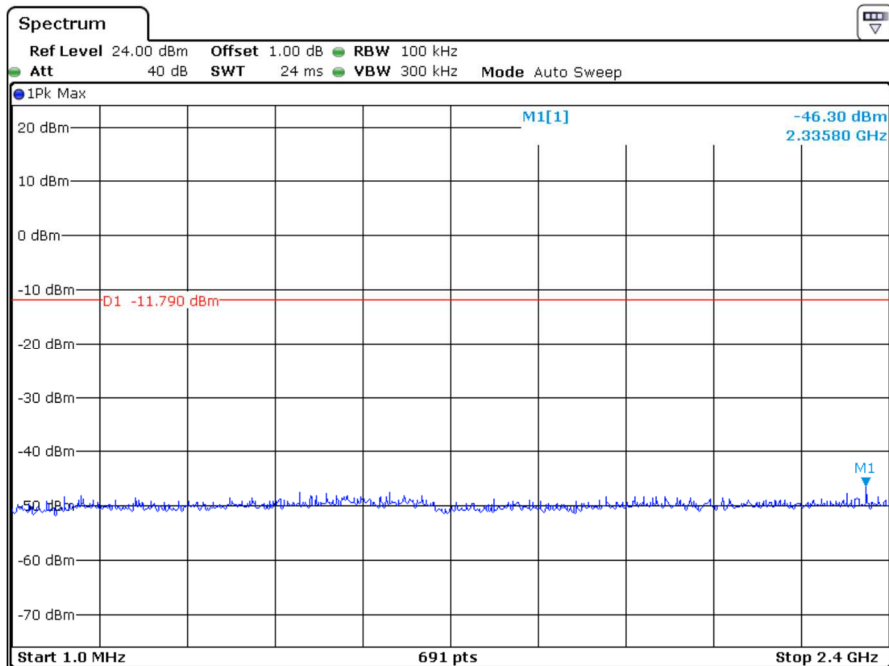
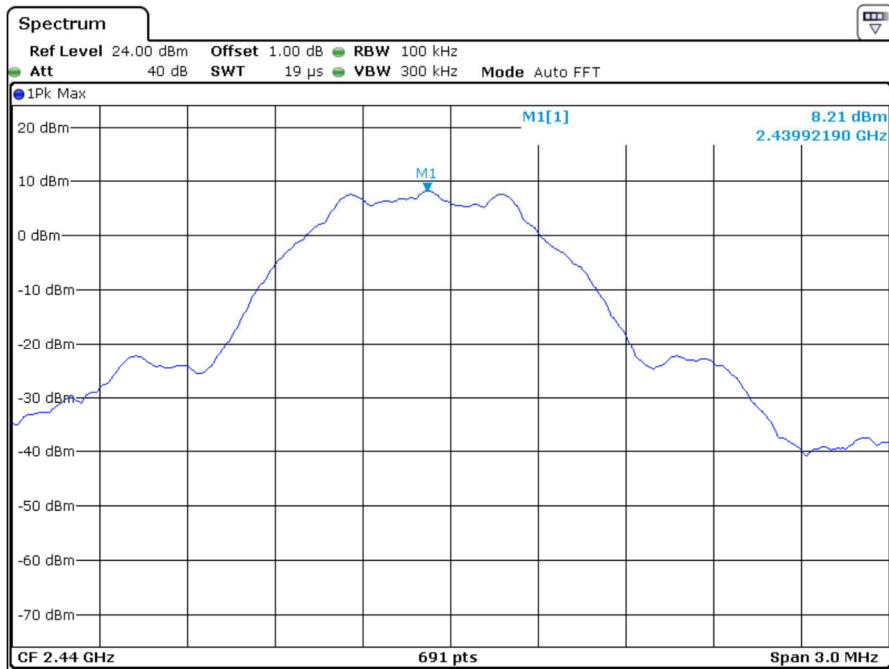


INTERTEK TESTING SERVICES


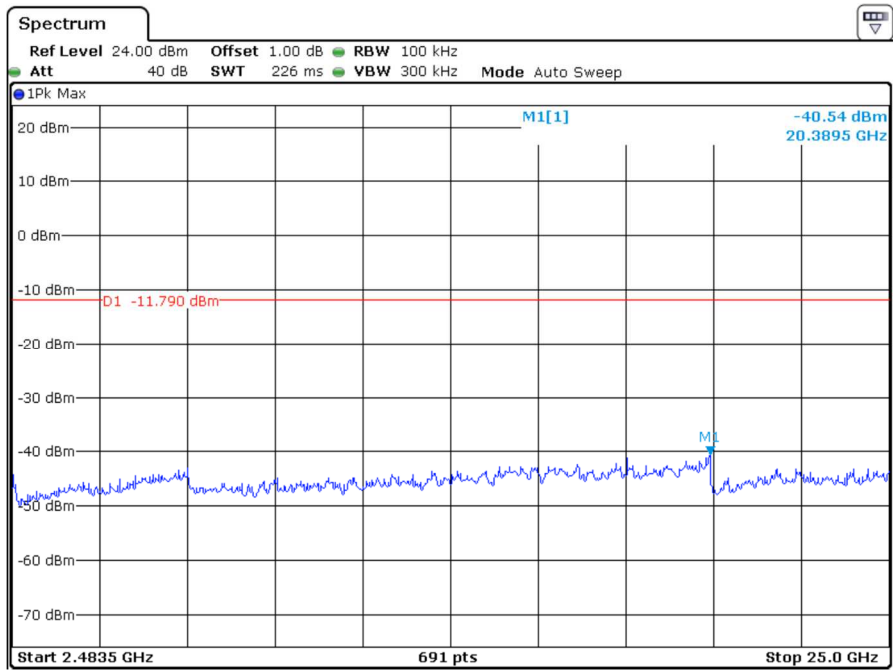


INTERTEK TESTING SERVICES

High Channel Reference Level: 8.92dBm

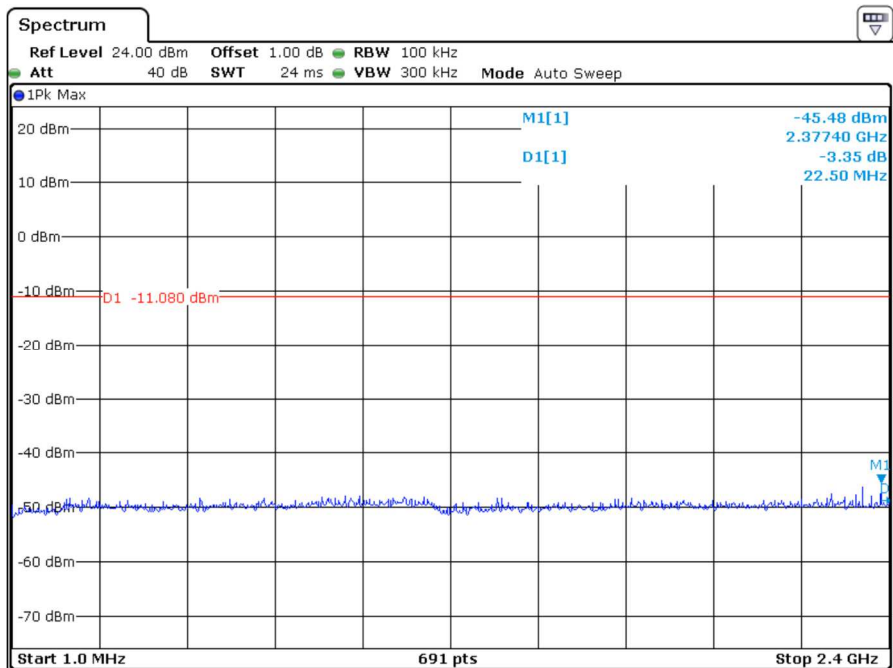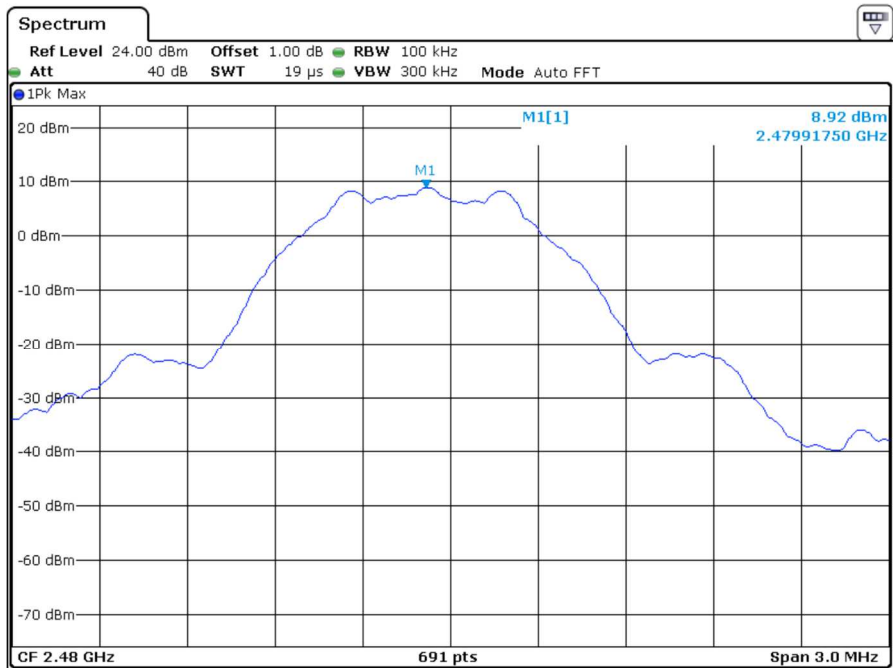

INTERTEK TESTING SERVICES

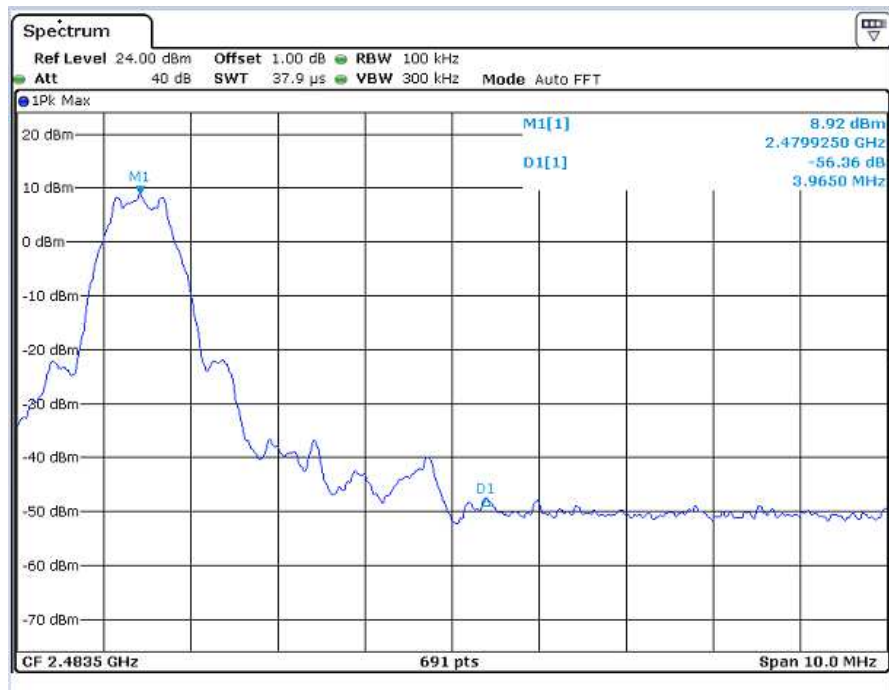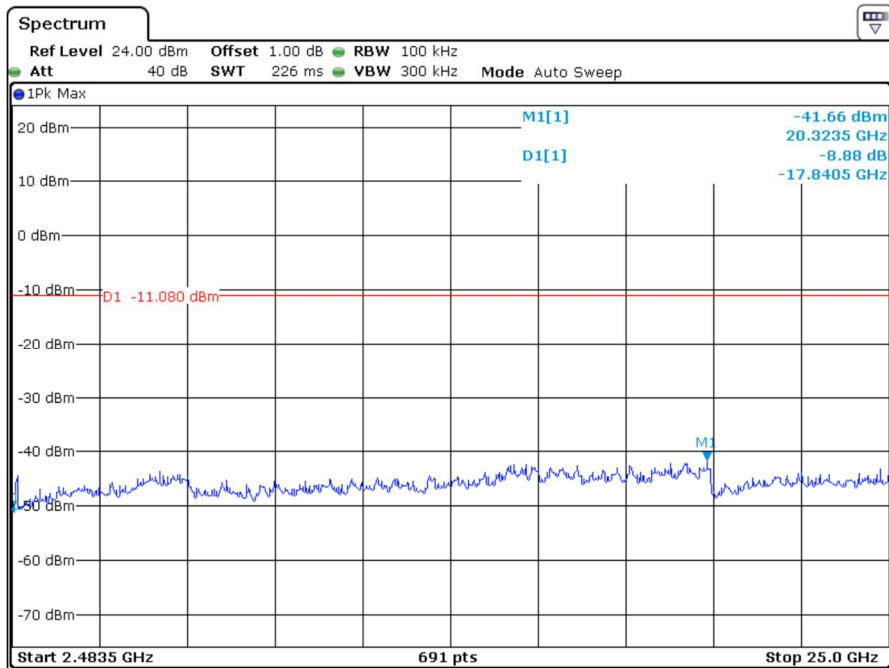

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
Date of Test: August 31, 2017
Model: 191325

4.5 Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

- Not required, since all emissions are more than 20dB below fundamental
- See attached data sheet

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
Date of Test: August 31, 2017
Model: 191325

4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b), (c):

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
Date of Test: August 31, 2017
Model: 191325

4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 42 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm} [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

4.7.1 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

4.7.2 Radiated Emissions- FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 51.000 MHz

Judgement: Passed by 13.8 dB

TEST PERSONNEL:

Sign on file

Damon wang, Engineer

Typed/Printed Name

August 31, 2017

Date

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.

Date of Test: August 31, 2017

Model: 191325

Worst Case Operating Mode: Charging+BT Link

Modulation type: GFSK

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	231.000	34.1	20.0	10.7	24.8	46.0	-21.2
Horizontal	264.000	29.0	20.0	15.0	24.0	46.0	-22.0
Horizontal	361.000	26.3	20.0	18.5	24.8	46.0	-21.2
Vertical	37.000	34.9	20.0	11.1	26.0	40.0	-14.0
Vertical	51.000	34.9	20.0	11.3	26.2	40.0	-13.8
Vertical	121.000	18.5	20.0	25.3	23.8	43.5	-19.7

- NOTES:
1. Quasi-Peak detector is used except for others stated.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. All emissions are below the QP limit.

INTERTEK TESTING SERVICES

4.7.3 Transmitter Spurious Emissions (Radiated) - FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 7440.000 MHz

Judgement: Passed by 14.7 dB

TEST PERSONNEL:

Sign on file

Damon Wang, Engineer
Typed/Printed Name

August 31, 2017
Date

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.

Date of Test: August 31, 2017

Model: 191325

Mode: Packet DH1 (TX-Channel 2402MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4804.000	57.5	36.1	34.2	55.6	74.0	-18.4
Horizontal	*2388.100	59.2	36.7	28.4	50.9	74.0	-23.1

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4804.000	35.0	36.1	34.2	33.1	54.0	-20.9
Horizontal	*2388.100	29.9	36.7	28.4	21.6	54.0	-32.4

- NOTES:
1. Peak detector is used for the emission measurement (RBW=1MHz, VBW=3MHz for Peak data; RBW=1MHz, VBW=10Hz for Average data).
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.

Date of Test: August 31, 2017

Model: 191325

Mode: Packet DH1 (TX-Channel 2440MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre- Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4880.000	55.6	36.1	34.6	54.1	74.0	-19.9
Horizontal	*7320.000	57.7	35.6	37.1	59.2	74.0	-14.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre- Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4880.000	34.0	36.1	34.6	32.5	54.0	-21.5
Horizontal	*7320.000	36.5	35.6	37.1	38.0	54.0	-16.0

- NOTES:
1. Peak detector is used for the emission measurement (RBW=1MHz, VBW=3MHz for Peak data; RBW=1MHz, VBW=10Hz for Average data).
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.

Date of Test: August 31, 2017

Model: 191325

Mode: Packet DH1 (TX-Channel 2480MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4960.000	56.9	36.1	34.6	55.4	74.0	-18.6
Horizontal	*7440.000	57.7	35.6	37.2	59.3	74.0	-14.7

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4960.000	32.0	36.1	34.6	30.5	54.0	-23.5
Horizontal	*7440.000	34.2	35.6	37.2	35.8	54.0	-18.2

- NOTES:1. Peak detector is used for the emission measurement (RBW=1MHz, VBW=3MHz for Peak data; RBW=1MHz, VBW=10Hz for Average data).
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

INTERTEK TESTING SERVICES

4.8 Conducted Emission


Worst Case Conducted emission at 0.494 MHz is Passed by 12.9 dB margin

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
 Date of Test: August 31, 2017
 Model: 191325
 Worst Case Operating Mode: BT Link
 Modulation type: GFSK
 Phase: Live

Conducted Emission Test - FCC

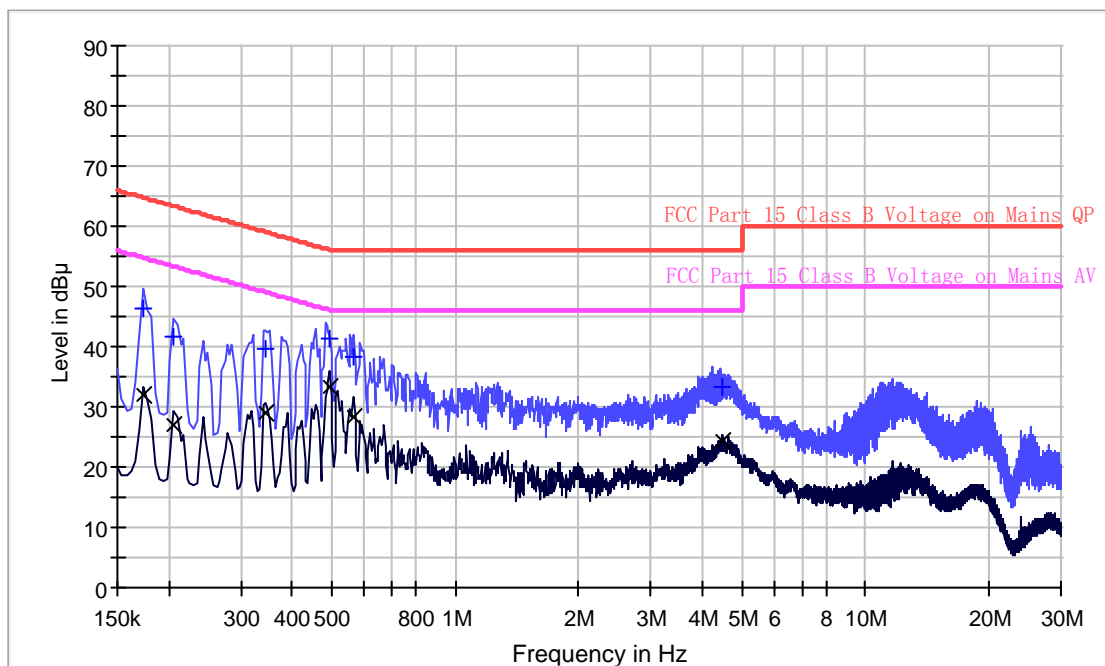

Result Table QP

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	46.3	L1	9.7	18.5	64.8
0.206000	41.8	L1	9.7	21.6	63.4
0.346000	39.7	L1	9.7	19.4	59.1
0.494000	41.5	L1	9.7	14.6	56.1
0.566000	38.5	L1	9.7	17.5	56.0
4.494000	33.4	L1	9.8	22.6	56.0

Result Table AV


Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	31.9	L1	9.7	22.9	54.8
0.206000	27.1	L1	9.7	26.3	53.4
0.346000	28.9	L1	9.7	20.2	49.1
0.494000	33.2	L1	9.7	12.9	46.1
0.566000	28.3	L1	9.7	17.7	46.0
4.494000	24.5	L1	9.8	21.5	46.0

TRF No.: FCC 15C_TX_c
 FCC ID: RJE191325
 Report No.: 170807037SZN-003

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
 Date of Test: August 31, 2017
 Model: 191325
 Worst Case Operating Mode: BT Link
 Modulation type: GFSK
 Phase: Neutral

Conducted Emission Test - FCC

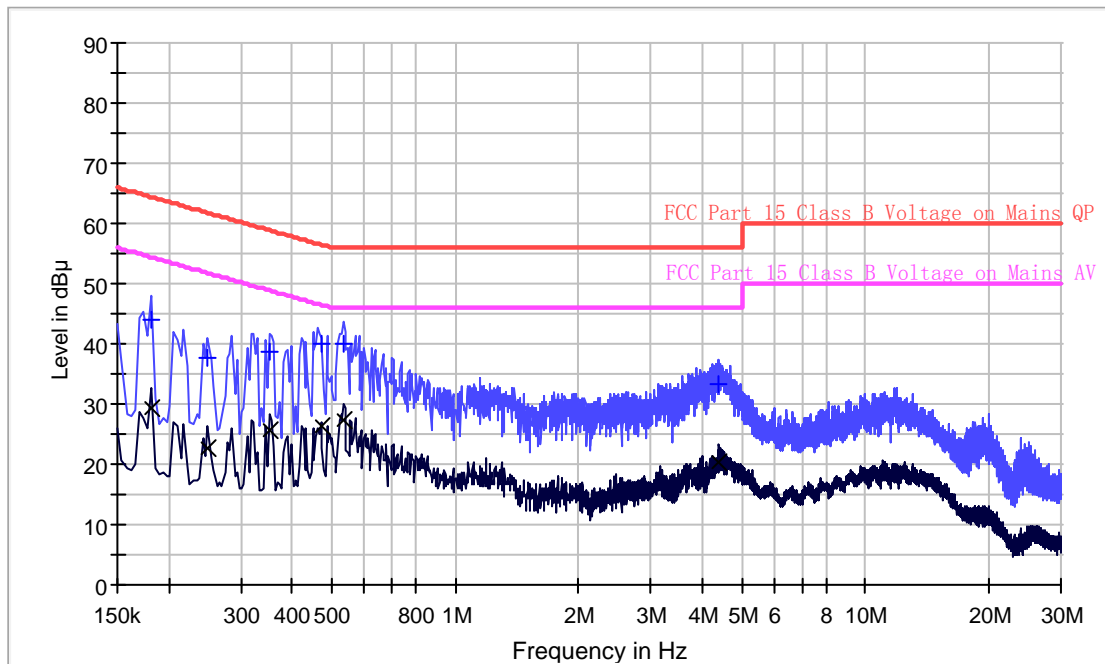

Result Table QP

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	44.0	N	9.7	20.4	64.4
0.250000	37.5	N	9.7	24.3	61.8
0.354000	38.8	N	9.7	20.1	58.9
0.470000	40.0	N	9.7	16.5	56.5
0.534000	40.1	N	9.7	15.9	56.0
4.406000	33.2	N	9.8	22.8	56.0

Result Table AV

Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	29.4	N	9.7	25.0	54.4
0.250000	22.6	N	9.7	29.2	51.8
0.354000	25.6	N	9.7	23.3	48.9
0.470000	26.3	N	9.7	20.2	46.5
0.534000	27.4	N	9.7	18.6	46.0
4.406000	20.4	N	9.8	25.6	46.0

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
Date of Test: August 31, 2017
Model: 191325

4.9 Radiated Emissions from Digital Section of Transceiver, FCC Ref: 15.109

- Not required - No digital part
- Test results are attached
- Included in the separated report.

INTERTEK TESTING SERVICES

Applicant: Monster, LLC.
Date of Test: August 31, 2017
Model: 191325

4.10 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

INTERTEK TESTING SERVICES

EXHIBIT 5
EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.doc & internal photos.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 6

PRODUCT LABELLING

INTERTEK TESTING SERVICES

6.0 Product Labelling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 7

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

INTERTEK TESTING SERVICES

EXHIBIT 8

INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

INTERTEK TESTING SERVICES

EXHIBIT 9

CONFIDENTIALITY REQUEST

INTERTEK TESTING SERVICES

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 10

MISCELLANEOUS INFORMATION

INTERTEK TESTING SERVICES

10.0 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, *Spectrum Analysis ... Pulsed RF*.

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

INTERTEK TESTING SERVICES

EXHIBIT 11

TEST EQUIPMENT LIST

INTERTEK TESTING SERVICES

11.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ182-02	RF Power Meter	Anritsu	ML2496A	1302005	01-Jun-2017	01-Jun-2018
SZ182-02-01	Power Sensor	Anritsu	MA2411B	1207429	01-Jun-2017	01-Jun-2018
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	9-Sep-2016	09-Sep-2017
SZ185-01	EMI Receiver	R&S	ESCI	100547	09-Feb-2017	09-Feb-2018
SZ061-08	Horn Antenna	ETS	3115	00092346	12-Oct-2016	12-Oct-2017
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	26-May-2017	26-May-2018
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	01-Jun-2017	01-Jun-2018
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	07-Jul-2017	07-Jul-2018
SZ181-04	Preamplifier	Agilent	8449B	3008A0247 4	09-Feb-2017	09-Feb-2018
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIALL	RG 213U	--	16-Jun-2017	16-Jun-2018
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	16-Jun-2017	16-Jun-2018
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	16-Jun-2017	16-Jun-2018
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	14-Jun-2017	14-Jun-2018
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	01-Nov-2016	01-Nov-2017
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	01-Nov-2016	01-Nov-2017
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2019
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	9-Sep-2016	09-Sep-2017