

R19IE3S-67M1ST

19" Intel® Celeron® N6211 IP67 Stainless Resistive Chassis Panel PC



KEY FEATURES

- Intel® Celeron® Elkhart Lake N6211 Processor
- Fanless Design
- Full IP67 Dust / Water Resistant
- SUS 316 / AISI 316 Stainless Steel
- Optical Bonding with Anti-moisture Treatment
- 5 Wire Resistive Touch / Anti-Reflection Protection Glass (Optional)



SPECIFICATIONS

Display	
Resolution	1280x1024
Contrast Ratio	1000:1
View Angles	85,85,80,80
Touch / Glass	Resistive Touch Screen Bonding With Panel Protection Glass Without touch function (Optional)
Size	19.0 inches
Panel Brightness	250.0 nits
Active Area	376.32x301.06 mm
System Specification	
WLAN	Support (Optional)
Processor	Intel® Celeron® N6211 (up to 2.6GHz) Intel® Celeron® N6210 (up to 3.0GHz) (Optional)
Storage	1 x M.2 2242 B-key SSD 128GB M.2 2242 B-key SSD up to 512GB (Optional) 1 x SATA III for 2.5" SSD/HDD up to 1TB (Optional)
Security	TPM 2.0
BT	Support (Optional)
Memory	1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional)
Ethernet controller	2 x Intel® Ethernet Controller
Operating System	Windows 11 IoT Enterprise SAC (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)
Mechanical	
Dimension	457.4 x 369.5 x 62.7 mm
Enclosure	Stainless Housing
Mounting	VESA Mount Yoke Mount
Cooling System	Fanless design
Environment	
Operating Humidity	10% to 90% RH, Non-Condensing
Storage Temperature	-20°C to 60°C
Operating Temperature	0°C to 45°C
IP rating	IP67
Certification	
Certification	CE, FCC
IO Ports	
Power Input	1 x M12 waterproof connector for 12V DC
Serial Port	1 x M12 waterproof connector for RS232
Indicator	1 x LED Indicator for power
USB Port	1x M12 waterproof connector for 2 x USB2.0
LAN	1 x waterproof Giga LAN RJ45 connector

1 x LED Indicator for storage

Control

Button 1 x Power Button
1 x Reset Button


Accessory

Accessory 100~240V AC to DC Adapter with waterproof connector
Power Cord
External USB cable with waterproof connector
External COM cable with waterproof connector
External LAN cable with waterproof connector
Waterproof caps
VESA screws

Power

Power Rating 12V DC (M12 type)

DIMENSIONS UNIT:MM

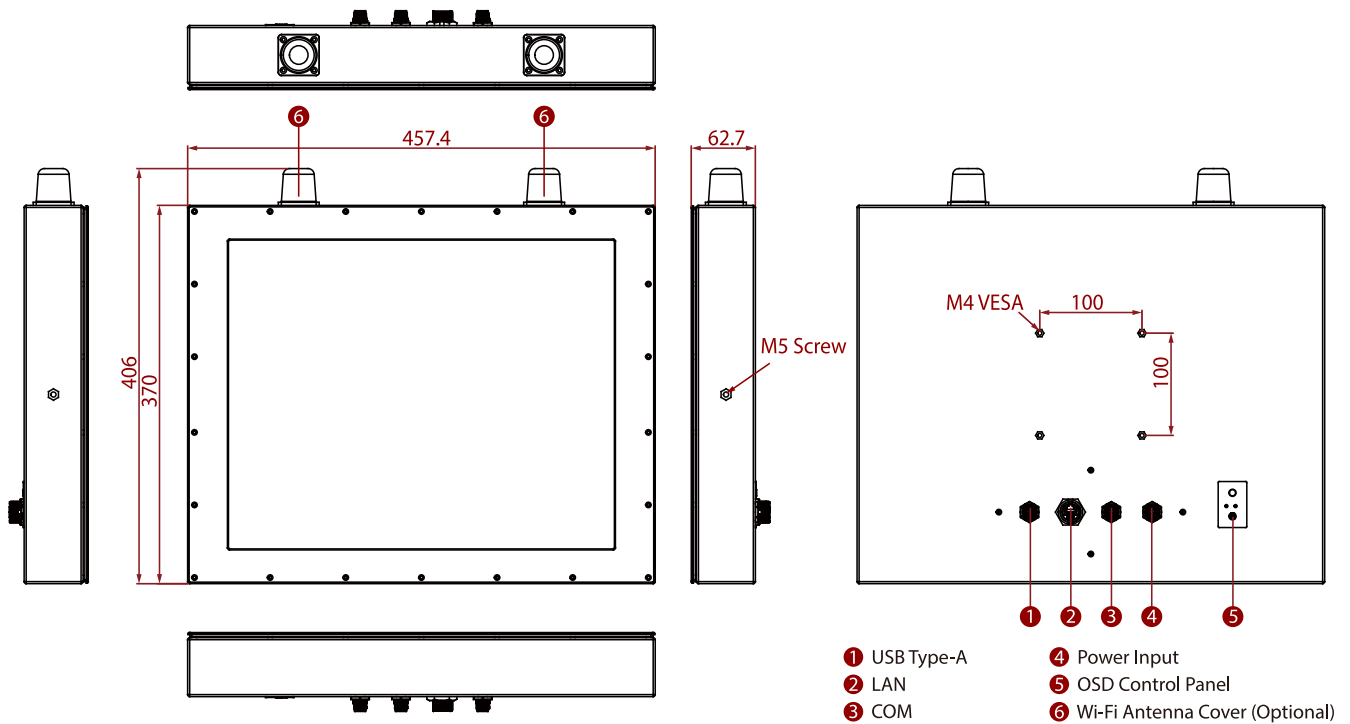

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.