



Foundation Details.  
50mm screed  
175mm concrete  
2 layers P.V.C waterproof  
Ballast - soft, 100mm  
Hard core to ground

T.G. boarding  
to give plaster interior.  
Fishing kitchen  
windows. 1/2 openers, to  
be sealed and rendered  
non opening.

Plaster on bricks  
old rendering, hacked off.

# SYLVANIA LED Luminaires

## Specification Guide



---



## Product Finder

Edge-Lit Panel	6	Leviton® Lumina RF Keypads	47
UltraLED™ Edge-Lit Panel	8	High Bay	48
SMART+ Edge-Lit Panel	10	Linear High Bay	50
Volumetric Troffer	12	UltraLED Linear High Bay	52
ValueLED™ Volumetric Troffer	14	Strip	54
UltraLED Retrofit Door Kit	16	Wrap	56
Troffer Retrofit Kit	18	Vapor Tight	58
SMART+ Troffer Retrofit Kit	20	10" Canopy	60
ULTRA LED™ RT5/6 HO and RT8	22	12" Canopy	62
SMART+ LED RT5/6 HO RGBW	24	Garage	64
ULTRA LED RT4 and RT5/6	26	Dusk to Dawn	66
SMART+ LED RT5/6	28	Jelly Jar	68
ULTRA LED 4" and 6" MICRODISK™	30	Square Light	70
Surface Mount Series	32	Bollard	72
Vintage Semi Flush	34	Bulkhead	74
Vintage Flush	35	Area Light	76
Vintage Pendant	36	Slim Wall Pack	78
Vintage Sconce	37	Wall Pack Cutoff	80
Slim Downlight	38	Wall Pack Non-Cutoff	82
SMART+ Flush Mount	40	Small Wall Pack	84
ULTRA LED CL	41	Slim Floodlight	86
SMART+ Convertible Undercabinet Light	42	Bullet Floodlight	88
SMART+ Edge-Lit Undercabinet	43		
SMART+ Flex XL	44	Product Ordering Guide	90
Exit Signs and Emergency Lights	45	Accessories	142
Hook Light	46		

# Lighting Layout Tool



Our goal is to provide you with all the tools needed to complete your project quickly and easily. Our Lighting Layout tool contains everything you need to determine number of luminaires for an indoor space or show light distribution for a luminaire. Visit [sylvania.com](http://sylvania.com) to take advantage of our Lighting Layout tool.

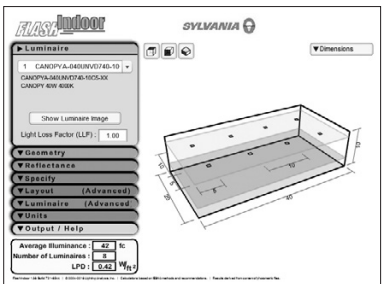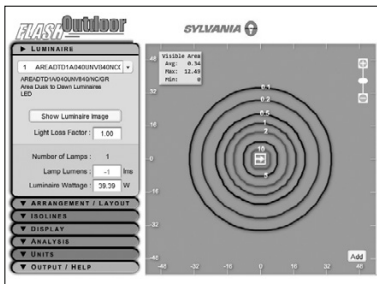

# Warranties

## LED PROFESSIONAL FIXTURE

Subject to change without notice.

LEDVANCE LLC (LEDVANCE) is pleased to provide a limited warranty for the LED Indoor and Outdoor Fixtures that are used in industrial or commercial applications only.

LEDVANCE LLC (LEDVANCE) warrants the LED Indoor and Outdoor Fixtures (the "Product") to be free from defects in materials and workmanship and to operate for a period of five (5) years from the date of installation (or 30 days after date of shipment to the Purchaser). If installation or shipment date is unverifiable, the date code of the product plus 3 months will be used to verify warranty coverage, subject to the Terms and Conditions set forth herein. This limited warranty is extended by LEDVANCE to the original end-user at the original installed location only.

If the Product fails to operate during the Warranty Period, LEDVANCE will, at its option, replace or repair the Product at no charge.

If LEDVANCE grants a replacement and Product is not available, a comparable product will be provided. LEDVANCE will not be responsible for labor costs for removal or installation. If no comparable product is available, credit will be granted to the original purchaser of the Product.

### TERMS AND CONDITIONS

This warranty only applies when the Product is: properly wired and installed, and operated and maintained in conditions, including environmental conditions (temperature, humidity) in accordance with the instructions contained in applicable Product Information Bulletin. This warranty excludes defects or damage caused by any primary side (line voltage) power source problems including, but not limited to, unregulated power, short circuits or lightning induced power surges, under/over voltage/current conditions, operating outside specified temperature range, or storing the Product outside the specified temperature range. The warranty excludes defects resulting from acts of God, fire, vandalism, or civil disturbances. This warranty does not apply to any abnormal use or use in violation of any applicable standard, code or instructions for use in installations including those contained in the latest National Electrical Code (NEC), the Standards for Safety of Underwriters Laboratory, Inc. (UL), the Standards for the American National Standards Institute (ANSI) or, in Canada, the Canadian Standards Association (CSA). This warranty will not apply in the event of conditions demonstrating abnormal use or stress, including but not limited to:

- Exceeding the maximum ambient operating temperatures specified in the Product Information Bulletin and or Cut Sheet published on our website.
- Storing the product outside the specified temperature range in the Product Information Bulletin and or Cut Sheet.

This warranty does not cover equipment, systems or components from other manufacturers that the Purchaser uses in conjunction with the Product. Any repair, alteration or modification of the Product, including replacement of Product components with components of other manufacturers will void the warranty in its entirety.

A warranty claim can be reported online at [www.sylvania.com/warranty](http://www.sylvania.com/warranty) or by contacting either the LEDVANCE National Customer Service & Sales Center at 1-800-654-0089 Fax: 866-632-9674 or the designated LEDVANCE sales representative.

If deemed necessary by LEDVANCE under the terms of this warranty, Purchaser will receive a Return Material Authorization (RMA) number, and shall promptly return the Product or Product component at the Purchaser's expense, to the address provided on the RMA. The RMA must be included on both the packing slip of the Product or Product component being returned and on the outside of the box. FAILURE TO FOLLOW THIS PROCEDURE SHALL VOID THE WARRANTY. IF REPLACEMENT PRODUCT IS PROVIDED UPFRONT FREE OF CHARGE AND THE ORIGINAL PRODUCT IS NOT RETURNED OR THE RETURNED PRODUCT IS NOT COVERED BY THE TERMS OF THE WARRANTY, THE CUSTOMER WILL BE CHARGED FOR THE REPLACEMENT PRODUCT AT THE THEN CURRENT PRICE PLUS SHIPPING COSTS.

If upon examination of the Product, LEDVANCE determines the root cause of failure to be due to a defect in materials or workmanship, LEDVANCE will provide the appropriate remedy as set forth above.

LEDVANCE reserves the right to (i) examine all Product to determine the cause of failure and patterns of usage and (ii) be the sole judge as to whether a Product is defective and covered under this warranty.

### LIMITATION OF LIABILITY

THE FOREGOING SHALL CONSTITUTE THE EXCLUSIVE REMEDY OF PURCHASER AND THE SOLE LIABILITY OF LEDVANCE FOR THE PRODUCT. NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS MADE OR IMPLIED. IN NO EVENT SHALL LEDVANCE BE LIABLE FOR ANY OTHER COSTS OR DAMAGES, INCLUDING LOST PROFITS OR REVENUES, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES. SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE OR JURISDICTION. IN NO EVENT SHALL LEDVANCE'S TOTAL LIABILITY FOR ANY REASON HEREUNDER EXCEED THE PRICE PAID BY PURCHASER FOR THE PRODUCT PURCHASED.

### QUESTIONS?

Please call customer service at 1-800-654-0089 or contact your local SYLVANIA representative.



© 2017 LEDVANCE LLC. Licensee of product trademark SYLVANIA & general lighting.

## LED SMART<sup>+</sup> PROFESSIONAL PRODUCT LIMITED WARRANTY

LEDVANCE LLC (LEDVANCE) is pleased to provide a limited warranty for SMART<sup>+</sup> Professional Product.

Subject to change without notice.

### 5-YEAR SMART<sup>+</sup> PROFESSIONAL PRODUCT REPLACEMENT LIMITED WARRANTY

The manufacturer warrants each SMART<sup>+</sup> Professional product ("Product") for five (5) years from date of purchase to be free from defects in materials and workmanship when used as directed. Failure to comply with Product warnings shall void the warranty. This warranty does not cover Product subject to accident, neglect, abuse, misuse, or acts of God. If Product fails to operate according to the warranty, the manufacturer will replace Product with the same or similar Product, at no charge. LABOR IS NOT INCLUDED. Product should be returned, together with proof of date of purchase, to the retail store where Product was purchased. For additional information, contact 1-800-LIGHTBULB (1-800-544-4828) or Email: LIGHTBULB@ledvance.com.

THIS IS THE EXCLUSIVE REMEDY AVAILABLE. LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IS EXPRESSLY EXCLUDED. SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE OR PROVINCE.

\*Please review packaging to determine whether your SMART<sup>+</sup> Professional product is covered by this Limited Warranty or contact us directly by phone or email.

### GARANTIE LIMITÉE DE REMPLACEMENT DE PRODUITS DE 5 ANS SMART<sup>+</sup>

LEDVANCE Ltd garantit que ce produit sera exempt de défaut de fabrication et de main d'oeuvre pendant deux (5) ans à compter de la date d'achat, si utilisé tel que prescrit. Ne pas se conformer aux avertissements reliés à ce produit annulera la garantie. Cette garantie ne couvre pas les accidents, la négligence, les abus, la mauvaise utilisation ou le cas de force majeure. Si le produit présente un défaut d'opération selon la garantie, le fabricant le remplacera sans frais avec un produit identique ou similaire. LES FRAIS DE MAIN-D'OEUVRE NE SONT PAS INCLUS. Le produit doit être retourné, accompagné d'une preuve d'achat, au magasin où il a été acheté. Pour plus d'information, veuillez contacter le 1-800-LIGHTBULB; par télécopieur au 866-632-9674; ou par courriel à LIGHTBULB@ledvance.com.

LES PRÉSENTES DISPOSITIONS CONSTITUENT LE SEUL ET UNIQUE RECOURS DISPONIBLE. LA RESPONSABILITÉ POUR DOMMAGES ACCESSOIRES OU CONSÉQUENTIELS EST EXPRESSÉMENT EXCLUSE. CERTAINES JURISDICTIONS OU CERTAINS ÉTATS NE PERMETTENT PAS L'EXCLUSION DE DOMMAGES ACCESSOIRES OU CONSÉQUENTIELS, DANS CES CAS, LES LIMITATIONS ET EXCLUSIONS MENTIONNÉES CI-DESSUS PEUVENT NE PAS S'APPLIQUER. CETTE GARANTIE VOUS ACCORDE CERTAINS DROITS LÉGAUX ET VOUS POUVEZ BÉNÉFICIER D'AUTRES RECOURS QUI VARIENT D'UN ÉTAT À L'AUTRE OU D'UNE PROVINCE À L'AUTRE.


### QUESTIONS?

Please call customer service at 1-800-654-0099 or contact your local SYLVANIA representative.



# Edge-Lit Panel

## Dimensions



- Robust, rigid construction for high quality and simple installation
- Edge-lit LED light design provides even, low-glare light output
- Thin profile, IC and damp rated for use in most ceiling applications

### L x W x H

1x4: 47.8" x 11.8" x 1.7"

2x2: 23.8" x 23.8" x 1.7"

2x4: 47.8" x 23.8" x 1.7"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW*
74243	PANELF1A/032UNVD835/14G/WH	32	3500K	1x4	3200	102
74244	PANELF1A/032UNVD840/14G/WH	32	4000K	1x4	3300	104
74938	PANELF1A/032UNVD850/14G/WH	32	5000K	1x4	3500	110
74251	PANELF1A/032UNVD835/22G/WH	32	3500K	2x2	3500	110
74252	PANELF1A/032UNVD840/22G/WH	32	4000K	2x2	3500	110
74797	PANELF1A/032UNVD850/22G/WH	32	5000K	2x2	3500	114
74247	PANELF1A/032UNVD835/24G/WH	32	3500K	2x4	3300	104
74248	PANELF1A/032UNVD840/24G/WH	32	4000K	2x4	3300	104
74935	PANELF1A/032UNVD850/24G/WH	32	5000K	2x4	3500	112
74249	PANELF1A/040UNVD835/24G/WH	40	3500K	2x4	4200	109
74250	PANELF1A/040UNVD840/24G/WH	40	4000K	2x4	4200	110
74934	PANELF1A/040UNVD850/24G/WH	40	5000K	2x4	4300	113

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
32 (1x4)	49	2x28W T8	35%
32 (1x4)	56	2x32W T8	43%
32 (2x2)	48	3x17W T8	33%
32 (2x2)	56	2U31 T8	43%
32 (2x4)	56	2x32W T8	43%
40 (2x4)	75	3x32W T8	47%

## Photometric Data

	8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
	On Center Luminaire Spacing								
	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
<b>1'x4' 32W</b>	44fc/3.2	36fc/2.9	32fc/2.0	43fc/2.7	35fc/2.4	31fc/1.8	42fc/2.5	34fc/2.3	31fc/1.8
<b>2'x2' 32W</b>	47fc/3.2	39fc/2.9	35fc/2.0	46fc/2.7	38fc/2.4	33fc/1.8	44fc/2.4	37fc/2.3	33fc/1.8
<b>2'x4' 32W</b>	44fc/3.3	36fc/2.8	32fc/2.0	43fc/2.7	35fc/2.4	31fc/1.8	42fc/2.5	34fc/2.3	31fc/1.7
<b>2'x4' 40W</b>	62fc/3.3	51fc/2.8	46fc/2.0	60fc/2.7	50fc/2.4	44fc/1.8	59fc/2.5	48fc/2.3	43fc/1.7

- Illuminance target: 30-50 footcandles avg.
- Initial illuminance measured at desk height
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options


Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# UltraLED™ Edge-Lit Panel



## Dimensions

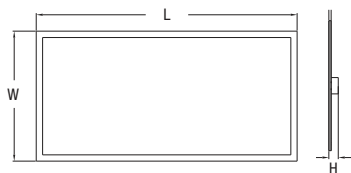

- DLC Premium listing increases rebate opportunities
- Edge-lit technology offers even and uniform lighting
- In three sizes for illuminating offices, retail or hospitality areas

### L x W x H

1x4	47.8" x 11.8" x 1.7"
2x2	23.8" x 23.8" x 1.7"
2x4	47.8" x 23.8" x 1.7"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW*
60302	PANELF2B/020UNVD840/14G/WH	20	4000K	1x4	2500	125
60308	PANELF2B/026UNVD840/14G/WH	26	4000K	1x4	3250	125
60320	PANELF2B/026UNVD840/24G/WH	26	4000K	2x4	3380	125
60296	PANELF2B/032UNVD840/24G/WH	32	4000K	2x4	4160	125
60344	PANELF2B/050UNVD840/24G/WH	50	4000K	2x4	6250	125
60350	PANELF2B/020UNVD840/22G/WH	20	4000K	2x2	2500	125
60314	PANELF2B/026UNVD840/22G/WH	26	4000K	2x2	3250	125

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.





## Wattage Comparison Chart

Panel Size	LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
1x4	20	2x28W T8	49	59%
	20	2x32W T8	56	64%
	26	2x28W T8	49	47%
	26	2x32W T8	56	54%
2x2	20	3x17W T8	48	58%
	20	2xU31W T8	56	64%
	26	3x17W T8	48	46%
	26	2xU31W T8	56	54%
	32	3x17W T8	48	33%
	32	2xU31W T8	56	43%
2x4	26	2x28W T8	49	47%
	26	2x32W T8	56	54%
	32	2x28W T8	49	35%
	32	2x32W T8	56	43%
	32	3x32W T8	75	57%
	40	3x28W T8	64	38%
	40	3x32W T8	75	47%
	40	4x28W T8	97	59%
	40	4x32W T8	112	64%
	50	4x28W T8	97	48%
50	4x32W T8	116	57%	

## Photometric Data

Please see Product Information Bulletin LEDLUM052 for photometric data.

## Additional Options


Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories

# SMART<sup>+</sup> Edge-Lit Panel



## Dimensions



- Robust, rigid construction for high quality and simple installation
- Edge-Lit LED technology provides even, glare free light output
- Fully dimmable and adjustable white from 2700-5000K
- SMART<sup>+</sup> Edge-Lit Panel requires ZigBee<sup>®</sup> compatible automation hub for product activation and control
- Not intended for use with dimmers, emergency lights or exit signs

### L x W x H

2x2: 23.8" x 23.8" x 1.7"

2x4: 47.8" x 23.8" x 1.7"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW	Dimmable*
74746	LED/PANEL/32W/ADJW/22/ZB/S+	32	2700-5000K	2x2	3200	100	Yes
74523	LED/PANEL/40W/ADJW/24/ZB/S+	40	2700-5000K	2x4	4000	100	Yes

\* Dimming via compatible app or Leviton Keypad

Contact your local SYLVANIA Product Distributor for more information.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
32 (2x2)	48	3x17W T8	33%
32 (2x2)	56	2U31 T8	43%
40 (2x4)	75	3x32W T8	47%

## Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Luminaire Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
<b>2'x2' 32W</b>	74746	42fc/3.0	36fc/2.7	28fc/3.6	41fc/2.7	33fc/1.9	27fc/2.8	40fc/2.4	32fc/2.0	26fc/2.5
<b>2'x4' 40W</b>	74523	58fc/3.1	49fc/2.1	40fc/3.3	58fc/3.1	48fc/2.0	39fc/2.6	55fc/2.4	47fc/1.9	38fc/2.4

- Illuminance target: 30-50 footcandles avg.
- Initial illuminance measured at desk height
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options


Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# Volumetric Troffer



## Dimensions



- Lightweight and sturdy one piece construction for easy installation
- Seamless design for even light output without light leaks or shadows
- Wet location rated for covered applications

### L x W x H

2x2: 23.7" x 23.7" x 3.5"

2x4: 47.7" x 23.7" x 3.5"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW*
74352	VOLUME1A/035UNVD835/22G/WH	35	3500K	2x2	3500	107
74353	VOLUME1A/035UNVD840/22G/WH	35	4000K	2x2	3600	113
74441	VOLUME1A/042UNVD835/24G/WH	42	3500K	2x4	4400	103
74442	VOLUME1A/042UNVD840/24G/WH	42	4000K	2x4	4400	103
74309	VOLUME2A/035UNVD835/24G/WH	35	3500K	2x4	4600	135
74348	VOLUME2A/035UNVD840/24G/WH	35	4000K	2x4	4600	138

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



\*\*DLC Premium only applicable on 2A versions.

## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
35 (2x2)	56	2xU31W T8	38%
25* (2x2)	56	2xU31W T8	55%
42 (2x4)	75	3x32W T8	44%
35* (2x4)	75	3x32W T8	53%

\* Volume 2A Version

## Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Luminaire Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
<b>2'x2'</b> <b>25W</b>	71725	41.5/1.48	34.2/1.29	30.3/1.51	40.2/1.55	33.3/1.40	29.2/1.32	38.6/1.60	32.1/1.48	28.1/1.26
	71726	42.0/1.48	34.6/1.29	30.7/1.52	40.8/1.55	33.8/1.40	29.6/1.32	39.2/1.60	32.5/1.49	28.5/1.26
<b>2'x2'</b> <b>35W</b>	74352	42.5/1.46	35.2/1.29	31.2/1.64	41.1/1.52	34.1/1.40	29.9/1.35	39.4/1.58	32.7/1.47	28.6/1.30
	74353	42.9/1.46	35.4/1.30	31.4/1.59	41.4/1.53	34.4/1.40	30.1/1.33	39.7/1.57	32.9/1.48	28.8/1.24
<b>2'x4'</b> <b>35W</b>	74309	57.1/1.47	47.3/1.29	42.0/1.51	55.5/1.54	46.1/1.40	40.5/1.32	53.2/1.59	44.3/1.48	38.9/1.26
	74348	58.0/1.47	48.1/1.29	42.7/1.51	56.4/1.54	46.9/1.40	41.1/1.31	54.1/1.60	45.0/1.48	39.5/1.26
<b>2'x4'</b> <b>42W</b>	74441	54.0/1.48	44.8/1.31	39.6/1.45	52.3/1.55	43.5/1.41	38.2/1.30	50.2/1.60	41.7/1.49	36.6/1.26
	74442	58.3/1.48	48.3/1.30	42.7/1.45	56.5/1.55	46.9/1.41	41.2/1.29	54.1/1.59	45.0/1.48	39.5/1.25

- Illuminance target: 30-50 footcandles avg.
- Initial illuminance measured at desk height
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options


Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# ValueLED™ Volumetric Troffer



## Dimensions



### L x W x H

2x2: 23.8" x 23.8" x 2.1"

2x4: 47.7" x 23.8" x 2.1"

- DLC Premium to maximize rebates
- Retrofit in recessed T-Grid ceilings
- Up to 52% in energy savings

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW*
60444	VOLUME3A/028UNVD835/22G/WH	28	3500K	2x2	3500	125
60445	VOLUME3A/028UNVD840/22G/WH	28	4000K	2x2	3500	125
60446	VOLUME3A/028UNVD850/22G/WH	28	5000K	2x2	3500	125
60447	VOLUME3A/028UNVD835/22G/WH/E	28	3500K	2x2	3500	125
60448	VOLUME3A/028UNVD840/22G/WH/E	28	4000K	2x2	3500	125
60449	VOLUME3A/028UNVD850/22G/WH/E	28	5000K	2x2	3500	125
60438	VOLUME3A/036UNVD835/24G/WH	36	3500K	2x4	4500	130
60439	VOLUME3A/036UNVD840/24G/WH	36	4000K	2x4	4500	130
60440	VOLUME3A/036UNVD850/24G/WH	36	5000K	2x4	4500	130
60441	VOLUME3A/036UNVD835/24G/WH/E	36	3500K	2x4	4500	130
60442	VOLUME3A/036UNVD840/24G/WH/E	36	4000K	2x4	4500	130
60443	VOLUME3A/036UNVD850/24G/WH/E	36	5000K	2x4	4500	130

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
3 x 17W T8	48	28	42%
2 x U31 T8	56	28	50%
3 x 28W T8	58	36	38%
3 x 32W T8	75	36	52%

## Photometric Data

	8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
	On Center Fixture Spacing								
	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
2'x2' 28W	44fc/1.5	37fc/1.3	33fc/1.5	43fc/1.6	36fc/1.4	32fc/1.3	41fc/1.6	35fc/1.5	30fc/1.3
	46fc/1.5	39fc/1.3	34fc/1.5	44fc/1.6	37fc/1.4	33fc/1.3	43fc/1.6	36fc/1.5	31fc/1.3
	46fc/1.5	39fc/1.3	34fc/1.5	45fc/1.6	38fc/1.4	33fc/1.3	43fc/1.6	36fc/1.5	32fc/1.3
2'x4' 36W	56fc/1.5	47fc/1.3	42fc/1.5	54fc/1.6	46fc/1.4	40fc/1.3	52fc/1.6	44fc/1.5	38fc/1.3
	58fc/1.5	50fc/1.3	44fc/1.5	57fc/1.6	48fc/1.4	42fc/1.3	55fc/1.6	46fc/1.5	40fc/1.3
	59fc/1.5	50fc/1.3	44fc/1.5	57fc/1.6	48fc/1.4	42fc/1.3	55fc/1.6	46fc/1.5	41fc/1.3

- Illuminance target: 30-50 footcandles avg.
- Initial illuminance measured at desk height
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options


Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# UltraLED™ Retrofit Door Kit



## Dimensions



### L x W x H

2x2: 23.8" x 23.9" x 2.4"

2x4: 47.8" x 23.9" x 2.4"

- Intended for installation in existing troffers
- Ideal for illuminating office, retail and hospitality areas
- Energy savings up to 59%

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW*
60616	RDORKIT3A/023UNVD835/22U/WH	23	3500K	2x2	2900	130
60617	RDORKIT3A/023UNVD840/22U/WH	23	4000K	2x2	2900	130
60618	RDORKIT3A/023UNVD850/22U/WH	23	5000K	2x2	2900	130
60619	RDORKIT3A/033UNVD835/24U/WH	33	3500K	2x4	4100	130
60620	RDORKIT3A/033UNVD840/24U/WH	33	4000K	2x4	4100	130
60621	RDORKIT3A/033UNVD850/24U/WH	33	5000K	2x4	4100	130

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.





## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
23	3 x 17W T8	48	52%
23	2 x U31 T8	56	59%
33	3 x 28W T8	58	43%
33	3 x 32W T8	75	56%

## Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Luminaire Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
2'x2' 23W	60616	36fc/1.5	30fc/1.3	25fc/1.9	35fc/1.5	29fc/1.4	24fc/1.7	34fc/1.6	28fc/1.5	23fc/1.7
	60617	36fc/1.5	30fc/1.3	25fc/1.9	35fc/1.5	29fc/1.4	24fc/1.7	34fc/1.6	28fc/1.5	23fc/1.7
	60618	36fc/1.5	30fc/1.3	25fc/1.9	35fc/1.5	29fc/1.4	24fc/1.7	34fc/1.6	28fc/1.5	24fc/1.7
2'x4' 33W	60619	50fc/1.5	41fc/1.3	35fc/1.9	48fc/1.6	40fc/1.4	34fc/1.7	46fc/1.6	39fc/1.5	32fc/1.7
	60620	50fc/1.5	42fc/1.3	35fc/1.9	49fc/1.6	41fc/1.4	34fc/1.7	47fc/1.6	39fc/1.5	33fc/1.7
	60621	50fc/1.5	42fc/1.3	35fc/1.9	49fc/1.6	41fc/1.4	34fc/1.7	47fc/1.6	39fc/1.5	33fc/1.7

- Average Illuminance (FC) at 30" AFF and avg/min uniformity
- 80/50/20 Reflectances
- Calculations are based on 110ft x 50ft area



## Additional Options

Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# Troffer Retrofit Kit

## Dimensions

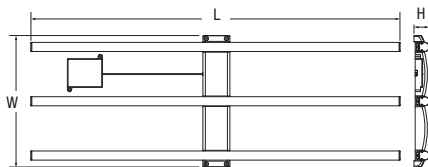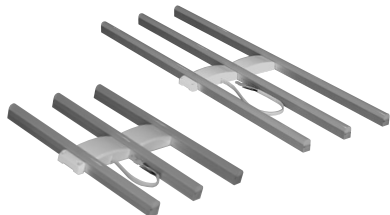

- Quick and easy installation in under 4 minutes
- 2-lamp and 3-lamp options to keep the tube look
- 120° beam angle

L x W x H
2x2: 20.3" x 14.8" x 1.7"
2x4: 43.7" x 14.8" x 1.7"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW*
75460	LEDR/TROFF/2L/024/UNV/D/830/22/WH	24	3000K	2ft - 2 Lamp	3000	125
75461	LEDR/TROFF/2L/024/UNV/D/835/22/WH	24	3500K	2ft - 2 Lamp	3000	125
75462	LEDR/TROFF/2L/024/UNV/D/840/22/WH	24	4000K	2ft - 2 Lamp	3000	125
75463	LEDR/TROFF/2L/024/UNV/D/850/22/WH	24	5000K	2ft - 2 Lamp	3000	125
75431	LEDR/TROFF/3L/026/UNV/D/830/22/WH	26	3000K	2ft - 3 Lamp	3200	123
75432	LEDR/TROFF/3L/026/UNV/D/835/22/WH	26	3500K	2ft - 3 Lamp	3200	123
75433	LEDR/TROFF/3L/026/UNV/D/840/22/WH	26	4000K	2ft - 3 Lamp	3200	123
75434	LEDR/TROFF/3L/026/UNV/D/850/22/WH	26	5000K	2ft - 3 Lamp	3200	123
75427	LEDR/TROFF/2L/027/UNV/D/830/24/WH	27	3000K	4ft - 2 Lamp	3200	119
75428	LEDR/TROFF/2L/027/UNV/D/835/24/WH	27	3500K	4ft - 2 Lamp	3200	119
75429	LEDR/TROFF/2L/027/UNV/D/840/24/WH	27	4000K	4ft - 2 Lamp	3200	119
75430	LEDR/TROFF/2L/027/UNV/D/850/24/WH	27	5000K	4ft - 2 Lamp	3200	119
75496	LEDR/TROFF/3L/040/UNV/D/830/24/WH	40	3000K	4ft - 3 Lamp	4800	120
75497	LEDR/TROFF/3L/040/UNV/D/835/24/WH	40	3500K	4ft - 3 Lamp	4800	120
75498	LEDR/TROFF/3L/040/UNV/D/840/24/WH	40	4000K	4ft - 3 Lamp	4800	120
75499	LEDR/TROFF/3L/040/UNV/D/850/24/WH	40	5000K	4ft - 3 Lamp	4800	120

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



## Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Luminaire Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
<b>2 ft 2 Lamp 24W</b>	75460									
	75461	39/1.6	32/1.4	28/1.5	37/1.6	31/1.5	26/1.4	36/1.6	30/1.6	25/1.5
	75462									
	75463									
<b>2 ft 3 Lamp 26W</b>	75431									
	75432	42/1.6	35/1.4	30/1.5	40/1.6	33/1.5	28/1.4	38/1.6	31/1.6	27/1.5
	75433									
	75434									
<b>4 ft 2 Lamp 27W</b>	75427									
	75428	44/1.6	36/1.4	31/1.5	42/1.6	34/1.5	29/1.4	40/1.6	33/1.6	28/1.5
	75429									
	75430									
<b>4 ft 3 Lamp 40W</b>	75496									
	75497	63/1.6	52/1.4	44/1.5	60/1.6	49/1.5	42/1.4	57/1.6	47/1.6	41/1.5
	75498									
	75499									

- Illuminance target: 30-50 footcandles avg.
- Initial illuminance measured at desk height
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast
- Fixture: Lithonia Prismatic troffer



## Additional Options

Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories

# SMART<sup>+</sup> Troffer Retrofit Kit

## Dimensions

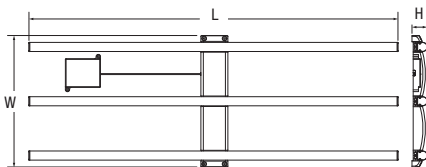

- Safe, easy, and quick installation in under 4 minutes
- Fully dimmable and adjustable white from 2700-6500K
- 120° beam angle
- SMART<sup>+</sup> Troffer Retrofit Kit requires ZigBee® compatible automation hub for product activation and control
- Not intended for use with dimmers, emergency lights or exit signs

L x W x H
2x2: 20.3" x 14.8" x 1.7"
2x4: 43.7" x 14.8" x 1.7"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW	Dimmable*
71507	LED/TROFF/34W/ADJW/22/ZB/S+	34	2700-6500K	2x2	3200	94	Yes
71506	LED/TROFF/48W/ADJW/24/ZB/S+	48	2700-6500K	2x4	4800	100	Yes

\* Dimming via compatible app or Leviton Keypad

Contact your local SYLVANIA Product Distributor for more information.



## Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Luminaire Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
<b>2'x2' 34W</b>	71507	34fc/3.6	29fc/3.0	23fc/4.4	33fc/2.9	27fc/1.9	22fc/3.2	33fc/2.6	26fc/2.1	21fc/2.5
<b>2'x4' 48W</b>	71506	47fc/3.6	39fc/2.4	32fc/4.8	46fc/3.6	38fc/2.1	31fc/3.4	45fc/2.6	37fc/2.2	30fc/3.0

- Illuminance target: 30-50 footcandles avg.
- Initial illuminance measured at desk height
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast
- Fixture: Parabolic troffer

## Additional Options


Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# ULTRA LED™ RT5/6 HO and RT8 Recessed Downlights



## Dimensions

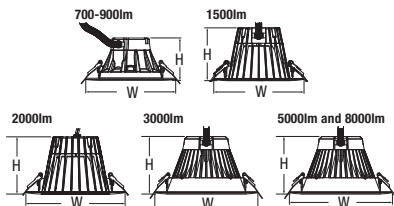

- Optimal for new construction and retrofit applications
- UL 1598 Listed and Classified for stand-alone and retrofit
- Optional trim ring extender

	W x H
650/900lm:	7.36" x 3.46"
1500lm:	7.36" x 4.31"
2000lm:	9.25" x 5.31"
3000lm:	9.45" x 4.88"
5000/8000lm:	9.45" x 5.51"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Total Lumens	LPW	Dimmable
75231	LED/RT5/6/HO/700/840	8	700	87	Yes (Phase Cut)
75139	LED/RT5/6/HO/900/840	13	900	69	Yes (0-10V Low Voltage)
75327*	LED/RT5/6/HO/900/840/347V	13	900	69	No
72530	LED/RT5/6/HO/1500/HO/840	17	1500	88	Yes (0-10V Low Voltage)
75328*	LED/RT5/6/HO/1500/840/347V	17	1500	88	No
74468	LED/RT8/2000/840	24	2000	83	Yes (0-10V Low Voltage)
75398*	LED/RT8/2000/840/347V	23	2000	86	No
72628	LED/RT8/3000/940	40	3000	75	Yes (0-10V Low Voltage)
79742	LED/RT8/5000/840	54	5000	92	Yes (0-10V Low Voltage)
75435*	LED/RT8/5000/840/347V	54	5000	100	No
79756	LED/RT8/8000/840	92	8000	87	Yes (0-10V Low Voltage)

\*347V kits are not ENERGY STAR® listed.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



\*\*Only available for RT5/6 HO.

## Wattage Comparison Chart

LED System Wattage	Traditional Source	Energy Savings*
8W	13W CFL DD, DT	\$27.00
13W	18W CFL DD, DT	\$27.00
17W	26W CFL DD, DT	\$49.00
17W	32W CFL DD, DT	\$82.00
24W	39W Compact Fluorescent	\$82.50
23W	42W Compact Fluorescent	\$104.50
40W	64W Compact Fluorescent	\$132.00
54W	84W Compact Fluorescent	\$165.00
92W	133W Compact Fluorescent	\$225.00

\* Based on \$0.11/kWh over 50,000 hours life.

## Photometric Data

		6' Corridor 8.0-8.5 ft Mounting Height	6' Corridor 9.0-9.5 ft Mounting Height	6' Corridor 10.0-10.5 ft Mounting Height
		10' Luminaire Spacing		
<b>8W</b>	75231	7.3fc/1.4	–	–
<b>13W</b>	75139	10.2fc/1.4	9.3fc/1.5	–
<b>17W</b>	72530	–	13.4fc/1.4	12.3fc/1.4

- Initial illuminance measured at floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options

Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# SMART<sup>+</sup> LED RT5/6 HO RGBW

## Recessed Downlight

### Dimensions



- Optimal for new construction and retrofit applications
- Integrated white trim and metal conduit adapter for direct replacement
- Fully dimmable, with millions of color options and adjustable white from 1900-6500K
- SMART<sup>+</sup> RT5/6 HO RGBW requires ZigBee® compatible automation hub for product activation and control
- Not intended for use with dimmers, emergency lights or exit signs

W	x	H
7.34"	x	4.29"

### Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Total Lumens	LPW	Dimmable*	R9
74281	LED/21/RTHO/DIM/56/RGBW/S+	21	1900-6500K	1400	67	Yes	>50

\* Dimming via compatible app or Leviton Keypad

Contact your local SYLVANIA Product Distributor for more information.





## Wattage Comparison Chart

LED System Wattage	Traditional Source	Energy Savings*
21W	26W CFL DD, DT	\$49.00
21W	32W CFL DD, DT	\$82.00

\* Based on \$0.11/kWh over 50,000 hours life.

## Photometric Data

		8.0-8.5 ft Mounting Height	9.0-9.5 ft Mounting Height	10.0-10.5 ft Mounting Height	11.0-11.5 ft Mounting Height	12.0-12.5 ft Mounting Height
		10' Luminaire Spacing				
21W	74281	15.7fc/1.4	14.4fc/1.5	13.2fc/1.4	12.4fc/1.4	11.5fc/1.4

		11.0-11.5 ft Mounting Height	12.0-12.5 ft Mounting Height
		15' Luminaire Spacing	
21W	74281	8.8fc/1.2	8.0fc/1.1

- Illuminance target: 5-10 footcandles avg.
- Initial illuminance measured at floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options

Please see pages 90-145 for more details on:

- Sensor    Emergency    Accessories
-


# ULTRA LED™ RT4 and RT5/6

## Recessed Downlights



- CEC Compliant\*
- California Title 24 Luminaire\*
- Integrated white trim, white baffle reflector socket adaptor included

### Dimensions

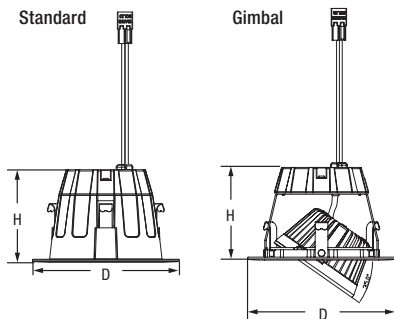

	<b>D x H</b>
4" Standard:	5.04" x 3.18"
4" Gimbal:	5.04" x 3.18" w/35" Gimbal
5/6" Standard:	7.37" x 3.4"
5/6" Gimbal:	7.28" x 3.4" w/30" Gimbal

### Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Total Lumens	R9
74288	LED/RT4/600/940/FL80	9	600	—
74926	LED/RTQ4/600/940	9	600	>50
74292	LED/RT5/6/700/940/FL80	10	700	15
74930	LED/RTQ5/6/900/940	13	900	>50
79752	LED/RT5/6/1200/930RP	16	1200	15
79753	LED/RT5/6/1200/940	16	1200	15

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.

\*Contractor Series not CEC/Title 24 Compliant.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Energy Savings*
9W	Incandescent 50R20	\$225
9W	Halogen 50PAR20/WFL	\$225
9W	Compact Fluorescent 14R20	\$27
10W	Incandescent 65WBR30	\$302
13W	Incandescent 75WBR40	\$341
16W	Incandescent 100WBR40	\$462

\* Based on \$0.11/kWh over 50,000 hours life.

## Photometric Data

		6' Corridor 8.0-8.5 ft Mounting Height	6' Corridor 9.0-9.5 ft Mounting Height	6' Corridor 10.0-10.5 ft Mounting Height
		10' Luminaire Spacing		
<b>9W</b>	74288	6.3fc/1.4	–	–
<b>10W</b>	74292	7.3fc/1.4	–	–
<b>13W</b>	74930	10.2fc/1.4	9.3fc/1.5	–
<b>16W</b>	79753	12.0fc/1.4	11.0fc/1.4	10.0fc/1.4

- Initial illuminance measured at floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options

Please see pages 90-145 for more details on:


- Sensor      Emergency      Accessories
-

# SMART<sup>+</sup> LED RT5/6

## Recessed Downlight



### Dimensions



W	x	H
7.3"	x	3.35"

- Easy screw based installation into most 5" or 6" recessed cans
- Integrated white trim and metal conduit adapter for direct replacement
- Fully dimmable, and offered in both adjustable white (2700-6500K) and full color options
- SMART<sup>+</sup> RT5/6 requires ZigBee® compatible automation hub for product activation and control
- Not intended for use with dimmers, emergency lights, or exit signs

### Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Total Lumens	LPW	Dimmable*	R9
73742	LED/10/RT56/ADJW/ZB/S+	10	2700-6500K	810	81	Yes	—
73741	LED/13.5/RT56/RGBW/ZB/S+	13.5	2700-6500K	820	60	Yes	>50

\* Dimming via compatible app or Leviton Keypad

Contact your local SYLVANIA Product Distributor for more information.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Energy Savings*
10W	Incandescent 65WBR30	\$121
13.5W	Incandescent 75WBR40	\$135

\* Based on \$0.11/kWh over 20,000 hours life.

## Photometric Data

		8.0-8.5 ft Mounting Height	9.0-9.5 ft Mounting Height	10.0-10.5 ft Mounting Height	11.0-11.5 ft Mounting Height
		10' Luminaire Spacing			
<b>10W</b>	73742	8.6fc/1.4	8.0fc/1.4	7.3fc/1.4	7.0fc/1.4
<b>13.5W</b>	73741				

- Initial illuminance measured at floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options

Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-


# ULTRA LED™ 4" and 6" MICRODISK™

## Recessed Downlights



- LED Downlight kit with remote driver that operates on 120-277V
- 1" Thin design allows for installation directly under joists
- Does not require housing for installation

### Dimensions



#### D x H

4in: 5.19" x 1.0"

6in: 7.32" x 1.0"

### Ordering Information

Item Number	Ordering Abbreviation	Delivered Light Output (lm)	Color Temp (CCT)	Dimming
40051	LED/MD4/650DIM/927/RP	650	2700K	Yes (Phase-Cut)
40052	LED/MD4/650DIM/930/RP	650	3000K	Yes (Phase-Cut)
40053	LED/MD4/650DIM/940/RP	650	4000K	Yes (Phase-Cut)
40054	LED/MD4/650DIM/950/RP	650	5000K	Yes (Phase-Cut)
40055	LED/MD6/900DIM/927/RP	900	2700K	Yes (Phase-Cut)
40056	LED/MD6/900DIM/930/RP	900	3000K	Yes (Phase-Cut)
40057	LED/MD6/900DIM/940/RP	900	4000K	Yes (Phase-Cut)
40058	LED/MD6/900DIM/950/RP	900	5000K	Yes (Phase-Cut)
75030	LED/MD4/700/830/UNV	700	3000K	Yes (0-10V Low Voltage)
71196	LED/MD4/700/840/UNV	700	4000K	Yes (0-10V Low Voltage)
75031	LED/MD4/700/850/UNV	700	5000K	Yes (0-10V Low Voltage)
75032	LED/MD6/1100/830/UNV	1100	3000K	Yes (0-10V Low Voltage)
71197	LED/MD6/1100/840/UNV	1100	4000K	Yes (0-10V Low Voltage)
75033	LED/MD6/1100/850/UNV	1100	5000K	Yes (0-10V Low Voltage)

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



## Wattage Comparison Chart

Basic Product Description	Traditional Source	Energy Savings*
MICRODISK	Incandescent 100BR40	\$313
MICRODISK	120W Incandescent	\$568

\* Based on \$0.11/kWh over 50,000 hours life.

## Photometric Data

		6' Corridor 8.0-8.5 ft Mounting Height	6' Corridor 9.0-9.5 ft Mounting Height
		10' Luminaire Spacing	
<b>8W</b>	71196	6.3fc/1.4	—
<b>8.5W</b>	40053	5.8fc/1.4	—
	40054		
<b>12W</b>	40056	8.7fc/1.4	8.0fc/1.5
	40057		
<b>13W</b>	71197	10.2fc/1.4	9.3fc/1.5

- Initial illuminance measured at floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options

Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# Surface Mount Series



Surface Mount



Square Flush Mount



Drum Flush Mount



Round Flush Mount



Flush Mount Cloud with Trim

- Easy to install, lightweight luminaires in multiple styles for any surface mount application
- Phase-cut dimmer compatibility for use with many light switches and controls
- Energy Star qualified to ensure quality and incentive compliance
- Closet Rated

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Total Lumens	LPW	Dimmable
74305	LEDFLUSHRND/11IN16DIM/827/WH	17.5	1000	57	Yes (Phase-cut)
74306	LEDFLUSHRND/11IN16DIM/840/WH	17.5	1200	68	Yes (Phase-cut)
74263	SURFACER1A/025120T/827/14S/WH	25	1500	60	Yes (Phase-cut)
74264	SURFACER1A/025120T/840/14S/WH	25	1600	65	Yes (Phase-cut)
71500	LEDFLUSHDRM/11IN15DIM/830/WH	15	1000	67	Yes (Phase-cut)
71505	LEDFLUSHDRM/11IN15DIM/840/WH	15	1000	67	Yes (Phase-cut)
74303	LEDFLUSHSQ/11IN16DIM/827/WH	17.5	1000	57	Yes (Phase-cut)
74304	LEDFLUSHSQ/11IN16DIM/840/WH	17.5	1200	68	Yes (Phase-cut)
71404	LEDFLUSHRND/10IN15DIM/840/BN	15	1000	67	Yes (Phase-cut)
71405	LEDFLUSHRND/12IN15DIM/830/BN	15	1000	67	Yes (Phase-cut)
71406	LEDFLUSHRND/12IN15DIM/840/BN	15	1000	67	Yes (Phase-cut)
74307	LEDFLUSHRNDTRM/11IN20DIM/827/WH	21	1000	47	Yes (Phase-cut)
74308	LEDFLUSHRNDTRM/11IN20DIM/840/WH	21	1200	57	Yes (Phase-cut)

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.





---

## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings*
15	60W Incandescent	60	75%
21	60W Incandescent	60	65%
25	1x32W CFL	36	31%
25	100W Incandescent	100	75%

\* Based on \$0.11/kWh over 50,000 hours life.

## Additional Options

Please see pages 90-145 for more details on:

Sensor

Emergency

Accessories

# Vintage Semi-Flush Mount Family



Essex



Beverly



Lincoln



Plymouth

- Trendy, antique black, semi-flush mount fixtures
- Vintage inspired option to light kitchens, gathering areas, hallways, foyers and hospitality applications
- Versatile fixtures complement the look of almost any space and pair nicely with pendant lights

---

## Ordering Information

Item Number	Ordering Abbreviation	Product Name	Input Voltage (V)	Canopy Diameter	Dimming
60115	CAGEFLUSH/120/86SG/BL/VID/CC	Essex	120	4.5in	Phase-Cut
60116	BARNCAGEFLUSH/120/9SG/BL/VID/CC	Beverly	120	4.5in	Phase-Cut
60120	BARNFLUSH/120/8CG/BL/VID/CC	Lincoln	120	4.5in	Phase-Cut
60027	JELLYJARFLUSH/120/6CG/BL/VID	Plymouth	120	4.5in	Phase-Cut

Contact your local SYLVANIA Product Distributor for more information.

## Additional Options

Please see pages 90-145 for more details on:

Sensor



Emergency



Accessories



# Vintage Flush Mount Family



Wellesley



Andover



Cambridge

- Trendy, antique black, semi-flush mount fixtures provide a vintage inspired option to light kitchens, gathering areas, hallways, foyers and hospitality applications
- Versatile fixtures complement the look of almost any space and pair nicely with pendant lights
- Seeded glass and metal detailing provide for an elegant appearance

## Ordering Information

Item Number	Ordering Abbreviation	Product Name	Input Voltage (V)	Canopy Diameter	Dimming
60124	MTLDRUMFLUSH/120/11SG/BL/VID/CC	Wellesley	120	11in	Phase-Cut
60126	ANTDRUMFLUSH/120/11SG/BL/VID/CC	Andover	120	11in	Phase-Cut
60125	RINGDRUMFLUSH/120/11SG/BL/VID/CC	Cambridge	120	11in	Phase-Cut

Contact your local SYLVANIA Product Distributor for more information.

## Additional Options

Please see pages 90-145 for more details on:

Sensor



Emergency



Accessories



# Vintage Pendant Family



Lowell



Hudson



Brookline



Manchester

- Vintage-industrial look with pendant lights that are perfect for kitchens, gathering areas, hallways, foyers, retail spaces, restaurants and hospitality applications
- Perfect for single use or multiples to provide an elegant and classic addition to almost any space
- Ships with one highly efficient LED A19 or ST19 clear filament bulb

## Ordering Information

Item Number	Ordering Abbreviation	Product Name	Input Voltage (V)	Cord Length	Canopy Diameter	Dimming
60114	CAGEPENDANT/12030/CG/BL/VID/CC	Lowell	120	42in	4.5in	Phase-Cut
60029	CAGEPENDANTPLG/12030/CG/BL/VID	Lowell - Plug	120	120in	—	Phase-Cut
60117	FCTYPENDANT/12009/CG/BL/VID/CC	Hudson	120	42in	4.5in	Phase-Cut
60113	BELLPENDANT/12030/CG/BL/VID/CC	Brookline	120	42in	4.5in	Phase-Cut
60028	CONEPENDANTPLG/12030/CG/BL/VID	Manchester - Plug	120	120in	—	Phase-Cut

Contact your local SYLVANIA Product Distributor for more information.

## Additional Options

Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories



# Vintage Sconce Family



Weymouth



Dover



Easton

- Perfect for doorways, porches, and entry spaces
- Complement the look of almost any outdoor space or entry space, as well as restaurant and hospitality applications
- Perfect for single use, pairs or multiples

## Ordering Information

Item Number	Ordering Abbreviation	Product Name	Input Voltage (V)	Dimming
60121	FCTRYSCONCE/120/7/BL/VOD/CC	Weymouth	120	Phase-Cut
60122	RSTFCTRYSCONCE/120/7/BL/VOD/CC	Dover	120	Phase-Cut
60123	PANFCTRYSCONCE/120/7/BL/VOD/CC	Easton	120	Phase-Cut

Contact your local SYLVANIA Product Distributor for more information.

## Additional Options

Please see pages 90-145 for more details on:

Sensor





Emergency



Accessories



# Slim Downlight

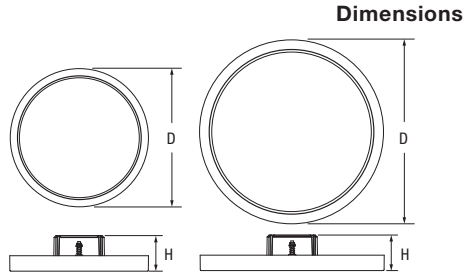

- Self leveling and twist lock features for simple installation into standard j-box
- Edge-lit LED light guide design provides even, low-glare light output
- Low profile, seamless design enhances interior appearance in new construction and retrofit applications

	D	x	H
6in:	6"	x	1.57"
8in:	8"	x	1.57"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW*
60003	SLMDNLR1A/010UNVT827/06J/WH	10	2700K	6in	700	70
60004	SLMDNLR1A/010UNVT830/06J/WH	10	3000K	6in	750	75
60005	SLMDNLR1A/010UNVT840/06J/WH	10	4000K	6in	800	80
60058	SLMDNLR1A/014UNVT827/08J/WH	14	2700K	8in	980	70
60057	SLMDNLR1A/014UNVT830/08J/WH	14	3000K	8in	1050	75
60056	SLMDNLR1A/014UNVT840/08J/WH	14	4000K	8in	1120	80

\*LPW per LM79 report.  
Only dimmable at 120V.

Contact your local SYLVANIA Product Distributor for more information.



## Photometric Data

		6' Corridor 8.0-8.5 ft Mounting Height	6' Corridor 9.0-9.5 ft Mounting Height	6' Corridor 10.0-10.5 ft Mounting Height
		10' Luminaire Spacing		
<b>10W</b>	60003	7.1fc/1.15(Avg/Min)	6.4fc/1.11(Avg/Min)	5.8fc/1.11(Avg/Min)
	60004			
	60005			
<b>14W</b>	60058	10.5fc/1.14(Avg/Min)	9.5fc/1.12(Avg/Min)	8.6fc/1.09(Avg/Min)
	60057			
	60056			

- Initial illuminance measured at floor
- 80/50/20 (ceiling/wall/floor)
- Summary table: average initial illuminance/uniformity (avg/min)

## Additional Options


Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories

# SMART<sup>+</sup> 15" Flush Mount



## Dimensions



D	x	H
15in	x	1.5"

- Lightweight fixture that is easily installed in any wall or ceiling
- Edge-Lit LED technology provides even, glare free light output
- Fully dimmable and adjustable white from 2700-6500K
- SMART<sup>+</sup> Flush Mount fixture requires ZigBee<sup>®</sup> compatible automation hub for product activation and control
- Not intended for use with dimmers, emergency lights, or exit signs

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Total Lumens	LPW	Dimmable*
72567	LED/15IN/EDGELITFLUSH/ADJW/ZB/S+	23	2700-6500K	1500	65	Yes

\* Dimming via compatible app or Leviton Keypad

Contact your local SYLVANIA Product Distributor for more information.

## Additional Options

Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories






# ULTRA LED™ CL Lamp



## Dimensions



- Screws into any plastic or porcelain lamp holder
- Installs in junction box for new construction
- ENERGY STAR® rated
- Closet Rated

	W	x	H
700lm:	7"	x	1.29"
1200lm:	7"	x	3.33"
2500lm:	11"	x	3.93"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Voltage (V)	Color Temp (CCT)	Total Lumens	LPW
75080	LED/700/CL/827/RP	9	120	2700K	700	77
75081	LED/700/CL/840/RP	9	120	4000K	700	77
75112	LED/1200/CL/827/RP	15	120	2700K	1200	80
75113	LED/1200/CL/840/RP	15	120	4000K	1200	80
75123	LED/2500/CL/827/RP	31	120	2700K	2500	80
75124	LED/2500/CL/840/RP	31	120	4000K	2500	80

Contact your local SYLVANIA Product Distributor for more information.

## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
9	65W BR30 Incandescent	65	86%
15	100W Incandescent	100	85%
31	150W Incandescent	150	79%

## Additional Options


Please see pages 90-145 for more details on:

Sensor    Emergency    Accessories



# SMART<sup>+</sup> Convertible Undercabinet Light

## Dimensions



- Individual units are direct wire or plug in capable for retrofit and new construction applications
- Connector cable included for connecting multiple units (expandable up to 360W)
- Fully dimmable and adjustable white from 2700-6500K
- SMART<sup>+</sup> Convertible Undercabinet requires ZigBee® compatible automation hub for product activation and control
- Not intended for use with dimmers, emergency lights or exit signs

	L	x	W	x	H
9"	9"	x	3"	x	1"
12"	12"	x	3"	x	1"
18"	18"	x	3"	x	1"
24"	24"	x	3"	x	1"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW	Dimmable*
71147	LED/HWUC/6.5/TW/9IN/LFY	6.5	2700-6500K	9in	300	46	Yes
71148	LED/HWUC/7.5/TW/12IN/LFY	7.5	2700-6500K	12in	400	53	Yes
71149	LED/HWUC/9/TW/18IN/LFY	9	2700-6500K	18in	500	55	Yes
71150	LED/HWUC/10.5/TW/24IN/LFY	10.5	2700-6500K	24in	600	57	Yes

\* Dimming via compatible app or Leviton Keypad

Contact your local SYLVANIA Product Distributor for more information.

## Additional Options

Please see pages 90-145 for more details on:

Sensor



Emergency



Accessories



# SMART<sup>+</sup> Edge-Lit Undercabinet

## Dimensions



L	x	W	x	H
18"	x	2.5"	x	.25"

- Thin profile luminaire barely visible when used in undercabinet and shelving applications
- No hardwiring required, easy to install via plug-in
- Connector cable included for connecting multiple units
- Fully dimmable and adjustable white from 2700-6500K
- SMART<sup>+</sup> Edge-Lit Undercabinet requires ZigBee<sup>®</sup> compatible automation hub for product activation and control
- Not intended for use with dimmers, emergency lights or exit signs

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW	Dimmable*
72569	LED/8/EDGELITUC/ADJW/ZB/S+	8	2700-6500K	18in	297	37	Yes

\* Dimming via compatible app or Leviton Keypad

Contact your local SYLVANIA Product Distributor for more information.

UNDERCABINET

## Additional Options

Please see pages 90-145 for more details on:


Sensor      Emergency      Accessories



# SMART<sup>+</sup> Flex XL

## Lighting Kit

### Dimensions



#### Length

16'

- Included adhesive tape on the back allows for quick installation on solid surfaces and are constructed from flexible plastic to easily wrap around corners
- Fully dimmable, with millions of color options and adjustable white from 2700-6500K
- Expandable up to 80ft, and compatible with the SMART<sup>+</sup> Flex Connector Kit, for added customization
- SMART<sup>+</sup> Flex XL RGBW requires ZigBee<sup>®</sup> compatible automation hub for product activation and control
- Not intended for use with dimmers, emergency lights or exit signs
- Contains one 16-foot flexible strip, with 48W rated power supply, and ZigBee control unit

### Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Length	Dimmable*
73773	LED/48/FLEXXL/RGBW/ZB/S+	48	2700-6500K	16ft	Yes

\* Dimming via compatible app or Leviton Keypad

Contact your local SYLVANIA Product Distributor for more information.


### Additional Options

Please see pages 90-145 for more details on:


Sensor      Emergency      Accessories



# Exit Signs and Emergency Lights

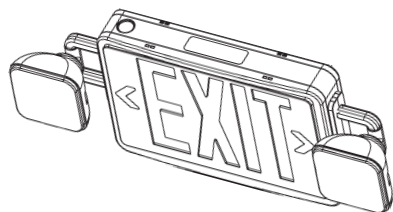

## Dimensions



- Slim profile, lightweight, easy to install exit sign that replaces traditional incandescent
- Bright, energy-efficient LEDs provide energy savings up to 95%
- Universal mounting
- Single or double face
- Lettering available in red and green
- Emergency options offer 90 minutes of backup
- Flame resistant and rated for damp locations

	<b>L x W x H</b>
Emergency Lights	13.6" x 4.3" x 3.5"
Exit Signs	11.6" x 7.5" x 1.8"
Combination	13.6" x 9" x 1.9"
Running Man	13.6" x 9" x 1.9"
Running Man Combination	13.6" x 9" x 1.9"

## Ordering Information

<b>Item Number</b>	<b>Ordering Abbreviation</b>	<b>Power (W)</b>	<b>Size</b>
60763	EMLIGHT1A/3DVTHS/S/WH	2.4	13.6" x 3.5" x 4.3"
60764	EMLIGHT1B/3DVTHR/S/WH	2.4	13.6" x 3.5" x 4.3"
60761	EXIT1A/RDV/U/WH/EM	0.9	11.6" x 1.8" x 7.5"
60762	EXIT1A/GDV/U/WH/EM	0.9	11.6" x 1.8" x 7.5"
60759	EXITCOMBO1A/RDVTHS/U/WH/EM	2.4	13.6" x 1.9" x 9"
60760	EXITCOMBO1A/GDVTHS/U/WH/EM	2.4	13.6" x 1.9" x 9"
60757	EXIT1B/GDCV/U/WH/EM	5	13.6" x 1.9" x 9"
60758	EXITCOMBO1B/GDCVTHR/U/WH/EM	5.5	13.6" x 1.9" x 9"

Contact your local SYLVANIA Product Distributor for more information.

## Additional Options

Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories



# Hook Light



## Dimensions

Product Length: 12"  
Product Diameter: 1"  
Hook Length: 2.4"  
Bracket Length: 2"  
Cord Length: 72"  
Weight: 3.2 lbs (1.5kg)

- Good uniformity of color with a CRI>80
- Even light distribution without glare
- Convenient mounting bracket or hook for easy portability and use
- Light where you need it with attached 6ft cord

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Total Lumens	LPW	Size
60025	TBKT500L/5120840/12PL/WH/PID	5	4000K	500	100	1'

Contact your local SYLVANIA Product Distributor for more information.

## Additional Options

Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories


          



# Leviton® Lumina RF Keypads



## Dimensions



- Smart room controller that is capable of operating up to 50 devices
- Quick and easy installation without the need for dimming wires
- Group your lights and set scenes, adjusting brightness, color temperature and color control, all controlled with a push of a button
- Easily incorporates motion sensors and photocells for added automation

L	x	W	x	D
4.61"	x	2.75"	x	1.59"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Size
70000	1KEYPAD/.5W/ZB/LVT/LMN	0.5	1 Button
70550	2KEYPAD/.5W/ZB/LVT/LMN	0.5	2 Button
75548	4KEYPAD/.5W/ZB/LVT/LMN	0.5	4 Button
75547	8KEYPAD/.5W/ZB/LVT/LMN	0.5	8 Button

Contact your local SYLVANIA Product Distributor for more information.


## Additional Options

Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories



# High Bay

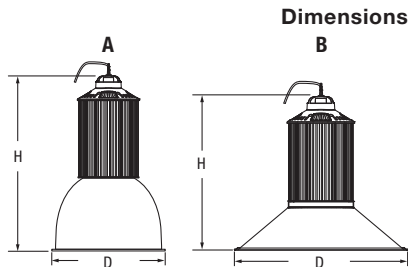

- Lightweight, impact resistant luminaire is designed for easy and safe installation
- Traditional design with multiple optic choices that enhance lumen output
- 1 for 1 replacement up to 1000W MH/HPS luminaire
- Wide operating temperature

	D	x	H	D	x	H
100W:	A: 16.2"	x	21.8"	B: 19.7"	x	17"
200W:	A: 16.2"	x	23.6"	B: 19.7"	x	18.8"
300W:	A: 16.2"	x	25.2"	B: 19.7"	x	20.4"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Voltage (V)	Color Temp (CCT)	Total Lumens*	LPW*
74230	HIBAY1A/100UNVD840/GR	100	120-277	4000K	10,800	108
74231	HIBAY1A/100UNVD850/GR	100	120-277	5000K	10,800	108
74232	HIBAY1A/200UNVD840/GR	200	120-277	4000K	22,200	114
74233	HIBAY1A/200UNVD850/GR	200	120-277	5000K	22,500	115
71731	HIBAY1A/300UNVD840/GR	300	120-277	4000K	33,300	109
71732	HIBAY1A/300UNVD850/GR	300	120-277	5000K	33,700	110
74509	HIBAY1A/100HUV840/GR	100	347-480	4000K	10,800	108
74510	HIBAY1A/100HUV850/GR	100	347-480	5000K	10,800	108
74511	HIBAY1A/200HUV840/GR	200	347-480	4000K	23,300	123
74512	HIBAY1A/200HUV850/GR	200	347-480	5000K	23,100	122
60147	HIBAY1A/300HUV840/GR	300	347-480	4000K	33,000	110
60148	HIBAY1A/300HUV850/GR	300	347-480	5000K	33,000	110

\*Lumens and LPW based on housing with refractor. LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.





## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
100	250W HPS/MH	295/290	66%
200	400W HPS/MH	460/450	57%/56%
300	750W HPS	840	64%
300	1000W HPS/MH	1100/1080	73%/72%

## Photometric Data

		15 ft Mounting Height			20 ft Mounting Height			25 ft Mounting Ht		30 ft Mounting Ht		35 ft Mounting Ht	
		On Center Luminaire Spacing											
		10'x15'	15'x15'	15'x20'	10'x15'	15'x15'	15'x20'	10'x15'	15'x15'	10'x15'	15'x15'	10'x15'	15'x15'
<b>100W</b>	74231	76fc/ 2.2	53fc/ 2.3	39fc/ 3.7	72fc/ 1.8	50fc/ 1.4	37fc/ 2.1	69fc/ 2.1	48fc/ 1.8	66.4fc/ 2.2	46.1fc/ 2.1	66.5fc/ 2.1	44.3fc/ 2.1

		20 ft Mounting Height			25 ft Mounting Height			30 ft Mounting Height			35 ft Mounting Height		
		On Center Luminaire Spacing											
		15'x20'	20'x20'	20'x25'	15'x20'	20'x20'	20'x25'	15'x20'	20'x20'	20'x25'	15'x20'	20'x20'	20'x25'
<b>200W</b>	74233	70fc/ 2.5	51.7fc/ 4.3	41.8fc/ 5.1	67fc/ 2.1	49.3fc/ 2.8	39.9fc/ 3.7	64.6fc/ 2.0	47fc/ 2.4	38.2fc/ 2.7	62fc/ 2.1	45fc/ 2.3	36.5fc/ 2.4

		40 ft Mounting Height		60 ft Mounting Height		80 ft Mounting Height	
		On Center Luminaire Spacing					
		20'x20'	20'x25'	20'x20'	20'x25'	15'x20'	
<b>300W</b>	71732	64fc/2.1	52fc/2.0	55fc/1.9	44fc/1.9	47fc/1.8	

- Illuminance target: 40-65 footcandles avg.
- Initial illuminance measured at 30" above floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

\*Information based on High Bay with refractor

## Additional Options


Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories



# Linear High Bay

## Dimensions



- Stainless steel mounting accessories (V-Hook and 2 6ft chains) included; LED hanging tray for easy installation
- Clear or diffused lens included for aisle or wide distribution options
- Integrated motion/daylight sensor for additional energy savings

	L x W x H
100W-165W:	46.0" x 7.9" x 2.9"
225W:	46.0" x 11.8" x 2.9"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Lens	Total Lumens	LPW*
74839	LNHIBA1A/100UNVD840/A/WH	100	4000K	Clear	13,000	127
74840	LNHIBA1A/100UNVD850/A/WH	100	5000K	Clear	13,000	127
74837	LNHIBA1A/100UNVD840/W/WH	100	4000K	Frosted	12,900	127
74838	LNHIBA1A/100UNVD850/W/WH	100	5000K	Frosted	12,900	127
74845	LNHIBA1A/150UNVD840/W/WH	150	4000K	Clear	19,700	133
74846	LNHIBA1A/150UNVD850/W/WH	150	5000K	Clear	19,700	133
74831	LNHIBA1A/165UNVD840/A/WH	165	4000K	Clear	18,900	117
74832	LNHIBA1A/165UNVD850/A/WH	165	5000K	Clear	18,900	117
74829	LNHIBA1A/165UNVD840/W/WH	165	4000K	Frosted	18,100	112
74830	LNHIBA1A/165UNVD850/W/WH	165	5000K	Frosted	18,100	112
74823	LNHIBA1A/225UNVD840/A/WH	225	4000K	Clear	25,300	112
74824	LNHIBA1A/225UNVD850/A/WH	225	5000K	Clear	25,300	112
74821	LNHIBA1A/225UNVD840/W/WH	225	4000K	Frosted	26,600	117
74822	LNHIBA1A/225UNVD850/W/WH	225	5000K	Frosted	26,600	117

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



\*\*DLC Premium only applicable to 100W and 150W versions.

## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
100	250W HPS	295	66%
150	250W MH	290	48%
150	250W HPS	295	49%
165	4-lamp 54T5HO	220	25%
165	320W MH	370	55%
225	6-Lamp 54T5HO	350	36%
225	400W MH	450	50%

## Photometric Data

		20 ft Mounting Height			25 ft Mounting Height		
		On Center Luminaire Spacing					
		15'x20'	20'x20'	20'x25'	15'x20'	20'x20'	20'x25'
<b>100W</b>	74838	41fc/1.9	–	–	45fc/1.9	–	–
<b>150W</b>	74846	68fc/1.6	50fc/1.8	41fc/1.9	60fc/1.9	47fc/1.9	38fc/1.9
<b>165W</b>	74830	63fc/1.6	47fc/1.8	38fc/1.9	56fc/1.9	44fc/1.9	35fc/1.9

		30 ft Mounting Height		35 ft Mounting Ht		40 ft Mounting Ht		45 ft Mounting Ht	
		On Center Luminaire Spacing							
		20'x20'	20'x25'	20'x20'	20'x25'	20'x20'	20'x25'	20'x20'	20'x25'
<b>225W</b>	74822	60fc/1.9	49fc/1.9	57fc/1.9	47fc/1.9	54fc/1.8	44fc/1.9	52fc/1.8	42fc/1.8

- Illuminance target: 40-65 footcandles avg.
- Initial illuminance measured at 30" above floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

\*Information based on wide distribution

## Additional Options


Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories



# UltraLED™ Linear High Bay

## Dimensions



- Luminaire can be suspended via aircraft cable, chain, or pendant mounted (hardware sold separately). External controls can be added through existing knockouts.
- DLC Premium listed to maximize rebate opportunities
- Versatile with six wattages, four sizes, two distributions

	L	x	W	x	H
1x2:	23.7"	x	12.7"	x	2.4"
1x4:	45.9"	x	12.7"	x	2.4"
2x2:	23.7"	x	23.7"	x	2.4"
2x4:	45.9"	x	23.7"	x	2.4"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Lumens	LPW*
60460	LNHIBA2A/100UNVD840/12W/WH	100	4000K	Wide	12,900	130
60462	LNHIBA2A/100UNVD850/12W/WH	100	5000K	Wide	12,900	130
60468	LNHIBA2A/120UNVD840/12W/WH	120	4000K	Wide	15,400	130
60470	LNHIBA2A/120UNVD850/12W/WH	120	5000K	Wide	15,400	130
60472	LNHIBA2A/150UNVD840/22W/WH	150	4000K	Wide	19,200	130
60474	LNHIBA2A/150UNVD850/22W/WH	150	5000K	Wide	19,200	130
60480	LNHIBA2A/200UNVD840/14W/WH	200	4000K	Wide	25,800	130
60482	LNHIBA2A/200UNVD850/14W/WH	200	5000K	Wide	25,800	130
60484	LNHIBA2A/250UNVD840/24W/WH	250	4000K	Wide	32,200	130
60486	LNHIBA2A/250UNVD850/24W/WH	250	5000K	Wide	32,200	130
60488	LNHIBA2A/300UNVD840/24W/WH	300	4000K	Wide	38,700	130
60490	LNHIBA2A/300UNVD850/24W/WH	300	5000K	Wide	38,700	130

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
100	4-lamp 32T8	112	11%
100	250W MH	290	66%
100	250W HPS	295	66%
120	4-lamp 54T5H0	220	45%
120	8-lamp 32T8	224	46%
120	250W MH	290	59%
120	250W HPS	295	59%
150	4-lamp 54T5H0	220	32%
150	8-lamp 32T8	224	33%
150	250W MH	290	48%
150	250W HPS	295	49%
150	320W MH	370	59%
200	6-lamp 54T5H0	350	43%
200	320W MH	370	46%
200	400W HPS	460	57%
200	400W MH	450	56%
250	8-lamp 54T5H0	480	48%
250	400W MH	450	44%
250	750W MH	820	70%
250	750W HPS	840	70%
300	8-lamp 54T5H0	480	38%
300	750W HPS	840	64%
300	1000W MH	1080	72%
300	1000W HPS	1100	73%

## Additional Options

Please see pages 90-145 for more details on:

Sensor



Emergency




Accessories



# Strip



## Dimensions



- Snap fit for quick and easy tool-less access
- End-to-end linkable for customized run lengths
- Integrated LED design allows for energy savings up to 63% compared to T8
- Closet Rated

	L	x	W	x	H
2ft:	24"	x	2.5"	x	3.1"
4ft:	47.3"	x	2.5"	x	3.1"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW*
70525	STRIP1A/016UNVD835/24S/WH	16	3500K	2ft	2000	124
70526	STRIP1A/016UNVD840/24S/WH	16	4000K	2ft	1900	119
70527	STRIP1A/016UNVD850/24S/WH	16	5000K	2ft	2000	122
74774	STRIP1A/032UNVD835/48S/WH	32	3500K	4ft	3900	121
74775	STRIP1A/032UNVD840/48S/WH	32	4000K	4ft	4000	127
74776	STRIP1A/032UNVD850/48S/WH	32	5000K	4ft	4000	124
70522	STRIP1A/047UNVD835/48S/WH	47	3500K	4ft	5900	123
70523	STRIP1A/047UNVD840/48S/WH	47	4000K	4ft	6200	126
70524	STRIP1A/047UNVD850/48S/WH	47	5000K	4ft	6000	124

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings*
16	1x32W Fluorescent	32	50%
32	2x32W Fluorescent	64	50%
47	3x32W Fluorescent	96	51%

\* Based on \$0.11/kWh over 50,000 hours life.

## Photometric Data

		7 ft Mounting Height			10 ft Mounting Height			13 ft Mounting Height		
		On Center Luminaire Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
2 ft 16W	70525									
	70526	23fc/1.4	19fc/1.2	17fc/1.6	22fc/1.5	18fc/1.4	16fc/1.3	20fc/1.6	17fc/1.5	15fc/1.3
	70527									
4 ft 32W	74774									
	74775	49fc/1.38	40fc/1.2	35fc/1.6	47fc/1.5	39fc/1.4	34fc/1.3	44fc/1.6	36fc/1.5	32fc/1.3
	74776									
4 ft 47W	70522									
	70523	76fc/1.4	62fc/1.2	55fc/1.5	72fc/1.5	60fc/1.4	52fc/1.3	67fc/1.6	56fc/1.5	49fc/1.2
	70524									
		12 ft Mounting Height*			16 ft Mounting Height*			20 ft Mounting Height*		
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
4 ft 32W	74774									
	74775	56fc/1.7	55fc/1.5	53fc/1.5	51fc/1.7	50fc/1.5	49fc/1.4	47fc/1.6	46fc/1.5	45fc/1.4
	74776									
4 ft 47W	70522									
	70523	86fc/1.7	85fc/1.5	82fc/1.5	79fc/1.7	77fc/1.5	75fc/1.4	72fc/1.7	71fc/1.6	69fc/1.5
	70524									

— Initial illuminance measured at floor

— 80/50/20 reflectances

\*Continuous rows within a room with no objects or obstructions

## Additional Options

Please see pages 90-145 for more details on:


Sensor      Emergency      Accessories



# Wrap



## Dimensions



- Offered in two high efficacy wattages/lumen packages and two lengths and allow extra energy savings compared to traditional sources
- Diffuse lens for even light output without light leaks or shadows
- Tool-less entry allows for quick and easy installation

	L	x	W	x	H
2ft:	24"	x	6.3"	x	3.1"
4ft:	48"	x	6.3"	x	3.1"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Lumens	LPW*
74781	WRAP1A/018UNVD835/24S/WH	18	3500K	2ft	2160	120
74782	WRAP1A/018UNVD840/24S/WH	18	4000K	2ft	2160	120
74783	WRAP1A/018UNVD850/24S/WH	18	5000K	2ft	2160	120
74778	WRAP1A/026UNVD835/48S/WH	26	3500K	4ft	3120	120
74779	WRAP1A/026UNVD840/48S/WH	26	4000K	4ft	3120	120
74780	WRAP1A/026UNVD850/48S/WH	26	5000K	4ft	3120	120

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.





## Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Luminaire Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
2 ft 18W	74781									
	74782	28fc/1.4	23fc/1.3	21fc/1.5	27fc/1.5	23fc/1.4	20fc/1.3	26fc/1.6	22fc/1.5	19fc/1.3
	74783									
4 ft 32W	74778									
	74779	41fc/1.4	34fc/1.2	30fc/1.5	40fc/1.5	33fc/1.4	28fc/1.3	38fc/1.6	31fc/1.5	27fc/1.2
	74780									

LINEAR

- Avg illuminance (FC) at 30" AFF and avg/min uniformity
- 80/50/20 reflectances



## Additional Options

Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# Vapor Tight

## Dimensions



- Corrosion resistant housing with captive stainless steel mounting accessories and included waterproof compression fitting
- IP65/66 rated, ETL sanitation listed for NSF splash zones, and a wide operating temperature of -40°C to 50°C
- Optional integrated microwave (daylight/motion) sensor for additional energy savings

	L	x	W	x	H
2ft (25W):	24.9"	x	4.0"	x	3.3"
4ft (20W)	48.5"	x	3.4"	x	3.3"
4ft (40W):	48.5"	x	4.0"	x	3.3"
4ft (IP66):	48.1"	x	4.8"	x	3.3"
8ft (65W):	96.0"	x	4.0"	x	3.3"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Voltage (V)	Color Temp (CCT)	Total Lumens*	LPW*
74530	VAPOR1A/025UNVD840/24EC/GR	25	120-277	4000K	3100	135
74531	VAPOR1A/025UNVD850/24EC/GR	25	120-277	5000K	3100	137
74552	VAPOR1A/050HUV840/48EC/GR	50	347-480	4000K	5700	111
74553	VAPOR1A/050HUV850/48EC/GR	50	347-480	5000K	5700	111
74536	VAPOR1B/020UNVD840/48EC/GR/D	20	120-277	4000K	2600	127
74537	VAPOR1B/020UNVD850/48EC/GR/D	20	120-277	5000K	2600	128
74376	VAPOR1B/040UNVD840/48EC/GR	40	120-277	4000K	5300	139
74377	VAPOR1B/040UNVD850/48EC/GR	40	120-277	5000K	5300	137
60355	VAPOR1B/065UNVD840/96EC/GR	65	120-277	4000K	8750	135
60356	VAPOR1B/065UNVD850/96EC/GR	65	120-277	5000K	8750	135

\* Lumens and LPW based on clear/etched lens. LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



\*\*DLC Premium only applicable to 25W, 40W and 65W versions with clear lens option.

## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
20/25	50W HPS	62	68%/60%
20/25	2 F17T8	33	39%/24%
25	70W HPS	92	73%
40	2 F32 T8	54	26%
40	70W HPS	91	56%
50	70W HPS	91	45%
65	290W HPS	295	78%
65	250W MH	290	77%

## Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Luminaire Spacing								
		20'x30'	30'x30'	50'x30'	20'x30'	30'x30'	50'x30'	20'x30'	30'x30'	50'x30'
<b>40W</b>	74376*	6.7fc/5.6	4.1fc/13.7	2.7fc/13.7	6.4fc/4.3	4.0fc/7.9	2.6fc/8.9	6.1fc/3.6	3.8fc/6.3	2.5fc/6.3
	74377	8.2fc/5.8	5.0fc/12.6	3.3fc/17.0	7.9fc/4.4	4.4fc/8.9	3.3fc/10.9	7.5fc/3.6	4.7fc/6.7	3.1fc/7.8
<b>65W</b>	60362	12.7fc/4.9	7.8fc/8.7	5.2fc/10.4	12.2fc/3.7	7.5fc/7.0	5.0fc/7.1	11.6fc/3.0	7.2fc/5.6	4.8fc/5.5

- Illuminance target: 3 footcandles avg.
- Initial illuminance measured at floor
- 20/20/20 reflectances
- Summary table: average initial illuminance/minimum contrast

\*Indicates information based on Vapor Tight with diffuse lens

		16 ft Mounting Height			18 ft Mounting Height		
		On Center Luminaire Spacing					
		10'x10'	10'x12'	16'x20'	10'x10'	10'x12'	16'x20'
<b>65W</b>	60355	80fc/1.7	65fc/1.9	28fc/1.7	78fc/1.8	64fc/1.9	27fc/1.7

- Illuminance target: 50 footcandles avg.
- Initial illuminance measured at floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options

Please see pages 90-145 for more details on:


Sensor    Emergency    Accessories



# 10" Canopy



## Dimensions



L	x	W	x	H
10.3"	x	10.3"	x	3.9"

- Energy savings of up to 79% compared to traditional sources
- High efficacy meets DLC Premium requirements
- Slim, lightweight design

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Total Lumens*	LPW*
60151	CANOPY3A/020UNV740/10S5/WH	20	4000K	2000	110
60152	CANOPY3A/020UNV750/10S5/WH	20	5000K	2000	110
60153	CANOPY3A/040UNV740/10S5/WH	40	4000K	4700	125
60154	CANOPY3A/040UNV750/10S5/WH	40	5000K	4700	125
60155	CANOPY3A/055UNV740/10S5/WH	55	4000K	6800	127
60156	CANOPY3A/055UNV750/10S5/WH	55	5000K	6800	127
60157	CANOPY3A/020UNV740/10S5/BZ	20	4000K	2000	110
60158	CANOPY3A/020UNV750/10S5/BZ	20	5000K	2000	110
60159	CANOPY3A/040UNV740/10S5/BZ	40	4000K	4700	125
60160	CANOPY3A/040UNV750/10S5/BZ	40	5000K	4700	125
60161	CANOPY3A/055UNV740/10S5/BZ	55	4000K	6800	127
60162	CANOPY3A/055UNV750/10S5/BZ	55	5000K	6800	127

\* Lumens and LPW based on clear/etched lens. LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
20	35 W HPS	42	52%
20	50 W HPS	62	68%
20	70 W HPS	91	67%
40	70 W HPS	91	56%
40	100 W HPS	120	67%
40	100 W MH	130	69%
40	150 W HPS	170	76%
40	150 W MH	188	79%
55	150 W HPS	170	68%
55	150 W MH	188	71%
55	175 W MH	210	74%

## Photometric Data

	8 ft Mounting Height					10 ft Mounting Height				
	On Center Luminaire Spacing									
	10'	15'	20'	25'	30'	10'	15'	20'	25'	30'
<b>20W</b>	12.4fc/1.3	8.5fc/1.7	6.3fc/2.5	5.0fc/3.6	4.0fc/1.4	10.6fc/1.3	7.2fc/1.4	5.4fc/2.4	4.3fc/2.4	3.4fc/3.4
<b>40W</b>	28.0fc/1.4	19fc/1.7	14.0fc/2.4	11.4fc/3.4	8.8fc/5.0	23.6fc/1.3	16.0fc/1.4	12.0fc/1.7	9.7fc/2.3	7.5fc/3.2
<b>55W</b>	39.2fc/1.4	26.7fc/1.7	19.7fc/2.4	16.0fc/3.3	12.3fc/4.8	33.3fc/1.3	22.5fc/1.4	16.7fc/1.7	13.7fc/2.3	10.7fc/3.0

	12 ft Mounting Height				
	On Center Luminaire Spacing				
	10'	15'	20'	25'	30'
<b>20W</b>	10.6fc/1.3	7.2fc/1.4	5.4fc/2.4	4.3fc/2.4	3.0fc/3.4
<b>40W</b>	20.0fc/1.2	13.7fc/1.2	10.3fc/1.4	8.5fc/1.8	6.7fc/2.3
<b>55W</b>	28.5fc/1.2	19.3fc/1.2	14.5fc/1.4	12.0fc/1.8	9.5fc/2.3

	7.5 ft. Mounting Height		15 ft. Mounting Height	
	Stairs	Platform	Stairs	Platform
<b>20W</b>	9fc/1.4	19fc/1.3	6fc/1.2	6fc/1.2
<b>40W</b>	–	–	14fc/1.4	13fc/1.2

- Illuminance target: 5-15 footcandles avg.
- Initial illuminance measured at grade
- 20/0/20 reflectances
- Summary table:  
average initial illuminance/minimum contrast

- Illuminance target: 5-10 footcandles avg.
- Initial illuminance measured at floor
- 80/50/20 reflectances
- Summary table:  
average initial illuminance/minimum contrast


## Additional Options

Please see pages 90-145 for more details on:

Sensor      Emergency      Accessories

# 12" Canopy

## Dimensions



- Environmentally preferable LED alternatives to traditional HID luminaires
- Up to 81% in energy savings
- Extremely durable IP66 luminaires allow for easy installation in tight ceiling spaces, and are available in two shapes and finishes

	D	x	H		
Round:	12.6"	x	3.37"		
	L	x	W	x	H
Square:	12.6"	x	12.6"	x	3.37"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Total Lumens*	LPW*
Round					
60398	CANOPY2A/025UNVD840/12R5/WH	25	4000K	3400	135
60399	CANOPY2A/025UNVD850/12R5/WH	25	5000K	3400	135
60400	CANOPY2A/035UNVD840/12R5/WH	35	4000K	4725	135
60401	CANOPY2A/035UNVD850/12R5/WH	35	5000K	4725	135
Square					
60414	CANOPY2A/025UNVD840/12S5/WH	25	4000K	3400	135
60415	CANOPY2A/025UNVD850/12S5/WH	25	5000K	3400	135
60416	CANOPY2A/035UNVD840/12S5/WH	35	4000K	4725	135
60417	CANOPY2A/035UNVD850/12S5/WH	35	5000K	4725	135

\* Lumens and LPW based on clear/etched lens. LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
25	35W HPS	42	40%
25	50W HPS	62	60%
25	70W HPS	91	67%
35	70W HPS	91	62%
35	100W HPS	120	71%
35	100W MH	130	73%
35	150W HPS	170	79%
35	150W MH	188	81%
45	150W HPS	170	74%
45	150W MH	188	76%
45	175W MH	210	79%
65	175W MH	210	69%
65	250W MH	290	78%
65	250W MH	295	78%

## Photometric Data

	8 ft Mounting Height					10 ft Mounting Height				
	On Center Luminaire Spacing									
	10'	15'	20'	25'	30'	10'	15'	20'	25'	30'
<b>25W</b>	22.0fc/1.4	15.0fc/1.9	11.0fc/3.2	9.0fc/4.7	6.8fc/6.8	19.0fc/1.3	13.0fc/1.5	9.5fc/2.0	7.1fc/3.0	6.0fc/4.0
<b>35W</b>	31.5fc/1.4	21.5fc/2.0	15.8fc/3.2	12.8fc/4.7	9.8fc/6.6	27.0fc/1.3	18.2fc/1.5	13.6fc/2.1	11.0fc/3.0	8.5fc/4.0
<b>45W</b>	37.5fc/1.4	25.5fc/2.0	19.0fc/3.2	15.3fc/4.6	11.7fc/6.5	32.1fc/1.3	21.8fc/1.6	16.2fc/2.1	13.0fc/3.0	10.0fc/4.1
<b>65W</b>	53.4fc/1.4	36.5fc/2.0	27.0fc/3.1	22.0fc/4.5	16.7fc/6.4	46.0fc/1.3	31.0fc/1.5	23.0fc/2.0	18.7fc/2.9	10.7fc/3.0

	12 ft Mounting Height					15 ft Mounting Height				
	On Center Luminaire Spacing									
	10'	15'	20'	25'	30'	10'	15'	20'	25'	30'
<b>25W</b>	16.2fc/1.2	11.0fc/1.3	8.2fc/2.3	6.8fc/2.9	5.3fc/6.0	13.3fc/1.2	9.0fc/1.1	6.8fc/1.2	5.6fc/1.5	4.5fc/1.9
<b>35W</b>	23.2fc/1.2	15.8fc/1.2	11.8fc/1.5	9.7fc/2.1	7.6fc/2.9	19.0fc/1.2	13.0fc/1.1	9.7fc/1.2	8.0fc/1.5	6.4fc/1.9
<b>45W</b>	27.8fc/1.2	18.8fc/1.2	14.0fc/1.6	11.5fc/2.2	9.1fc/2.9	23.0fc/1.2	15.5fc/1.1	11.6fc/1.2	9.6fc/1.5	7.7fc/1.9
<b>65W</b>	40.0fc/1.2	26.7fc/1.2	20.0fc/1.4	16.4fc/2.1	13.0fc/2.8	32.4fc/1.2	22.0fc/1.1	16.5fc/1.2	13.6fc/1.5	11.0fc/1.9

- Illuminance target: 5-15 footcandles avg.
- Initial illuminance measured at grade
- 20/0/20 reflectances
- Summary table: average initial illuminance/minimum contrast

## Additional Options

Please see pages 90-145 for more details on:


Sensor      Emergency      Accessories

# Garage



- Slim design and optimal light distribution to minimize costs while maintaining performance
- IP66 rated powder coated aluminum construction for weather resistance
- Optional integrated motion/daylight sensor for additional energy savings

## Dimensions



L	x	W	x	H
12.5"	x	12.5"	x	2.3"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Lumens	LPW*
74501	GARAG1A/035UNVD740/G5/SV	35	4000K	Garage Type V	4200	123
74502	GARAG1A/035UNVD750/G5/SV	35	5000K	Garage Type V	4200	119
74503	GARAG1A/055UNVD740/G5/SV	55	4000K	Garage Type V	6200	119
74504	GARAG1A/055UNVD750/G5/SV	55	5000K	Garage Type V	6200	118

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.





## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
35	100W HPS	120	65%
35	150W HPS	170	75%
55	150W HPS	170	66%
55	175W MH	210	72%

## Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Luminaire Spacing								
		20'x30'	30'x30'	50'x30'	20'x30'	30'x30'	50'x30'	20'x30'	30'x30'	50'x30'
<b>35W</b>	74501	5.8fc/3.0	3.7fc/7.4	2.5fc/8.2	5.4fc/2.5	3.4fc/4.2	2.3fc/4.6	5.0fc/2.3	3.2fc/2.8	2.1fc/3.0
<b>55W</b>	74503	8.6fc/3.0	5.5fc/6.9	3.6fc/9.0	8.0fc/2.5	5.1fc/4.2	3.4fc/5.0	7.4fc/2.3	4.7fc/3.2	3.2fc/3.2

- Illuminance target: 3 footcandles avg.
- Initial illuminance measured at floor
- 20/20/20 reflectances
- Summary table: average initial illuminance/minimum contrast

\*Information based on Garage with glare shield


## Additional Options

Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# Dusk to Dawn

## Dimensions



- Traditional, compact, lightweight design
- Easy to install
- Energy savings up to 79%
- NEMA photosensor included for additional energy savings

L	x	W	x	H
11.8"	x	7.6"	x	6.9"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Total Lumens	LPW*
60238	AREADTD1A/020UNV840/NC/GR	20	4000K	2300	123
60239	AREADTD1A/020UNV850/NC/GR	20	5000K	2300	123
60110	AREADTD1A/040UNV840/NC/GR	40	4000K	4600	126
60111	AREADTD1A/040UNV850/NC/GR	40	5000K	4600	126

\*LPW per LM79 report.


Contact your local SYLVANIA Product Distributor for more information.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
20	35W HPS	42	52%
20	50W HPS	62	68%
20	70W HPS	91	78%
40	70W HPS	91	56%
40	100W HPS	120	67%
40	100W MH	130	69%
40	150W HPS	170	76%
40	150W MH	188	79%

## Photometric Data

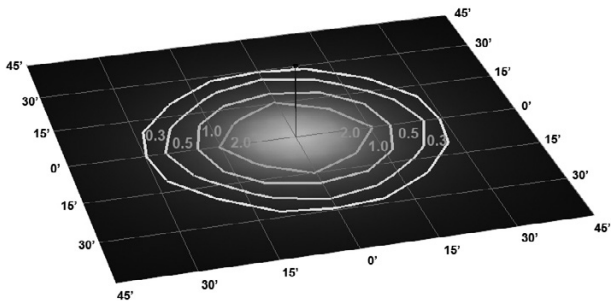

### 40W

- Illuminance target: 1-5 footcandles avg.
- Luminaire mounting height: 10 ft

## Additional Options


Please see pages 90-145 for more details on:

- Sensor    Emergency    Accessories
-

# Jelly Jar



## Dimensions



- The Jelly Jar Series is available in three mounting options
- Offers up to 87% in energy savings compared to traditional technologies
- Up to 150,000 hour life and five-year warranty

	L	x	W	x	H
Ceiling:	4.6"	x	5.6"	x	10.8"
Wall:	4.6"	x	7.5"	x	12.0"
Pendant:	4.6"	x	4.6"	x	11.4"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Lumens	LPW*	Mounting	Bug Rating
60167	JELYJAR1A/010UNV740/CM/GR	10	4000K	Type V	900	90	Ceiling	B1-U3-G1
60168	JELYJAR1A/010UNV750/CM/GR	10	5000K	Type V	900	90	Ceiling	B1-U3-G1
60169	JELYJAR1A/010UNV740/PM/GR	10	4000K	Type V	900	90	Pendant	B1-U3-G1
60170	JELYJAR1A/010UNV750/PM/GR	10	5000K	Type V	900	90	Pendant	B1-U3-G1
60171	JELYJAR1A/010UNV740/WM/GR	10	4000K	Type V	900	90	Wall	B1-U3-G1
60172	JELYJAR1A/010UNV750/WM/GR	10	5000K	Type V	900	90	Wall	B1-U3-G1

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
10	60W Inc	60	83%
10	13W CFL	13	23%
10	75W Inc	75	87%
10	20W CFL	20	50%

## Photometric Data

		8 ft Mounting Height				10 ft Mounting Height			
		On Center Luminaire Spacing							
		10'	15'	20'	25'	10'	15'	20'	25'
<b>10W</b>	60167 60168	3.6fc/1.3	2.4fc/1.3	1.8fc/1.7	1.2fc/1.5	3.0fc/1.3	2.0fc/1.2	1.5fc/1.4	1.2fc/1.5

		12 ft Mounting Height			
		On Center Luminaire Spacing			
		10'	15'	20'	25'
<b>10W</b>	60167 60168	2.8fc/1.3	1.9fc/1.2	1.4fc/1.3	1.2fc/1.5

- Illuminance target: 1-3 footcandles avg.
- Initial illuminance measured at grade
- Direct illuminance only – no reflectance values
- Summary table: average initial illuminance/minimum contrast

## Additional Options

Please see pages 90-145 for more details on:


- Sensor      Emergency      Accessories
-

# Square Light



- Environmentally preferable LED alternatives to traditional HID luminaires
- Up to 91% in energy savings
- Offered with four mounting options

## Dimensions

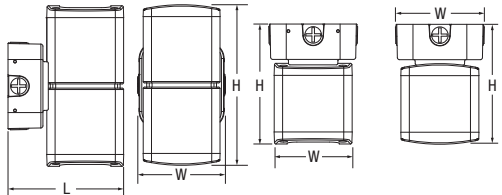

	L	x	W	x	H
Dual Mount:	6.4"	x	4.9"	x	9"
Wall Mount:	6.4"	x	4.9"	x	4.9"
Ceiling Mount:	4.9"	x	4.9"	x	6.9"
Pendant Mount:	4.9"	x	4.9"	x	46"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Lumens	LPW*	Mounting
60208	SQLIGHT1A/013UNV740/WM/BZ	13	4000K	Type V S	1390	109	Wall Mount
60209	SQLIGHT1A/013UNV750/WM/BZ	13	5000K	Type V S	1390	109	Wall Mount
60210	SQLIGHT1A/026UNV740/DM/BZ	26	4000K	Type V S	2750	105	Dual Wall Mount
60211	SQLIGHT1A/026UNV750/DM/BZ	26	5000K	Type V S	2750	105	Dual Wall Mount
60212	SQLIGHT1A/013UNV740/CM/BZ	13	4000K	Type V S	1390	109	Ceiling Mount
60213	SQLIGHT1A/013UNV750/CM/BZ	13	5000K	Type V S	1390	109	Ceiling Mount
60214	SQLIGHT1A/013UNV740/PM/BZ	13	4000K	Type V S	1390	109	Pendant Mount
60215	SQLIGHT1A/013UNV750/PM/BZ	13	5000K	Type V S	1390	109	Pendant Mount

\*LPW per LM79 report.


Contact your local SYLVANIA Product Distributor for more information.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
13	23W CFL	23	43%
13	42W CFL	46	72%
13	100W Inc	100	87%
13	150W Inc	50	91%
13	35W HPS	45	71%
13	50W HPS	62	79%
26	150W Inc	150	83%
26	50W HPS	62	58%
26	70W HPS	91	71%

## Photometric Data

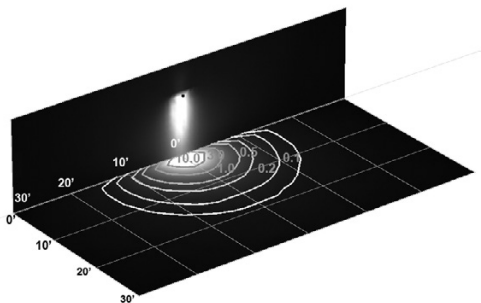

### 13W Wall Mount

- Illuminance target: 1-3 footcandles avg.
- Luminaire mounting height: 10 ft

## Additional Options

Please see pages 90-145 for more details on:


Sensor      Emergency      Accessories

# Bollard



- Easy to install
- Durable polycarbonate lens
- Up to 88% energy savings compared to traditional sources

## Dimensions



W	x	H
8"	x	36"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Total Lumens	LPW*	Bug Rating
60173	BOLLARD1A/018UNV830/R8F/BZ	18	3000K	2035	110	B-1 U-3 G-1
60174	BOLLARD1A/018UNV840/R8F/BZ	18	4000K	2035	110	B-1 U-4 G-1
60175	BOLLARD1A/018UNV850/R8F/BZ	18	5000K	2035	110	B-1 U-5 G-1
60176	BOLLARD1A/038UNV830/R8F/BZ	38	3000K	3600	95	B-3 U-3 G-3
60177	BOLLARD1A/038UNV840/R8F/BZ	38	4000K	3600	95	B-3 U-4 G-3
60178	BOLLARD1A/038UNV850/R8F/BZ	38	5000K	3600	95	B-3 U-5 G-3
60185	BOLLARD1A/018UNV830/R8R/BZ	18	3000K	2035	110	B-1 U-3 G-1
60186	BOLLARD1A/018UNV840/R8R/BZ	18	4000K	2035	110	B-1 U-4 G-1
60187	BOLLARD1A/018UNV850/R8R/BZ	18	5000K	2035	110	B-1 U-5 G-1
60188	BOLLARD1A/038UNV830/R8R/BZ	38	3000K	3600	95	B-3 U-3 G-3
60189	BOLLARD1A/038UNV840/R8R/BZ	38	4000K	3600	95	B-3 U-4 G-3
60190	BOLLARD1A/038UNV850/R8R/BZ	38	5000K	3600	95	B-3 U-5 G-3

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.






## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
18	23W CFL	23	22%
18	35W HPS	42	57%
18	42W CFL	46	61%
18	100W Inc	100	82%
18	150W Inc	150	88%
18	50W HPS	62	71%
18	50W MH	62	71%
38	50W HPS	62	39%
38	50W MH	62	39%
38	70W HPS	91	58%
38	70W MH	79	52%
38	100W HPS	120	68%
38	100W MH	130	71%

## Photometric Data

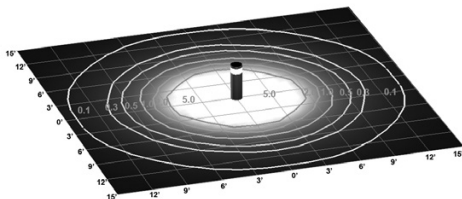

18W

— Each box represents one mounting height (3')

## Additional Options

Please see pages 90-145 for more details on:

Sensor



Emergency




Accessories



# Bulkhead



## Dimensions

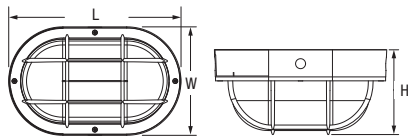

L	x	W	x	H
11.2"	x	7.1"	x	5.5"

- The traditionally styled luminaire allows for easy installation
- ENERGY STAR® certified to optimize rebate opportunities
- 87% energy savings in comparison to traditional lighting technologies

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Lumens	LPW*	Mounting
60206	BULKHED1A/010UNV840/SM/BL	10	4000K	Type V	900	90	Surface
60207	BULKHED1A/010UNV850/SM/BL	10	5000K	Type V	900	90	Surface

\*LPW per LM79 report.


Contact your local SYLVANIA Product Distributor for more information.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
10	60W Inc	60	83%
10	13W CFL	13	23%
10	75W Inc	75	87%
10	20W CFL	20	50%

## Photometric Data

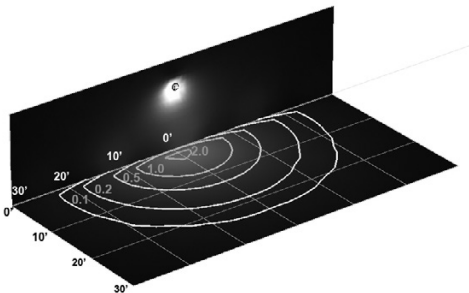

### 10W

- Mounted at 10'
- Each grid line represents one MH
- Illuminance target: 1-3 footcandles avg.


## Additional Options

Please see pages 90-145 for more details on:


Sensor      Emergency      Accessories

# Area Light


## Dimensions



70W



110W/145W



220W

- Integrated photocontrol receptacle compatible with up to 7 pin photosensors
- Energy savings up to 80%
- Robust luminaire with IP66 and 3G Vibration rating

	L x W x H
70W:	12.2" x 12.5" x 4.3"
110W-145W:	15.2" x 12.5" x 4.3"
220W:	20.9" x 12.5" x 4.3"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Lumens	LPW*
70956	AREAFLD1A/070UNVD840/T3/BZ	70	4000K	Type III	8100	116
71078	AREAFLD1A/070UNVD840/T4/BZ	70	4000K	Type IV	8200	117
71079	AREAFLD1A/070UNVD840/T5/BZ	70	4000K	Type V	8500	121
71153	AREAFLD1A/070UNVD850/T3/BZ	70	5000K	Type III	8600	123
71170	AREAFLD1A/070UNVD850/T4/BZ	70	5000K	Type IV	8700	125
71171	AREAFLD1A/070UNVD850/T5/BZ	70	5000K	Type V	9000	130
60037	AREAFLD1A/110UNVD840/T3/BZ	110	4000K	Type III	12,600	117
60038	AREAFLD1A/110UNVD840/T4/BZ	110	4000K	Type IV	12,700	117
60039	AREAFLD1A/110UNVD840/T5/BZ	110	4000K	Type V	13,300	123
60040	AREAFLD1A/110UNVD850/T3/BZ	110	5000K	Type III	13,300	124
60042	AREAFLD1A/110UNVD850/T5/BZ	110	5000K	Type V	13,300	124
60031	AREAFLD1A/145UNVD840/T3/BZ	145	4000K	Type III	17,000	116
60032	AREAFLD1A/145UNVD840/T4/BZ	145	4000K	Type IV	17,100	117
60033	AREAFLD1A/145UNVD840/T5/BZ	145	4000K	Type V	17,900	122
60034	AREAFLD1A/145UNVD850/T3/BZ	145	5000K	Type III	17,000	117
60036	AREAFLD1A/145UNVD850/T5/BZ	145	5000K	Type V	17,900	123
60228	AREAFLD1A/220UNVD840/T5/BZ	220	4000K	Type V	29,000	130
60231	AREAFLD1A/220UNVD850/T5/BZ	220	5000K	Type V	29,000	130

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.


Note: For additional product offerings, see Ordering Guide section pages 90-141.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
70	150W MH	188	63%
70	175W MH	210	67%
110	250W HPS	295	63%
110	250W MH	290	62%
145	320W MH	370	61%
145	400W MH	450	68%
220	1000W MH	1080	80%
220	1000W HPS	1100	80%

## Photometric Data

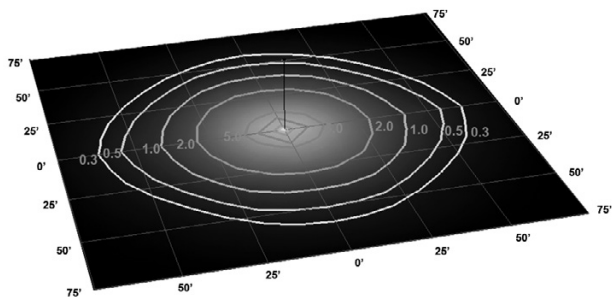

### 145W

- Illuminance target: 1-5 footcandles avg.
- Luminaire mounting height: 25 ft.
- Calculation zone = one luminaire MH from ground

## Additional Options

Please see pages 90-145 for more details on:


Sensor      Emergency      Accessories



# Slim Wall Pack



## Dimensions



L	x	W	x	H
7.5"	x	2.8"	x	8.0"

- Slim, low-profile design for subtle illumination of exterior walls and surfaces
- Available knuckle and trunnion mount accessories enable a family of exterior floodlights (see image above)
- Optional photocell available for greater energy savings

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Voltage (V)	Color Temp (CCT)	Distribution	Total Lumens	LPW* Rating	BUG Rating
74340	SLMWPk1A/013UNV740/CO/BZ	13	120-277	4000K	Cutoff	1400	113	B1-U0-G1
74341	SLMWPk1A/013UNV750/CO/BZ	13	120-277	5000K	Cutoff	1400	113	B1-U0-G1
74192	SLMWPk1A/030UNV740/CO/BZ	30	120-277	4000K	Cutoff	2800	92	B1-U0-G1
74196	SLMWPk1A/040UNV750/CO/BZ	40	120-277	5000K	Cutoff	3900	98	B2-U0-G1
74194	SLMWPk1A/060UNV740/CO/BZ	60	120-277	4000K	Cutoff	5500	94	B2-U0-G1
74197	SLMWPk1A/060UNV750/CO/BZ	60	120-277	5000K	Cutoff	5100	83	B2-U0-G1
72966	SLMWPk1A/030347750/CO/BZ	30	347	5000K	Cutoff	3400	109	B1-U0-G1
72992	SLMWPk1A/040347750/CO/BZ	40	347	5000K	Cutoff	4300	104	B2-U0-G1
74381	SLMWPk2A/030UNV750/CO/BZ	30	120-277	5000K	Cutoff	3300	112	B1-U0-G1
74380	SLMWPk2A/060UNV740/CO/BZ	60	120-277	4000K	Cutoff	7000	117	B2-U0-G1
74382	SLMWPk2A/060UNV750/CO/BZ	60	120-277	5000K	Cutoff	7200	121	B2-U0-G1

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.


Note: For additional product offerings, see Ordering Guide section pages 90-141.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
13	100W Inc	100	87%
30	70W HPS	91	67%
40	100W MH	130	69%
60	175W MH	210	71%

## Photometric Data

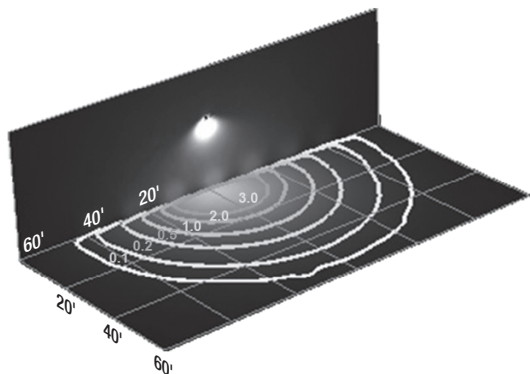


- Illuminance target: 1-3 footcandles avg.
- Luminaire mounting height = 20 ft.
- Initial illuminance measured at grade
- Direct illuminance only – no reflectance values
- Calculation zone = one luminaire MH from the wall
- 60W

## Additional Options

Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# Wall Pack Cutoff

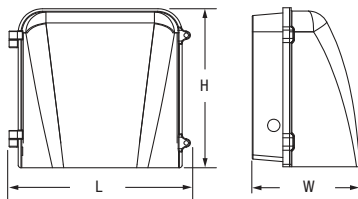

**Dimensions**

- Traditional or sleek housing and optics designed to maximize spacing and improve light distribution
- Traditional backplate with hinged housing cover and knockouts for easy installation
- High efficacy meets DLC standard or premium requirements to ensure quality and incentive qualifications

	L	x	W	x	H
1C	14.4"	x	11.4"	x	9.5"
2C	14.4"	x	5.7"	x	9.3"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Lumens	LPW*	BUG Rating
74186	WALPAK1C/036UNV740/CO/BZ	36	4000K	Cutoff	3300	92	B1-U0-G1
74190	WALPAK1C/050UNV750/CO/BZ	50	5000K	Cutoff	5000	102	B2-U0-G1
74191	WALPAK1C/075UNV750/CO/BZ	75	5000K	Cutoff	6400	88	B2-U0-G1
72993	WALPAK1C/040347750/CO/BZ	40	5000K	Cutoff	4500	107	B1-U0-G1
72994	WALPAK1C/055347750/CO/BZ	55	5000K	Cutoff	5500	101	B2-U0-G1
74912	WALPAK2C/030UNV740/CO/BZ	30	4000K	Cutoff	3800	135	B2-U1-G1
74915	WALPAK2C/030UNV750/CO/BZ	30	5000K	Cutoff	3800	135	B2-U1-G1
74913	WALPAK2C/050UNV740/CO/BZ	50	4000K	Cutoff	6200	126	B2-U1-G2
74916	WALPAK2C/050UNV750/CO/BZ	50	5000K	Cutoff	6300	128	B2-U1-G2
74914	WALPAK2C/075UNV740/CO/BZ	75	4000K	Cutoff	9000	120	B3-U1-G2
74917	WALPAK2C/075UNV750/CO/BZ	75	5000K	Cutoff	9100	121	B3-U1-G2

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.






## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
30 / 40	70W HPS	91	67% / 56%
30 / 40	100W MH	130	77% / 69%
50 / 55	150W HPS	170	71% / 68%
50 / 55	175W MH	210	76% / 74%
75 / 80	175W MH	210	64% / 62%
75 / 80	250W HPS	295	75% / 73%

## Photometric Data

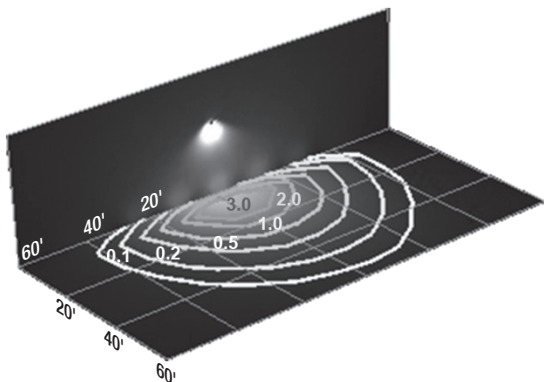

- Illuminance target: 1-3 footcandles avg.
- Luminaire mounting height = 20 ft.
- Initial illuminance measured at grade
- Direct illuminance only – no reflectance values
- 75W

## Additional Options


Please see pages 90-145 for more details on:

- |                                     |                                     |                                     |
|-------------------------------------|-------------------------------------|-------------------------------------|
| Sensor                              | Emergency                           | Accessories                         |
| <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

# Wall Pack Non-Cutoff



## Dimensions

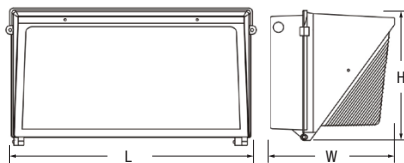

- Traditional design enables quick and easy update of existing installations
- Multiple output levels allowing up to 400W MH replacement
- Optional photocell available for greater energy savings

	L	x	W	x	H
1N/2N	14.4"	x	7.1"	x	9.3"
3N	18"	x	9.4"	x	9.8"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Voltage (V)	Color Temp (CCT)	Distribution	Total Lumens	LPW*	BUG Rating
72996	WALPAK1N/040347750/NC/BZ	40	347	5000K	Type IV	4300	102	B1-U4-G3
72997	WALPAK1N/055347750/NC/BZ	55	347	5000K	Type IV	6300	108	B1-U4-G3
72998	WALPAK1N/080347750/NC/BZ	80	347	5000K	Type IV	9400	120	B1-U5-G5
74386	WALPAK2N/030UNV740/NC/BZ	30	120-277	4000K	Type IV	3400	122	B1-U4-G3
74482	WALPAK2N/030UNV750/NC/BZ	30	120-277	5000K	Type IV	3500	125	B1-U3-G3
74485	WALPAK2N/050UNV740/NC/BZ	50	120-277	4000K	Type IV	5500	113	B1-U4-G3
74486	WALPAK2N/050UNV750/NC/BZ	50	120-277	5000K	Type IV	5600	116	B1-U4-G3
74489	WALPAK2N/075UNV740/NC/BZ	75	120-277	4000K	Type IV	8900	118	B1-U5-G5
74490	WALPAK2N/075UNV750/NC/BZ	75	120-277	5000K	Type IV	9200	121	B1-U5-G5
74528	WALPAK3N/105UNV740/NC/BZ	105	120-277	4000K	Type IV	12,500	119	B3-U4-G4
74529	WALPAK3N/105UNV750/NC/BZ	105	120-277	5000K	Type IV	12,400	118	B2-U4-G5

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.


Note: For additional product offerings, see Ordering Guide section pages 90-141.



## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
30 / 40	100W HPS	120	75% / 67%
30 / 40	100W MH	130	77% / 69%
50 / 55	150W HPS	170	71% / 68%
50 / 55	175W MH	210	76% / 74%
75 / 80	175W MH	210	64% / 62%
75 / 80	250W HPS	295	75% / 73%
105	320W MH	370	72%
105	400W HPS	460	77%

## Photometric Data

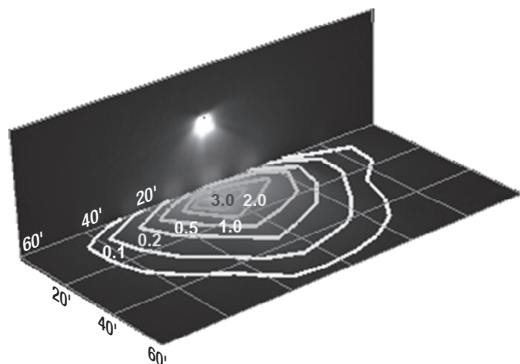

- Illuminance target: 1-3 footcandles avg.
- Luminaire mounting height = 20 ft.
- Initial illuminance measured at grade
- Direct illuminance only – no reflectance values
- 75W

## Additional Options


Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# Small Wall Pack



## Dimensions



L	x	W	x	H
11.0"	x	6.9"	x	5.2"

- Up to 90% energy savings while maintaining traditional design
- Available with optional photocontrol for additional energy savings
- Low maintenance and long life ( $L_{70} \geq 150,000$  hours)

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Lumens	LPW*	BUG Rating
60064	SMWLPAK1N/015UNV740/NC/BZ	15	4000K	Type I	1765	117	B1-U0-G1
60065	SMWLPAK1N/015UNV750/NC/BZ	15	5000K	Type I	1765	117	B1-U0-G1
60066	SMWLPAK1N/015UNV740/NC/BZ/P	15	4000K	Type I	1765	117	B1-U0-G1
60067	SMWLPAK1N/015UNV750/NC/BZ/P	15	5000K	Type I	1765	117	B1-U0-G1

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.



---

## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
15	23W CFL	23	35%
15	35W HPS	45	67%
15	42W CFL	46	67%
15	50W HPS	62	76%
15	50W MH	62	76%
15	100W Inc	100	85%
15	150W Inc	150	90%

## Additional Options

Please see pages 90-145 for more details on:

Sensor



Emergency




Accessories



# Slim Floodlight



## Dimensions



- Lightweight, compact design discretely blends into landscape, flood and signage applications
- Ideal for exterior applications with IP66 rating and wide flood distribution
- High efficacy meets DLC Premium\*\* requirements to ensure quality and incentive qualifications

	L x W x H
20-30W:	9.1" x 1.6" x 10.5"
50W:	10.6" x 1.6" x 11.3"
100W:	12.4" x 2.4" x 14.8"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Lumens	LPW*
74906	SLMFLD1A/020UNV830/WF/BZ	20	3000K	Wide Flood	2000	103
74907	SLMFLD1A/020UNV840/WF/BZ	20	4000K	Wide Flood	2200	111
74908	SLMFLD1A/030UNV840/WF/BZ	30	4000K	Wide Flood	3400	110
74909	SLMFLD1A/030UNV850/WF/BZ	30	5000K	Wide Flood	3500	114
74910	SLMFLD1A/050UNV840/WF/BZ	50	4000K	Wide Flood	6100	119
74911	SLMFLD1A/050UNV850/WF/BZ	50	5000K	Wide Flood	6300	121
60108	SLMFLD1A/100UNV840/WF/BZ	100	4000K	Wide Flood	12,300	123
60109	SLMFLD1A/100UNV850/WF/BZ	100	5000K	Wide Flood	12,300	123

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Note: For additional product offerings, see Ordering Guide section pages 90-141.




\*\*DLC Premium is only applicable to 4000K and 5000K versions.

## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
20	70W MH	91	78%
20	150 Q Halogen	150	87%
30	100W MH	130	69%
30	200W Q Halogen	200	85%
50	150W MH	188	73%
50	175W MH	210	76%
100	250W MH	290	66%
100	250W HPS	295	66%

## Photometric Data

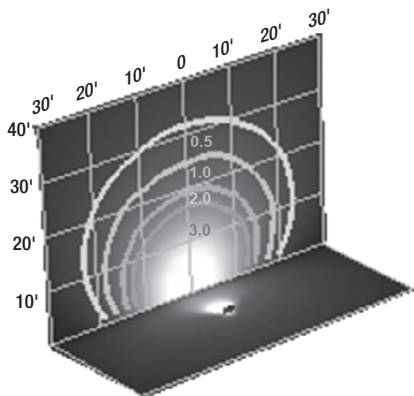

SLIM FLOOD

- Illuminance target: 3-5 footcandles avg.
- Luminaire mounted at grade; 30° tilt
- Initial illuminance measured at grade
- Direct illuminance only – no reflectance values
- Calculation zone = one luminaire MH from the wall

## Additional Options

Please see pages 90-145 for more details on:

- Sensor      Emergency      Accessories
-

# Bullet Floodlight




- 90% energy savings over traditional light sources
- Lightweight, compact design
- Easy installation and adjustment with integrated knuckle

## Dimensions

5W

15/20W

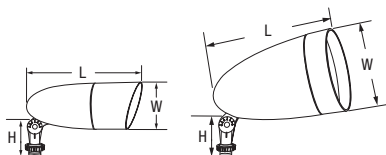

	L	x	W	x	H
5W:	6"	x	2.5"	x	2.2"
15/20W:	8.8"	x	5.4"	x	3.5"

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Lumens	LPW*
60255	BULLTFL1A/005UNV730/MF/BZ	5	3000K	5x5	550	100
60183	BULLTFL1A/005UNV740/MF/BZ	5	4000K	5x5	550	110
60184	BULLTFL1A/005UNV750/MF/BZ	5	5000K	5x5	550	110
60254	BULLTFL1A/015UNV730/MF/BZ	15	3000K	4x4	1250	90
60181	BULLTFL1A/015UNV740/MF/BZ	15	4000K	4x4	1250	90
60182	BULLTFL1A/015UNV750/MF/BZ	15	5000K	4x4	1250	90
60179	BULLTFL1A/020UNV740/MF/BZ	20	4000K	4x4	2000	100
60180	BULLTFL1A/020UNV750/MF/BZ	20	5000K	4x4	2000	100

\*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.






## Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
5	50W Halogen	50	90%
15	75W Halogen	75	80%
15	90W Halogen	90	83%
15	35W HPS	42	64%
20	35W HPS	42	52%
20	50W HPS	62	68%
20	90W Halogen	90	78%
20	150W Halogen	150	87%

## Photometric Data



### 20W

- Illuminance Target: 3-5 footcandles avg.
- Mounted at 45° tilt and at 10' from the wall
- Each grid line is one 10' set-back from the wall

## Additional Options

Please see pages 90-145 for more details on:

Sensor

Emergency

Accessories

# Product Ordering Guide

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/ CCT
<b>Edge-Lit Panel</b>	60731	PANELF1A/032UNHD835/14G/WH	32	120-347	0-10	835
	60732	PANELF1A/032UNHD840/14G/WH	32	120-347	0-10	840
	60733	PANELF1A/032UNHD850/14G/WH	32	120-347	0-10	850
	74243	PANELF1A/032UNVD835/14G/WH	32	120-277	0-10	835
	74244	PANELF1A/032UNVD840/14G/WH	32	120-277	0-10	840
	74938	PANELF1A/032UNVD850/14G/WH	32	120-277	0-10	850
	60728	PANELF1A/032UNHD835/22G/WH	32	120-347	0-10	835
	60729	PANELF1A/032UNHD840/22G/WH	32	120-347	0-10	840
	60730	PANELF1A/032UNHD850/22G/WH	32	120-347	0-10	850
	74251	PANELF1A/032UNVD835/22G/WH	32	120-277	0-10	835
	74252	PANELF1A/032UNVD840/22G/WH	32	120-277	0-10	840
	74797	PANELF1A/032UNVD850/22G/WH	32	120-277	0-10	850
	60734	PANELF1A/032UNHD835/24G/WH	32	120-347	0-10	835
	60735	PANELF1A/032UNHD840/24G/WH	32	120-347	0-10	840
	60736	PANELF1A/032UNHD850/24G/WH	32	120-347	0-10	850
	74247	PANELF1A/032UNVD835/24G/WH	32	120-277	0-10	835
	74248	PANELF1A/032UNVD840/24G/WH	32	120-277	0-10	840
	74935	PANELF1A/032UNVD850/24G/WH	32	120-277	0-10	850
	60737	PANELF1A/040UNHD835/24G/WH	40	120-347	0-10	835
	60738	PANELF1A/040UNHD840/24G/WH	40	120-347	0-10	840
	60739	PANELF1A/040UNHD850/24G/WH	40	120-347	0-10	850
	74249	PANELF1A/040UNVD835/24G/WH	40	120-277	0-10	835
	74250	PANELF1A/040UNVD840/24G/WH	40	120-277	0-10	840
	74934	PANELF1A/040UNVD850/24G/WH	40	120-277	0-10	850
	74245	PANELF1A/032UNVD835/14G/WH/E	32	120-277	0-10	835
	74246	PANELF1A/032UNVD840/14G/WH/E	32	120-277	0-10	840
	74939	PANELF1A/035UNVD850/14G/WH/E	35	120-277	0-10	850
	74253	PANELF1A/032UNVD835/22G/WH/E	32	120-277	0-10	835
	74254	PANELF1A/032UNVD840/22G/WH/E	32	120-277	0-10	840
	74798	PANELF1A/035UNVD850/22G/WH/E	35	120-277	0-10	850
	74239	PANELF1A/032UNVD835/24G/WH/E	32	120-277	0-10	835
	74240	PANELF1A/032UNVD840/24G/WH/E	32	120-277	0-10	840
	74937	PANELF1A/035UNVD850/24G/WH/E	32	120-277	0-10	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options**	DLC (Std/Prem) & ENERGY STAR
47.8" x 11.8" x 1.7"	3,200	102	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 11.8" x 1.7"	3,300	104	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 11.8" x 1.7"	3,500	110	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 11.8" x 1.7"	3,200	102	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 11.8" x 1.7"	3,300	104	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 11.8" x 1.7"	3,500	110	≥50,000	Damp	2x32W T8	–	Standard
23.8" x 23.8" x 1.7"	3,500	110	≥50,000	Damp	3x17W T8	–	Standard
23.8" x 23.8" x 1.7"	3,500	110	≥50,000	Damp	3x17W T8	–	Standard
23.8" x 23.8" x 1.7"	3,500	114	≥50,000	Damp	3x17W T8	–	Standard
23.8" x 23.8" x 1.7"	3,500	110	≥50,000	Damp	3x17W T8	–	Standard
23.8" x 23.8" x 1.7"	3,500	110	≥50,000	Damp	3x17W T8	–	Standard
23.8" x 23.8" x 1.7"	3,500	114	≥50,000	Damp	3x17W T8	–	Standard
47.8" x 23.8" x 1.7"	3,300	104	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 23.8" x 1.7"	3,300	104	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 23.8" x 1.7"	3,500	112	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 23.8" x 1.7"	3,300	104	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 23.8" x 1.7"	3,300	104	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 23.8" x 1.7"	3,500	112	≥50,000	Damp	2x32W T8	–	Standard
47.8" x 23.8" x 1.7"	4,200	109	≥50,000	Damp	3x32W T8	–	Standard
47.8" x 23.8" x 1.7"	4,200	110	≥50,000	Damp	3x32W T8	–	Standard
47.8" x 23.8" x 1.7"	4,300	113	≥50,000	Damp	3x32W T8	–	Standard
47.8" x 23.8" x 1.7"	4,200	109	≥50,000	Damp	3x32W T8	–	Standard
47.8" x 23.8" x 1.7"	4,200	110	≥50,000	Damp	3x32W T8	–	Standard
47.8" x 23.8" x 1.7"	4,300	113	≥50,000	Damp	3x32W T8	–	Standard
47.8" x 11.8" x 2.7"	3,200	102	≥50,000	Damp	2x32W T8	E	–
47.8" x 11.8" x 2.7"	3,300	104	≥50,000	Damp	2x32W T8	E	–
47.8" x 11.8" x 2.7"	3,500	110	≥50,000	Damp	2x32W T8	E	–
23.8" x 23.8" x 2.7"	3,500	110	≥50,000	Damp	3x17W T8	E	–
23.8" x 23.8" x 2.7"	3,500	110	≥50,000	Damp	3x17W T8	E	–
23.8" x 23.8" x 2.7"	3,500	114	≥50,000	Damp	3x17W T8	E	–
23.8" x 23.8" x 2.7"	3,300	104	≥50,000	Damp	2x32W T8	E	–
23.8" x 23.8" x 2.7"	3,300	104	≥50,000	Damp	2x32W T8	E	–
23.8" x 23.8" x 2.7"	3,500	112	≥50,000	Damp	2x32W T8	E	–

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
UltraLED™ Edge-Lit Panel	74241	PANELF1A/040UNVD835/24G/WH/E	40	120-277	0-10	835
	74242	PANELF1A/040UNVD840/24G/WH/E	40	120-277	0-10	840
	74936	PANELF1A/040UNVD850/24G/WH/E	40	120-277	0-10	850
	60274	PANELF2B/020UNHD835/14G/WH	20	120-347	0-10	835
	60275	PANELF2B/020UNHD840/14G/WH	20	120-347	0-10	840
	60276	PANELF2B/020UNHD850/14G/WH	20	120-347	0-10	850
	60301	PANELF2B/020UNVD835/14G/WH	20	120-277	0-10	835
	60302	PANELF2B/020UNVD840/14G/WH	20	120-277	0-10	840
	60303	PANELF2B/020UNVD850/14G/WH	20	120-277	0-10	850
	60268	PANELF2B/026UNHD835/14G/WH	26	120-347	0-10	835
	60269	PANELF2B/026UNHD840/14G/WH	26	120-347	0-10	840
	60270	PANELF2B/026UNHD850/14G/WH	26	120-347	0-10	850
	60301	PANELF2B/026UNVD835/14G/WH	26	120-277	0-10	835
	60308	PANELF2B/026UNVD840/14G/WH	26	120-277	0-10	840
	60312	PANELF2B/026UNVD850/14G/WH	26	120-277	0-10	850
	60291	PANELF2B/020UNHD835/22G/WH	20	120-347	0-10	835
	60292	PANELF2B/020UNHD840/22G/WH	20	120-347	0-10	840
	60293	PANELF2B/020UNHD850/22G/WH	20	120-347	0-10	850
	60349	PANELF2B/020UNVD835/22G/WH	20	120-277	0-10	835
	60350	PANELF2B/020UNVD840/22G/WH	20	120-277	0-10	840
	60351	PANELF2B/020UNVD850/22G/WH	20	120-277	0-10	850
	60277	PANELF2B/026UNHD835/22G/WH	26	120-347	0-10	835
	60278	PANELF2B/026UNHD840/22G/WH	26	120-347	0-10	840
	60279	PANELF2B/026UNHD850/22G/WH	26	120-347	0-10	850
	60313	PANELF2B/026UNVD835/22G/WH	26	120-277	0-10	835
	60314	PANELF2B/026UNVD840/22G/WH	26	120-277	0-10	840
	60315	PANELF2B/026UNVD850/22G/WH	26	120-277	0-10	850
	60288	PANELF2B/026UNHD835/24G/WH	26	120-347	0-10	835
	60289	PANELF2B/026UNHD840/24G/WH	26	120-347	0-10	840
	60290	PANELF2B/026UNHD850/24G/WH	26	120-347	0-10	850
	60319	PANELF2B/026UNVD835/24G/WH	26	120-277	0-10	835
	60320	PANELF2B/026UNVD840/24G/WH	26	120-277	0-10	840
60321	PANELF2B/026UNVD850/24G/WH	26	120-277	0-10	850	

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
23.8" x 23.8" x 2.7"	4,200	109	≥50,000	Damp	3x32W T8	E	–
23.8" x 23.8" x 2.7"	4,200	110	≥50,000	Damp	3x32W T8	E	–
23.8" x 23.8" x 2.7"	4,300	113	≥50,000	Damp	3x32W T8	E	–
47.8" x 11.8" x 1.7"	2,500	125	≥50,000	Damp	2x28W T8	-	Premium
47.8" x 11.8" x 1.7"	2,500	125	≥50,000	Damp	2x28W T8	-	Premium
47.8" x 11.8" x 1.7"	2,500	125	≥50,000	Damp	2x28W T8	-	Premium
47.8" x 11.8" x 1.7"	2,500	125	≥50,000	Damp	2x28W T8	-	Premium
47.8" x 11.8" x 1.7"	2,500	125	≥50,000	Damp	2x28W T8	-	Premium
47.8" x 11.8" x 1.7"	2,500	125	≥50,000	Damp	2x28W T8	-	Premium
47.8" x 11.8" x 1.7"	2,500	125	≥50,000	Damp	2x28W T8	-	Premium
47.8" x 11.8" x 1.7"	3,250	125	≥50,000	Damp	2x32W T8	-	Premium
47.8" x 11.8" x 1.7"	3,250	125	≥50,000	Damp	2x32W T8	-	Premium
47.8" x 11.8" x 1.7"	3,250	125	≥50,000	Damp	2x32W T8	-	Premium
47.8" x 11.8" x 1.7"	3,250	125	≥50,000	Damp	2x32W T8	-	Premium
47.8" x 11.8" x 1.7"	3,250	125	≥50,000	Damp	2x32W T8	-	Premium
47.8" x 11.8" x 1.7"	3,250	125	≥50,000	Damp	2x32W T8	-	Premium
23.8" x 23.8" x 1.7"	2,500	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	2500	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	2,500	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	2,500	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	2,500	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	2,500	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	2,500	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	3,250	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	3,250	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	3,250	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	3,250	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	3,250	125	≥50,000	Damp	3x17W T8	-	Premium
23.8" x 23.8" x 1.7"	3,250	125	≥50,000	Damp	3x17W T8	-	Premium
47.8" x 23.8" x 1.7"	3,380	125	≥50,000	Damp	2x32W T8	-	Premium
47.8" x 23.8" x 1.7"	3,380	125	≥50,000	Damp	2x32W T8	-	Premium
47.8" x 23.8" x 1.7"	3,380	125	≥50,000	Damp	2x32W T8	-	Premium
47.8" x 23.8" x 1.7"	3,380	125	≥50,000	Damp	2x32W T8	-	Premium
47.8" x 23.8" x 1.7"	3,380	125	≥50,000	Damp	2x32W T8	-	Premium
47.8" x 23.8" x 1.7"	3,380	125	≥50,000	Damp	2x32W T8	-	Premium

ORDERING GUIDE

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	60271	PANELF2B/032UNHD835/24G/WH	32	120-347	0-10	835
	60272	PANELF2B/032UNHD840/24G/WH	32	120-347	0-10	840
	60273	PANELF2B/032UNHD850/24G/WH	32	120-347	0-10	850
	60295	PANELF2B/032UNVD835/24G/WH	32	120-277	0-10	835
	60296	PANELF2B/032UNVD840/24G/WH	32	120-277	0-10	840
	60297	PANELF2B/032UNVD850/24G/WH	32	120-277	0-10	850
	60280	PANELF2B/050UNHD835/24G/WH	50	120-347	0-10	835
	60281	PANELF2B/050UNHD840/24G/WH	50	120-347	0-10	840
	60282	PANELF2B/050UNHD850/24G/WH	50	120-347	0-10	850
	60343	PANELF2B/050UNVD835/24G/WH	50	120-277	0-10	835
	60344	PANELF2B/050UNVD840/24G/WH	50	120-277	0-10	840
	60345	PANELF2B/050UNVD850/24G/WH	50	120-277	0-10	850
	60304	PANELF2B/020UNVD835/14G/WH/E	20	120-277	0-10	835
	60305	PANELF2B/020UNVD840/14G/WH/E	20	120-277	0-10	840
	60306	PANELF2B/020UNVD850/14G/WH/E	20	120-277	0-10	850
	60310	PANELF2B/026UNVD835/14G/WH/E	26	120-277	0-10	835
	60311	PANELF2B/026UNVD840/14G/WH/E	26	120-277	0-10	840
	60312	PANELF2B/026UNVD850/14G/WH/E	26	120-277	0-10	850
	60352	PANELF2B/020UNVD835/22G/WH/E	20	120-277	0-10	835
	60353	PANELF2B/020UNVD840/22G/WH/E	20	120-277	0-10	840
	60354	PANELF2B/020UNVD850/22G/WH/E	20	120-277	0-10	850
	60322	PANELF2B/026UNVD835/22G/WH/E	26	120-277	0-10	835
	60323	PANELF2B/026UNVD840/22G/WH/E	26	120-277	0-10	840
	60324	PANELF2B/026UNVD850/22G/WH/E	26	120-277	0-10	850
	60322	PANELF2B/026UNVD835/24G/WH/E	26	120-277	0-10	835
	60323	PANELF2B/026UNVD840/24G/WH/E	26	120-277	0-10	840
	60324	PANELF2B/026UNVD850/24G/WH/E	26	120-277	0-10	850
	60298	PANELF2B/032UNVD835/24G/WH/E	32	120-277	0-10	835
	60299	PANELF2B/032UNVD840/24G/WH/E	32	120-277	0-10	840
	60300	PANELF2B/032UNVD850/24G/WH/E	32	120-277	0-10	850
	60343	PANELF2B/050UNVD835/24G/WH/E	50	120-277	0-10	835
	60347	PANELF2B/050UNVD840/24G/WH/E	50	120-277	0-10	840
	60348	PANELF2B/050UNVD850/24G/WH/E	50	120-277	0-10	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender  
+Dimming via compatible app or Leviton Keypad. (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
47.8" x 23.8" x 1.7"	4,160	125	≥50,000	Damp	3x32W T8	-	Premium
47.8" x 23.8" x 1.7"	4,160	125	≥50,000	Damp	3x32W T8	-	Premium
47.8" x 23.8" x 1.7"	4,160	125	≥50,000	Damp	3x32W T8	-	Premium
47.8" x 23.8" x 1.7"	4,160	125	≥50,000	Damp	3x32W T8	-	Premium
47.8" x 23.8" x 1.7"	4,160	125	≥50,000	Damp	3x32W T8	-	Premium
47.8" x 23.8" x 1.7"	6,250	125	≥50,000	Damp	4x32W T8	-	Premium
47.8" x 23.8" x 1.7"	6,250	125	≥50,000	Damp	4x32W T8	-	Premium
47.8" x 23.8" x 1.7"	6,250	125	≥50,000	Damp	4x32W T8	-	Premium
47.8" x 23.8" x 1.7"	6,250	125	≥50,000	Damp	4x32W T8	-	Premium
47.8" x 23.8" x 1.7"	6,250	125	≥50,000	Damp	4x32W T8	-	Premium
47.8" x 23.8" x 1.7"	6,250	125	≥50,000	Damp	4x32W T8	-	Premium
47.8" x 11.8" x 2.7"	2,500	125	≥50,000	Damp	2x28W T8	E	Premium
47.8" x 11.8" x 2.7"	2,500	125	≥50,000	Damp	2x28W T8	E	Premium
47.8" x 11.8" x 2.7"	3,250	125	≥50,000	Damp	2x32W T8	E	Premium
47.8" x 11.8" x 2.7"	3,250	125	≥50,000	Damp	2x32W T8	E	Premium
47.8" x 11.8" x 2.7"	3,250	125	≥50,000	Damp	2x32W T8	E	Premium
23.8" x 23.8" x 2.7"	2,500	125	≥50,000	Damp	3x17W T8	E	Premium
23.8" x 23.8" x 2.7"	2,500	125	≥50,000	Damp	3x17W T8	E	Premium
23.8" x 23.8" x 2.7"	2,500	125	≥50,000	Damp	3x17W T8	E	Premium
23.8" x 23.8" x 2.7"	3,250	125	≥50,000	Damp	3x17W T8	E	Premium
23.8" x 23.8" x 2.7"	3,250	125	≥50,000	Damp	3x17W T8	E	Premium
47.8" x 23.8" x 2.7"	3,380	125	≥50,000	Damp	2x32W T8	E	Premium
47.8" x 23.8" x 2.7"	3,380	125	≥50,000	Damp	2x32W T8	E	Premium
47.8" x 23.8" x 2.7"	3,380	125	≥50,000	Damp	2x32W T8	E	Premium
47.8" x 23.8" x 2.7"	4,160	125	≥50,000	Damp	3x32W T8	E	Premium
47.8" x 23.8" x 2.7"	4,160	125	≥50,000	Damp	3x32W T8	E	Premium
47.8" x 23.8" x 2.7"	4,160	125	≥50,000	Damp	3x32W T8	E	Premium
47.8" x 23.8" x 2.7"	6,250	125	≥50,000	Damp	4x32W T8	E	Premium
47.8" x 23.8" x 2.7"	6,250	125	≥50,000	Damp	4x32W T8	E	Premium
47.8" x 23.8" x 2.7"	6,250	125	≥50,000	Damp	4x32W T8	E	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
<b>SMART+ Edge-Lit Panel</b>	74746	LED/PANEL/32W/ADJW/22/ZB/S+	32	120-277	Yes+	8ADJ
	74523	LED/PANEL/40W/ADJW/24/ZB/S+	40	120-277	Yes+	8ADJ
<b>Volumetric Troffer</b>	74352	VOLUME1A/035UNVD835/22G/WH	35	120-277	0-10	835
	74353	VOLUME1A/035UNVD840/22G/WH	35	120-277	0-10	840
	74354	VOLUME1A/035UNVD835/22G/WH/E	35	120-277	0-10	835
	74355	VOLUME1A/035UNVD840/22G/WH/E	35	120-277	0-10	840
	74441	VOLUME1A/042UNVD835/24G/WH	42	120-277	0-10	835
	74442	VOLUME1A/042UNVD840/24G/WH	42	120-277	0-10	840
	74443	VOLUME1A/042UNVD835/24G/WH/E	42	120-277	0-10	835
	74444	VOLUME1A/042UNVD840/24G/WH/E	42	120-277	0-10	840
	71725	VOLUME2A/025UNVD835/22G/WH	25	120-277	0-10	835
	71726	VOLUME2A/025UNVD840/22G/WH	25	120-277	0-10	840
	71727	VOLUME2A/025UNVD835/22G/WH/E	25	120-277	0-10	835
	71728	VOLUME2A/025UNVD840/22G/WH/E	25	120-277	0-10	840
	74309	VOLUME2A/035UNVD835/24G/WH	35	120-277	0-10	835
	74348	VOLUME2A/035UNVD840/24G/WH	35	120-277	0-10	840
	74349	VOLUME2A/035UNVD835/24G/WH/E	35	120-277	0-10	835
74356	VOLUME2A/035UNVD840/24G/WH/E	35	120-277	0-10	840	
<b>ValueLED™ Volumetric Troffer</b>	60438	VOLUME3A/036UNVD835/24G/WH	36	120-277	0-10	835
	60439	VOLUME3A/036UNVD840/24G/WH	36	120-277	0-10	840
	60440	VOLUME3A/036UNVD850/24G/WH	36	120-277	0-10	850
	60444	VOLUME3A/028UNVD835/22G/WH	28	120-277	0-10	835
	60445	VOLUME3A/028UNVD840/22G/WH	28	120-277	0-10	840
	60446	VOLUME3A/028UNVD850/22G/WH	28	120-277	0-10	850
	60441	VOLUME3A/036UNVD835/24G/WH/E	36	120-277	0-10	835
	60442	VOLUME3A/036UNVD840/24G/WH/E	36	120-277	0-10	840
	60443	VOLUME3A/036UNVD850/24G/WH/E	36	120-277	0-10	850
	60447	VOLUME3A/028UNVD835/22G/WH/E	28	120-277	0-10	835
	60448	VOLUME3A/028UNVD840/22G/WH/E	28	120-277	0-10	840
	60449	VOLUME3A/028UNVD850/22G/WH/E	28	120-277	0-10	850
	<b>UltraLED™ Retrofit Door Kit</b>	60616	RDORKIT3A/023UNVD835/22U/WH	23	120-277	0-10
60617		RDORKIT3A/023UNVD840/22U/WH	23	120-277	0-10	840
60618		RDORKIT3A/023UNVD850/22U/WH	23	120-277	0-10	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender  
+Dimming via compatible app or Leviton Keypad. (MTO) = Made to Order  
Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty



Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
23.8" x 23.8" x 1.7"	3,200	100	≥50,000	Damp	3x17W T8/2U31 T8	S	Standard
47.8" x 23.8" x 1.7"	4,000	100	≥50,000	Damp	3x32W T8	S	Standard
23.7" x 23.7" x 3.5"	3,500	107	≥100,000	Wet	3x17W T8/2U31 T8	–	Standard
23.7" x 23.7" x 3.5"	3,600	113	≥100,000	Wet	3x17W T8/2U31 T8	–	Standard
23.7" x 23.7" x 3.5"	3,500	107	≥100,000	Wet	3x17W T8/2U31 T8	E	Standard
23.7" x 23.7" x 3.5"	3,600	113	≥100,000	Wet	3x17W T8/2U31 T8	E	Standard
47.7" x 23.7" x 3.5"	4,400	103	≥100,000	Wet	3x32W T8	–	Standard
47.7" x 23.7" x 3.5"	4,400	103	≥100,000	Wet	3x32W T8	–	Standard
47.7" x 23.7" x 3.5"	4,400	103	≥100,000	Wet	3x32W T8	E	Standard
47.7" x 23.7" x 3.5"	4,400	103	≥100,000	Wet	3x32W T8	E	Standard
23.7" x 23.7" x 3.5"	3,200	134	≥70,000	Wet	3x17W T8/2U31 T8	–	Premium
23.7" x 23.7" x 3.5"	3,300	136	≥70,000	Wet	3x17W T8/2U31 T8	–	Premium
23.7" x 23.7" x 3.5"	3,300	134	≥70,000	Wet	3x17W T8/2U31 T8	E	Premium
23.7" x 23.7" x 3.5"	3,300	136	≥70,000	Wet	3x32W T8	E	Premium
47.7" x 23.7" x 3.5"	4,600	135	≥70,000	Wet	3x32W T8	–	Premium
47.7" x 23.7" x 3.5"	4,600	138	≥70,000	Wet	3x17W T8/2U31 T8	–	Premium
47.7" x 23.7" x 3.5"	4,600	135	≥70,000	Wet	3x32W T8	E	Premium
47.7" x 23.7" x 3.5"	4,600	138	≥70,000	Wet	3x32W T8	E	Premium
47.7" x 23.7" x 2.1"	4,500	130	≥50,000	Damp	3x32W T8	–	Premium
47.7" x 23.7" x 2.1"	4,500	130	≥50,000	Damp	3x32W T8	–	Premium
47.7" x 23.7" x 2.1"	4,500	130	≥50,000	Damp	3x32W T8	–	Premium
23.7" x 23.7" x 2.1"	3,500	125	≥50,000	Damp	3x17W T8/2U31 T8	–	Premium
23.7" x 23.7" x 2.1"	3,500	125	≥50,000	Damp	3x17W T8/2U31 T8	–	Premium
23.7" x 23.7" x 2.1"	3,500	125	≥50,000	Damp	3x17W T8/2U31 T8	–	Premium
47.7" x 23.7" x 3.4"	4,500	130	≥50,000	Damp	3x32W T8	E	Premium
47.7" x 23.7" x 3.4"	4,500	130	≥50,000	Damp	3x32W T8	E	Premium
47.7" x 23.7" x 3.4"	4,500	130	≥50,000	Damp	3x32W T8	E	Premium
23.7" x 23.7" x 3.4"	3,500	125	≥50,000	Damp	3x17W T8/2U31 T8	E	Premium
23.7" x 23.7" x 3.4"	3,500	125	≥50,000	Damp	3x17W T8/2U31 T8	E	Premium
23.7" x 23.7" x 3.4"	3,500	125	≥50,000	Damp	3x17W T8/2U31 T8	E	Premium
23.8" x 23.9" x 2.4"	2,900	130	≥100,000	Damp	3x17W T8/2U31 T8	–	Premium
23.8" x 23.9" x 2.4"	2,900	130	≥100,000	Damp	3x17W T8/2U31 T8	–	Premium
23.8" x 23.9" x 2.4"	2,900	130	≥100,000	Damp	3x17W T8/2U31 T8	–	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	60619	RDORKIT3A/033UNVD835/24U/WH	33	120-277	0-10	835
	60620	RDORKIT3A/033UNVD840/24U/WH	33	120-277	0-10	840
	60621	RDORKIT3A/033UNVD850/24U/WH	33	120-277	0-10	850
	60807***	RDORKIT3A/023UNVD835/22U/WH/E	23	120-277	0-10	835
	60808***	RDORKIT3A/023UNVD840/22U/WH/E	23	120-277	0-10	840
	60809***	RDORKIT3A/023UNVD850/22U/WH/E	23	120-277	0-10	850
	60810***	RDORKIT3A/033UNVD835/24UWH/E	33	120-277	0-10	835
	60811***	RDORKIT3A/033UNVD840/24U/WH/E	33	120-277	0-10	840
	60812***	RDORKIT3A/033UNVD850/24UWH/E	33	120-277	0-10	850
<b>Troffer Retrofit Kit</b>	75460	LEDR/TROFF/2L/024/UNV/D/830/22/WH	24	120-277	0-10	830
	75461	LEDR/TROFF/2L/024/UNV/D/835/22/WH	24	120-277	0-10	835
	75462	LEDR/TROFF/2L/024/UNV/D/840/22/WH	24	120-277	0-10	840
	75463	LEDR/TROFF/2L/024/UNV/D/850/22/WH	24	120-277	0-10	850
	75431	LEDR/TROFF/3L/026/UNV/D/830/22/WH	26	120-277	0-10	830
	75432	LEDR/TROFF/3L/026/UNV/D/835/22/WH	26	120-277	0-10	835
	75433	LEDR/TROFF/3L/026/UNV/D/840/22/WH	26	120-277	0-10	840
	75434	LEDR/TROFF/3L/026/UNV/D/850/22/WH	26	120-277	0-10	850
	75427	LEDR/TROFF/2L/027/UNV/D/830/24/WH	27	120-277	0-10	830
	75428	LEDR/TROFF/2L/027/UNV/D/835/24/WH	27	120-277	0-10	835
	75429	LEDR/TROFF/2L/027/UNV/D/840/24/WH	27	120-277	0-10	840
	75430	LEDR/TROFF/2L/027/UNV/D/850/24/WH	27	120-277	0-10	850
	75496	LEDR/TROFF/3L/040/UNV/D/830/24/WH	40	120-277	0-10	830
	75497	LEDR/TROFF/3L/040/UNV/D/835/24/WH	40	120-277	0-10	835
	75498	LEDR/TROFF/3L/040/UNV/D/840/24/WH	40	120-277	0-10	840
	75499	LEDR/TROFF/3L/040/UNV/D/850/24/WH	40	120-277	0-10	850
<b>SMART+ Troffer Retrofit Kit</b>	71507	LED/TROFF/34W/ADJW/22/ZB/S+	34	120-277	Yes*	8ADJ
	71506	LED/TROFF/48W/ADJW/22/ZB/S+	48	120-277	Yes*	8ADJ
<b>ULTRA LED™ RT5/6 HO</b>	75228	LED/RT5/6/HO/700/827	8	120-277	Phase-cut	827
	75229	LED/RT5/6/HO/700/830	8	120-277	Phase-cut	830
	75230	LED/RT5/6/HO/700/835	8	120-277	Phase-cut	835
	75231	LED/RT5/6/HO/700/840	8	120-277	Phase-cut	840
	75137	LED/RT5/6/HO/900/827	13	120-277	0-10	827

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender

\*\*\*Available April 20, 2019

+Dimming via compatible app or Leviton Keypad. (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
47.8" x 23.9" x 2.4"	4,100	130	≥100,000	Damp	3x32W T8	–	Premium
47.8" x 23.9" x 2.4"	4,100	130	≥100,000	Damp	3x32W T8	–	Premium
47.8" x 23.9" x 2.4"	4,100	130	≥100,000	Damp	3x32W T8	–	Premium
23.8" x 23.9" x 2.4"	2900	130	≥100,000	Damp	2x32W T8	E	Premium
23.8" x 23.9" x 2.4"	2900	130	≥100,000	Damp	2x32W T5	E	Premium
23.8" x 23.9" x 2.4"	2900	130	≥100,000	Damp	2x32W T6	E	Premium
47.8" x 23.9" x 2.4"	4100	130	≥100,000	Damp	2x32W T7	E	Premium
47.8" x 23.9" x 2.4"	4100	130	≥100,000	Damp	2x32W T8	E	Premium
47.8" x 23.9" x 2.4"	4100	130	≥100,000	Damp	2x32W T8	E	Premium
20.3" x 14.8" x 1.7"	3,000	125	≥50,000	Damp	3x17W T8/2U31 T8	–	Standard
20.3" x 14.8" x 1.7"	3,000	125	≥50,000	Damp	3x17W T8/2U31 T8	–	Standard
20.3" x 14.8" x 1.7"	3,000	125	≥50,000	Damp	3x17W T8/2U31 T8	–	Standard
20.3" x 14.8" x 1.7"	3,000	125	≥50,000	Damp	3x17W T8/2U31 T8	–	Standard
20.3" x 14.8" x 1.7"	3,200	123	≥50,000	Damp	3x17W T8/2U31 T8	–	Standard
20.3" x 14.8" x 1.7"	3,200	123	≥50,000	Damp	3x17W T8/2U31 T8	–	Standard
20.3" x 14.8" x 1.7"	3,200	123	≥50,000	Damp	3x17W T8/2U31 T8	–	Standard
20.3" x 14.8" x 1.7"	3,200	123	≥50,000	Damp	3x17W T8/2U31 T8	–	Standard
43.7" x 14.8" x 1.7"	3,200	119	≥50,000	Damp	3x32W T8	–	Standard
43.7" x 14.8" x 1.7"	3,200	119	≥50,000	Damp	3x32W T8	–	Standard
43.7" x 14.8" x 1.7"	3,200	119	≥50,000	Damp	3x32W T8	–	Standard
43.7" x 14.8" x 1.7"	3,200	119	≥50,000	Damp	3x32W T8	–	Standard
43.7" x 14.8" x 1.7"	4,800	120	≥50,000	Damp	3x32W T8	–	Standard
43.7" x 14.8" x 1.7"	4,800	120	≥50,000	Damp	3x32W T8	–	Standard
43.7" x 14.8" x 1.7"	4,800	120	≥50,000	Damp	3x32W T8	–	Standard
43.7" x 14.8" x 1.7"	4,800	120	≥50,000	Damp	3x32W T8	–	Standard
20.3" x 14.8" x 1.7"	3,200	94	≥35,000	Damp	3x17W T8/2U31 T8	S	–
43.7" x 14.8" x 1.7"	4,800	100	≥35,000	Damp	3x32W T8	S	–
7.36" x 3.46"	700	87	≥50,000	Wet	13W CFL	T, TE	E-Star
7.36" x 3.46"	700	87	≥50,000	Wet	13W CFL	T, TE	E-Star
7.36" x 3.46"	700	87	≥50,000	Wet	13W CFL	T, TE	E-Star
7.36" x 3.46"	700	87	≥50,000	Wet	13W CFL	T, TE	E-Star
7.36" x 3.46"	900	69	≥50,000	Wet	18W CFL	T, TE	E-Star

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	75138	LED/RT5/6/HO/900/830	13	120-277	0-10	830
	75140	LED/RT5/6/HO/900/835	13	120-277	0-10	835
	75139	LED/RT5/6/HO/900/840	13	120-277	0-10	840
	75327	LED/RT5/6/HO/900/840/347V	13	347	–	840
	72528	LEDRT5/6/1500/HO/830	17	120-277	0-10	830
	72529	LEDRT5/6/1500/HO/835	17	120-277	0-10	835
	72530	LEDRT5/6/1500/HO/840	17	120-277	0-10	840
	75328	LED/RT5/6/HO/1500/840/347V	17	347	–	840
<b>ULTRA LED™ RT8</b>	74466	LED/RT8/2000/830	24	120-277	0-10	830
	74467	LED/RT8/2000/835	24	120-277	0-10	835
	74468	LED/RT8/2000/840	24	120-277	0-10	840
	75397	LED/RT8/2000/830/347V	23	347	–	830
	75398	LED/RT8/2000/840/347V	23	347	–	840
	75399	LED/RT8/2000/850/347V	23	347	–	850
	72625	LED/RT8/3000/930	40	120-277	0-10	930
	72626	LED/RT8/3000/935	40	120-277	0-10	935
	72628	LED/RT8/3000/940	40	120-277	0-10	940
	79740	LED/RT8/5000/830	54	120-277	0-10	830
	79741	LED/RT8/5000/835	54	120-277	0-10	835
	79742	LED/RT8/5000/840	54	120-277	0-10	840
	75435	LED/RT8/5000/840/347V	50	347	–	840
	79754	LED/RT8/8000/830	92	120-277	0-10	830
	79755	LED/RT8/8000/835	92	120-277	0-10	835
	79756	LED/RT8/8000/840	92	120-277	0-10	840
<b>Contractor Series*** RT4 and RT5/6 Socket Base</b>	74404	LED/RT5/6/625/827	9	120	Phase-cut	827
	74405	LED/RT5/6/625/830	9	120	Phase-cut	830
	74406	LED/RT5/6/625/840	9	120	Phase-cut	840
	74407	LED/RT5/6/625/850	9	120	Phase-cut	850
	70520	LED/RT4/550/827	8	120	Phase-Cut	827
	70521	LED/RT4/550/830	8	120	Phase-Cut	830
	74181	LED/RT4/550/840	8	120	Phase-Cut	840
	74182	LED/RT4/550/850	8	120	Phase-Cut	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender

\*\*\*Contractor Series not CEC/Title 24 compliant

+Dimming via compatible app or Leviton Keypad. (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
7.36" x 3.46"	900	69	≥50,000	Wet	18W CFL	T, TE	E-Star
7.36" x 3.46"	900	69	≥50,000	Wet	18W CFL	T, TE	E-Star
7.36" x 3.46"	900	69	≥50,000	Wet	18W CFL	T, TE	E-Star
7.36" x 3.46"	900	69	≥50,000	Wet	18W CFL	T, TE	–
9.25" x 4.31"	1,500	88	≥50,000	Wet	32W CFL	T, TE	E-Star
9.25" x 4.31"	1,500	88	≥50,000	Wet	32W CFL	T, TE	E-Star
9.25" x 4.31"	1,500	88	≥50,000	Wet	32W CFL	T, TE	E-Star
9.25" x 4.31"	1,500	88	≥50,000	Wet	32W CFL	T, TE	–
9.25" x 5.31"	2,000	83	≥50,000	Wet	2 x 26W CFL	T, TE	E-Star
9.25" x 5.31"	2,000	83	≥50,000	Wet	2 x 26W CFL	T, TE	E-Star
9.25" x 5.31"	2,000	83	≥50,000	Wet	2 x 26W CFL	T, TE	E-Star
9.25" x 5.31"	2,000	86	≥50,000	Wet	2 x 26W CFL	T, TE	–
9.25" x 5.31"	2,000	86	≥50,000	Wet	2 x 26W CFL	T, TE	–
9.25" x 5.31"	2,000	86	≥50,000	Wet	2 x 26W CFL	T, TE	–
9.45" x 4.88"	3,000	75	≥50,000	Wet	2 x 26W CFL	T, TE	E-Star
9.45" x 4.88"	3,000	75	≥50,000	Wet	2 x 26W CFL	T, TE	E-Star
9.45" x 4.88"	3,000	75	≥50,000	Wet	2 x 26W CFL	T, TE	E-Star
9.45" x 5.51"	5,000	92	≥50,000	Wet	2 x 26W CFL	T, TE	E-Star
9.45" x 5.51"	5,000	92	≥50,000	Wet	2 x 26W CFL	T, TE	E-Star
9.45" x 5.51"	5,000	92	≥50,000	Wet	2 x 26W CFL	T, TE	–
9.45" x 5.51"	5,000	100	≥50,000	Wet	2 x 26W CFL	T, TE	E-Star
9.45" x 5.51"	8,000	87	≥50,000	Wet	150W HPS /175W MH	T, TE	E-Star
9.45" x 5.51"	8,000	87	≥50,000	Wet	150W HPS /175W MH	T, TE	E-Star
9.45" x 5.51"	8,000	87	≥50,000	Wet	150W HPS /175W MH	T, TE	E-Star
7.37" x 3.08"	625	69	11,000	Wet	65W Incandescent	T, TE	N/A
7.37" x 3.08"	625	69	11,000	Wet	65W Incandescent	T, TE	N/A
7.37" x 3.08"	625	69	11,000	Wet	65W Incandescent	T, TE	N/A
7.37" x 3.08"	625	69	11,000	Wet	65W Incandescent	T, TE	N/A
2.90" x 5.04"	550	68.75	11,000	Wet	50W Incandescent	T	N/A
2.90" x 5.04"	550	68.75	11,000	Wet	50W Incandescent	T	N/A
2.90" x 5.04"	550	68.75	11,000	Wet	50W Incandescent	T	N/A
2.90" x 5.04"	550	68.75	11,000	Wet	50W Incandescent	T	N/A

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
<b>SMART+ LED RT5/6 HO RGBW</b>	74281	LED/21/RTHO/DIM/56/RGBW/S+	21	120-277	Yes+	9ADJ
	<b>ULTRA LED™ RT4 Socket Base</b>					
	74285	LEDRT4/600/927/FL80	9	120	Phase-Cut	927
	74286	LEDRT4/600/930/FL80	9	120	Phase-Cut	930
	74288	LEDRT4/600/940/FL80	9	120	Phase-Cut	940
	74289	LEDRT4/600/950/FL80	9	120	Phase-Cut	950
	70387	LEDRT4/G/600/827	9	120	Phase-Cut	827
	70395	LEDRT4/G/600/830	9	120	Phase-Cut	830
<b>ULTRA LED RT5/6 Socket Base</b>						
	74290	LED/RT5/6/700/927/FL80	10	120	Phase-Cut	927
	74291	LED/RT5/6/700/930/FL80	10	120	Phase-Cut	930
	74292	LED/RT5/6/700/940/FL80	10	120	Phase-Cut	940
	74293	LED/RT5/6/700/950/FL80	10	120	Phase-Cut	950
	74294	LED/RT5/6/900/927/FL80	13	120	Phase-Cut	927
	74295	LED/RT5/6/900/930/FL80	13	120	Phase-Cut	930
	74296	LED/RT5/6/900/930/RP	13	120	Phase-Cut	930
	74297	LED/RT5/6/900/950/RP	13	120	Phase-Cut	950
	73466	LED/RT5/6/G/900/827/FL80/RP	13	120	Phase-Cut	827
	73467	LED/RT5/6/G/900/830	13	120	Phase-Cut	830
	79750	LED/RT5/6/1200/927	16	120	Phase-Cut	927
	79751	LED/RT5/6/1200/930	16	120	Phase-Cut	930
	79752	LED/RT5/6/1200/930/RP	16	120	Phase-Cut	930
	79753	LED/RT5/6/1200/940	16	120	Phase-Cut	940
<b>ULTRA LED RTQ Socket Base</b>						
	74925	LED/RTQ4/600/927	9	120	Phase-Cut	927
	74924	LED/RTQ4/600/930	9	120	Phase-Cut	930
	74926	LED/RTQ4/600/940	9	120	Phase-Cut	940
	74927	LED/RTQ4/600/950	9	120	Phase-Cut	950
	74928	LED/RTQ5/6/600/927	13	120	Phase-Cut	927
	74929	LED/RTQ5/6/600/930	13	120	Phase-Cut	930
	74930	LED/RTQ5/6/600/940	13	120	Phase-Cut	940
	74931	LED/RTQ5/6/600/950	13	120	Phase-Cut	950
<b>SMART+ LED RT5/6</b>						
	73742	LED/10/RT56/ADJW/ZBS+	10	120	Yes+	8ADJ
	73741	LED/13.5/RT56/RGBW/ZBS+	13.5	120	Yes+	9ADJ

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender

+Dimming via compatible app or Leviton Keypad. (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
7.34" x 4.29"	1,400	67	≥50,000	Wet	32W CFL	S, T	–
5.04" x 3.18"	600	66	50,000	Wet	50W Incandescent	T	E-Star
5.04" x 3.18"	600	66	50,000	Wet	50W Incandescent	T	E-Star
5.04" x 3.18"	600	66	50,000	Wet	50W Incandescent	T	E-Star
5.04" x 3.18"	600	66	50,000	Wet	50W Incandescent	T	E-Star
5.04" x 3.16"	600	66	50,000	Wet	50W Incandescent	–	E-Star
5.04" x 3.16"	600	66	50,000	Wet	50W Incandescent	–	E-Star
7.37" x 3.40"	700	70	50,000	Wet	65W Incandescent	T	E-Star
7.37" x 3.40"	700	70	50,000	Wet	65W Incandescent	T	E-Star
7.37" x 3.40"	700	70	50,000	Wet	65W Incandescent	T	E-Star
7.37" x 3.40"	700	70	50,000	Wet	65W Incandescent	T	E-Star
7.37" x 3.37"	900	69	50,000	Wet	75W Incandescent	T	E-Star
7.37" x 3.37"	900	69	50,000	Wet	75W Incandescent	T	E-Star
7.37" x 3.37"	900	69	50,000	Wet	75W Incandescent	T	E-Star
7.37" x 3.37"	900	69	50,000	Wet	75W Incandescent	T	E-Star
7.28" x 3.45"	900	69	50,000	Wet	75W Incandescent	–	E-Star
7.28" x 3.45"	900	69	50,000	Wet	75W Incandescent	–	E-Star
7.37" x 3.83"	1,200	75	50,000	Wet	100W Incandescent	T	E-Star
7.37" x 3.83"	1,200	75	50,000	Wet	100W Incandescent	T	E-Star
7.37" x 3.83"	1,200	75	50,000	Wet	100W Incandescent	T	E-Star
7.37" x 3.83"	1,200	75	50,000	Wet	100W Incandescent	T	E-Star
5.04" x 3.12"	600	66	50,000	Wet	50W Incandescent	T	E-Star
5.04" x 3.12"	600	66	50,000	Wet	50W Incandescent	T	E-Star
5.04" x 3.12"	600	66	50,000	Wet	50W Incandescent	T	E-Star
5.04" x 3.12"	600	66	50,000	Wet	50W Incandescent	T	E-Star
7.32" x 3.27"	900	69	50,000	Wet	75W Incandescent	T	E-Star
7.32" x 3.27"	900	69	50,000	Wet	75W Incandescent	T	E-Star
7.32" x 3.27"	900	69	50,000	Wet	75W Incandescent	T	E-Star
7.32" x 3.27"	900	69	50,000	Wet	75W Incandescent	T	E-Star
7.3" x 3.35"	810	81	≥20,000	Wet	65W Incandescent	S, T	–
7.3" x 3.35"	820	60	≥20,000	Wet	75W Incandescent	S, T	–

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/ CCT	
<b>MICRODISK™</b>	40051	LED/MD4/650DIM/927/RP	8.5	120	Phase-cut	927	
	40052	LED/MD4/650DIM/930/RP	8.5	120	Phase-cut	930	
	40053	LED/MD4/650DIM/940/RP	8.5	120	Phase-cut	940	
	40054	LED/MD4/650DIM/950/RP	8.5	120	Phase-cut	950	
	40055	LED/MD6/900DIM/927/RP	12	120	Phase-cut	927	
	40056	LED/MD6/900DIM/930/RP	12	120	Phase-cut	930	
	40057	LED/MD6/900DIM/940/RP	12	120	Phase-cut	940	
	40058	LED/MD6/900DIM/950/RP	12	120	Phase-cut	950	
	75030	LED/MD4/700/830/UNV	8	120-277	0-10	830	
	71196	LED/MD4/700/840/UNV	8	120-277	0-10	840	
	75031	LED/MD4/700/850/UNV	8	120-277	0-10	850	
	75032	LED/MD6/1100/830/UNV	13	120-277	0-10	830	
	71197	LED/MD6/1100/840/UNV	13	120-277	0-10	840	
	75033	LED/MD6/1100/850/UNV	13	120-277	0-10	850	
	<b>Surface Mount</b>	74263	SURFACER1A/025120T/827/14S/WH	25	120	Phase-cut	827
		74264	SURFACER1A/025120T/840/14S/WH	25	120	Phase-cut	840
		74305	LED/FLUSHRND/11IN16DIM/827/WH	17.5	120	Phase-cut	827
74306		LED/FLUSHRND/11IN16DIM/840/WH	17.5	120	Phase-cut	840	
71405		LED/FLUSHRND/12IN15DIM/830/BN	15	120	Phase-cut	830	
71406		LED/FLUSHRND/12IN15DIM/840/BN	15	120	Phase-cut	840	
71403		LED/FLUSHRND/10IN15DIM/830/BN	15	120	Phase-cut	830	
71404		LED/FLUSHRND/10IN15DIM/840/BN	15	120	Phase-cut	840	
74303		LED/FLUSHSQ/11IN16DIM/827/WH	17.5	120	Phase-cut	827	
74304		LED/FLUSHSQ/11IN16DIM/840/WH	17.5	120	Phase-cut	840	
74307		LED/FLUSHRNDTRM/11IN20DIM/827/WH	21	120	Phase-cut	827	
74308		LED/FLUSHRNDTRM/11IN20DIM/840/WH	21	120	Phase-cut	840	
71500		LED/FLUSHDRM/11IN15DIM/830/WH	15	120	Phase-cut	830	
71505		LED/FLUSHDRM/11IN15DIM/840/WH	15	120	Phase-cut	840	
60025		TBKT500L/5120840/12PL/WH/PID	5	120	–	840	
60131		SHPLGHT/40120/48PL/WH/PID	40	120	–	840	
<b>Vintage Family</b>		60114	CAGEPENDANT/12030/BLVID/CC	6.5	120	Phase-cut	927
	60117	FCTYPENDANT/1209/BLVID/CC	8.5	120	Phase-cut	927	
	60029	CAGEPENDANTPLG12030BLVID	–	120	Phase-cut	–	

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty



Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
5.19" x 1.0"	650	74	≥50,000	Wet	65W Incandescent	T	E-Star
5.19" x 1.0"	650	74	≥50,000	Wet	65W Incandescent	T	E-Star
5.19" x 1.0"	650	74	≥50,000	Wet	65W Incandescent	T	E-Star
5.19" x 1.0"	650	74	≥50,000	Wet	65W Incandescent	T	E-Star
7.32" x 1.0"	900	75	≥50,000	Wet	100W Incandescent	T	E-Star
7.32" x 1.0"	900	75	≥50,000	Wet	100W Incandescent	T	E-Star
7.32" x 1.0"	900	75	≥50,000	Wet	100W Incandescent	T	E-Star
7.32" x 1.0"	900	75	≥50,000	Wet	100W Incandescent	T	E-Star
5.19" x 1.0"	700	87	≥50,000	Wet	65W Incandescent	T	E-Star
5.19" x 1.0"	700	87	≥50,000	Wet	65W Incandescent	T	E-Star
5.19" x 1.0"	700	87	≥50,000	Wet	65W Incandescent	T	E-Star
7.32" x 1.0"	1,100	85	≥50,000	Wet	100W Incandescent	T	E-Star
7.32" x 1.0"	1,100	85	≥50,000	Wet	100W Incandescent	T	E-Star
7.32" x 1.0"	1,100	85	≥50,000	Wet	100W Incandescent	T	E-Star
14.0" x 4.5"	1,500	60	≥50,000	Dry	100W Incandescent	–	E-Star
14.0" x 4.5"	1,600	65	≥50,000	Dry	100W Incandescent	–	E-Star
11" x 3.6"	1,000	57	≥50,000	Dry	75W Incandescent	–	E-Star
11" x 3.6"	1,200	68	≥50,000	Dry	75W Incandescent	–	E-Star
12" x 3.5"	1,000	67	≥35,000	Dry	75W Incandescent	–	E-Star
12" x 3.5"	1,000	67	≥35,000	Dry	75W Incandescent	–	E-Star
10" x 3.5"	1,000	67	≥35,000	Dry	75W Incandescent	–	E-Star
10" x 3.5"	1,000	67	≥35,000	Dry	75W Incandescent	–	E-Star
11" x 11" x 3.3"	1,000	57	≥35,000	Dry	75W Incandescent	–	E-Star
11" x 11" x 3.3"	1,200	68	≥35,000	Dry	75W Incandescent	–	E-Star
11" x 3.3"	1,000	47	≥35,000	Dry	75W Incandescent	–	E-Star
11" x 3.3"	1,200	57	≥35,000	Dry	75W Incandescent	–	E-Star
11" x 3"	1,000	67	≥50,000	Damp	75W Incandescent	–	E-Star
11" x 3"	1,000	67	≥50,000	Damp	75W Incandescent	–	E-Star
12" x 1"	500	100	≥30,000	Dry	75W Incandescent	–	E-Star
48" x 5.2" x 1.7"	4,000	100	≥50,000	Dry	100W HPS/MH	–	E-Star
4.5" x 48"	800	123	15,000	Dry	1 x Clear Vintage St19	–	E-Star
9" x 48"	800	94	15,000	Dry	1 x Clear Vintage A19	–	E-Star
4.5" x 186"	–	–	–	Dry	No Bulb	–	–

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	60028	CONEPENDANTPLG12030CGBLVID	–	120	Phase-cut	–
	60113	BELLPENDANT/12030/CGBLVID/CC	6.5	120	Phase-cut	927
	60124	MTLDRUMFLUSH/12011/SGBLVID/CC	8.5	120	Phase-cut	927
	60126	ANTDRUMFLUSH/12011/SGBLVID/CC	8.5	120	Phase-cut	927
	60125	RINGDRUMFLUSH/12011/SGBLVID/CC	8.5	120	Phase-cut	927
	60120	BARNFLUSH/1208/CGBLVID/CC	6.5	120	Phase-cut	927
	60116	BARNCAGEFLUSH/1209/SGBLVID/CC	8.5	120	Phase-cut	927
	60115	CAGEFLUSH/12086/SGBLVID/CC	8.5	120	Phase-cut	927
	60027	JELLYJARFLUSH/120/6CG/BLVID	–	120	Phase-cut	927
	60121	FCTRYSCONCE/1207/BLVOD/CC	8.5	120	Phase-cut	927
	60122	RSTFCTRYSCONCE/1207/BLVOD/CC	8.5	120	Phase-cut	927
	60123	PANFCTRYSCONCE/1207/BLVOD/CC	8.5	120	Phase-cut	927
<b>Slim Downlight</b>	60003	SLMDNLR1A/010UNVT827/06J/WH	10	120-277	Phase-cut	827
	60004	SLMDNLR1A/010UNVT830/06J/WH	10	120-277	Phase-cut	830
	60005	SLMDNLR1A/010UNVT840/06J/WH	10	120-277	Phase-cut	840
	60058	SLMDNLR1A/014UNVT827/08J/WH	14	120-277	Phase-cut	827
	60057	SLMDNLR1A/014UNVT830/08J/WH	14	120-277	Phase-cut	830
	60056	SLMDNLR1A/014UNVT840/08J/WH	14	120-277	Phase-cut	840
<b>SMART+ Flush Mount</b>	72567	LED15INEDGELITFLUSHADJWZBS+	23	120	Yes+	8ADJ
<b>ULTRA LED™ CL</b>	75080	LED/700/CL/827/RP	9	120	–	827
	75081	LED/700/CL/840/RP	9	120	–	840
	75112	LED/1200/CL/827/RP	15	120	–	827
	75113	LED/1200/CL/840/RP	15	120	–	840
	75123	LED/2500/CL/827/RP	31	120	–	827
	75124	LED/2500/CL/840/RP	31	120	–	840
<b>SMART+ Convertible Undercabinet</b>	71147	LED/HWUC/6.5/TW/9IN/LFY	6.5	120	Yes+	9ADJ
	71148	LED/HWUC/7.5/TW/12IN/LFY	7.5	120	Yes+	9ADJ
	71149	LED/HWUC/9/TW/18IN/LFY	9	120	Yes+	9ADJ
	71150	LED/HWUC/10.5/TW/24IN/LFY	10.5	120	Yes+	9ADJ
<b>SMART+ Edge-Lit Undercabinet</b>	72569	LED/8/EDGEELITUC/ADJW/ZB/S+	8	120	Yes+	8ADJ
<b>SMART+ Flex XL</b>	73773	LED/48/FLEXL/RGBW/ZB/S+	48	120	Yes+	–

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender

+Dimming via compatible app or Leviton Keypad. (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
7.2" x 188"	–	–	–	Dry	No Bulb	–	–
5.5" x 50"	800	123	15,000	Dry	1 x Clear Vintage St19	–	E-Star
11" x 3.8"	1,600	123	15,000	Dry	2 x Clear Vintage A19	–	E-Star
11" x 3.7"	1,600	123	15,000	Dry	2 x Clear Vintage A19	–	E-Star
11" x 5.7"	1,600	123	15,000	Dry	2 x Clear Vintage A19	–	E-Star
8" x 8"	800	123	15,000	Dry	1 x Clear Vintage St19	–	E-Star
9" x 8.5"	800	94	15,000	Dry	1 x Clear Vintage A19	–	E-Star
5.9" x 8"	800	94	15,000	Dry	1 x Clear Vintage A19	–	E-Star
5.9" x 8"	–	–	–	Dry	No Bulb	–	–
11" x 12.8" x 11.4"	800	94	15,000	Wet	1 x Clear Vintage A19	–	E-Star
11" x 11.5" x 13.5"	800	94	15,000	Wet	1 x Clear Vintage A19	–	E-Star
11" x 16.2" x 11.5"	800	94	15,000	Wet	1 x Clear Vintage A19	–	E-Star
6" x 1.57"	700	70	≥50,000	Damp	2x13W CFL	–	E-Star
6" x 1.57"	750	75	≥50,000	Damp	2x13W CFL	–	–
6" x 1.57"	800	80	≥50,000	Damp	2x13W CFL	–	–
8" x 1.57"	980	70	≥50,000	Damp	1x32W CFL	–	E-Star
8" x 1.57"	1,050	75	≥50,000	Damp	1x32W CFL	–	E-Star
8" x 1.57"	1,120	80	≥50,000	Damp	1x32W CFL	–	E-Star
15" x 1.5"	1,500	65	≥20,000	Damp	75W Incandescent	S	–
7" x 1.29"	700	77	–	–	–	–	E-Star
7" x 1.29"	700	77	–	–	–	–	E-Star
7" x 3.33"	1,200	80	–	–	–	–	E-Star
7" x 3.33"	1,200	80	–	–	–	–	E-Star
11" x 3.93"	2,500	80	–	–	–	–	E-Star
11" x 3.93"	2,500	80	–	–	–	–	E-Star
9" x 3" x 1"	300	46	≥20,000	Damp	–	S, PC	–
12" x 3" x 1"	400	53	≥20,000	Damp	–	S, PC	–
18" x 3" x 1"	500	55	≥20,000	Damp	–	S, PC	–
24" x 3" x 1"	600	57	≥20,000	Damp	–	S, PC	–
18" x 2.5" x .25"	297	37	≥20,000	Dry	–	S	–
16'	–	–	≥20,000	Dry	–	S, EX, C	–

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
<b>Exit Signs and Emergency Lights</b>	60763	EMLIGHT1A/3DVTHS/S/WH	2.4	120-277	N/A	860
	60764	EMLIGHT1B/3DVTNR/S/WH	2.4	120-277	N/A	860
	60761	EXIT1A/RDVU/WH/EM	0.9	120-277	N/A	N/A
	60762	EXIT1A/GDVU/WH/EM	0.9	120-277	N/A	N/A
	60759	EXITCOMBO1A/RDVTHS/U/WH/EM	2.4	120-277	N/A	860
	60760	EXITCOMBO1A/GDVTHS/U/WH/EM	2.4	120-277	N/A	860
	60757	EXIT1B/GDCV/U/WH/EM	5	120/347	N/A	N/A
	60758	EXITCOMBO1B/GDCVTHR/U/WH/EM	5.5	120/347	N/A	760
<b>Hook Light</b>	60025	TBKT500L/5120840/12PL/WH/PID	5	120	-	840
<b>Leviton® Keypads</b>	70000	1KEYPAD.5WZBLVTLMN	0.5	120-277	N/A	N/A
	70550	2KEYPAD.5WZBLVTLMN	0.5	120-277	N/A	N/A
	75548	4KEYPAD.5WZBLVTLMN	0.5	120-277	N/A	N/A
	75547	8KEYPAD.5WZBLVTLMN	0.5	120-277	N/A	N/A
<b>High Bay</b>	74234	HIBAY1A/16H5	-	-	-	-
	74395	HIBAY1A/20ALH5	-	-	-	-
	74230	HIBAY1A/100UNVD840/GR	100	120-277	0-10	840
	74231	HIBAY1A/100UNVD850/GR	100	120-277	0-10	850
	74232	HIBAY1A/200UNVD840/GR	200	120-277	0-10	840
	74233	HIBAY1A/200UNVD850/GR	200	120-277	0-10	850
	71731	HIBAY1A/300UNVD840/GR	300	120-277	0-10	840
	71732	HIBAY1A/300UNVD850/GR	300	120-277	0-10	850
	74509	HIBAY1A/100HUV840/GR	100	347-480	0-10	840
	74510	HIBAY1A/100HUV850/GR	100	347-480	0-10	850
	74511	HIBAY1A/200HUV840/GR	200	347-480	0-10	840
	74512	HIBAY1A/200HUV850/GR	200	347-480	0-10	850
	74515	HIBAY1A/200UNVD840/GR/E	200	120-277	0-10	840
	74516	HIBAY1A/200UNVD850/GR/E	200	120-277	0-10	850
	60147	HIBAY1A/300HUV840/GR	300	347-480	0-10	840
	60148	HIBAY1A/300HUV850/GR	300	347-480	0-10	850
	60101	HIBAY1A/100UNVD835/GR (MTO)	100	120-277	0-10	835
	60102	HIBAY1A/200UNVD835/GR (MTO)	200	120-277	0-10	835

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender

(MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
13.6" x 3.5" x 4.3"	214	89	≥50,000	Damp	N/A	E	–
13.6" x 3.5" x 4.3"	220	92	≥50,000	Damp	N/A	E	–
11.6" x 1.8" x 7.5"	N/A	N/A	≥50,000	Damp	N/A	E	–
11.6" x 1.8" x 7.5"	N/A	N/A	≥50,000	Damp	N/A	E	–
13.6" x 1.9" x 9"	214	89	≥50,000	Damp	N/A	E	–
13.6" x 1.9" x 9"	220	92	≥50,000	Damp	N/A	E	–
13.6" x 1.9" x 9"	N/A	N/A	≥50,000	Damp	N/A	E	–
13.6" x 1.9" x 9"	107	19	≥50,000	Damp	N/A	E	–
14" x 1"	500	100	≥30,000	Dry	–	–	–
1.59" x 2.75" x 4.61"	N/A	N/A	N/A	Dry	N/A	S, SW	Standard
1.59" x 2.75" x 4.61"	N/A	N/A	N/A	Dry	N/A	S, SW	Standard
1.59" x 2.75" x 4.61"	N/A	N/A	N/A	Dry	N/A	S, SW	Standard
1.59" x 2.75" x 4.61"	N/A	N/A	N/A	Dry	N/A	S, SW	Standard
16.2" x 10.4"	–	–	–	–	–	–	–
20.0" x 5.6"	–	–	–	–	–	–	–
7.0" x 13.4"	10,800	108	≥63,000	Damp	250W HPS/MH	–	Standard
7.0" x 13.4"	10,800	108	≥63,000	Damp	250W HPS/MH	–	Standard
8.8" x 15.2"	22,200	114	≥150,000	Damp	400W HPS/MH	–	Standard
8.8" x 15.2"	22,500	115	≥150,000	Damp	400W HPS/MH	–	Standard
8.9" x 17.4"	33,300	109	≥73,000	Damp	1000W HPS/MH	–	Standard
8.9" x 17.4"	33,700	110	≥73,000	Damp	1000W HPS/MH	–	Standard
7.0" x 13.4"	10,800	108	≥150,000	Damp	250W HPS/MH	–	Standard
7.0" x 13.4"	10,800	108	≥150,000	Damp	250W HPS/MH	–	Standard
8.8" x 15.2"	23,300	123	≥150,000	Damp	400W HPS/MH	–	Standard
8.8" x 15.2"	23,100	122	≥150,000	Damp	400W HPS/MH	–	Standard
16.2" x 23.6"	20,900	107	≥150,000	Damp	400W HPS/MH	E	Standard
16.2" x 23.6"	22,300	108	≥150,000	Damp	400W HPS/MH	E	Standard
8.9" x 17.4"	33,300	109	≥73,000	Damp	1000W HPS/MH	–	Standard
8.9" x 17.4"	33,700	110	≥73,000	Damp	1000W HPS/MH	–	Standard
7.0" x 13.4"	10,800	108	≥63,000	Damp	250W HPS/MH	–	Standard
8.8" x 15.2"	22,200	114	≥150,000	Damp	400W HPS/MH	–	Standard

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/ CCT	
<b>Linear High Bay</b>	74839	LNHIBA1A/100UNVD840/A/WH (MTO)	100	120-277	0-10	840	
	74840	LNHIBA1A/100UNVD850/A/WH	100	120-277	0-10	850	
	74837	LNHIBA1A/100UNVD840/W/WH	100	120-277	0-10	840	
	74838	LNHIBA1A/100UNVD850/W/WH	100	120-277	0-10	850	
	74845	LNHIBA1A/150UNVD840/W/WH	150	120-277	0-10	840	
	74831	LNHIBA1A/165UNVD840/A/WH	165	120-277	0-10	840	
	74832	LNHIBA1A/165UNVD850/A/WH	165	120-277	0-10	850	
	74829	LNHIBA1A/165UNVD840/W/WH	165	120-277	0-10	840	
	74830	LNHIBA1A/165UNVD850/W/WH (MTO)	165	120-277	0-10	850	
	74823	LNHIBA1A/225UNVD840/A/WH	225	120-277	0-10	840	
	74824	LNHIBA1A/225UNVD850/A/WH	225	120-277	0-10	850	
	74821	LNHIBA1A/225UNVD840/W/WH (MTO)	225	120-277	0-10	840	
	74822	LNHIBA1A/225UNVD850/W/WH (MTO)	225	120-277	0-10	850	
	74847	LNHIBA1A/150UNVD840/A/WH (MTO)	150	120-277	0-10	840	
	74843	LNHIBA1A/100UNVD840/A/WH/D (MTO)	100	120-277	0-10	840	
	74844	LNHIBA1A/100UNVD850/A/WH/D (MTO)	100	120-277	0-10	850	
	74841	LNHIBA1A/100UNVD840/W/WH/D	100	120-277	0-10	840	
	74842	LNHIBA1A/100UNVD850/W/WH/D (MTO)	100	120-277	0-10	850	
	74853	LNHIBA1A/150UNVD840/A/WH/D (MTO)	150	120-277	0-10	840	
	74849	LNHIBA1A/150UNVD840/W/WH/D (MTO)	150	120-277	0-10	840	
	74835	LNHIBA1A/165UNVD840/A/WH/D (MTO)	165	120-277	0-10	840	
	74836	LNHIBA1A/165UNVD850/A/WH/D (MTO)	165	120-277	0-10	850	
	74833	LNHIBA1A/165UNVD840/W/WH/D (MTO)	165	120-277	0-10	840	
	74834	LNHIBA1A/165UNVD850/W/WH/D (MTO)	165	120-277	0-10	850	
	74827	LNHIBA1A/225UNVD840/A/WH/D (MTO)	225	120-277	0-10	840	
	74828	LNHIBA1A/225UNVD850/A/WH/D (MTO)	225	120-277	0-10	850	
	74825	LNHIBA1A/225UNVD840/W/WH/D (MTO)	225	120-277	0-10	840	
	74826	LNHIBA1A/225UNVD850/W/WH/D (MTO)	225	120-277	0-10	850	
	<b>UltraLED™ Linear High Bay</b>	60460	LNHIBA2A/100UNVD840/12W/WH	100	120-277	0-10	840
		60461	LNHIBA2A/100UNVD840/12A/WH (MTO)	100	120-277	0-10	840
60462		LNHIBA2A/100UNVD850/12W/WH	100	120-277	0-10	850	
60463		LNHIBA2A/100UNVD850/12A/WH (MTO)	100	120-277	0-10	850	
60464		LNHIBA2A/100UNVD840/14W/WH	100	120-277	0-10	840	

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender

(MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
46.0" x 7.9" x 2.9"	13,000	127	≥80,000	Damp	250W HPS/MH	–	Premium
46.0" x 7.9" x 2.9"	13,000	127	≥80,000	Damp	250W HPS/MH	–	Premium
46.0" x 7.9" x 2.9"	12,900	127	≥80,000	Damp	250W HPS/MH	–	Premium
46.0" x 7.9" x 2.9"	12,900	127	≥80,000	Damp	250W HPS/MH	–	Premium
46.0" x 7.9" x 2.9"	19,700	133	≥100,000	Damp	320W MH	–	Premium
46.0" x 7.9" x 2.9"	18,900	117	≥80,000	Damp	320W MH	–	Standard
46.0" x 7.9" x 2.9"	18,900	117	≥80,000	Damp	320W MH	–	Standard
46.0" x 7.9" x 2.9"	18,100	112	≥80,000	Damp	320W MH	–	Standard
46.0" x 7.9" x 2.9"	18,100	112	≥80,000	Damp	320W MH	–	Standard
46.0" x 11.8" x 2.9"	25,300	112	≥80,000	Damp	400W HPS/MH	–	Standard
46.0" x 11.8" x 2.9"	25,300	112	≥80,000	Damp	400W HPS/MH	–	Standard
46.0" x 11.8" x 2.9"	26,600	117	≥80,000	Damp	400W HPS/MH	–	Standard
46.0" x 11.8" x 2.9"	26,600	117	≥80,000	Damp	400W HPS/MH	–	Standard
46.0" x 7.9" x 2.9"	19,100	130	≥100,000	Damp	320W MH	–	Premium
46.0" x 7.9" x 2.9"	13,000	127	≥80,000	Damp	250W HPS/MH	D	Premium
46.0" x 7.9" x 2.9"	13,000	127	≥80,000	Damp	250W HPS/MH	D	Premium
46.0" x 7.9" x 2.9"	12,900	127	≥80,000	Damp	250W HPS/MH	D	Premium
46.0" x 7.9" x 2.9"	19,100	130	≥100,000	Damp	320W MH	D	Premium
46.0" x 7.9" x 2.9"	19,700	133	≥100,000	Damp	320W MH	D	Premium
46.0" x 7.9" x 2.9"	18,900	117	≥80,000	Damp	320W MH	D	Standard
46.0" x 7.9" x 2.9"	18,900	117	≥80,000	Damp	320W MH	D	Standard
46.0" x 7.9" x 2.9"	18,100	112	≥80,000	Damp	320W MH	D	Standard
46.0" x 7.9" x 2.9"	18,100	112	≥80,000	Damp	320W MH	D	Standard
46.0" x 11.8" x 2.9"	25,300	112	≥80,000	Damp	400W HPS/MH	D	Standard
46.0" x 11.8" x 2.9"	25,300	112	≥80,000	Damp	400W HPS/MH	D	Standard
46.0" x 11.8" x 2.9"	26,600	117	≥80,000	Damp	400W HPS/MH	D	Standard
46.0" x 11.8" x 2.9"	26,600	117	≥80,000	Damp	400W HPS/MH	D	Standard
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/ CCT
	60465	LNHIBA2A/100UNVD840/14A/WH (MTO)	100	120-277	0-10	840
	60466	LNHIBA2A/100UNVD850/14W/WH	100	120-277	0-10	850
	60467	LNHIBA2A/100UNVD850/14A/WH (MTO)	100	120-277	0-10	850
	60468	LNHIBA2A/120UNVD840/12W/WH	120	120-277	0-10	840
	60469	LNHIBA2A/120UNVD840/12A/WH (MTO)	120	120-277	0-10	840
	60470	LNHIBA2A/120UNVD850/12W/WH	120	120-277	0-10	850
	60471	LNHIBA2A/120UNVD850/12A/WH (MTO)	120	120-277	0-10	850
	60472	LNHIBA2A/150UNVD840/22W/WH	150	120-277	0-10	840
	60473	LNHIBA2A/150UNVD840/22A/WH (MTO)	150	120-277	0-10	840
	60474	LNHIBA2A/150UNVD850/22W/WH	150	120-277	0-10	850
	60475	LNHIBA2A/150UNVD850/22A/WH (MTO)	150	120-277	0-10	850
	60476	LNHIBA2A/150UNVD840/14W/WH	150	120-277	0-10	840
	60477	LNHIBA2A/150UNVD840/14A/WH (MTO)	150	120-277	0-10	840
	60478	LNHIBA2A/150UNVD850/14W/WH	150	120-277	0-10	850
	60479	LNHIBA2A/150UNVD850/14A/WH (MTO)	150	120-277	0-10	850
	60480	LNHIBA2A/200UNVD840/14W/WH	200	120-277	0-10	840
	60481	LNHIBA2A/200UNVD840/14A/WH (MTO)	200	120-277	0-10	840
	60482	LNHIBA2A/200UNVD850/14W/WH	200	120-277	0-10	850
	60483	LNHIBA2A/200UNVD850/14A/WH (MTO)	200	120-277	0-10	850
	60484	LNHIBA2A/250UNVD840/24W/WH	250	120-277	0-10	840
	60485	LNHIBA2A/250UNVD840/24A/WH (MTO)	250	120-277	0-10	840
	60486	LNHIBA2A/250UNVD850/24W/WH	250	120-277	0-10	850
	60487	LNHIBA2A/250UNVD850/24A/WH (MTO)	250	120-277	0-10	850
	60488	LNHIBA2A/300UNVD840/24W/WH	300	120-277	0-10	840
	60489	LNHIBA2A/300UNVD840/24A/WH (MTO)	300	120-277	0-10	840
	60490	LNHIBA2A/300UNVD850/24W/WH	300	120-277	0-10	850
	60491	LNHIBA2A/300UNVD850/24A/WH (MTO)	300	120-277	0-10	850
	60492	LNHIBA2A/100UNVD840/12W/WH/D (MTO)	100	120-277	0-10	840
	60493	LNHIBA2A/100UNVD840/12A/WH/D (MTO)	100	120-277	0-10	840
	60494	LNHIBA2A/100UNVD850/12W/WH/D (MTO)	100	120-277	0-10	850
	60495	LNHIBA2A/100UNVD850/12A/WH/D (MTO)	100	120-277	0-10	850
	60496	LNHIBA2A/100UNVD840/14W/WH/D (MTO)	100	120-277	0-10	840
	60497	LNHIBA2A/100UNVD840/14A/WH/D (MTO)	100	120-277	0-10	840

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender

(MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty



Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	–	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	–	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	–	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	–	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	–	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	–	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	–	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	–	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	–	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	–	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	–	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	D	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	D	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	D	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	D	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	D	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	D	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/ CCT
	60498	LNHIBA2A/100UNVD850/14W/WH/D (MTO)	100	120-277	0-10	850
	60499	LNHIBA2A/100UNVD850/14A/WH/D (MTO)	100	120-277	0-10	850
	60500	LNHIBA2A/120UNVD840/12W/WH/D (MTO)	120	120-277	0-10	840
	60501	LNHIBA2A/120UNVD840/12A/WH/D (MTO)	120	120-277	0-10	840
	60502	LNHIBA2A/120UNVD850/12W/WH/D (MTO)	120	120-277	0-10	850
	60503	LNHIBA2A/120UNVD850/12A/WH/D (MTO)	120	120-277	0-10	850
	60504	LNHIBA2A/150UNVD840/22W/WH/D (MTO)	150	120-277	0-10	840
	60505	LNHIBA2A/150UNVD840/22A/WH/D (MTO)	150	120-277	0-10	840
	60506	LNHIBA2A/150UNVD850/22W/WH/D (MTO)	150	120-277	0-10	850
	60507	LNHIBA2A/150UNVD850/22A/WH/D (MTO)	150	120-277	0-10	850
	60508	LNHIBA2A/150UNVD840/14W/WH/D (MTO)	150	120-277	0-10	840
	60509	LNHIBA2A/150UNVD840/14A/WH/D (MTO)	150	120-277	0-10	840
	60510	LNHIBA2A/150UNVD850/14W/WH/D (MTO)	150	120-277	0-10	850
	60511	LNHIBA2A/150UNVD850/14A/WH/D (MTO)	150	120-277	0-10	850
	60512	LNHIBA2A/200UNVD840/14W/WH/D (MTO)	200	120-277	0-10	840
	60513	LNHIBA2A/200UNVD840/14A/WH/D (MTO)	200	120-277	0-10	840
	60514	LNHIBA2A/200UNVD850/14W/WH/D (MTO)	200	120-277	0-10	850
	60515	LNHIBA2A/200UNVD850/14A/WH/D (MTO)	200	120-277	0-10	850
	60516	LNHIBA2A/250UNVD840/24W/WH/D (MTO)	250	120-277	0-10	840
	60517	LNHIBA2A/250UNVD840/24A/WH/D (MTO)	250	120-277	0-10	840
	60518	LNHIBA2A/250UNVD850/24W/WH/D (MTO)	250	120-277	0-10	850
	60519	LNHIBA2A/250UNVD850/24A/WH/D (MTO)	250	120-277	0-10	850
	60520	LNHIBA2A/300UNVD840/24W/WH/D (MTO)	300	120-277	0-10	840
	60521	LNHIBA2A/300UNVD840/24A/WH/D (MTO)	300	120-277	0-10	840
	60522	LNHIBA2A/300UNVD850/24W/WH/D (MTO)	300	120-277	0-10	850
	60523	LNHIBA2A/300UNVD850/24A/WH/D (MTO)	300	120-277	0-10	850
	60524	LNHIBA2A/100UNVD840/12W/WH/E (MTO)	100	120-277	0-10	840
	60525	LNHIBA2A/100UNVD840/12A/WH/E (MTO)	100	120-277	0-10	840
	60526	LNHIBA2A/100UNVD850/12W/WH/E (MTO)	100	120-277	0-10	850
	60527	LNHIBA2A/100UNVD850/12A/WH/E (MTO)	100	120-277	0-10	850
	60528	LNHIBA2A/100UNVD840/14W/WH/E (MTO)	100	120-277	0-10	840
	60529	LNHIBA2A/100UNVD840/14A/WH/E (MTO)	100	120-277	0-10	840
	60530	LNHIBA2A/100UNVD850/14W/WH/E (MTO)	100	120-277	0-10	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender  
(MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	D	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	D	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	D	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	D	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	D	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	D	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	D	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	D	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	D	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	D	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	D	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	D	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	D	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	D	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	D	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	D	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	D	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	D	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	D	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	D	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	D	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	D	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	D	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	D	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	D	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	E	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	E	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	E	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	E	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	E	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	E	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	E	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/ CCT
	60531	LNHIBA2A/100UNVD850/14A/WH/E (MTO)	100	120-277	0-10	850
	60532	LNHIBA2A/120UNVD840/12W/WH/E (MTO)	120	120-277	0-10	840
	60533	LNHIBA2A/120UNVD840/12A/WH/E (MTO)	120	120-277	0-10	840
	60534	LNHIBA2A/120UNVD850/12W/WH/E (MTO)	120	120-277	0-10	850
	60535	LNHIBA2A/120UNVD850/12A/WH/E (MTO)	120	120-277	0-10	850
	60536	LNHIBA2A/150UNVD840/22W/WH/E (MTO)	150	120-277	0-10	840
	60537	LNHIBA2A/150UNVD840/22A/WH/E (MTO)	150	120-277	0-10	840
	60538	LNHIBA2A/150UNVD850/22W/WH/E (MTO)	150	120-277	0-10	850
	60539	LNHIBA2A/150UNVD850/22A/WH/E (MTO)	150	120-277	0-10	850
	60540	LNHIBA2A/150UNVD840/14W/WH/E (MTO)	150	120-277	0-10	840
	60541	LNHIBA2A/150UNVD840/14A/WH/E (MTO)	150	120-277	0-10	840
	60542	LNHIBA2A/150UNVD850/14W/WH/E (MTO)	150	120-277	0-10	850
	60543	LNHIBA2A/150UNVD850/14A/WH/E (MTO)	150	120-277	0-10	850
	60544	LNHIBA2A/200UNVD840/14W/WH/E(MTO)	200	120-277	0-10	840
	60545	LNHIBA2A/200UNVD840/14A/WH/E (MTO)	200	120-277	0-10	840
	60546	LNHIBA2A/200UNVD850/14W/WH/E (MTO)	200	120-277	0-10	850
	60547	LNHIBA2A/200UNVD850/14A/WH/E (MTO)	200	120-277	0-10	850
	60548	LNHIBA2A/250UNVD840/24W/WH/E (MTO)	250	120-277	0-10	840
	60549	LNHIBA2A/250UNVD840/24A/WH/E (MTO)	250	120-277	0-10	840
	60550	LNHIBA2A/250UNVD850/24W/WH/E (MTO)	250	120-277	0-10	850
	60551	LNHIBA2A/250UNVD850/24A/WH/E (MTO)	250	120-277	0-10	850
	60552	LNHIBA2A/300UNVD840/24W/WH/E (MTO)	300	120-277	0-10	840
	60553	LNHIBA2A/300UNVD840/24A/WH/E (MTO)	300	120-277	0-10	840
	60554	LNHIBA2A/300UNVD850/24W/WH/E (MTO)	300	120-277	0-10	850
	60555	LNHIBA2A/300UNVD850/24A/WH/E (MTO)	300	120-277	0-10	850
	60581	LNHIBA2A/100HUV840/12W/WH (MTO)	100	347-480	0-10	840
	60582	LNHIBA2A/100HUV840/12A/WH (MTO)	100	347-480	0-10	840
	60583	LNHIBA2A/100HUV850/12W/WH (MTO)	100	347-480	0-10	850
	60584	LNHIBA2A/100HUV850/12A/WH (MTO)	100	347-480	0-10	850
	60585	LNHIBA2A/100HUV840/14W/WH (MTO)	100	347-480	0-10	840
	60586	LNHIBA2A/100HUV840/14A/WH (MTO)	100	347-480	0-10	840
	60587	LNHIBA2A/100HUV850/14W/WH (MTO)	100	347-480	0-10	850
	60588	LNHIBA2A/100HUV850/14A/WH (MTO)	100	347-480	0-10	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender  
(MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	E	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	E	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	E	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	E	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	E	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	E	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	E	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	E	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	E	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	E	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	E	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	E	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	E	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	E	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	E	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	E	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	E	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	E	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	E	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	E	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	E	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	E	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	E	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	E	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium
45.9" x 12.7" x 2.4"	12,900	130	≥140,000	Dry	250W HPS	–	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	60589	LNHIBA2A/120HUV840/12W/WH (MTO)	120	347-480	0-10	840
	60590	LNHIBA2A/120HUV840/12A/WH (MTO)	120	347-480	0-10	840
	60591	LNHIBA2A/120HUV850/12W/WH (MTO)	120	347-480	0-10	850
	60592	LNHIBA2A/120HUV850/12A/WH (MTO)	120	347-480	0-10	850
	60593	LNHIBA2A/150HUV840/22W/WH (MTO)	150	347-480	0-10	840
	60594	LNHIBA2A/150HUV840/22A/WH (MTO)	150	347-480	0-10	840
	60595	LNHIBA2A/150HUV850/22W/WH (MTO)	150	347-480	0-10	850
	60596	LNHIBA2A/150HUV850/22A/WH (MTO)	150	347-480	0-10	850
	60597	LNHIBA2A/150HUV840/14W/WH (MTO)	150	347-480	0-10	840
	60598	LNHIBA2A/150HUV840/14A/WH (MTO)	150	347-480	0-10	840
	60599	LNHIBA2A/150HUV850/14W/WH (MTO)	150	347-480	0-10	850
	60600	LNHIBA2A/150HUV850/14A/WH (MTO)	150	347-480	0-10	850
	60601	LNHIBA2A/200HUV840/14W/WH (MTO)	200	347-480	0-10	840
	60602	LNHIBA2A/200HUV840/14A/WH (MTO)	200	347-480	0-10	840
	60603	LNHIBA2A/200HUV850/14W/WH (MTO)	200	347-480	0-10	850
	60604	LNHIBA2A/200HUV850/14A/WH (MTO)	200	347-480	0-10	850
	60605	LNHIBA2A/250HUV840/24W/WH (MTO)	250	347-480	0-10	840
	60606	LNHIBA2A/250HUV840/24A/WH (MTO)	250	347-480	0-10	840
	60607	LNHIBA2A/250HUV850/24W/WH (MTO)	250	347-480	0-10	850
	60608	LNHIBA2A/250HUV850/24A/WH (MTO)	250	347-480	0-10	850
	60609	LNHIBA2A/300HUV840/24W/WH (MTO)	300	347-480	0-10	840
	60610	LNHIBA2A/300HUV840/24A/WH (MTO)	300	347-480	0-10	840
	60611	LNHIBA2A/300HUV850/24W/WH (MTO)	300	347-480	0-10	850
	60612	LNHIBA2A/300HUV850/24A/WH (MTO)	300	347-480	0-10	850
<b>Strip</b>	70525	STRIP1A/016UNVD835/24S/WH	16	120-277	0-10	835
	70526	STRIP1A/016UNVD840/24S/WH	16	120-277	0-10	840
	70527	STRIP1A/016UNVD850/24S/WH	16	120-277	0-10	850
	74774	STRIP1A/032UNVD835/48S/WH	32	120-277	0-10	835
	74775	STRIP1A/032UNVD840/48S/WH	32	120-277	0-10	840
	74776	STRIP1A/032UNVD850/48S/WH	32	120-277	0-10	850
	70522	STRIP1A/047UNVD835/48S/WH	47	120-277	0-10	835
	70523	STRIP1A/047UNVD840/48S/WH	47	120-277	0-10	840
	70524	STRIP1A/047UNVD850/48S/WH	47	120-277	0-10	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 12.7" x 2.4"	15,400	130	≥140,000	Dry	250W HPS	–	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
23.7" x 23.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
45.9" x 12.7" x 2.4"	19,200	130	≥140,000	Dry	320W MH	–	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	–	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	–	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	–	Premium
45.9" x 12.7" x 2.4"	25,800	130	≥140,000	Dry	400W MH	–	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	–	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	–	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	–	Premium
45.9" x 23.7" x 2.4"	32,200	130	≥140,000	Dry	750W HPS	–	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	–	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	–	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	–	Premium
45.9" x 23.7" x 2.4"	38,700	130	≥140,000	Dry	1000W HPS	–	Premium
24.1" x 2.48" x 3.13"	2,000	124	≥50,000	Damp	1x32W LFL	–	Standard
24.1" x 2.48" x 3.13"	1,900	119	≥50,000	Damp	1x32W LFL	–	Standard
24.1" x 2.48" x 3.13"	2,000	122	≥50,000	Damp	1x32W LFL	–	Standard
47.30" x 2.48" x 3.13"	3,900	121	≥50,000	Damp	2x32W LFL	–	Standard
47.30" x 2.48" x 3.13"	4,000	127	≥50,000	Damp	2x32W LFL	–	Standard
47.30" x 2.48" x 3.13"	4,000	124	≥50,000	Damp	2x32W LFL	–	Standard
47.30" x 2.48" x 3.13"	5,900	123	≥50,000	Damp	3x32W LFL	–	Standard
47.30" x 2.48" x 3.13"	6,200	126	≥50,000	Damp	3x32W LFL	–	Standard
47.30" x 2.48" x 3.13"	6,000	124	≥50,000	Damp	3x32W LFL	–	Standard

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
<b>Wrap</b>	74781	WRAP1A/018UNVD835/24S/WH	18	120-277	0-10	835
	74782	WRAP1A/018UNVD840/24S/WH	18	120-277	0-10	840
	74783	WRAP1A/018UNVD850/24S/WH	18	120-277	0-10	850
	74778	WRAP1A/026UNVD835/48S/WH	26	120-277	0-10	835
	74779	WRAP1A/026UNVD840/48S/WH	26	120-277	0-10	840
	74780	WRAP1A/026UNVD850/48S/WH	26	120-277	0-10	850
<b>Vapor Tight</b>	74530	VAPOR1A/025UNVD840/24EC/GR	25	120-277	0-10	840
	74531	VAPOR1A/025UNVD850/24EC/GR	25	120-277	0-10	850
	74532	VAPOR1B/025UNVD840/24EC/GR/D	25	120-277	0-10	840
	74533	VAPOR1B/025UNVD850/24EC/GR/D	25	120-277	0-10	850
	60074	VAPOR1B/025UNVD840/24EC/GR/E	25	120-277	0-10	840
	60075	VAPOR1B/025UNVD850/24EC/GR/E	25	120-277	0-10	850
	74534	VAPOR1B/020UNVD840/48EC/GR	20	120-277	0-10	840
	74535	VAPOR1B/020UNVD850/48EC/GR	20	120-277	0-10	850
	74536	VAPOR1B/020UNVD840/48EC/GR/D	20	120-277	0-10	840
	74537	VAPOR1B/020UNVD850/48EC/GR/D	20	120-277	0-10	850
	60043	VAPOR1B/020UNVD840/48EC/GR/E	20	120-277	0-10	840
	60044	VAPOR1B/020UNVD850/48EC/GR/E	20	120-277	0-10	850
	60045	VAPOR1B/020UNVD840/48EC/GR/DE	20	120-277	0-10	840
	60046	VAPOR1B/020UNVD850/48EC/GR/DE	20	120-277	0-10	850
	74376	VAPOR1B/040UNVD840/48EC/GR	40	120-277	0-10	840
	74377	VAPOR1B/040UNVD850/48EC/GR	40	120-277	0-10	850
	74378	VAPOR1B/040UNVD840/48EC/GR/D	40	120-277	0-10	840
	74379	VAPOR1B/040UNVD850/48EC/GR/D	40	120-277	0-10	850
	74554	VAPOR1B/040UNVD840/48EC/GR/E	40	120-277	0-10	840
	74555	VAPOR1B/040UNVD850/48EC/GR/E	40	120-277	0-10	850
	74556	VAPOR1B/040UNVD840/48EC/GR/DE	40	120-277	0-10	840
	74557	VAPOR1B/040UNVD850/48EC/GR/DE	40	120-277	0-10	850
	60047	VAPOR2B/040UNVD840/48EC/GR	40	120-277	0-10	840
	60048	VAPOR2B/040UNVD850/48EC/GR	40	120-277	0-10	850
	60049	VAPOR2B/040UNVD840/48EC/GR/D	40	120-277	0-10	840
	60050	VAPOR2B/040UNVD850/48EC/GR/D	40	120-277	0-10	850
	74552	VAPOR1A/050HJVD840/48EC/GR	50	347-480	0-10	840

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty



Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
24" x 6.3" x 3.1"	2,160	120	≥140,000	Damp	1x32W LFL	–	Standard
24" x 6.3" x 3.1"	2,160	120	≥140,000	Damp	1x32W LFL	–	Standard
24" x 6.3" x 3.1"	2,160	120	≥140,000	Damp	1x32W LFL	–	Standard
47.8" x 6.3" x 3.1"	3,120	120	≥140,000	Damp	2x32W LFL	–	Standard
47.8" x 6.3" x 3.1"	3,120	120	≥140,000	Damp	2x32W LFL	–	Standard
47.8" x 6.3" x 3.1"	3,120	120	≥140,000	Damp	2x32W LFL	–	Standard
24.9" x 4.0" x 3.3"	3,100	135	≥122,000	IP65	70W HPS	–	Premium
24.9" x 4.0" x 3.3"	3,100	137	≥122,000	IP65	70W HPS	–	Premium
24.9" x 4.0" x 3.3"	3,100	135	≥122,000	IP65	70W HPS	D	Premium
24.9" x 4.0" x 3.3"	3,100	137	≥122,000	IP65	70W HPS	D	Premium
24.9" x 4.0" x 3.3"	3,100	135	≥122,000	IP65	70W HPS	E	Premium
24.9" x 4.0" x 3.3"	3,100	137	≥122,000	IP65	70W HPS	E	Premium
48.5" x 3.4" x 3.3"	2,600	127	≥122,000	IP65	70W HPS	–	Premium
48.5" x 3.4" x 3.3"	2,600	128	≥122,000	IP65	70W HPS	–	Premium
48.5" x 3.4" x 3.3"	2,600	127	≥122,000	IP65	70W HPS	D	Premium
48.5" x 3.4" x 3.3"	2,600	128	≥122,000	IP65	70W HPS	D	Premium
48.5" x 3.4" x 3.3"	2,600	127	≥122,000	IP65	70W HPS	E	Premium
48.5" x 3.4" x 3.3"	2,600	128	≥122,000	IP65	70W HPS	E	Premium
48.5" x 3.4" x 3.3"	2,600	127	≥122,000	IP65	70W HPS	D, E	Premium
48.5" x 3.4" x 3.3"	2,600	128	≥122,000	IP65	70W HPS	D, E	Premium
48.5" x 4.0" x 3.3"	5,300	139	≥122,000	IP65	70W MH	–	Premium
48.5" x 4.0" x 3.3"	5,300	137	≥122,000	IP65	70W MH	–	Premium
48.5" x 4.0" x 3.3"	5,400	140	≥122,000	IP65	70W MH	D	Premium
48.5" x 4.0" x 3.3"	5,400	137	≥122,000	IP65	70W MH	D	Premium
48.5" x 4.0" x 3.3"	5,300	139	≥122,000	IP65	70W MH	E	Premium
48.5" x 4.0" x 3.3"	5,300	137	≥122,000	IP65	70W MH	E	Premium
48.5" x 4.0" x 3.3"	5,400	140	≥122,000	IP65	70W MH	D, E	Premium
48.5" x 4.0" x 3.3"	5,400	137	≥122,000	IP65	70W MH	D, E	Premium
48.1" x 4.8" x 3.3"	5,000	129	≥122,000	IP66	70W MH	–	Premium
48.1" x 4.8" x 3.3"	5,100	131	≥122,000	IP66	70W MH	–	Premium
48.1" x 4.8" x 3.3"	5,000	129	≥122,000	IP66	70W MH	D	Premium
48.1" x 4.8" x 3.3"	5,100	131	≥122,000	IP66	70W MH	D	Premium
48.5" x 4.0" x 3.3"	5,700	111	≥122,000	IP65	70W MH	–	Standard

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	74553	VAPOR1A/050HUV850/48EC/GR	50	347-480	0-10	850
	60355	VAPOR1B/065UNVD840/96EC/GR	65	120-277	0-10	840
	60356	VAPOR1B/065UNVD850/96EC/GR	65	120-277	0-10	850
	60357	VAPOR1B/065UNVD840/96EC/GR/D	65	120-277	0-10	840
	60358	VAPOR1B/065UNVD850/96EC/GR/D	65	120-277	0-10	850
	60359	VAPOR1B/065UNVD840/96EC/GR/E	65	120-277	0-10	840
	60360	VAPOR1B/065UNVD850/96EC/GR/E	65	120-277	0-10	850
	60361	VAPOR1B/065UNVD840/96EC/GR/DE	65	120-277	0-10	840
	60362	VAPOR1B/065UNVD850/96EC/GR/DE	65	120-277	0-10	850
<b>10" Canopy</b>	60151	CANOPY3A/020UNV740/10S5/WH	20	120-277	-	740
	60152	CANOPY3A/020UNV750/10S5/WH	20	120-277	-	750
	60153	CANOPY3A/040UNV740/10S5/WH	40	120-277	-	740
	60154	CANOPY3A/040UNV750/10S5/WH	40	120-277	-	750
	60155	CANOPY3A/055UNV740/10S5/WH	55	120-277	-	740
	60156	CANOPY3A/055UNV750/10S5/WH	55	120-277	-	750
	60157	CANOPY3A/020UNV740/10S5/BZ	20	120-277	-	740
	60158	CANOPY3A/020UNV750/10S5/BZ	20	120-277	-	750
	60159	CANOPY3A/040UNV740/10S5/BZ	40	120-277	-	740
	60160	CANOPY3A/040UNV750/10S5/BZ	40	120-277	-	750
	60161	CANOPY3A/055UNV740/10S5/BZ	55	120-277	-	740
	60162	CANOPY3A/055UNV750/10S5/BZ	55	120-277	-	750
	60555	CANOPY3A/040347740/10S5/BZ (MTO)	40	347	-	740
	60556	CANOPY3A/040347750/10S5/BZ (MTO)	40	347	-	750
	60557	CANOPY3A/055347740/10S5/BZ (MTO)	55	347	-	740
	60558	CANOPY3A/055347750/10S5/BZ (MTO)	55	347	-	750
	60559	CANOPY3A/040347740/10S5/WH (MTO)	40	347	-	740
	60560	CANOPY3A/040347750/10S5/WH (MTO)	40	347	-	750
	60561	CANOPY3A/055347740/10S5/WH (MTO)	55	347	-	740
	60562	CANOPY3A/055347750/10S5/WH (MTO)	55	347	-	750
<b>12" Canopy</b>	60398	CANOPY2A/025UNVD840/12R5/WH	25	120-277	0-10	840
	60399	CANOPY2A/025UNVD850/12R5/WH	25	120-277	0-10	850
	60400	CANOPY2A/035UNVD840/12R5/WH	35	120-277	0-10	840
	60401	CANOPY2A/035UNVD850/12R5/WH	35	120-277	0-10	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
48.5" x 4.0" x 3.3"	5,700	111	≥122,000	IP65	70W MH	–	Standard
96" x 4.0" x 3.3"	8,750	135	≥120,000	IP65	250W MH	–	Premium
96" x 4.0" x 3.3"	8,750	135	≥120,000	IP65	250W MH	–	Premium
96" x 4.0" x 3.3"	8,750	135	≥120,000	IP65	250W MH	D	Premium
96" x 4.0" x 3.3"	8,750	135	≥120,000	IP65	250W MH	D	Premium
96" x 4.0" x 3.3"	8,750	135	≥120,000	IP65	250W MH	E	Premium
96" x 4.0" x 3.3"	8,750	135	≥120,000	IP65	250W MH	E	Premium
96" x 4.0" x 3.3"	8,750	135	≥120,000	IP65	250W MH	D, E	Premium
96" x 4.0" x 3.3"	8,750	135	≥120,000	IP65	250W MH	D, E	Premium
10.3" x 10.3" x 3.9"	2,000	110	≥150,000	Wet	70W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	2,000	110	≥150,000	Wet	70W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	4,700	125	≥150,000	Wet	150W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	4,700	125	≥150,000	Wet	150W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	6,800	127	≥150,000	Wet	250W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	6,800	127	≥150,000	Wet	250W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	2,000	110	≥150,000	Wet	70W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	2,000	110	≥150,000	Wet	70W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	4,700	125	≥150,000	Wet	150W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	4,700	125	≥150,000	Wet	150W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	6,800	127	≥150,000	Wet	250W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	6,800	127	≥150,000	Wet	250W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	4,700	125	≥150,000	Wet	150W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	4,700	125	≥150,000	Wet	150W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	6,800	127	≥150,000	Wet	250W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	6,800	127	≥150,000	Wet	250W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	4,700	125	≥150,000	Wet	150W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	4,700	125	≥150,000	Wet	150W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	6,800	127	≥150,000	Wet	250W HPS/MH	–	Premium
10.3" x 10.3" x 3.9"	6,800	127	≥150,000	Wet	250W HPS/MH	–	Premium
12.6" x 3.4"	3,375	135	≥150,000	IP66	70W HPS	–	Premium
12.6" x 3.4"	3,375	135	≥150,000	IP66	70W HPS	–	Premium
12.6" x 3.4"	4,725	135	≥150,000	IP66	150W HPS	–	Premium
12.6" x 3.4"	4,725	135	≥150,000	IP66	150W HPS	–	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	60402	CANOPY2A/045UNVD840/12R5/WH	45	120-277	0-10	840
	60403	CANOPY2A/045UNVD850/12R5/WH	45	120-277	0-10	850
	60404	CANOPY2A/065UNVD840/12R5/WH	65	120-277	0-10	840
	60405	CANOPY2A/065UNVD850/12R5/WH	65	120-277	0-10	850
	60406	CANOPY2A/025UNVD840/12R5/BZ	25	120-277	0-10	840
	60407	CANOPY2A/025UNVD850/12R5/BZ	25	120-277	0-10	850
	60408	CANOPY2A/035UNVD840/12R5/BZ	35	120-277	0-10	840
	60409	CANOPY2A/035UNVD850/12R5/BZ	35	120-277	0-10	850
	60410	CANOPY2A/045UNVD840/12R5/BZ	45	120-277	0-10	840
	60411	CANOPY2A/045UNVD850/12R5/BZ	45	120-277	0-10	850
	60412	CANOPY2A/065UNVD840/12R5/BZ	65	120-277	0-10	840
	60413	CANOPY2A/065UNVD850/12R5/BZ	65	120-277	0-10	850
	60414	CANOPY2A/025UNVD840/12S5/WH	25	120-277	0-10	840
	60415	CANOPY2A/025UNVD850/12S5/WH	25	120-277	0-10	850
	60416	CANOPY2A/035UNVD840/12S5/WH	35	120-277	0-10	840
	60417	CANOPY2A/035UNVD850/12S5/WH	35	120-277	0-10	850
	60418	CANOPY2A/045UNVD840/12S5/WH	45	120-277	0-10	840
	60419	CANOPY2A/045UNVD850/12S5/WH	45	120-277	0-10	850
	60420	CANOPY2A/065UNVD840/12S5/WH	65	120-277	0-10	840
	60421	CANOPY2A/065UNVD850/12S5/WH	65	120-277	0-10	850
	60422	CANOPY2A/025UNVD840/12S5/BZ	25	120-277	0-10	840
	60423	CANOPY2A/025UNVD850/12S5/BZ	25	120-277	0-10	850
	60424	CANOPY2A/035UNVD840/12S5/BZ	35	120-277	0-10	840
	60425	CANOPY2A/035UNVD850/12S5/BZ	35	120-277	0-10	850
	60426	CANOPY2A/045UNVD840/12S5/BZ	45	120-277	0-10	840
	60427	CANOPY2A/045UNVD850/12S5/BZ	45	120-277	0-10	850
	60428	CANOPY2A/065UNVD840/12S5/BZ	65	120-277	0-10	840
	60429	CANOPY2A/065UNVD850/12S5/BZ	65	120-277	0-10	850
<b>Garage</b>	74501	GARAG1A/035UNVD740/G5/SV	35	120-277	0-10	740
	74502	GARAG1A/035UNVD750/G5/SV	35	120-277	0-10	750
	74503	GARAG1A/055UNVD740/G5/SV	55	120-277	0-10	740
	74504	GARAG1A/055UNVD750/G5/SV	55	120-277	0-10	750
	74505	GARAG1A/035UNVD740/G5/SV/D	35	120-277	0-10	740

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
12.6" x 3.4"	6,075	135	≥150,000	IP66	175W MH	–	Premium
12.6" x 3.4"	6,075	135	≥150,000	IP66	175W MH	–	Premium
12.6" x 3.4"	8,775	135	≥150,000	IP66	250W HPS/MH	–	Premium
12.6" x 3.4"	8,755	135	≥150,000	IP66	250W HPS/MH	–	Premium
12.6" x 3.4"	3,375	135	≥150,000	IP66	70W HPS	–	Premium
12.6" x 3.4"	3,375	135	≥150,000	IP66	70W HPS	–	Premium
12.6" x 3.4"	4,725	135	≥150,000	IP66	150W HPS	–	Premium
12.6" x 3.4"	4,725	135	≥150,000	IP66	150W HPS	–	Premium
12.6" x 3.4"	6,075	135	≥150,000	IP66	175W MH	–	Premium
12.6" x 3.4"	6,075	135	≥150,000	IP66	175W MH	–	Premium
12.6" x 3.4"	8,775	125	≥150,000	IP66	250W HPS/MH	–	Premium
12.6" x 3.4"	8,755	125	≥150,000	IP66	250W HPS/MH	–	Premium
12.6" x 12.6" x 3.4"	3,375	135	≥150,000	IP66	70W HPS	–	Premium
12.6" x 12.6" x 3.4"	3,375	135	≥150,000	IP66	70W HPS	–	Premium
12.6" x 12.6" x 3.4"	4,725	135	≥150,000	IP66	150W HPS	–	Premium
12.6" x 12.6" x 3.4"	4,725	135	≥150,000	IP66	150W HPS	–	Premium
12.6" x 12.6" x 3.4"	6,075	135	≥150,000	IP66	175W MH	–	Premium
12.6" x 12.6" x 3.4"	6,075	135	≥150,000	IP66	175W MH	–	Premium
12.6" x 12.6" x 3.4"	8,775	135	≥150,000	IP66	250W HPS/MH	–	Premium
12.6" x 12.6" x 3.4"	8,755	135	≥150,000	IP66	250W HPS/MH	–	Premium
12.6" x 12.6" x 3.4"	3,375	135	≥150,000	IP66	70W HPS	–	Premium
12.6" x 12.6" x 3.4"	3,375	135	≥150,000	IP66	70W HPS	–	Premium
12.6" x 12.6" x 3.4"	4,725	135	≥150,000	IP66	150W HPS	–	Premium
12.6" x 12.6" x 3.4"	4,725	135	≥150,000	IP66	150W HPS	–	Premium
12.6" x 12.6" x 3.4"	6,075	135	≥150,000	IP66	175W MH	–	Premium
12.6" x 12.6" x 3.4"	6,075	135	≥150,000	IP66	175W MH	–	Premium
12.6" x 12.6" x 3.4"	8,775	125	≥150,000	IP66	250W HPS/MH	–	Premium
12.6" x 12.6" x 3.4"	8,755	125	≥150,000	IP66	250W HPS/MH	–	Premium
12.5" x 12.5" x 2.3"	4,200	123	≥125,000	IP66	150W MH	–	Premium
12.5" x 12.5" x 2.3"	4,200	119	≥125,000	IP66	150W MH	–	Premium
12.5" x 12.5" x 2.3"	6,200	119	≥125,000	IP66	175W MH	–	Premium
12.5" x 12.5" x 2.3"	6,200	118	≥125,000	IP66	175W MH	–	Premium
12.5" x 12.5" x 2.3"	4,200	123	≥125,000	IP66	150W MH	D	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	74506	GARAG1A/035UNVD750/G5/SV/D	35	120-277	0-10	750
	74507	GARAG1A/055UNVD740/G5/SV/D	55	120-277	0-10	740
	74508	GARAG1A/055UNVD750/G5/SV/D	55	120-277	0-10	750
<b>Dusk to Dawn</b>	60238	AREADTD1A/020UNV840/NC/GR	20	120-277	0-10	840
	60239	AREADTD1A/020UNV850/NC/GR	20	120-277	0-10	850
	60110	AREADTD1A/040UNV840/NC/GR	40	120-277	0-10	840
	60111	AREADTD1A/040UNV850/NC/GR	40	120-277	0-10	850
<b>Jelly Jar</b>	60167	JELYJAR1A/010UNV740/CM/GR	10	120-277	-	740
	60168	JELYJAR1A/010UNV750/CM/GR	10	120-277	-	750
	60169	JELYJAR1A/010UNV740/PM/GR	10	120-277	-	740
	60170	JELYJAR1A/010UNV750/PM/GR	10	120-277	-	750
	60171	JELYJAR1A/010UNV740/WM/GR	10	120-277	-	750
	60172	JELYJAR1A/010UNV750/WM/GR	10	120-277	-	750
<b>Square Light</b>	60208	SQLIGHT1A/013UNV740/WM/BZ	13	120-277	-	740
	60209	SQLIGHT1A/013UNV750/WM/BZ	13	120-277	-	750
	60210	SQLIGHT1A/026UNV740/DM/BZ	26	120-277	-	740
	60211	SQLIGHT1A/026UNV750/DM/BZ	26	120-277	-	750
	60212	SQLIGHT1A/013UNV740/CM/BZ	13	120-277	-	740
	60213	SQLIGHT1A/013UNV750/CM/BZ	13	120-277	-	750
	60214	SQLIGHT1A/013UNV740/PM/BZ	13	120-277	-	740
	60215	SQLIGHT1A/013UNV750/PM/BZ	13	120-277	-	750
<b>Bollard</b>	60653	BOLLARD1A/038347830/R8F/BZ (MTO)	38	347	-	830
	60654	BOLLARD1A/038347840/R8F/BZ (MTO)	38	347	-	840
	60655	BOLLARD1A/038347850/R8F/BZ (MTO)	38	347	-	850
	60656	BOLLARD1A/038347830/R8R/BZ (MTO)	38	347	-	830
	60657	BOLLARD1A/038347840/R8R/BZ (MTO)	38	347	-	840
	60658	BOLLARD1A/038347850/R8R/BZ (MTO)	38	347	-	850
	60173	BOLLARD1A/018UNV830/R8F/BZ	18	120-277	-	830
	60174	BOLLARD1A/018UNV840/R8F/BZ	18	120-277	-	840
	60175	BOLLARD1A/018UNV850/R8F/BZ	18	120-277	-	850
	60176	BOLLARD1A/038UNV830/R8F/BZ	38	120-277	-	830
	60177	BOLLARD1A/038UNV840/R8F/BZ	38	120-277	-	840
	60178	BOLLARD1A/038UNV850/R8F/BZ	38	120-277	-	840

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
12.5" x 12.5" x 2.3"	4,200	119	≥125,000	IP66	150W MH	D	Premium
12.5" x 12.5" x 2.3"	6,200	119	≥125,000	IP66	175W MH	D	Premium
12.5" x 12.5" x 2.3"	6,200	118	≥125,000	IP66	175W MH	D	Premium
11.8" x 7.6" x 6.9"	2,300	115	≥135,000	Wet	70W HPS/MH	–	Premium
11.8" x 7.6" x 6.9"	2,300	115	≥135,000	Wet	70W HPS/MH	–	Premium
11.8" x 7.6" x 6.9"	4,800	126	≥135,000	Wet	150W HPS/MH	–	Premium
11.8" x 7.6" x 6.9"	4,800	126	≥135,000	Wet	150W HPS/MH	–	Premium
4.6" x 5.6" x 10.8	900	90	≥150,000	Wet	75W Incandescent	–	–
4.6" x 5.6" x 10.8	900	90	≥150,000	Wet	75W Incandescent	–	–
4.6" x 4.6" x 11.4	900	90	≥150,000	Wet	75W Incandescent	–	–
4.6" x 4.6" x 11.4	900	90	≥150,000	Wet	75W Incandescent	–	–
4.6" x 7.5" x 12.0	900	90	≥150,000	Wet	75W Incandescent	–	–
4.6" x 7.5" x 12.0	900	90	≥150,000	Wet	75W Incandescent	–	–
4.9" x 6.4" x 4.9"	1,390	109	≥150,000	Wet	75W Incandescent	–	Standard
4.9" x 6.4" x 4.9"	1,390	109	≥150,000	Wet	75W Incandescent	–	Standard
4.9" x 6.4" x 9.0"	2,750	105	≥150,000	Wet	75W Incandescent	–	–
4.9" x 6.4" x 9.0"	2,750	105	≥150,000	Wet	75W Incandescent	–	–
4.9" x 4.9" x 6.9"	1,390	109	≥150,000	Wet	75W Incandescent	–	Premium
4.9" x 4.9" x 6.9"	1,390	109	≥150,000	Wet	75W Incandescent	–	Premium
4.9" x 6.4" x 46"	1,390	109	≥150,000	Wet	75W Incandescent	–	Premium
4.9" x 6.4" x 46"	1,390	109	≥150,000	Wet	75W Incandescent	–	Premium
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
8" x 36"	2,000	110	≥140,000	Wet	50W HPS/MH	–	Standard
8" x 36"	2,000	110	≥140,000	Wet	50W HPS/MH	–	Standard
8" x 36"	2,000	110	≥140,000	Wet	50W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard

ORDERING GUIDE

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	60185	BOLLARD1A/018UNV830/R8R/BZ	18	120-277	–	830
	60186	BOLLARD1A/018UNV840/R8R/BZ	18	120-277	–	840
	60187	BOLLARD1A/018UNV850/R8R/BZ	18	120-277	–	850
	60188	BOLLARD1A/038UNV830/R8R/BZ	38	120-277	–	830
	60189	BOLLARD1A/038UNV840/R8R/BZ	38	120-277	–	840
	60190	BOLLARD1A/038UNV850/R8R/BZ	38	120-277	–	850
<b>Bulkhead</b>	60206	BULKHED1A/010UNV840/SM/BL	10	120-277	–	840
	60207	BULKHED1A/010UNV850/SM/BL	10	120-277	–	850
<b>Area Light</b>	70956	AREAFLD1A/070UNVD840/T3/BZ	70	120-277	0-10	840
	71078	AREAFLD1A/070UNVD840/T4/BZ (MTO)	70	120-277	0-10	840
	71079	AREAFLD1A/070UNVD840/T5/BZ (MTO)	70	120-277	0-10	840
	71153	AREAFLD1A/070UNVD850/T3/BZ	70	120-277	0-10	850
	71170	AREAFLD1A/070UNVD850/T4/BZ (MTO)	70	120-277	0-10	850
	71171	AREAFLD1A/070UNVD850/T5/BZ (MTO)	70	120-277	0-10	850
	60632	AREAFLD1A/070UNVD840/T3/WH	70	120-277	0-10	840
	60633	AREAFLD1A/070UNVD840/T4/WH (MTO)	70	120-277	0-10	840
	60634	AREAFLD1A/070UNVD840/T5/WH (MTO)	70	120-277	0-10	840
	60635	AREAFLD1A/070UNVD850/T3/WH	70	120-277	0-10	850
	60636	AREAFLD1A/070UNVD850/T4/WH (MTO)	70	120-277	0-10	850
	60637	AREAFLD1A/070UNVD850/T5/WH (MTO)	70	120-277	0-10	850
	60037	AREAFLD1A/110UNVD840/T3/BZ	110	120-277	0-10	840
	60038	AREAFLD1A/110UNVD840/T4/BZ (MTO)	110	120-277	0-10	840
	60039	AREAFLD1A/110UNVD840/T5/BZ (MTO)	110	120-277	0-10	840
	60040	AREAFLD1A/110UNVD850/T3/BZ	110	120-277	0-10	850
	60041	AREAFLD1A/110UNVD850/T4/BZ (MTO)	110	120-277	0-10	850
	60042	AREAFLD1A/110UNVD850/T5/BZ (MTO)	110	120-277	0-10	850
	60638	AREAFLD1A/110UNVD840/T3/WH	110	120-277	0-10	840
	60639	AREAFLD1A/110UNVD840/T4/WH (MTO)	110	120-277	0-10	840
	60640	AREAFLD1A/110UNVD840/T5/WH (MTO)	110	120-277	0-10	840
	60641	AREAFLD1A/110UNVD850/T3/WH	110	120-277	0-10	850
	60642	AREAFLD1A/110UNVD850/T4/WH (MTO)	110	120-277	0-10	850
	60643	AREAFLD1A/110UNVD850/T5/WH (MTO)	110	120-277	0-10	850
	60031	AREAFLD1A/145UNVD840/T3/BZ	145	120-277	0-10	840

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty



Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
8" x 36"	2,000	110	≥140,000	Wet	50W HPS/MH	–	Standard
8" x 36"	2,000	110	≥140,000	Wet	50W HPS/MH	–	Standard
8" x 36"	2,000	110	≥140,000	Wet	50W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
8" x 36"	3,900	110	≥79,000	Wet	100W HPS/MH	–	Standard
11.2" x 7.1" x 5.5"	900	90	≥150,000	Wet	75W Incandescent	–	E-Star
11.2" x 7.1" x 5.5"	900	90	≥150,000	Wet	75W Incandescent	–	E-Star
12.2" x 12.5" x 4.3"	8,100	116	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,200	117	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,500	121	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,600	123	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,700	125	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	9,000	130	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,100	116	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,200	117	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,500	121	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,600	123	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,700	125	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	9,000	130	≥140,000	IP66	175W HID	–	Premium
15.2" x 12.5" x 4.3"	12,600	117	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	12,700	117	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	123	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	124	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	125	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	124	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	12,600	117	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	12,700	117	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	123	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	124	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	125	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	124	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,000	116	≥140,000	IP66	400W HPS/MH	–	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/ CCT
	60032	AREAFD1A/145UNVD840/T4/BZ (MTO)	145	120-277	0-10	840
	60033	AREAFD1A/145UNVD840/T5/BZ (MTO)	145	120-277	0-10	840
	60034	AREAFD1A/145UNVD850/T3/BZ	145	120-277	0-10	850
	60035	AREAFD1A/145UNVD850/T4/BZ (MTO)	145	120-277	0-10	850
	60036	AREAFD1A/145UNVD850/T5/BZ (MTO)	145	120-277	0-10	850
	60644	AREAFD1A/145UNVD840/T3/WH (MTO)	145	120-277	0-10	840
	60645	AREAFD1A/145UNVD840/T4/WH	145	120-277	0-10	840
	60646	AREAFD1A/145UNVD840/T5/WH (MTO)	145	120-277	0-10	840
	60647	AREAFD1A/145UNVD850/T3/WH (MTO)	145	120-277	0-10	850
	60648	AREAFD1A/145UNVD850/T4/WH	145	120-277	0-10	850
	60649	AREAFD1A/145UNVD850/T5/WH (MTO)	145	120-277	0-10	850
	60226	AREAFD1A/220UNVD840/T3/BZ (MTO)	220	120-277	0-10	840
	60227	AREAFD1A/220UNVD840/T4/BZ (MTO)	220	120-277	0-10	840
	60228	AREAFD1A/220UNVD840/T5/BZ	220	120-277	0-10	840
	60229	AREAFD1A/220UNVD850/T3/BZ (MTO)	220	120-277	0-10	850
	60230	AREAFD1A/220UNVD850/T4/BZ (MTO)	220	120-277	0-10	850
	60231	AREAFD1A/220UNVD850/T5/BZ	220	120-277	0-10	850
	60083	AREAFD1A/070UNVD840/T3/BZD (MTO)	70	120-277	0-10	840
	60084	AREAFD1A/070UNVD840/T4/BZD (MTO)	70	120-277	0-10	840
	60085	AREAFD1A/070UNVD840/T5/BZD (MTO)	70	120-277	0-10	840
	60086	AREAFD1A/070UNVD850/T3/BZD (MTO)	70	120-277	0-10	850
	60087	AREAFD1A/070UNVD850/T4/BZ/D (MTO)	70	120-277	0-10	850
	60088	AREAFD1A/070UNVD850/T5/BZ/D (MTO)	70	120-277	0-10	850
	60386	AREAFD1A/070HUV840/T3/BZ (MTO)	70	347-480	0-10	840
	60387	AREAFD1A/070HUV840/T4/BZ (MTO)	70	347-480	0-10	840
	60388	AREAFD1A/070HUV840/T5/BZ	70	347-480	0-10	840
	60389	AREAFD1A/070HUV850/T3/BZ (MTO)	70	347-480	0-10	850
	60390	AREAFD1A/070HUV850/T4/BZ (MTO)	70	347-480	0-10	850
	60391	AREAFD1A/070HUV850/T5/BZ	70	347-480	0-10	850
	60089	AREAFD1A/110UNVD840/T3/BZ/D (MTO)	110	120-277	0-10	840
	60090	AREAFD1A/110UNVD840/T4/BZ/D (MTO)	110	120-277	0-10	840
	60091	AREAFD1A/110UNVD840/T5/BZ/D (MTO)	110	120-277	0-10	840
	60092	AREAFD1A/110UNVD850/T3/BZ/D (MTO)	110	120-277	0-10	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
15.2" x 12.5" x 4.3"	17,100	117	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,900	122	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,000	117	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,000	117	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,900	123	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,000	116	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,100	117	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,900	122	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,000	117	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,000	117	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,900	123	≥140,000	IP66	400W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	27,900	128	≥140,000	IP66	1000W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	28,500	130	≥140,000	IP66	1000W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	29,000	130	≥140,000	IP66	1000W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	27,900	128	≥140,000	IP66	1000W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	28,500	130	≥140,000	IP66	1000W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	29,000	130	≥140,000	IP66	1000W HPS/MH	–	Premium
12.2" x 12.5" x 4.3"	8,100	116	≥140,000	IP66	175W HID	D	Premium
12.2" x 12.5" x 4.3"	8,200	117	≥140,000	IP66	175W HID	D	Premium
12.2" x 12.5" x 4.3"	8,500	121	≥140,000	IP66	175W HID	D	Premium
12.2" x 12.5" x 4.3"	8,600	123	≥140,000	IP66	175W HID	D	Premium
12.2" x 12.5" x 4.3"	8,700	125	≥140,000	IP66	175W HID	D	Premium
12.2" x 12.5" x 4.3"	9,000	130	≥140,000	IP66	175W HID	D	Premium
12.2" x 12.5" x 4.3"	8,100	116	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,200	117	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,500	121	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,600	123	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	8,700	125	≥140,000	IP66	175W HID	–	Premium
12.2" x 12.5" x 4.3"	9,000	130	≥140,000	IP66	175W HID	–	Premium
15.2" x 12.5" x 4.3"	12,600	117	≥140,000	IP66	250W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	12,700	117	≥140,000	IP66	250W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	13,300	123	≥140,000	IP66	250W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	13,300	124	≥140,000	IP66	250W HPS/MH	D	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/ CCT
	60093	AREAFLD1A/110UNVD850/T4/BZ/D (MTO)	110	120-277	0-10	850
	60094	AREAFLD1A/110UNVD850/T5/BZ/D (MTO)	110	120-277	0-10	850
	60392	AREAFLD1A/110HUV840/T3/BZ (MTO)	110	347-480	0-10	840
	60393	AREAFLD1A/110HUV840/T4/BZ (MTO)	110	347-480	0-10	840
	60394	AREAFLD1A/110HUV840/T5/BZ	110	347-480	0-10	840
	60395	AREAFLD1A/110HUV850/T3/BZ (MTO)	110	347-480	0-10	850
	60396	AREAFLD1A/110HUV850/T4/BZ (MTO)	110	347-480	0-10	850
	60397	AREAFLD1A/110HUV850/T5/BZ	110	347-480	0-10	850
	60095	AREAFLD1A/145UNVD840/T3/BZ/D (MTO)	145	120-277	0-10	840
	60096	AREAFLD1A/145UNVD840/T4/BZ/D (MTO)	145	120-277	0-10	840
	60097	AREAFLD1A/145UNVD840/T5/BZ/D (MTO)	145	120-277	0-10	840
	60098	AREAFLD1A/145UNVD850/T3/BZ/D (MTO)	145	120-277	0-10	850
	60099	AREAFLD1A/145UNVD850/T4/BZ/D (MTO)	145	120-277	0-10	850
	60100	AREAFLD1A/145UNVD850/T5/BZ/D (MTO)	145	120-277	0-10	850
	60380	AREAFLD1A/145HUV840/T3/BZ (MTO)	145	347-480	0-10	840
	60381	AREAFLD1A/145HUV840/T4/BZ (MTO)	145	347-480	0-10	840
	60382	AREAFLD1A/145HUV840/T5/BZ	145	347-480	0-10	840
	60383	AREAFLD1A/145HUV850/T3/BZ (MTO)	145	347-480	0-10	850
	60384	AREAFLD1A/145HUV850/T4/BZ (MTO)	145	347-480	0-10	850
	60385	AREAFLD1A/145HUV850/T5/BZ	145	347-480	0-10	850
	60232	AREAFLD1A/220HUV840/T3/BZ (MTO)	220	347-480	0-10	840
	60233	AREAFLD1A/220HUV840/T4/BZ (MTO)	220	347-480	0-10	840
	60234	AREAFLD1A/220HUV840/T5/BZ	220	347-480	0-10	840
	60235	AREAFLD1A/220HUV850/T3/BZ (MTO)	220	347-480	0-10	850
	60236	AREAFLD1A/220HUV850/T4/BZ (MTO)	220	347-480	0-10	850
	60237	AREAFLD1A/220HUV850/T5/BZ	220	347-480	0-10	850
<b>Slim Wall Pack</b>	74340	SLMWPK1A/013UNV740/CO/BZ	13	120-277	-	740
	74341	SLMWPK1A/013UNV750/CO/BZ	13	120-277	-	750
	74192	SLMWPK1A/030UNV740/CO/BZ	30	120-277	-	740
	74196	SLMWPK1A/040UNV750/CO/BZ	40	120-277	-	750
	74194	SLMWPK1A/060UNV740/CO/BZ	60	120-277	-	740
	74197	SLMWPK1A/060UNV750/CO/BZ	60	120-277	-	750
	74342	SLMWPK1A/013120740/CO/BZ/P	13	120	-	740

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
15.2" x 12.5" x 4.3"	13,300	125	≥140,000	IP66	250W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	13,300	124	≥140,000	IP66	250W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	12,600	117	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	12,700	117	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	123	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	124	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	125	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	13,300	124	≥140,000	IP66	250W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,000	116	≥140,000	IP66	400W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	17,100	117	≥140,000	IP66	400W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	17,900	122	≥140,000	IP66	400W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	17,000	117	≥140,000	IP66	400W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	17,000	117	≥140,000	IP66	400W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	17,900	123	≥140,000	IP66	400W HPS/MH	D	Premium
15.2" x 12.5" x 4.3"	17,000	116	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,100	117	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,900	122	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,000	117	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,000	117	≥140,000	IP66	400W HPS/MH	–	Premium
15.2" x 12.5" x 4.3"	17,900	123	≥140,000	IP66	400W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	27,900	128	≥140,000	IP66	1000W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	28,500	130	≥140,000	IP66	1000W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	29,000	130	≥140,000	IP66	1000W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	27,900	128	≥140,000	IP66	1000W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	28,500	130	≥140,000	IP66	1000W HPS/MH	–	Premium
20.9" x 12.5" x 4.3"	29,000	130	≥140,000	IP66	1000W HPS/MH	–	Premium
7.5" x 2.8" x 8.0"	1,400	113	≥150,000	Wet	100W Incandescent	–	Standard
7.5" x 2.8" x 8.0"	1,400	113	≥150,000	Wet	100W Incandescent	–	Standard
7.5" x 2.8" x 8.0"	2,800	92	≥125,000	Wet	70W HPS	–	Standard
7.5" x 2.8" x 8.0"	3,900	98	≥125,000	Wet	100W HPS/MH	–	Standard
7.5" x 2.8" x 8.0"	5,500	94	≥125,000	Wet	175W MH	–	Standard
7.5" x 2.8" x 8.0"	5,100	83	≥125,000	Wet	175W MH	–	–
7.5" x 2.8" x 8.0"	1,400	113	≥150,000	Wet	100W Incandescent	P	Standard

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	74343	SLMWP1A/013120750/CO/BZ/P	13	120	–	750
	74204	SLMWP1A/030120740/CO/BZ/P (MTO)	30	120	–	740
	74207	SLMWP1A/030120750/CO/BZ/P	30	120	–	750
	74208	SLMWP1A/040120750/CO/BZ/P	40	120	–	750
	74206	SLMWP1A/060120740/CO/BZ/P	60	120	–	740
	74209	SLMWP1A/060120750/CO/BZ/P	60	120	–	750
	72966	SLMWP1A/030347750/CO/BZ	30	347	–	750
	72992	SLMWP1A/040347750/CO/BZ	40	347	–	750
	74381	SLMWP2A/030UNV750/CO/BZ	30	120-277	–	750
	74380	SLMWP2A/060UNV740/CO/BZ	60	120-277	–	740
	74382	SLMWP2A/060UNV750/CO/BZ	60	120-277	–	750
	74384	SLMWP2A/030120750/CO/BZ/P	30	120	–	750
	74383	SLMWP2A/060120740/CO/BZ/P	60	120	–	740
	74385	SLMWP2A/060120750/CO/BZ/P	60	120	–	750
<b>Wall Pack Cutoff</b>	74186	WALPAK1C/036UNV740/CO/BZ	36	120-277	–	740
	74187	WALPAK1C/050UNV740/CO/BZ	50	120-277	–	740
	74190	WALPAK1C/050UNV750/CO/BZ	50	120-277	–	750
	74191	WALPAK1C/075UNV750/CO/BZ	75	120-277	–	750
	74213	WALPAK1C/036UNV750/CO/BZ/P (MTO)	36	120-277	–	750
	74211	WALPAK1C/050UNV740/CO/BZ/P (MTO)	50	120-277	–	740
	74214	WALPAK1C/050UNV750/CO/BZ/P (MTO)	50	120-277	–	750
	74212	WALPAK1C/075UNV740/CO/BZ/P (MTO)	75	120-277	–	740
	74215	WALPAK1C/075UNV750/CO/BZ/P (MTO)	75	120-277	–	750
	72993	WALPAK1C/040347750/CO/BZ	40	347	–	750
	72994	WALPAK1C/055347750/CO/BZ	55	347	–	750
	74497	WALPAK1C/050UNV740/CO/BZ/E (MTO)	50	120-277	–	740
	74498	WALPAK1C/050UNV750/CO/BZ/E (MTO)	50	120-277	–	750
	74912	WALPAK2C/030UNV740/CO/BZ	30	120-277	–	840
	74915	WALPAK2C/030UNV750/CO/BZ	30	120-277	–	850
	74913	WALPAK2C/050UNV740/CO/BZ	50	120-277	–	840
	74916	WALPAK2C/050UNV750/CO/BZ	50	120-277	–	850
	74914	WALPAK2C/075UNV740/CO/BZ	75	120-277	–	840
	74917	WALPAK2C/075UNV750/CO/BZ	75	120-277	–	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
7.5" x 2.8" x 8.0"	1,400	113	≥150,000	Wet	100W Incandescent	P	Standard
7.5" x 2.8" x 8.0"	2,800	92	≥125,000	Wet	70W HPS	P	Standard
7.5" x 2.8" x 8.0"	2,800	84	≥125,000	Wet	70W HPS	P	–
7.5" x 2.8" x 8.0"	3,900	98	≥125,000	Wet	100W HPS/MH	P	Standard
7.5" x 2.8" x 8.0"	5,500	94	≥125,000	Wet	175W MH	P	Standard
7.5" x 2.8" x 8.0"	5,100	83	≥125,000	Wet	175W MH	P	–
7.5" x 2.8" x 8.0"	3,400	109	≥125,000	Wet	70W HPS	–	Standard
7.5" x 2.8" x 8.0"	4,300	104	≥125,000	Wet	100W HPS/MH	–	Standard
7.5" x 2.8" x 8.0"	3,300	112	≥125,000	Wet	70W HPS	–	Premium
7.5" x 2.8" x 8.0"	7,000	117	≥125,000	Wet	175W MH	–	Premium
7.5" x 2.8" x 8.0"	7,200	121	≥125,000	Wet	175W MH	–	Premium
7.5" x 2.8" x 8.0"	3,300	112	≥125,000	Wet	70W HPS	P	Premium
7.5" x 2.8" x 8.0"	7,000	117	≥125,000	Wet	175W MH	P	Premium
7.5" x 2.8" x 8.0"	7,200	121	≥125,000	Wet	175W MH	P	Premium
14.4" x 11.4" x 9.5"	3,300	92	≥150,000	Wet	100W HPS/MH	–	Standard
14.4" x 11.4" x 9.5"	5,200	107	≥150,000	Wet	175W MH	–	Standard
14.4" x 11.4" x 9.5"	5,000	102	≥150,000	Wet	175W MH	–	Standard
14.4" x 11.4" x 9.5"	6,400	88	≥150,000	Wet	250W HPS/MH	–	–
14.4" x 11.4" x 9.5"	2,900	82	≥150,000	Wet	100W HPS/MH	P	Standard
14.4" x 11.4" x 9.5"	5,200	107	≥150,000	Wet	175W MH	P	Standard
14.4" x 11.4" x 9.5"	5,000	102	≥150,000	Wet	175W MH	P	Standard
14.4" x 11.4" x 9.5"	6,600	91	≥150,000	Wet	250W HPS/MH	P	–
14.4" x 11.4" x 9.5"	6,400	88	≥150,000	Wet	250W HPS/MH	P	–
14.4" x 11.4" x 9.5"	4,500	107	≥150,000	Wet	100W HPS/MH	–	Standard
14.4" x 11.4" x 9.5"	5,500	101	≥150,000	Wet	175W MH	–	Standard
14.4" x 11.4" x 9.5"	5,200	107	≥50,000	Wet	175W MH	E	Standard
14.4" x 11.4" x 9.5"	5,000	102	≥50,000	Wet	175W MH	E	Standard
14.4" x 5.7" x 9.3"	3,800	135	≥150,000	Wet	100W HPS/MH	–	Premium
14.4" x 5.7" x 9.3"	3,800	135	≥150,000	Wet	100W HPS/MH	–	Premium
14.4" x 5.7" x 9.3"	6,200	126	≥150,000	Wet	175W MH	–	Premium
14.4" x 5.7" x 9.3"	6,300	128	≥150,000	Wet	175W MH	–	Premium
14.4" x 5.7" x 9.3"	9,000	120	≥150,000	Wet	250W HPS/MH	–	Premium
14.4" x 5.7" x 9.3"	9,100	121	≥150,000	Wet	250W HPS/MH	–	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	75569	WALPAK2C030UNV740COBZ/P (MTO)	25	120-277	-	740
	75572	WALPAK2C030UNV750COBZ/P (MTO)	50	120-277	-	750
	75570	WALPAK2C050UNV740COBZ/P (MTO)	25	120-277	-	740
	75573	WALPAK2C050UNV750COBZ/P (MTO)	75	120-277	-	750
	75571	WALPAK2C075UNV740COBZ/P (MTO)	50	120-277	-	740
	75574	WALPAK2C075UNV750COBZ/P (MTO)	75	120-277	-	750
	60628	WALPAK2C/030UNV740/CO/WH	30	120-277	-	840
	60629	WALPAK2C/030UNV750/CO/WH	30	120-277	-	850
	60630	WALPAK2C/050UNV740/CO/WH	50	120-277	-	840
	60631	WALPAK2C/050UNV750/CO/WH	50	120-277	-	850
<b>Wall Pack Non-Cutoff</b>	74217	WALPAK1N/050UNV740/NC/BZ/P	50	120-277	-	740
	72996	WALPAK1N/040347750/NC/BZ	40	347	-	750
	72997	WALPAK1N/055347750/NC/BZ	55	347	-	750
	72998	WALPAK1N/080347750/NC/BZ	80	347	-	750
	74499	WALPAK1N/050UNV740/NC/BZ/E (MTO)	50	120-277	-	740
	74500	WALPAK1N/050UNV750/NC/BZ/E (MTO)	50	120-277	-	750
	74386	WALPAK2N/030UNV740/NC/BZ	30	120-277	-	740
	74482	WALPAK2N/030UNV750/NC/BZ	30	120-277	-	750
	74485	WALPAK2N/050UNV740/NC/BZ	50	120-277	-	740
	74486	WALPAK2N/050UNV750/NC/BZ	50	120-277	-	750
	74489	WALPAK2N/075UNV740/NC/BZ	75	120-277	-	740
	74490	WALPAK2N/075UNV750/NC/BZ	75	120-277	-	750
	60567	WALPAK2N/050/HUV740/NC/BZ (MTO)	50	347-480	-	740
	60568	WALPAK2N/050/HUV750/NC/BZ (MTO)	50	347-480	-	750
	60569	WALPAK2N/075/HUV740/NC/BZ (MTO)	75	347-480	-	740
	60570	WALPAK2N/075/HUV750/NC/BZ (MTO)	75	347-480	-	750
	74387	WALPAK2N/030UNV740/NC/BZ/P	30	120-277	-	740
	74483	WALPAK2N/030UNV750/NC/BZ/P	30	120-277	-	750
	74487	WALPAK2N/050UNV740/NC/BZ/P	50	120-277	-	740
	74488	WALPAK2N/050UNV750/NC/BZ/P	50	120-277	-	750
	74491	WALPAK2N/075UNV740/NC/BZ/P	75	120-277	-	740
	74492	WALPAK2N/075UNV750/NC/BZ/P	75	120-277	-	750
	74528	WALPAK3N/105UNV740/NC/BZ	105	120-277	-	740

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty



Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
14.4" x 5.7" x 9.3"	3,800	135	≥150,000	Wet	100W HPS/MH	P	Premium
14.4" x 5.7" x 9.3"	3,800	135	≥150,000	Wet	100W HPS/MH	P	Premium
14.4" x 5.7" x 9.3"	6,200	126	≥150,000	Wet	175W MH	P	Premium
14.4" x 5.7" x 9.3"	6,300	128	≥150,000	Wet	175W MH	P	Premium
14.4" x 5.7" x 9.3"	9,000	120	≥150,000	Wet	250W HPS/MH	P	Premium
14.4" x 5.7" x 9.3"	9,100	121	≥150,000	Wet	250W HPS/MH	P	Premium
14.4" x 5.7" x 9.3"	3,800	135	≥150,000	Wet	100W HPS/MH	–	Premium
14.4" x 5.7" x 9.3"	3,800	135	≥150,000	Wet	100W HPS/MH	–	Premium
14.4" x 5.7" x 9.3"	6,200	126	≥150,000	Wet	175W MH	–	Premium
14.4" x 5.7" x 9.3"	6,300	128	≥150,000	Wet	175W MH	–	Premium
14.4" x 7.1" x 9.3"	5,000	104	≥150,000	Wet	175W MH	P	–
14.4" x 7.1" x 9.3"	4,300	102	≥150,000	Wet	100W HPS/MH	–	–
14.4" x 7.1" x 9.3"	6,300	108	≥150,000	Wet	175W MH	–	–
14.4" x 7.1" x 9.3"	9,400	120	≥150,000	Wet	250W HPS/MH	–	Standard
14.4" x 7.1" x 9.3"	5,000	104	≥50,000	Wet	175W MH	E	Standard
14.4" x 7.1" x 9.3"	5,300	108	≥50,000	Wet	175W MH	E	Standard
14.4" x 7.1" x 9.3"	3,400	122	≥150,000	Wet	100W HPS/MH	–	Premium
14.4" x 7.1" x 9.3"	3,500	125	≥150,000	Wet	100W HPS/MH	–	Premium
14.4" x 7.1" x 9.3"	5,500	113	≥150,000	Wet	175W MH	–	Standard
14.4" x 7.1" x 9.3"	5,600	116	≥150,000	Wet	175W MH	–	Standard
14.4" x 7.1" x 9.3"	8,900	118	≥150,000	Wet	250W HPS/MH	–	Standard
14.4" x 7.1" x 9.3"	9,200	121	≥150,000	Wet	250W HPS/MH	–	Standard
14.4" x 7.1" x 9.3"	5,500	113	≥150,000	Wet	175W MH	–	Standard
14.4" x 7.1" x 9.3"	5,600	116	≥150,000	Wet	175W MH	–	Standard
14.4" x 7.1" x 9.3"	8,900	118	≥150,000	Wet	250W HPS/MH	–	Standard
14.4" x 7.1" x 9.3"	9,200	121	≥150,000	Wet	250W HPS/MH	–	Standard
14.4" x 7.1" x 9.3"	3,400	122	≥150,000	Wet	100W HPS/MH	P	Premium
14.4" x 7.1" x 9.3"	3,500	125	≥150,000	Wet	100W HPS/MH	P	Premium
14.4" x 7.1" x 9.3"	5,500	113	≥150,000	Wet	175W MH	P	Standard
14.4" x 7.1" x 9.3"	5,600	116	≥150,000	Wet	175W MH	P	Standard
14.4" x 7.1" x 9.3"	8,900	118	≥150,000	Wet	250W HPS/MH	P	Standard
14.4" x 7.1" x 9.3"	9,200	121	≥150,000	Wet	250W HPS/MH	P	Standard
18" x 9.4" x 9.8"	12,500	120	≥150,000	Wet	400W HPS/MH	–	Standard

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	74529	WALPAK3N/105UNV750/NC/BZ	105	120-277	–	750
	60145	WALPAK3N105UNV740NCBZ/P (MTO)	105	120-277	–	740
	60146	WALPAK3N105UNV750NCBZ/P (MTO)	105	120-277	–	750
	60571	WALPAK3N/105HUV740/NC/BZ (MTO)	105	347-480	–	740
	60572	WALPAK3N/105HUV750/NC/BZ (MTO)	105	347-480	–	750
	60622	WALPAK2N/030UNV740/NC/WH	30	120-277	–	740
	60623	WALPAK2N/030UNV750/NC/WH	30	120-277	–	750
	60624	WALPAK2N/050UNV740/NC/WH	50	120-277	–	740
	60625	WALPAK2N/050UNV750/NC/WH	50	120-277	–	750
	60626	WALPAK2N/075UNV740/NC/WH	75	120-277	–	740
	60627	WALPAK2N/075UNV750/NC/WH	75	120-277	–	750
	60692	WALPAK3N/105UNV740/NC/WH	105	120-277	–	740
	60693	WALPAK3N/105UNV750/NC/WH	105	120-277	–	750
<b>Small Wall Pack</b>	60064	SMWLPK1N/015UNV740/NC/BZ	15	120-277	–	740
	60065	SMWLPK1N/015UNV750/NC/BZ	15	120-277	–	750
	60066	SMWLPK1N/015UNV740/NC/BZ/P	15	120-277	–	740
	60067	SMWLPK1N/015UNV750/NC/BZ/P	15	120-277	–	750
<b>Slim Floodlight</b>	74906	SLMFLD1A/020UNV830/WF/BZ	20	120-277	–	830
	74907	SLMFLD1A/020UNV840/WF/BZ	20	120-277	–	840
	74908	SLMFLD1A/030UNV840/WF/BZ	30	120-277	–	840
	74909	SLMFLD1A/030UNV850/WF/BZ	30	120-277	–	850
	74910	SLMFLD1A/050UNV840/WF/BZ	50	120-277	–	840
	74911	SLMFLD1A/050UNV850/WF/BZ	50	120-277	–	850
	60108	SLMFLD1A/100UNV840/WF/BZ	100	120-277	–	840
	60109	SLMFLD1A/100UNV850/WF/BZ	100	120-277	–	850
	60191	SLMFLD1A/020UNVD830/WF/BZ/D	20	120-277	0-10	830
	60192	SLMFLD1A/020UNVD840/WF/BZ/D	20	120-277	0-10	840
	60193	SLMFLD1A/030UNVD840/WF/BZ/D	30	120-277	0-10	840
	60194	SLMFLD1A/030UNVD850/WF/BZ/D	30	120-277	0-10	850
	60195	SLMFLD1A/050UNVD840/WF/BZ/D	50	120-277	0-10	840
	60196	SLMFLD1A/050UNVD850/WF/BZ/D	50	120-277	0-10	850
	60197	SLMFLD1A/100UNVD840/WF/BZ/D	100	120-277	0-10	840
	60199	SLMFLD1A/100UNVD850/WF/BZ/D	100	120-277	0-10	850

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
18" x 9.4" x 9.8"	12,500	120	≥150,000	Wet	400W HPS/MH	–	Standard
18" x 9.4" x 9.8"	12,500	120	≥150,000	Wet	400W HPS/MH	P	Standard
18" x 9.4" x 9.8"	12,500	120	≥150,000	Wet	400W HPS/MH	P	Standard
18" x 9.4" x 9.8"	12,500	120	≥150,000	Wet	400W HPS/MH	–	Standard
18" x 9.4" x 9.8"	12,500	120	≥150,000	Wet	400W HPS/MH	–	Standard
14.4" x "7.1" x 9.3"	3,400	122	≥150,000	Wet	100W HPS/MH	–	Premium
14.4" x "7.1" x 9.3"	3,500	125	≥150,000	Wet	100W HPS/MH	–	Premium
14.4" x "7.1" x 9.3"	5,500	113	≥150,000	Wet	175W MH	–	Standard
14.4" x "7.1" x 9.3"	5,600	116	≥150,000	Wet	175W MH	–	Standard
14.4" x "7.1" x 9.3"	8,900	118	≥150,000	Wet	250W HPS/MH	–	Standard
14.4" x "7.1" x 9.3"	9,200	121	≥150,000	Wet	250W HPS/MH	–	Standard
18" x 9.4" x 9.8"	12,500	120	≥150,000	Wet	400W HPS/MH	–	Standard
18" x 9.4" x 9.8"	12,500	120	≥150,000	Wet	400W HPS/MH	–	Standard
6.9" x 5.2" x 11"	1,765	117	≥150,000	Wet	50W HPS/MH	–	Standard
6.9" x 5.2" x 11"	1,765	117	≥150,000	Wet	50W HPS/MH	–	Standard
6.9" x 5.2" x 11"	1,765	117	≥150,000	Wet	50W HPS/MH	P	Standard
6.9" x 5.2" x 11"	1,765	117	≥150,000	Wet	50W HPS/MH	P	Standard
9.1" x 1.6" x 10.5"	2,000	103	≥150,000	IP66	70W HPS/MH	–	Standard
9.1" x 1.6" x 10.5"	2,200	111	≥150,000	IP66	70W HPS/MH	–	Premium
9.1" x 1.6" x 10.5"	3,400	110	≥150,000	IP66	100W HPS/MH	–	Premium
9.1" x 1.6" x 10.5"	3,500	114	≥150,000	IP66	100W HPS/MH	–	Premium
10.6" x 1.6" x 11.3"	6,100	119	≥150,000	IP66	175W HPS/MH	–	Premium
10.6" x 1.6" x 11.3"	6,300	121	≥150,000	IP66	175W HPS/MH	–	Premium
12.4" x 2.4" x 14.8"	12,300	123	≥150,000	IP66	400W HPS/MH	–	Premium
12.4" x 2.4" x 14.8"	12,300	123	≥150,000	IP66	400W HPS/MH	–	Premium
9.1" x 1.6" x 10.5"	2,000	103	≥150,000	IP66	70W HPS/MH	D	Standard
9.1" x 1.6" x 10.5"	2,200	111	≥150,000	IP66	70W HPS/MH	D	Premium
9.1" x 1.6" x 10.5"	3,400	110	≥150,000	IP66	100W HPS/MH	D	Premium
9.1" x 1.6" x 10.5"	3,500	114	≥150,000	IP66	100W HPS/MH	D	Premium
10.6" x 1.6" x 11.3"	6,100	119	≥150,000	IP66	175W HPS/MH	D	Premium
10.6" x 1.6" x 11.3"	6,300	121	≥150,000	IP66	175W HPS/MH	D	Premium
12.4" x 2.4" x 14.8"	12,300	123	≥150,000	IP66	400W HPS/MH	D	Premium
12.4" x 2.4" x 14.8"	12,300	123	≥150,000	IP66	400W HPS/MH	D	Premium

For accessories information see pages 142-145

Product Type	Item Number	Ordering Abbreviation	Watts	Voltage (V)	Dim (V)	CRI/CCT
	60200	SLMFLD1A/020UNV830/WFTR/BZ	20	120-277	–	830
	60201	SLMFLD1A/020UNV840/WFTR/BZ	20	120-277	–	840
	60202	SLMFLD1A/030UNV840/WFTR/BZ	30	120-277	–	840
	60203	SLMFLD1A/030UNV850/WFTR/BZ	30	120-277	–	850
	60204	SLMFLD1A/050UNV840/WFTR/BZ	50	120-277	–	840
	60205	SLMFLD1A/050UNV850/WFTR/BZ	50	120-277	–	850
<b>Bullet Floodlight</b>	60255	BULLTFL1A/005UNV730MF/BZ	5	120-277	–	730
	60183	BULLTFL1A/005UNB740/MF/BZ	5	120-277	–	740
	60184	BULLTFL1A/005UNB750/MF/BZ	5	120-277	–	750
	60254	BULLTFL1A/015UNV730MF/BZ	15	120-277	–	730
	60181	BULLTFL1A/015UNV740/MF/BZ	15	120-277	–	740
	60182	BULLTFL1A/015UNV750/MF/BZ	15	120-277	–	750
	60179	BULLTFL1A/020UNB740/MF/BZ	20	120-277	–	740
	60180	BULLTFL1A/020UNB750/MF/BZ	20	120-277	–	750

\*LPW per LM79 report

\*\*Options: C = Connector Kit, D = Dual (Motion/Daylight) Sensor, E = Emergency, EX = Expansion, P = Photocontrol, PC = Power Cord, S = Works with Sensor, SW = Switch, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Dimensions	Lumens	LPW*	LED L <sub>70</sub> Lifetime (h)	Dry/ Wet/ Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
9.1" x 1.6" x 10.5"	2,000	103	≥150,000	IP66	70W HPS/MH	–	Standard
9.1" x 1.6" x 10.5"	2,200	111	≥150,000	IP66	70W HPS/MH	–	Premium
9.1" x 1.6" x 10.5"	3,400	110	≥150,000	IP66	100W HPS/MH	–	Premium
9.1" x 1.6" x 10.5"	3,500	114	≥150,000	IP66	100W HPS/MH	–	Premium
10.6" x 1.6" x 11.3"	6,100	119	≥150,000	IP66	175W HPS/MH	–	Premium
10.6" x 1.6" x 11.3"	6,300	121	≥150,000	IP66	175W HPS/MH	–	Premium
2.5" x 6.0"	525	105	≥150,000	Wet	50W Halogen	–	Standard
2.5" x 6.0"	525	105	≥150,000	Wet	50W Halogen	–	Premium
2.5" x 6.0"	525	105	≥150,000	Wet	50W Halogen	–	Premium
5.4" x 8.8"	1,575	105	≥150,000	Wet	35W HPS	–	Standard
5.4" x 8.8"	1,575	105	≥150,000	Wet	35W HPS	–	Standard
5.4" x 8.8"	1,575	105	≥150,000	Wet	35W HPS	–	Standard
5.4" x 8.8"	2,100	105	≥150,000	Wet	150W Halogen	–	Standard
5.4" x 8.8"	2,100	105	≥150,000	Wet	150W Halogen	–	Standard

For accessories information see pages 142-145

# Accessories

Compatible Luminaires	Item Number	Ordering Abbreviation	Product Description
<b>Strip</b>	60000	STRIP1A/JOINERKIT/WH	Strip Joiner Bracket (For suspension mounting, support is required every 4 ft.)
<b>High Bay</b>	74449	HIBAY1A/BOTTOMLENS/16H5	Refractor Bottom Lens
<b>Linear High Bay</b>	71758	SENSOR1A/REMOTE/D	Sensor Remote
	74597	LNHIBA1A/08IN/WG/WH	Wire Guard for 100W, 150W, and 165W versions
	74598	LNHIBA1A/12IN/WG/WH	Wire Guard for 225W versions
<b>UltraLED™ Linear High Bay</b>	60573	LNHIBA2A/CHAINMT	Chain Mount (5 foot)
	60574	LNHIBA2A/ACCABLEMT	Cable Mount
	60575	LNHIBA2A/PENDANTMT	Pendant Mount
	60576	LNHIBA2A/SURFACEMT	Surface Mount
	60577	LNHIBA2A/12/WG/WH	1x2 Wire Guard
	60578	LNHIBA2A/22/WG/WH	2x2 Wire Guard
	60579	LNHIBA2A/14/WG/WH	1x4 Wire Guard
	60580	LNHIBA2A/24WG/WH	2x4 Wire Guard
	60847	LNHIBA2A/SURFACEMT2	Surface Mount-EM/HUV
	60848	LNHIBA2A/PENDANTMT2	Pendant Mount-EM/HUV
<b>Vapor Tight</b>	74310	VAPOR1A/REMOTE	Vapor Tight Sensor Remote compatible with VAPOR1A
	74541	VAPOR1B/REMOTE	Vapor Tight Sensor Remote compatible with VAPOR1B
	74744	VAPOR1X/LENS/24D5	2ft Diffused Lens
	74538	VAPOR1X/LENS/48D5	4ft Diffused Lens
	74448	VAPOR1A/LENS/48EC	4ft Replacement Lens
	74920	VAPOR1A/CONN/BL	Tandem Wiring Connector
<b>Canopy</b>	60683	CANOPY3A/MTGPLATE/12/BZ	12" Mounting Plate, Bronze
	60684	CANOPY3A/MTGPLATE/16/BZ	16" Mounting Plate, Bronze
	60685	CANOPY3A/MTGPLATE/12/WH	12" Mounting Plate, White
	60686	CANOPY3A/MTGPLATE/16/WH	16" Mounting Plate, White
<b>Garage</b>	74745	GARAG1A/MTGPLATE/16/SV	16" Mounting Plate, Silver Finish
	74921	GARAG1A/SHIELD	Polycarbonate Glare Shield
	74550	GARAG1A/CONN/1/SV	Wire Through Connector – (Set of 1)
	74551	GARAG1A/CONN/2/SV	Wire Through Connector – (Set of 2)
	71758	SENSOR1A/REMOTE/D	Sensor Remote
<b>Area Light</b>	71733	AREAFLD1A/POLEMOUNT/BZ	Pole Mount, Bronze
	71734	AREAFLD1A/SLIPFITTER/BZ	Slip Fitter Mount, Bronze
	60127	AREADTD1A/ARM/24	Dusk to Dawn Mounting Arm
	60128	AREAFLD1A/RNDADAPT/BZ	Round Adapter, Bronze

Compatible Luminaires	Item Number	Ordering Abbreviation	Product Description
	60129	AREAFLD1A/WALLMNT/BZ	Wall Mount, Bronze
	60130	AREAFLD1A/WALLTENON/BZ	Wall Tenon Mount, Bronze
	60165	AREAFLD1ATRUNNION/BZ	Trunnion, Bronze
	60163	AREAFLD1AVISOR01/BZ	Visor, Bronze – 70W
	60164	AREAFLD1AVISOR02/BZ	Visor, Bronze – 110W, 145W
	60659	POESQS1A/20/11G/4IN/BZ*	Square Straight Pole, Bronze Finish
	60661	POESQS1A/25/11G/4IN/BZ*	Square Straight Pole, Bronze Finish
	60663	POESQS1A/30/11G/5IN/BZ*	Square Straight Pole, Bronze Finish
	60665	POESQS1A/ANJBOLT/304*	3/4" x 30" Anchor Bolt
	60666	POESQS1A/ANJBOLT/364*	1" x 36" Anchor Bolt
	60667	POESQS1A/TENON/4IN/BZ	4" Tenon Mount, Bronze Finish
	60668	POESQS1A/TENON/5IN/BZ	5" Tenon Mount, Bronze Finish
	60650	AREAFLD1A/POLEMOUNT/WH	Pole Mount, White
	60651	AREAFLD1A/SLIPFITTER/WH	Slip Fitter Mount, White
	60652	AREAFLD1A/WALLMNT/WH	Wall Mount, White
	65013	POESQS1A/DBLTENON/4IN/BZ	Bronze Double Tenon 4"
	65014	POESQS1A/DBLTENON/5IN/BZ	Bronze Double Tenon 5"
	65015	POESQS1A/DBLBULHORN/4IN/BZ	Bronze Double Bullhorn 4"
	65016	POESQS1A/DBLBULHORN/5IN/BZ	Bronze Double Bullhorn 5"
	60845	POESQS1A/TPLBULHORN/4IN/BZ	Bronze Triple Bullhorn 4"
	60846	POESQS1A/TPLBULHORN/5IN/BZ	Bronze Triple Bullhorn 5"
<b>Slim Wall Pack</b>	74392	SLMWPK1A/JBOX/BZ	Junction Box, Bronze Finish
	74393	SLMWPK1A/TRUNNION/BZ	Junction Box Trunnion Mount, Bronze Finish
	74394	SLMWPK1A/KNUCKLE/BZ	Junction Box Knuckle Mount, Bronze Finish
<b>Wall Pack Cutoff</b>	74396	WALPAK1C/LENS/BZ	Replacement Lens with Frame
<b>Wall Pack Non-Cutoff 30W-80W</b>	74390	WALPAK1N/TOPVISOR/BZ	Top Visor, Bronze Finish
	74391	WALPAK1N/WIREGUARD	Wire Guard
	74397	WALPAK1N/LENS/BZ	Replacement Glass Lens with Frame
	74445	WALPAK1N/PLENS/BZ	Polycarbonate Lens with Frame
<b>Wall Pack Non-Cutoff 105W</b>	74539	WALPAK3N/TOPVISOR/BZ	Top Visor, Bronze Finish
	74540	WALPAK3N/WIREGUARD	Wire Guard
	74595	WALPAK3N/LENS/BZ	Replacement Glass Lens with Frame
<b>Edge-Lit Panel</b>	70132	SMKIT1A/14A/WH	1x4 Surface Mount Kit, White Finish
	70380	SMKIT1A/22A/WH	2x2 Surface Mount Kit, White Finish
	70381	SMKIT1A/24A/WH	2x4 Surface Mount Kit, White Finish

\*Sold in continental US only

<b>Compatible Luminaires</b>	<b>Item Number</b>	<b>Ordering Abbreviation</b>	<b>Product Description</b>
<b>Edge-Lit Panel &amp; ValueLED™ Volumetric Troffer</b>	60457	FK1A14GWH	1x4 Flange Kit, White Finish
	60458	FK1A22GWH	2x2 Flange Kit, White Finish
	60459	FK1A24GWH	2x4 Flange Kit, White Finish
<b>Recessed Downlight</b>	79775	RTQ4TRIMDKBZ	Dark Bronze Trim Ring for RT4 QUAD Recessed Downlight
	79776	RTQ4TRIMBLK	Black Trim Ring for RT4 QUAD Recessed Downlight
	79777	RTQ4TRIMORBZ	Bronze Trim Ring for RT4 QUAD Recessed Downlight
	79778	RTQ4TRIMSN	Satin Nickel Trim Ring for RT4 QUAD Recessed Downlight
	70696	RT4/TRIM/BLK	Black Trim Ring for RT4 Recessed Downlight
	70697	RT4/TRIM/ORBZ	Bronze Trim and Reflector for RT4 Recessed Downlight
	75109	RT4/TRIM/DKBZ	Dark Bronze Trim and Reflector for RT4 Recessed Downlight
	70698	RT4/TRIM/SN	Satin Nickel Trim and Reflector for RT4 Recessed Downlight
	70716	RT4/TRIM/ALZAK	White Trim and Alzak Reflector for RT4 Recessed Downlight
	79779	RTQ56TRIMDKBZ	Dark Bronze Trim Ring for RT5/6 QUAD Recessed Downlight
	79780	RTQ56TRIMBLK	Black Trim Ring for RT5/6 QUAD Recessed Downlight
	79781	RTQ56TRIMORBZ	Bronze Trim Ring for RT5/6 QUAD Recessed Downlight
	79782	RTQ56TRIMSN	Satin Nickel Trim Ring for RT5/6 QUAD Recessed Downlight
	75095	RT5/6/TRIM/DKBZ	Dark Bronze Ring for RT5/6 Recessed Downlight
	75097	RT5/6/TRIM/BLK	Black Trim Ring for RT5/6 Recessed Downlight
	75098	RT5/6/TRIM/ORBZ	Bronze Trim and Reflector for RT5/6 Recessed Downlight
	75099	RT5/6/TRIM/SN	Satin Nickel Trim and Reflector for RT5/6 Recessed Downlight
	70663	RT6/RETROFIT/BAND	Retrofit Band for RT5/6 Recessed Downlight
	75092	RT8/TRIM/ALZAK	Alzak Trim Ring for RT8 Recessed Downlight
	75093	RT8/TRIM/SN	Satin Nickel Trim Ring for RT8 Recessed Downlight
	75082	RT6/8TRIMEXT	Trim Ring Extender for RT5/6 Recessed Downlight
	75083	RT8/10/TRIMEXT	8 to 10 inch Trim Ring Extender for RT8 Recessed Downlight
	74991	RT8/12/TRIMEXT	8 to 12 inch Trim Ring Extender for RT8 Recessed Downlight
	71709	LED/RT8/FRAME	Rough In Frame for RT8 Recessed Downlight
	75096	LEDADAPTORMEDBASE	Medium Base Socket Adapter for RT5/6
	75107	LEDADAPTOR/PUSHWIRE	Push Wire Adapter for RT4 and RT5/6 Recessed Downlight
	75105	LEDADAPTOR/GU24	GU24 Socket Adapter for RT4 and RT5/6 Recessed Downlights



Compatible Luminaires	Item Number	Ordering Abbreviation	Product Description
<b>MICRODISK™</b>	74992	LED/MD4TRIMDKBZ	Dark Bronze Trim Ring for MICRODISK 4"
	74993	LED/MD4TRIMBLK	Black Trim Ring for MICRODISK 4"
	74994	LED/MD4TRIMORBZ	Bronze Trim Ring for MICRODISK 4"
	74995	LED/MD4TRIMSN	Satin Trim Ring for MICRODISK 4"
	74996	LED/MD6TRIMDKBZ	Dark Bronze Trim Ring for MICRODISK 6"
	74997	LED/MD6TRIMBLK	Black Trim Ring for MICRODISK 6"
	74998	LED/MD6TRIMORBZ	Bronze Trim Ring for MICRODISK 6"
	74999	LED/MD6TRIMSN	Satin Trim Ring for MICRODISK 6"
	75082	RT6/8/TRIMEXT	6 to 12 inch Trim Ring Extender for MICRODISK
<b>Leviton® Lumina RF Keypads*</b>	75568	450SQFOCCSEN2.4GHZBLVTLMN	Leviton Lumina Wireless Occupancy Sensor, 450 Sq ft Range
	75567	1500SQFOCCSEN2.4GHZBLVTLMN	Leviton Lumina Wireless Occupancy Sensor, 1500 Sq ft Range
	75595	3000LUXDAYPC2.4GHZZBLVTLMN	Leviton Lumina RF Wireless Surface Mount Daylight Harvesting Photocell
<b>Flex XL</b>	74284	LEDFLEXLRGBWEXPZBS+	Flex XL 16 ft Expansion Strip
	73826	LEDFLEXRGBWCONNZBS+	Flex Connector Kit - Contains (2) 7 Flex Connector Types
<b>Convertible Undercabinet</b>	74439	LEDPOWERCORDUCZBS+	Convertible Under Cabinet Power Cord

\*Leviton Lumina Keypads required for product setup

With almost 9,000 employees and active in more than 120 countries, LEDVANCE is one of the world's leading general lighting providers for professional users and retail customers. Emerged from the general lighting business of OSRAM GmbH, the company offers advanced LED lamps, standardized LED luminaires, intelligent, networked Smart Home and Building solutions, and traditional light sources.



LEDVANCE LLC  
200 Ballardvale Street  
Wilmington, MA 01887 USA  
Phone: 1-800-LIGHTBULB  
(1-800-544-4828)  
[www.sylvania.com](http://www.sylvania.com)



© 2019 LEDVANCE LLC

Licensee of product trademark  
SYLVANIA in general lighting



VISIT [SYLVANIA.COM](http://SYLVANIA.COM)