ULTRA LED™ MR16 Lamps

Dimmable



Long lasting, energy efficient, ULTRA LED MR16 lamps are now true halogen equivalent lamps when comparing lumen output and center beam candlepower. These MR16 lamps use just 9W, are available in 15°, 25° and 35° beam angles and are high quality replacements for halogen 50W MR16 lamps. These LED MR16 lamps are available in GU5.3 base configurations and dimmable down to 10%. Lamps boast a 25,000 hours life (L_{70}) providing 12.5 times longer life than halogen MR16 lamps thereby reducing maintenance costs. Lamps are available in 2700K and 3000K color temperatures and 80+ CRI. These products are free of UV and IR radiation, minimizing discoloration and fading of materials.

Key Features & Benefits

- Dimmable down to 10%*
- Long life: up to 25,000 hours (L_{70})
- Reduces energy consumption up to 82%
- Lasts up to 12.5 times longer than halogen lamps
- Can be used in enclosed fixtures
- No warm-up time, instant-on with full-light output and stable color

- 12V AC/DC input voltage
- UV and IR free
- Mercury and lead free
- Suitable for use in damp locations
- Voluntary California Quality Light-Emitting Diode (LED) Small Diameter Directional Lamps (SDDL) certified

Performance may vary depending on dimmer used in application. Please refer to Dimmer Compatibility List (RETRO-DIM) for a list of compatible dimmers or visit www.SYLVANIA.com/LEDRetrofit











Product Offering

Ordering		Color	Beam
Abbreviation	Wattage	Temperature	Angle
ULTRA LED MR16	9	2700K, 3000K	15°, 25°, 35°

Application Information

Applications

- Accent/display lighting
- Recessed downlighting
- Track lighting

Market Segments

- Art galleries and museums
- Commercial and office space
- Hotels
- Residential
- Restaurants
- Retail sector

Application Notes

- Only install in operating environments ranging between -20°C and +40°C (-4°F and +104°F).
- 2. Not intended for use in emergency light fixtures or exit signs.
- 3. Suitable for damp locations not for use where directly exposed to water.
- 4. Use only with Class 2 power supply.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.sylvania.com/fcc156.



Specification Data

Catalog #	Туре
Project Comments	
Comments	
Prepared by	

Tunical

Ordering Information

Item Number	Ordering Abbreviation	Wattage (W)	Base Type	Replaces	Voltage (V)	Rated Life (hrs.) ¹	CCT ³	Lumens (lm) ²	CBCP (cd)	Beam Angle	CRI⁴	ENERGY Star®
48056	LED9MR16/DIM/827/SP15	9	GU5.3	50W MR16	12	25,000	2700K	700	7000	15°	80	Yes
78199	LED9MR16/DIM/827/NFL25	9	GU5.3	50W MR16	12	25,000	2700K	700	2600	25°	80	Yes
78200	LED9MR16/DIM/827/FL35	9	GU5.3	50W MR16	12	25,000	2700K	700	1500	35°	80	Yes
48057	LED9MR16/DIM/830/SP15	9	GU5.3	50W MR16	12	25,000	3000K	700	7000	15°	80	Yes
74044	LED9MR16/DIM/830/NFL25	9	GU5.3	50W MR16	12	25,000	3000K	700	2600	25°	83	Yes
74042	LED9MR16/DIM/830/FL35	9	GU5.3	50W MR16	12	25,000	3000K	700	1500	35°	83	Yes

SYLVANIA submits most lamps for ENERGY STAR testing. Early qualification for ENERGY STAR lamps begin at 25,000 hours (L₇₀) regardless that the design of the lamp is manufactured for a greater life expectancy. As the lamps pass ENERGY STAR qualifications, manufacturers are able to increase rated life as dictated by Energy Star guidelines becoming either provisionally qualified or fully qualified. Please visit EnergyStar.gov for more information about testing requirements for ENERGY STAR qualified products.

Ordering Guide


LED	9	MR16	1	DIM	1	830	1	NFL	1	25
LED Lamps	Wattage	Lamp Type:		Dimmable		CRI, CCT:		Beam Type:		Beam
and Retrofits	9	MR16				830: 80+ CRI,		SP = Spot		Angle:
						3000K		NFL = Narrow Flood		15°, 25°, 35°
								FL = Flood		

Energy Savings

Basic Product	LED	Similar	Halogen	Watts	Energy	LED Life vs.
Description	Life (hrs.)	Halogen	Life (hrs.)	Saved	Savings*	Halogen Life
LED9MR16/DIM	25.000	50W MR16	2.000	41	\$112.75	12.5x

^{*}Energy savings over life of lamp calculated at \$0.11/kWh

Lamp Dimensions

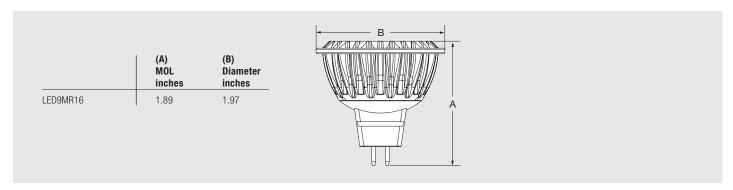

LEDVANCE LLC 200 Ballardvale Street Wilmington, MA 01887 USA Phone 1-800-LIGHTBULB (1-800-544-4828) www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.

All other trademarks are those of their respective owners.

Licensee of product trademark SYLVANIA in general lighting.

Specifications subject to change without notice.







^{1.} Hours lifetime with 70% (Ln) lumen maintenance 2. Thermally stable typical lumens (±10%) 3. Thermally stable typical CCT (±10%) 4. CRI – Color Rendering Index