

heatstrip.com.au

ADDRESS

17 Johnston Court Dandenong South, VIC, 3175, Australia

CONTACT

Thermofilm Australia Pty Ltd t: (03) 9562 3455 e: sales@thermofilm.com.au





Application:

- Pergola
- · Protected alfresco
- · Difficult to heat indoor areas
- · Cafe, Garage/shed

Mounting Heights: Ideal mounting height:

2.1m - 2.3m

Maximum mounting height: 2.5m



RH180

Application:

- High ceilings
- · Exposed alfresco
- Balconies

Mounting Heights: Ideal mounting height:

2.2m - 2.8m

Maximum mounting height: 3m



Max DC with remote

Electric heater

Application:

- Pergola
- Protected alfresco • Cafe
- · Difficult to heat
- indoor areas Electric heater

Mounting Heights: Ideal mounting height:

2.1m - 2.5m

Maximum mounting height: 2.7m



Classic with remote

Application:

- Protected alfresco
- · Difficult to heat indoor areas

Mounting Heights: Ideal mounting height:

2.1m - 2.5m

Maximum mounting height: 2.7m



Electric heater

Elegance with remote & App control

Application:

 Undercover protected and semi-exposed outdoor locations **Mounting Heights:** Ideal mounting height: 2.1m - 2.5m

Maximum mounting height: 2.8m



Intense "Black"

Application:

 Undercover protected and semi-exposed outdoor locations **Mounting Heights:** Ideal mounting height: 2.1m - 2.5m

Maximum mounting height: 2.8m



Intense "Off-white"

Application:

- · Portable spot heating
- Dining/Entertaining
- Work stations
- · Suitable for Indoor and outdoor areas

Indoor heating area:

9sam²

Outdoor heating area:

5sqm²

Portable Intense

Application:

- Portable spot heating
- · Outdoor dining/kitchen
- · Patios & courtyard
- Balconies & Verandas
- Hospitality

Heating area:

16sqm²



Application:

- · Alfresco areas
- · Outdoor dining/kitchen
- · Patios & courtyard
- Balconies & Verandas Hospitality

Mounting Heights: Ideal mounting height: 2m - 2.7m

Maximum mounting height: 3.5m



Portable LPG heater

LPG heater

Application:

- · Alfresco areas
- · Outdoor dining/kitchen
- · Patios & courtvard
- · Balconies & Verandas Hospitality

Mounting Heights: Ideal mounting height: 2m - 2.7m

Maximum mounting height: 3.5m



Wall Mounted Natural Gas heater

HEATSTRIP[®]









Heatstrip (Thermofilm Australia Pty Ltd) has been manufacturing innovative, stylish and energy efficient products for more than 30 years. The full range of Heatstrip products is currently supplied to residential and commercial markets, both in Australia and around the world.

Heatstrip provides Award-winning outdoor heating solutions for some of Australia's best-known venues and residential homes across the country.

In 2014 Thermofilm was inducted into the Victorian Manufacturing Hall of Fame.

In 2017 HEATSTRIP Portable LPG heater TGH34PL won a Good Design Award in Consumer Products.

In 2018 CROSSRAY BBQ was also recognised with a Good Design Award in Australia.
















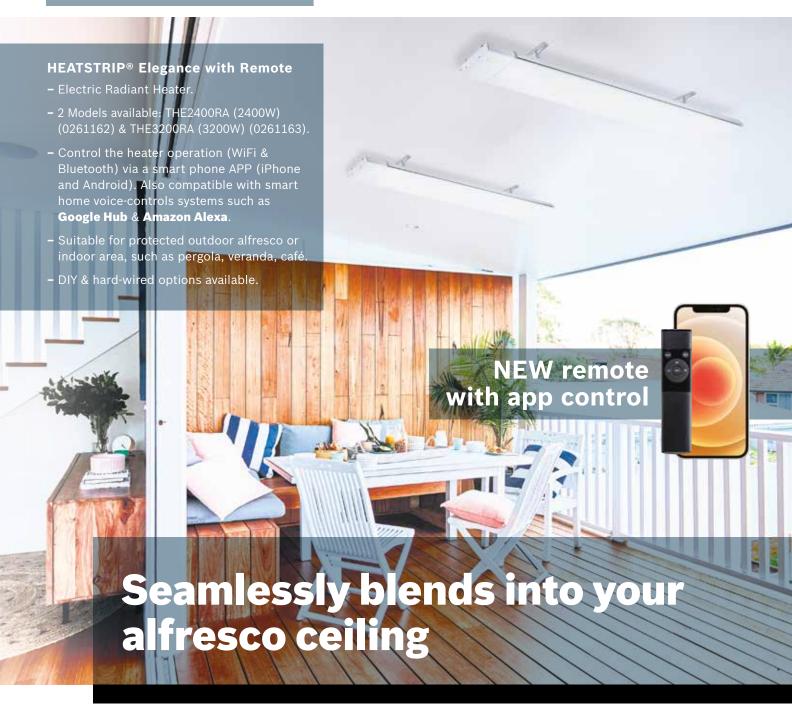



Slimline "Off-White" heater with unique material coating technology.



NEW control panel and remote control included. With low/high temperature settings & 1/2/4 hour timer.




Brackets can be used for ceiling & wall mounting, or can be suspended by chains & wires.



Optional Mounting accessories available, including flush mount kits extension poles. See page 12 for suitable part numbers.



CLASSIC

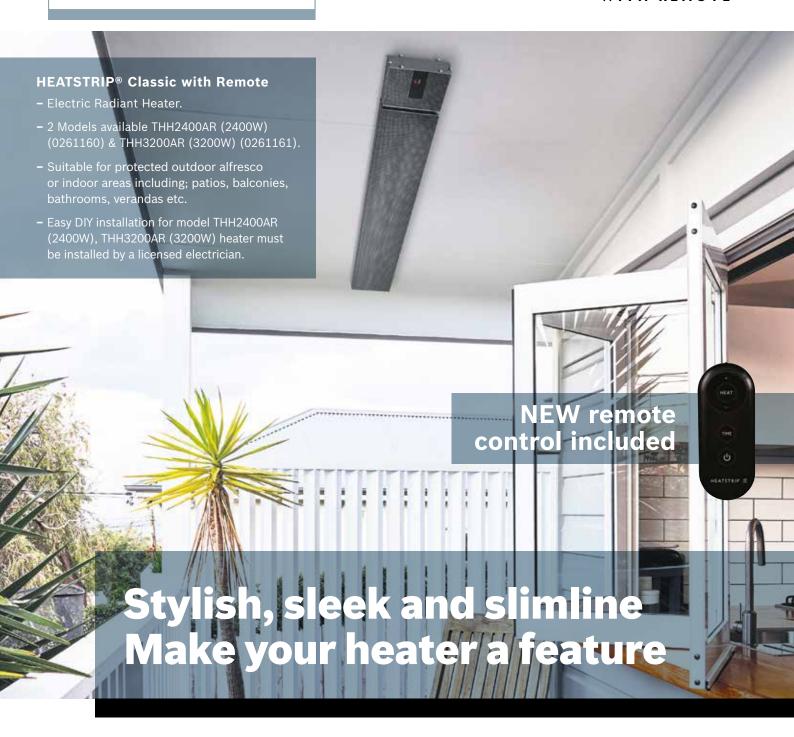



Stylish, sleek, unobtrusive design with unique HEATSTRIP front profile and coating technology.



NEW control panel and remote control included. With three temperature settings and 0-24 hour timer.




Brackets can be used for ceiling & wall mounting, or can be suspended by chains or wires.



Optional mounting accessories available, including flush mount kits and extension poles.
See page 12 for suitable part numbers.



HEATSTRIP[®] **INTENSE**

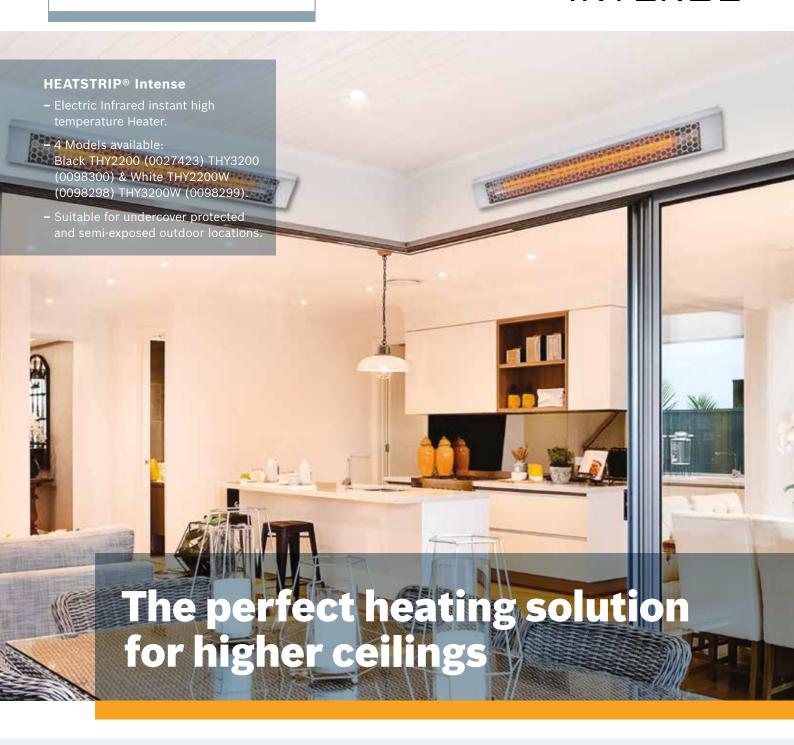



High performance carbon filament electric infra-red element, providing instantaneous heat.



"Black" and "Off White" models available with hexagonal styled grille. 2200W (DIY) or 3200W.




Easy installation with brackets included. Suitable for ceiling or wall mounting. 3200W model must be hard-wired.



Optional accessories available to purchase such as extension poles and flush mount enclosures.





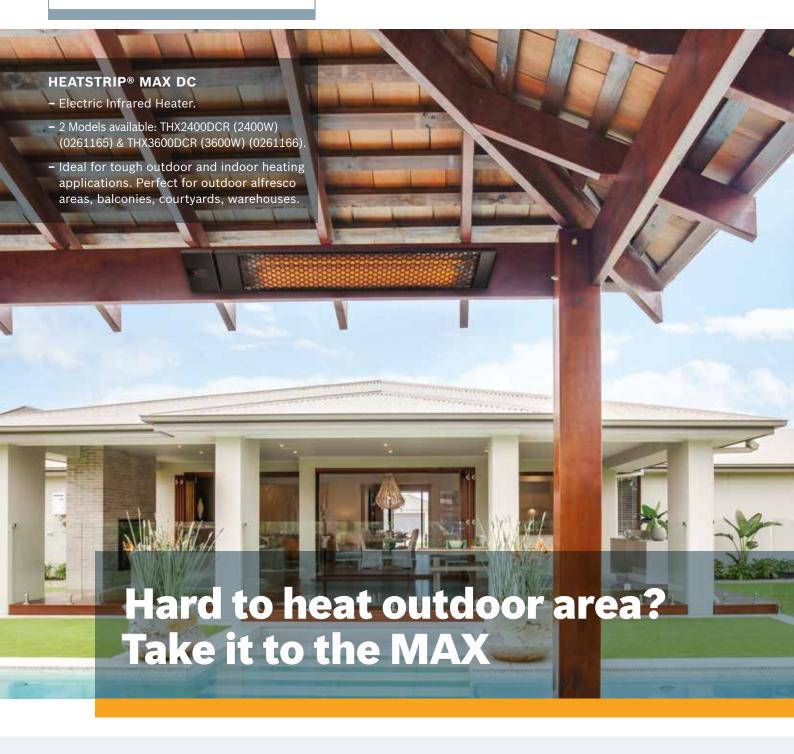



Dual heat infra-red carbon element technology and upgraded heat reflector design that delivers maximum, world class heating performance.




New Remote and control panel that provides 3 heat levels of heat control. Adjustable timer options from 0-24 hours with the touch of a button.



Commercial quality and construction. With a stylish hexagonal grille and black finish.



Easy installation with brackets included. Suitable for ceiling or wall mounting. 3600W model must be hard wired. Accessories available.

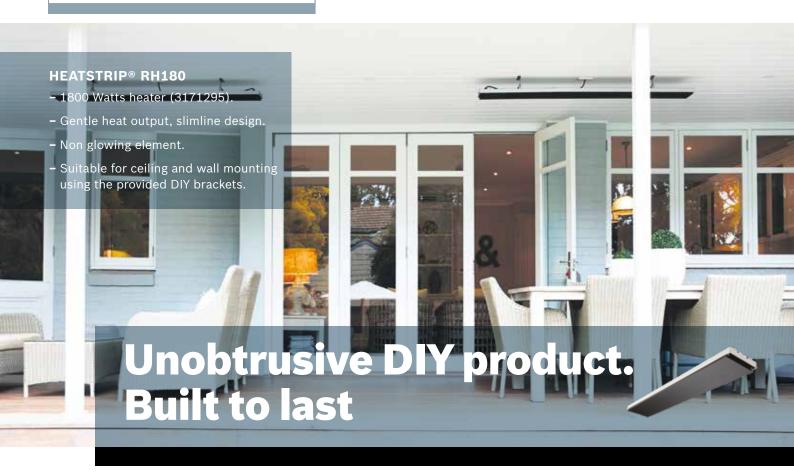

Optional Controllers

DIY (TT-MTR-PLUG)

3171309

HARDWIRED (TT-MTM)

3170737

TT-MTR-PLUG timer switch provides an easy DIY installation and remote control of plug-in heaters.

- Plug-in DIY timer switch
- On/Off function with LED indicators
- Automatic timer 1 / 2 / 4 hour options
- Remote control included
- Max. 10 amps, can be used with all heaters 2400W or less that do not include remote control as standard.



TT-MTM wall mounted controller and remote control provides ON/OFF control, 3 heat options and timer settings.

- $\bullet \ \mathsf{On/Off} \ \mathsf{function} \ \mathsf{with} \ \mathsf{LED} \ \mathsf{indicators}$
- Suitable for operation of single or multiple heaters
- 3 Heat settings High / Medium / Low
- Automatic timer control 1/2/4 hour options
- Must be hard-wired. Maximum 16 amps
- Remote control included
- Suitable to be used with all electric heaters that do not have remote control included as standard.



Mounting Options



Accessories



Standard brackets can be used for ceiling and wall mounting, or can be suspended by chains or wires.



Extension poles can be used to lower Heatstrip Heaters to the Ideal mounting heights.



Flush mount enclosures are available to recess heaters seamlessly into your ceiling.





High quality, robust, all black construction. Components are sub-assembled for easy final DIY installation.




2200W heater includes a high performance carbon filament electric infra-red element, providing instantaneous heat.



Ideal for indoor and outdoor use. In-built wheels for easy portability and storage.



TT-MTR-PLUG, Optional controller is available for easy DIY functions with LED indicators, 1/2/4 hour timer and remote control On/Off.

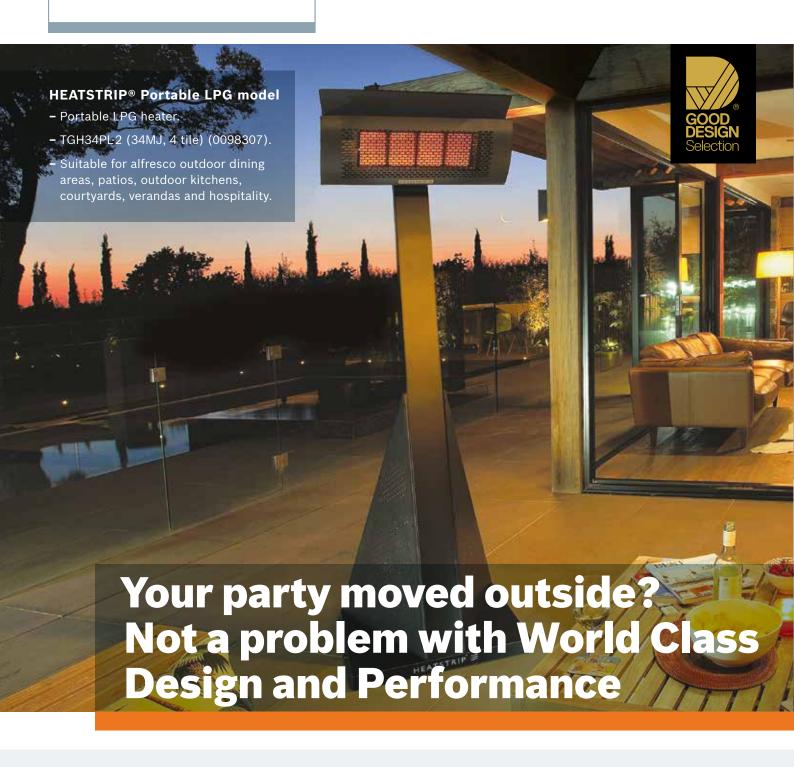



34MJ, 4 tile commercial grade ceramic burner, with market leading wind protection rating of 16km/hr.




Electronic, battery-operated finger pull On/Off controls, makes operation so easy and effortless.



Fully concealed gas pipes and bottle. In-built wheels for easy portability and storage.



TGHCOVER: Optional heater cover also available for your heater.

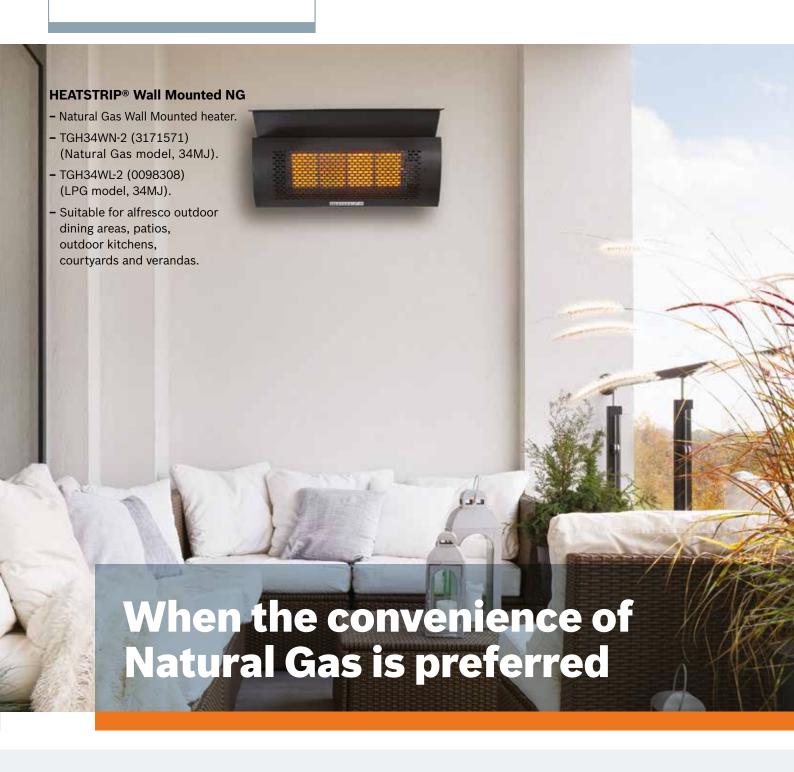



4 tile, 34MJ commercial ceramic burner, with world class wind protection rating of 16km/hr.



Electronic, battery-operated finger pull On/Off controls, makes operation so easy and effortless.



Heater built from Stainless Steel with high temperature paint coating.



The standard heat reflector ensures only 500mm overhead clearance is required. The optional HeatShield (TGHAC-003) 0098304 reduces this to 300mm clearance.



Technical Specifications

MODEL	Bunnings Item Number	Running Cost	Power (Watts)	Current (amps)	Dimensions (LxWxD)mm	Weight (kgs)	Lead Length (mm)	Plug	Heating Area (m²)	Standard Mounting Bracket	Flush Mount Kit	Extension Poles	
RH180 M	3171295	Construct 45c/hr	1800	dise allo 7.5	y construction 1104x165x48		black from 1000	t panel. Yes	3-4	3171584	3170740	0098309 (300mm) 0098310 (600mm) 0098311 (900mm) 0098312 (1200mm)	
CLASSIC WI	TH REMOTI	E Mate	erials of	Construc	tion: High tem	perature (ceramic co	ated ex	truded al	loy. IP55 Rate	d.		
THH2400RA	0261160	60c/hr	2400	10	1364x160x50	7	1000	Yes	4-5	ZBRAK-113B	THHAC-013	0098309 (300mm)	
THH3200AR	0261161	90c/hr	3200	13.5	1774x160x50	9	1000	No	5-6	ZBRAK-113B	THHAC-014	0098310 (600mm) 0098311 (900mm) 0098312 (1200mm)	
ELEGANCE V	VITH REMO	OTE & APP	P Mat	erials of	Construction:	High tem	perature o	ff-white	ceramic	coated extrud	ed alloy. IP5	5 Rated.	
THE2400R	0261162	60c/hr	2400	10	1204x170x48.		1000	Yes	4-5	3171585	0177027	3171579 (300mm)	
THE3200R	0261163	80c/hr	3200	15	1804x170x48.	5 9	1000	No	5-6	3171585	0177028	3171580 (600mm) 3171582 (900mm) 3171583 (1200mm)	
INTENSE	Materials (of Constru	ıction: H	igh temp	erature Black ,	off-White	ceramic	coated	extruded	alloy. IPX5 Rat	ted.		
THY2200	0027423	55c/hr	2200	9.2	1068x120x90	6	1000	Yes	5-9	0098313	0098301	BLACK:	
THY3200	0098300	80c/hr	3200	13	1270x120x90	7	1000	No	8-13	0098313	0177023	0098309 (300MM) 0098310 (600MM) 0098311 (900MM) 0098312 (1200MM) WHITE: 3171579 (300MM)	
THY2200W	0098298	55c/hr	2200	9.2	1068x120x90	6	1000	Yes	5-9	ZBRAK-132W	0177024		
THY3200W	0098299	80c/hr	3200	13	1270x120x90	7	1000	No	8-13	ZBRAK-132W	0177025	3171580 (600MM) 3171582 (900MM) 3171583 (1200MM)	
MAX DC WIT	Н REMOTE	Mater	ials of C	onstruct	ion: Anodised	alloy casir	ng and end	l caps, v	vith a pov	wder coated gr	rill (Black) IP	X5	
THX2400DCR	0261165	60c/hr	2400	10	0 983x170x80		1000	Yes	7-12	0098313	THXAC-034		
THX3600DCR	0261166	90c/hr	3600	15	1180x170x80	8	1000	No	11-18	0098313	THXAC-035	0098310 (600mm) 0098311 (900mm) 0098312 (1200mm)	
INTENSE PORT	TABLE Ma	aterials of C	onstructi	on: Heatei	r: Black anodized	alloy casin	g & end-cap	s, powde	r coated g	rille Stand: Powo	ler coated mile	l steel. IPX5 Rated	
THY2200P	0027424	55c/hr	2200	9.2	1068x2050x50	0 20	3000	Yes	5-9	NA	NA	NA	
MODEL	Bunnings Item Numb	PALITIES	MJ	Ignit	ion Dime	nsions	Runn Cos		Weigh (Kg)			Type Accessories	
PORTABLE LPG					nless steel (43 er coated finis		high temp	erature	paint coa	ating.			
TGH34PL-2	0098307		34	Electr finger	onic 650×65	70x2118	\$2.00	/Hr	31.5	16	LF	0098304 Cover 3171575	
WALL MOUN	TED GAS H	IEATERS	Mate	ials of C	onstruction: H	ead: Stain	less steel	(430ss)	with high	n temperatur <u>e</u>	paint coatin	g	
TGH34WN-2	3171571 4		34	Electi finger	650Y1	650x190x380		68c/Hr		16	Nati Ga	TGHAC-003	
TGH34WL-2*	0098308 4		34	Electi	650Y1	650x190x380		\$2.00/Hr		16	LP	Extension Pole TGHAC-004 (0098305)	

Heatstrip | page 12 www.heatstrip.com.au