


DIGITAL UPS SYSTEM

Model: SMX1000LCD

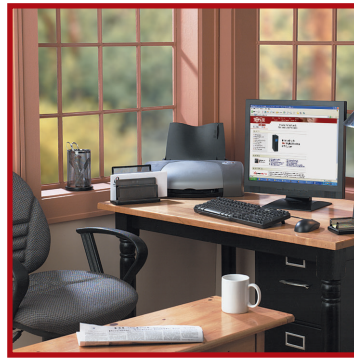

Power Protection is No Longer Invisible

You **know** you're well protected because you can **see** Tripp Lite's new Digital UPS System in action!

**Stands
Vertically...**

**...or Lies
Horizontally!**

LCD screen can be rotated
for easy viewing in any position!

The SMX1000LCD Digital UPS System protects and supports computer systems and home electronics through blackouts, low power conditions and power surges. It is perfect for PCs, monitors, modems, printers, scanners, speakers, external drives, home entertainment components and more. Reliable battery backup keeps computers and monitors up and working through short blackouts, allowing enough time to safely shut down during longer ones. All AC outlets stop damaging power surges and filter disruptive line noise. In addition, a rotatable Liquid Crystal Display (LCD) Status Screen shows input voltage and operating conditions in real time.

MAIN FEATURES:

- 1000 VA of long-lasting battery backup power-230V, 50/60Hz
- Automatic Voltage Regulation (AVR) stabilizes incoming utility power by correcting low voltage conditions without draining battery power
- 6 IEC-C13 outlets (3 battery backup/surge protected and 3 surge-only protected) safeguard an entire computer or home entertainment system
- Built-in phone/DSL surge protection safeguards equipment on a single phone, fax or modem line
- Versatile cabinet design adapts to both rackmount (occupies only 2 standard rack units) and tower applications
- Built-in USB port and PowerAlert Software (FREE via web download) provide safe, unattended system shutdown during extended blackouts
- C14 AC input connection supports a wide variety of country-specific high-voltage international plug sets
- 2 FREE C13-to-C14 output power cables, 1 FREE USB cable and 1 FREE phone cord
- Power button offers convenient, one-touch power control
- 2-year product warranty

SPECIFICATIONS

Model	Output Capacity (VA/Watts)	Backup Time (Typical Minutes) Half/Full Load*	Input/Output Voltage/Frequency Line Mode	AC Receptacles (IEC-C13)	Communication Port	Phone/DSL Surge Protection	AC Input Connection Type	Unit Dimensions H x W x D (cm)**	Shipping Weight (kg)
SMX1000LCD	1000/500	11/3	230VAC, 50/60 Hz.	6 (3 UPS/surge & 3 surge-only)	1 USB	1 line	C14	30.5 x 8.9 x 16.5	7.1

* Backup times will vary depending on battery condition and load. ** Dimensions listed represent a vertical ("tower") position. The SMX1000LCD can also be placed in a horizontal position. Rackmounting requires an optional rackmount shelf, available separately from Tripp Lite. The policy of Tripp Lite is one of continuous improvement. Specifications are subject to change without notice. Actual product may differ slightly from photos.

Complete line of Digital UPS Systems available from Tripp Lite.

Visit www.tripplite.com for details.

For more information,
email:
salesint@tripplite.com



1111 W. 35th Street, Chicago, IL 60609
(773) 869-1212 • www.tripplite.com