JT3800SH

GE® 30" Built-In Combination Microwave Wall Oven

runners

DIMENSIONS AND INSTALLATION INFORMATION

NOTE: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

INSTALLATION INFORMATION:


Before installing, consult installation instructions packed with product for current dimensional data.

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

NOTE: These ovens are not approved for stackable or side-by-side installations.

| KW RATING | |
|--------------|---------|
| 240V | 6.4 |
| 208V | 5.6 |
| BREAKER SIZE | |
| 240V | 30 Amps |
| 208V | 30 Amps |

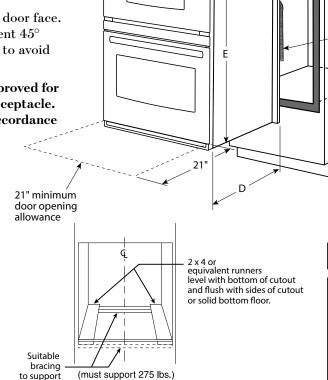

Cutout depth Cutout width 28-1/2" MIN. 28-5/8" MAX. (Junction box may be located Cutout height 42-3/16" MIN. 42-1/4" MAX. Recommended minimum cutout location from the floor 21-5/8" 30"

ATTENTION INSTALLER: All electric wall ovens must be hard-wired (direct-wired) into an approved junction box. A plug and receptacle is NOT permitted on these products.

NOTE: If the cabinet does not have a solid bottom. two braces or runners must be installed to support the weight of the oven. For single ovens, the runners and braces must support 200 lbs (91 kg). For double ovens, the runners and braces must support 375 lbs.

NOTE: If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.

NOTE: If the cabinet does not have a front frame and the sides are less than 3/4" (1.9 cm) thick, shim both sides equally to establish the cutout width.

| Cabinet | 30" |
|--------------------------------------------------|---------|
| A – Overlap of oven at top of cutout | 1" |
| B – Overlap of oven over side of edges of cutout | 3/4" |
| C – Overlap of oven at bottom of cutout | 1" |
| Oven | |
| D – Install depth | 23-1/2" |
| E – Overall height with trim | 43-3/8" |
| F – Overall width | 29-3/4" |



9-1/2" MAX.

Right side only

Conduit

23-1/2" MIN.

Junction box

in ádjacent


28" MIN. to

bottom of

iunction box

location

cabinet)







Listed by Underwriters Laboratories

JT3800



JT3800SH

GE® 30" Built-In Combination Microwave Wall Oven

FEATURES AND BENEFITS

1.7 cu. ft. microwave capacity (1000 watts (IEC-705 test procedure

Sensor cooking controls (upper oven) – Provide a built-in sensor in the upper microwave that automatically calculates and adjusts cooking times and power levels for favorite foods

16" turntable (upper oven) – Rotates food throughout the cooking cycle for even cooking results

Self-clean with steam clean option (lower oven) - Clean your oven the way you want

Self-clean heavy-duty oven racks (lower oven) – Conveniently clean your oven and racks together

Glass touch controls - Set temperatures quickly and clean with little effort

Halogen interior oven lighting (lower oven) - Easily see how your food is baking

Ten-pass bake element (lower oven) – Even baking is assured with heat that covers more surface area

Eight-pass broil element (lower oven) – Get full broil coverage and even browning from edge to edge

Model JT3800SHSS - Stainless steel



