



MEASUREMENT REPORT

FCC Part 15.407 UNII 802.11a/n/ac

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Korea

Date of Testing:

02/16-03/09/2015

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

OY1503240643.A3L

FCC ID:

A3L404SC

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model(s):

404SC

EUT Type:

Portable Handset

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15.407

Test Procedure(s):

KDB 789033 D02 v01, KDB 644545 v01r02, KDB 648474 D03 v01r02,
KDB 662911 D01 v02r01

Mode	UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT2		MIMO	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11a	1	20	5180 - 5240	12.303	10.90	13.996	11.46	N/A	
	2A	20	5260 - 5320	12.050	10.81	12.882	11.10		
	2C	20	5500 - 5720	14.028	11.47	13.900	11.43		
	3	20	5745 - 5825	12.764	11.06	13.964	11.45		
802.11n	1	20	5180 - 5240	11.967	10.78	13.868	11.42	25.753	14.11
	2A	20	5260 - 5320	12.106	10.83	12.912	11.11	24.724	13.93
	2C	20	5500 - 5720	13.868	11.42	13.836	11.41	26.621	14.25
	3	20	5745 - 5825	12.445	10.95	13.836	11.41	26.281	14.20
802.11ac	1	20	5180 - 5240	11.117	10.46	10.765	10.32	21.780	13.38
	2A	20	5260 - 5320	10.864	10.36	10.069	10.03	20.934	13.21
	2C	20	5500 - 5720	11.194	10.49	11.143	10.47	22.337	13.49
	3	20	5745 - 5825	11.169	10.48	10.666	10.28	21.783	13.38
802.11n	1	40	5190 - 5230	11.429	10.58	10.990	10.41	22.318	13.49
	2A	40	5270 - 5310	13.274	11.23	12.735	11.05	26.009	14.15
	2C	40	5510 - 5710	13.521	11.31	13.552	11.32	27.073	14.33
	3	40	5755 - 5795	13.366	11.26	13.740	11.38	26.984	14.31
802.11ac	1	40	5190 - 5230	10.864	10.36	10.691	10.29	21.455	13.32
	2A	40	5270 - 5310	10.839	10.35	9.817	9.92	20.657	13.15
	2C	40	5510 - 5710	10.069	10.03	10.399	10.17	20.399	13.10
	3	40	5755 - 5795	9.840	9.93	10.691	10.29	20.531	13.12
802.11ac	1	80	5210	10.116	10.05	10.568	10.24	20.684	13.16
	2A	80	5290	9.441	9.75	9.638	9.84	19.079	12.81
	2C	80	5530 - 5610	9.661	9.85	10.568	10.24	20.229	13.06
	2C	80	5530 - 5690	9.661	9.85	10.568	10.24	20.229	13.06
	3	80	5775	9.290	9.68	10.304	10.13	19.594	12.92

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01 and KDB 644545 v01r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortañez
President







FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: OY1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 1 of 214

TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 PCTEST TEST LOCATION	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES	5
2.3 TEST CONFIGURATION	6
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	6
3.0 DESCRIPTION OF TEST	7
3.1 EVALUATION PROCEDURE	7
3.2 AC LINE CONDUCTED EMISSIONS	7
3.3 RADIATED EMISSIONS	8
3.4 ENVIRONMENTAL CONDITIONS	8
4.0 ANTENNA REQUIREMENTS	9
5.0 TEST EQUIPMENT CALIBRATION DATA	10
6.0 TEST RESULTS	11
6.1 SUMMARY	11
6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N/AC	12
6.3 6DB BANDWIDTH MEASUREMENT – 802.11A/N/AC	45
6.4 UNII OUTPUT POWER MEASUREMENT – 802.11A/N/AC	56
6.5 MAXIMUM POWER SPECTRAL DENSITY – 802.11A/N/AC	64
6.6 FREQUENCY STABILITY	108
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS – ABOVE 1GHZ	112
6.7.1 ANTENNA-1 RADIATED SPURIOUS EMISSION MEASUREMENTS	115
6.7.2 ANTENNA-2 RADIATED SPURIOUS EMISSION MEASUREMENTS	127
6.7.3 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)	139
6.7.4 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)	146
6.7.5 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)	153
6.7.6 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)	160
6.7.7 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)	167
6.7.8 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)	174
6.7.9 MIMO RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)	181
6.7.10 MIMO RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)	188
6.7.11 MIMO RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)	195
6.8 RADIATED SPURIOUS EMISSIONS MEASUREMENTS – BELOW 1GHZ	202
6.9 LINE-CONDUCTED TEST DATA	206
7.0 CONCLUSION	214

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 2 of 214



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.

APPLICANT ADDRESS: 129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Korea

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

BASE MODEL: 404SC

FCC ID: A3L404SC

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

Test Device Serial No.: 1C129, 1C4E6, 1C0C3, 1C0C4 ☐ Production ☒ Pre-Production ☐ Engineering

DATE(S) OF TEST: 02/16-03/09/2015



TEST REPORT S/N: 0Y1503240643.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 3 of 214

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

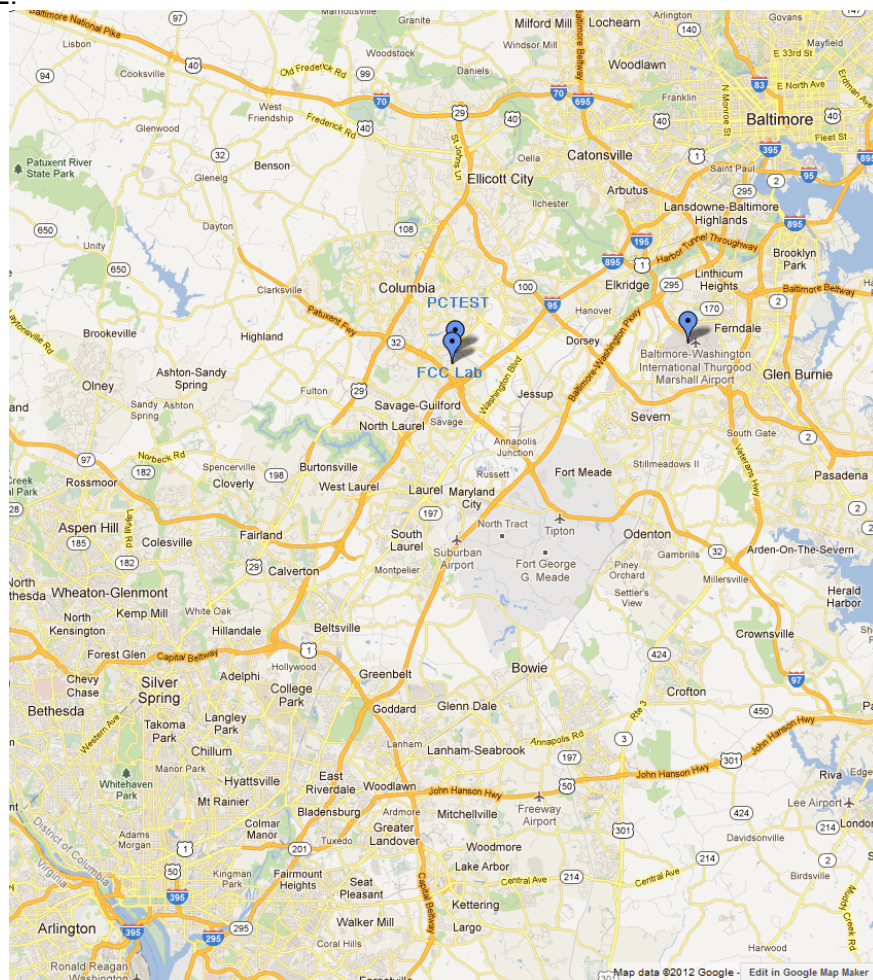


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 4 of 214

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3L404SC**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

Note: The circuitry for this device is electrically identical to a device bearing the FCC ID: A3LSC04G. Thus, the data found within this report was taken from the A3LSC04G.

Note: 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO
5GHz	a	98.6	98.6	N/A
	n (HT20)	98.0	98.0	98.5
	ac (HT20)	98.0	98.0	98.5
	n (HT40)	98.0	98.0	95.0
	ac (HT40)	98.0	98.0	95.0
	ac (HT80)	94.0	94.6	90.9

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM	
		ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✓	✗	✗
	11n (20MHz)	✓	✓	✓	✓
	11n (40MHz)	✓	✓	✓	✓
	11ac (80MHz)	✓	✓	✓	✓



Table 2-1. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
 13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)
 29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325,
 351/390, 390/433.3 (ac – 80MHz BW)

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset	Page 5 of 214	



2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3L404SC was tested per the guidance of KDB 789033 D02 v01. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 6.2, 6.3, 6.4, and 6.5 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r02. Additional radiated spurious emission measurements were performed with the EUT lying flat on a certified wireless charging pad while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset	Page 6 of 214	

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 D02 v01 were used in the measurement of **Samsung Portable Handset FCC ID: A3L404SC**.

Deviation from measurement procedure.....None



3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 7 of 214

3.3 Radiated Emissions



The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 8 of 214

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Samsung Portable Handset FCC ID: A3L404SC** unit complies with the requirement of §15.203.

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825



Table 4-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550		
				:	:		
				142	5710	159	5795

Table 4-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 4-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset				Page 9 of 214

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/25/2014	Annual	3/25/2015	N/A
-	RE3	Radiated Emissions Cable Set	10/17/2014	Annual	10/17/2015	N/A
-	WL25-1	Conducted Cable Set (25GHz)	10/14/2014	Annual	10/14/2015	N/A
-	WL40-1	Conducted Cable Set (40GHz)	10/14/2014	Annual	10/14/2015	N/A
Agilent	8447D	Broadband Amplifier	6/2/2014	Annual	6/2/2015	1937A03348
Agilent	8447D	Broadband Amplifier	5/30/2014	Annual	5/30/2015	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	5/8/2014	Annual	5/8/2015	MY52350166
Agilent	N9038A	MXE EMI Receiver	3/3/2014	Annual	3/3/2015	MY51210133
Anritsu	MA2411B	Pulse Sensor	4/8/2014	Biennial	4/8/2016	846215
Anritsu	ML2495A	Power Meter	10/31/2013	Biennial	10/31/2015	941001
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	6/26/2013	Biennial	6/26/2015	121034
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Espec	ESX-2CA	Environmental Chamber	4/16/2014	Annual	4/16/2015	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/8/2014	Biennial	4/8/2016	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	130993
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	10/15/2014	Annual	10/15/2015	251425001
K & L	11SH10-3075/U18000	High Pass Filter	12/1/2014	Annual	12/1/2015	2
K & L	6000/T18000	High Pass Filter	12/1/2014	Annual	12/1/2015	1
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	10/17/2014	Annual	10/17/2015	N/A
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	3/27/2014	Annual	3/27/2015	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/21/2014	Annual	5/21/2015	100348
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2014	Annual	3/5/2015	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/12/2014	Annual	3/12/2015	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	5/15/2014	Annual	5/15/2015	100037
Seekonk	NC-100	Torque Wrench (8" lb)	3/18/2014	Biennial	3/18/2016	N/A
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	6/20/2013	Biennial	6/20/2015	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140336

Table 5-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 10 of 214

6.0 TEST RESULTS

6.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3L404SC
 Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
N/A	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
15.407(e)	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 6.3
15.407 (a.1)	Maximum Conducted Output Power	< 250mW (23.98dBm) (5150-5250MHz) < 250mW (23.98dBm) (5250-5350MHz) < 250mW (23.98dBm) (5470-5725MHz) < 1W (30dBm) (5725-5850MHz)		PASS	Section 6.4
15.407 (a.1), (5)	Maximum Power Spectral Density	< 11 dBm/MHz (5150-5250MHz, 5250-5350MHz, 5470-5725MHz) < 30 dBm/500kHz (5725-5850MHz)		PASS	Section 6.5
15.407(g)	Frequency Stability	N/A		PASS	Section 6.6
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2),(3)	Undesirable Emissions	< -27 dBm/MHz EIRP (outside 5150-5350MHz, 5470-5725MHz, 5715-5860MHz) < -17 dBm/MHz EIRP (within 5715-5725MHz and 5850-5860MHz)	RADIATED	PASS	Section 6.7
15.205, 15.407(b.1), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 6.7, 6.8
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 6.9

Table 6-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation", Version 3.4.

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset	Page 11 of 214	

6.2 26dB Bandwidth Measurement – 802.11a/n/ac

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

KDB 789033 D02 v01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-1. Test Instrument & Measurement Setup

Test Notes



None.


FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 12 of 214

Antenna-1 26 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	21.23
	5200	40	a	6	21.44
	5240	48	a	6	21.33
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	21.51
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.51
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	21.56
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.86
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.87
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	81.17
Band 2A	5260	52	a	6	21.47
	5280	56	a	6	21.48
	5320	64	a	6	21.58
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	21.42
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	21.43
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	21.35
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.64
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.74
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.39
Band 2C	5500	100	a	6	21.33
	5580	116	a	6	21.47
	5720	144	a	6	21.71
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.46
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.66
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	24.87
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.95
	5550	110	n (40MHz)	13.5/15 (MCS0)	40.02
	5710	142	n (40MHz)	13.5/15 (MCS0)	40.09
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	81.94
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.62

Table 6-2. Conducted Bandwidth Measurements

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 13 of 214

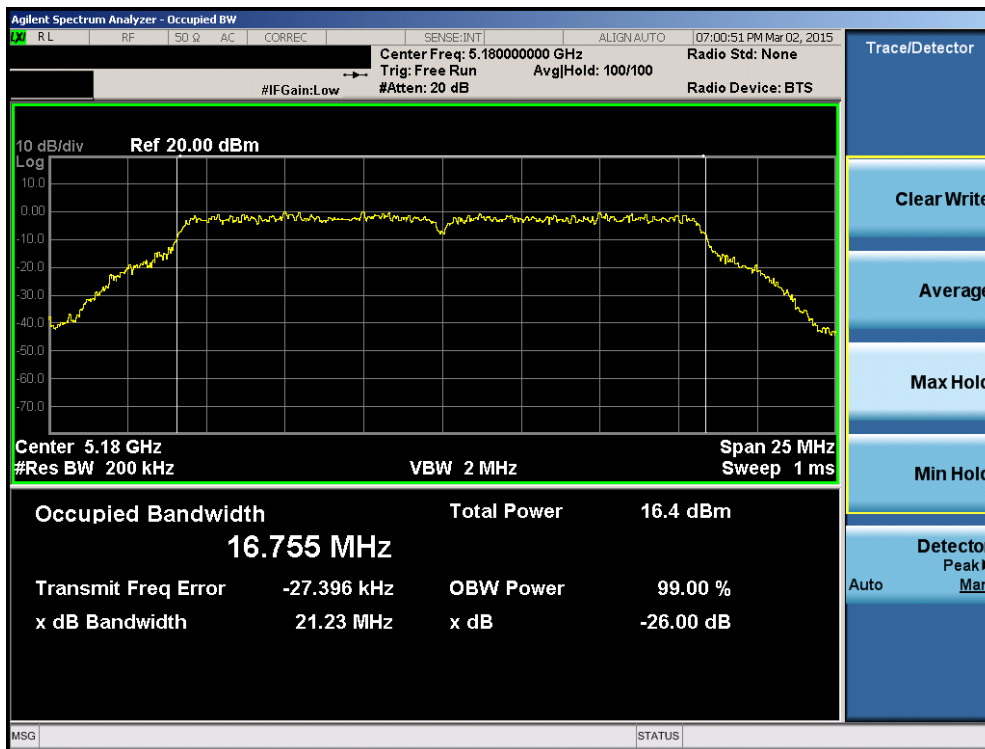


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

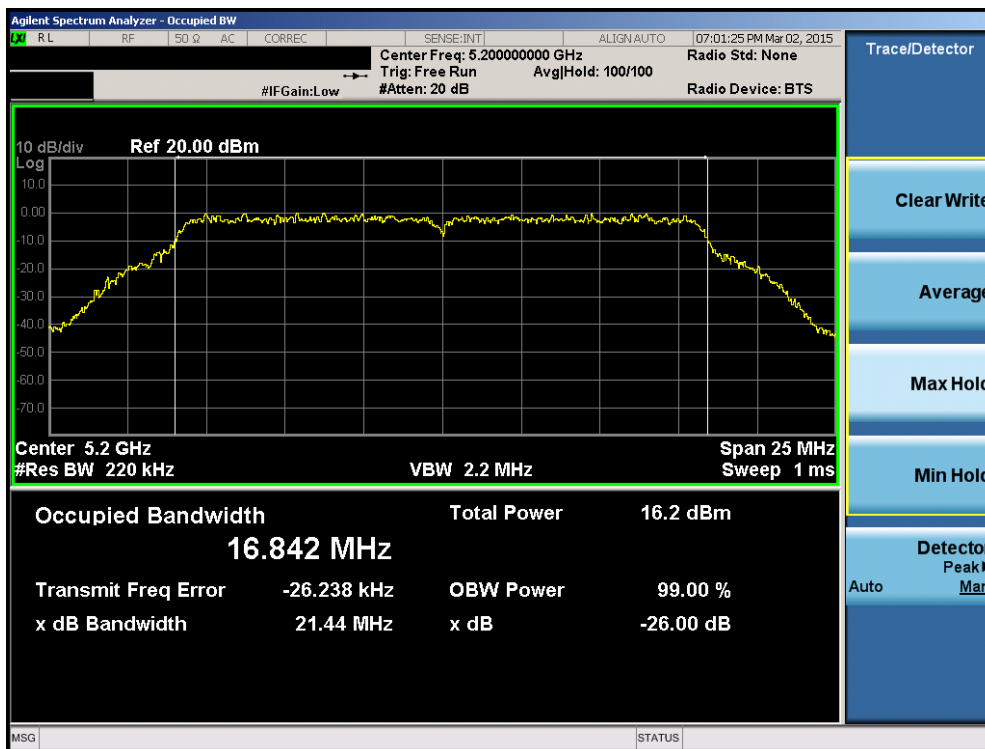


Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 14 of 214

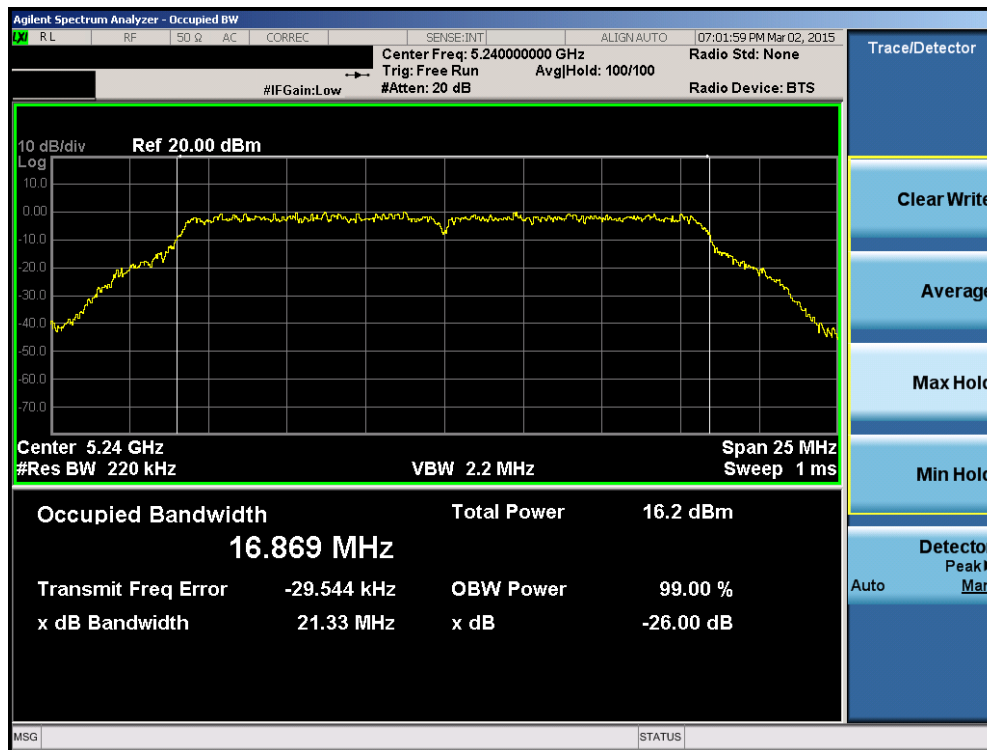


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

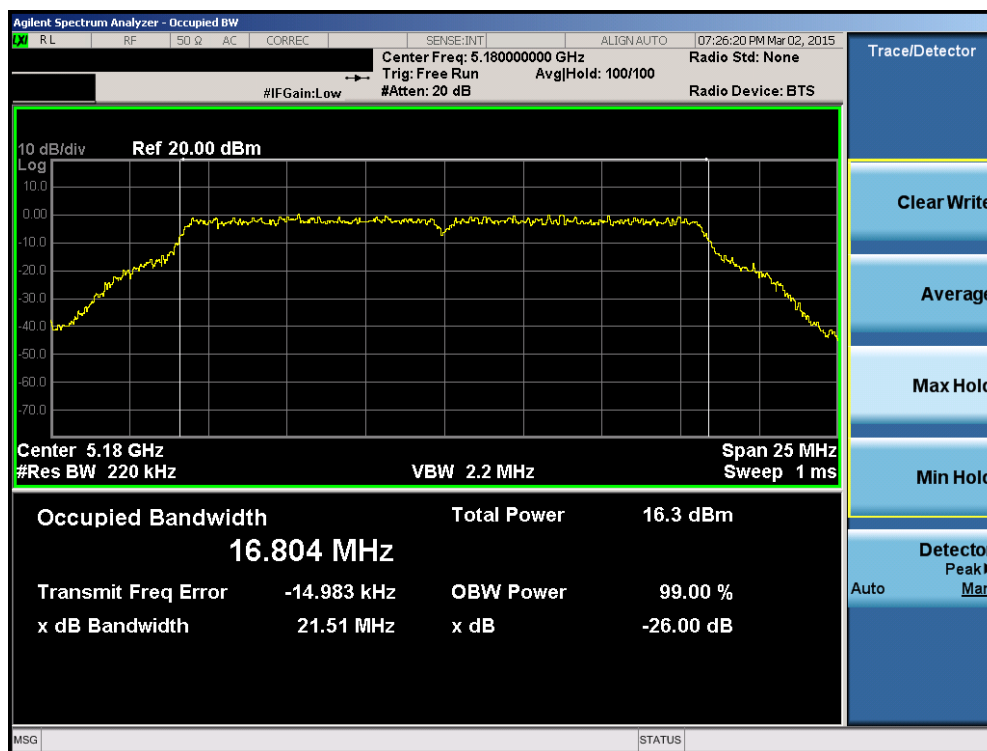


Plot 6-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 15 of 214

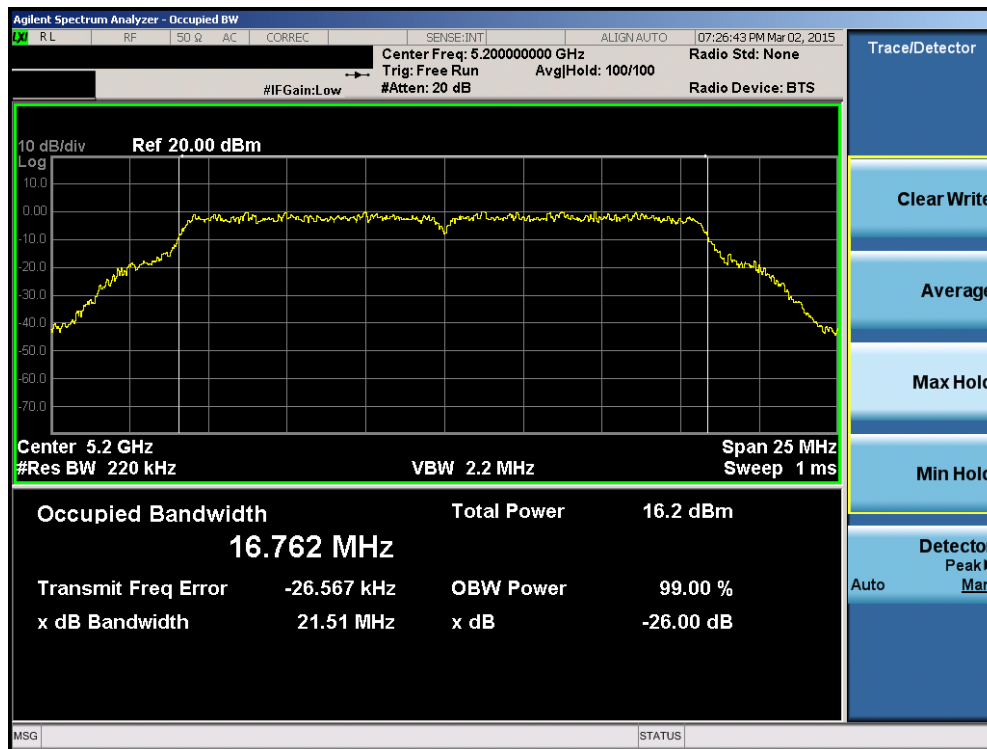


Plot 6-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

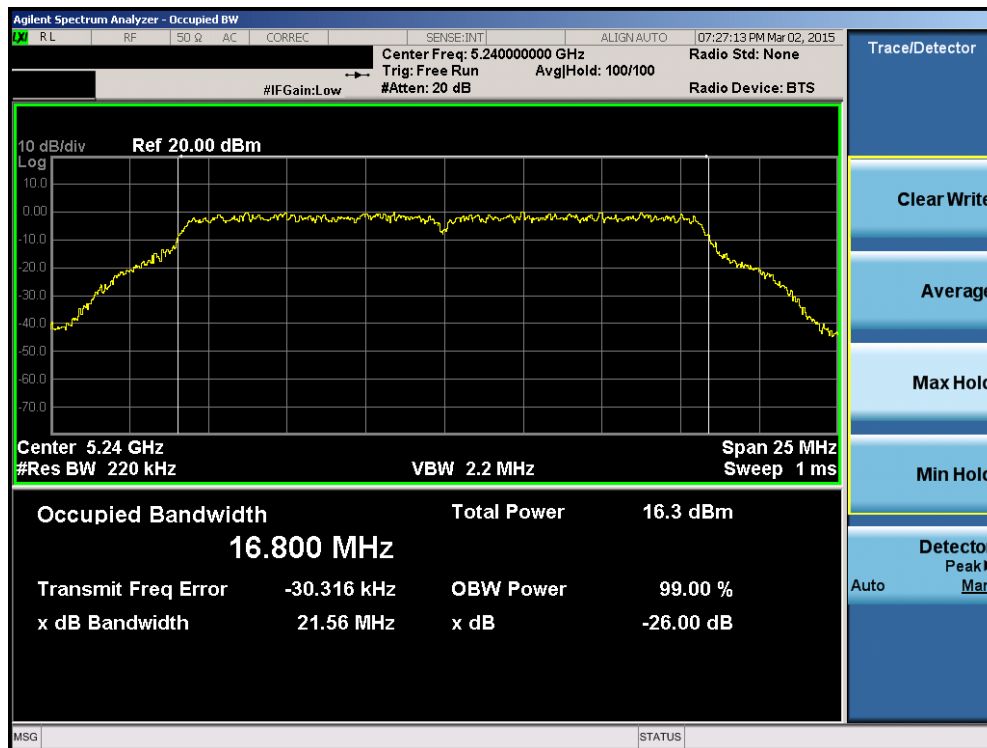


Plot 6-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 16 of 214

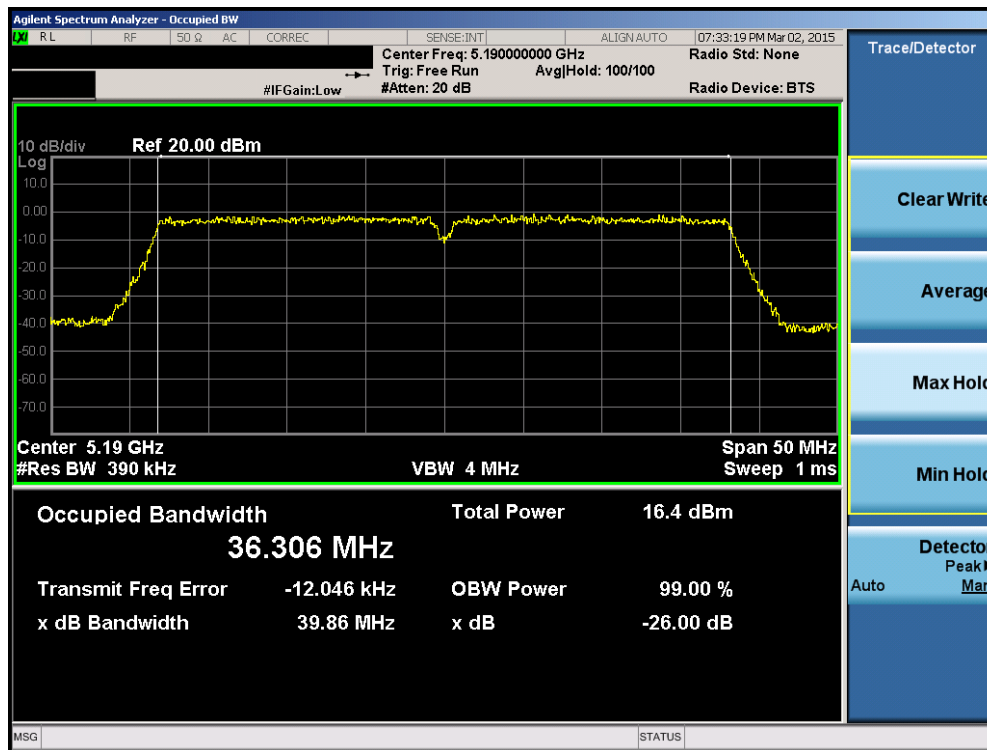


Plot 6-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

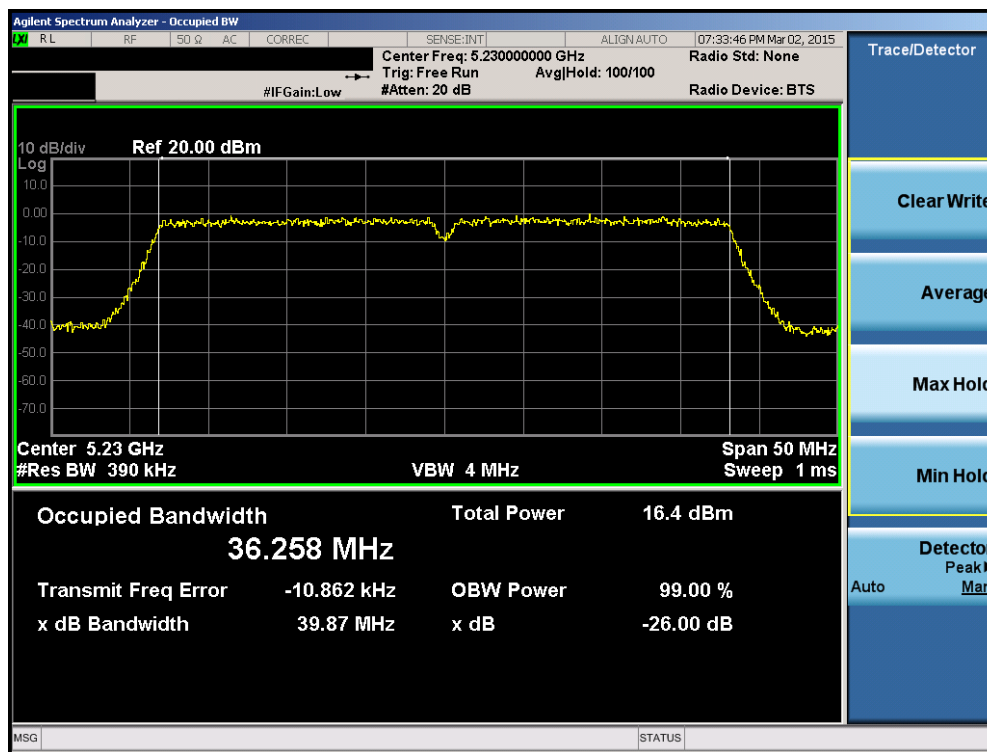


Plot 6-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 17 of 214

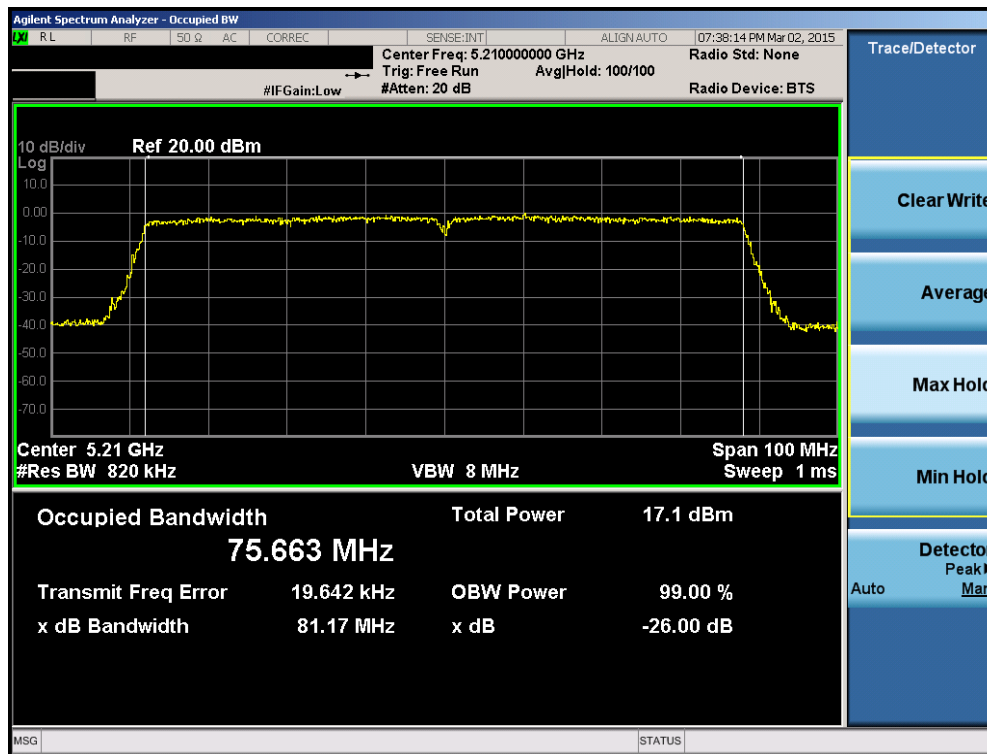


Plot 6-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

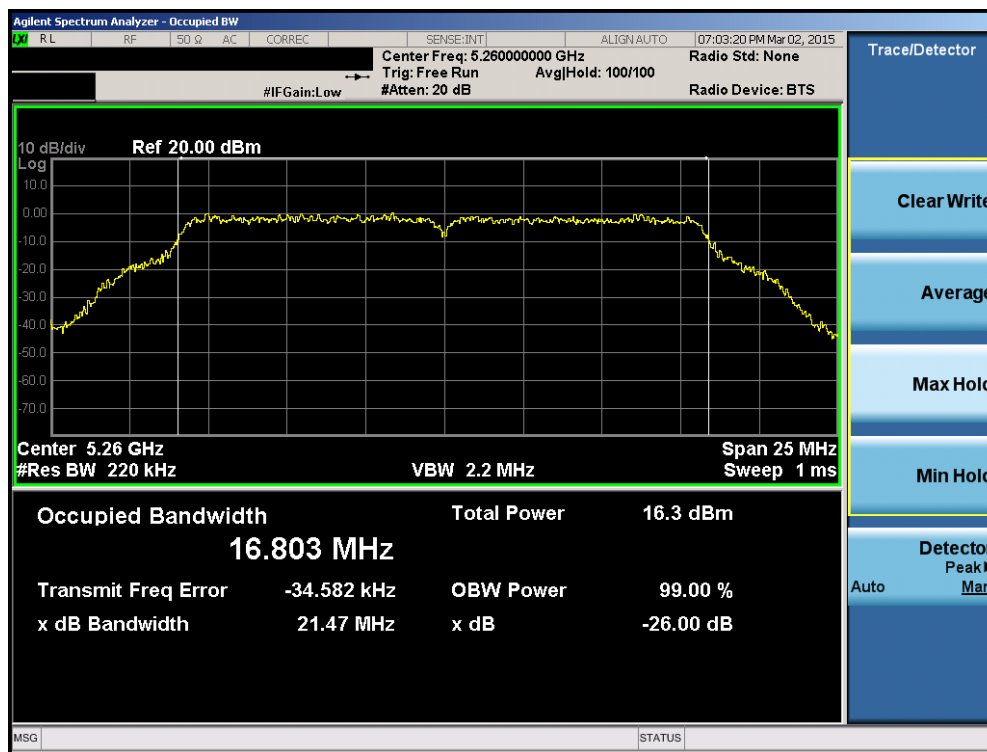


Plot 6-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 18 of 214

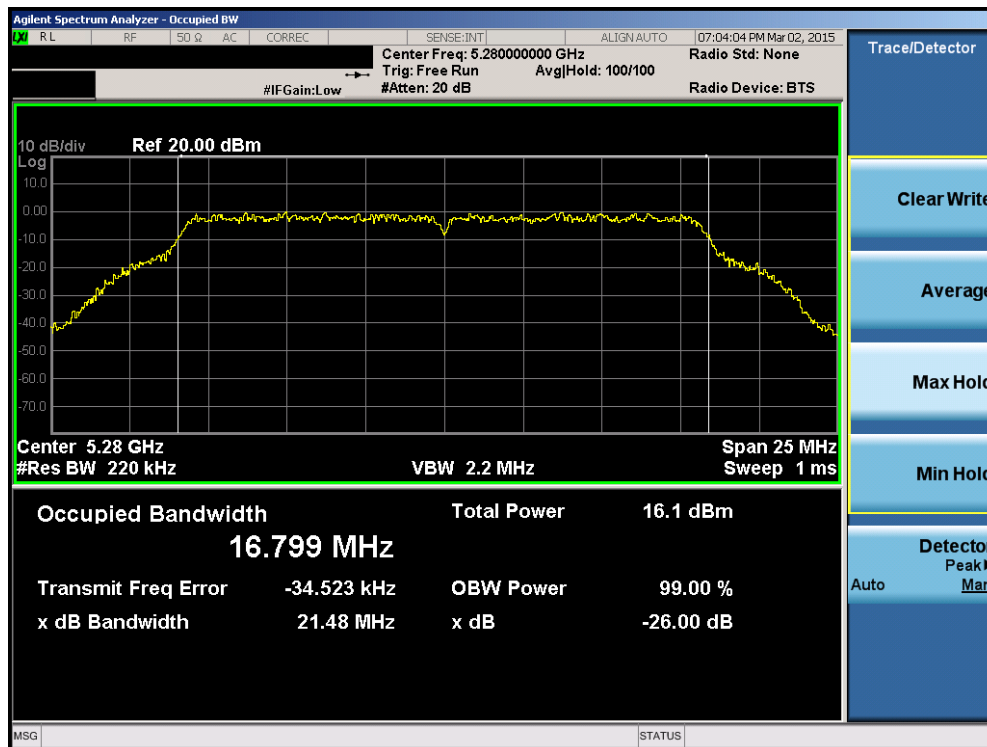


Plot 6-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

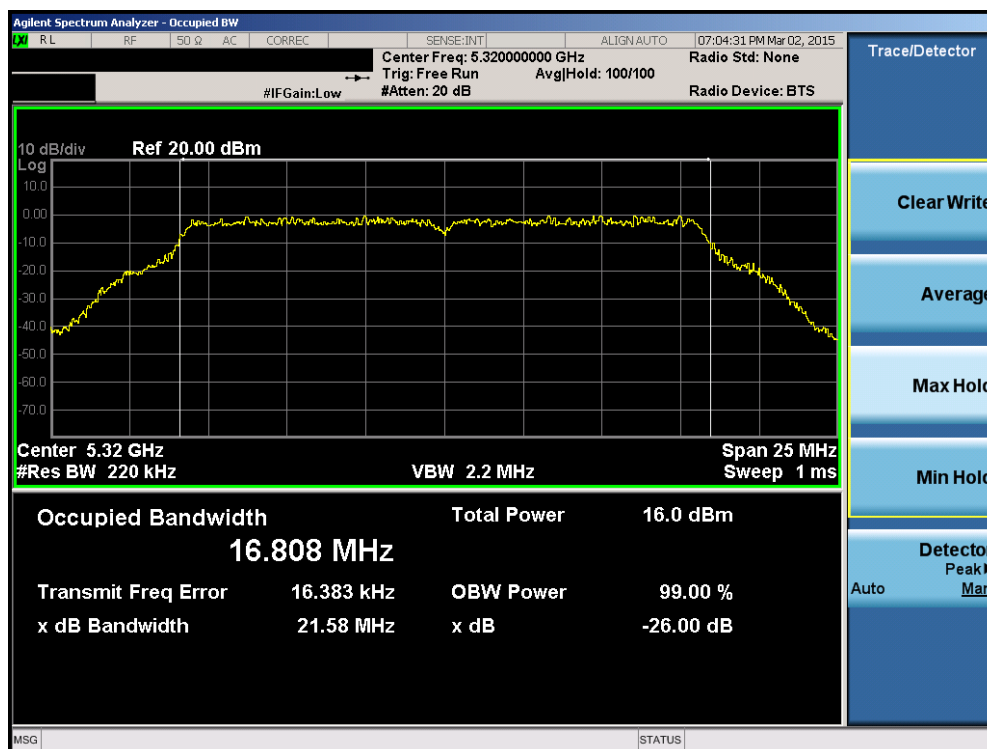


Plot 6-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 19 of 214

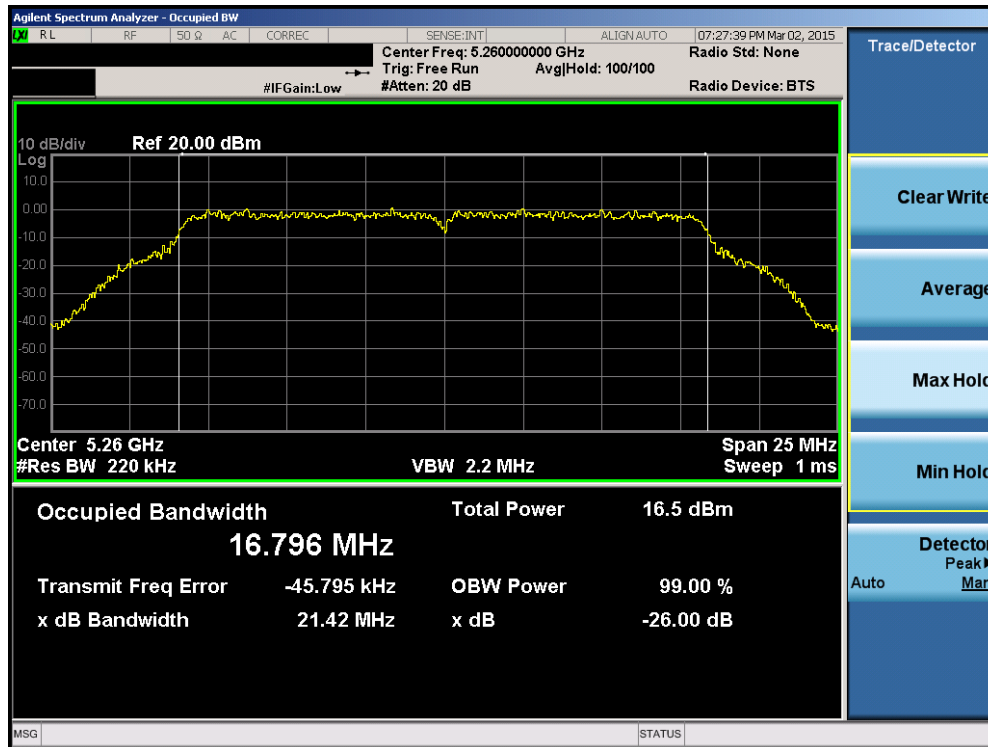


Plot 6-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

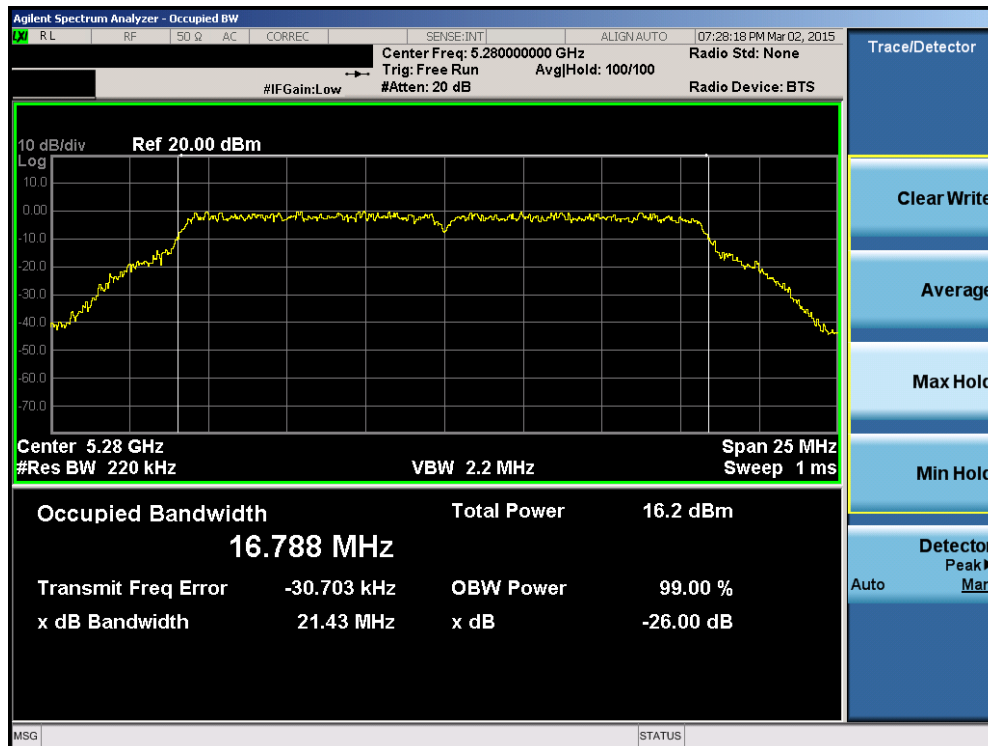


Plot 6-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 20 of 214

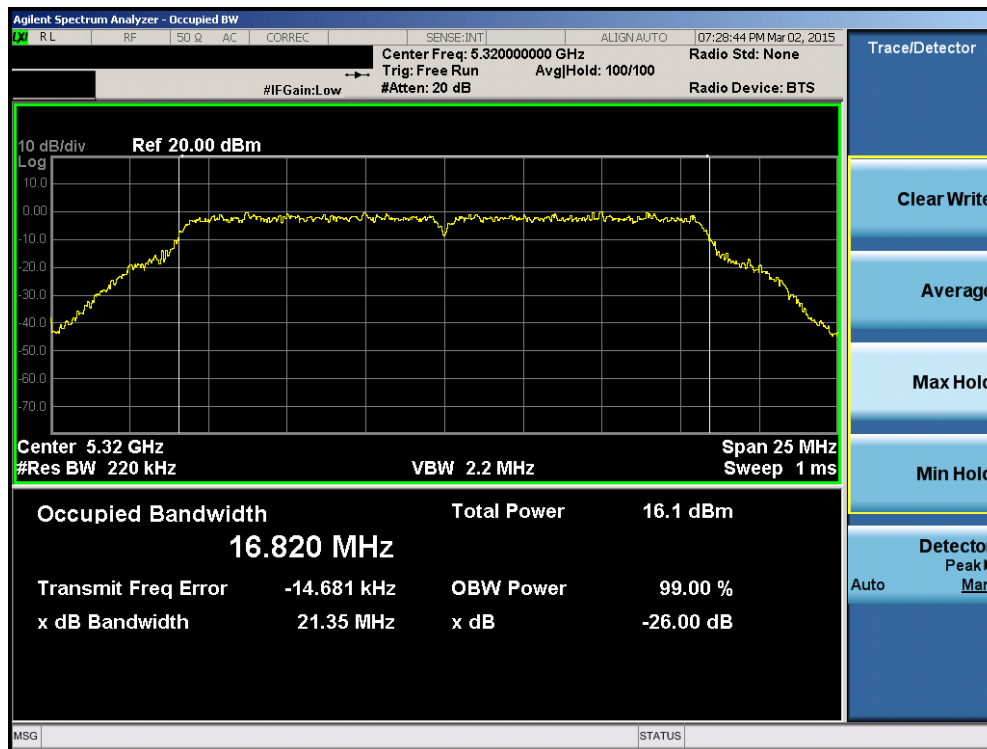


Plot 6-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

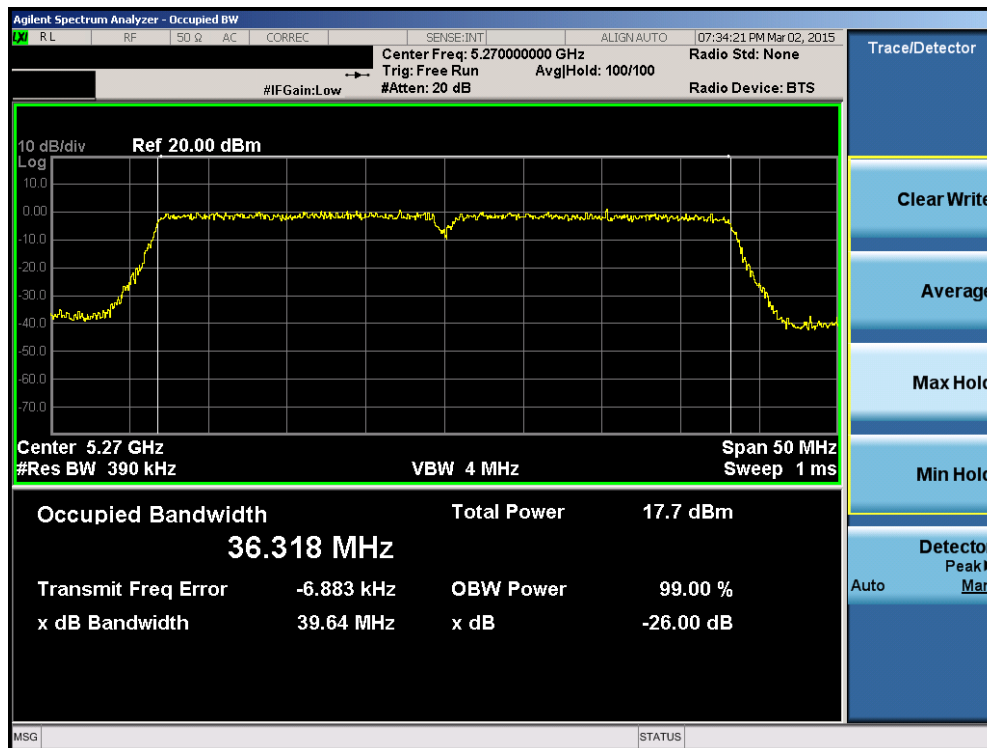


Plot 6-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 21 of 214

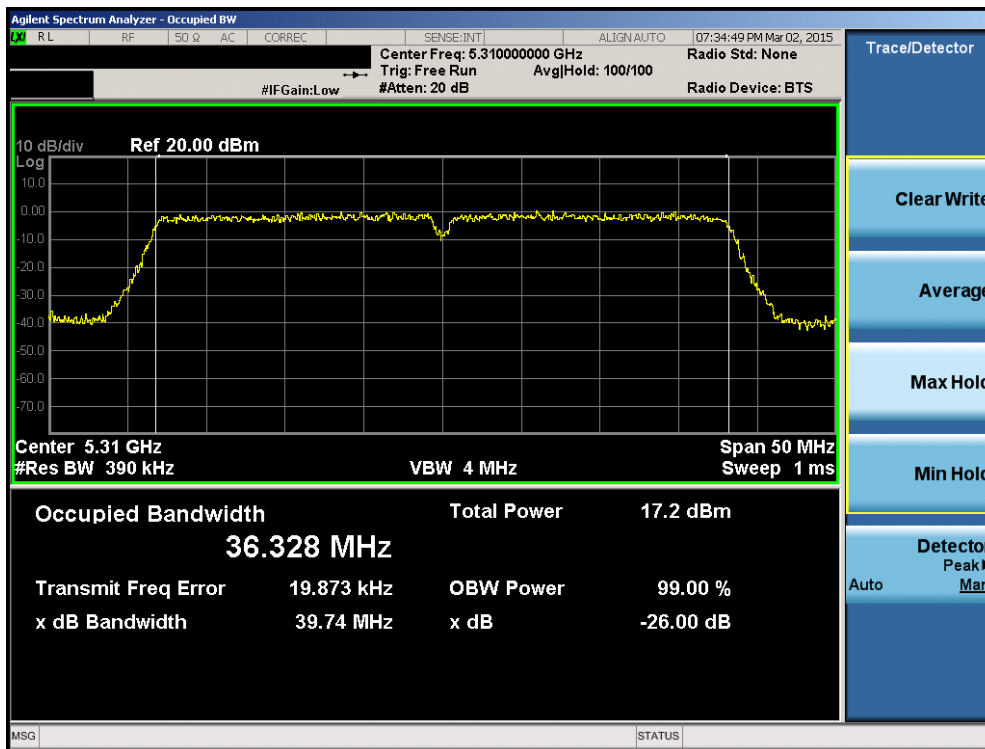


Plot 6-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

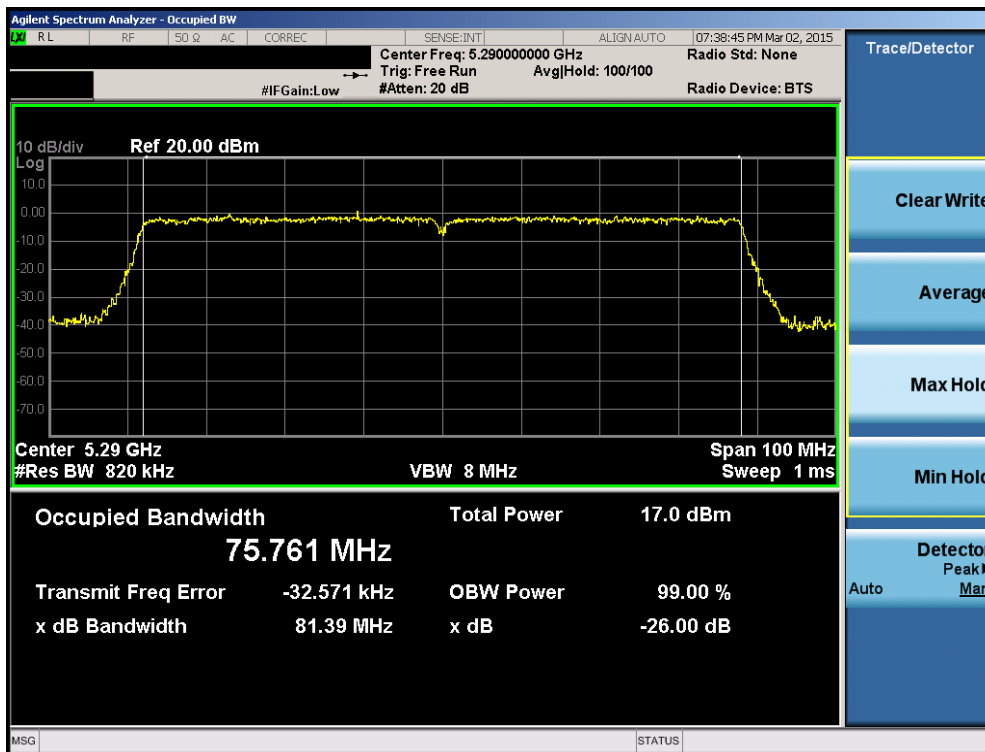


Plot 6-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 22 of 214

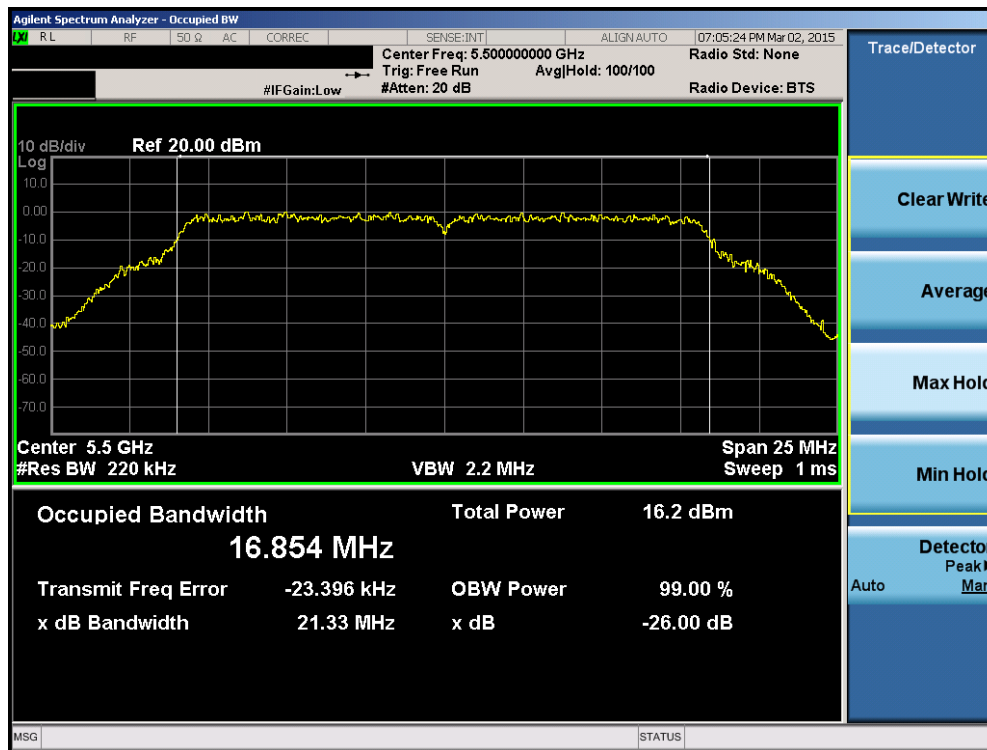


Plot 6-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

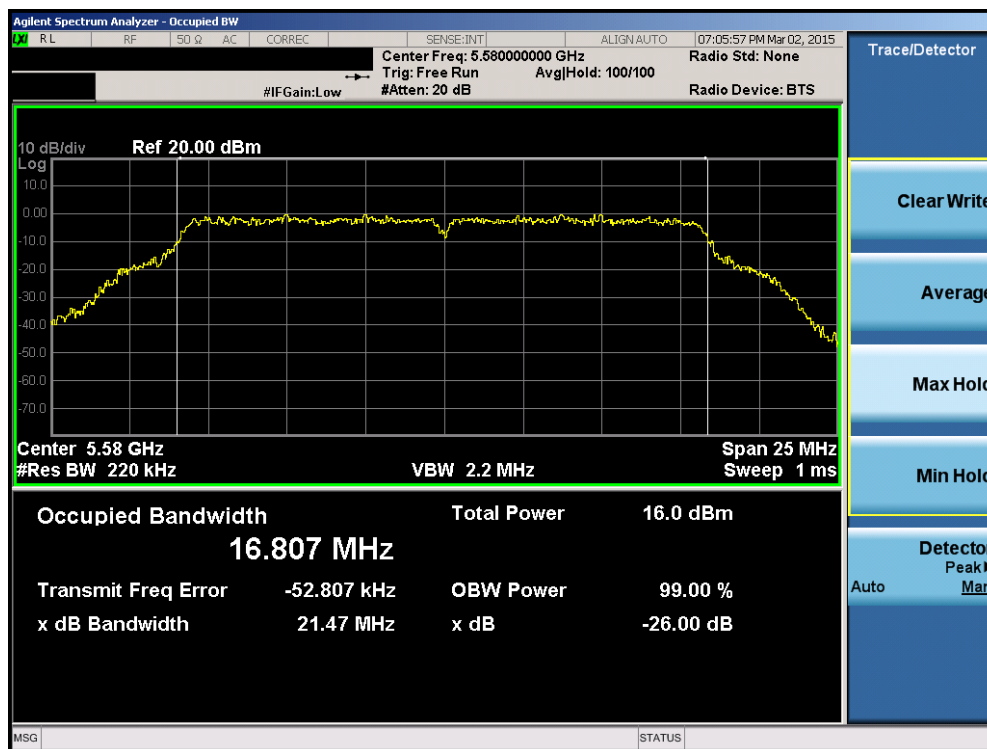


Plot 6-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 23 of 214

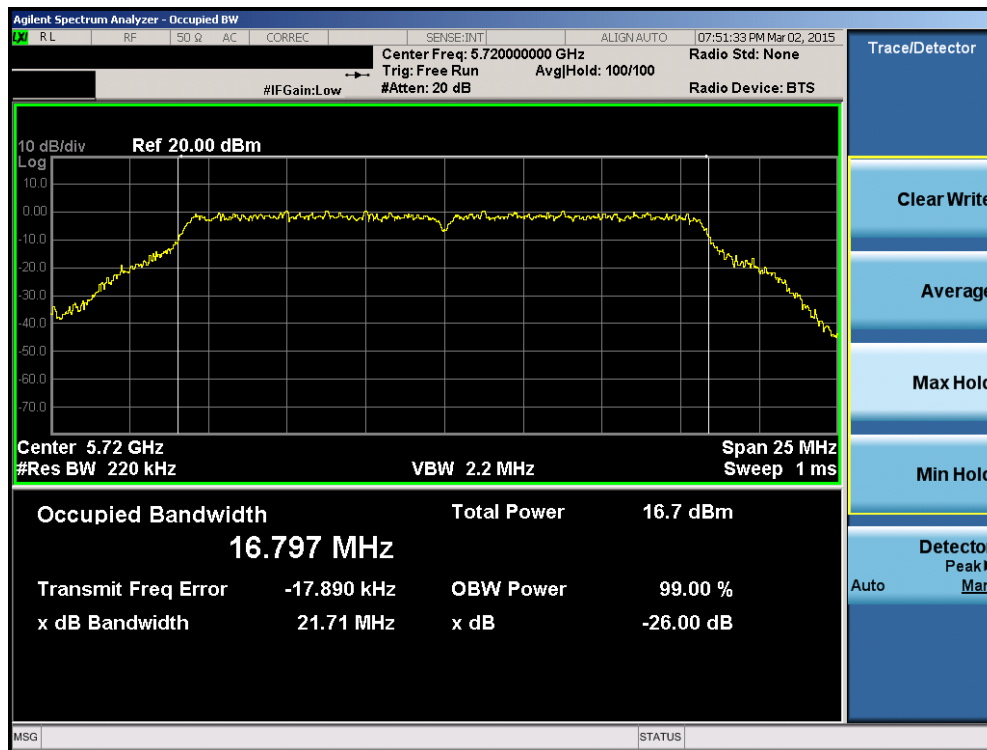


Plot 6-21. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

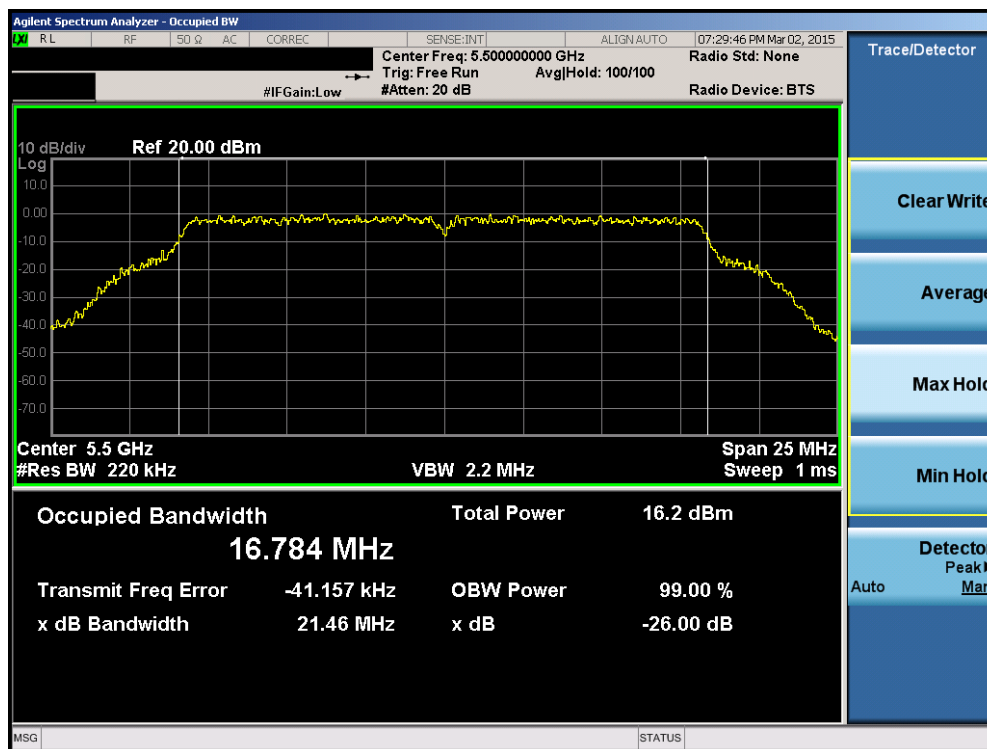


Plot 6-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 24 of 214

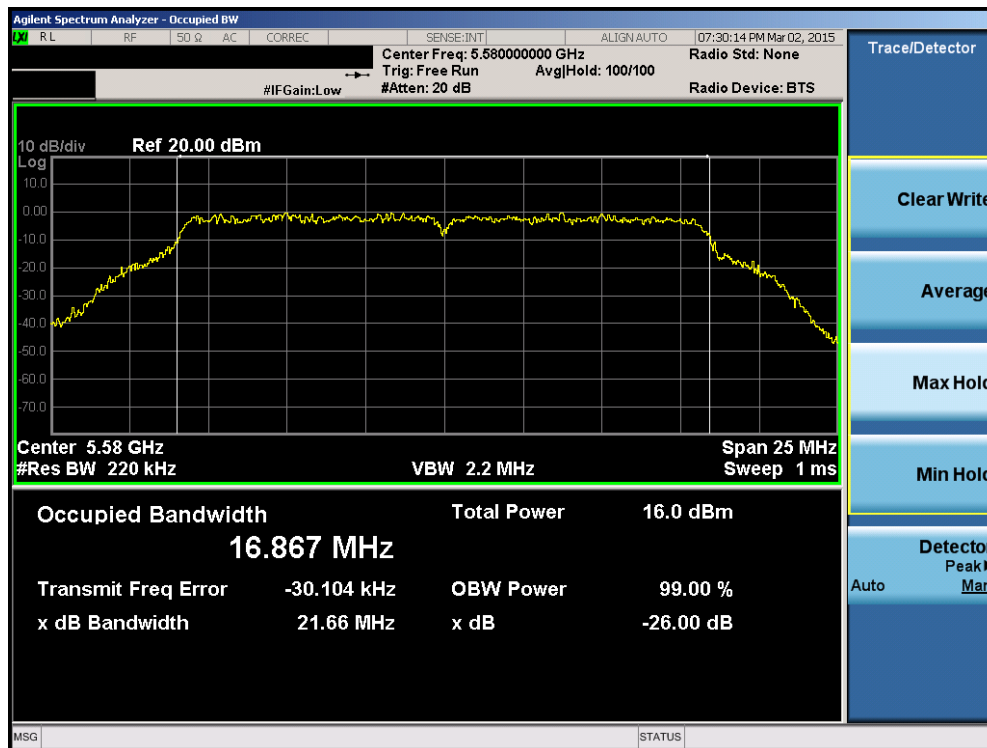


Plot 6-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

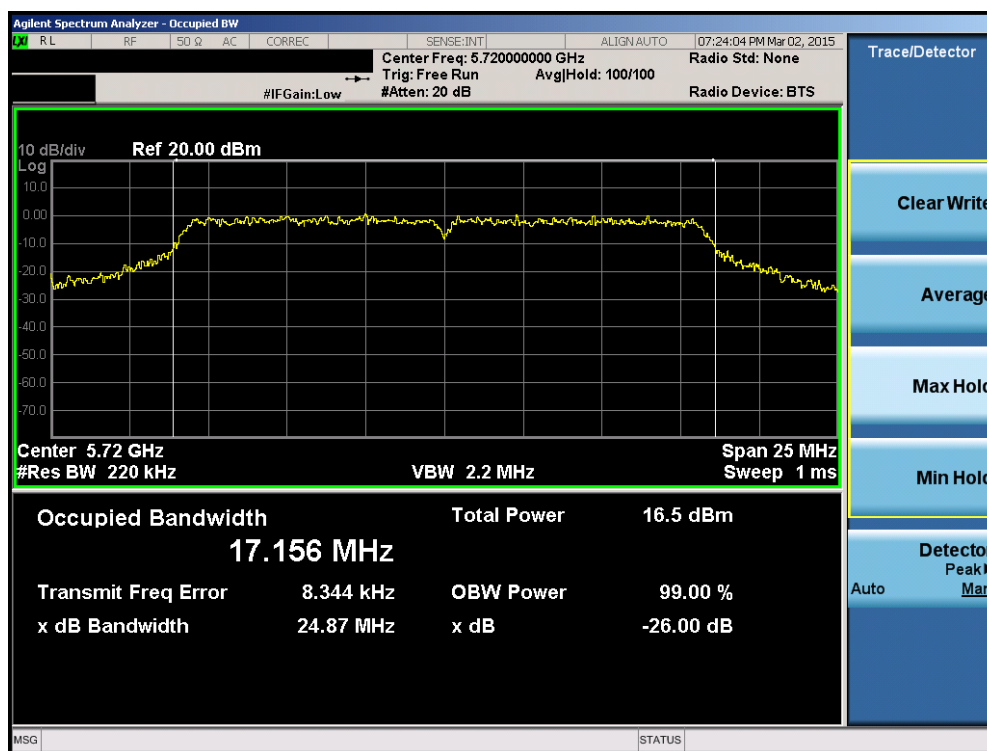


Plot 6-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 25 of 214

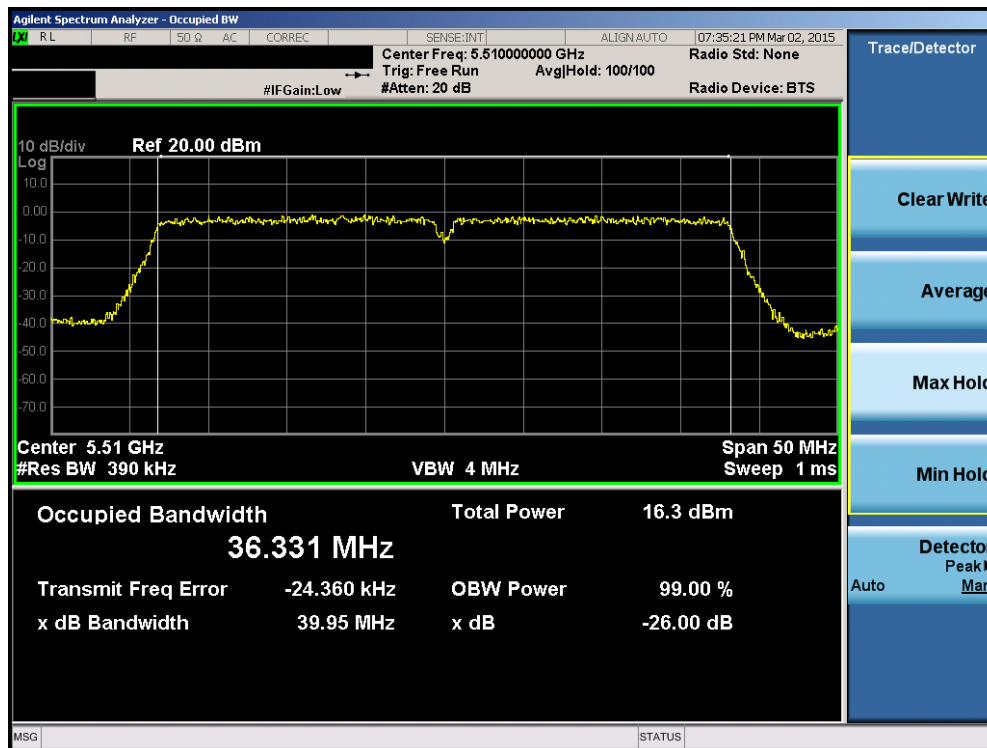


Plot 6-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

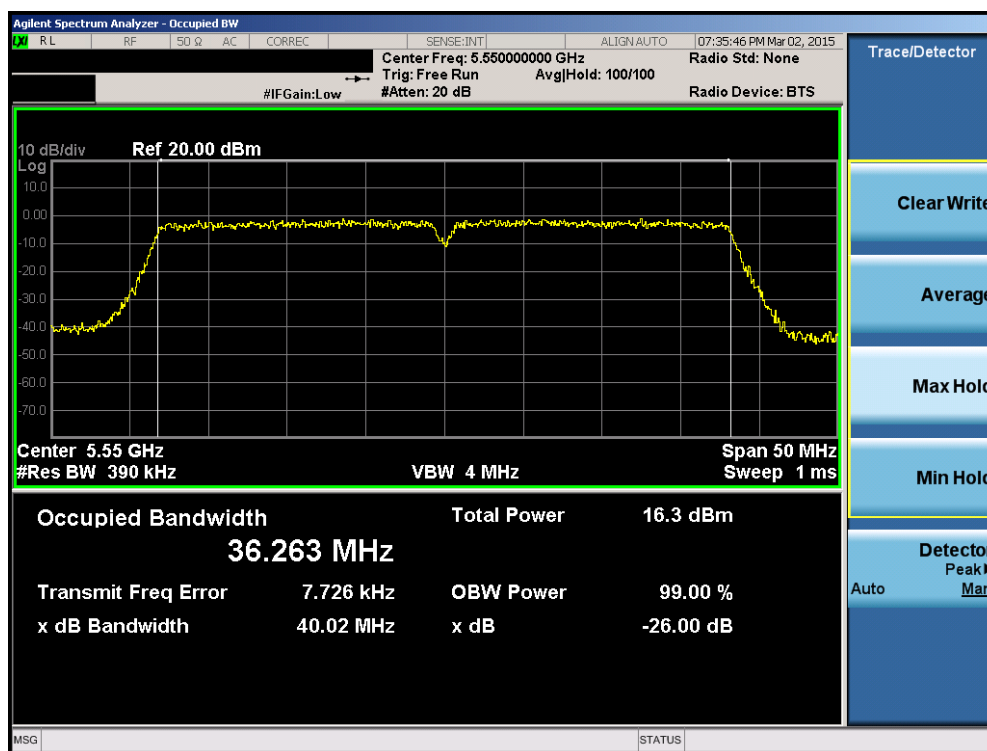


Plot 6-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 26 of 214

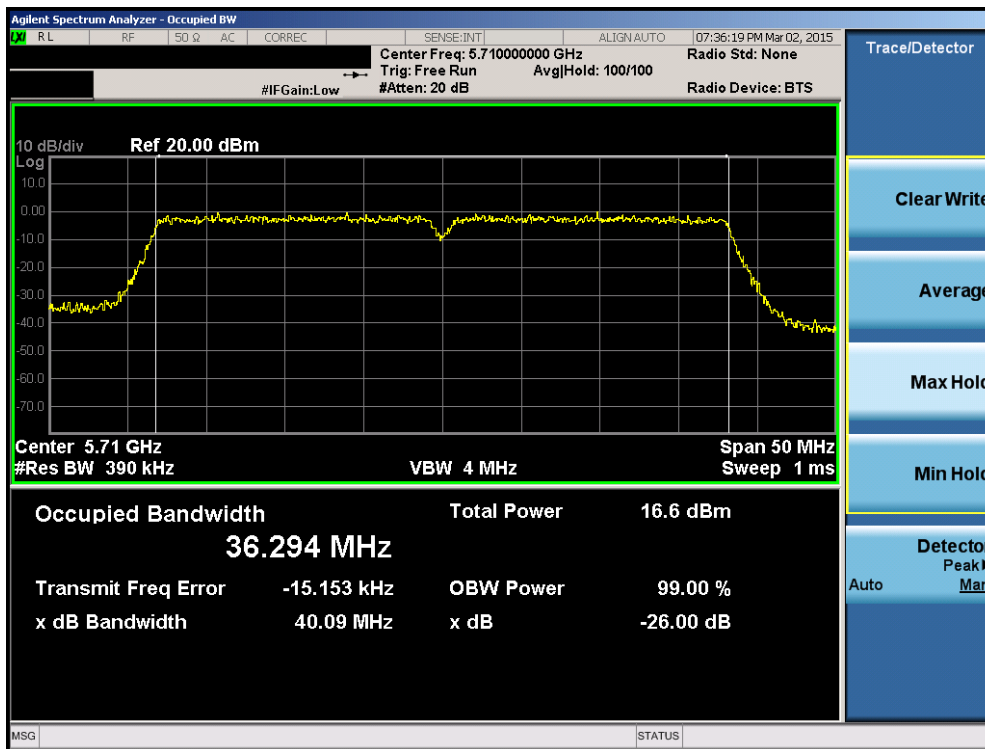


Plot 6-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

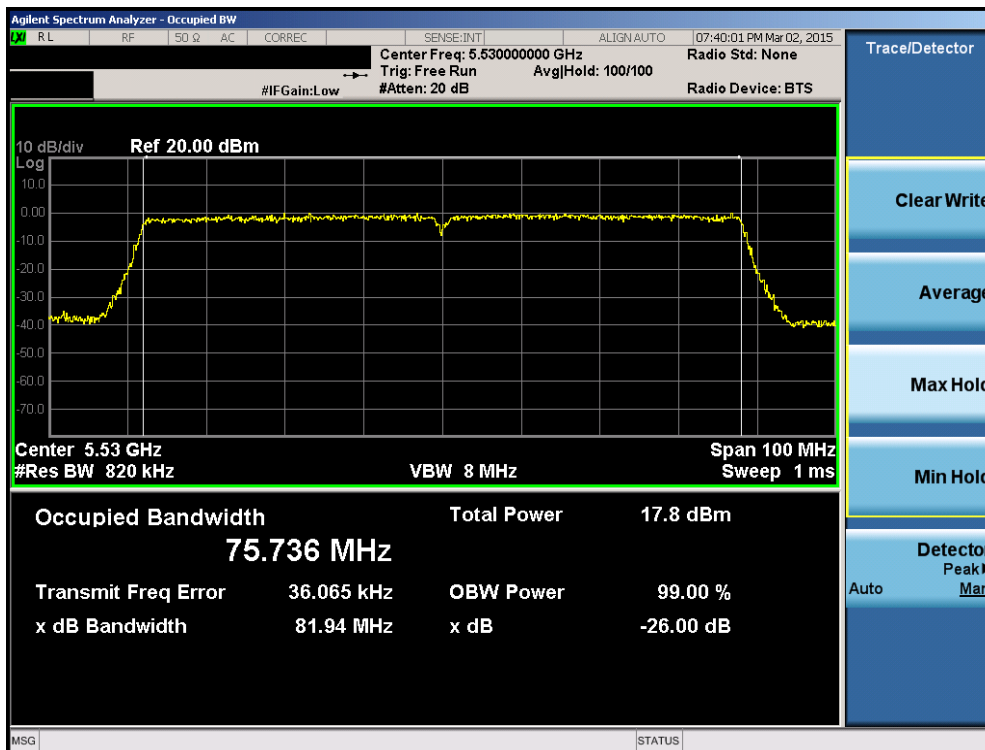

Plot 6-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 27 of 214

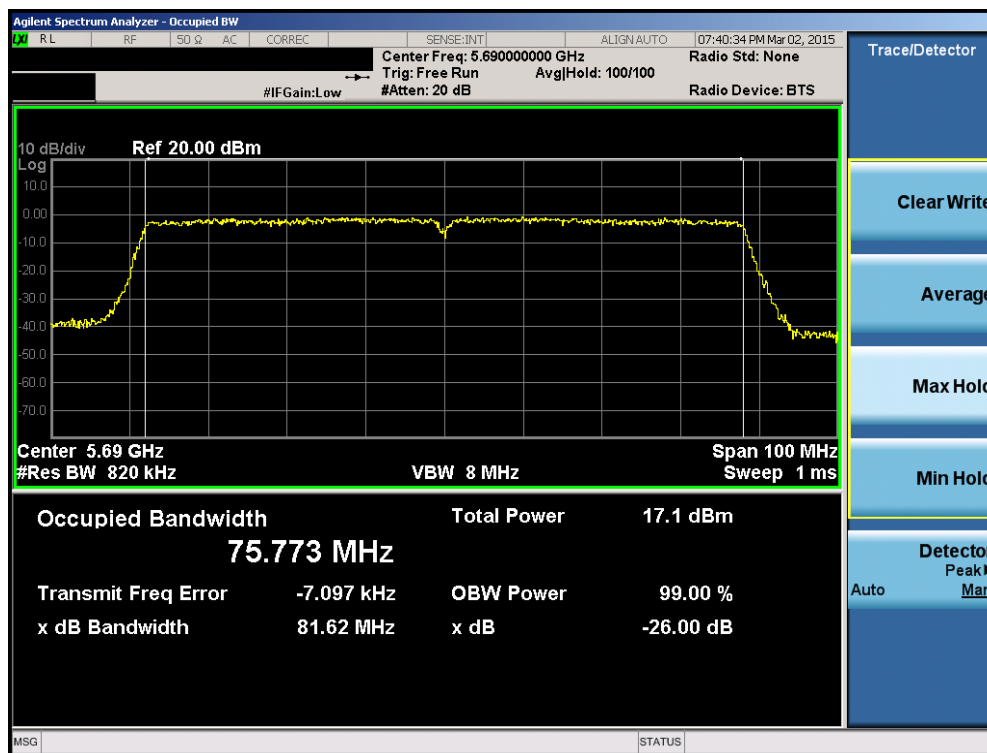



Plot 6-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)


FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 28 of 214

Antenna-2 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	21.24
	5200	40	a	6	21.42
	5240	48	a	6	21.56
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	21.55
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.58
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	21.51
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.64
	5230	46	n (40MHz)	13.5/15 (MCS0)	40.20
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	81.63
Band 2A	5260	52	a	6	21.46
	5280	56	a	6	21.45
	5320	64	a	6	21.28
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	21.61
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	21.85
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	21.72
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.83
	5310	62	n (40MHz)	13.5/15 (MCS0)	40.04
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.73
Band 2C	5500	100	a	6	21.42
	5580	116	a	6	21.23
	5720	144	a	6	21.30
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.66
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.71
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	22.03
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.69
	5550	110	n (40MHz)	13.5/15 (MCS0)	39.91
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.76
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	82.06
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.67

Table 6-3. Conducted Bandwidth Measurements

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 29 of 214

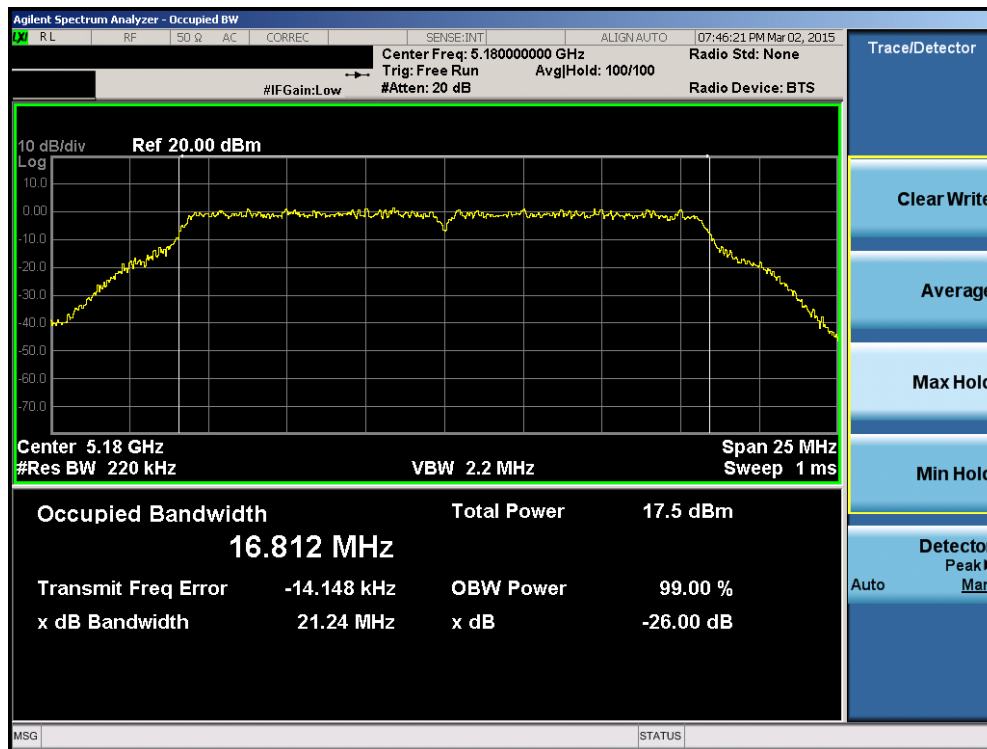


Plot 6-30. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

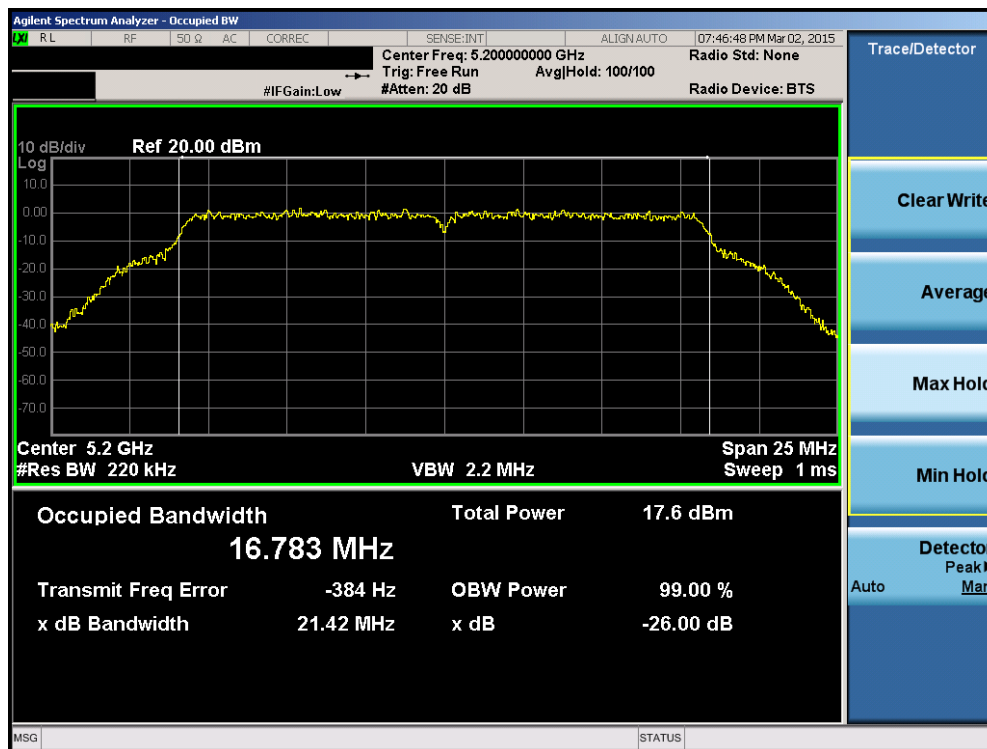


Plot 6-31. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 30 of 214

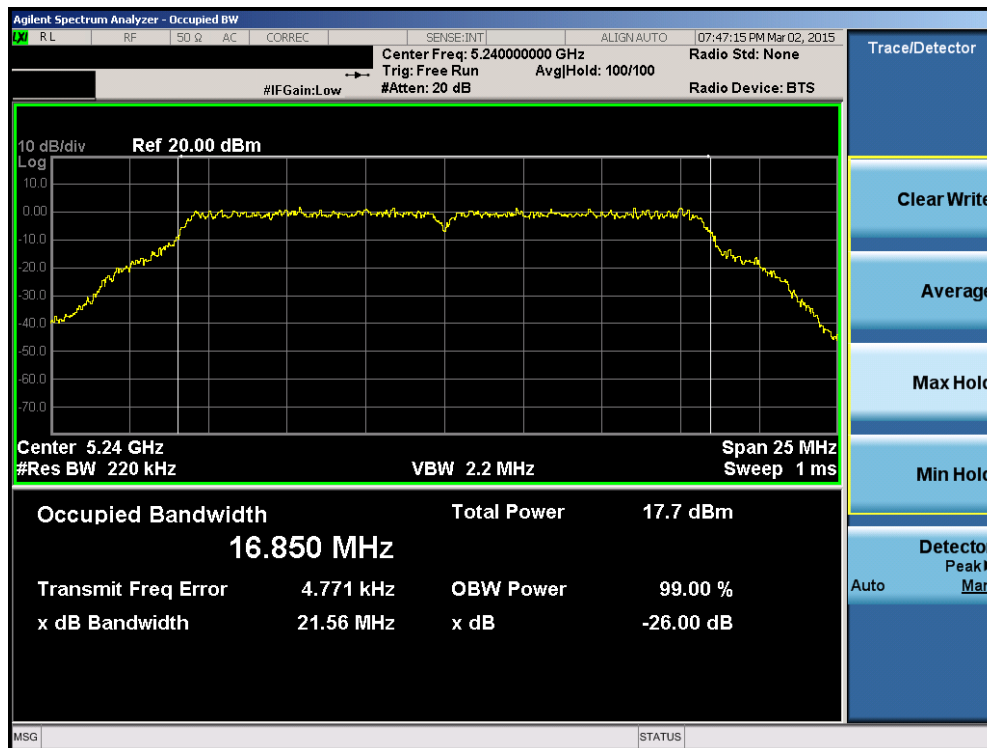


Plot 6-32. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

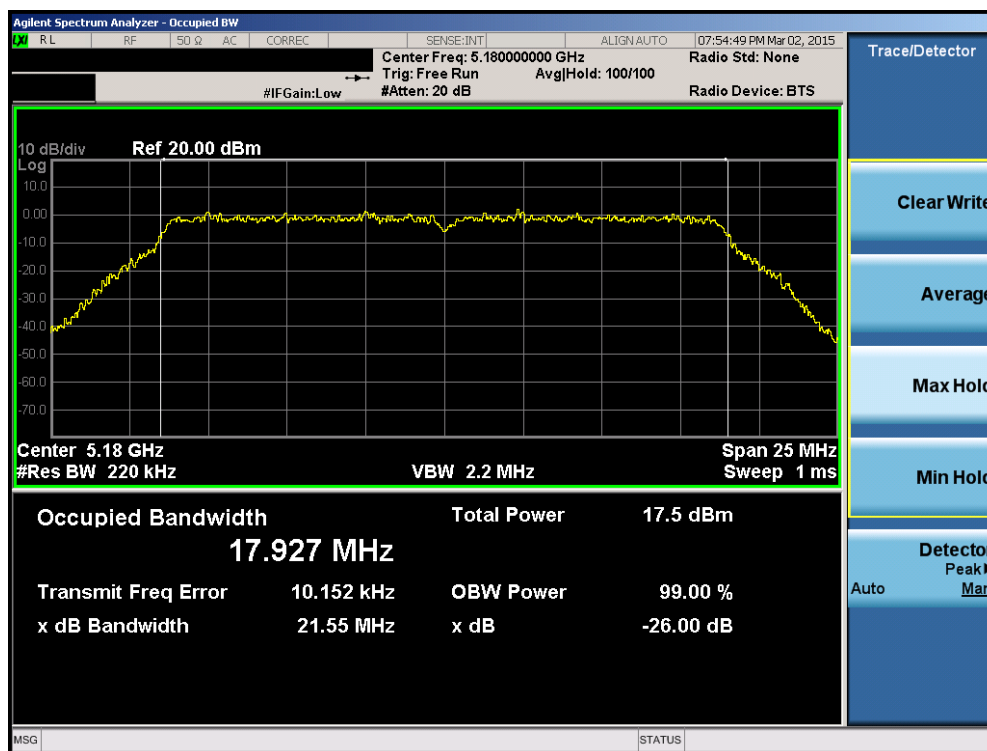


Plot 6-33. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 31 of 214

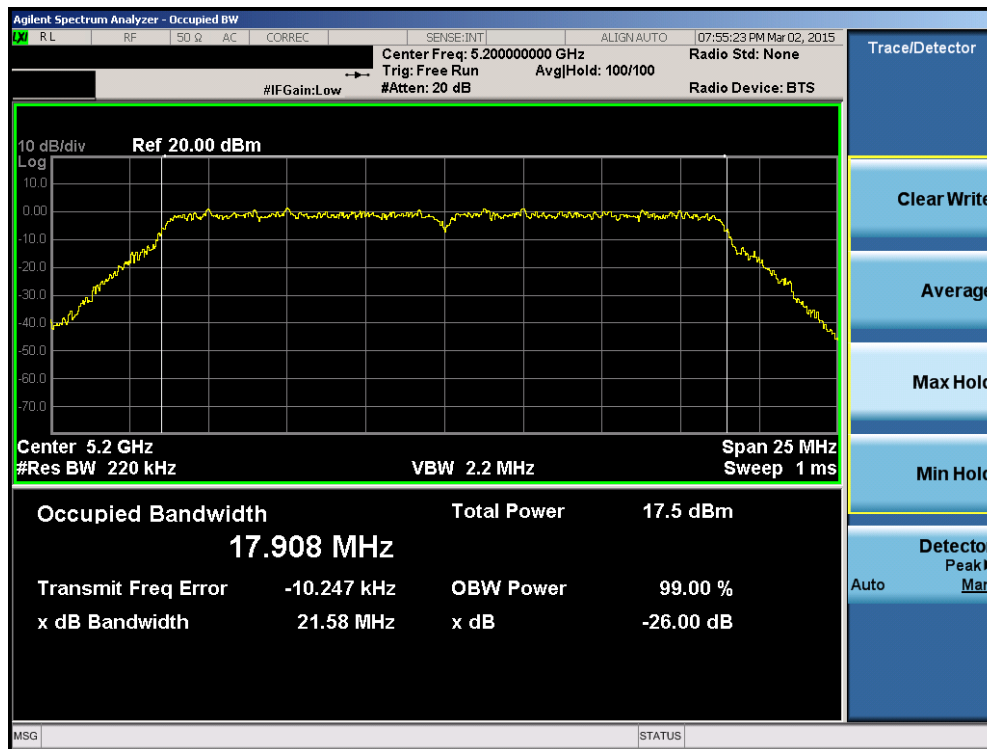


Plot 6-34. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

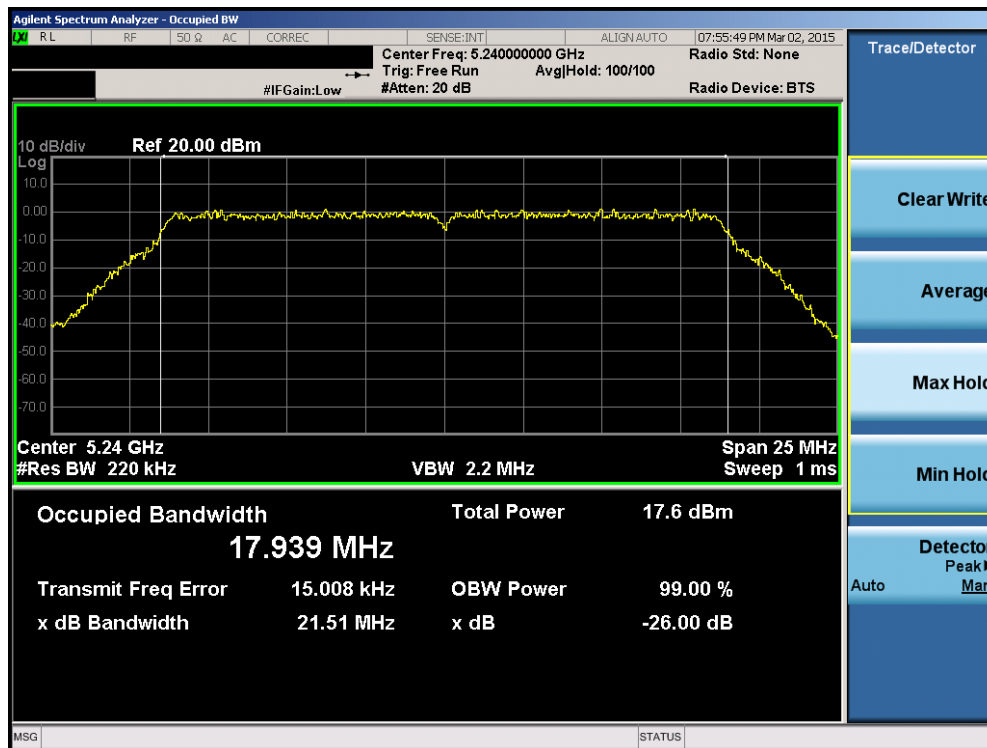


Plot 6-35. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 32 of 214

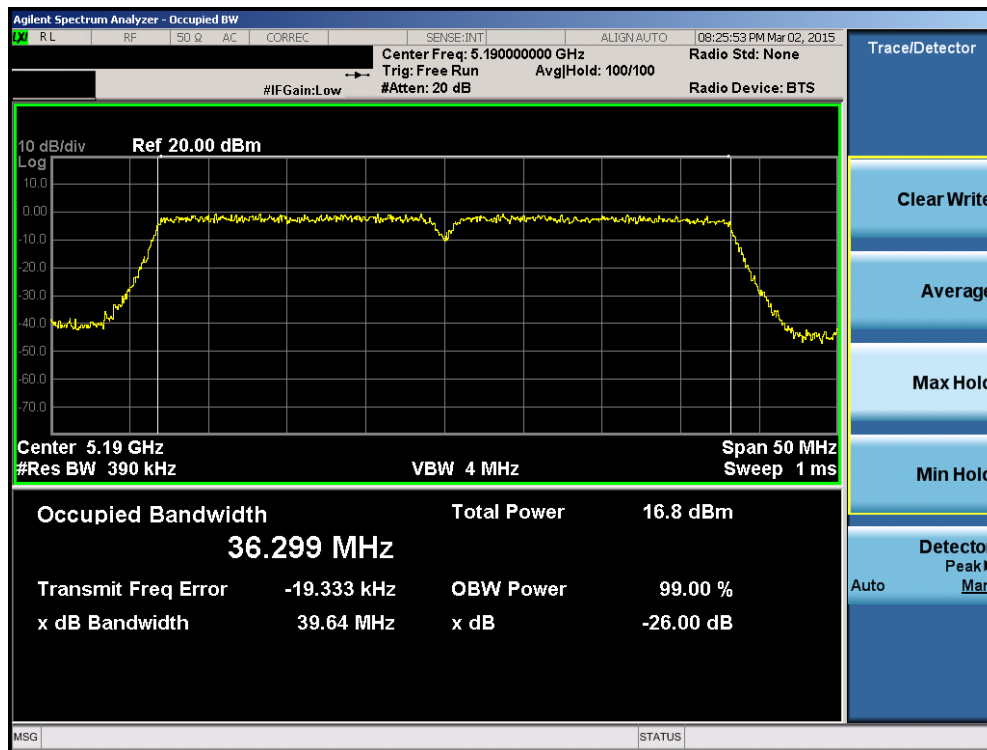


Plot 6-36. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

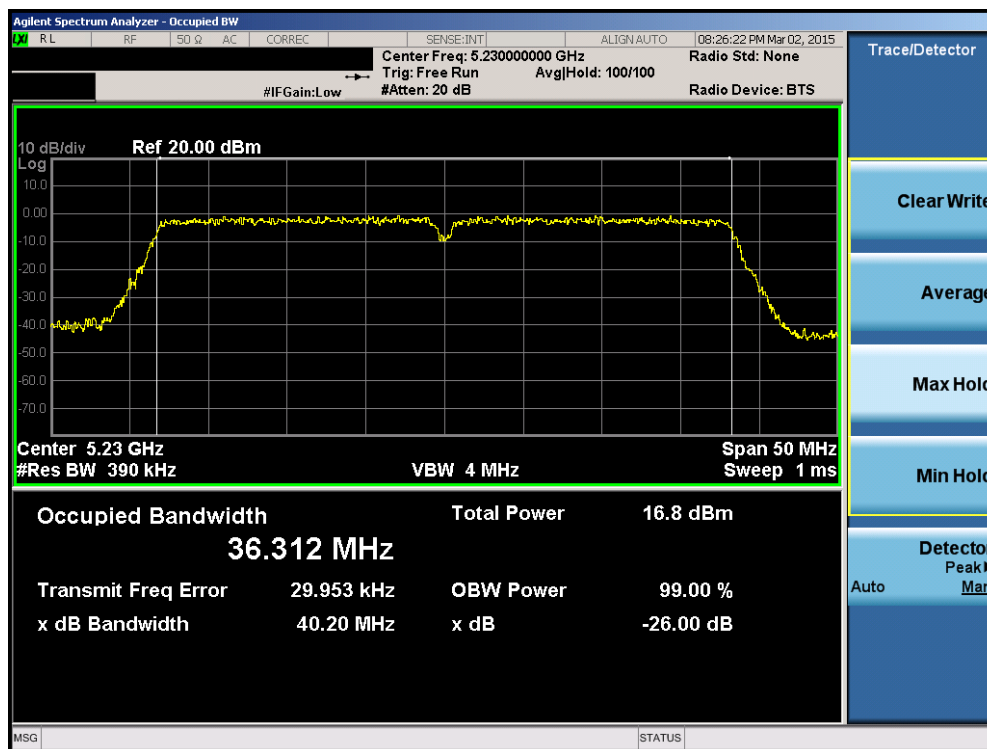


Plot 6-37. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 33 of 214

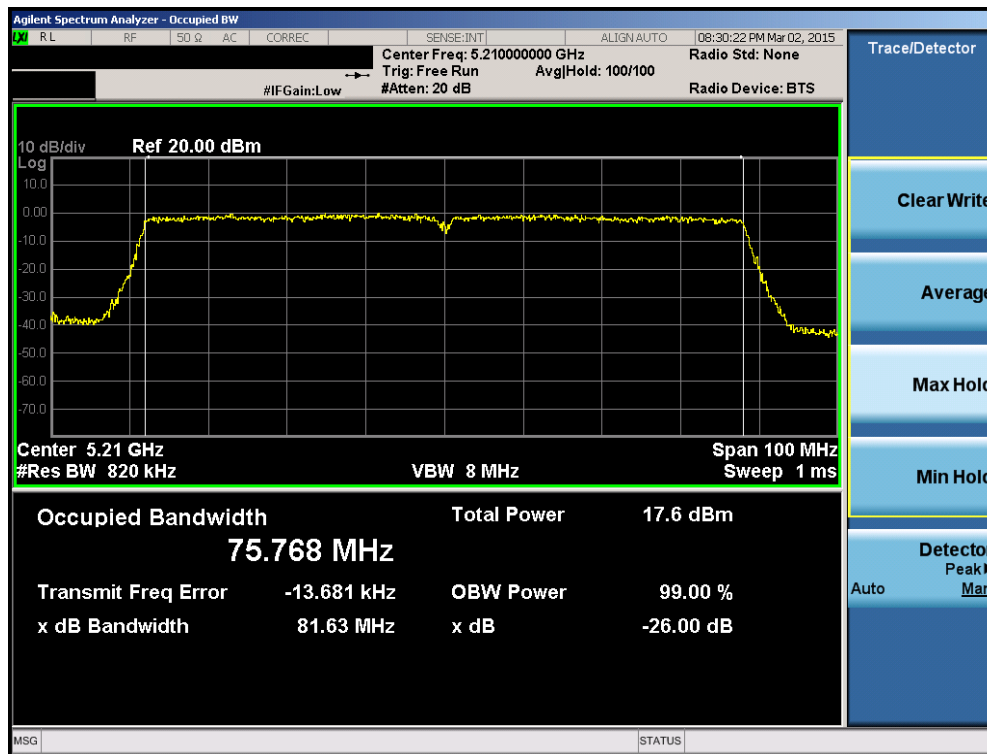


Plot 6-38. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

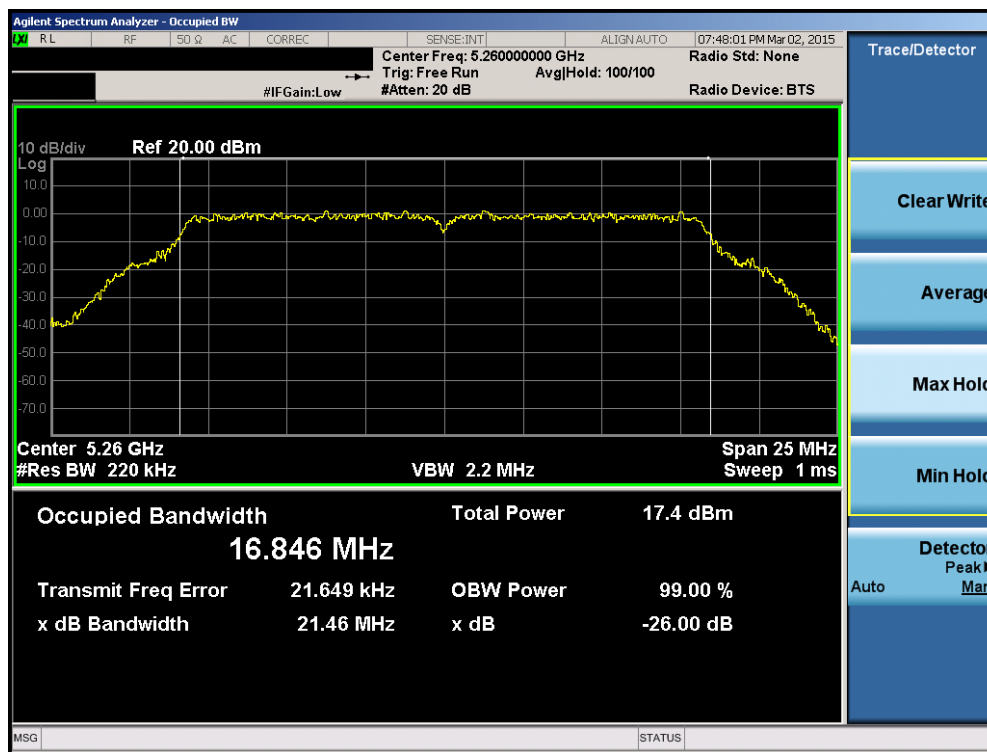


Plot 6-39. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 34 of 214

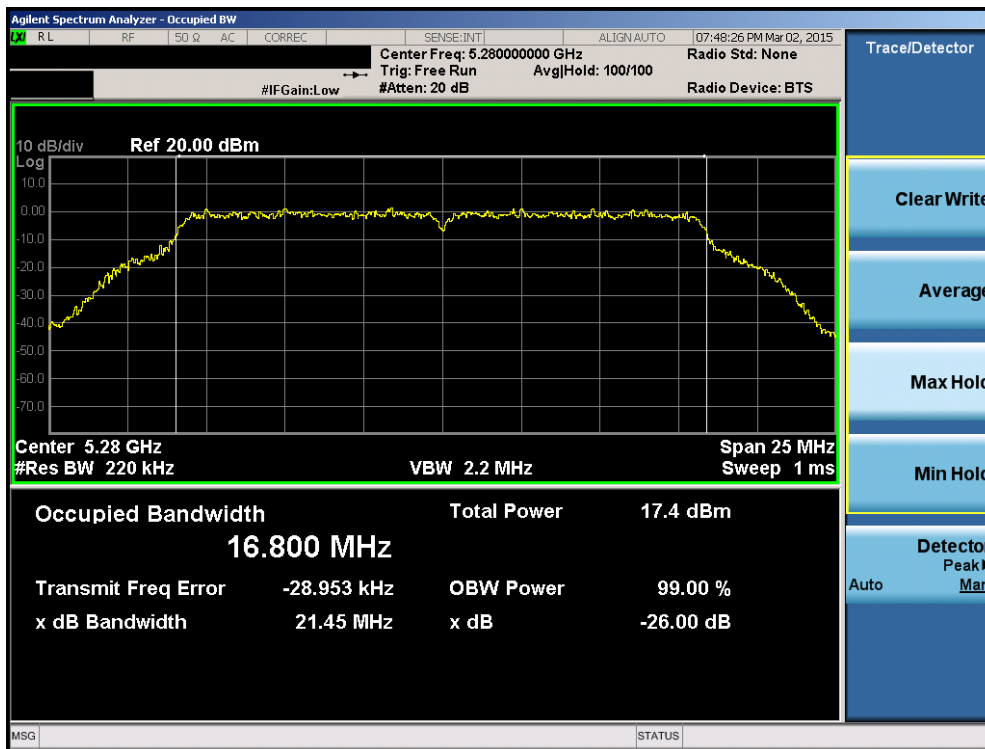


Plot 6-40. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

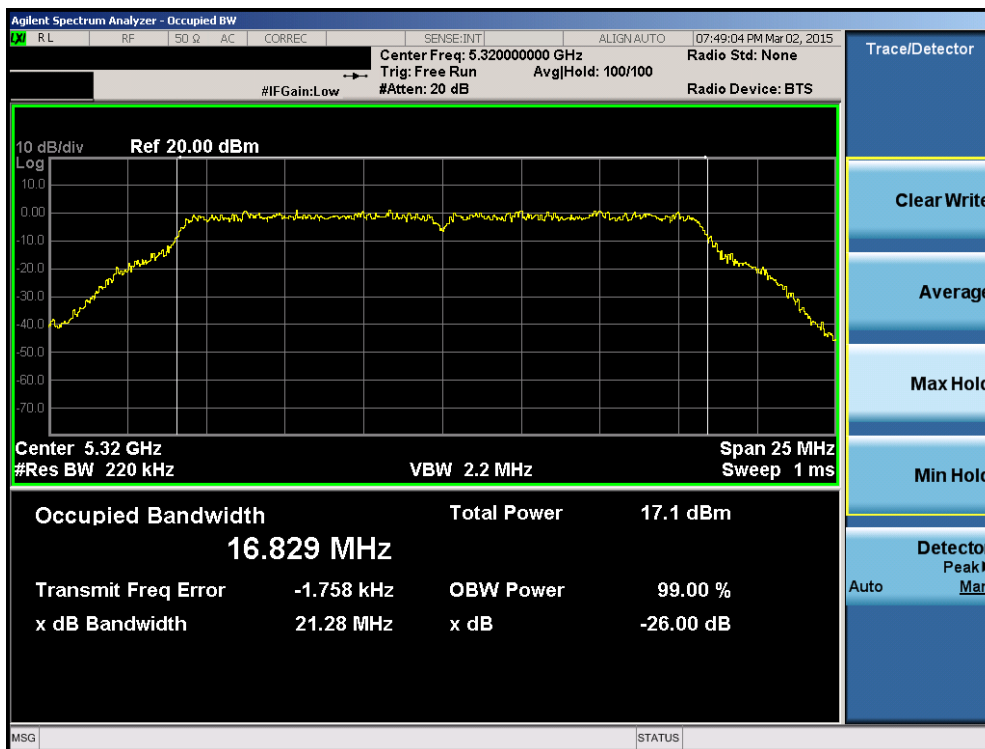


Plot 6-41. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 35 of 214

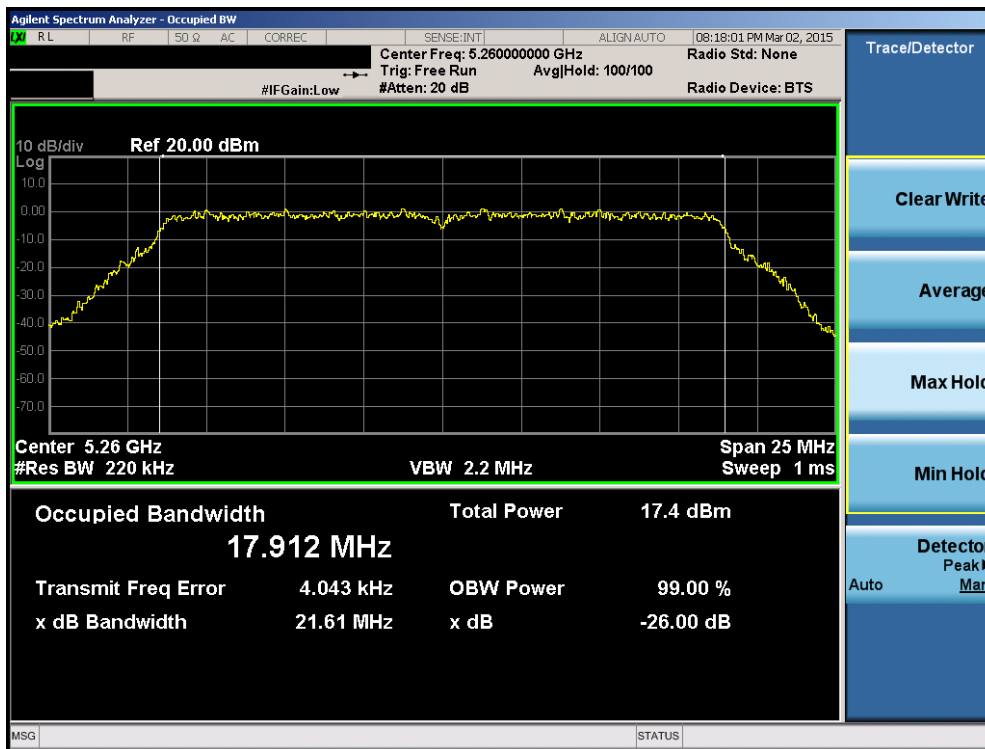


Plot 6-42. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

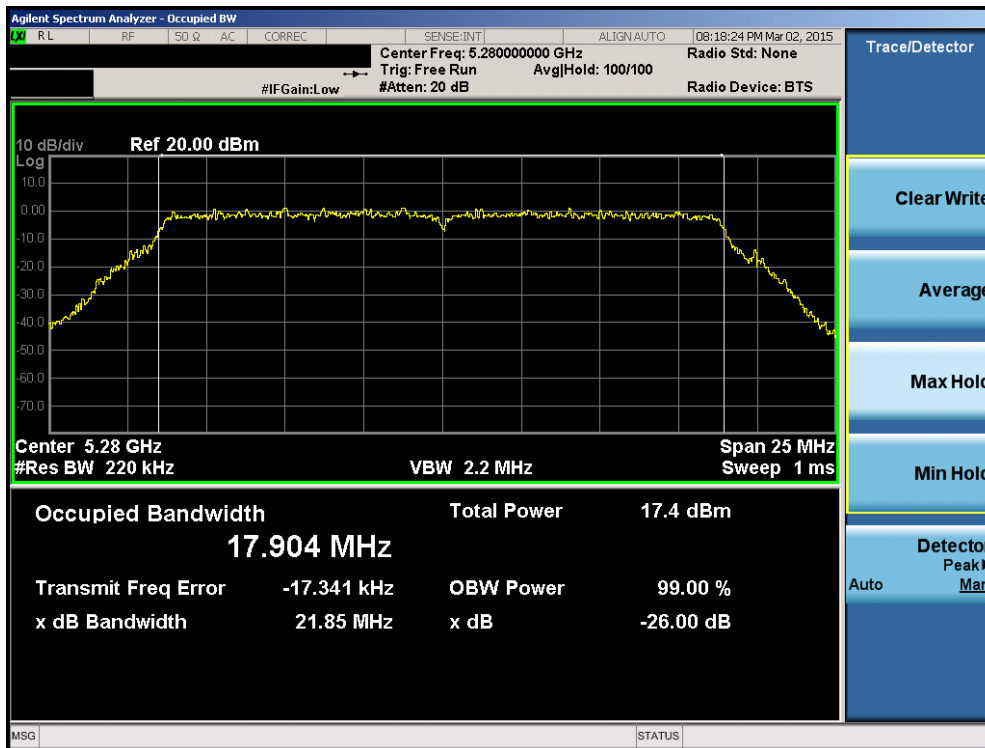


Plot 6-43. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 36 of 214

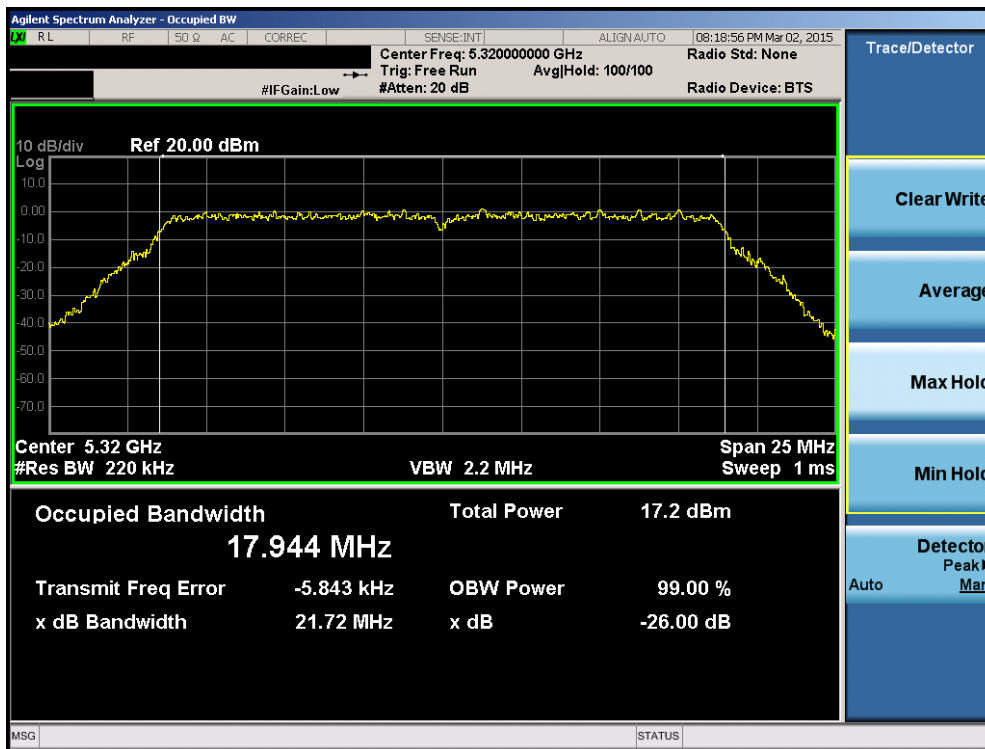


Plot 6-44. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

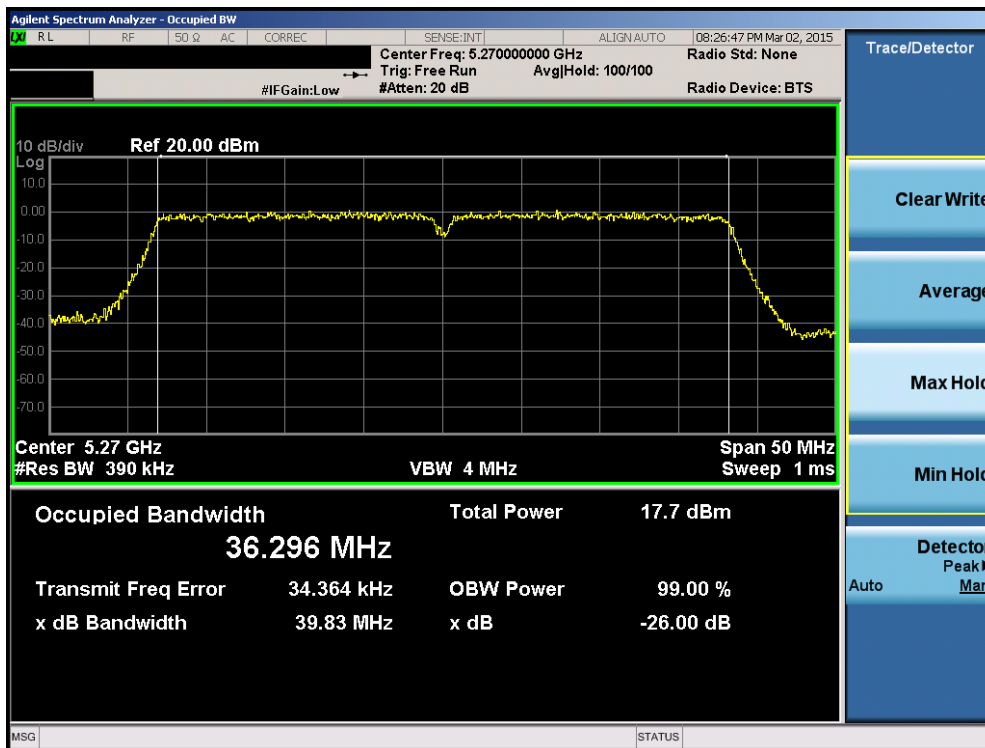


Plot 6-45. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 37 of 214

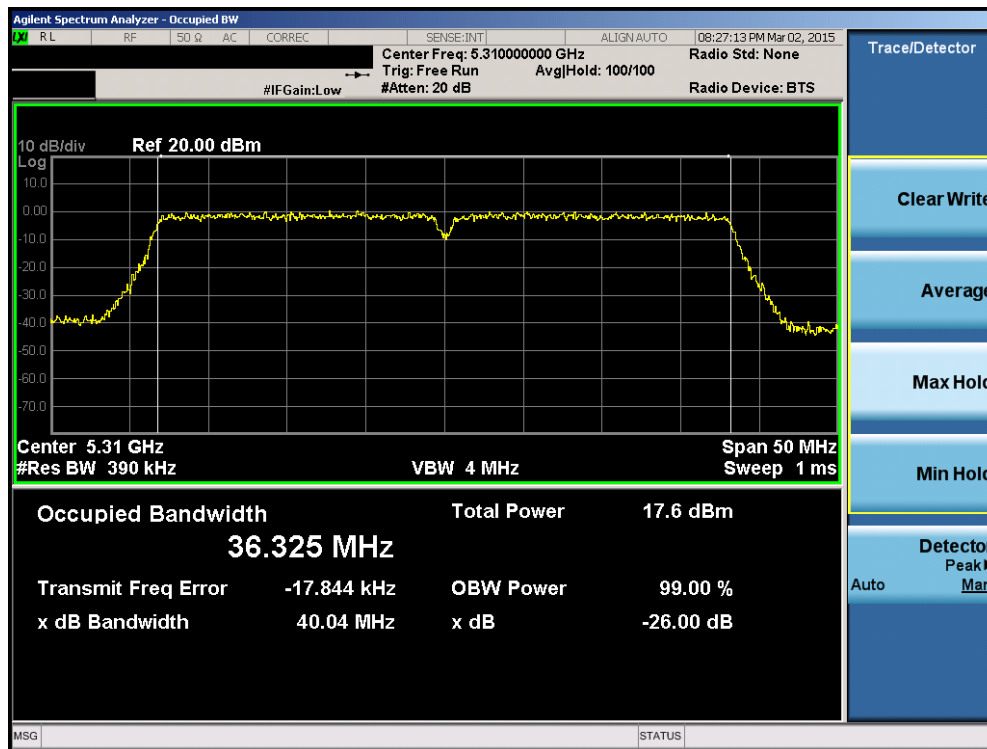


Plot 6-46. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

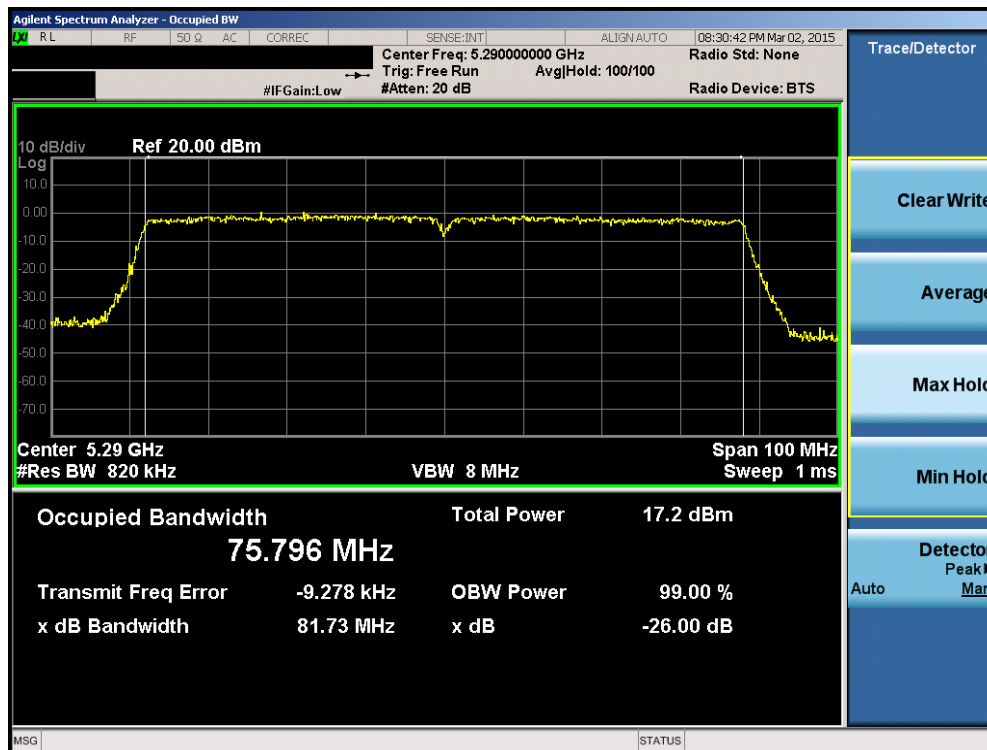


Plot 6-47. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 38 of 214

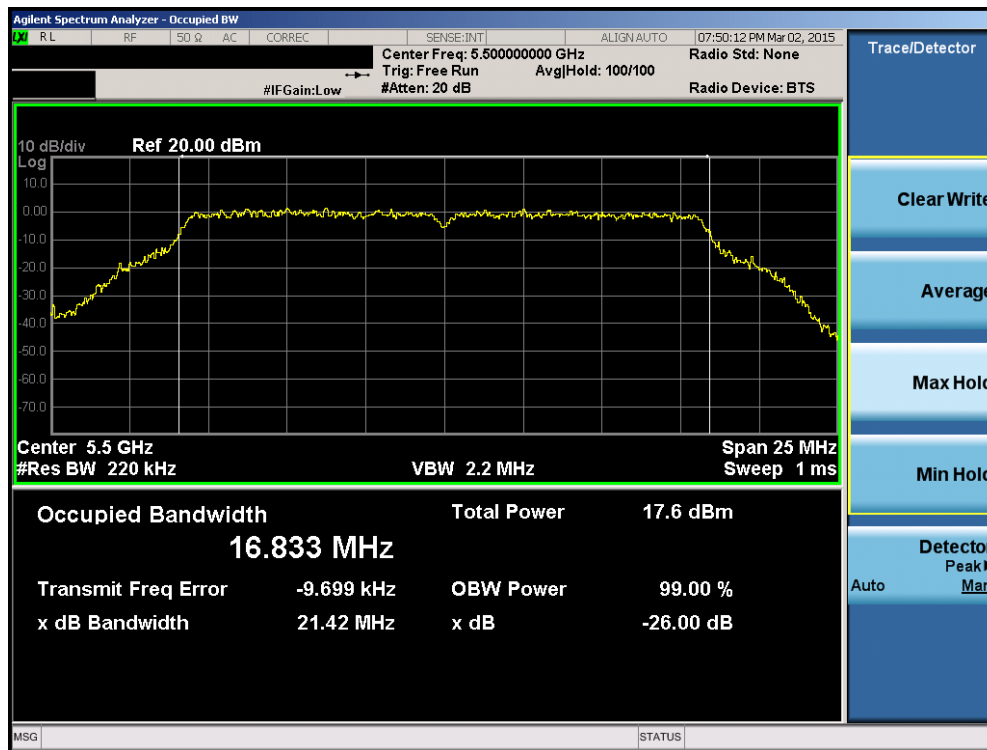


Plot 6-48. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

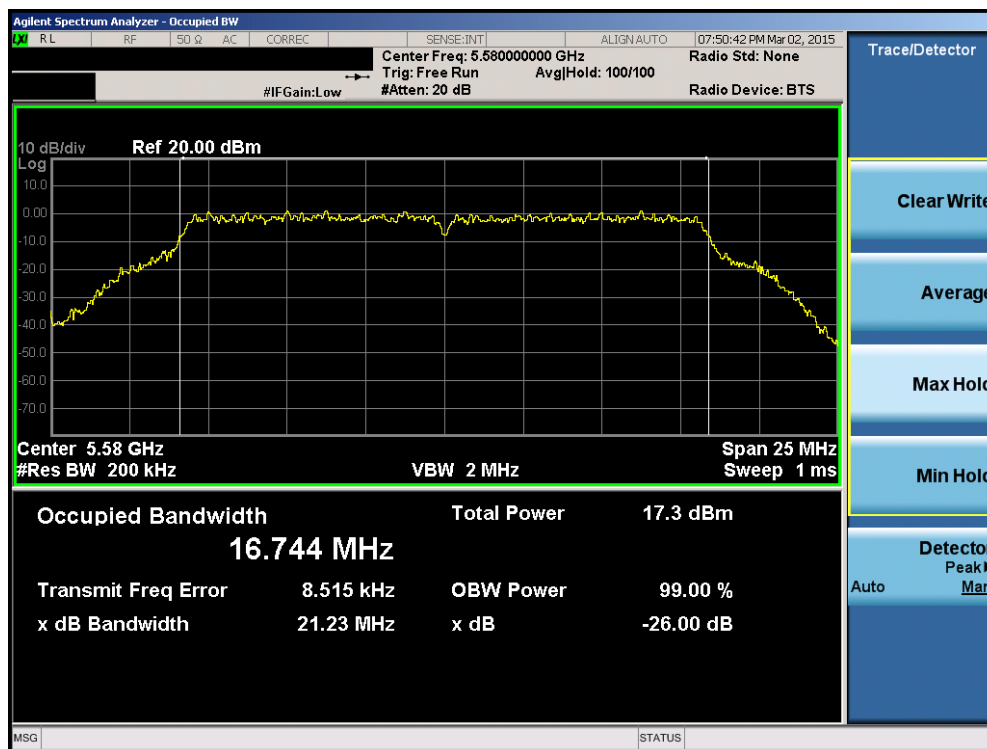


Plot 6-49. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 39 of 214

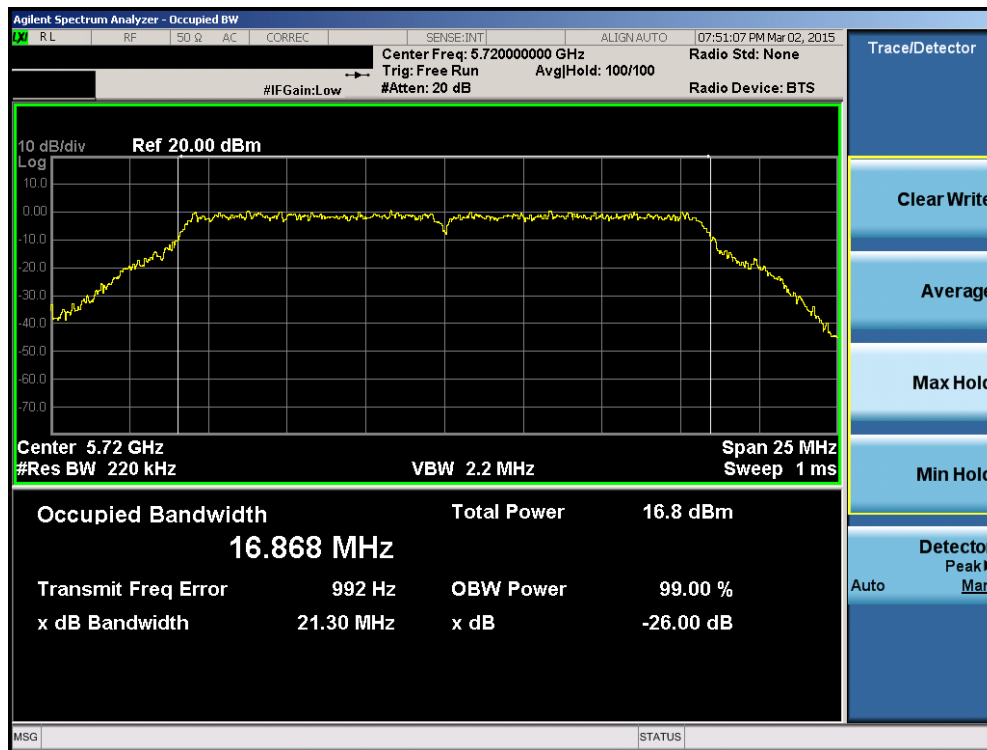


Plot 6-50. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

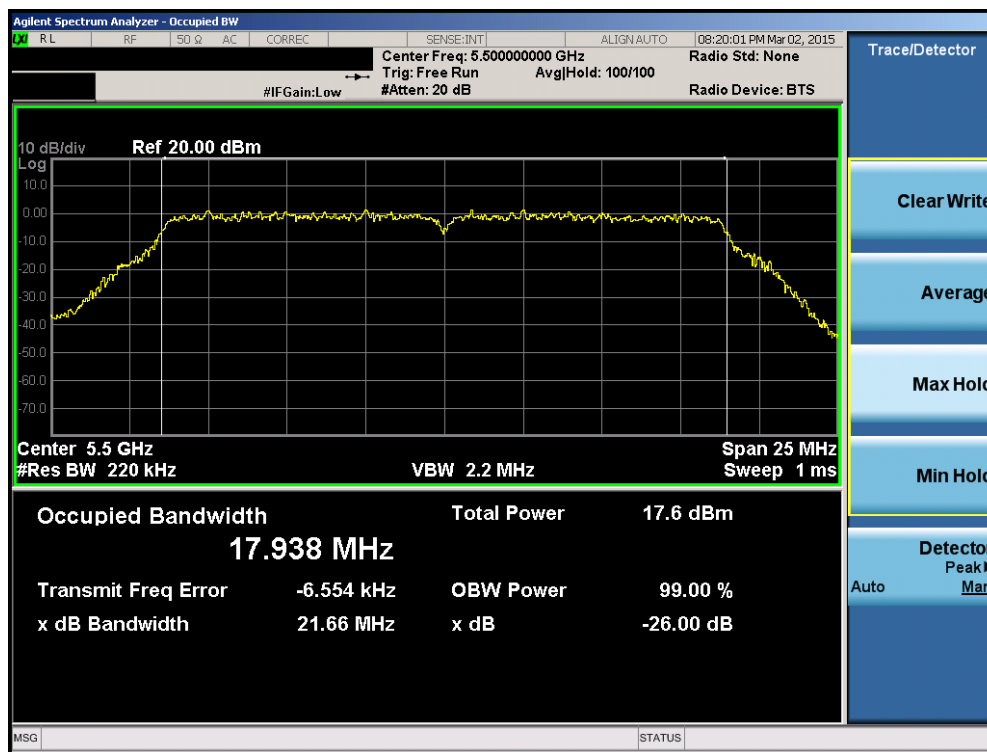


Plot 6-51. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 40 of 214

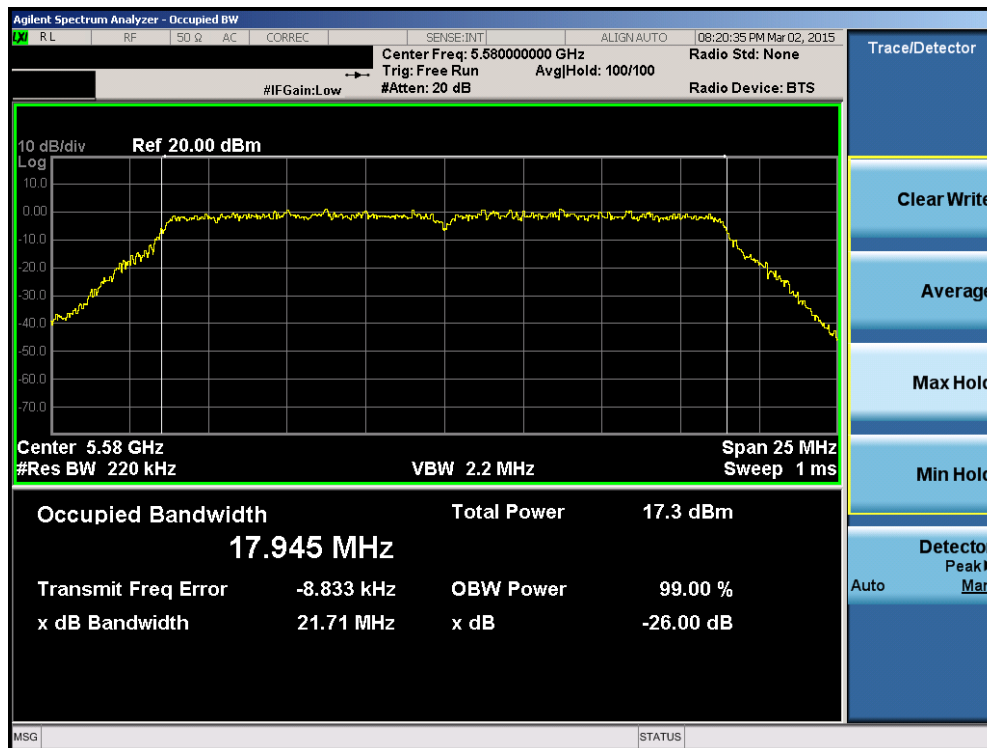


Plot 6-52. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

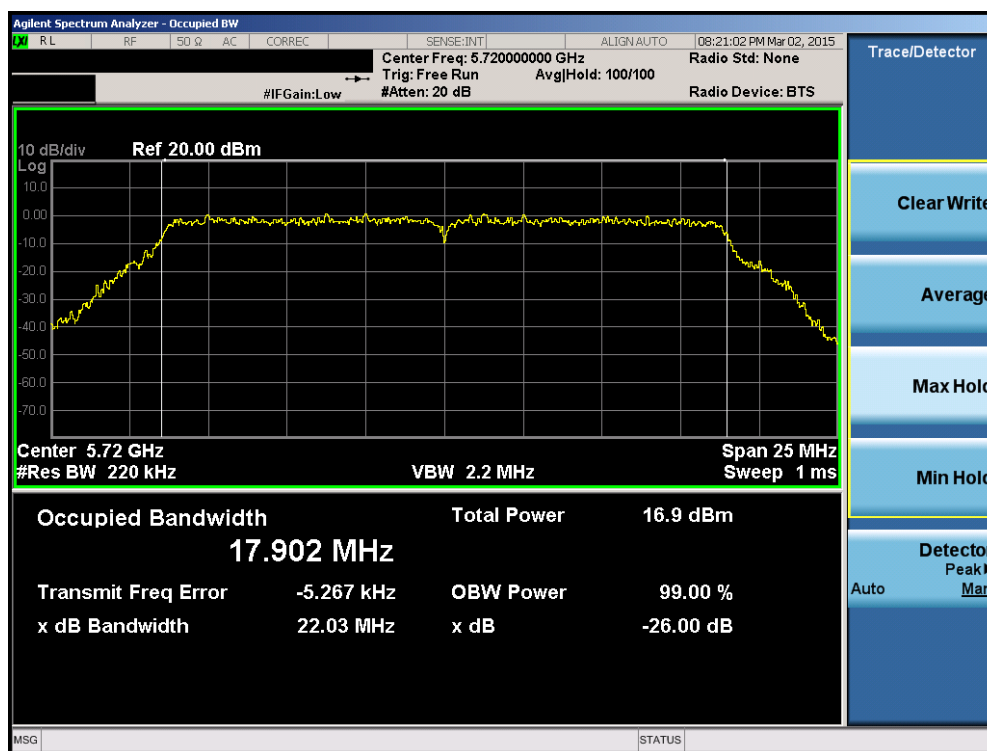


Plot 6-53. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 41 of 214

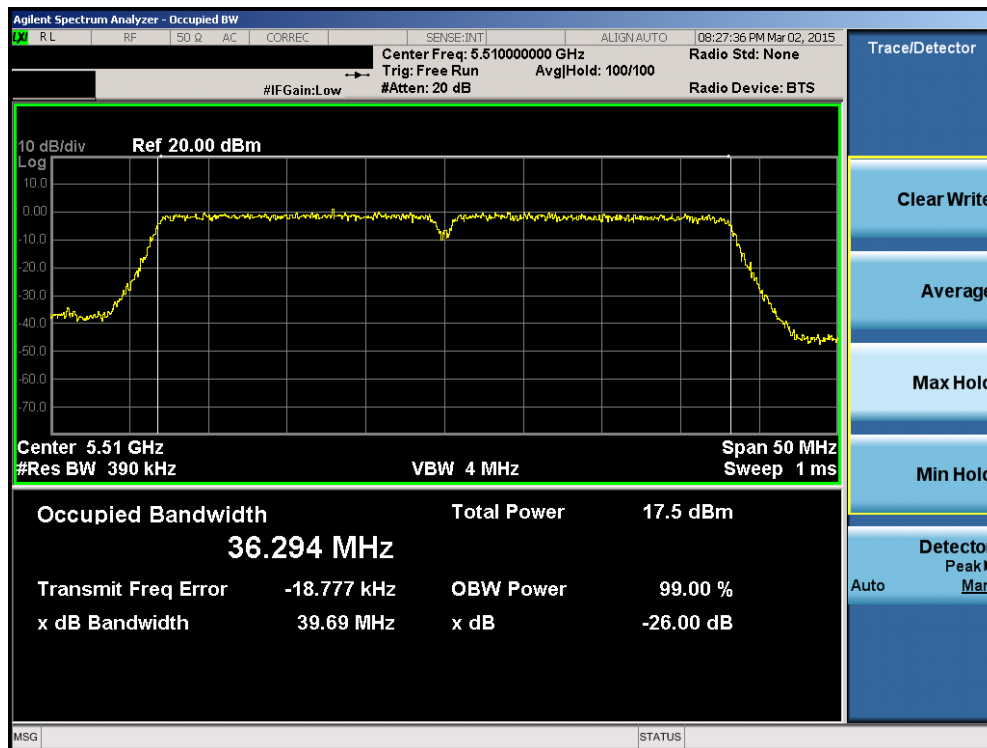


Plot 6-54. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

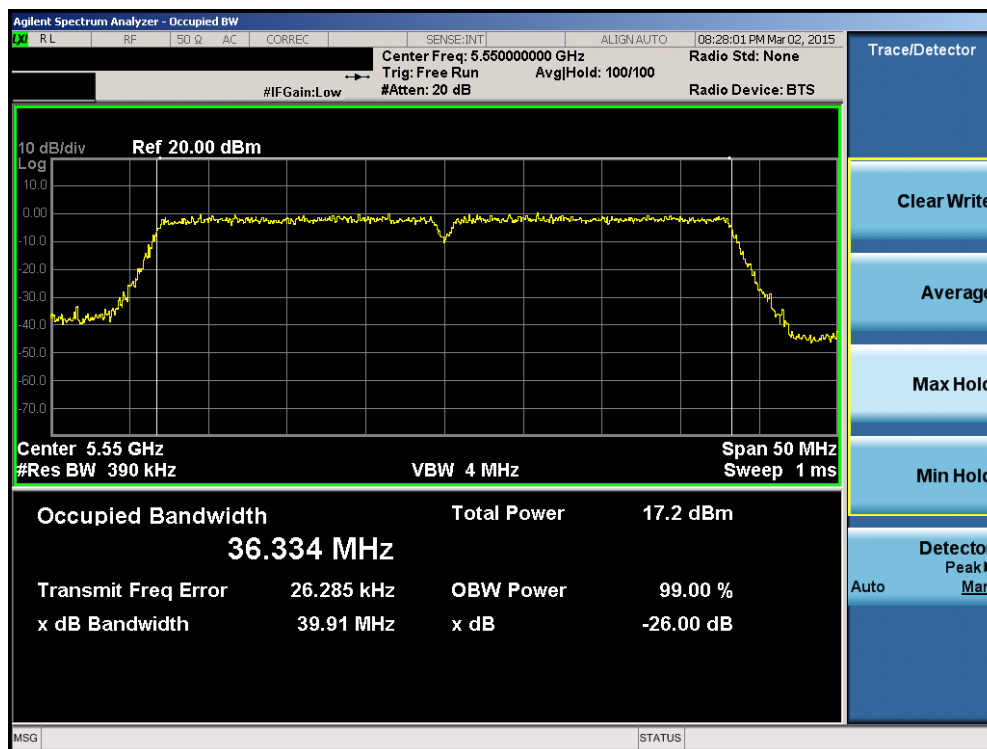


Plot 6-55. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 42 of 214

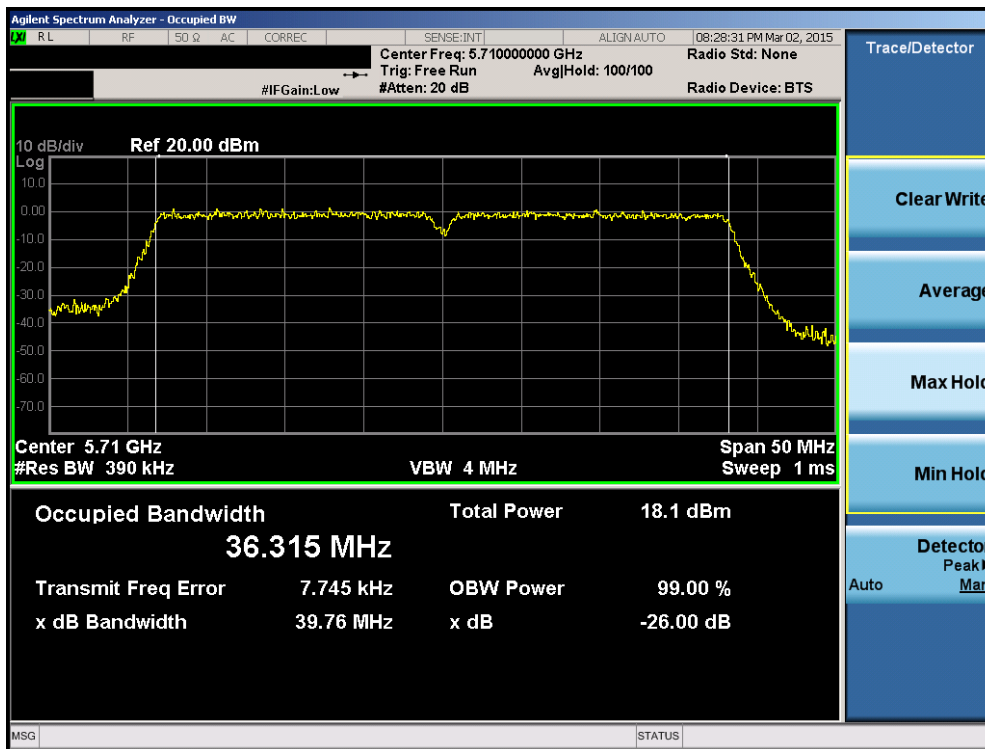


Plot 6-56. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

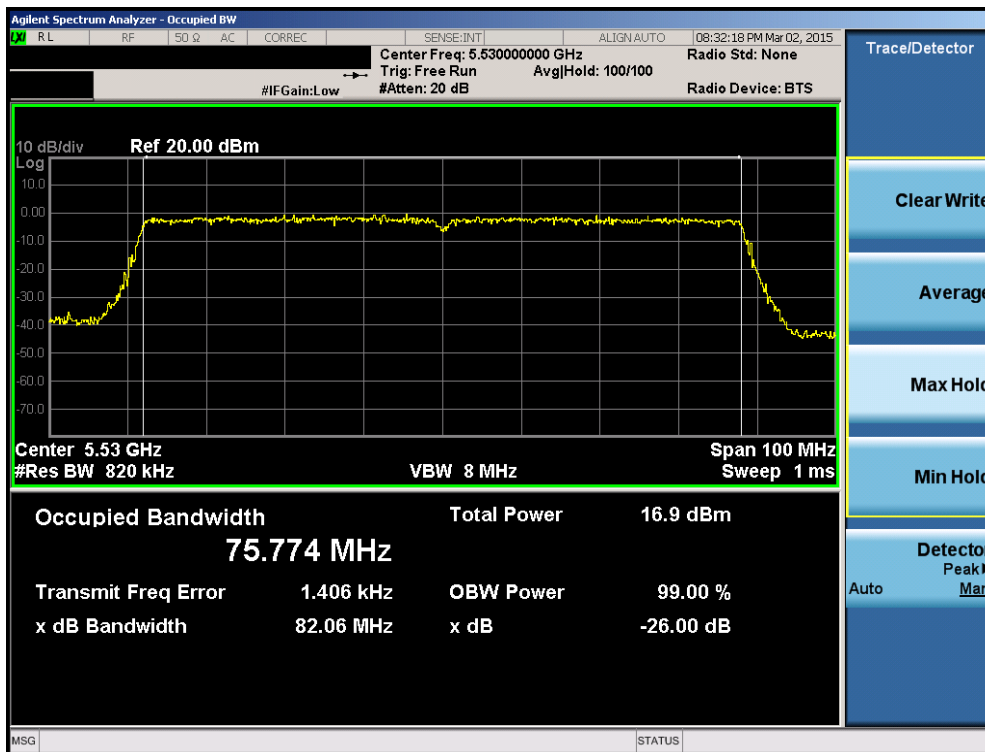

Plot 6-57. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 43 of 214

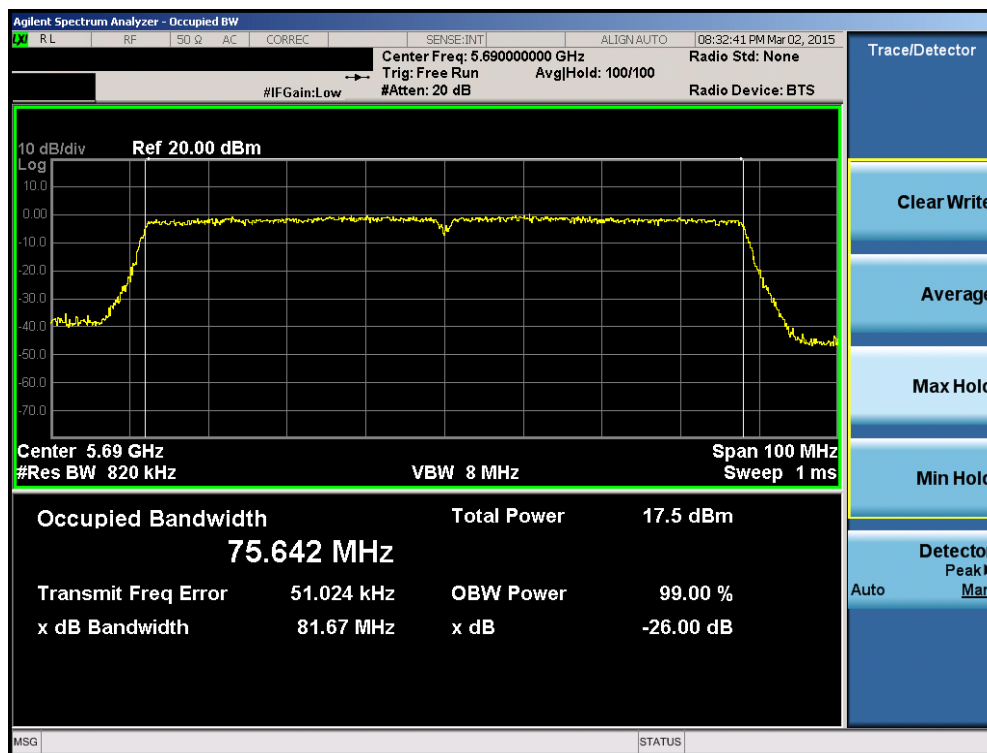

Plot 6-58. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 44 of 214

6.3 6dB Bandwidth Measurement – 802.11a/n/ac §15.407 (e)

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

KDB 789033 D02 v01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 45 of 214



Antenna-1 6 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.51
	5785	157	a	6	16.38
	5825	165	a	6	16.38
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	16.37
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	16.36
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	16.38
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.39
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.36
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.63

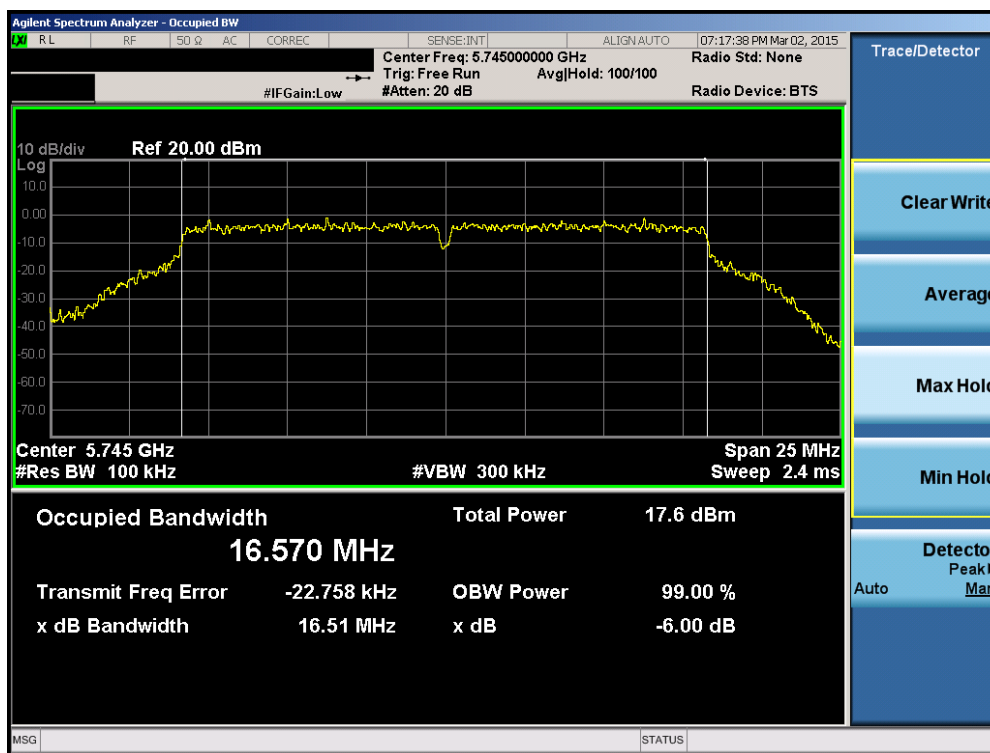Table 6-4. Conducted Bandwidth Measurements




Plot 6-59. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 46 of 214

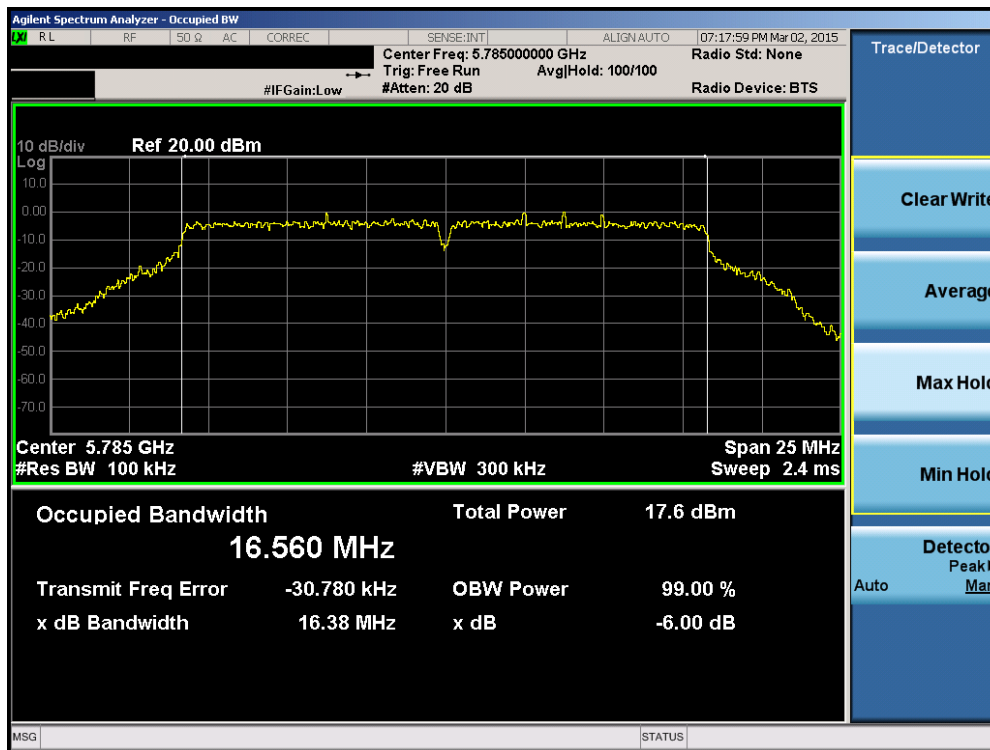


Plot 6-60. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

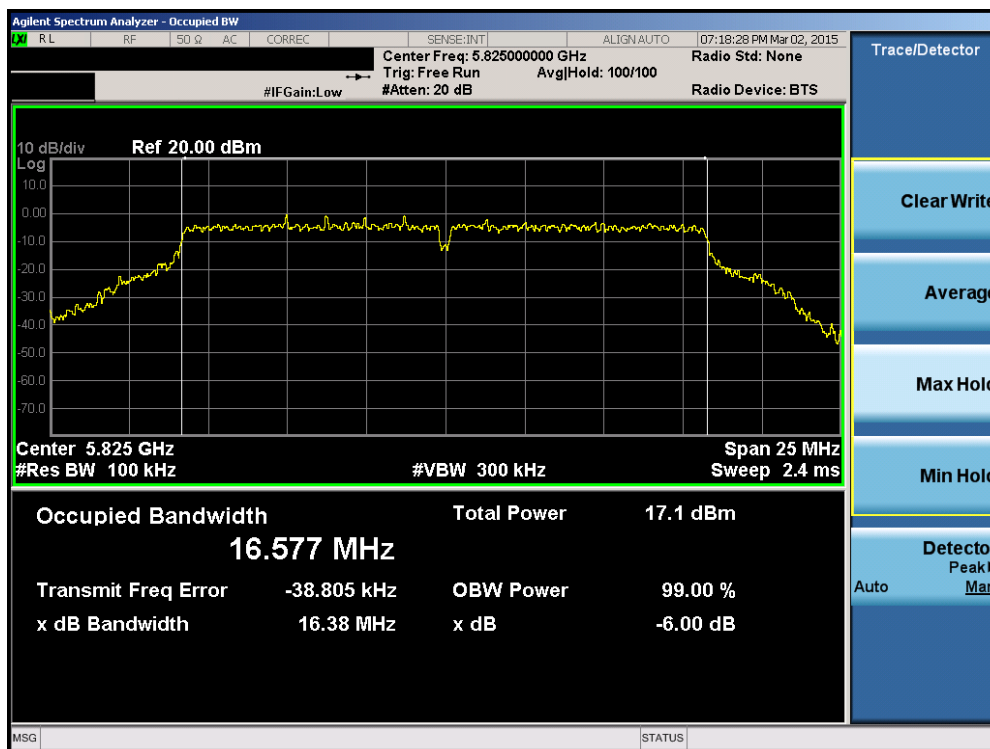


Plot 6-61. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 47 of 214

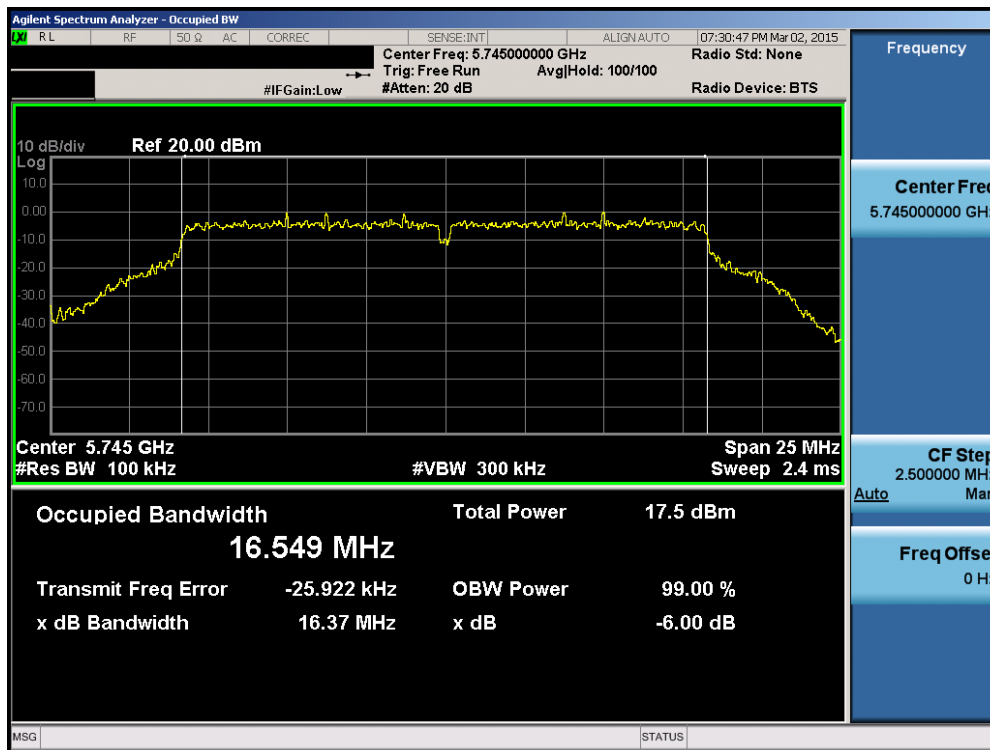


Plot 6-62. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

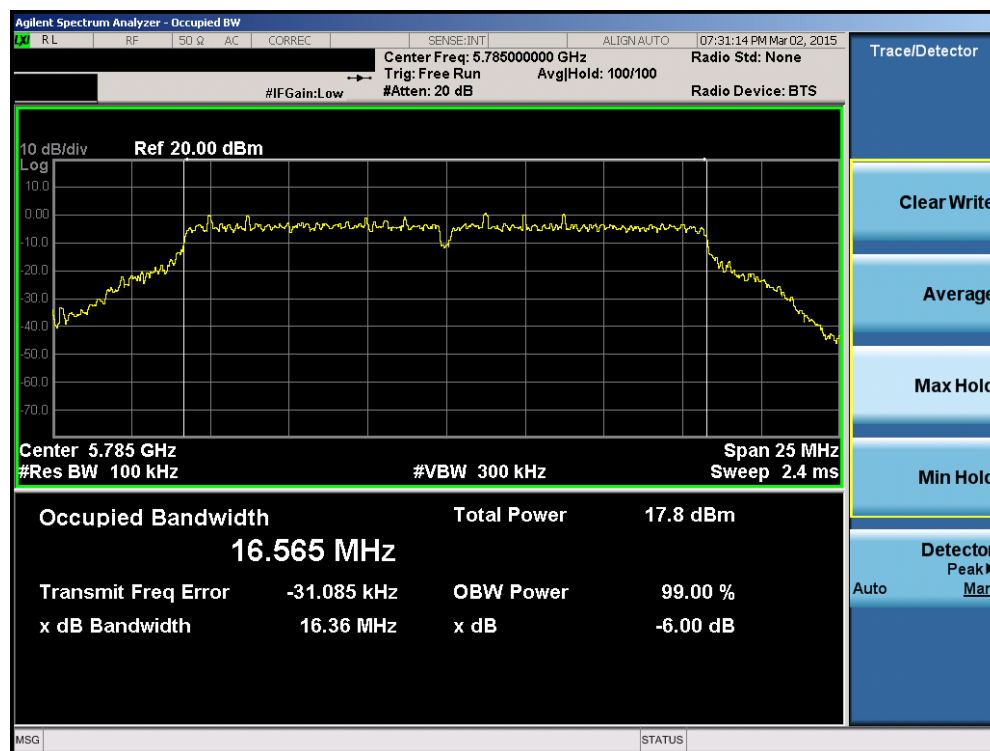


Plot 6-63. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 48 of 214

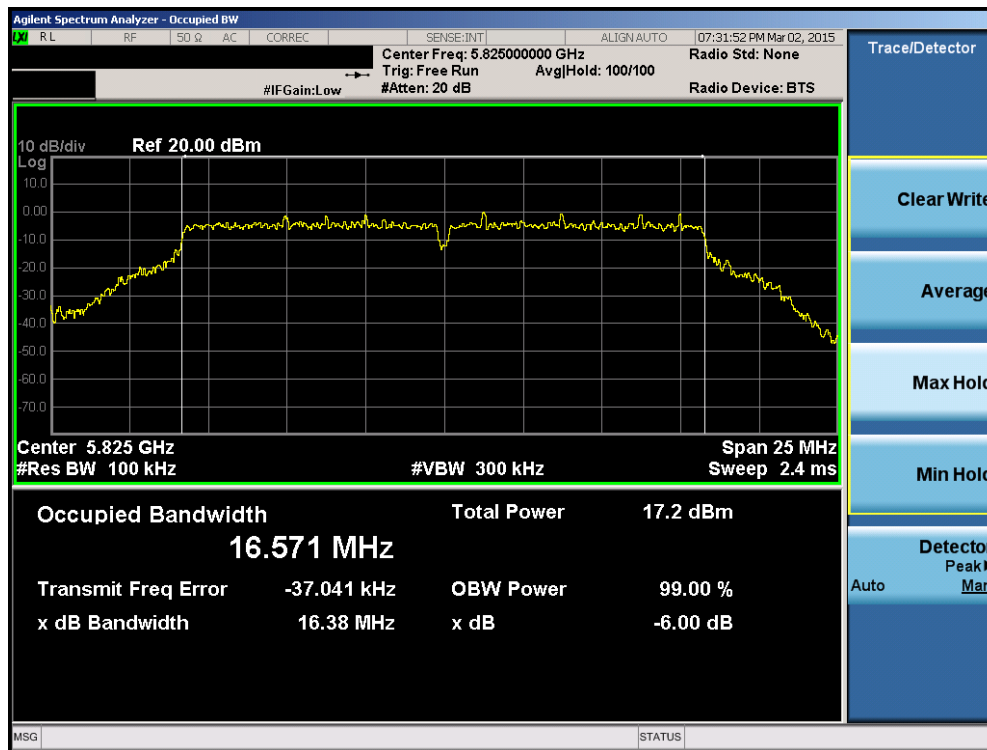


Plot 6-64. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

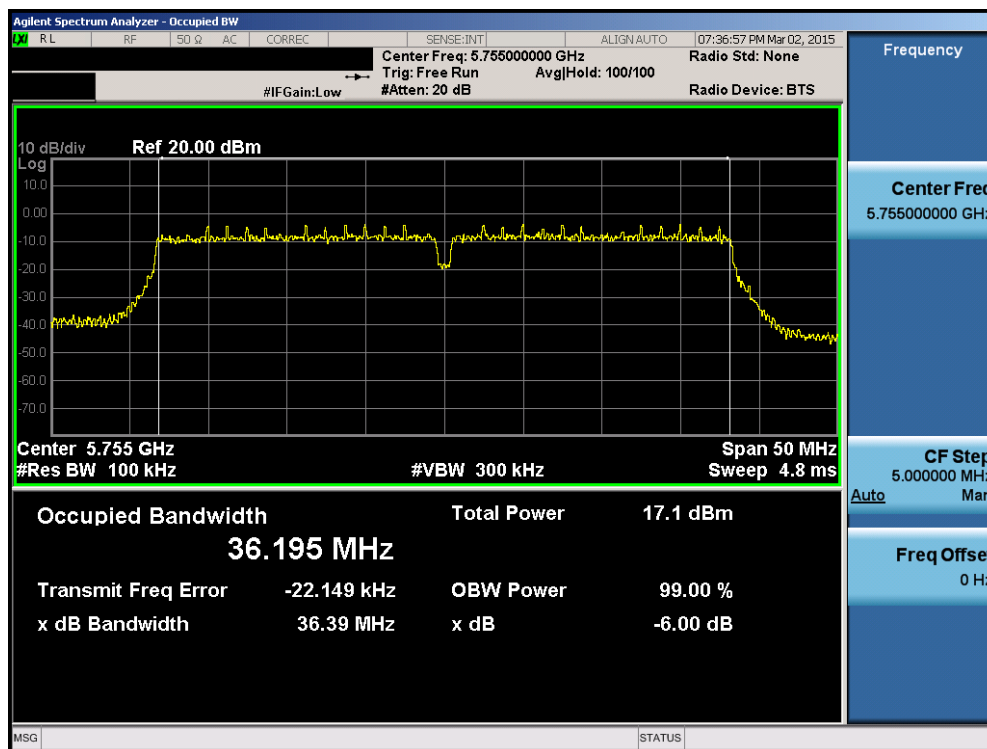


Plot 6-65. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 49 of 214

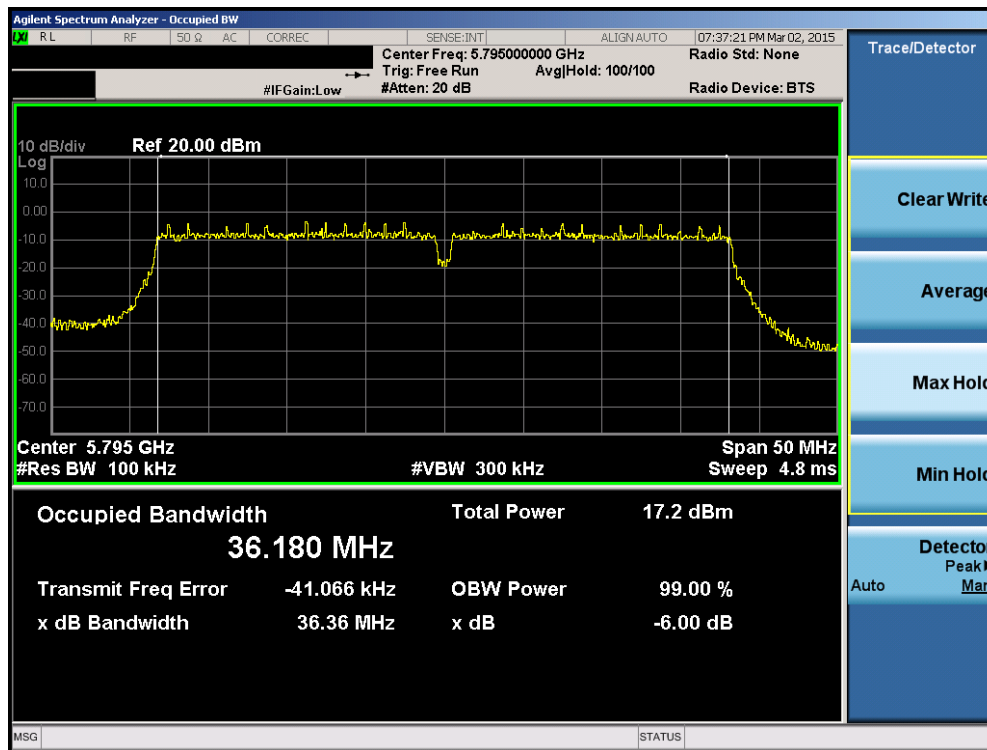

Plot 6-66. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

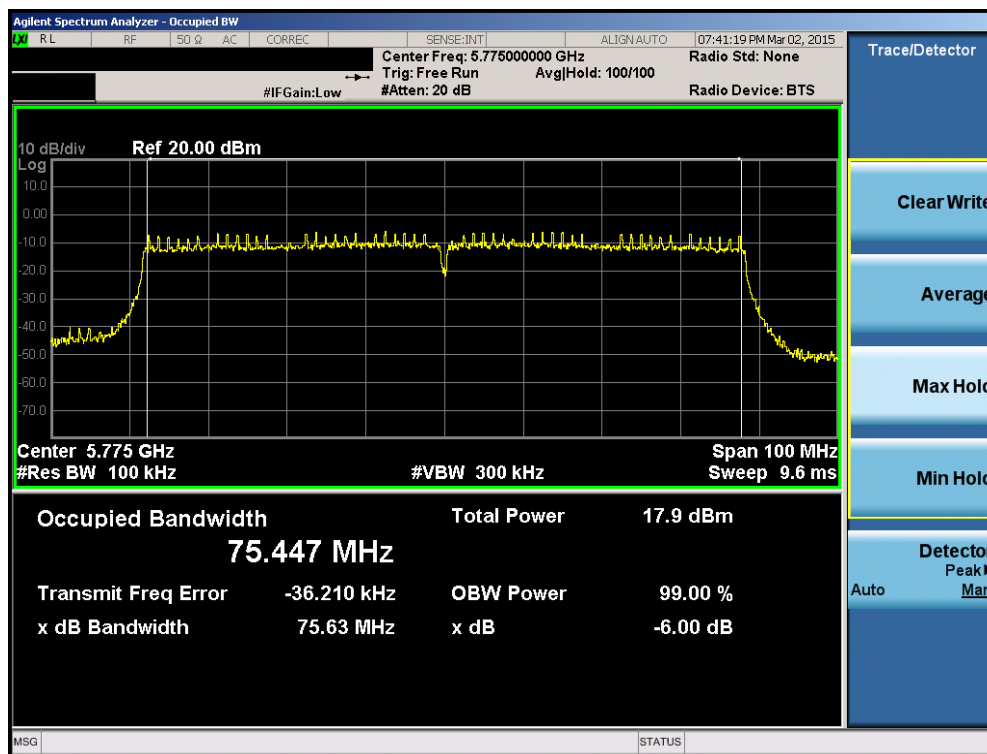


Plot 6-67. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 50 of 214

Antenna-2 6dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.38
	5785	157	a	6	16.36
	5825	165	a	6	16.38
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.60
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.62
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.64
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.40
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.35
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.70

Table 6-5. Conducted Bandwidth Measurements

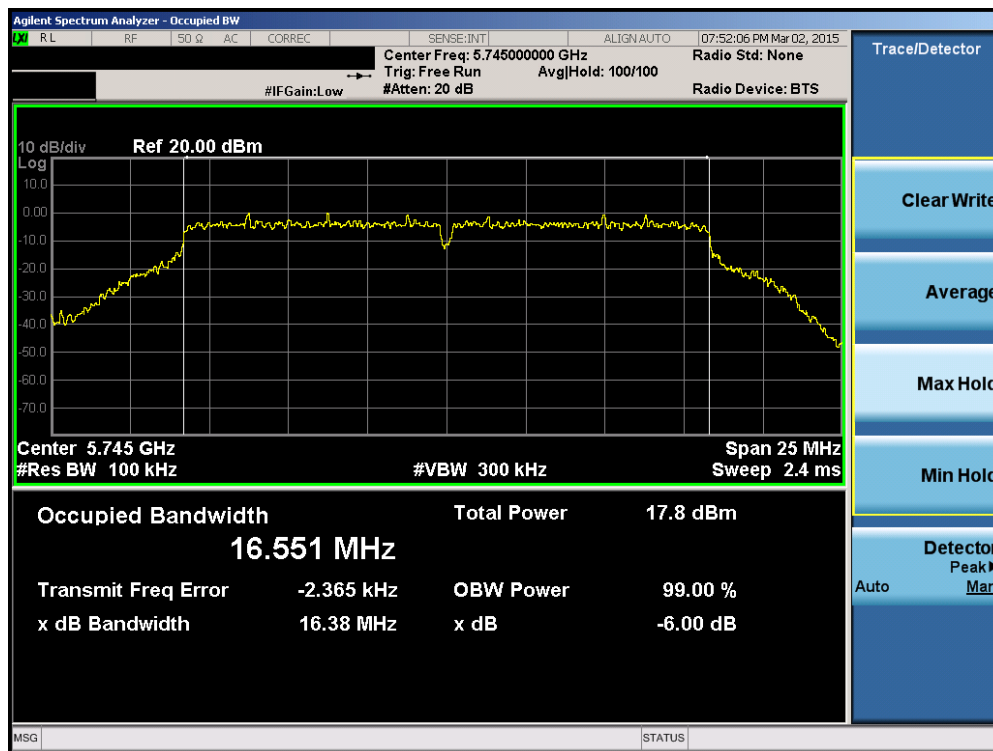


Plot 6-68. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset	Page 51 of 214	

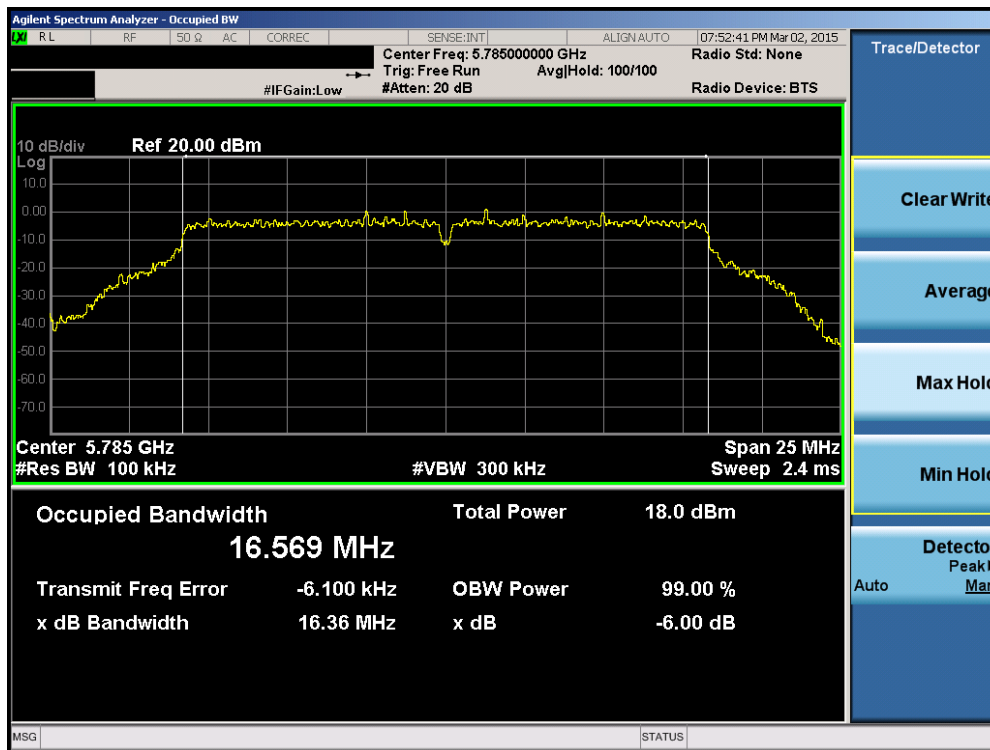


Plot 6-69. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

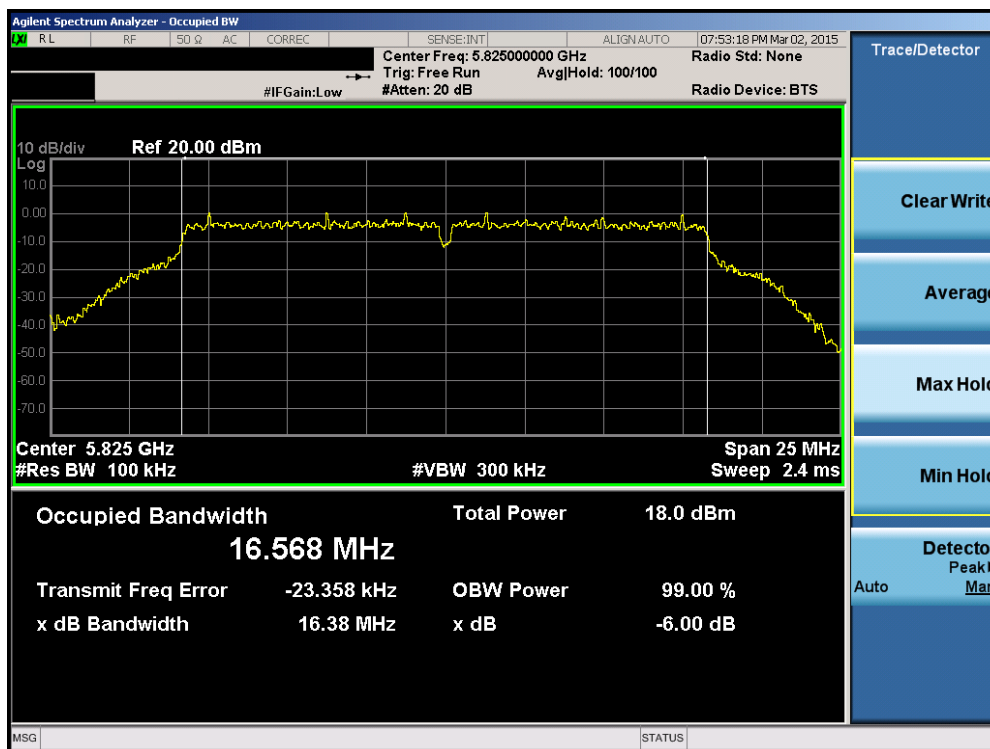


Plot 6-70. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 52 of 214

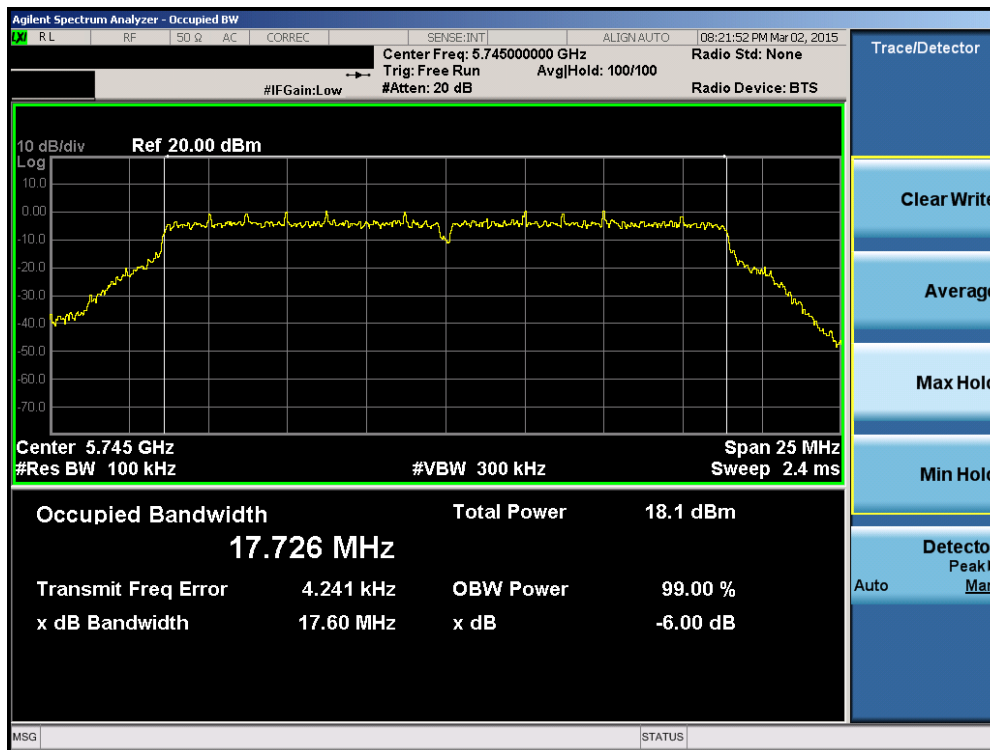


Plot 6-71. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

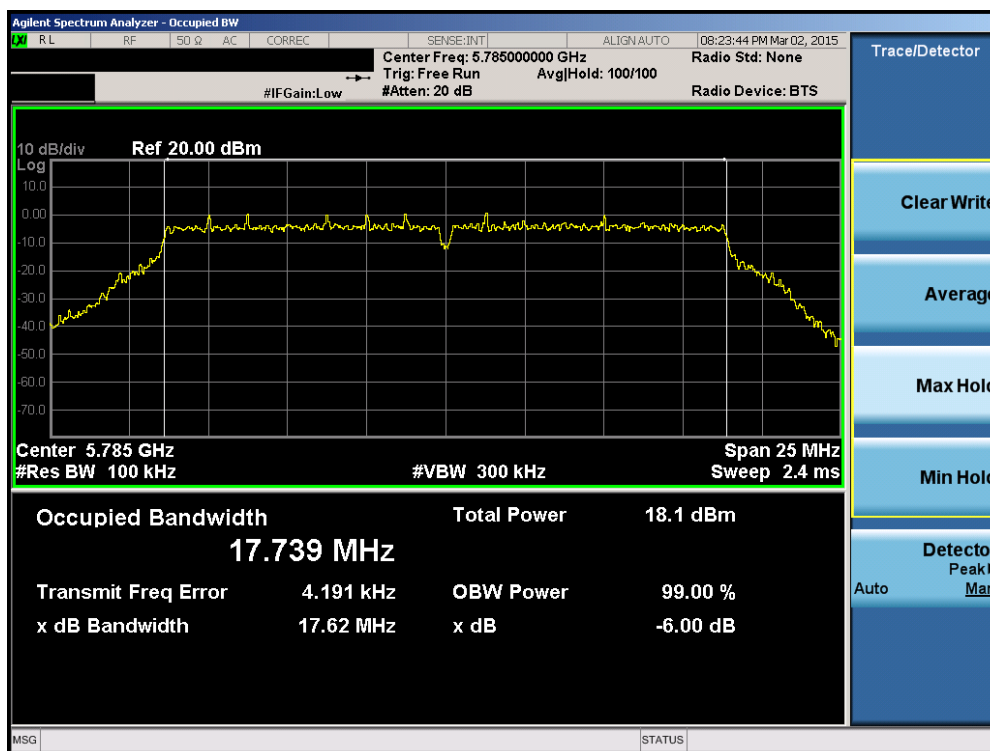


Plot 6-72. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 53 of 214

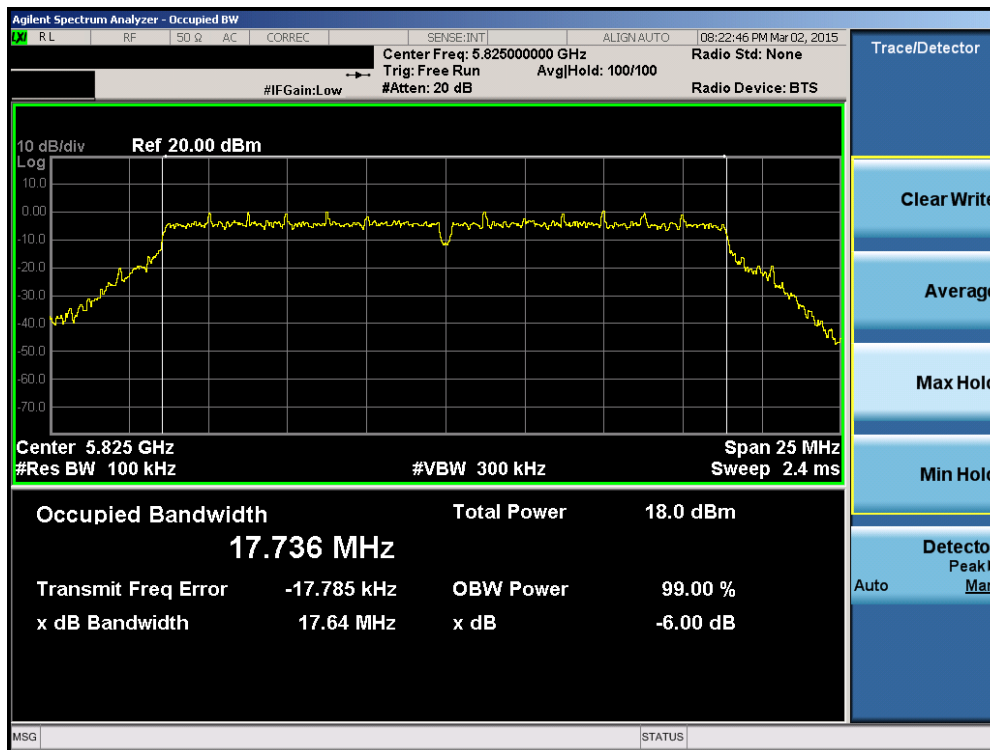


Plot 6-73. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

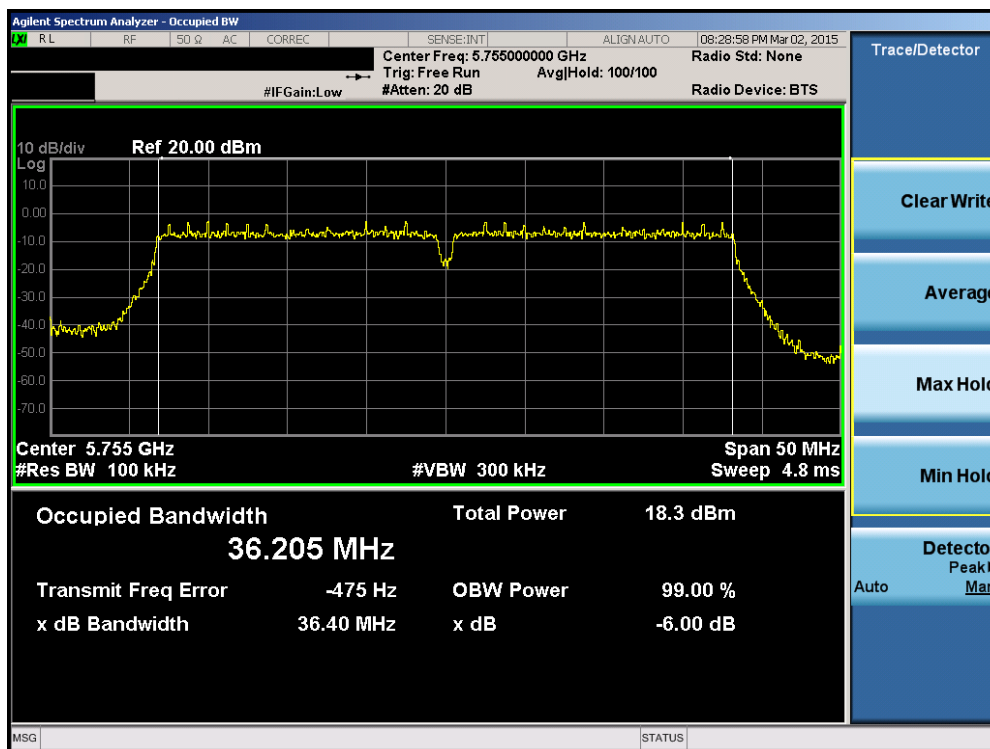


Plot 6-74. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 54 of 214

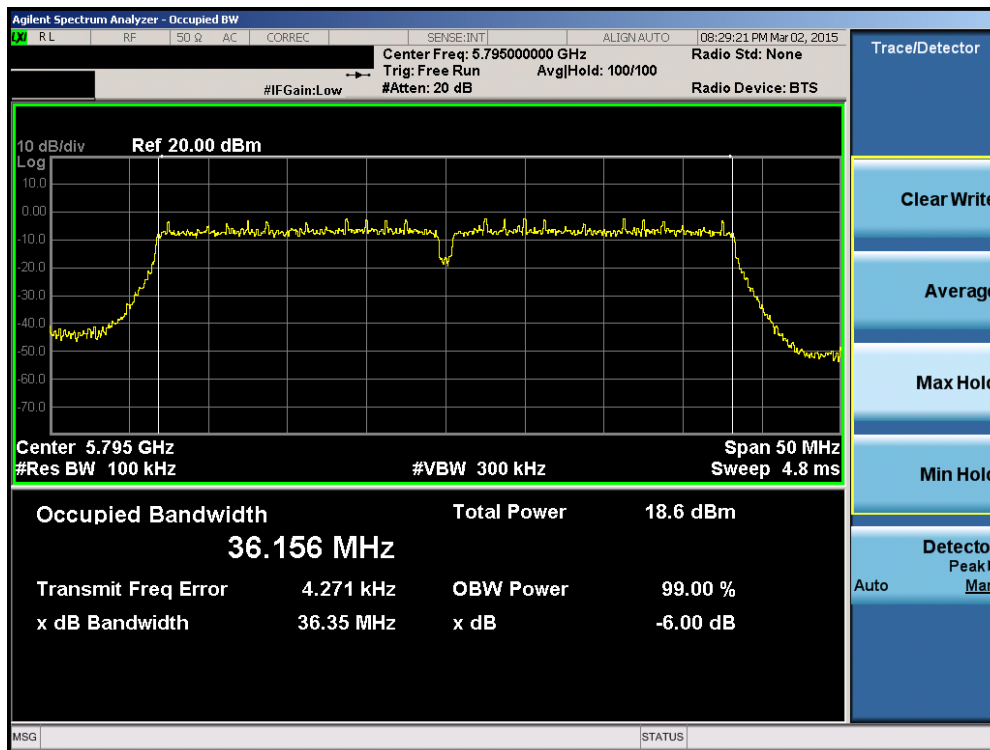

Plot 6-75. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

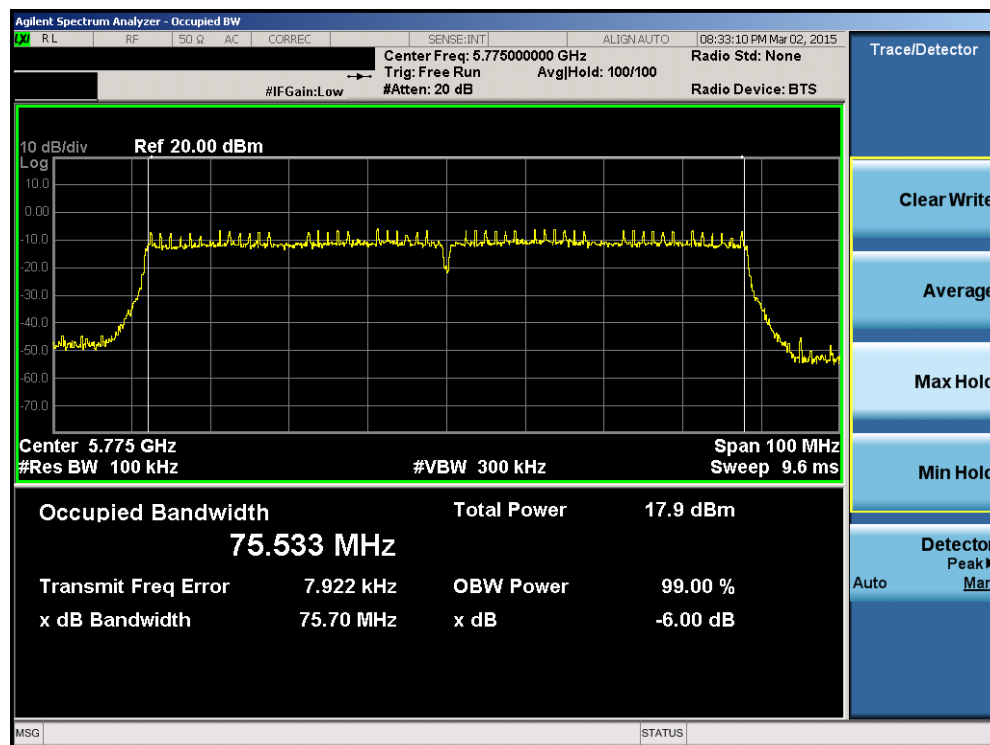

Plot 6-76. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3L404SC	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 55 of 214

6.4 UNII Output Power Measurement – 802.11a/n/ac §15.407 (a.1)

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.35) = 24.29\text{dBm}$.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.33) = 24.29\text{dBm}$.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).

Test Procedure Used

KDB 789033 D02 v01 – Section E)3)b) Method PM-G
KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

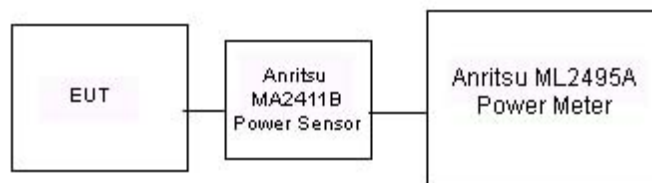




Figure 6-3. Test Instrument & Measurement Setup

Test Notes



None

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 56 of 214

Antenna-1 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5180	36	AVG	10.90	10.75	10.42
5200	40	AVG	10.73	10.70	10.41
5220	44	AVG	10.26	10.78	10.46
5240	48	AVG	10.65	10.52	10.35
5260	52	AVG	10.70	10.43	10.36
5280	56	AVG	10.65	10.83	10.15
5300	60	AVG	10.81	10.70	10.02
5320	64	AVG	10.55	10.59	9.91
5500	100	AVG	11.03	11.07	9.87
5540	108	AVG	10.58	10.34	9.55
5560	112	AVG	10.46	10.55	9.78
5580	116	AVG	11.07	11.05	9.60
5660	132	AVG	11.47	11.11	10.36
5700	140	AVG	10.81	10.70	10.28
5720	144	AVG	10.71	11.42	10.49
5745	149	AVG	10.98	10.95	10.46
5765	153	AVG	11.06	10.71	10.48
5785	157	AVG	10.81	10.77	10.41
5805	161	AVG	10.80	10.69	10.32
5825	165	AVG	10.68	10.62	10.35

Table 6-6. 20MHz BW (UNII) Maximum Conducted Output Power



FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset	Page 57 of 214	

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5190	38	AVG	10.52	10.32
5230	46	AVG	10.58	10.36
5270	54	AVG	11.23	10.35
5310	62	AVG	11.07	10.33
5510	102	AVG	10.98	9.52
5550	110	AVG	10.81	10.03
5670	134	AVG	11.31	10.00
5710	142	AVG	11.10	9.87
5755	151	AVG	11.22	9.93
5795	159	AVG	11.26	9.91

Table 6-7. 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode
			802.11ac
5210	42	AVG	10.05
5290	58	AVG	9.75
5530	106	AVG	9.81
5690	138	AVG	9.60
5775	155	AVG	9.68



Table 6-8. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset	Page 58 of 214	

Antenna-2 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5180	36	AVG	11.42	11.42	10.32
5200	40	AVG	11.41	11.33	10.19
5220	44	AVG	11.44	11.35	10.25
5240	48	AVG	11.46	11.41	10.32
5260	52	AVG	11.10	11.11	10.03
5280	56	AVG	11.09	11.01	9.87
5300	60	AVG	11.01	10.99	9.91
5320	64	AVG	10.95	10.91	9.78
5500	100	AVG	11.00	10.92	9.82
5540	108	AVG	11.15	11.06	10.07
5560	112	AVG	10.75	10.72	9.59
5580	116	AVG	10.68	10.63	9.54
5660	132	AVG	11.43	11.37	10.24
5700	140	AVG	11.41	11.41	10.33
5720	144	AVG	10.55	10.63	10.47
5745	149	AVG	11.41	11.41	10.28
5765	153	AVG	11.34	11.30	10.20
5785	157	AVG	11.45	11.38	10.27
5805	161	AVG	11.33	11.30	10.17
5825	165	AVG	11.20	11.19	10.08

Table 6-9. 20MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset	Page 59 of 214	

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5190	38	AVG	10.41	10.29
5230	46	AVG	10.37	10.24
5270	54	AVG	11.05	9.92
5310	62	AVG	11.01	9.87
5510	102	AVG	10.67	9.57
5550	110	AVG	10.62	9.53
5670	134	AVG	11.32	10.17
5710	142	AVG	11.28	10.16
5755	151	AVG	11.38	10.29
5795	159	AVG	11.15	10.00

Table 6-10. 40MHz BW (UNII) Maximum Conducted Output Power



5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode
			802.11ac
5210	42	AVG	10.24
5290	58	AVG	9.84
5530	106	AVG	9.47
5690	138	AVG	9.96
5775	155	AVG	10.13

Table 6-11. 80MHz BW (UNII) Maximum Conducted Output Power

MIMO Maximum Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5180	36	AVG	10.75	11.42	14.11
5200	40	AVG	10.70	11.33	14.04
5220	44	AVG	10.78	11.35	14.08
5240	48	AVG	10.52	11.41	14.00
5260	52	AVG	10.43	11.11	13.79
5280	56	AVG	10.83	11.01	13.93
5300	60	AVG	10.70	10.99	13.86
5320	64	AVG	10.59	10.91	13.76
5500	100	AVG	11.07	10.92	14.01
5540	108	AVG	10.34	11.06	13.73
5560	112	AVG	10.55	10.72	13.65
5580	116	AVG	11.05	10.63	13.86
5660	132	AVG	11.11	11.37	14.25
5700	140	AVG	10.70	11.41	14.08
5720	144	AVG	11.42	10.63	14.05
5745	149	AVG	10.95	11.41	14.20
5765	153	AVG	10.71	11.30	14.03
5785	157	AVG	10.77	11.38	14.10
5805	161	AVG	10.69	11.30	14.02
5825	165	AVG	10.62	11.19	13.92

Table 6-12. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power



FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset	Page 61 of 214	

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5180	36	AVG	10.42	10.32	13.38
5200	40	AVG	10.41	10.19	13.31
5220	44	AVG	10.46	10.25	13.37
5240	48	AVG	10.35	10.32	13.35
5260	52	AVG	10.36	10.03	13.21
5280	56	AVG	10.15	9.87	13.02
5300	60	AVG	10.02	9.91	12.98
5320	64	AVG	9.91	9.78	12.86
5500	100	AVG	9.87	9.82	12.86
5540	108	AVG	9.55	10.07	12.83
5560	112	AVG	9.78	9.59	12.70
5580	116	AVG	9.60	9.54	12.58
5660	132	AVG	10.36	10.24	13.31
5700	140	AVG	10.28	10.33	13.32
5720	144	AVG	10.49	10.47	13.49
5745	149	AVG	10.46	10.28	13.38
5765	153	AVG	10.48	10.20	13.35
5785	157	AVG	10.41	10.27	13.35
5805	161	AVG	10.32	10.17	13.26
5825	165	AVG	10.35	10.08	13.23

Table 6-13. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5190	38	AVG	10.52	10.41	13.48
5230	46	AVG	10.58	10.37	13.49
5270	54	AVG	11.23	11.05	14.15
5310	62	AVG	11.07	11.01	14.05
5510	102	AVG	10.98	10.67	13.84
5550	110	AVG	10.81	10.62	13.73
5670	134	AVG	11.31	11.32	14.33
5710	142	AVG	11.10	11.28	14.20
5755	151	AVG	11.22	11.38	14.31
5795	159	AVG	11.26	11.15	14.22

Table 6-14. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset	Page 62 of 214	

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5190	38	AVG	10.32	10.29	13.32
5230	46	AVG	10.36	10.24	13.31
5270	54	AVG	10.35	9.92	13.15
5310	62	AVG	10.33	9.87	13.12
5510	102	AVG	9.52	9.57	12.56
5550	110	AVG	10.03	9.53	12.80
5670	134	AVG	10.00	10.17	13.10
5710	142	AVG	9.87	10.16	13.03
5755	151	AVG	9.93	10.29	13.12
5795	159	AVG	9.91	10.00	12.97

Table 6-15. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power [dBm]					
Freq [MHz]	Channel	Detector	IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5210	42	AVG	10.05	10.24	13.16
5290	58	AVG	9.75	9.84	12.81
5530	106	AVG	9.81	9.47	12.65
5690	138	AVG	9.60	9.96	12.79
5775	155	AVG	9.68	10.13	12.92

Table 6-16. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Note:



Per KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 5180MHz the average conducted output power was measured to be 10.75 dBm for Antenna-1 and 11.42 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(10.75 \text{ dBm} + 11.42 \text{ dBm}) = (11.89 \text{ mW} + 13.87 \text{ mW}) = 25.75 \text{ mW} = 14.11 \text{ dBm}$$

FCC ID: A3L404SC		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503240643.A3L	Test Dates: 02/16-03/09/2015	EUT Type: Portable Handset		Page 63 of 214