

# TEST REPORT

## Electromagnetic Compatibility

**Report Reference No. ....: 460693-4TRFEMC**

Date of issue .....: 2022-05-20

Test Report Verdict .....: PASS

**Testing Laboratory.....: Nemko S.p.A.**

Address.....: Via Del Carroccio, 4

City .....: 20853 Biassono (MB)

Country .....: Italy

Testing location.....: Described at clause 1.4


**Customer name.....: Eurotech Spa**

Customer information.....: Via Fratelli Solari, 3/A – 33020 Amaro (UD) – Italy

**Reference standards.....: FCC CFR 47 Part 15 Subpart B**

Standard application .....: Full application


**Equipment under test .....: AI and Machine Vision Subsystem for Rolling Stock and Automotive**

Trademark(s) .....:  **EUROTECH**

Manufacturer.....: Eurotech Spa

Model/Type reference .....: Described at clause 4.1

Tests performed by .....: P. Barbieri



Report approved by.....: D. Guarnone



## CONTENTS

1. GENERAL INFORMATION.....	3
1.1 Project history .....	3
1.2 Symbol used in the report .....	3
1.3 Date of sample(s) reception and tests .....	3
1.4 Testing location .....	4
1.5 Environmental conditions .....	4
1.6 Measurement uncertainty and assessment of conformity .....	4
1.7 Instruments calibration table .....	6
2. PRODUCT STANDARDS, TEST METHODS AND TECHNICAL PROCEDURES .....	7
2.1 Standard(s) applied.....	7
2.2 Test method(s) applied.....	7
2.3 Nemko technical procedures.....	7
3. SUMMARY OF TEST RESULTS AND VERDICTS .....	8
3.1 Measurement of electromagnetic disturbances emitted by the equipment under test .....	8
4. EQUIPMENT UNDER TEST .....	9
4.1 EUT Identification .....	9
4.2 EUT Power Supply.....	10
4.3 EUT Information declared by the Customer <sup>1</sup> .....	10
4.4 EUT Operation Modes .....	10
4.5 EUT Configuration Modes.....	11
4.6 EUT Input/Output Ports.....	11
4.7 EUT and Equipment Used During Test .....	12
4.8 EUT Electric/Block Diagram .....	13
4.9 Information about radio module(s).....	13
5 TEST RESULTS .....	14
5.1 Radiated Emission .....	14
5.2 Conducted emission .....	25
6 EUT PHOTOS .....	29

## 1. GENERAL INFORMATION

### 1.1 Project history

Report number	Modification to the report / comments	Date
460693-4TRFEMC	First release	2022-05-20
--	--	--
--	--	--
--	--	--

### 1.2 Symbol used in the report

<input checked="" type="checkbox"/> .....	The crossed square indicates that the listed condition, standard or equipment is applicable for this report.
<input type="checkbox"/> .....	The empty square indicates that the listed condition, standard or equipment is not applicable for this report.
NP (Not performed) .....	Test case not performed according to customer request
N (Not applicable) .....	Test case does not apply to the test object
P (Pass) .....	Test object does meet the requirement
F (Fail) .....	Test object does not meet the requirement
<input type="checkbox"/> Comma (,) / <input checked="" type="checkbox"/> Dot (.) .....	Symbol used as decimal separator throughout this report
Asterisk (*) .....	Symbol not used throughout this report
EUT .....	Equipment Under Test
The results contained in this report reflect the results for this particular model(s) and serial number(s) and apply to the sample(s) as received. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.	

### 1.3 Date of sample(s) reception and tests

Date of receipt of test sample(s) .....	2022-04-29
Testing start date .....	2022-05-05
Testing termination date .....	2022-05-20

#### 1.4 Testing location

The tests have been performed in the place indicated below:

☒ Nemko premises location .....: Nemko S.p.A.  
 Via Del Carroccio, 4  
 20853 Biassono (MB) - Italy  
 FCC site number: 682159

☐ Other location .....: --  
 --  
 --

#### 1.5 Environmental conditions

The tests were carried out in the ranges of environmental conditions specified below:

Ambient temperature .....: 18-33 °C <sup>1</sup>

Relative Humidity .....: 25-70 % <sup>2</sup>

Atmospheric pressure .....: 860-1060 hPa

Notes:  
<sup>1</sup> For luminaire, temperature during tests was verified to be within 18 ÷ 30 °C  
<sup>2</sup> During ESD test, humidity was verified to be within 30 ÷ 60 %

The following instruments are used to monitor the environmental conditions:

Equipment	Trademark	Model	Serial No.
Thermo-hygrometer	Testo	175-H2	20012380/305
Thermo-hygrometer	Testo	175-H2	38203337/703
Barometer	Castle	GPB 3300	072015

#### 1.6 Measurement uncertainty and assessment of conformity

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002. The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Disturbance	Antenna distance 1 m, 3 m, 10 m 0.009 ÷ 200 MHz	5.0 dB	(1)
	Antenna distance 1 m, 3 m, 10 m 200 ÷ 1000 MHz	5.2 dB	(1)
	Antenna distance 1 m, 3 m, 10 m 1 ÷ 6 GHz	5.2 dB	(1)
	Antenna distance 1 m, 3 m 6 ÷ 18 GHz	5.5 dB	(1)
	Antenna distance 1 m, 3 m 18 ÷ 40 GHz	7.2 dB	(1)
Radiated Disturbance with large loop antenna system (LLAS)	0.009 ÷ 30 MHz	3.3 dB	(1)
Conducted Disturbance	0.02 ÷ 150 kHz with AMN	3.8 dB	(1)
	150 kHz ÷ 30 MHz with AMN	3.4 dB	(1)
	150 kHz ÷ 30 MHz with AAN	4.6 dB	(1)
	9 kHz ÷ 30 MHz with voltage probe	2.9 dB	(1)
	150 kHz ÷ 30 MHz with current probe	2.9 dB	(1)
Frequency	10 Hz ÷ 1 kHz	0.2 %	(1)
	1 kHz ÷ 40 GHz	10 <sup>-6</sup>	(1)
Electromagnetic fields (EMF)	Magnetic, Electric and Electromagnetic fields: 0 Hz ÷ 40 GHz	25 %	(1)
Electrical quantities (voltage, current, resistance)	AC/DC Voltage 10 mV ÷ 1000 V 0÷100 kHz AC/DC Current 0.1 mA ÷ 400 A 0÷1 kHz Resistance 100 mΩ ÷ 10 MΩ	2.5 %	(1)
NOTES: (1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k = 2, which for a normal distribution corresponds to a coverage probability of approximately 95 % (2) The instruments used for this immunity test is according to the tolerances requested by the applicable standard (3) The reported expanded uncertainty of measurement is related to the stimulus quantity			

## 1.7 Instruments calibration table

Instrument cited in the report and not listed in this paragraph are not subject to calibration. The calibration is valid up to the last day of the due date month.

Description	Manufacturer	Model	Identifier	Cal Date	Due Date
EMI Receiver	Rohde & Schwarz	ESW44	101620	2021-08	2022-08
EMI Receiver	Rohde & Schwarz	ESU8	100202	2021-09	2022-09
Antenna Trilog 25MHz - 8GHz	Schwarzbeck Mess-Elektronik	VULB9162	9162-025	2021-07	2024-07
Antenna Trilog 25-2000 MHz	Schwarzbeck Mess-Elektronik	VULB9168	9168-242	2021-06	2024-06
Antenna 1 - 18 GHz	Schwarzbeck Mess-Elektronik	STLP9148	STLP 9148-152	2021-09	2024-09
Antenna 1 - 18 GHz	Schwarzbeck Mess-Elektronik	STLP9148	STPL 9148-123	2021-06	2024-06
Double Ridge Horn Antenna	RFSpin	DRH40	061106A40	2020-04	2023-04
Broadband Bench Top Amplifier	Sage	STB-1834034030-KFKF-L1	18490-01	2022-05	2023-05
Broadband Amplifier	Schwarzbeck Mess-Elektronik	BBV9718C	00121	2022-03	2023-03
Preamplifier	Schwarzbeck Mess-Elektronik	BBV9718	BBV9718-137	2022-04	2023-04
Semi-anechoic chamber	Nemko S.p.a.	10m semi-anechoic chamber	530	2021-09	2023-09
Common Mode Absorption Device	Schwarzbeck Mess-Elektronik	CMAD1614	00041	2022-05	2023-05
LISN	Rohde & Schwarz	ESH2-Z5	881 362/006	2022-03	2023-03
LISN	Rohde & Schwarz	ESH2-Z5	872 460/041	2021-09	2022-09
V-network	Rohde & Schwarz	ESH3-Z5	840 731/004	2021-09	2022-09
Oscilloscope	Agilent	54846A	MY40000254	2020-11	2022-11
Multimeter	Rohde & Schwarz	HMC8012	101577	2021-06	2022-06
Barometer	Castle	GBP 3300	072015	2022-04	2023-04
Data logger con diagnosi in campo	Testo	175-H2	20012380/305	2020-12	2022-12
Data logger con diagnosi in campo	Testo	175-H2	38203337/703	2020-12	2022-12
Attenuator	Aeroflex / Weinschel	2	CC8577	2021-07	2022-07

## 2. PRODUCT STANDARDS, TEST METHODS AND TECHNICAL PROCEDURES

### 2.1 Standard(s) applied

The following standard(s) or specifications were applied:

#### **FCC CFR 47 Part 15 Subpart B**

Code of Federal Regulations – Title 47 – Part 15 Radio Frequency Devices – Subpart B  
Unintentional radiators

### 2.2 Test method(s) applied

The following documents are referred to in the standard(s) in such a way that some or all of their content constitutes requirements for the standard itself.

#### **ANSI C63.4 (2014)**

American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

### 2.3 Nemko technical procedures

**WM L0177:** General routines for using instruments at Nemko

**WM L1002:** Measurement Uncertainty - Policy and Statement

**WM L0077:** General procedure for conducting EMC tests

### 3. SUMMARY OF TEST RESULTS AND VERDICTS

#### 3.1 Measurement of electromagnetic disturbances emitted by the equipment under test

Emission Tests		
Requirement / test	Method Standard	Verdict
Part §15.107 – Conducted emission	ANSI C63.4	P
Part §15.109 – Radiated emission	ANSI C63.4	P
Notes: --		



## 4. EQUIPMENT UNDER TEST

### 4.1 EUT Identification

Short description of the EUT	
<p>The EUT is a rugged subsystem that has been designed to deliver GPU acceleration to Rolling Stock and Automotive applications. Based on NVIDIA Jetson Xavier NX, it combines a 6-core, high-performance ARM CPU with a 384-core GPU and 48 Tensor Cores, offering exceptional power efficiency and up to 21 TOPS of accelerated computing. The EUT can be used to process multiple video streams from high speed, high frame rate cameras: it provides 3x GbE, 4x GMSL and 3x USB3.1 Gen 2 ports (noise and surge protected) that can be used to connect sensors and to create sophisticated networking architectures. Wireless connectivity is also cutting edge, thanks to Wi-Fi 6 and support for LTE modems. The EUT offers plenty of storage capacity for video and other data via an internal NVME unit; removable storage is also supported via a microSD interface. On-vehicle features include isolated CAN-FD and opto-isolated DIO, a GNSS with Untethered Dead Reckoning (optionally RTK), and rugged M12 connectors.</p>	
Copy of marking plate(s) (if present)	
Sample ID .....	A122AT50098
Model/Type .....	BTGPU1031
Ratings .....	24 – 110 V DC, 25 W
Equipment installation .....	DIN rail mounting
Accessories and detachable parts included .....	Antennas and cables
Test performed.....	All tests were performed on this sample
Software and/or firmware information .....	Linux kernel version 4.9.253-tegra
Product variants not tested: --	


## 4.2 EUT Power Supply

Used <sup>1</sup>	N° <sup>2</sup>	Type	Supply Voltage	Phases N°	Supplementary Information
<input checked="" type="checkbox"/>	1	DC	24 V		with external earth connection
Notes: <sup>1</sup> The crossed square indicates that the supply voltage is used in at least one test. <sup>2</sup> This number will be used all over the report to identify the supply voltage(s) used for each test.					

## 4.3 EUT Information declared by the Customer <sup>1</sup>


Information	Declaration
EUT highest frequency <sup>2</sup> .....	fc = 6000 MHz
Environment intended use.....	Railway
Equipment classification <sup>3</sup> .....	A
Notes: <sup>1</sup> Nemko S.p.A. declines all responsibility for the information above declared by the customer that may influence the validity of the results contained in this test report. <sup>2</sup> For host products with certified modular transmitter, the frequency range of investigation of the composite system is specified by rule in Sections 15.33(a)(1) through (a)(3), or the range applicable to the digital device, as shown in Section 15.33(b)(1), whichever is the higher frequency range of investigation. <sup>3</sup> Equipment class and category definitions are specified in the standard used.	

## 4.4 EUT Operation Modes

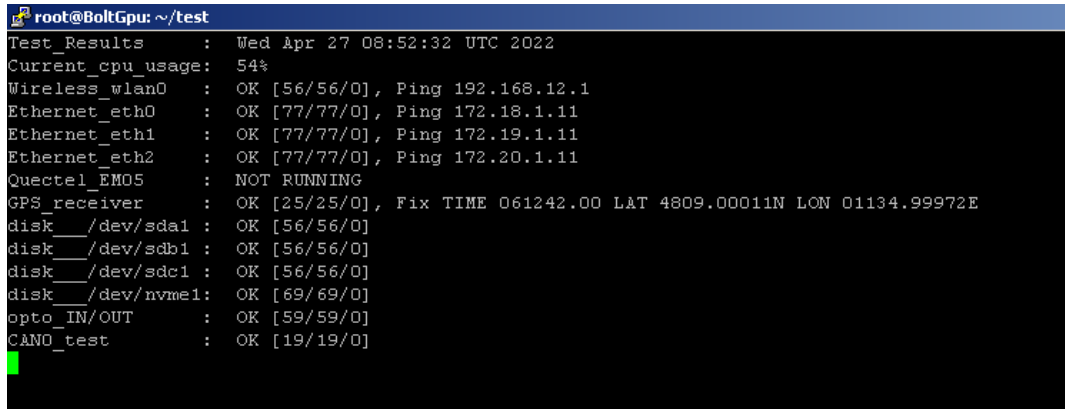N°	Description
1	Test mode running a dedicated script as following (without radio link) 
Notes: --	

#### 4.5 EUT Configuration Modes

The EUT was configured to measure its highest possible radiation level. The test modes selected are according to EUT instruction manual.

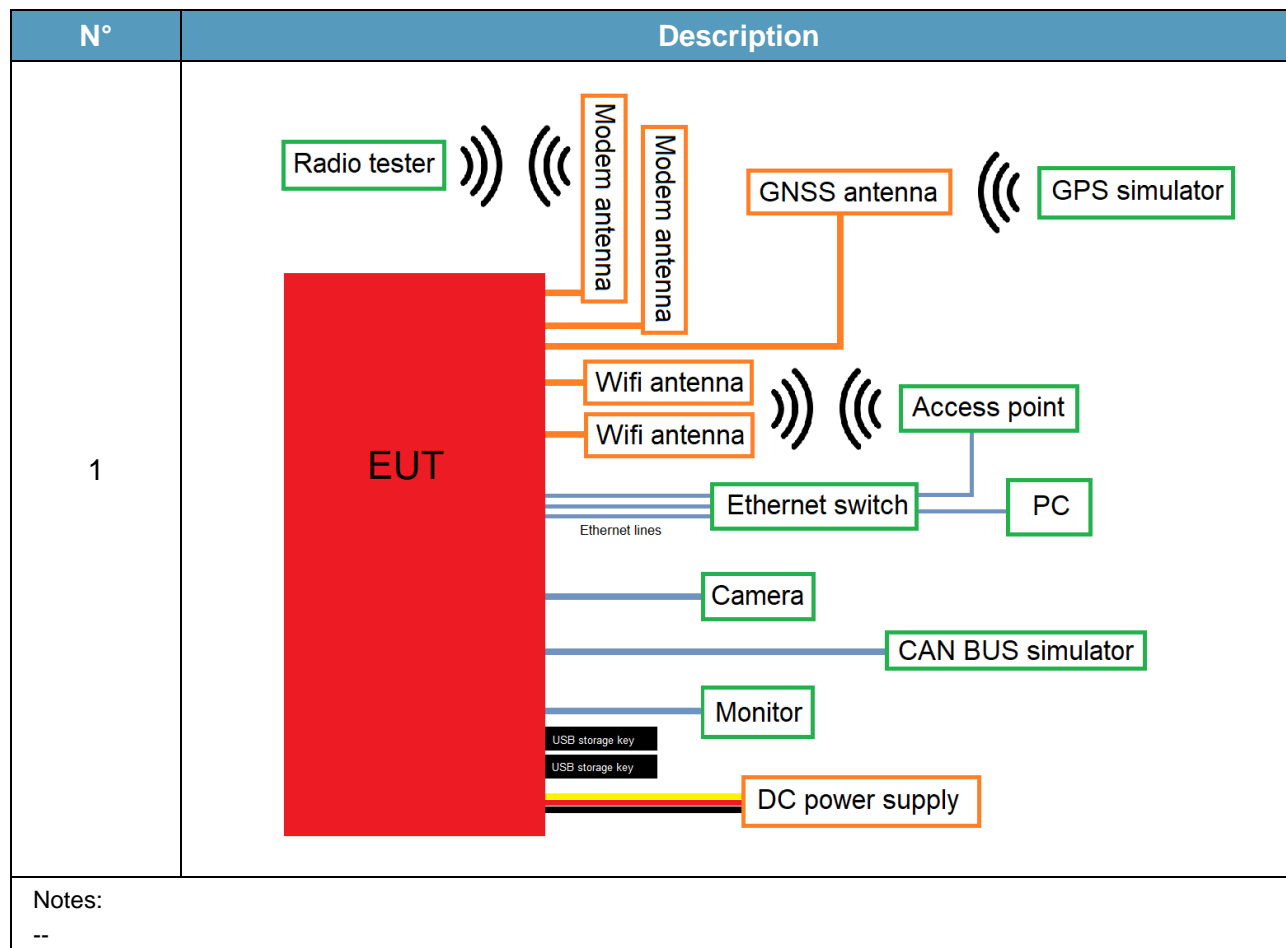

#### 4.6 EUT Input/Output Ports

Port	Name	Type <sup>1</sup>	Cable Max. >3m	Cable Shielded	Description
0	ENCLOSURE	N/E	—	—	—
1	DC POWER	DC	☒	☐	Three wires cable
2	ETH0	TP	☒	☒	Shielded cable with RJ45 conn
3	ETH1	TP	☒	☒	Shielded cable with RJ45 conn
4	ETH2	TP	☒	☒	Shielded cable with RJ45 conn
5	CAMERA	I/O	☒	☒	Coaxial cable with Fakra conn
6	DP	I/O	☒	☒	Display port cable
7	I/O	I/O	☒	☒	CAN BUS DB9 cable

Port	Name	Type <sup>1</sup>	Cable Max. >3m	Cable Shielded	Description
8	USB0	I/O	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Direct plug-in for USB key
9	USB1	I/O	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Direct plug-in for USB key
10	A1	ANT	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable (modem)
11	A2	ANT	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable (modem)
12	A3	ANT	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable (gps)
13	A4	ANT	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable (wifi)
14	A5	ANT	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable (wifi)
15	HEARTH	GND	<input type="checkbox"/>	<input type="checkbox"/>	Single wire cable
Notes: <sup>1</sup> Port type: AC = AC Power Port      DC = DC Power Port      N/E = Non-Electrical      ANT = Antenna Port I/O = Signal/Control Input or Output Port      TP = Wired network or telecommunication Port					

#### 4.7 EUT and Equipment Used During Test

Use <sup>1</sup>	Product Type	Manufacturer	Model	Comments
AE	Notebook	ACER	LG1	Provided by the manufacturer
AE	Ethernet switch	NETGEAR	GS305	Provided by the manufacturer
AE	Can tester	EUROTECH	Serial & CAN tester	Provided by the manufacturer
AE	Camera	LEOPARD	CI-AR0231	Provided by the manufacturer
AE	Access point	EUROTECH	ReliaGATE 50-21	Provided by the manufacturer
AE	Radio tester	R&S	CMW290	Provided by Nemko Spa
AE	GPS simulator	R&S	SMBV100A	Provided by Nemko Spa
EUT	Modem antenna	2J-Antennas	2JW0124-C8868B	--
EUT	Modem antenna	2J-Antennas	2JW0124z-C8868B	--
EUT	WIFI antenna	Linx Technologies	ANT-DB1-RAF-RPS	--
EUT	WIFI antenna	Linx Technologies	ANT-DB1-RAF-RPS	--
EUT	GNSS antenna	2J-Antennas	2J4301MPCF-300LL100-C20NBST	--
Notes: <sup>1</sup> Use EUT - Equipment Under Test      SIM - Simulator (Not Subjected to Test) AE - Auxiliary/Associated Equipment (Not Subjected to Test)				

#### 4.8 EUT Electric/Block Diagram

Not applicable
----------------

#### 4.9 Information about radio module(s)

Radio module 1	
Description	Information
Identification:	Model: AFX-QCA6174-NX      Trademark: Airtos
Frequency band (MHz):	2400 to 2483.5 MHz / 5150 to 5725 MHz
Modulation type:	Standard Wi-Fi 802.11a/b/g/n/ac
Antenna information:	Linx Technologies ANT-DB1-RAF-RPS
Other information:	R-SMA connector
Notes: --	

Radio module 2	
Description	Information
Identification:	Model: EM05-G      Trademark: Quectel
Frequency band (MHz):	LTE FDD: B1 / B2 / B3 / B4 / B5 / B7 / B8 / B12 / B13 / B14 B18 / B19 / B20 / B25 / B26 / B28 / B66 / B71 LTE TDD: B38 / B39 / B40 / B41 WCDMA: B1 / B2 / B4 / B5 / B6 / B8 / B19
Modulation type:	Standard LTE and WCDMA
Antenna information:	2J-Antennas 2JW0124-C8868B and 2JW0124z-C8868B
Other information:	SMA connector
Notes: --	

Radio module 3	
Description	Information
Identification:	Model: NEO-M8U      Trademark: u-blox
Frequency band (MHz):	1559 to 1610 MHz
Modulation type:	Standard GNSS
Antenna information:	2J-Antennas 2J4301MPCF-300LL100-C20NBST
Other information:	SMA connector
Notes:	

## 5 TEST RESULTS

### 5.1 Radiated Emission

#### 5.1.1 Test result

Verdict:	<input checked="" type="checkbox"/> P <input type="checkbox"/> F <input type="checkbox"/> N <sup>1</sup> <input type="checkbox"/> NP
Frequency range:	30 MHz – 40000 MHz <sup>2</sup>
Test site:	Semi anechoic chamber
Measurement distance:	3 m or 10 m <sup>3</sup>
Notes: <sup>1</sup> If marked, the test is not applicable for the EUT. <sup>2</sup> For host products with certified modular transmitter, the frequency range of investigation of the composite system is specified by rule in Sections 15.33(a)(1) through (a)(3), or the range applicable to the digital device, as shown in Section 15.33(b)(1), whichever is the higher frequency range of investigation. <sup>3</sup> Test was performed at 10 m measurement distance for class A EUT in the frequency range from 30 to 1000 MHz; test was performed at 3 m measurement distance in all other cases.	

#### 5.1.2 Photo documentation of the test set-up



### 5.1.3 Test method

Method standard is reported at par. 3.1. Measurements were made on a semi anechoic chamber. Preliminary measurements were performed at an antenna to EUT separation distance of 3 or 10 meters with the receive antenna located at a fixed height (from 1 to 4 meter) in both horizontal and vertical polarizations. Final measurements were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 meters. All frequencies were investigated in both horizontal and vertical antenna polarization, where applicable.

Receiver reading  $P_R$ , reported in tables at clause 5.1.6, was achieved adjusting the input signal  $P_{IN}$  by a correction factor  $CF$ , to take into account of the insertion loss due to cables and attenuators, the antenna factor, the external preamplifier gain. This correction factor was pre-inserted in the firmware of the receiver and was applied by the instrument during the test. The relationship between  $P_R$  and  $P_{IN}$ , expressed in dB, is:

$$P_R = P_{IN} + CF$$

### 5.1.4 Limits for enclosure

Radiated emission <sup>1</sup>				
Frequency (MHz)	Limit for Class A EUT		Limit for Class B EUT	
	μV/m	dBμV/m	μV/m	dBμV/m
30 to 88	90	39.0	100	40.0
88 to 216	150	43.5	150	43.5
216 to 960	210	46.4	200	46.0
960 to 1000	300 <sup>2</sup>	49.5 <sup>2</sup>	500 <sup>2</sup>	54.0 <sup>2</sup>
Above 1000 <sup>3</sup>	1000 <sup>2</sup>	59.5 <sup>2</sup>	500 <sup>2</sup>	54.0 <sup>2</sup>
Notes: <sup>1</sup> For frequency range between 30 to 1000 MHz Quasi-Peak detector is used. For frequency range above 1000 MHz Average and Peak detector are used. <sup>2</sup> Above 1000 MHz, the limit reported refers to measurement s performed with Average detector. For measurements performed with Peak detector the limit is 20 dB greater. <sup>3</sup> For Class A radiated emission above 1 GHz, a measurement distance of 3 m can be used, with the limits increased by 10 dB.				

### 5.1.5 Test equipment used<sup>1</sup>

Used <sup>2</sup>	Description	Manufacturer	Model	Identifier
<input checked="" type="checkbox"/>	SAC	Nemko Spa	10m SAC	530
<input checked="" type="checkbox"/>	EMI receiver	Rohde & Schwarz	ESW44	101620
<input type="checkbox"/>	EMI receiver	R&S	ESU8	100202
<input type="checkbox"/>	Common mode absorption device	Schwarzbeck	CMAD1614	00041
<input checked="" type="checkbox"/>	Antenna	Schwarzbeck	VULB9162	VULB9162-025
<input type="checkbox"/>	Antenna	Schwarzbeck	VULB9168	VULB9168-242
<input checked="" type="checkbox"/>	Antenna	Schwarzbeck	STLP9148	STLP9148-123
<input type="checkbox"/>	Antenna	Schwarzbeck	STLP9148	STLP9148-152
<input checked="" type="checkbox"/>	Antenna	RF Spin	DRH40	061106A40
<input type="checkbox"/>	Preamplifier	Schwarzbeck	BBV9718	BBV9718-137
<input checked="" type="checkbox"/>	Preamplifier	Schwarzbeck	BBV9718C	00121
<input checked="" type="checkbox"/>	Preamplifier	Sage	STB-1834034030-	18490-01
<input checked="" type="checkbox"/>	Controller for turntable and antenna mast	Maturo	FCU3.0	10041
<input checked="" type="checkbox"/>	Tilt antenna mast	Maturo	TAM4.0-E	10042
<input checked="" type="checkbox"/>	Turntable 4.5 t	Maturo	TT4.0-5T	2.527
Notes: <sup>1</sup> See clause 1.7 for calibration information. <sup>2</sup> If crossed, the instrument was used during tests.				



### 5.1.7 Test protocol


Antenna Polarization	Supply Voltage <sup>1</sup>	Test Mode		Remarks	Verdict
		Operation <sup>2</sup>	Configuration <sup>3</sup>		
Horizontal	1	1	1	Range 30 to 1000 MHz	P

Notes:

<sup>1</sup> See clause 4.2 EUT Power Supply

<sup>2</sup> See clause 4.4 EUT Operation Modes

<sup>3</sup> See clause 4.5 EUT Configuration Modes

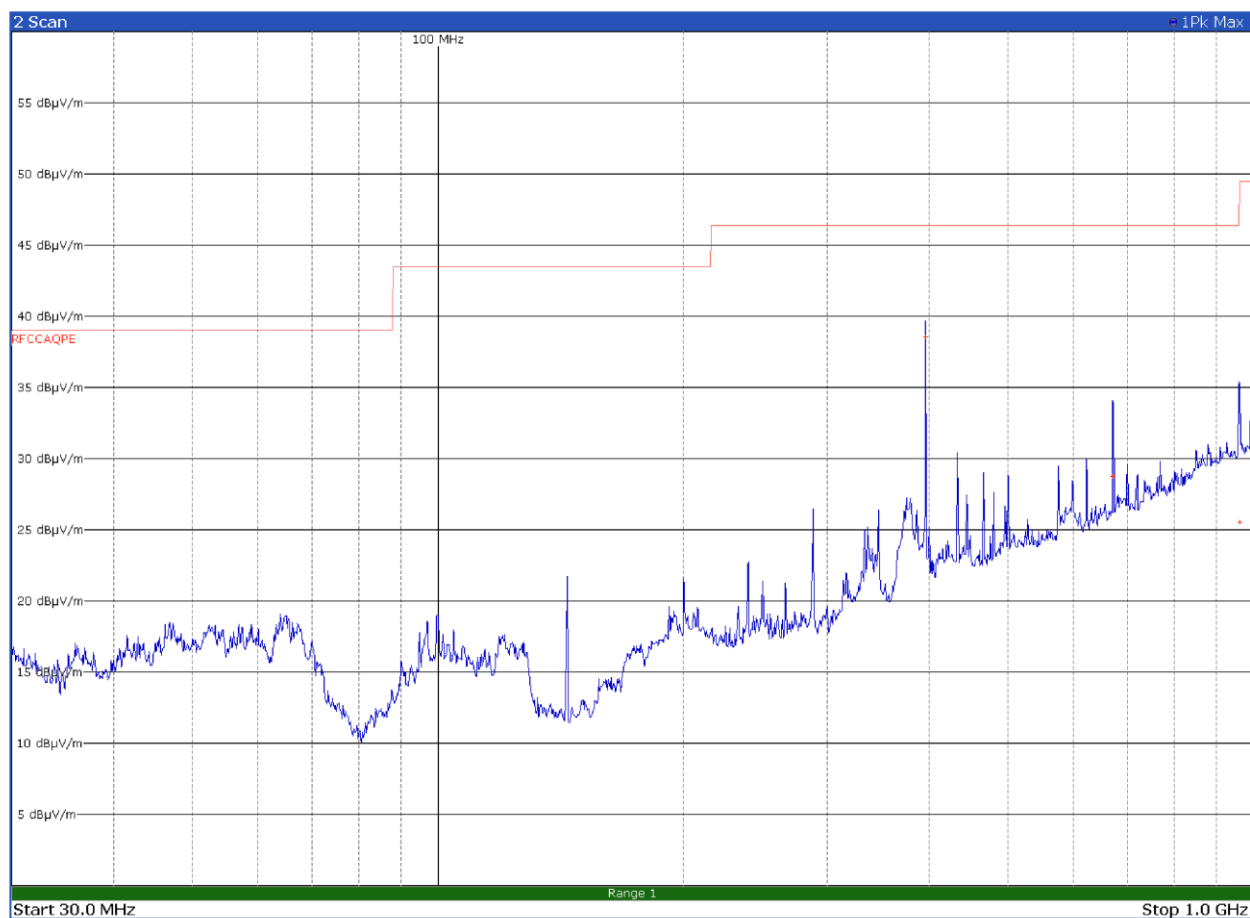

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
395.9700	38.6	46.4	-7.8	QP
672.0300	28.8	46.4	-17.6	QP
959.9700	25.6	46.4	-20.8	QP


Antenna Polarization	Supply Voltage <sup>1</sup>	Test Mode		Remarks	Verdict
		Operation <sup>2</sup>	Configuration <sup>3</sup>		
Vertical	1	1	1	Range 30 to 1000 MHz	P

Notes:

<sup>1</sup> See clause 4.2 EUT Power Supply


<sup>2</sup> See clause 4.4 EUT Operation Modes

<sup>3</sup> See clause 4.5 EUT Configuration Modes

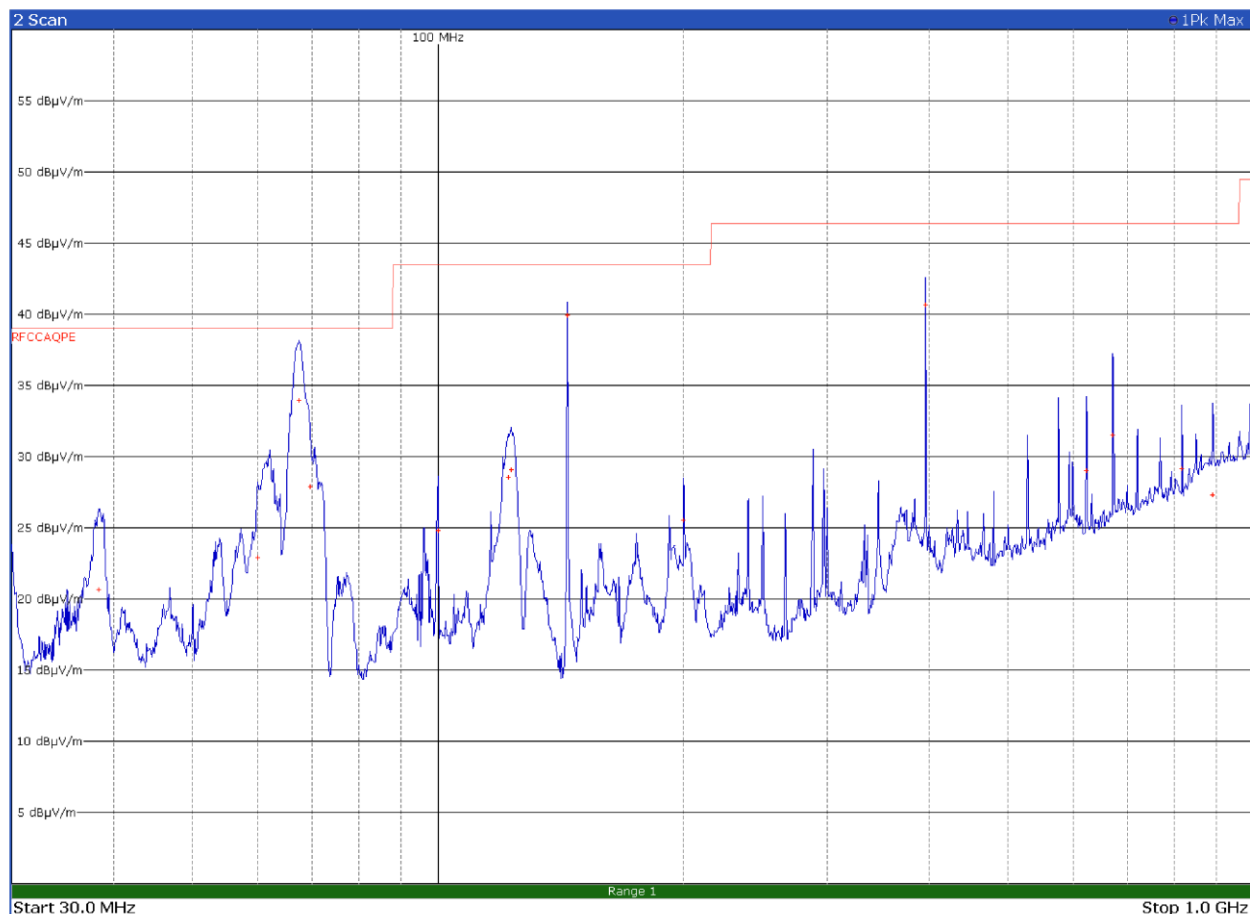


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
38.3400	20.7	39.0	-18.3	QP
60.0300	23.0	39.0	-16.0	QP
67.5000	34.0	39.0	-5.0	QP
69.6300	27.9	39.0	-11.1	QP
99.9600	24.8	43.5	-18.7	QP
121.8900	28.6	43.5	-14.9	QP
122.9100	29.1	43.5	-14.4	QP
144.0000	40.0	43.5	-3.5	QP
199.9500	25.5	43.5	-18.0	QP
396.0000	40.7	46.4	-5.7	QP
624.0300	29.1	46.4	-17.3	QP
672.0300	31.6	46.4	-14.8	QP
816.0300	29.2	46.4	-17.2	QP
891.0300	27.3	46.4	-19.1	QP

Antenna Polarization	Supply Voltage <sup>1</sup>	Test Mode		Remarks	Verdict
		Operation <sup>2</sup>	Configuration <sup>3</sup>		
Horizontal	1	1	1	Range 1 to 6 GHz	P
Notes: <sup>1</sup> See clause 4.2 EUT Power Supply <sup>2</sup> See clause 4.4 EUT Operation Modes <sup>3</sup> See clause 4.5 EUT Configuration Modes					

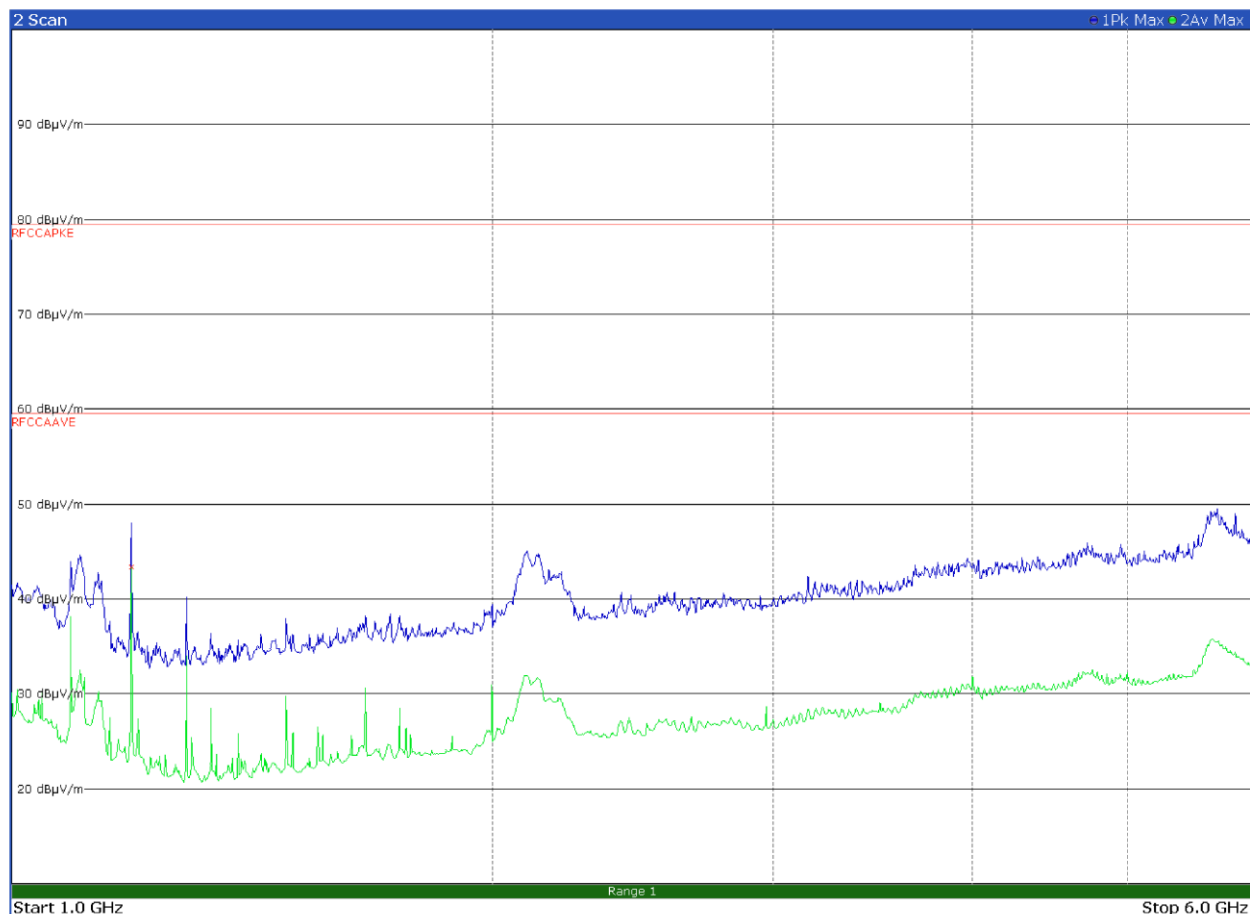


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1188.0000	43.4	59.5	-16.1	Av

Antenna Polarization	Supply Voltage <sup>1</sup>	Test Mode		Remarks	Verdict
		Operation <sup>2</sup>	Configuration <sup>3</sup>		
Vertical	1	1	1	Range 1 to 6 GHz	P
Notes: <sup>1</sup> See clause 4.2 EUT Power Supply <sup>2</sup> See clause 4.4 EUT Operation Modes <sup>3</sup> See clause 4.5 EUT Configuration Modes					

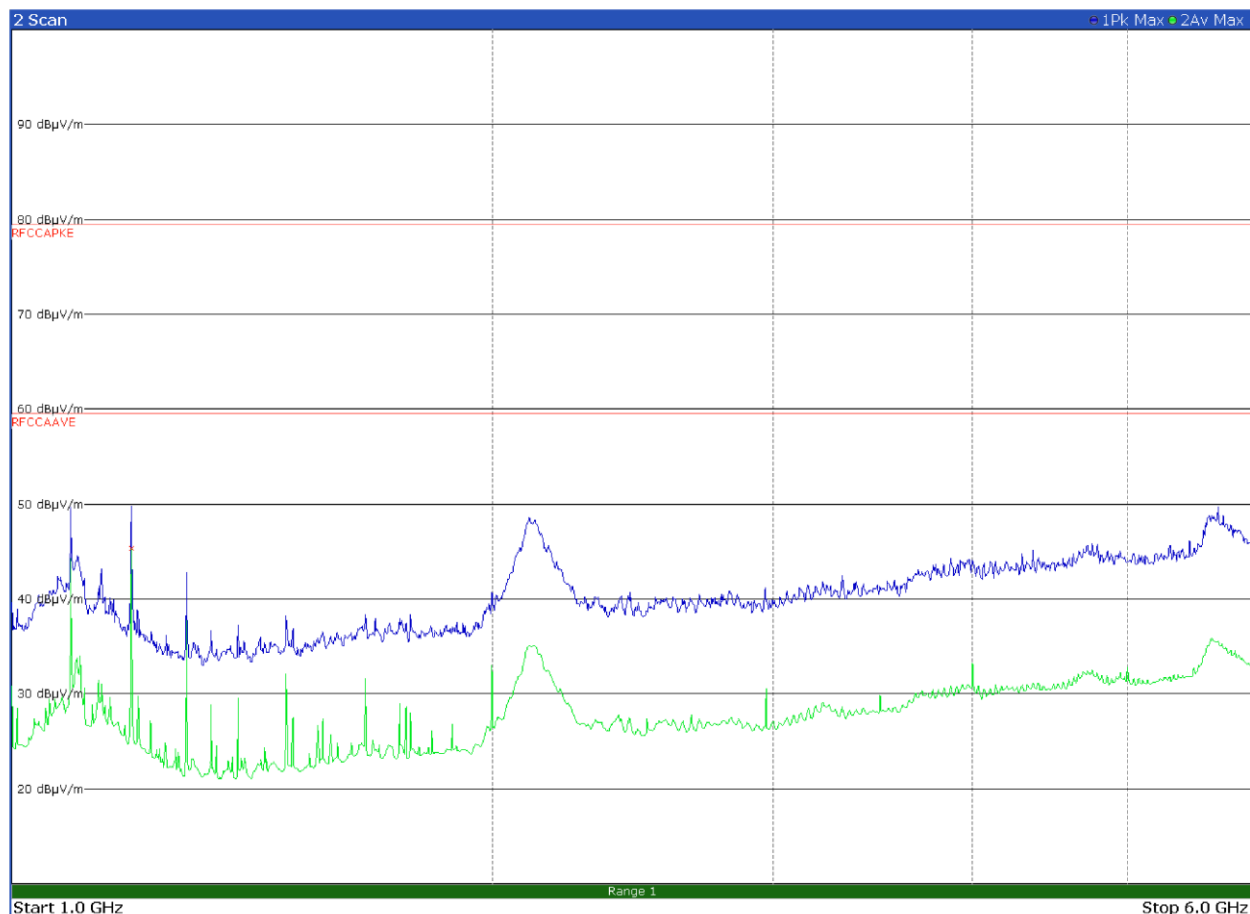


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1188.0000	45.4	59.5	-14.1	Av


Antenna Polarization	Supply Voltage <sup>1</sup>	Test Mode		Remarks	Verdict
		Operation <sup>2</sup>	Configuration <sup>3</sup>		
Horizontal	1	1	1	Range 6 to 18 GHz	P
<div>Notes:</div> <div><div><sup>1</sup> See clause 4.2 EUT Power Supply</div><div><sup>2</sup> See clause 4.4 EUT Operation Modes</div><div><sup>3</sup> See clause 4.5 EUT Configuration Modes</div></div>					

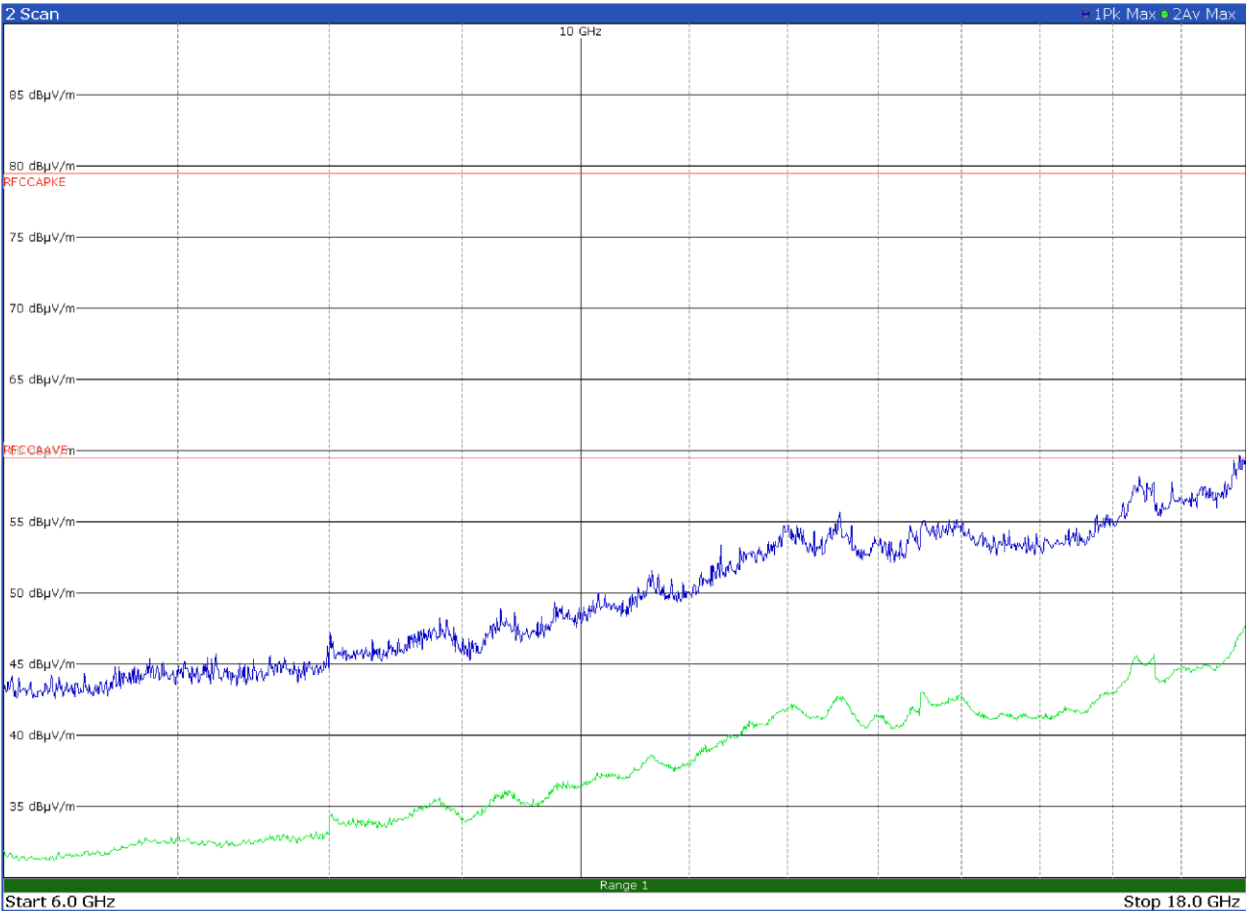


Antenna Polarization	Supply Voltage <sup>1</sup>	Test Mode		Remarks	Verdict
		Operation <sup>2</sup>	Configuration <sup>3</sup>		
Vertical	1	1	1	Range 6 to 18 GHz	P
<div>Notes:</div> <div><div><sup>1</sup> See clause 4.2 EUT Power Supply</div><div><sup>2</sup> See clause 4.4 EUT Operation Modes</div><div><sup>3</sup> See clause 4.5 EUT Configuration Modes</div></div>					

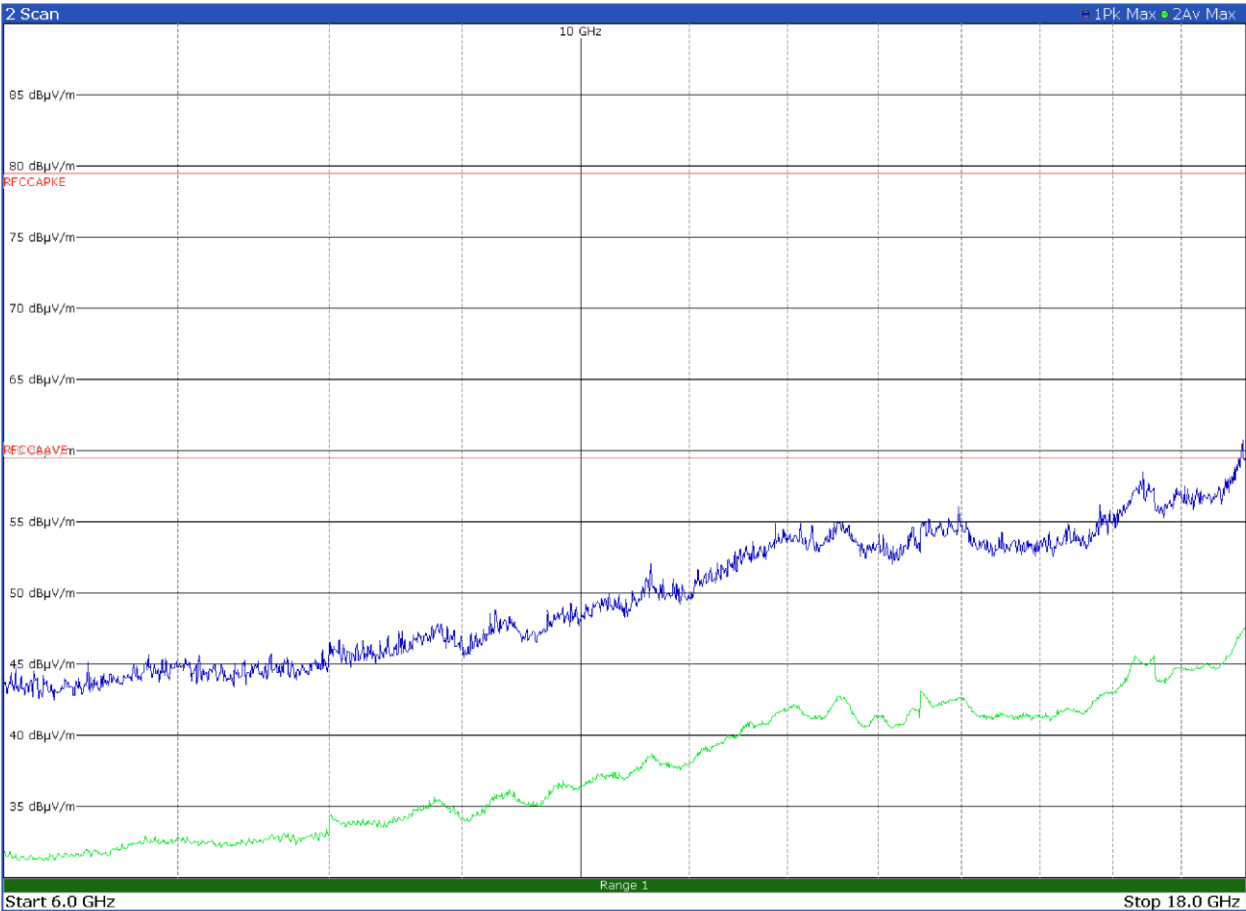

Antenna Polarization	Supply Voltage <sup>1</sup>	Test Mode		Remarks	Verdict
		Operation <sup>2</sup>	Configuration <sup>3</sup>		
Horizontal	1	1	1	Range 18 to 40 GHz	P
<div>Notes:</div> <div><div><sup>1</sup> See clause 4.2 EUT Power Supply</div><div><sup>2</sup> See clause 4.4 EUT Operation Modes</div><div><sup>3</sup> See clause 4.5 EUT Configuration Modes</div></div>					

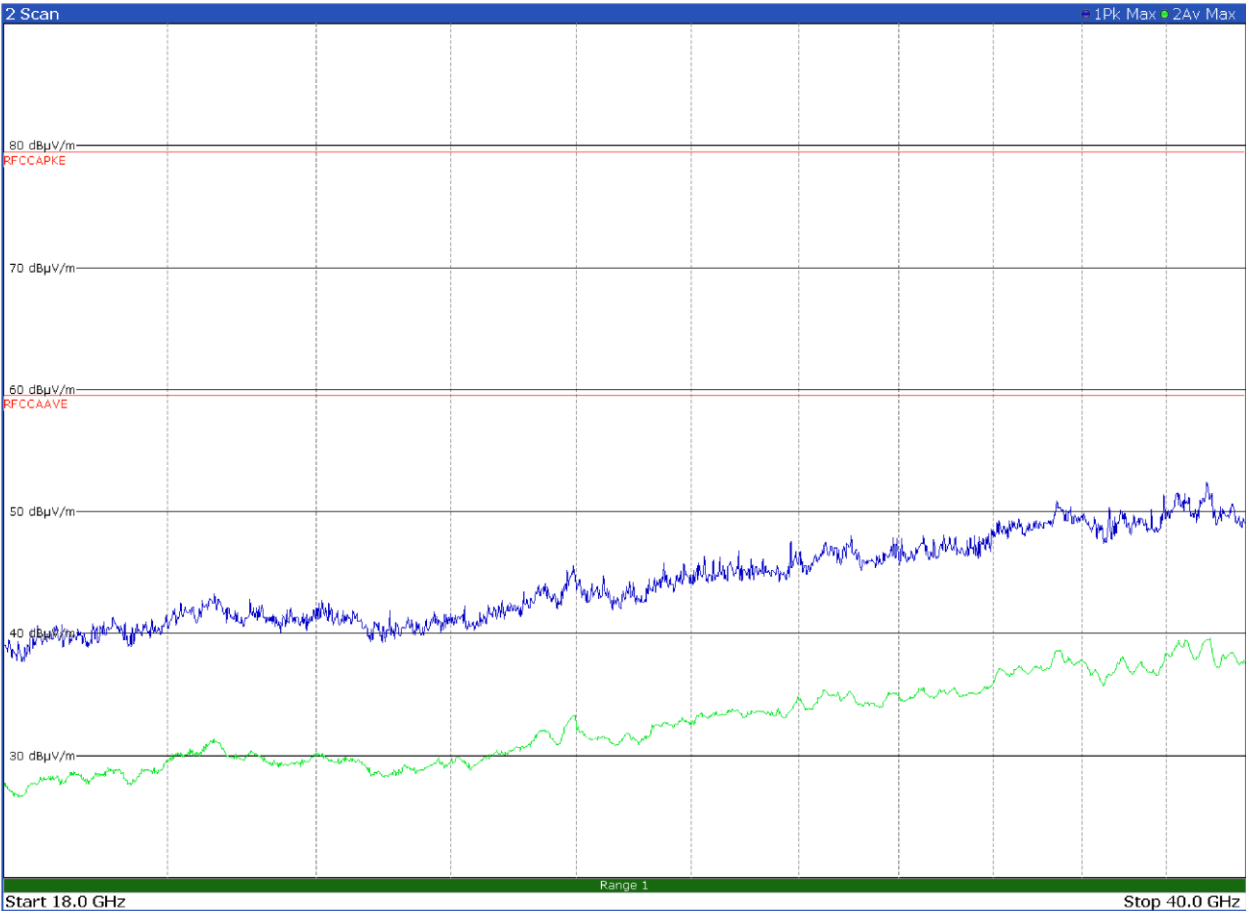

Antenna Polarization	Supply Voltage <sup>1</sup>	Test Mode		Remarks	Verdict
		Operation <sup>2</sup>	Configuration <sup>3</sup>		
Vertical	1	1	1	Range 18 to 40 GHz	P
<div>Notes:</div> <div><div><sup>1</sup> See clause 4.2 EUT Power Supply</div><div><sup>2</sup> See clause 4.4 EUT Operation Modes</div><div><sup>3</sup> See clause 4.5 EUT Configuration Modes</div></div>					

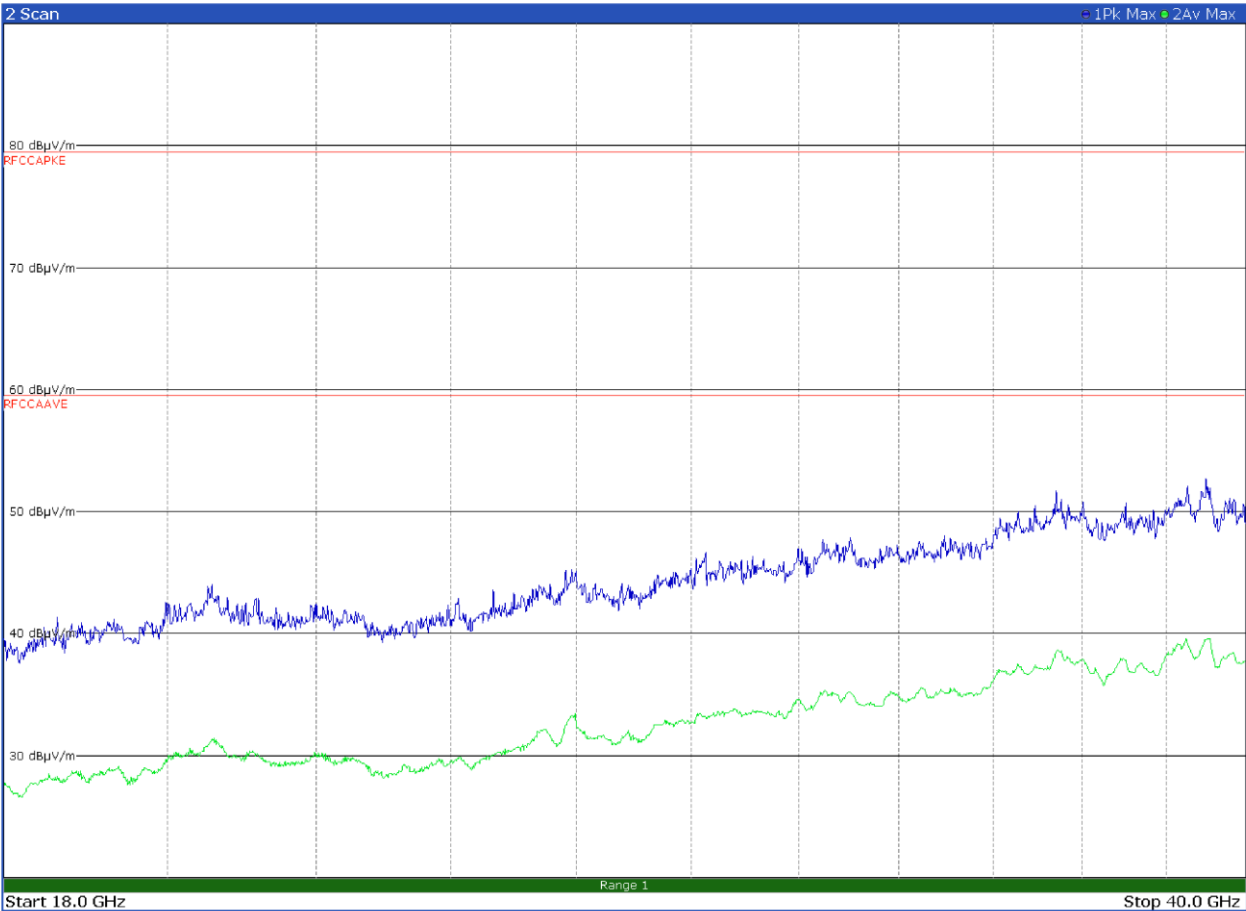




## 5.2 Conducted emission

### 5.2.1 Test result

Verdict for AC mains port <sup>2</sup> :	<input checked="" type="checkbox"/> P <input type="checkbox"/> F <input type="checkbox"/> N <sup>1</sup> <input type="checkbox"/> NP
Frequency range:	0.15 MHz – 30 MHz
Kind of test site:	Shielded room
Notes: <sup>1</sup> If marked, the test is not applicable for the EUT, according to 15.107 (c)(1) or (d). <sup>2</sup> If applicable, KDB 174176D01 criterion was used for devices powered from a computer or any other external power source via a USB connection.	

### 5.2.2 Photo documentation of the test set-up

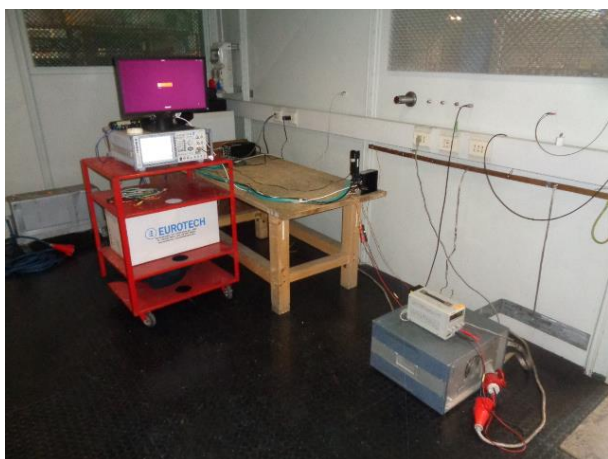

### 5.2.3 Test method

Method standard is reported at par. 3.1. Measurements were made on a ground plane that extends 1-meter minimum beyond all sides of the system under test. All power was connected to the system through Line Impedance Stabilization Networks (LISN). Conducted voltage measurements on mains lines were made at the output of the LISN.

Receiver reading  $P_R$ , reported in tables at clause 5.2.6, was achieved adjusting the input signal  $P_{IN}$  by a correction factor  $CF$ , to take into account of the insertion loss due to LISN and cables. This correction factor was pre-inserted in the firmware of the receiver and was applied by the instrument during the test. The relationship between  $P_R$  and  $P_{IN}$ , expressed in dB, is:

$$P_R = P_{IN} + CF$$

#### 5.2.4 Limits

Conducted emissions from AC mains power ports				
Frequency (MHz)	Quasi-Peak limit (dBμV)		Average limit (dBμV)	
	Class B	Class A	Class B	Class A
0.15 to 0.50	66 to 56 <sup>1</sup>	79	56 to 46 <sup>1</sup>	66
0.50 to 5	56	73	46	60
5 to 30	60	73	50	60
Notes:				
<sup>1</sup> The limit level in dBμV decreases linearly with the logarithm of frequency				

#### 5.2.5 Test equipment used<sup>1</sup>

Used <sup>2</sup>	Description	Manufacturer	Model	Identifier
<input checked="" type="checkbox"/>	EMI receiver	R&S	ESU8	100202
<input type="checkbox"/>	EMI receiver	Rohde & Schwarz	ESW44	101620
<input checked="" type="checkbox"/>	Attenuator	Aeroflex / Weinschel	2	CC8577
<input type="checkbox"/>	LISN 9 kHz ÷ 30 MHz	R&S	ESH2-Z5	872 460/041
<input checked="" type="checkbox"/>	LISN 9 kHz ÷ 30 MHz	R&S	ESH2-Z5	881 362/006
<input type="checkbox"/>	LISN 9 kHz ÷ 30 MHz	R&S	ESH3-Z5	840 731/004
<input checked="" type="checkbox"/>	Shielded room	Siemens	Conducted emission test room	1862
Notes:				
<sup>1</sup> See clause 1.7 for calibration information.				
<sup>2</sup> If crossed, the instrument was used during tests.				

5.2.6 Test protocol

Test Port		Supply Voltage <sup>2</sup>	Test Mode		Remarks	Verdict
EUT <sup>1</sup>	Line		Operation <sup>3</sup>	Configuration <sup>4</sup>		
1	Phase <sup>5</sup>	1	1	1	--	P

Notes:  


<sup>1</sup> See clause 4.6 EUT Input/Output Ports

<sup>2</sup> See clause 4.2 EUT Power Supply

<sup>3</sup> See clause 4.4 EUT Operation Modes


<sup>4</sup> See clause 4.5 EUT Configuration Modes

<sup>5</sup> Test performed with a laboratory DC power supply

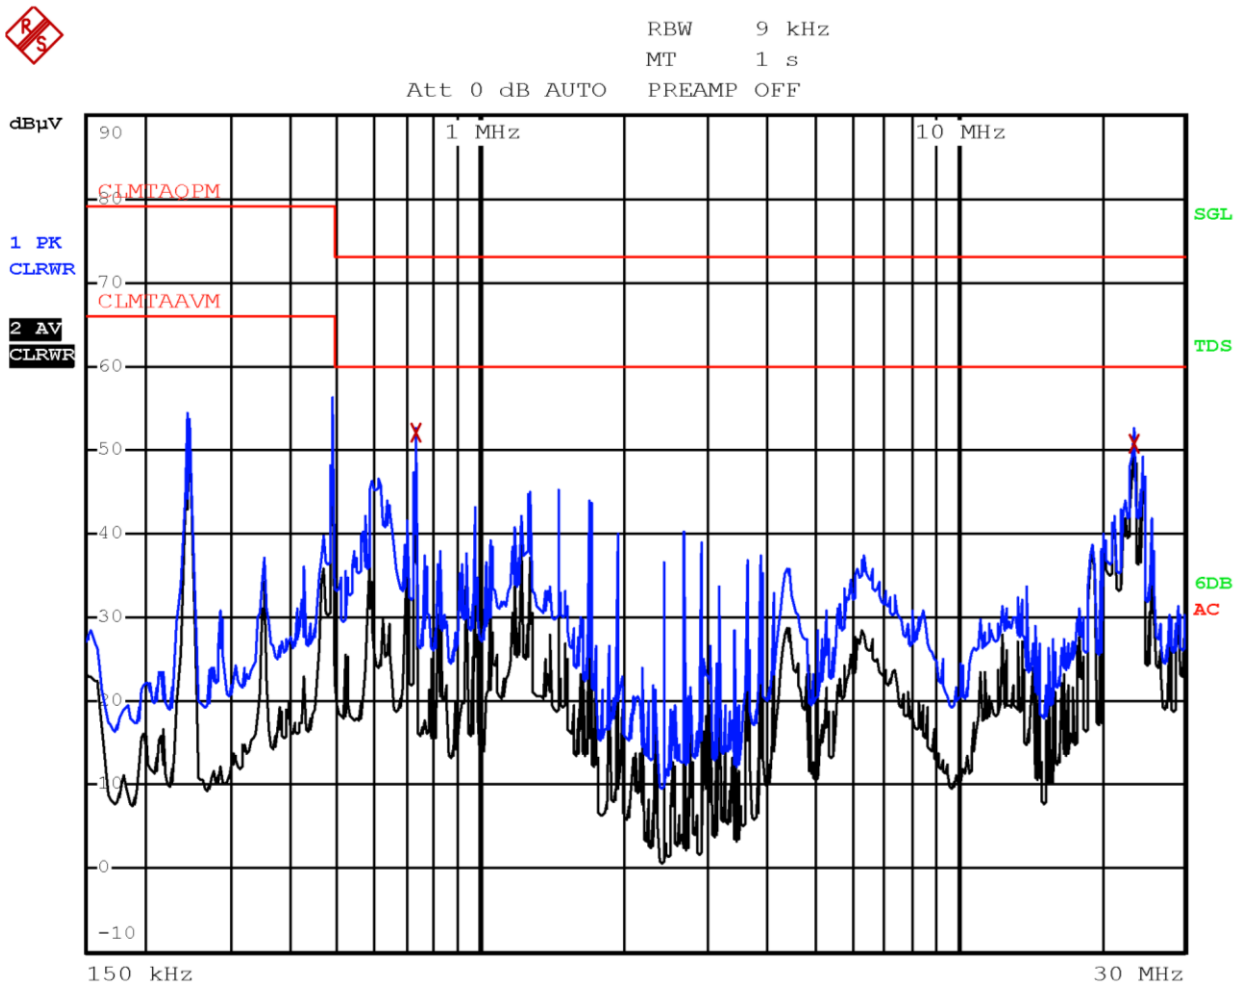

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Detector
0.7300	52.2	60.0	-7.8	Av
23.6140	50.9	60.0	-9.1	Av

Test Port		Supply Voltage <sup>2</sup>	Test Mode		Remarks	Verdict
EUT <sup>1</sup>	Line		Operation <sup>3</sup>	Configuration <sup>4</sup>		
1	Neutral <sup>5</sup>	1	1	1	--	P
<div>Notes:</div> <div><div><sup>1</sup> See clause 4.6 EUT Input/Output Ports</div><div><sup>2</sup> See clause 4.2 EUT Power Supply</div><div><sup>3</sup> See clause 4.4 EUT Operation Modes</div><div><sup>4</sup> See clause 4.5 EUT Configuration Modes</div><div><sup>5</sup> Test performed with a laboratory DC power supply</div></div>						

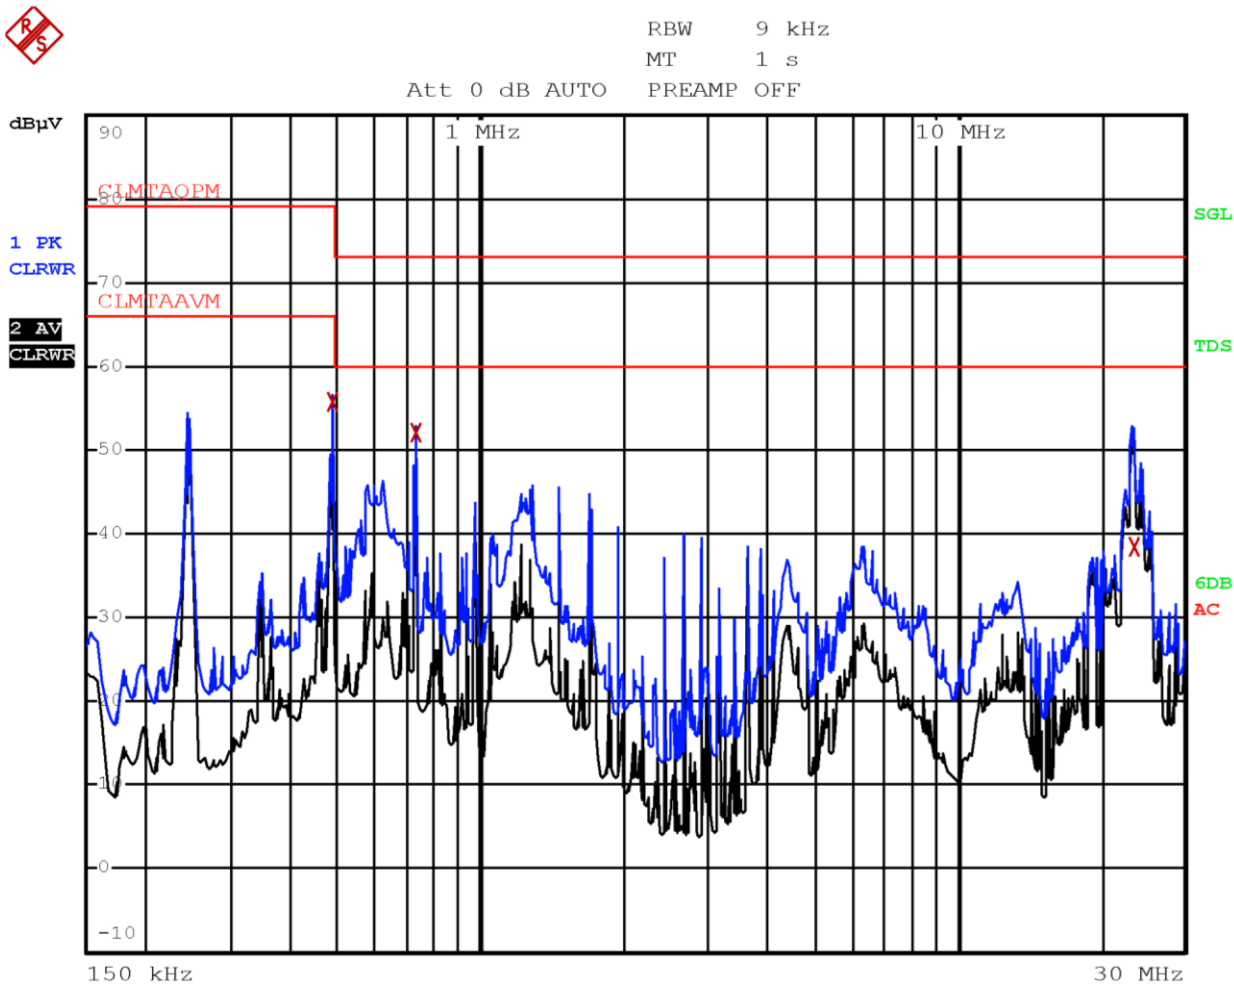

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Detector
0.4860	55.9	66.0	-10.1	Av
0.7300	52.1	60.0	-7.9	Av
23.6020	38.4	60.0	-21.6	Av

6 EUT PHOTOS





End of report