



**oven and cooktop dimensions  
and cut-out dimensions**

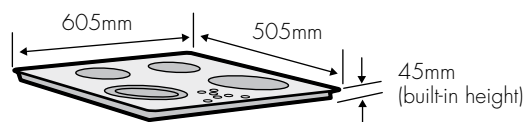

**Connection:** All electric models require hardwire connection

models	load
PPN778	9.5kW
PPN776	8.7kW

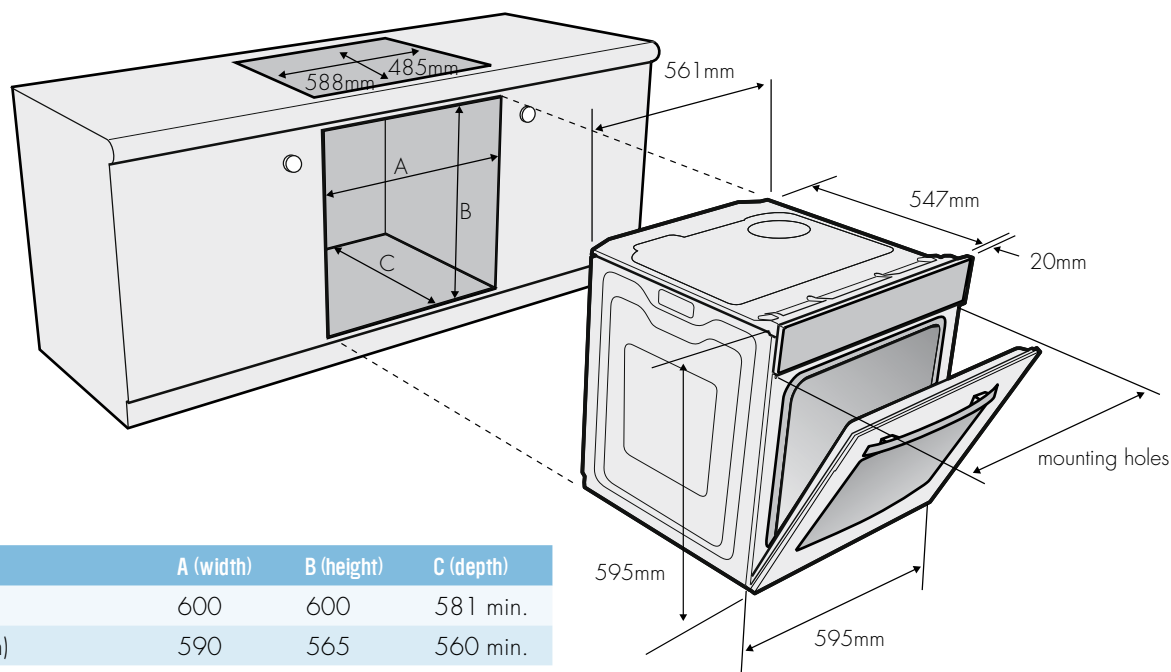

type of fit	A (width)	B (height)	C (depth)
Flush fit (mm)	600	600	581 min.
Proud fit (mm)	590	565	560 min.

C = from face of cabinet/door to rear of enclosure.

**Note:** a minimum gap of 40mm must be maintained between the top of the underbench oven and the bottom of the cooktop to ensure adequate ventilation and space for the interconnection lead.

## cabinet construction

Figure 1 – flush fit (top view)



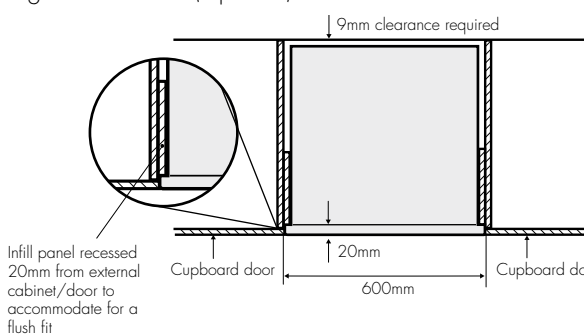


Figure 2 – proud fit (top view)

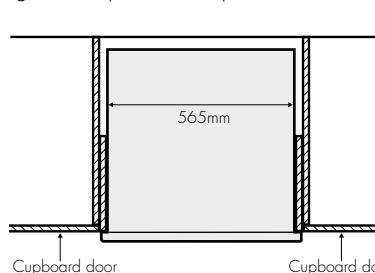

Side view




For the best integration within a kitchen, install this appliance in a standard 600mm wide cupboard that gives a flush fit with the surrounding cupboard fronts (Figure 1). A 20mm recess is ideal. It can also be installed using a proud fit with the surrounding cupboard (Figure 2).

**Note:** Your appliance must be mounted on a flat surface for the full width and depth of the product.

**Note:** a 40mm min.  
recommended air gap  
below cooktop base for  
this type of installation


© 2007 Electrolux Home Products Pty Ltd  
WDIMPPN776/778 Current as at Jul 2007

**oven and cooktop dimensions  
and cut-out dimensions**



**Connection:** All electric models require hardwire connection

models	load
PPN778	9.5kW
PPN776	8.7kW

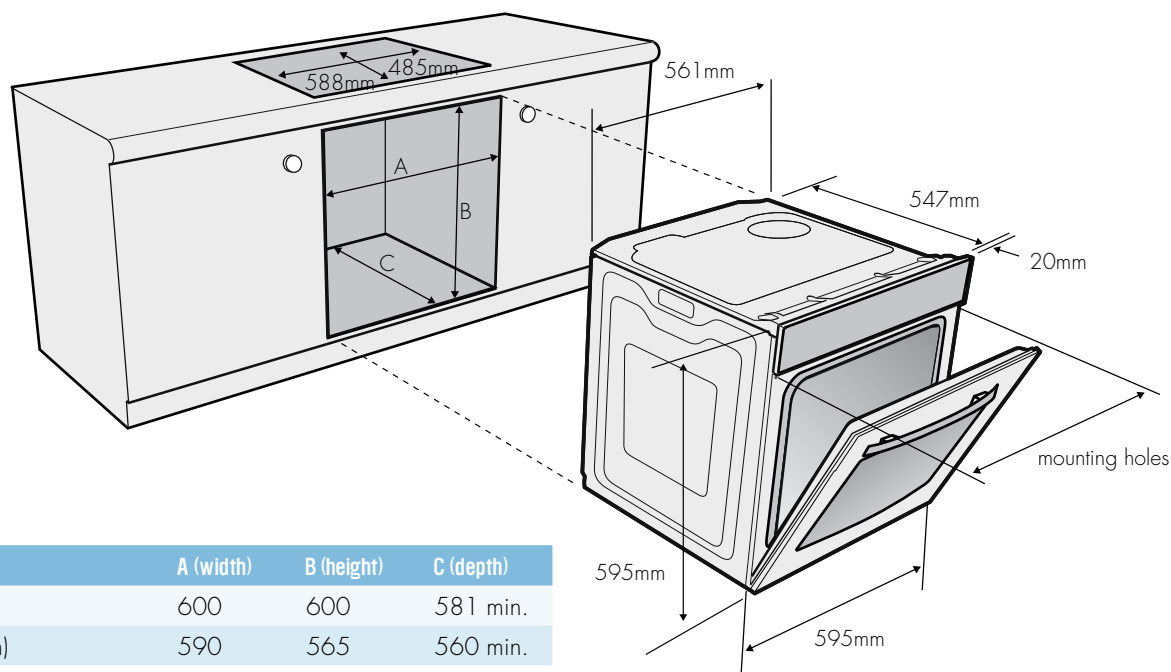

type of fit	A (width)	B (height)	C (depth)
Flush fit (mm)	600	600	581 min.
Proud fit (mm)	590	565	560 min.

C = from face of cabinet/door to rear of enclosure.

**Note:** a minimum gap of 40mm must be maintained between the top of the underbench oven and the bottom of the cooktop to ensure adequate ventilation and space for the interconnection lead.

## cabinet construction

Figure 1 – flush fit (top view)



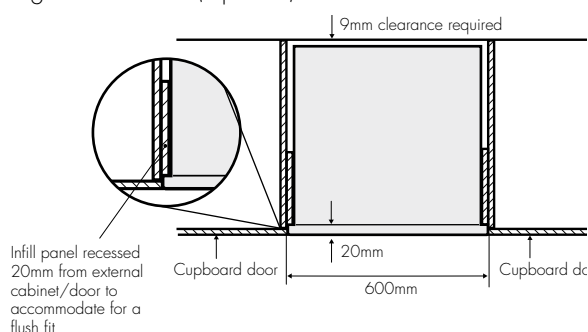


Figure 2 – proud fit (top view)

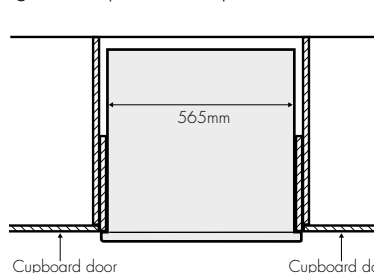

Side view



For the best integration within a kitchen, install this appliance in a standard 600mm wide cupboard that gives a flush fit with the surrounding cupboard fronts (Figure 1). A 20mm recess is ideal. It can also be installed using a proud fit with the surrounding cupboard (Figure 2).

**Note:** Your appliance must be mounted on a flat surface for the full width and depth of the product.

**Note:** a 40mm min.  
recommended air gap  
below cooktop base for  
this type of installation

© 2007 Electrolux Home Products Pty Ltd  
WDIMPPN776/778 Current as at Jul 2007