

Job Name _____
Purchaser _____
Submitted to _____
Unit Designation _____


Location _____
Engineer _____
Reference _____
Schedule # _____

Approval _____
Construction _____

Specifications			
Model	Indoor Unit Model Number (US Code)		AC036KNZDCH/AA (CNH36ZDK)
	Outdoor Unit Model Number (US Code)		AC036BXADCH/AA (CXH36ADB)
Performance ¹	Nominal Capacity	Cooling / Heating (Btu/h)	36,000 / 40,000
	Capacity Range	Cooling (Btu/h)	10,000 – 37,000
		Heating (Btu/h)	10,000 – 50,000
	SEER / EER		18.2 / 10.0
	COP (nominal heating)		3.22
	HSPF		10.2
AHRI Certification Number			207598070
Power	Voltage	ø / V / Hz	1 / 208-230 / 60
	Working Voltage Range (VAC)		176 - 254 (max. 3% deviation from each)
	Operating Current (min. / std. / max.)	Cooling (A)	5.0 / 16.1 / 21.7
		Heating (A)	4.3 / 16.3 / 24.0
	Max. Breaker	Amps	35
Min. Circuit Ampacity (A)	22.6		
Dimensions	W X H X D (in.)	Indoor Unit	21 X 48 X 21
		Outdoor Unit	37 X 39 5/16 X 13
	Duct Connections (W X H)	Supply (in.)	12 1/2 X 18 3/4
		Return (ID, in.)	21 X 21
	Weight (lbs.)	Indoor Unit	123.46
	Outdoor Unit	159.8	
Sound Pressure Level	Indoor Unit dB(A)	L / M / H	36 / 39 / 42
	Outdoor Unit dB(A)	Cooling / Heating (high)	52 / 54
Operating Temperatures	Outdoor	Cooling	23 ~ 122°F (-5 ~ 50°C) 0 ~ 122°F (-18 ~ 50°C) w/ baffle
		Heating	-4 ~ 75°F (-20 ~ 24°C)
	Indoor	Cooling	61 ~ 90°F (16 ~ 32°C)
		Heating	T ≤ 80°F (27°C)
Pipe Connections	Indoor & Outdoor	High side (flare)	3/8"
		Low side (flare)	5/8"
	Maximum (ft.)		246
	Maximum Vertical Separation (ft.)		98.4
	Condensate Connection (with included adapter)		FPT 3/4" PVC
Refrigerant	Type		R410A
	Control Method		Electronic Expansion Valve
	Factory Charge	lbs.	6.39
	Charged for		24.6 ft
Additional Refrigerant			0.11 oz/ft over 24.6 ft
Compressor	Manufacturer		Samsung
	Type		Inverter Driven, Twin BLDC Rotary
	RLA	Amps	14.7
Evaporator Fan	Type		Double-inlet, forward curve, centrifugal (with ECM motor)
	Air Volume	CFM (L/M/H)	883 / 1,042 / 1,165 (at standard ESP)
	Output (W) / FLA (A)		410 W / 1.66 A
	Static Pressure	Standard ("WC)	0.24
Min. / Max. ("WC)		0.01 - 0.98	
Condenser Fan	Motor		BLDC With Axial Type Fan (2)
	FLA / Watts / CFM (max.)		1.25 A / 125 W / 3,532 CFM
Safety	Certifications	ETL (UL 1995)	
	Devices: PCB fuses, indoor unit terminal block thermal fuse, current transformer, over-voltage protection, crankcase heating, temperature limit protection logic, compressor overload sensing		

¹ Certified in accordance with the AHRI Unitary Small Air-Source Heat Pumps (USHP) Certification Program which is based on the latest edition of AHRI Standard 210/240.

Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice. Refer to www.AHRIdirectory.org for current reference numbers.



- General Information**
- The outdoor unit shall supply power to indoor unit via 14 AWG X 3 power wire
 - High-voltage terminal block temperature sensor to disable unit in the event of power connection overheating
 - Auto-restart after power loss
 - Soft-start compressor minimizing current inrush
 - All heat exchangers shall be mechanically bonded aluminum fin to copper tube
 - The condensing unit heat exchanger salt spray test method: ASTM-B117-18 - the heat exchanger showed no unusual rust or corrosion development to 2,280 hours.

- Option settings**
- The outdoor unit shall have snow accumulation prevention option setting to prevent snow drifting against an idle outdoor unit.
 - Night-time Quiet Mode: reduction of operational sound during (*automatic or manual activation*).
 - System can be set up as heating/cooling, cooling only, or heating only via outdoor unit option setting.
 - Maximum Current Control configurable from 50% - 100% via outdoor unit, wired controller, or central controller

- Indoor Fan**
- Indoor fan is a double Inlet, forward curve, centrifugal type
 - Three fan speed settings and auto setting
 - Field configurable for downflow operation with optional conversion kit

- Construction**
- Outdoor unit shall be galvanized steel with a baked-on powder coated finish for durability
 - Indoor Unit: Insulated, galvanized steel.


- Controls**
- Control wiring shall be 2 X 16 AWG
 - No additional interface modules/adapters are required when connecting to Samsung central control options.
 - The unit shall be operated via a wireless or wired remote control with DDC type signal
 - Dual set temperature support when connected to MWR-WG00UN Advanced Wired Controller or central control options.
 - Wired or wireless controllers must be purchased separately

- Refrigerant System**
- The compressor shall be hermetically sealed, inverter-controlled BLDC rotary type.
 - Refrigerant flow shall be controlled by an electronic expansion valve at outdoor unit



- Warranty**
10 Years compressor, 10 years parts, 1 year limited labor when registered


Optional Accessories

Wired Controller	Advanced	MWR-WG00UN
	Touchscreen	MWR-SH11UN
Thermostat Adaptor (for connection to a standard 24VAC thermostat)		MIM-A60UN
Wireless Signal Control	Wireless Signal Receiver	MRK-A10N
	Wireless Controller	AR-EH04U
Wi-Fi Adapter		MIM-H04UN
External Temperature Sensor		MRW-TA
Filter Base (includes 1" MERV 8 filter)		VFB-2
External Contact Control		MIM-B14
Wall Bracket (for outdoor unit)		CKN-250
Wind Baffles	Front	WBF-1M2
	Back	WBB-2M-B
Hail Guard		TBD
Line Sets - insulated and flared, interconnect cables included	25' - ILS-2510	
	50' - ILS-5010	
Supplemental Electric Heat Kit	VHK-205A (5 kW)	
	VHK-210A (10 kW)	
Downflow Conversion Kit		VDK-2

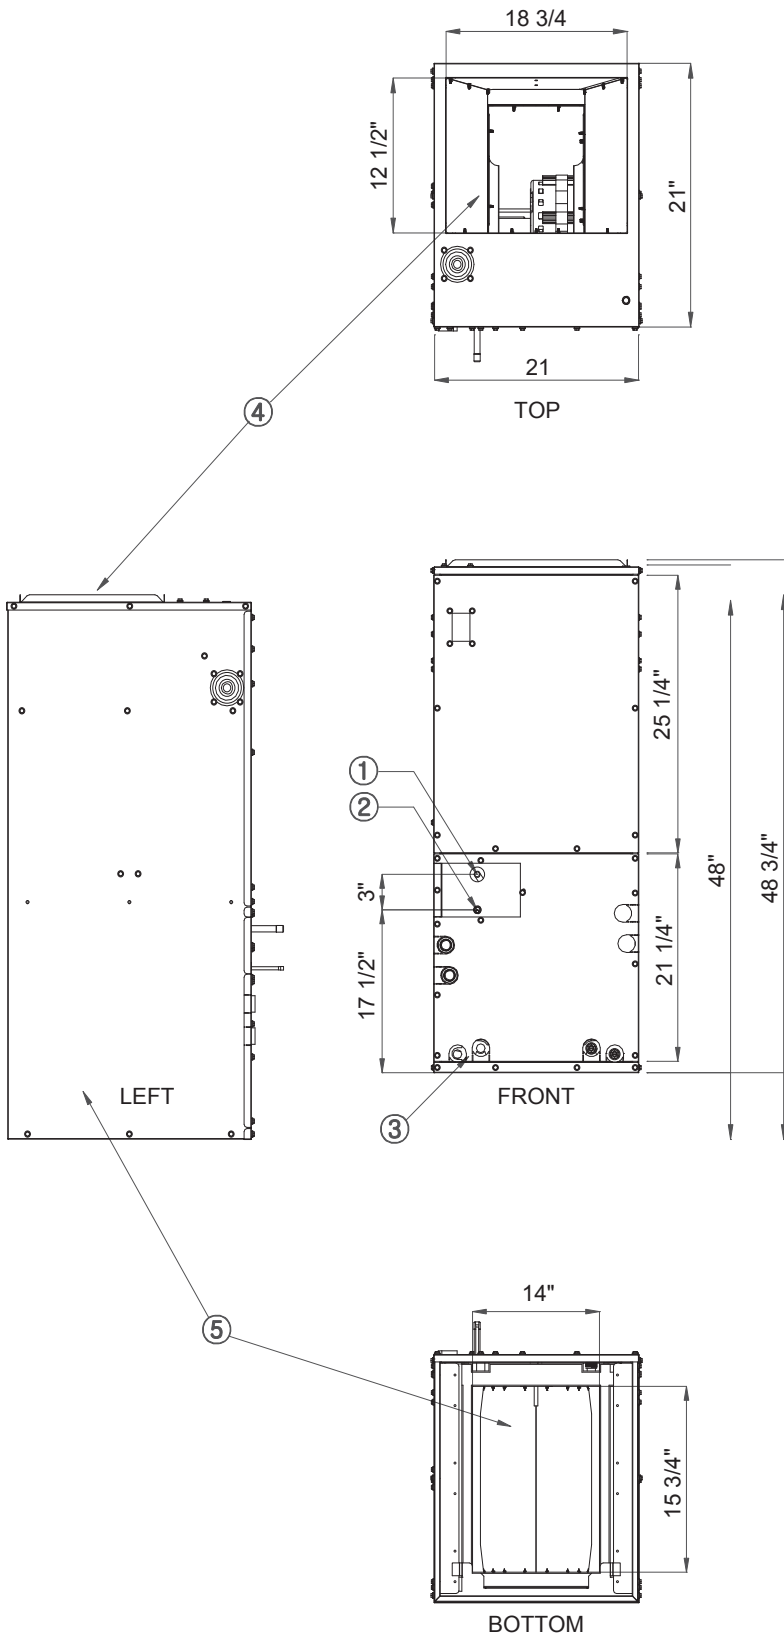


No.	Description
①	Gas Pipe
②	Liquid Pipe
③	Drain Connection
④	Air Outlet
⑤	Air Inlet

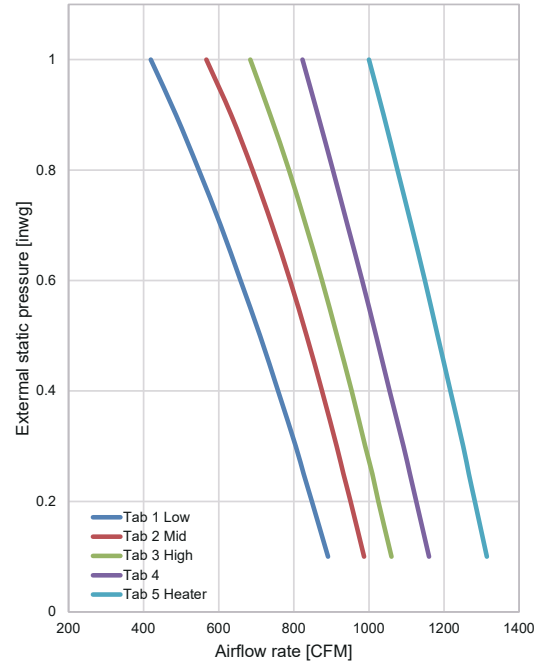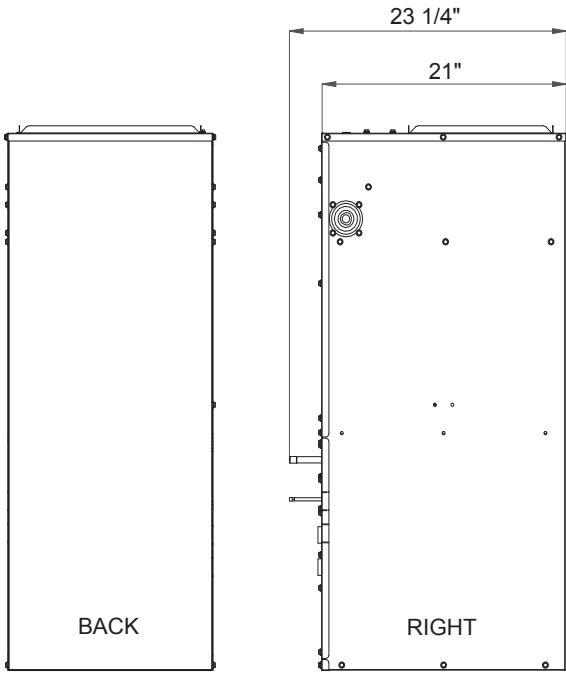


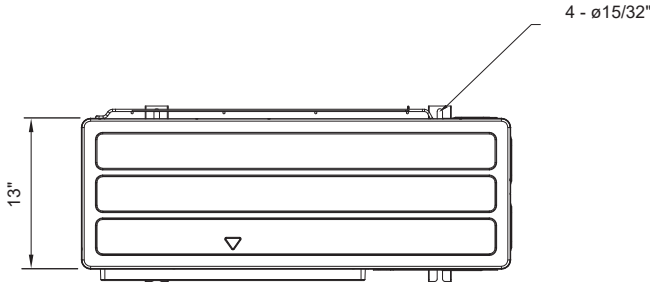


TOP

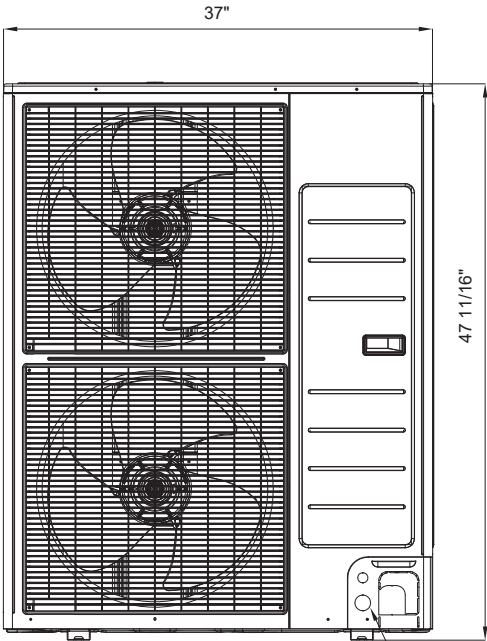

FRONT

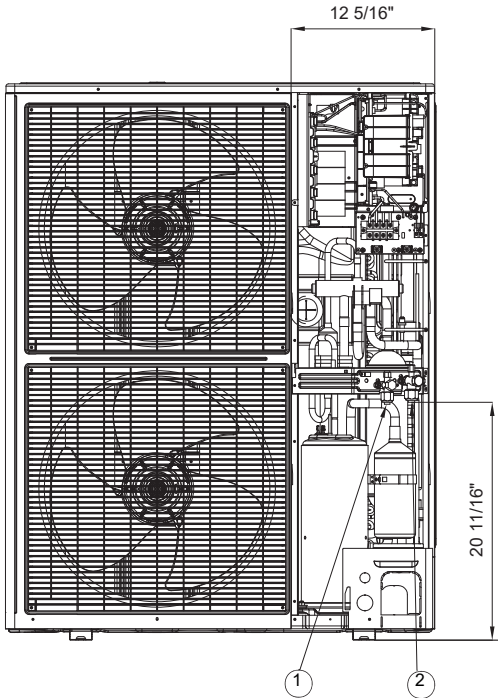

FRONT WITHOUT SERVICE COVER

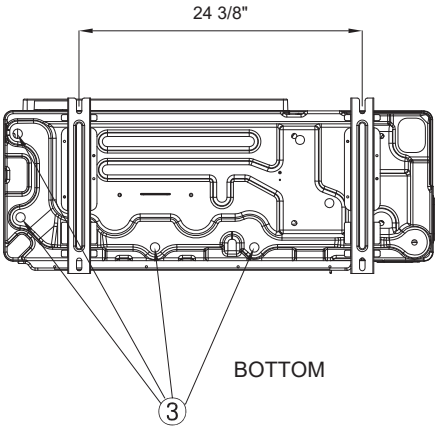

BOTTOM

No.	Name	Description
1	Refrigerant liquid pipe	3/8
2	Refrigerant gas pipe	5/8
3	Drain hole	Connect with provided drain plug
4	Power and communication conduit openings	--