

# Ranges

**A range of ways to cook.  
One exceptional way to engineer them.**





Love a sleek, built-in look but only have room for a range? Upgrade from a freestanding range to a slide-in range without changing cabinetry or countertops. These sleek, full-depth slide-in ranges optimize counter space, offering five burners, ovens with European convection and a convenient warming drawer.

With precise German-engineered performance, Bosch ranges offer burners with high heat and low simmer options for optimal cooking flexibility. Choose from gas, dual fuel or electric models in stainless steel.

# Benchmark® Ranges

European design that slides right in.



## Fuel Options

Bosch slide-in ranges are available in gas, electric, dual fuel and induction. The Bosch induction slide-in range is one of the very few induction slide-in ranges on the market, and offers a powerful and efficient cooking option with only a 40 Amp circuit.



## Genuine European Convection Cooking

Bosch Genuine European Convection uses a third heating element for faster and more even cooking on all racks. Available in dual fuel, electric and induction slide-in ranges.



## Dual-Stacked Burner

The Bosch Benchmark® gas and dual fuel slide-in ranges feature a versatile 20,000 BTU dual-stacked burner that delivers both fast boiling and low simmering for greater cooking flexibility.



## QuietClose® Door

The Bosch Benchmark® slide-in range oven features a door that closes smoothly and effortlessly, without slamming shut. It's a premium feel and feature, and is another first from Bosch for slide-in ranges.







# Benchmark® Gas & Dual-Fuel Slide-in Ranges



**HGIP054UC (Gas)**

- Full-depth Slide-in Range
- 5 Burners
- 20,000 BTU Dual-Stacked Burner
- QuietClose® Door
- Telescopic Rack
- Temperature Probe
- Warming Drawer
- 4.8 cu. ft.




**HDIP054U (Dual-Fuel)**

- Full-depth Slide-in Range
- 5 Burners
- 20,000 BTU Dual-Stacked Burner
- Multi-Rack Genuine European Convection
- QuietClose® Door
- Telescopic Rack
- Temperature Probe
- Warming Drawer
- 4.6 cu. ft.


	Gas	Dual-Fuel
	Stainless Steel – HGIP054UC	Stainless Steel – HDIP054U
General Properties		
Cooking modes	Bake, Variable Broil (hi & low), Roast, Warm, Proof Dough, Convection Bake, Convection Roast, Convection Conversion, Pizza, Temperature Probe, Sabbath	Bake, Variable Broil (hi & low), Roast, Warm, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Multi-Rack Genuine European Convection, Convection Conversion, Pizza, Temperature Probe, Fast Preheat, Sabbath
Cleaning type	Self clean	Self clean
Type of grate	Cast iron	Cast iron
Knob material	Metal	Metal
Drawer type	Warming drawer	Warming drawer
Sealed burners	Yes	Yes
Oven Performance		
Bake / broil burner power BTU	18,000 / 12,500 BTU	N/A
Bake / broil element watts (W)	N/A	2,400 W / 3,800 W
Convection element watts (W)	N/A	2,000 W
Burner Performance		
Total number of cooktop burners	5	5
Total cooktop (NG / LP) BTU	55,000 / 48,500	55,000 / 48,500
Power of front left burner (NG / LP) BTU	10,000 / 8,000	10,000 / 8,000
Power of back left burner (NG / LP) BTU	5,000 / 5,000	5,000 / 5,000
Power of center burner (NG / LP) BTU	20,000 / 17,000	20,000 / 17,000
Power of back right burner (NG / LP) BTU	5,000 / 5,000	5,000 / 5,000
Power of front right burner (NG / LP) BTU	15,000 / 13,500	15,000 / 13,500
Technical Details		
Watts (W)	N/A	4,800 / 6,400 W
Circuit breaker (A)	15 A	30 A
Volts (V)	120 V	208 V / 240 V
Frequency (Hz)	60 Hz	60 Hz
Plug type	US 3-prong	N/A
Cord length (in.)	78"	N/A
Energy source	Gas	Mixed Electric / Gas
Gas type	Natural gas 15 mbar (USA)	Natural gas 15 mbar (USA)
Alternative gas type	LP 27, 5 mbar (USA)	LP 27, 5 mbar (USA)
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in.)	36 1/2" x 31 1/2" x 29 3/16"	36 1/2" x 31 1/2" x 29 1/6"
Required cutout size (HxWxD) (in.)	35 1/2" x 30" x 25 1/4"	35 1/2" x 30" x 25 1/8"
Adjustable range height (in.)	1 1/2"	1 1/2"
Overall Oven Interior Dimensions (HxWxD) (in.)	17 13/16" x 24 1/8" x 18"	17 13/16" x 24 1/8" x 18"
Usable Oven Interior Dimensions (HxWxD) (in.)	11 1/2" x 23 1/4" x 15 1/4"	12 5/16" x 23 1/4" x 15 1/4"
Net weight (lbs)	243 lbs	243 lbs
Accessories – Included		
Included	Use and care manual, installation guide, temperature probe, LP conversion kit, standard racks, telescopic rack	Use and care manual, installation guide, temperature probe, LP conversion kit, standard racks, telescopic rack

# Benchmark® Gas & Dual-Fuel Slide-in Ranges


## Gas and Dual-Fuel Range Dimensions

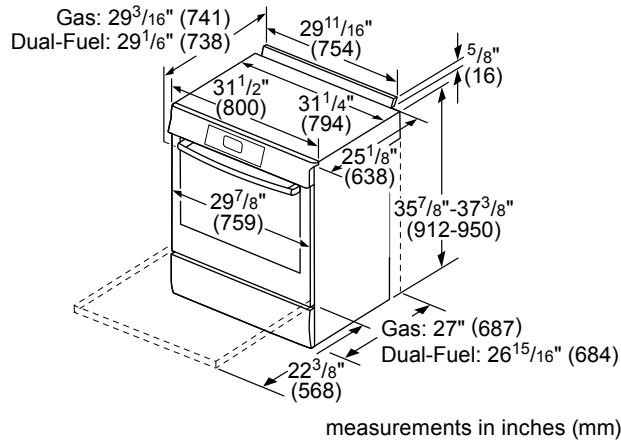


## Gas and Dual-Fuel Cutout Dimensions

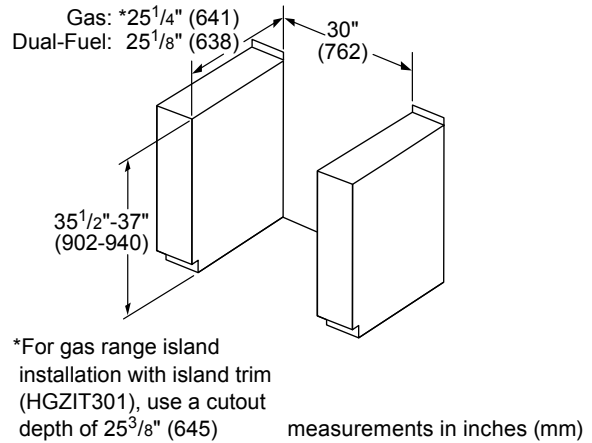


## Gas Range Installation

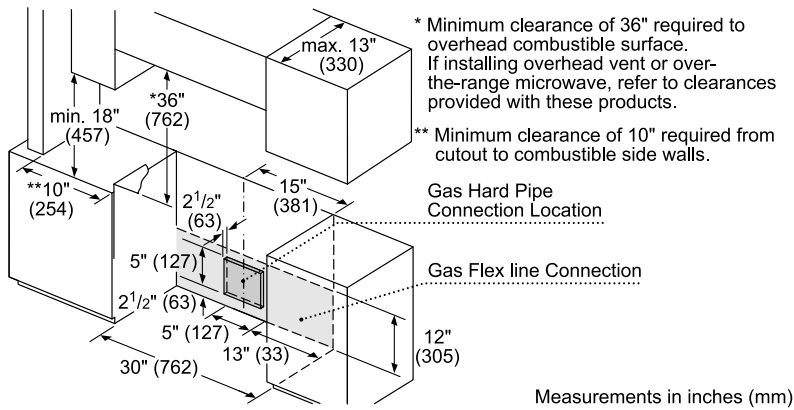


## Island Trim - Gas Range

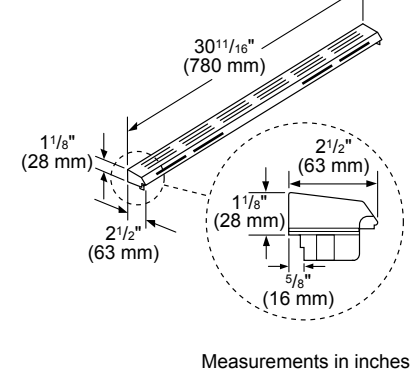

## Dual-Fuel Range Installation

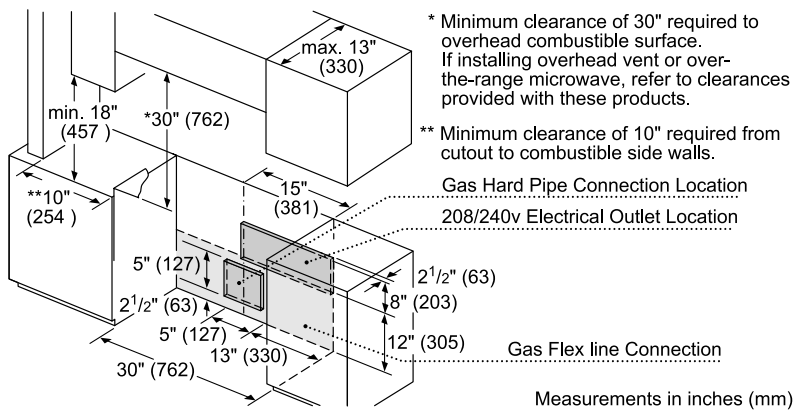

## Island Trim - Dual-Fuel Range

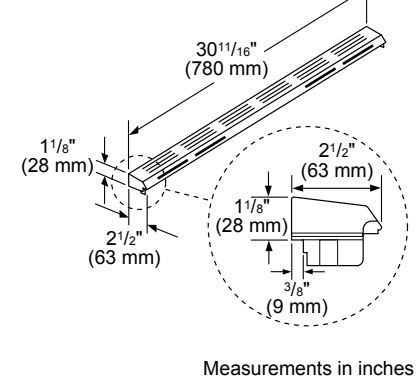

## Optional Accessories

HEZTR301 30" Telescopic rack	HGZBS301 4" Low backguard, gas	HDZBS301 4" Low backguard, dual-fuel	HEZGR301 Griddle	HEZ298102 Wok ring	HGZIT301 Island trim for island applications, gas
					HDZIT301 Island trim for island applications, dual-fuel

# 800 Series Gas & Dual-Fuel Slide-in Ranges



HGI8054UC (Gas)

- Full-depth Slide-in Range
- 18,000 BTU Burner
- 5 Burners
- Warming Drawer
- 4.8 cu. ft.




HDI8054U (Dual-Fuel)

- Full-depth Slide-in Range
- 18,000 BTU Burner
- 5 Burners
- Multi-Rack Genuine European Convection
- Temperature Probe
- Warming Drawer
- 4.6 cu. ft.

	Gas	Dual-Fuel
	Stainless Steel – HGI8054UC	Stainless Steel – HDI8054U
General Properties		
Cooking modes	Bake, Variable Broil (hi & low), Roast, Warm, Proof Dough, Convection Bake, Convection Roast, Convection Conversion, Pizza, Sabbath	Bake, Variable Broil (hi & low), Roast, Warm, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Multi-Rack Genuine European Convection, Convection Conversion, Pizza, Temperature Probe, Fast Preheat, Sabbath
Cleaning type	Self clean	Self clean
Type of grate	Cast iron	Cast iron
Knob material	Metal	Metal
Drawer type	Warming drawer	Warming drawer
Sealed burners	Yes	Yes
Oven Performance		
Bake / broil burner power BTU	18,000 / 12,500 BTU	N/A
Bake / broil element watts (W)	N/A	2,400 / 3,800 W
Convection element watts (W)	N/A	2,000 W
Burner Performance		
Total number of cooktop burners	5	5
Total cooktop (NG / LP) BTU	53,000 / 46,500	53,000 / 44,000
Power of front left burner (NG / LP) BTU	10,000 / 8,000	10,000 / 8,000
Power of back left burner (NG / LP) BTU	5,000 / 5,000	5,000 / 5,000
Power of center burner (NG / LP) BTU	18,000 / 15,000	18,000 / 12,500
Power of back right burner (NG / LP) BTU	5,000 / 5,000	5,000 / 5,000
Power of front right burner (NG / LP) BTU	15,000 / 13,500	15,000 / 13,500
Technical Details		
Watts (W)	N/A	4,800 / 6,400 W
Circuit breaker (A)	15 A	30 A
Volts (V)	120 V	208 V / 240 V
Frequency (Hz)	60 Hz	60 Hz
Plug type	US 3-prong	N/A
Cord length (in.)	78"	N/A
Energy source	Gas	Mixed Electric / Gas
Gas type	Natural gas 15 mbar (USA)	Natural gas 15 mbar (USA)
Alternative gas type	LP 27, 5 mbar (USA)	LP 27, 5 mbar (USA)
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in.)	36 1/2" x 31 1/2" x 29 3/16"	36 1/2" x 31 1/2" x 29 1/6"
Required cutout size (HxWxD) (in.)	35 1/2" x 30" x 25 1/4"	35 1/2" x 30" x 25 1/8"
Adjustable range height (in.)	1 1/2"	1 1/2"
Overall Oven Interior Dimensions (HxWxD) (in.)	17 13/16" x 24 1/8" x 18"	17 13/16" x 24 1/8" x 18"
Usable Oven Interior Dimensions (HxWxD) (in.)	11 1/2" x 23 1/4" x 15 1/4"	12 5/16" x 23 1/4" x 15 1/4"
Net weight (lbs)	243 lbs	243 lbs
Accessories – Included		
Included	Use and care manual, installation guide, LP conversion kit, standard racks	Use and care manual, installation guide, temperature probe, LP conversion kit, standard racks


# 800 Series Gas & Dual-Fuel Slide-in Ranges

## Gas and Dual-Fuel Range Dimensions

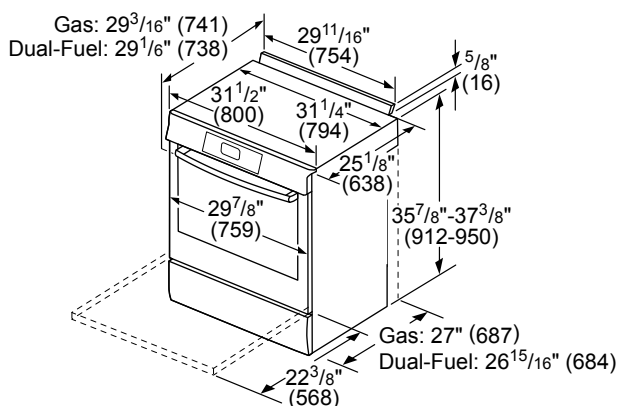

measurements in inches (mm)


## Gas and Dual-Fuel Cutout Dimensions

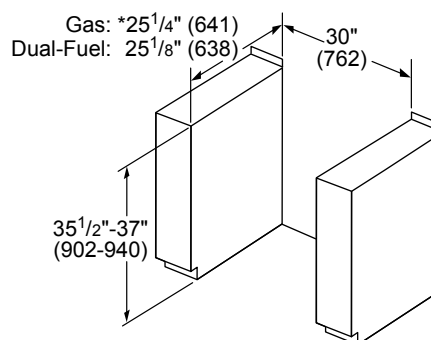

\*For gas range island installation with island trim (HGZIT301), use a cutout depth of 25<sup>3</sup>/<sub>8</sub>" (645)


measurements in inches (mm)

## Gas Range Installation

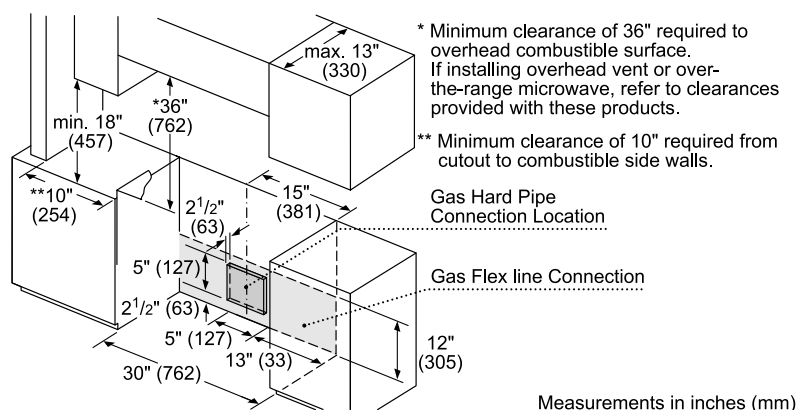


Measurements in inches (mm)

## Island Trim – Gas Range

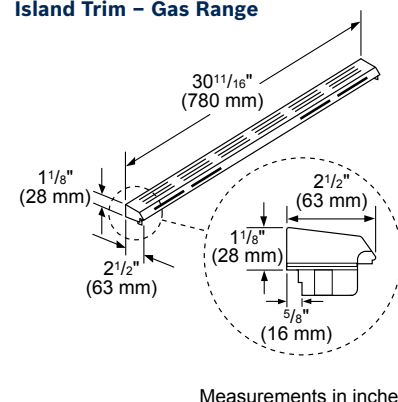


Measurements in inches

## Dual-Fuel Range Installation

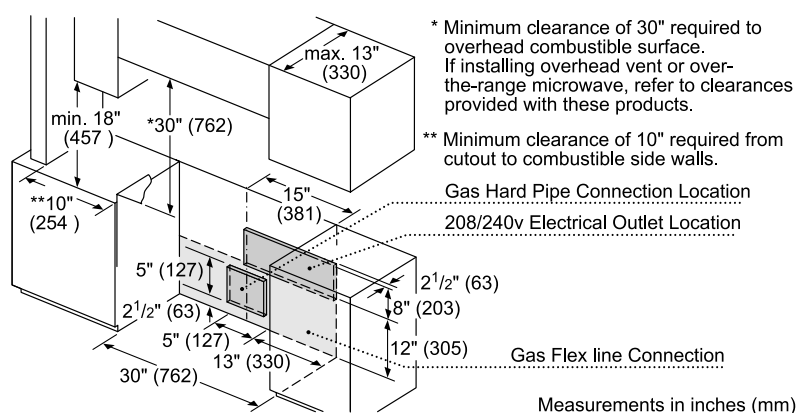


Measurements in inches (mm)

## Island Trim – Dual-Fuel Range

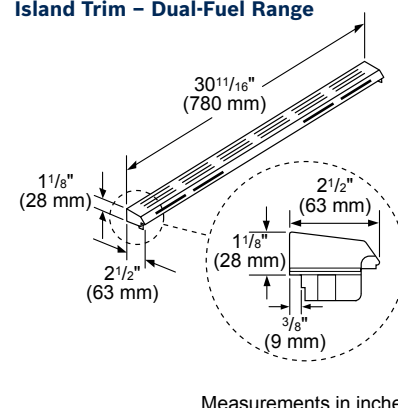

Measurements in inches

## Optional Accessories



HEZTR301  
30" Telescopic rack



HGZBS301  
4" Low backguard, gas



HDZBS301  
4" Low backguard, dual-fuel



HEZGR301  
Griddle



HEZ298102  
Wok ring

HGZIT301  
Island trim for island applications, gas

HDZIT301  
Island trim for island applications, dual-fuel



# Benchmark® Electric & Induction Slide-in Ranges



HEIP054U (Electric)

- Full-depth Slide-in Range
- 12" 3,000-Watt Triple-Ring Element
- 9.5" 3,200- / 1100-Watt Versatile Element
- 4 Elements + 1 Warming Zone
- QuietClose® Door
- Telescopic Rack
- Temperature Probe
- Warming Drawer
- 4.6 cu. ft.




HIIP054U (Induction)

- Full-depth Slide-in Range
- Induction Cooktop Offers Faster, Cleaner and More Efficient Cooking
- Powerful 3,600-Watt Speeds Cooking Time
- QuietClose® Door
- Telescopic Rack
- Temperature Probe
- 4.6 cu. ft.

	Electric	Induction
	Stainless Steel – HEIP054U	Stainless Steel – HIIP054U
General Properties		
Cooking modes	Bake, Variable Broil (hi & low), Roast, Warm, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Multi-Rack Genuine European Convection, Convection Conversion, Pizza, Temperature Probe, Fast Preheat, Sabbath	Bake, Variable Broil (hi & low), Roast, Warm, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Multi-Rack Genuine European Convection, Pizza, Temperature Probe, Fast Preheat, Sabbath
Cleaning type	Self clean	Self clean
Knob material	Metal	Metal
Drawer type	Warming drawer	Warming drawer
Oven Performance		
Bake / broil element watts (W)	2,400 / 3,800 W	2,400 / 3,800 W
Convection element watts (W)	2,000 W	2,000 W
Element Performance		
Total number of cooktop elements	5	4
Power of front left element watts (W)	1,050 / 1,950 / 3,000 W	2,200 W (3,300 w/boost)
Power of back left element watts (W)	1,200 W	1,400 W (1,800 w/boost)
Power of center element watts (W)	100 W	N/A
Power of back right element watts (W)	1,200 W	2,400 W (3,600 w/boost)
Power of front right element watts (W)	1,100 / 3,200 W	1,400 W (1,800 w/boost)
Element Size		
Dimension of front left heating element	6" / 9" / 12"	9"
Dimension of back left heating element	6"	6"
Dimension of center heating element	6"	N/A
Dimension of back right heating element	6"	11"
Dimension of front right heating element	9.5"	6"
Technical Details		
Watts (W)	11,300 / 14,800 W	11,400 / 13,800 W
Circuit breaker (A)	40 A	40 A
Volts (V); Frequency (Hz)	208 V / 240 V; 60 Hz	208 V / 240 V; 60 Hz
Plug type	N/A	N/A
Cord length (in.)	N/A	N/A
Energy source	Electric	Electric
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in.)	35 1/2" x 31 1/2" x 28 7/8"	35 1/2" x 31 1/2" x 28 7/8"
Required cutout size (HxWxD) (in.)	35 1/2" x 30" x 25"	35 1/2" x 30" x 25"
Adjustable range height (in.)	1 1/2"	1 1/2"
Overall Oven Interior Dimensions (HxWxD) (in.)	17 13/16" x 24 1/8" x 18"	17 13/16" x 24 1/8" x 18"
Usable Oven Interior Dimensions (HxWxD) (in.)	12 5/16" x 23 1/4" x 15 1/4"	12 5/16" x 23 1/4" x 15 1/4"
Net weight (lbs)	248 lbs	248 lbs
Accessories – Included		
Included	Use and care manual, installation guide, temperature probe, standard racks, telescopic rack	Use and care manual, installation guide, temperature probe, standard racks, telescopic rack

# Benchmark® Electric & Induction Slide-in Ranges


## Electric and Induction Range Dimensions

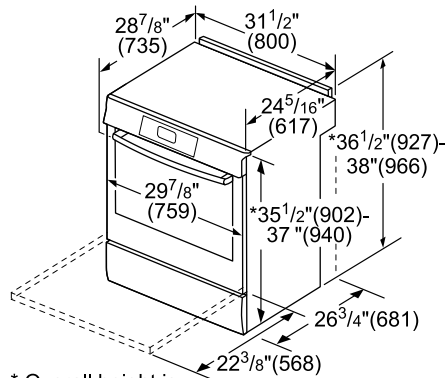

\* Overall height is adjustable via leveling legs.


measurements in inches (mm)

## Electric and Induction Range Cutout Dimensions

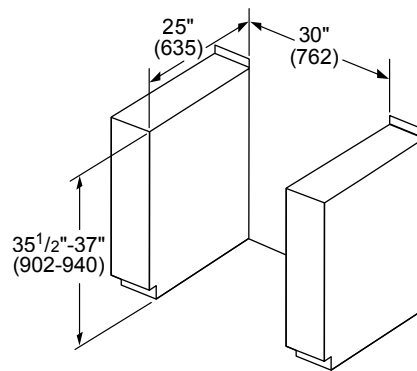

measurements in inches (mm)

## Electric and Induction Range Installation

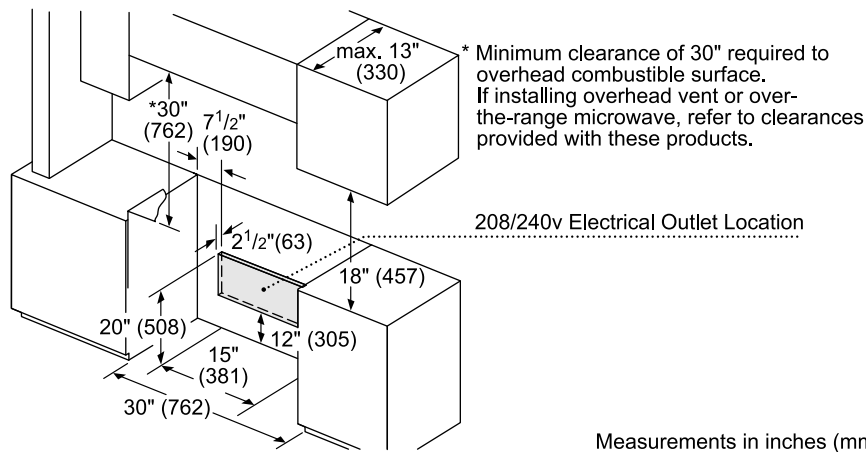

Measurements in inches (mm)

## Optional Accessories



HEZTR301  
30" Telescopic rack



HEZBS301  
4" Low backguard,  
Electric and Induction



HEZ390210  
8" AutoChef® pan  
for 6" element



HEZ390220  
9" AutoChef® pan  
for 7" element



HEZ390230  
10" AutoChef® pan  
for 8" and 9" elements

# 800 Series Electric Slide-in Range




HEI8054U

- Full-depth Slide-in Range
- 6" / 9" 3,000-Watt Dual-Ring Element
- 9.5" 3,200- / 1100-Watt Versatile Element
- 4 Elements + 1 Warming Zone
- Warming Drawer
- 4.6 cu. ft.

Electric	
Stainless Steel – HEI8054U	
General Properties	
Cooking modes	Bake, Variable Broil (hi & low), Roast, Warm, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Multi-Rack Genuine European Convection, Convection Conversion, Pizza, Fast Preheat, Sabbath
Cleaning type	Self clean
Knob material	Metal
Drawer type	Warming drawer
Oven Performance	
Bake / broil element watts (W)	2,400 / 3,800 W
Convection element watts (W)	2,000 W
Element Performance	
Total number of cooktop elements	5
Power of front left element watts (W)	1,400 / 3,000 W
Power of back left element watts (W)	1,200 W
Power of center element watts (W)	100 W
Power of back right element watts (W)	1,200 W
Power of front right element watts (W)	1,100 / 3,200 W
Element Size	
Dimension of front left heating element	6" / 9"
Dimension of back left heating element	6"
Dimension of center heating element	6"
Dimension of back right heating element	6"
Dimension of front right heating element	9.5"
Technical Details	
Watts (W)	11,300 / 14,800 W
Circuit breaker (A)	40 A
Volts (V); Frequency (Hz)	208 V / 240 V; 60 Hz
Plug type	N/A
Cord length (in.)	N/A
Energy source	Electric
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in.)	35 1/2" x 31 1/2" x 28 7/8"
Required cutout size (HxWxD) (in.)	35 1/2" x 30" x 25"
Adjustable range height (in.)	1 1/2"
Overall Oven Interior Dimensions (HxWxD) (in.)	17 13/16" x 24 1/8" x 18"
Usable Oven Interior Dimensions (HxWxD) (in.)	12 5/16" x 23 1/4" x 15 1/4"
Net weight (lbs)	248 lbs
Accessories – Included	
Included	Use and care manual, installation guide, standard racks

# 800 Series Electric Slide-in Range


## Electric Range Dimensions

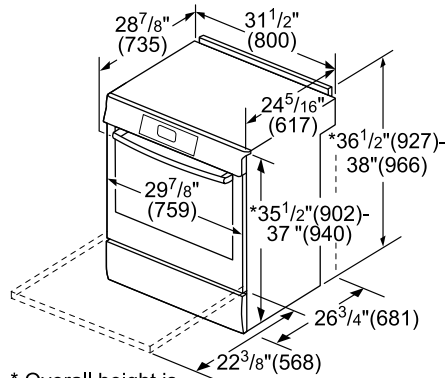

\* Overall height is adjustable via leveling legs.


measurements in inches (mm)

## Electric Range Cutout Dimensions

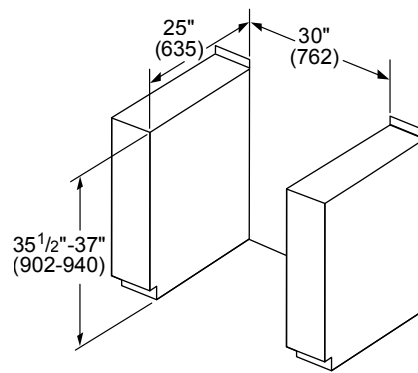

measurements in inches (mm)

## Electric Range Installation

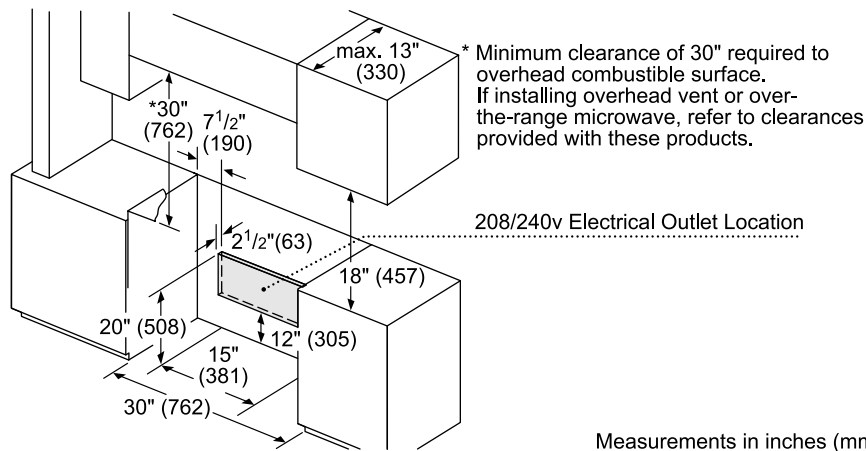

Measurements in inches (mm)

## Optional Accessories



HEZTR301  
30" Telescopic rack



HEZBS301  
4" Low backguard,  
Electric and Induction



HEZ390210  
8" AutoChef® pan  
for 6" element



HEZ390220  
9" AutoChef® pan  
for 7" element



HEZ390230  
10" AutoChef® pan  
for 8" and 9" elements