

LICD	LIND	EDC(SLINI	CED

UCR67AHC Undercounter Refrigerator Hydrocarbon Series

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors, (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on cam-lift hinges
- Easy door removal for service and cleaning
- Magnetic gasket attached to each door for positive seal
- Painted aluminum door handles
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves per section standard
- Field reversible doors
- Refrigerators operate at 36°-38°F for optimum food preservation

OPTIONS & ACCESSORIES

UCR67AHC

- Stainless steel interior available
- Stainless steel back
- ☐ 6" Legs
- 3" Casters
- Low profile casters
- Foot pedal door opener

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric evaporator
- System is serviceable from front
- Epoxy coated evaporator coil




















MODEL	UCR67AHC	
EXTERNAL DIMENSIONAL DATA		
Width Overall	67"	
Depth Overall	32 7/8"	
Height Overall with 6" casters	34 1/2"	
Number of Doors	2	
Depth with Door Open 90°	55 1/8"	
Clear Door Opening (in)	21 5/8" x 23 5/8"	
Shelf Area (sq. in)	552 1/2"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	18.97	
Internal Width Overall (in)	63"	
Internal Width Useable (in)	48"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	25"	
Number of Shelves	4	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	2.2	
REFRIGERATION DATA		
Horsepower	1/5	
Capacity (BTU/Hr)*	1350	
WEIGHT DATA		
Gross Weight (Crated lbs)	358 lbs	
Height - Crated	40"	
Width - Crated	70"	
Depth - Crated	37"	

Undercounter Refrigerators

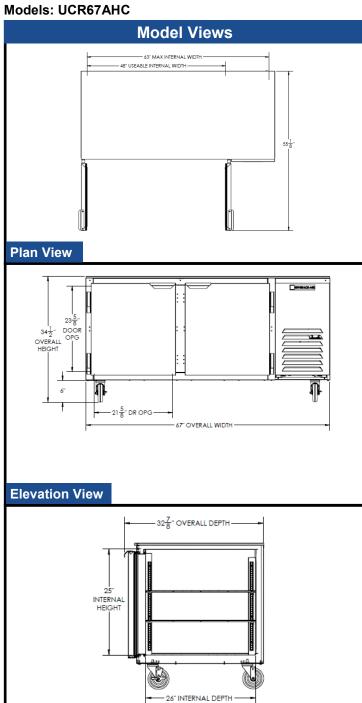

ELECTRICAL CONNECTION

















Side View



Units pre-wired at factory and include 8' long cord and plug set.



