

Cooking Solutions.



Contents.

Ovens	4 - 21
Heating modes	14 - 15
Single ovens	16 - 18
Double oven	20
Freestanding cookers	20 – 21
Compact appliances	22 - 33
Combination steam ovens	28
Combination microwave ovens and microwave	28 – 29
Coffee machine	32
Warming drawers	32
Electric cooktops	34 - 45
Induction cooktops	40 - 42
Ceramic cooktops	44
Gas cooktops	46 - 49
Rangehoods	50 - 57
Canopy rangehoods	54 – 55
Integrated rangehoods	56 – 57
Reference guides	58 - 68
Accessories for ovens, cookers and compact appliances	69 - 70
Customer service	71

When every single one of our appliances makes your life a little bit easier – that's Bosch in every detail.

We believe the perfect cooking appliance must be designed for one thing above all else: to make your time spent in the kitchen as pleasant as possible. Every detail of every appliance has been carefully designed, produced and tested by our engineers to fully satisfy the highest standards in quality, performance and convenience. The result is cutting-edge technology, timeless design and remarkable ease of use, reducing the workload for you and consistently delivering perfect results.

Proven quality

We devote the same high level of care, passion and dedication to all areas of our work – from the first design draft right through to customer service. It's the same Bosch quality that you have been able to rely on for more than 128 years.

Bosch appliances offer premium quality, advanced technology, ease of operation and outstanding German engineered technology. These attributes have earned us many accolades, national, and international, such as the red dot design award, the iF design award and other endorsements year after year.

Top performance

What drives us every day is our desire to improve. We strive to make the best even better, by developing functional, durable and energy-efficient innovations that surpass all expectations. Take, for example, the PerfectBake sensor in our Series 8 ovens – perfectly baked pastries and cakes, at the touch of a button.

Maximum convenience

Bosch is dedicated to making your life easier. Our innovative kitchen appliances are easy to use, and you won't waste a second trying to figure out how they work. Sophisticated features deliver the best results every time, and save you considerable effort and expense in the process.







The new generation of ovens.

Put a new spin on your cooking career.

Using the highest quality stainless steel and glass, our ovens and compact appliances combine beautifully to deliver a timeless, elegant and stylish finish to any kitchen with sleek, co-ordinated lines and matching panels.

No matter how complicated a recipe may look, with the Series 8 ovens it will be a piece of cake. These cutting-edge ovens constantly monitor the progress of your cooking and automatically regulate temperature and length of time.







Built-in single ovens

Whether you're preparing poultry, meat, fish, vegetarian dishes, baked goods or desserts, your favourite dishes are always cooked to perfection - and it couldn't be easier. Now you have a master chef to help you in the kitchen: your oven.



Double oven

The Bosch double oven allows you to roast in the bottom oven cavity while grilling in the top oven for maximum cooking convenience.



Freestanding cookers

Each of the freestanding cookers offers reliable Bosch technology of the finest standard technology that makes cooking, baking and roasting easy and more convenient.

Ovens | Control panel

We didn't reinvent the wheel. But we taught it how to cook.

Everything you need at hand: our intuitive control ring makes cooking easier than ever. With just a small turn of the stainless steel ring, you can adjust any of your oven's settings. The TFT-touch display, with its clear and straightforward design, guides you through the various menu options. This gives you full control over your dishes at all times.

Control panel with TFT-touch display



You'll always have a complete overview and full control of all your oven's functions. The intuitive control ring and full-width, high-resolution clear-text TFT-touch display with direct select TouchControl-buttons make operating our ovens a breeze. Clear, vivid images and helpful prompts guide you through each step as you navigate through the various programme options.

Control panel with TFT-display



Our intuitive control ring and display with direct select buttons make oven operation a pleasure from day one. Helpful icons inside the control ring provide all the information you need, making it very easy for you to keep track of the progress of your dishes.





Ovens | Functions

The first recipe collection in the form of an oven.

You could search through stacks of cookbooks and old family recipes without ever finding precise information on temperature or cooking time. Thanks to the Bosch DishAssist function for automatic oven settings, and the PerfectBake and PerfectRoast sensors you don't have to worry about that anymore. Of course, if you prefer to do it yourself, you can also select these settings yourself every bit as easily.



DishAssist

DishAssist makes cooking easy with automatic oven settings, you simply select the desired dish in the control panel and your oven automatically sets the ideal heating mode, temperature and length of time.



PerfectBake

Baking has never been easier. The PerfectBake sensor offers uniquely precise sensitivity, constantly measuring the moisture level of your dishes and automatically regulating the baking process. You'll never have to set the heating mode, length of time or temperature ever again – the PerfectBake sensor has it all under control. Simply select the type of dish, such as 'Cake', and press 'Start'. Your oven will do the rest. The result: bread, cake and quiche baked to perfection.



PerfectRoast

Christmas turkey, Easter lamb or Sunday roast – with the PerfectRoast meat probe, you'll get perfect results every time. Just like a professional chef, but with total ease. Through several highly sensitive measuring points, the probe determines the core temperature of your roast to the exact degree and second, guaranteeing perfect roasting results. Another benefit: you can also use the meat probe in the microwave – and steam oven mode.





Add a touch of steam.

Selected ovens are equipped with an added steam function to produce succulent roasts with crisp outer crusts as well as perfectly browned bread crusts. As you'd expect from any Bosch appliance, they are also easy to operate and clean.



Added steam function

When you cook using one of our classic heating modes, dishes turn out even better if you add a little bit of moisture from time to time. And that's exactly what our added steam function does. You can use an added steam function like reheating or dough proving, or you can simply set the oven to automatically add steam and regulate its intensity.





Perfect features.

Different people need different things in their kitchen, therefore Bosch ovens are available with a wide variety of features. Whether it concerns the interior lighting, the door or the rail system, with our ovens you can find the solution that fits you best.



CoolTouch doors

Of course, safety is of paramount importance: doors stay cool enough for comfortable handling while the oven is operating to provide maximum protection for large and small hands alike.



The full glass inner door has no joints or screws – a common area that can accumulate grease. For added convenience, the doors can be easily removed for cleaning.

Enamel coating

The grey enamel interior coating is easy-to-clean and the lighter colour improves visibility during cooking.



Shelf systems

Whether you choose an oven with a standard shelf system or one with single or double telescopic rails – all of our shelf systems are safe and easy to use. Selected telescopic rail sets are fully extendable – ideal for conveniently loading and removing baking trays. And for the first time, shelves are pyrolytic-proof and suitable for microwave and steam operation – Series 8 ovens only.



Lighting versions

Different lighting options guarantee optimal visibility – for example, the energy-saving lateral LED lights not only illuminate your dishes from all sides, but also save you money. The lateral LED lighting also offers separate illumination on each level, which is especially convenient when baking with multiple trays simultaneously.



Oven clock and timer with programming

The electronic clock displays time of day and also acts as a countdown timer with an audible beep to indicate the end of the timer function. Programming adds extra convenience. Simply select the end-time, the length of cooking, along with the cooking function and temperature, and the oven will do the rest.



Precise temperature control

Electronic thermostats monitor the oven's cavity temperature to maintain temperature consistency during the cooking process.



Automatic safety switch-off

The oven will switch-off after a specific period of time if left unattended.



Child lock

Selected Bosch ovens feature a child lock function.
The entire oven can be disabled simply by activating the lock function, helping protect against unwanted use.



EcoSilence Drive® motor

All our Series 8 ovens have EcoSilence Drive® motors. The brushless direct current motor improves heat distribution and is designed for clockwise and anticlockwise rotation. The EcoSilence Drive® motor has more torque, but is also quiet, energy efficient and very reliable.

At last, someone in the house who enjoys cleaning up.

Anyone who has ever cleaned an oven by hand knows how exhausting and time-consuming it can be. However, this chore is a thing of the past, thanks to our new EcoClean Direct cleaning aid and pyrolytic self-cleaning function. While the oven is in operation, the special EcoClean Direct coating works to reduce dirt accumulation. The pyrolytic cleaning function burns off grime at the touch of a button – so your oven practically cleans itself. You won't waste a minute on cleaning, leaving you more time to enjoy cooking.



EcoClean Direct

While the oven bakes or roasts, the special direct coating of microfine ceramic particles on its interior walls absorbs grease and residue and breaks them down through oxidation. All you need to do is wipe the areas not coated with EcoClean. The direct coating also regenerates every time you heat the oven, and continues to do so for the entire service life of the appliance. To remove substantial residues, simply activate the EcoClean Direct cleaning programme.*







Pyrolytic cleaning

When you activate the pyrolytic cleaning function, the oven heats up to an extremely high temperature and burns off any burned-on grease and food residue. All that's left is a little ash that you can easily remove with a paper towel. Depending on the degree of residue that has accumulated, select one of three different cleaning programmes and press 'Start' - your oven will do the rest for you. And because the baking trays and shelf rails* are pyrolyticproof, you can leave them in the oven during cleaning.

*Series 8 oven models only







Ovens | Heating modes

Because there's hot – and then there's hot.

Truly perfect baking and roasting requires not only the ideal temperature, but also the appropriate heating mode. From 4D Hotair to Hotair Eco, Bosch ovens offer heating modes that deliver everything from haute cuisine to simple daily dishes.



Hotair Eco

Hotair Eco is our improved version of convection, the heating mode most commonly used in homes. Thanks to special temperature controls, your oven maintains perfect temperature. This makes our ovens great for precision cooking on a single baking level – ideal for cakes, casseroles, meat dishes, frozen foods, and much more.



Hot air grilling/circulated air grilling

An ideal cooking method for meat and poultry where a rotisserie effect is desired. The grill and fan operate alternately, circulating hot air around the food.



Top and bottom heat Eco

In addition to classic top and bottom heat, Series 8 ovens feature a new eco-friendly mode for extremely efficient operation. Prepare perfect sponges, pound cakes, delicate pastries, bread and rolls while saving valuable energy.



Pizza setting

Designed with the pizza-lover in mind, but equally useful for quiches and tarts, this innovative function delivers cooking power for a perfectly crisp, browned base while keeping the topping moist. Suitable also for frozen food. In many cases, preheating is not required.



Bottom heating

Only the bottom element is used to generate heat.

This method is ideal for reheating or for when a crisp underside is required for pizza bases and pastry cases. It can also be used for drying herbs and bain-marie cooking.



Defrost

Perfect for gentle defrosting of meat, poultry, bread and much more.



Rapid heating

Most Bosch ovens feature an automatic rapid heating function. On Top and Bottom heating, 200°C can be reached in approximately six minutes, and 175°C on 4D HotAir Plus heating can be reached in approximately five minutes.

Other heating options



Top and bottom heat

Uses both upper and lower heating elements.



3D HotAir Plus

Cook on up to 3 levels simutaneously with even heat distribution.



Slow cooking

For gentle, slow cooking of seared, tender pieces of meat



Plate warming For preheating plates.

er pieces



Keeping warm Keep food warm without

spoiling or drying out.



Full-width grill

Grill large quantities with precise temperature control



Half-width grill

Can select just the centre section of the grill.



Intensive heat

Top element with a more powerful bottom heating element, perfect for crispy bases and tin bakery.

Ovens | Pyrolytic

Ovens.

Bosch ovens bring style and elegance to the kitchen.







HNG6764S1A 60cm Stainless Steel Pyrolytic Oven

Heating functions

14 functions + 2 added steam + microwave

Capacity

67 litres cavity volume 1 litre water tank 5 shelf positions

Convenience

SoftOpen & SoftClose door DishAssist PerfectBake sensor PerfectRoast meat probe Added steam

Microwave

1 level telescopic rail – standard

Cleaning

Pyrolytic

Cavity Lighting

LED - ceiling & sides

Safety

Quadruple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58 – 59

HRG6767S2A 60cm Stainless Steel Pyrolytic Oven

Heating functions

15 functions + 2 added steam

Capacity

71 litres cavity volume 1 litre water tank 5 shelf positions

Convenience

SoftOpen & SoftClose door DishAssist PerfectBake sensor PerfectRoast meat probe Added steam 2 level telescopic rails - fully extendable

Cleaning

Pyrolytic

Cavity Lighting

LED - ceiling & sides

Quadruple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58 – 59

HBG6767S1A 60cm Stainless Steel Pyrolytic Oven

Heating functions

13 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftOpen & SoftClose door DishAssist PerfectBake sensor PerfectRoast meat probe 2 level telescopic rails - fully extendable

Cleaning

Pyrolytic

Cavity Lighting

Halogen - ceiling

Safety

Quadruple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58 – 59







HBG6753S1A 60cm Stainless Steel Pyrolytic Oven

Heating functions

13 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftOpen & SoftClose door 10 Auto Programs 2 level telescopic rails - fully extendable

Cleaning

Pyrolytic

Cavity Lighting

Halogen - ceiling

Safety

Quadruple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

Exclusive model. See website for stockists.

For complete specifications see pg.58 – 59

HBG672BS1A **60cm Stainless Steel Pyrolytic Oven**

Heating functions

8 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftOpen & SoftClose door 10 Auto Programs

Cleaning

Pyrolytic

Cavity Lighting

Halogen – ceiling

Safety

Quadruple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58 – 59

Ovens.

Bosch ovens bring style and elegance to the kitchen.







HBG655HS1A 60cm Stainless Steel EcoClean Oven

Heating functions

13 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftOpen & SoftClose door 10 Auto Programs 2 level telescopic rails - fully extendable

Cleaning

EcoClean Direct - rear, sides & ceiling

Cavity Lighting

Halogen - ceiling

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58 – 59

HBG655HW1A 60cm White EcoClean Oven

Heating functions

13 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftOpen & SoftClose door 10 Auto Programs 2 level telescopic rails - fully extendable

EcoClean Direct - rear, sides & ceiling

Cavity Lighting

Halogen - ceiling

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58 – 59

HBG633BS1A 60cm Stainless Steel EcoClean Oven

Heating functions

10 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftOpen & SoftClose door

Cleaning

EcoClean Direct - rear wall

Cavity Lighting

Halogen - ceiling

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58 – 59



Ovens.



HVA541NS0 90cm Stainless Steel Catalytic Oven

Heating functions

9 functions

Capacity

77 litres cavity volume 4 shelf positions

Convenience

Electronic clock/timer 1 level telescopic rail - standard

Cleaning

Catalytic liners - rear wall & sides

Cavity Lighting

Halogen - sides

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

478 x 896 x 568mm

For complete specifications see pg.58 – 59



HBM43S550A

60cm Stainless Steel EcoClean **Double Oven**

Heating functions

3 functions – top oven 5 functions - bottom oven

Capacity

35 litres cavity volume - top oven 67 litres cavity volume - bottom oven 2 shelf positions - top oven 5 shelf positions - bottom oven

Convenience

Electronic touch-control clock/timer 2 level telescopic rail - standard (bottom oven)

Cleaning

EcoClean liners - rear wall, side walls & ceiling (both cavities)

Cavity Lighting

1 lamp - ceiling (top & bottom oven)

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

888 x 595 x 550mm

For complete specifications see pg.58 – 59



HSB738357A

90cm Freestanding Gas/Catalytic Oven

OVEN

Heating functions

8 functions

Capacity

112 litres cavity volume 4 shelf positions

Convenience

Electronic touch-control clock/timer 1 level telescopic rail - standard Rotisserie kit Storage compartment Height-adjustable legs

Cleaning

Catalytic liners - rear wall & sides

Safety

Triple-glazed door

сооктор

Heating functions

6 gas burners:

1 x wok burner,

1 x high-speed burner,

2 x standard burners,

2 x economy burners

Convenience

One-hand ignition via control knobs 3 pc cast-iron pan supports

Safety

Flame failure

Other

Suitable for NG or LPG

Dimensions (HxWxD)

900 x 898 x 600mm

For complete specifications see pg.60 – 61



HGD74W455A

60cm Freestanding Gas/Catalytic Oven

OVEN

Heating functions

8 functions

Capacity

67 litres cavity volume 5 shelf positions

Convenience

Electronic touch-control clock/timer 2 level telescopic rail - standard Storage compartment Height-adjustable legs

Cleaning

Catalytic liners - rear wall & sides

Triple-glazed door Child lock

сооктор

Heating functions

4 gas burners:

1 x wok burner,

2 x standard burners,

1 x economy burner

Convenience

One-hand ignition via control knobs 2 pc cast-iron pan supports

Safety

Flame failure

Other

Suitable for NG or LPG

Dimensions (HxWxD)

900 x 600 x 600mm

For complete specifications see pg.60 – 61



HCA858450A

60cm Freestanding Induction/Pyrolytic Oven

OVEN

Heating functions

10 functions AutoPilot40

Capacity

67 litres cavity volume 5 shelf positions

Convenience

Electronic touch-control clock/timer SoftClose door Height-adjustable legs

Cleaning

Pyrolytic cleaning

Safety

Quadruple-glazed door Child lock

СООКТОР

Heating functions

4 induction cooking zones 1 CombiZone MoveMode (2 levels) 17-stage power setting PowerBoost setting for each zone

Convenience

Electronic -/+ touch-controls & timer for each zone WipeProtection

Safety

2-stage residual heat indicators Child lock

Dimensions (HxWxD)

900 x 600 x 600mm

For complete specifications see pg.60 - 61



HCA854450A

60cm Freestanding Ceramic/Pyrolytic Oven

OVEN

Heating functions

10 functions AutoPilot40

Capacity

67 litres cavity volume 5 shelf positions

Convenience

Electronic touch-control clock/timer SoftClose door Height-adjustable legs

Cleaning

Pyrolytic cleaning

Safety

Quadruple-glazed door Child lock

СООКТОР

Heating functions

4 ceramic cooking zones 17-stage power setting

Convenience

Electronic -/+ touch-controls & timer for each zone

Safety

4-stage residual heat indicators Child lock

Dimensions (HxWxD)

900 x 600 x 600mm

For complete specifications see pg.60 – 61




The new generation of compacts.

Compact appliances.

Bosch compact appliances offer exceptional cutting-edge features and extras. Matching control panels mean that you can mix and match full size and compact appliances for a coordinated look. With electronic controls, operating functions are harmonised for easy use.









Combination microwave ovens Discover the speed and versatility of microwave technology. With the combination microwave oven you can add speed to your traditional cooking process without compromising on taste.



Microwave with grill Standard microwave cooking, with the addition of a grill to offer more cooking options.



Coffee machine

Whether your preference is a Latte or a double shot Cappuccino, our compact coffee machine brings café-style drinks to your home.



Warming drawers

Bosch warming drawers ensure food stays just at the right serving temperature. You can gently defrost, prove dough or slow cook. They are the perfect partner for Bosch's Series 8 60cm wide built-in ovens and compact appliances.





The new Series 8 generation of combination steam ovens.

Steams so gently that even vitamins stay for dinner.

There is no healthier or tastier way to prepare food than in a Series 8 combination steam oven. When gently cooked in steam, foods retain their vitamins and aroma while bringing out their full and natural flavour. Vegetables stay crisp, while poultry and fish remain juicy and tender. With steam, you can even cook without adding oil or fat. Thanks to its integrated water tank, the oven doesn't need a direct water connection, giving you much more flexibility in choosing its location.


Menu cooking


With the Series 8 combination steam oven, you can prepare an entire set menu using up to three levels at once. Salmon with asparagus and rosemary potatoes? Cook them all together and everything will turn out perfectly. Need to prepare dessert, too? No problem. Thanks to the moisture in the oven, there's no intermingling of flavours - each dish retains its own authentic flavour.

Preserving vitamins and minerals

Dishes that are cooked in hot steam not only retain their vitamins and minerals, but also their full, natural flavour. So you can also go easy on the extra seasoning, and use much less salt when cooking. In short, healthy food has never tasted better.









The new Series 8 microwave and combination microwave

Some gourmets shouldn't be kept waiting.

Sometimes you just can't get food to the table fast enough. Our new Series 8 microwave and combination microwave ovens helps you speed up the cooking process and give you perfect control over your menu and your schedule. Whether you're heating food, pre-cooked meals or frozen foods, you'll get outstanding results quickly, hygienically and without compromising on taste. So instead of killing time waiting for dinner to be ready, you and your loved ones will have much more time to enjoy it.

Power levels and automatic programmes

Our Series 8 microwave with high-resolution TFT displays allow you to heat, defrost, roast or grill anything - thanks to 900 watts with five power levels and, depending on the model, also with an additional 1,300 watt grill with three power levels. The AutoPilot programme also helps you achieve the best possible results with next to no effort. Just insert your roast, enter its weight and select the right programme from the menu. The rest takes care of itself.

The best of both worlds

Our Series 8 compact combination microwave ovens are multi-talented appliances. They have all the classic heating methods of a standard 60cm oven, like conventional top and bottom heat, plus they have the practical functions of a microwave. This means you can use your combination microwave oven as just an oven, or just a microwave or you can combine these functions to get the best of both worlds. For example, you can thaw out something frozen first and then bake or roast it immediately, enabling you to achieve perfect baking and roasting results very quickly. Plus the handy, compact size of these compact combination microwave ovens mean they are the perfect solution for people with small kitchens and big ideas.



Compacts | Ovens

Compact appliances.

The collection of Bosch compact built-in appliances are designed to give you perfect symmetry in your kitchen.







CSG656RS1A **60cm Stainless Steel Combination** Steam Oven

Heating functions

14 functions + 4 steam

Capacity

47 litres cavity volume

1 litre water tank

3 shelf positions

Convenience

SoftOpen & SoftClose door

DishAssist

PerfectBake sensor

PerfectRoast meat probe

1 level telescopic rail – fully extendable

Cleaning

EcoClean Direct - rear, sides & ceiling

Cavity Lighting

LED - ceiling

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

455 x 595 x 548mm

For complete specifications see pg.62

CSG656BS1B **60cm Stainless Steel Combination** Steam Oven

Heating functions

12 functions + 4 steam

Capacity

47 litres cavity volume

1 litre water tank

3 shelf positions

Convenience

SoftOpen & SoftClose door DishAssist

EcoClean Direct - rear, sides & ceiling

Cavity Lighting

LED - ceiling

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

455 x 595 x 548mm

For complete specifications see pg.62

CMG656RS1A 60cm Stainless Steel Combination **Microwave Oven**

Heating functions

12 functions + microwave

Capacity

45 litres cavity volume

3 shelf positions

Convenience

SoftOpen & SoftClose door

DishAssist

PerfectBake sensor

PerfectRoast meat probe

Cleaning

EcoClean Direct - rear, sides & ceiling

Cavity Lighting

LED - ceiling

Safety

Quadruple-glazed door Child lock

Dimensions (HxWxD)

455 x 595 x 548mm

For complete specifications see pg.62







CMG676BS1A 60cm Stainless Steel Combination Microwave Oven

Heating functions

12 functions + microwave

Capacity

45 litres cavity volume 3 shelf positions

Convenience

SoftOpen & SoftClose door DishAssist

Cleaning

Pyrolytic

Cavity Lighting

LED - ceiling

Quadruple-glazed door Child lock

Dimensions (HxWxD)

455 x 595 x 548mm

CMG633BS1B

60cm Stainless Steel Combination Microwave Oven

Heating functions

6 functions + microwave

Capacity

45 litres cavity volume 3 shelf positions

Convenience

SoftOpen & SoftClose door 13 Auto Programs

Cavity Lighting

LED - ceiling

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

455 x 595 x 548mm

BEL634GS1A 60cm Stainless Steel Microwave

Heating functions

Microwave + grill

Capacity

21 litres cavity volume

Convenience

Bottom control panel Left hand hinge 10 Auto Programs

Cavity Lighting

LED - ceiling

Dimensions (HxWxD)

382 x 594 x 318mm

For complete specifications see pg.62

For complete specifications see pg.62

For complete specifications see pg.62

Now your favourite café is open 24/7.

Espresso, cappuccino or latte macchiato? With the Series 8 built-in coffee machine, you can treat yourself and your guests to any beverage at the touch of a button. Bosch Barista technology guarantees a full-bodied aroma and perfect crema – for coffees as delicious as those brewed in your favourite café.



SensoFlow system for a perfect aroma

The optimal brewing temperature for an espresso is between 90°C and 95°C. If the temperature is any higher or lower, the flavour of the beans is only partially released or the coffee is bitter. Our smart SensoFlow system heats the water to just the right temperature, for a full-bodied espresso aroma from the first cup to the last.



A choice of coffee at the touch of a button

Want the perfect espresso, cappuccino or latte macchiato? With the OneTouch function, it'll be ready in an instant. Innovative technology regulates the release of coffee, hot milk and foam to deliver the beverage of your choice at the touch of a button.



Automatic cleaning of the milk system

Now you can clean your coffee maker as easily as you prepare your morning pick-me-up. Each time you make a coffee drink with milk, the milk system is automatically rinsed out with a blast of steam. The coffee machine takes total charge of the milk system's daily maintenance, so that you can concentrate on enjoying your cappuccino or latte macchiato.





Compacts | Other

Compact appliances.







CTL636ES1 **60cm Stainless Steel Coffee Machine**

Heating function

SensoFlow system

Capacity

2.4 litre water tank 1kg coffee bean container

Convenience

Programmable options CreamPro milk nozzle AromaPro brewing 19 bar pressure

Cleaning

Descaling programs Auto Cleaning Milk system

Lighting

Display lighting

Safety

Locking function

Dimensions (HxWxD)

455 x 594 x 375mm

For complete specifications see pg.63

BID630NS1A **60cm Stainless Steel Warming Drawer**

Heating function

40°C - 80°C temperature control

Capacity

52 litres cavity volume 290mm height

Convenience

Fully extendable drawer Ceramic glass base element Push open drawer

Dimensions (HxWxD)

290 x 595 x 544mm

BIC630NS1A **60cm Stainless Steel Warming Drawer**

Heating function

40°C - 80°C temperature control

Capacity

20 litres cavity volume 140mm height

Convenience

Fully extendable drawer Ceramic glass base element Push open drawer

Dimensions (HxWxD)

140 x 595 x 544mm

For complete specifications see pg.63

For complete specifications see pg.63





The new generation of electric cooktops.

Electric cooktops.

There is a wide range of induction and ceramic cooktops to choose from. As you would expect from Bosch, all are made using high-quality materials, are easy to use and add versatility, style and elegance to any kitchen.



FlexInduction cooktops

There's no limitation to how you arrange your pots on the cooktop – the choice is all yours with Bosch's FlexInduction. You can use your cooktop like a conventional induction cooktop with separate cooking zones, or at the touch of a button, combine them to make large continuous cooking zones. This gives you additional space on which you can place a large cookware item, such as roasters, teppanyaki grills or roasters with steaming units. For even more freedom, there are extended zones to provide up to 20% more space.



Induction cooktops

With induction cooktops, heat is only generated where it is really needed - the underside of the pot. This means that water in an induction pot is not only heated faster, it is also safer as the minimal heating of the cooktop glass means that fingers are not at risk of being burnt. In addition, thanks to the automatic pot detection function, the cooktop switches off automatically when there is no pot on the cooking zone.



Ceramic cooktops

With their electronic touch-controls and flexible cooking zones, Bosch ceramic cooktops combine great looks with smart function and design.

Electric cooktops | Induction

Set to the perfect level. Cooked to the perfect consistency.

Features that don't just provide you with ultimate convenience, but produce the best results too.



There are many ways to make a perfect steak. Here's a shortcut.

The right temperature is crucial for successful frying. The new PerfectFry sensor automatically monitors the frying temperature and adjusts it as required to ensure perfectly-fried dishes.

Perfectly frying food starts with getting the temperature right for the oil. Different types of oil have different smoke points and without exact temperature management, food can be burnt easily. For example, the smoke point of sunflower oil is 210 - 225°C, while that of virgin oil is just 130 - 180°C. PerfectFry shows you when the ideal temperature for adding the oil to the pan has been reached by giving off visual and audio alerts, and the temperature is automatically regulated, allowing your food to be fried at the optimum heat.




Boiling over is over forever with the Bosch PerfectCook sensor.

The PerfectCook sensor provides precise temperature control while cooking, so you never have to worry about your pots boiling over again. The PerfectCook sensor is magnetically attached to the pot and sends information to the cooktop. The PerfectCook mode is activated by pressing a button on the sensor and confirming the chosen cooking zone on cooktop. Visual and audible feedback is provided when the desired temperature has been reached.



Induction cooktops with MoveMode

Cooking with MoveMode is totally intuitive and convenient. With conventional cooktops, you have to boil your soup at level 9, let it cook at level 5 and then simmer it at level 1 by adjusting the temperature yourself. With MoveMode FlexInduction zones, the cooktop does it for you. The FlexZone divides itself into three different areas, preset at levels 9, 5 and 1 when MoveMode is activated. You don't have to change the power level by changing the settings, you just have to move the pot along the flex zone. This makes cooking simple, convenient and easy.

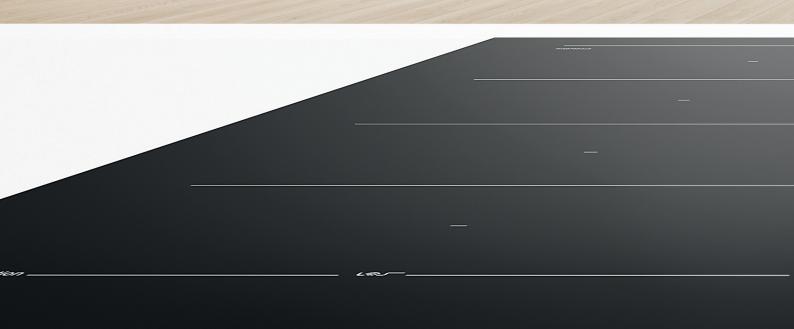



Electric cooktops | Induction

The best cooking needs just one ingredient. Bosch Induction.


Modern cooking offers so many wonderful new tastes and textures, you need a cooktop that's flexible enough to keep up.


Old pots, new technology


Most of your old pots will work with induction if they have a magnetic base. All pots and pans with ferromagnetic bases are suitable for induction. So, if a fridge magnet sticks to your pot, you know it's induction-ready. In general, special stainless steel, iron and enamel are all suitable.

Cooking speed

Time required to heat 2 litres of water from 15°C - 90°C







12.24

Source: BSH Hausgeräte GmbH Germany (overseas test results)



DirectSelect Premium controls

The DirectSelect Premium touch control interfaces has a simple, elegant design. It offers easy, direct control with one of the widest power level selectors in the market. The 17 power levels are clearly shown and can be selected directly, and the interface offers visual feedback of the chosen power setting through the light line.




DirectSelect controls

Maintain control even in the most hectic kitchen situations. Select your desired power level - including intermediate levels - with complete accuracy.



With CombiZone, two single cooking zones can be combined into one large zone. The CombiZone enables the consumer to cook with large oval or rectangular cookware such as roasters, steamers, Teppan Yaki or grill plates.



Features may vary depending on models. Please check individual product specifications.



PanBoost

With PanBoost (ShortBoost), you can now heat pots and pans even faster - without the fear of damaging them due to overheating. The PanBoost function can be easily selected via the interface and matched to the requirements for food preparation, such as whether oil or water is going to be heated. This means the pan is ready to be used for frying after approximately 30 seconds.



17-stage power setting

Enjoy total control on every recipe with 17-stage power settings. This function allows cooking zones to be set in increments of 0.5 (e.g. 0.5, 1, 1.5, 2...9).



PowerBoost

PowerBoost channels increased power to a selected zone to turbocharge the cooking process. With PowerBoost, you can boil 2 litres of water almost three times faster than on a conventional glass-ceramic cooktop.



Dual function timer including automatic switch-off for each zone

Use the independent audible timer to set the length of cooking time or set the cooking zone at a specific temperature (i.e. level 5.5) for up to 99 minutes - ideal for busy households. Once the selected time has been reached, the cooking zone is switched off automatically.



Automatic pot detection

Bosch Induction cooktops feature automatic pot detection, which recognises the diameter of the cookware and determines the size of the cooking zone accordingly. If the pot is removed, the control panel indicator will flash and remain inactive until the pot is detected.



QuickStart

Start cooking quicker. Bosch QuickStart functionality automatically detects the location of your pot and displays the cooking zone on the control panel. Just select the power level and you're away.

Available on selected models only.



Things happen quickly in the kitchen – if you spill something on the control panel or accidentally switch-off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

Available on selected models only



Energy Consumption Display

Each time you finish cooking, your Energy Consumption Display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

Available on selected models only.



WipeProtection

Stay in complete cooking control even while you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surfaces easily, without losing your cooking settings.





Child lock

Maximum safety for tiny hands. Lock your cooktop's control panel and prevent accidental little chefs from 'helping out' and hurting themselves. Enjoy the reassurance of maximum safety for both you and your loved ones.





2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h'- residual heat insufficient to cook, but zone is still hot enough to advocate caution.



Automatic safety switch-off


Never worry again if you have forgotten to turn off the cooktop. If you've stopped using it, your Bosch Induction cooktop will automatically shut down.

Electric cooktops | FlexInduction

Induction cooktops.

Cooking with induction provides faster results and efficient cooking at higher and lower temperatures. The DirectSelect Premium and DirectSelect intuitive controls all boast 17-stage power settings. Bosch Induction cooktops make the entire cooking process so much easier to manage.





PXX975DC1F 90cm FlexInduction Cooktop

Heating functions

5 Induction cooking zones

3 FlexInduction zones

MoveMode (3 levels)

PerfectFry sensor with 5 temperature settings

17-stage power setting

PowerBoost for each zone

Convenience

DirectSelect Premium controls

Multiple timer with auto switch-off for each zone

Automatic pot detection

QuickStart

Energy consumption display

WipeProtection function

Safety

Safety switch off

Residual heat indicators

Child lock

Dimensions (WxD)

916 x 527mm

For complete specifications see pg.64

PXY875DF1F **80cm FlexInduction Cooktop**

Heating functions

4 Induction cooking zones

2 FlexInduction zones with extendable zones

MoveMode (3 levels)

PerfectFry sensor with 5 temperature settings

PerfectCook sensor

17-stage power setting

PowerBoost for each zone

Convenience

DirectSelect Premium controls

Multiple timer with auto switch-off for each zone

Automatic pot detection

QuickStart

ReStart

Energy consumption display

Automatic setting transfer

Cleaning

WipeProtection function

Safety

Safety switch off

Residual heat indicators

Child lock

Dimensions (WxD)

816 x 527mm

For complete specifications see pg.64

PXF875DC1F **80cm FlexInduction Cooktop**

Heating functions

4 Induction cooking zones

1 FlexInduction zone

MoveMode (3 levels)

PerfectFry sensor with 5 temperature settings

17-stage power setting

PowerBoost for each zone

Convenience

DirectSelect Premium controls

Multiple timer with auto switch-off for each zone

Automatic pot detection

QuickStart

Energy consumption display

WipeProtection function

Safety

Safety switch off


Residual heat indicators

Child lock

Dimensions (WxD)

816 x 527mm





PXY675DC1E **60cm FlexInduction Cooktop**

Heating functions

4 Induction cooking zones 2 FlexInduction zones with extendable zones MoveMode (3 levels) PerfectFry sensor with 5 temperature settings 17-stage power setting

PowerBoost for each zone

Convenience

DirectSelect Premium controls Multiple timer with auto switch-off for each zone Automatic pot detection QuickStart ReStart

Energy consumption display Automatic setting transfer

Cleaning

WipeProtection function


Safety

Safety switch off Residual heat indicators Child lock

Dimensions (WxD)

606 x 527mm

Exclusive model. See website for stockists. For complete specifications see pg.64



PXX675FC1E 60cm FlexInduction Cooktop

Heating functions

4 Induction cooking zones 2 FlexInduction zones PerfectFry sensor with 5 temperature settings 17-stage power setting PowerBoost for each zone

Convenience

DirectSelect controls Multiple timer with auto switch-off for each zone Automatic pot detection QuickStart ReStart

Energy consumption display Cleaning WipeProtection function

Safety

Safety switch off Residual heat indicators Child lock

Dimensions (WxD)

606 x 527mm

For complete specifications see pg.64



PXE651FC1E **60cm FlexInduction Cooktop**

Heating functions

4 Induction cooking zones 1 FlexInduction zone PerfectFry sensor with 5 temperature settings 17-stage power setting PowerBoost for each zone

Convenience

DirectSelect controls Multiple timer with auto switch-off for each zone Automatic pot detection QuickStart ReStart

Cleaning

WipeProtection function

Energy consumption display

Safety

Safety switch off Residual heat indicators Child lock

Dimensions (WxD)

592 x 522mm

Electric cooktops | Induction

Induction cooktops.



PIE675DC1E **60cm Induction Cooktop**

Heating functions

4 Induction cooking zones PerfectFry sensor with 5 temperature settings 17-stage power setting PowerBoost for each zone

Convenience

DirectSelect Premium controls Multiple timer with auto switch-off for each zone Automatic pot detection QuickStart

ReStart

Energy consumption display

Cleaning

WipeProtection function

Safety

Safety switch off Residual heat indicators Child lock

Dimensions (WxD)

606 x 527mm

Exclusive model. See website for stockists.

For complete specifications see pg.65



PIF631FR1F **60cm Induction Cooktop**

Heating functions

4 Induction cooking zones 17-stage power setting PowerBoost for each zone

Convenience

DirectSelect controls Multiple timer with auto switch-off for each zone Automatic pot detection

QuickStart

ReStart

Energy consumption display

Cleaning

WipeProtection function

Safety

Safety switch off Residual heat indicators Child lock

Dimensions (WxD)

592 x 522mm

For complete specifications see pg.65



PXX375FB1E **30cm FlexInduction Cooktop**

Heating functions

2 Induction cooking zones 1 FlexInduction zone 17-stage power setting PowerBoost for each zone

Convenience

DirectSelect controls Multiple timer with auto switch-off for each zone Automatic pot detection

QuickStart

ReStart

Energy consumption display

Cleaning

WipeProtection function

Safety

Safety switch off Residual heat indicators Child lock

Dimensions (WxD)

306 x 527mm



Electric cooktops | Ceramic

Ceramic cooktops.

With electronic touch-controls and extendable cooking zones, Bosch ceramic cooktops combine great looks with smart function and design. The smooth ceramic glass cooktop surface is tough and durable as well as being practical and easy-to-clean.



PKN675DR1A **60cm Ceramic Cooktop**

Heating functions

- 4 HighSpeed cooking zones
- 1 Dual zone
- 1 Extendable roasting zone
- 17-stage power setting

Convenience

DirectSelect Premium controls Multiple timer with auto switch-off for each zone Automatic electronic boil start Keep warm function ReStart

Cleaning

WipeProtection function

2-stage residual heat indicators Child lock

Dimensions (WxD)

606 x 527mm

For complete specifications see pg.65



PKE645C17A **60cm Ceramic Cooktop**

Heating functions

4 HighSpeed cooking zones 9-stage power setting

Convenience

Rotary control knobs

4-stage residual heat indicators

Dimensions (WxD)

583 x 513mm



Dual circuit cooking zone

Available on selected ceramic cooktops, this energy-saving feature allows you to select a smaller cooking zone for small pans, and a larger zone for larger pans.



Extendable zone

Selected cooking zones can be extended giving you a much larger area to accommodate big saucepans, casserole and other (special) cooking dishes.



Automatic electronic boil start

The automatic electronic boil start heats the hotplate using the highest heat setting and then reverts down to the simmer setting you have previously selected, reducing the risk



QuickTherm technology

For improved control and flexibility, heat is delivered to the cooking zone in approximately three seconds. This feature is quicker than standard ceramic zones or electric-sealed plates.



The new generation of gas cooktops.

Gas cooktops.

Our German-designed gas cooktops are available in a range of different styles.





Stainless steel cooktops

With a stainless steel base, all models offer a flame failure device. Other features include up to six burners, a dedicated wok burner for high intensity cooking and cast-iron pan supports.



Control dials

The control dials match the design of our range of ovens so that you can perfectly coordinate your appliances.



Cast-iron supports

Cast-iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans.



High-power wok-style burner

Selected gas cooktop models feature a powerful wok-style burner, which provides up to 18Mj/h. Suitable for use with flat-based pans or with a wok using the wok ring provided.



Flexible burners

All our gas cooktops feature different burner combinations for greater flexibility. With wok, high-speed, standard and economy burners, you can cook more efficiently with the burner most suited to the size of the pan.



Flame failure device

For added safety, all Bosch gas cooktops feature a flame failure device. This feature stops the supply of gas to the burners if the flame is extinguished.

One-hand ignition

Push and turn the ergonomically designed control knobs and the gas ignites automatically. As well as offering the convenience of only using one-hand, there is also no separate ignition button to clean.



Gas cooktops

Gas cooktops.

The cooktop of choice in most professional kitchens, modern gas cooktops are as stylish as they are practical.







PCR915B91A 90cm Stainless Steel Gas Cooktop

Heating functions

5 burners

1 x 18Mj/h dual flame wok burner

1 high-speed burner

2 standard burners

1 economy burner

Convenience

One-hand ignition via control knobs 3 pc cast-iron pan supports

Safety

Flame failure

Dimensions (WxD)

915 x 520mm

Suitable for NG or LPG

PCT915B9TA 90cm Stainless Steel Gas Cooktop

Heating functions

6 burners

2 x 18Mj/h dual flame wok burner

2 standard burners

2 economy burners

Convenience

One-hand ignition via control knobs 3 pc cast-iron pan supports

Flame failure

Dimensions (WxD)

915 x 520mm

Other

Suitable for NG or LPG

75cm Stainless Steel Gas Cooktop

Heating functions

4 hurners

PCI815B91A

1 x 14.4Mj/h triple flame wok burner

1 high-speed burner

1 standard burner

1 economy burner

Convenience

One-hand ignition via control knobs 2 pc cast-iron pan supports

Safety

Flame failure

Dimensions (WxD)

762 x 520mm

Suitable for NG or LPG

For complete specifications see pg.68

For complete specifications see pg.68







Heating functions

5 burners

1 x 14.4Mj/h triple flame wok burner

1 high-speed burner

2 standard burners

1 economy burner

Convenience

One-hand ignition via control knobs 2 pc cast-iron pan supports

Safety

Flame failure

Dimensions (WxD)

702 x 520mm

Suitable for NG or LPG

For complete specifications see pg.68



PCH615B9TA 60cm Stainless Steel Gas Cooktop

Heating functions

4 burners

1 x 18Mj/h dual flame wok burner

1 high-speed burner

1 standard burners

1 economy burner

Convenience

One-hand ignition via control knobs 2 pc cast-iron pan supports

Safety

Flame failure

Dimensions (WxD)

582 x 520mm

Other

Suitable for NG or LPG

The new generation of rangehoods.

Rangehoods.

With a wide variety of sizes, types and finishes to choose from, it's easy to find the right Bosch rangehood to perfectly suit your kitchen's design.

Rangehoods.



Halogen lighting

Integrated halogen lighting ensures that the cooking area is clearly illuminated. They are more efficient than standard lights and are designed to last longer.





LED lighting

The new LED lights offer a longer lifetime and use less energy than conventional halogen lighting. Additional convenience is offered with SoftLight which gently fades lighting in and out with dimmer function.





EcoSilence Drive®

Relax in a quieter kitchen with family and friends. The new EcoSilence Drive® motor operates without carbon brushes, eliminating the disadvantages of conventional motors. Instead of energy loss, wear and noise, you get efficiency, durability, and smooth operation. To reduce motor noise even further, we have optimised the airflow inside the hood. The result: low noise levels with high power.



Rim ventilation filter

With its smooth uninterrupted surface and grease separation, the rim ventilation filter from Bosch has a multipatented filter sealing system and flow-optimised filter system with 12-layer filter mats.



Stainless steel filter

The stainless steel filter provides an exceptionally high level of grease absorption. It is concealed behind an elegant stainless steel cover with a stainless steel handle.



Metal grease filter


Metal grease filters are required for ducted and recirculating systems to filter grease and other solid particles out of the extracted air. To make sure filters operate at maximum efficiency, they should be cleaned regularly.





Dishwasher-safe metal filters

For easy cleaning, all Bosch filters can be safely loaded into any Bosch dishwasher for sparkling clean results.




Bosch extraction rates are tested inline with EU standards. See page 66-67 for more information.

What extraction rate do I need?

It is recommended that air be extracted (or exchanged) in a room depending on your type of cooking: minimum of 6 times per hour; and a maximum of 12 times per hour.


Air Extraction is measured using room volume. This is calculated by multiplying Length x Width x Height.





Ducted extraction

Ducting out is the most effective method of extraction. Ideally the rangehood should be sited on an outside wall, or an outside wall can be reached via ducting. Most Bosch extractors are now standardised to facilitate a 150mm diameter outlet for maximum performance, although smaller ducting can be used if required. Please refer to the installation guide for further advice on best practice installation.



Recirculation kit

Odours are extracted and filtered, then purified air is returned to the room. The kit comprises of a carbon filter and all components needed to ensure that odour free air is returned into the kitchen. To maintain performance, the carbon filter should be replaced on a regular basis. A recirculation kit needs to be purchased as a separate accessory.



CleanAir module

The CleanAir module is a special active carbon filter with a large slatted surface, the module reduces odours by up to 95%, every bit as good as the ducted system. The surface of the CleanAir filter is the equivalent of around 50 football pitches.*

*Accessory to be purchased seperately. Available for selected Bosch Rangehoods



Variable power settings

All Bosch rangehoods feature variable power settings, which can be set to effectively remove odours, smoke and moisture caused by cooking. Many models also feature an intensive extraction setting, which gives an extra boost to the performance when required.



Automatic run-on

Selected Bosch rangehoods automatically continue to run-on for approximately 10 minutes after normal operation to ensure remaining odours are removed. The rangehood then automatically switches off.



Automatic power revert

When the intensive setting is selected, it can be set to automatically revert to a pre-defined setting after a short period of time.



Electronic filter saturation indicator

For maximum extraction efficiency, an illuminated light indicates when the filter needs cleaning. For hassle-free cleaning, the one-piece filter can be loaded into your Bosch dishwasher.



Electronic control

3 power levels + 2 additional intensive settings, automatic run-on, filter saturation indicator, automatic power revert and SoftLight with dimmer function, control at your fingertips.



Electronic button control

This control provides you with 3 power levels + 1 intensive setting. There's also a push-button for turning the lights on and off. And to make operation even easier, the buttons are back-lit.



Rocker switch control

It doesn't get any easier: 3 push-buttons for 3 power levels and one for turning the lights on and off.

Rangehoods | Canopy

Rangehoods.



DIB091U51B

90cm Ceiling-Mounted Island Stainless Steel Canopy Rangehood

Power functions

1000m³/h maximum extraction capacity 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on EcoSilence Drive® motor

Convenience

Noise level: 46dB at level 1 or 300m³/h (150mm ducted) Sound insulation mats Electronic controls with LED display 4 x 3W LED Softlights with dimmer function **FcoSensor** CleanAir recirculation kit compatible

Cleaning

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

744-924 x 900 x 600mm (ducted) or 744-1044 x 900 x 600mm (recirculated)





DWR091F51A

90cm Wall-Mounted Stainless Steel Canopy Rangehood

Power functions

810m³/h maximum extraction capacity with Rim Ventilation 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on EcoSilence Drive® motor

Convenience

Noise level: 44dB at level 1 or 250m³/h (150mm ducted) Sound insulation mats Electronic controls with LED display 3 x 3W LED Softlights with dimmer function CleanAir recirculation kit compatible

Cleaning

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

628-954 x 900 x 500mm (ducted) or 628-1064 x 900 x 500mm (recirculated)

For complete specifications see pg.66-67



DWW098F50A

90cm Wall-Mounted Stainless Steel Canopy Rangehood

Power functions

860m³/h maximum extraction capacity 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on EcoSilence Drive® motor

Convenience

Noise level: 46dB at level 1 or 300m³/h (150mm ducted) Sound insulation mats Electronic controls wth LED display 3 x 3W LED Softlights with dimmer function CleanAir recirculation kit compatible

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

672-954 x 900 x 500mm (ducted) or 672-1064 x 900 x 500mm (recirculated)





DWW097A50A 90cm Wall-Mounted Stainless Steel Canopy Rangehood

Power functions

770m³/h maximum extraction capacity 3 power settings + 1 intensive setting with automatic revert to previous setting EcoSilence Drive® motor

Convenience

Noise level: 45dB at level 1 or 310m3/h (150mm ducted) Sound insulation mats Electronic button control 3 x 3W LED lights CleanAir recirculation kit compatible

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

672-954 x 900 x 500mm (ducted) or 672-1064 x 900 x 500mm (recirculated)

For complete specifications see pg.66-67



DWB09W850A 90cm Wall-Mounted Stainless Steel Canopy Rangehood

Power functions

750m³/h maximum extraction capacity 3 power settings

Convenience

Noise level: 52dB at level 1 or 300m³/h (150mm ducted) Rocker switch controls 2 x 20W Halogen lights CleanAir recirculation kit compatible

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

642-954 x 900 x 500 (ducted) or 642-1064 x 900 x 500mm (recirculated) DWW09W651A / DWW06W650A 90cm/60cm Wall-Mounted Stainless Steel Pyramidial Rangehood

Power functions

650m³/h maximum extraction capacity 3 power settings

Convenience

Noise level: 49dB at level 1 or 270m³/h (150mm ducted) Rocker switch controls 2 x 20W Halogen lights (DWW09W651A) 2 x 30W Halogen lights (DWW06W650A)

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

799-976 x 900 x 500mm (DWW09W651A - ducted or recirculated) 799-976 x 600 x 500mm (DWW06W650A - ducted or recirculated)

For complete specifications see pg.66-67

Rangehoods.



DHI 895CAU 86cm Integrated Rangehood

Power functions

820m³/h maximum extraction capacity with Rim Ventilation

3 power settings + 1 intensive setting with automatic revert to previous setting Automatic run-on

EcoSilence Drive® motor

Convenience

Noise level: 41dB at level 1 or 220m3/h (150mm ducted) Push button controls $2 \times 1 \text{W}$ LED lights with dimmer function

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

418 x 860 x 282mm (ducted or recirculated)



DHL785BAU 70cm Integrated Rangehood

Power functions

730m³/h maximum extraction capacity with Rim Ventilation 3 power settings + 1 intensive setting with automatic revert to previous setting

Automatic run-on

Convenience

Noise level: 53dB at level 1 or 340m³/h (150mm ducted) Push button controls 2 x 20W Halogen lights

Cleaning

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

418 x 700 x 282mm (ducted or recirculated)



DHL755BAU 73cm Integrated Rangehood

Power functions

650m3/h maximum extraction capacity 3 power settings + 1 intensive setting

Convenience

Noise level: 50dB at level 1 or 240m³/h (150mm ducted) Slide controls 2 x 20W Halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

255 x 730 x 380mm (ducted or recirculated)

For complete specifications see pg.66-67

For complete specifications see pg.66-67



DHL555BAU 53cm Integrated Rangehood

Power functions

650m³/h maximum extraction capacity 3 power settings + 1 intensive setting

Convenience

Noise level: 41dB at level 1 or 210m³/h (150mm ducted) Slide controls 2 x 20W Halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

255 x 530 x 380mm (ducted or recirculated)

Reference Guide Ovens.

	Features	Single ovens		
Model		HNG6764S1A	HRG6767S2A	HBG6767S1A
		Series 8	Series 8	Series 8
Dimensions	Width (cm)	60	60	60
Jilli Cilololio	Appliance dimensions (HxWxD)	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm
		585-595 x 560-568 x		585-595 x 560-568 x 550mm
	Built-in dimensions (HxWxD)	550mm	585-595 x 560-568 x 550mm	585-595 X 560-568 X 550MM
	0. 7. 1. (11.11.15)		057 400 445	057 400 445
	Cavity dimensions (HxWxD)	357 x 480 x 392mm	357 x 480 x 415mm	357 x 480 x 415mm
Unation Fountions	North and Electrical Eventions	17	17	10
Heating Functions	Number of heating functions		17	13
	4D Hot Air	•	•	•
	Hot Air Eco	•	•	•
	Hot Air			
	3D Hot Air Plus			
		•	_	_
	Conventional top/bottom heat		•	•
	Conventional top/bottom heat ECO	•	•	•
	Circulating Air			
	Hot air grilling/circulated air grilling	•	•	•
		•		
	Grill large area	-	•	
	Grill small area	•	•	•
	Pizza setting	•	•	•
	Bottom heat	•	•	•
	Intensive heat	•	•	
		•		•
	Slow cooking		•	•
	Drying/Desiccation	•	•	
	Plate warming	•	•	•
	Keep warm	•	•	•
	Defrost		•	•
				•
Added Steam	Reheating	•	•	
	Dough proving	•	•	
Microwave	Microwave	900wt		
Sensor & Automatic	DishAssist - automatic oven settings	•	•	•
Functions		•		
	PerfectBake™ sensor		•	•
	PerfectRoast meat probe	•	•	•
	AutoPilot (automatic programs)			
	Rapid heat up	•	•	•
	Sabbath setting	•	•	•
• "				
Capacity	Volume (cavity litres)	67 litres	71 litres	71 litres
	1 litre water tank	•	•	
Design		Stainless steel & black	Stainless steel & black	Stainless steel & black
		glass with straight bar handle	glass with straight bar handle	glass with straight bar handle
	Cavity	Enamel anthracite	Enamel anthracite	Enamel anthracite
	Display	TFT Touch Graphic Display	TFT Touch Graphic Display	TFT Touch Graphic Display
	Controls	Bosch Control Ring with	Bosch Control Ring with	Bosch Control Ring with
		TFT Display	TFT Display	TFT Display
	Electronic touch-control clock/timer with LED display	•	•	•
	and end-time programming		•	•
		•	•	•
	SoftOpen & SoftClose door			
	Interior lighting	3 x LED	3 x LED	1 x Halogen
	No. of shelf positions	5	5	5
	Removable door	•	•	•
Cleaning	Pyrolytic	•	•	•
			-	-
	EcoClean Direct			
	EcoClean liners			
	Catalytic liners			
	Descaling programs	•	•	
Safety	Door - no. glass panes	Quadruple glazed	Quadruple glazed	Quadruple glazed
Juicty			· -	
	Automatic safety switch-off	•	•	•
	Cooling fan	•	•	•
	Residual heat indicator	•	•	•
	Child lock function	•	•	•
[oohnigs]		300°C		
Technical	Maximum temperature		300°C	300°C
equirements	Total connected load	3.65kw	3.45kw	3.65kw
	Power requirements	220-240 / 50-60Hz	220-240 / 50-60Hz	220-240 / 50-60Hz
Supplied accessories	Telescopic railing	1 x standard extension -	2 x fully extendable -	2 x fully extendable -
- applica accessories	- Sississiple running	pyrolytic compatible	pyrolytic compatible	pyrolytic compatible
	Wire racks	2		
	Wire racks	2	2	2
	Split grill trays			
	Universal trays	1 x pyrolytic compatible	1 x pyrolytic compatible	1 x pyrolytic compatible
	Baking trays	1 x pyrolytic compatible	1 x pyrolytic compatible	1 x pyrolytic compatible
		Syrolytic compatible		
	PerfectRoast - multi-point temperature probe	•	•	•
Optional accessories	r or root roads marit point temporature prope	Refer to page 69	Refer to page 69	Refer to page 69

	UDOCZECCIA	UDOCZCZCZ	UDOCEETICAL	UDOCEE	IIDOCOCDO I	LINVA E 44 NOO	Double oven
	HBG6753S1A	HBG672BS1A	HBG655HS1A	HBG655HW1A	HBG633BS1A	HVA541NS0	HBM43S550A
	Series 8	Series 8	Series 8	Series 8	Series 8	Series 6	Series 6
	60	60	60	60	60	90	60
	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	478 x 896 x 568mm	888 x 595 x 550mm
	585-595 x 560-568 x	585-595 x 560-568 x	585-595 x 560-568 x	585-595 x 560-568 x	585-595 x 560-568 x	467-470 x 860-864 x	872-886 x 560-570 x
	550mm	550mm	550mm	550mm	550mm	560mm	550mm
	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	308 x 615 x 405mm	172 x 468 x 433mm (top
	007 X 400 X 410111111	007 X 400 X 41311111	007 X 400 X 410111111	007 X 400 X 410111111	007 X 400 X 41311111	000 X 010 X 400Hilli	392 x 482 x 418mm (bottom)
	13	8	13	13	10	9	3 (top) & 5 (bottom)
	•	•	•	•	•		
	•	•	•	•	•	•	
						•	
							● (bottom)
	•	•	•	•	•	•	• (top & bottom)
	•	•	•	•	•		
	<u>~</u>					•	
							• (In a the sea)
		•	•	•	•	•	• (bottom)
	•	•	•	•	•	•	• (top & bottom)
	•		•	•	•	•	● (top)
	•	•	•	•	•	•	
	•		•	•	•	•	• (bottom)
	•		•	•			
	•		•	•			
	•		-	-			
	•		•	•			
	•	•	•	•	•		
_							
	10	10	10	10			
	•	•	•	•	•		•
	•	•	•	•	•		
	71 litres	71 litres	71 litres	71 litres	71 litres	77 litres	35 litres (top) & 67 litres
							(bottom)
	Stainless steel &	Stainless steel &	Stainless steel &	White & straight	Stainless steel &	Stainless steel &	Stainless steel
	black glass with	black glass with	black glass with	bar handle	black glass with	black glass with	straight bar handle
	straight bar handle	straight bar handle	straight bar handle		straight bar handle	straight bar handle	Ü
	Enamel anthracite	Enamel anthracite	Enamel anthracite	Enamel anthracite	Enamel anthracite	Enamel	Grey Enamel
	TFT Touch Symbol	TFT Touch Symbol	TFT Touch Symbol	TFT Touch Symbol	TFT Touch Symbol	Electronic clock / timer	
	Display	Display	Display	Display	Display		
	Bosch Control Ring with	Bosch Control Ring with	Bosch Control Ring with	Bosch Control Ring with	Bosch Control Ring with	Retractable rotary	Retractable rotary
	TFT Display	TFT Display	TFT Display	TFT Display	TFT Display	control knobs	control knobs
	•	•	•	•	•	•	•
	•	•	•	•	•		
	1 x Halogen	1 x Halogen	1 x Halogen	1 x Halogen	1 x Halogen	2 x Halogen	2 x Lamps -
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1 X Halogell	1 X Halogen	1 X Halogett	1 X Halogell	2 X Halogen	Standard bulbs
	5	5	5	5	5	4	2 (top) & 5 (bottom)
	•	•	•	•	•	•	• (top) & 3 (bottom)
_			-	-	-	-	•
	•	•					
			Ceiling, sides, & rear wall	Ceiling, sides, & rear wall	Rear wall		
							Ceiling, sides, & rear wa
						Sides & rear wall	
	Quadruple glazed	Quadruple glazed	Triple glazed	Triple glazed	Triple glazed	Triple glazed	Triple glazed
	•	•	•	•	•	F - 0	1 . 0
	•	•	•	•	•	•	•
						-	•
	•	•	•	•	•		
	•	•	•	•	•		•
	300°C	300°C	300°C	300°C	300°C	250°C	275°C
	3.65kw	3.65kw	3.65kw	3.65kw	3.65kw	3.00kw	5.50kw
	220-240 / 50-60Hz	220-240 / 50-60Hz	220-240 / 50-60Hz	220-240 / 50-60Hz	220-240 / 50-60Hz	220-240 / 50-60Hz	240 / 50-60Hz
	2 x fully extendable -	·	2 x fully extendable	2 x fully extendable		1 x standard extension	
	pyrolytic compatible		_ x rang saterioable	_ x rang oxterioable		_ // 0.00.100101011	
	2	2	2	2	2	1	3
		_	-	_	_	-	2
				4	1		
	duranta'	4					2
	1 x pyrolytic compatible	1 x pyrolytic compatible	1	1			
	1 x pyrolytic compatible 1 x pyrolytic compatible	1 x pyrolytic compatible 1 x pyrolytic compatible	1	1	1	2	1
						2	

Reference Guide Freestanding Ovens.

Oven Features

Product overview	Features	Freestanding Ovens			
Model		HSB738357A	HGD74W455A	HCA858450A	HCA854450A
		Series 6	Series 4	Series 6	Series 6
Туре		Electric	Electric	Electric	Electric
Dimensions	Width (cm)	90	60	60	60
	Appliance dimensions (HxWxD)	900 x 898 x 600mm	900 x 600 x 600mm	900 x 600 x 600mm	900 x 600 x 600mm
	Cavity dimensions (HxWxD)	371 x 724 x 417mm	329 x 482 x 420mm	329 x 479 x 420mm	329 x 479 x 420mm
Oven specifications					
Heating Functions	Number of heating functions	8	8	10	10
	3D HotAir Plus				
	3D HotAir			•	•
	Hot Air	•	•		
	HotAir Eco	•		•	•
	Top/bottom heating	•	•	•	•
	Top/bottom heating & hot air	•			
	Bottom heating	•	•	•	•
	Fan assisted top/bottom heating				
	Hot Air Grilling	•	•	•	•
	Rotary Spit	•			
	Full surface grill	•	•	•	•
	Half surface grill		•	•	•
	Pizza setting		•	•	•
	Keep warm			•	•
	Defrost	•	•	•	•
Automatic	AutoPilot (automatic programs)			40	40
Functions	Memory function			•	•
	Sabbath setting			•	•
	Rapid heat up		•	•	•
Capacity	Volume (usable litres)	112 litres	67 litres	67 litres	67 litres
Design		Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with meta bar handle
	Cavity	Enamel	Enamel	Enamel	Enamel
	Display	Electronic clock/timer	Electronic clock/timer	Electronic LED display	Electronic LED display
	Controls	Rotary control knobs	Rotary control knobs	Retractable rotary control knobs	Retractable rotary contr
	Electronic touch-control clock/timer with LED display and end-time programming	•	•	•	•
	SoftClose door		•	•	•
	Interior light	2 x 40wt	1 x 40wt	1 x 40wt	1 x 40wt
	No. of shelf positions	4	5	5	5
	Removable door	•	•	•	•
	Height adjustable	• (by 50mm)	• (by 15mm)	• (by 15mm)	• (by 15mm)
	Other	Storage compartment	Storage compartment	Storage compartment	Storage compartment
Cleaning	Pyrolytic cleaning function	Storage compartment	Storage compartment	Storage compartment	Storage compartment
Jeaning	EcoClean liners			•	•
		Cides 0 manuall	0-111-1 0		
	Catalytic liners	Sides & rear wall	Ceiling, sides & rear wall	Overdende de ed	Our development
afety	Door - no. glass panes	Triple glazed	Triple glazed	Quadruple glazed	Quadruple glazed
	Automatic safety switch-off			•	•
	Child lock function	•	•	•	•
	Cooling fan	•	•	•	•
supplied accessories	Telescopic railing	1 x standard extension			
,,	Wire racks	1	2	2	2
	Split grill trays	-	1	1 x pyrolytic compatible	1 x pyrolytic compatible
	Universal trays		1	1 x pyrolytic compatible	1 x pyrolytic compatible
	omiroradi daya		*	T v byrother combatible	1 x pyrolytic compatible
	Baking trays	1	1	1 x pyrolytic compatible	1 x pyrolytic compatible

Reference Guide Freestanding Ovens.

Cooktop Features

Product overview	Features	Freestanding Cooktop			
Model		HSB738357A	HGD74W455A	HCA858450A	HCA854450A
		Series 6	Series 4	Series 6	Series 6
Туре		Gas	Gas	Induction	Ceramic
Cooktop specification	s				
Burner / Zone Output (Size)		6 burners including:	4 burners including:	4 induction zones including:	4 cooking zones including
	Front left	Triple flame wok burner - 14.4Mj/h	Wok burner - 13Mj/h	Standard zone: 1.8Kw (180mm)	Standard zone: 1.8kW (180mm)
	Rear left	Standard burner - 7.0Mj/h	Standard burner - 6Mj/h	Standard zone: 1.8kW (180mm)	Extendable zone: 1.6 and 2.4kW (170-260mm)
	Front centre	High-speed burner - 11.8Mj/h			
	Rear centre	Economy burner - 4.0Mj/h			
	Front right	Economy burner - 4.0Mj/h	Economy burner - 3.6Mj/h	Standard zone: 2.2kW (220mm)	Extendable zone: 0.75 and 2.2kW (120-210mm)
	Rear right	Standard burner - 7.0Mj/h	Standard burner - 6Mj/h	Standard zone: 1.4kW (145mm)	Standard zone: 1.2kW (145mm)
Performance	17-stage power setting			•	
	PowerBoost			•	
	CombiZone			•	
	MoveMode (2 levels)			•	
Cooktop Design		Stainless steel gas cooktop	Stainless steel gas cooktop	Ceramic glass induction cooktop	Ceramic glass cooktop
	3-pc cast-iron trivets with rubber feet	•			
	2-pc cast-iron trivets with rubber feet		•		
	Enamelled burner caps	•	•		
Cooktop Controls	Electronic -/+ touch-controls & timer for each zone			•	
	One-hand electronic ignition (via control knob)	•	•		
Cooktop Safety	Flame failure fitted to each burner	•	•		
	2-stage residual heat indicators				
	4-stage residual heat indicators			•	•
	Wipe Protection			•	
	Child lock			•	
	Automatic safety switch off			•	
Supplied accessories	LPG conversion kit	•	•		
	Wok ring support	1	1		
	Cross support for Espresso	1			
Optional accessories				Refer to page 70	Refer to page 70
Technical	Maximum temperature (oven)	260°C	300°C	300°C	300°C
requirements	Total connected load	3.2kW total connected load 48.2Mj/h total gas connected load	3.2kW total connected load 28.6Mj/h total gas connected load	10.9kW total connected load	11.3kW total connected load
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Other	Suitable for NG and LPG	Suitable for NG and LPG		

Reference Guide Compact Appliances.

Product overview	Features	Combination Steam	Oven	Combination Microw	/ave		Microwave with G
Model		CSG656RS1A	CSG656BS1B	CMG656RS1A	CMG676BS1A	CMG633BS1B	BEL634GS1A
		Series 8	Series 8	Series 8	Series 8	Series 8	Series 8
Dimensions	Width (cm)	60	60	60	60	60	60
	Appliance dimensions (HxWxD)	455 x 595 x 548mm	455 x 595 x 548mm	455 x 595 x 548mm	455 x 595 x 548mm	455 x 595 x 548mm	382 x 594 x 318mm
		450-455 x 560-568 x	450-455 x 560-568 x	450-455 x 560-568 x	450-455 x 560-568 x	450-455 x 560-568 x	362-382 x 560-568
	Built-in dimensions (HxWxD)	550mm	550mm	550mm	550mm	550mm	300mm
	Cavity dimensions (HxWxD)	235 x 480 x 415mm	235 x 480 x 415mm	237 x 480 x 392mm	237 x 480 x 392mm	237 x 480 x 392mm	220 x 350 x 270mm
leating Functions	Number of heating functions	18	16	14	12	8	2
	4D Hot Air	•	•	•	•	•	2
	Hot Air Eco	•	•	•	•	•	
	Conventional top/bottom heat	•	•	•	•		
	Conventional top/bottom heat ECO	•	•	•	•		
	Hot air grilling	•	•	•	•	•	
	Grill - large area	•	•	•	•	•	
	Grill - small area	•	•	•	•	•	
	Pizza setting	•	•	•	•		
	Bottom heat	•	•	•	•		
		•	•		•		
	Intensive heat	•					
	Slow cooking	•	•	•	•		
	Drying/Desiccation	•					
	Plate warming	•	•	•	•		
	Keep warm	•	•	•	•	•	
Added Steam	Steaming	•	•				
	Reheating	•	•				
		•	•				
	Dough proving	•	-				
	Defrost	•	•				
/licrowave	Microwave			1000wt		1000wt	900wt
	Combi microwave variable			•		•	
	Variable quartz grill						•
ensor & Automatic	DishAssist - automatic oven	•		•	_		
unctions	settings	•	•	•	•		
	PerfectBake™ sensor	•		•			
	PerfectRoast meat probe	•		•			
	AutoPilot (automatic programs)					13	10
	Rapid heat up	•	•	•	•	•	10
				_			
	Sabbath setting	•	•	•	•		
Capacity	Volume (usable litres)	47	47	45	45	45	21
	1 litre water tank	•	•				
Design		Stainless steel & black glass with straight bar handle	Stainless steel & black glass with straight bar handle	Stainless steel & black glass with straight bar handle	Stainless steel & black glass with straight bar handle	Stainless steel & black glass with straight bar handle	Stainless steel & bla glass with left hand side opening door
	Cavity	Enamel anthracite	Enamel anthracite	Enamel anthracite	Enamel anthracite	Enamel anthracite	Stainless steel
		TFT Touch Graphic	TFT Touch Graphic	TFT Touch Graphic	TFT Touch Graphic	TFT Touch Symbol	TFT Touch Symbol
	Display	Display	Display	Display	Display	Display	Display
	Controls	Bosch Control Ring	Bosch Control Ring	Bosch Control Ring	Bosch Control Ring	Bosch Control Ring	Bosch Control Ring
		with TET Display	with TFT Display	with TFT Display	with TFT Display	with TFT Display	with TFT Display
	001111010	with TFT Display	With IFT Display		With II I Display		
	Electronic touch-control clock/ timer with LED display and end-	• With TPT Display	• With TFT Display	•	•	•	•
	Electronic touch-control clock/ timer with LED display and end- time programming	•	•	•	•	•	•
	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door	•	•	1.150	•	1,4150	
	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting	• 1xLED	• 1xLED	1 x LED	• 1xLED	1 x LED	1xLED
	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions	• 1xLED 3	1xLED	-	•	-	
	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting	1xLED 3	1xLED 3	1 x LED	• 1xLED	1 x LED	
Cleaning	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions	• 1xLED 3 • Ceiling, sides &	1xLED 3 Ceiling, sides &	1 x LED 3 Ceiling, sides &	• 1xLED	1 x LED	
Cleaning	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct	1xLED 3	1xLED 3	1 x LED	1xLED	1 x LED	
Cleaning	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door	• 1xLED 3 • Ceiling, sides &	1xLED 3 Ceiling, sides &	1 x LED 3 Ceiling, sides &	• 1xLED	1 x LED	
Cleaning	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct	• 1xLED 3 • Ceiling, sides &	1xLED 3 Ceiling, sides &	1 x LED 3 Ceiling, sides &	1xLED	1 x LED	
Cleaning	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic	• 1 x LED 3 • Ceiling, sides & rear wall	1xLED 3 Ceiling, sides & rear wall	1 x LED 3 Ceiling, sides &	1xLED	1 x LED	
	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program	• 1 x LED 3 • Ceiling, sides & rear wall	1xLED 3 Ceiling, sides & rear wall	1 x LED 3 Ceiling, sides &	1xLED	1xLED 3	
	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes	• 1 x LED 3 • Ceiling, sides & rear wall	1xLED 3 Ceiling, sides & rear wall Triple glazed	1 x LED 3 Ceiling, sides & rear wall	1 x LED 3	1xLED 3	1xLED
	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed	1 x LED 3 Ceiling, sides & rear wall Triple glazed	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed	1 x LED 3 Quadruple glazed	1 x LED 3 Triple glazed	1xLED
	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed	1 x LED 3 Ceiling, sides & rear wall Triple glazed	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed	1 x LED 3 Quadruple glazed	1 x LED 3 Triple glazed	1xLED
Safety	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function	• 1 x LED 3 • Ceilling, sides & rear wall • Triple glazed • •	1 x LED 3 Ceiling, sides & rear wall Triple glazed	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed	1 x LED 3 Quadruple glazed	1 x LED 3 Triple glazed	1xLED
afety	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • • • 250°C	1 x LED 3 Ceiling, sides & rear wall Triple glazed 250°C	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed	1 x LED 3 Quadruple glazed Quadruple glazed 300°C	1 x LED 3 Triple glazed 275°C	1 x LED Double glazed
afety	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load	• 1 x LED 3 • Ceilling, sides & rear wall • Triple glazed • • • • 250°C 3.3kW	1 x LED 3 Ceiling, sides & rear wall Triple glazed 250°C 3.3kW	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed Guadruple glazed Guadruple glazed Guadruple glazed	1 x LED 3 Quadruple glazed Quadruple glazed 300°C 3.65kW	1 x LED 3 Triple glazed 275°C 3.65kW	1 x LED Double glazed 1.99kW
echnical equirements	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • • • 250°C	1 x LED 3 Ceiling, sides & rear wall Triple glazed 250°C	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed	1 x LED 3 Quadruple glazed Quadruple glazed 300°C	1 x LED 3 Triple glazed 275°C	1 x LED Double glazed 1.99kW
afety echnical equirements upplied	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • • 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Triple glazed 250°C 3.3kW	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard	1 x LED 3 Quadruple glazed Quadruple glazed 300°C 3.65kW	1 x LED 3 Triple glazed 275°C 3.65kW	1 x LED Double glazed 1.99kW
echnical equirements	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic railling	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • • 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable	1 x LED 3 Ceiling, sides & rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension	• 1 x LED 3 • Quadruple glazed • 300°C 3.65kW 220-240V / 50-60Hz	1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60H
afety echnical equirements	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • • 250°C 3.3kW 220-240V / 50-60Hz	Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	• 1 x LED 3 • Quadruple glazed • 300°C 3.65kW 220-240V / 50-60Hz	1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	1 x LED Double glazed 1.99kW
afety echnical equirements	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic railling	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • • 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable	1 x LED 3 Ceiling, sides & rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension	• 1 x LED 3 • Quadruple glazed • 300°C 3.65kW 220-240V / 50-60Hz	1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	1 x LED Double glazed 1.99kW 220-240V / 50-60H
afety echnical equirements upplied	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic railing Wire racks	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • • 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable 2	Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	• 1 x LED 3 • Quadruple glazed • 300°C 3.65kW 220-240V / 50-60Hz	1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	1 x LED Double glazed 1.99kW 220-240V / 50-60H
afety echnical equirements	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic railing Wire racks Universal trays Baking trays	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • • 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable 2	Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	• 1 x LED 3 • Quadruple glazed • 300°C 3.65kW 220-240V / 50-60Hz	1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	1 x LED Double glazed 1.99kW 220-240V / 50-60H
afety echnical equirements	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic railing Wire racks Universal trays Baking trays Glass pan	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable 2	1x LED 3 Ceiling, sides & rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	• 1 x LED 3 • Quadruple glazed • 300°C 3.65kW 220-240V / 50-60Hz	1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	1 x LED Double glazed 1.99kW 220-240V / 50-60H
echnical equirements	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic railing Wire racks Universal trays Baking trays Glass pan Steam container, punched size S	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • 250°C 3.3kW 220-240V/50-60Hz 1 x fully extendable 2	1x LED 3 Ceiling, sides & rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	• 1 x LED 3 • Quadruple glazed • 300°C 3.65kW 220-240V / 50-60Hz	1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	1 x LED Double glazed 1.99kW 220-240V / 50-60H
echnical equirements	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic railing Wire racks Universal trays Baking trays Glass pan Steam container, punched size S Steam container, punched size XL	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable 2 1	1x LED 3 Ceiling, sides & rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	• 1 x LED 3 • Quadruple glazed • 300°C 3.65kW 220-240V / 50-60Hz	1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	1 x LED Double glazed 1.99kW 220-240V / 50-60H
Cleaning Safety Fechnical equirements Supplied accessories	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic railing Wire racks Universal trays Baking trays Glass pan Steam container, punched size S Steam container, unpunched size S	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable 2 1	1x LED 3 Ceiling, sides & rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	• 1 x LED 3 • Quadruple glazed • 300°C 3.65kW 220-240V / 50-60Hz	1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	1 x LED Double glazed 1.99kW 220-240V / 50-60H
Safety Technical requirements Supplied	Electronic touch-control clock/ timer with LED display and end- time programming SoftOpen & SoftClose door Interior lighting No. of shelf positions Removable door EcoClean Direct Pyrolytic Descaling program Drying Door – no. glass panes Automatic safety switch-off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic railing Wire racks Universal trays Baking trays Glass pan Steam container, punched size S Steam container, punched size XL	• 1 x LED 3 • Ceiling, sides & rear wall • Triple glazed • • 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable 2 1	1x LED 3 Ceiling, sides & rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	1 x LED 3 Ceiling, sides & rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	• 1 x LED 3 • Quadruple glazed • 300°C 3.65kW 220-240V / 50-60Hz	1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	1 x LED Double glazed 1.99kW 220-240V / 50-60H

Reference Guide Coffee machine.

Coffee Machine CTL636ES1 Series 8 **Dimensions** Appliance dimensions (HxWxD) 455 x 594 x 375mm Built-in dimensions (HxWxD) 449 x 558 x 354mm Design Stainless steel & black glass Display TFT Touch Graphic Display Bosch Control Ring with TFT Display Controls Convenience SensoFlow system: constant brewing temperature AromaPro concept: optimnal aroma extraction Intelligent AutoValve system switches automatically between steam and hot water SilentCeram drive ceramic grinding unit Coffee outlet height-adjustable up to 15cm (max) Flexible milk solution: decide for yourself if you prefer connecting the yes milk container or using any other container Bean container with aroma protection lid for up to 1kg Water pump with 19 bar pressure One touch function for Ristretto, Espresso, Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caffe Latte at the touch of a button 6 Personalised beverages: save favourite beverages with individual names and adjustable mixing ratio of milk and espress Fully programmable functions including grinding grade, cup size, strength and temperature Milk froth, warm milk and hot water separately available Early warning of bean container and water tank close to empty Bean container and water tank empty Removable brewing unit and 2.4L water tank Cleaning Fully automatic-descaling and cleaning program Fully automatic rinse cycle when switched on and off Hygienic single portion cleaning function Steam blast: fully-automatic steam cleaning of the milk system after every beverage Removable milk nozzle for easy cleaning (dishwasher safe) Display of remaining cups before cleaning or descaling **Safety Technical** Child-proof lock Technical Total connected load 1600w requirements Power requirements 220-240V / 50-60Hz 1 water filter cartridge Supplied accessories 1 measuring spoon 1 milk container and hose 1 set assembly screws

Reference Guide Warming drawers.

Product overview	Features	Warming Drawers	
Model		BID630NS1A	BIC630NS1A
		Series 8	Series 8
Dimensions	Appliance dimensions (HxWxD)	290 x 595 x 548mm	141 x 595 x 548mm
	Built-in dimensions (HxWxD)	290 x 560-568 x 550mm	140 x 560-568 x 550mm
	Cavity dimensions (HxWxD)	242 x 468 x 458mm	92 x 468 x 458mm
Suitable for	Slow cooking	•	•
	Proving yeast dough	•	•
	Defrosting	•	•
	Keeping food warm	•	•
	Pre-warming cups, plates and ovenware	•	•
Temperature range	from approx. 40 – 80°C	•	•
Design		Stainless steel & black glass	Stainless steel & black glass
	Volume (cavity litres)	52 litres	20 litres
	Electronic rotary temperature control	•	•
	Inner compartment ceramic glass base element	•	•
Technical	Max weight load	25kg	25kg
requirements	Total connected load	0.81kW	0.81kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz

Reference Guide Electric Cooktops.

Product overview	Features	FlexInduction				
Model		PXX975DC1E	PXY875DE1E	PXE875DC1E	PXY675DC1E	
		Series 8	Series 8	Series 8	Series 8	
Dimensions	Width (cm)	90	80	80	60	
	Appliance dimensions (WxD)	916 x 527mm	816 x 527mm	816 x 527mm	606 x 527mm	
	Cut-out dimensions (WxD)	880 x 490-500mm	750-780 x 490-500mm	750-780 x 4 90-500mm	560 x 490-500mm	
Design		Black ceramic glass, stainless steel side profiles with bevelled front				
Burner /		5 zones including:	4 zones including:	4 zones including:	4 zones including:	
Zone Output (Size)	Full FlexZone	3.3kW / 3.7kW (x2)	3.3kW / 3.7kW (x2)	3.3kW / 3.7kW	3.3kW / 3.7kW (x2)	
	Middle FlexZone	2.2kW / 3.7kW	2.2kW / 3.7kW	2.2kW / 3.7kW	2.2kW / 3.7kW	
	Lower/Upper FlexZones	2.2kW / 3.7kW	2.2kW / 3.7kW	2.2kW / 3.7kW	2.2kW / 3.7kW	
	Small FlexZone (90cm)	2.6kW / 3.7kW				
	Upper Flex & Extended zones		2.6kW / 3.7kW		2.6kW / 3.7kW	
	Mid/Upper & Extended zones		3.3kW / 3.7kW		3.3kW / 3.7kW	
	Rear left zone					
	Rear right zone			2.6kW / 3.7kW		
	Front left zone					
	Front right zone			1.4kW / 2.2kW		
Performance	Power setting	17 stage	17 stage	17 stage	17 stage	
	PowerBoost	•	•	•	•	
	FlexZone	•	•	•	•	
Sensor Functions	PerfectCook sensor		•			
	PerfectFry sensor	•	•	•	•	
	MoveMode (3 levels)	•	•	•	•	
	Automatic setting transfer		•		•	
Convenience	WipeProtection	•	•	•	•	
	Spill protection					
	QuickStart	•	•	•	•	
	ReStart	•	•	•	•	
	Energy consumption display	•	•	•	•	
	Timer with automatic switch-off	•	•	•	•	
	Automatic pot detection		•	•	•	
	Automatic boil start				•	
Safety	Child lock	•	•	•	•	
	Residual heat inducator	•	•	•	•	
Controls	DirectSelect Premium	•	•	•	•	_
	DirectSelect				•	
	Rotary control knobs					
Technical	Total connected load	11.1kW	7.4kW	7.4kW	7.4kW	
requirements						
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	
	Min. thickness of workshop	20mm	20mm	20mm	20mm	
0 11 1	Min. thickness of worktopover Bosch oven	30mm	30mm	30mm	30mm	
Optional accessories		Refer to page 70				

				Induction		Ceramic	
	PXX675FC1E	PXE651FC1E	PXX375FB1E	PIE675DC1E	PIE631FB1E	PKN675DB1A	PKE645C17A
	Series 8	Series 8	Series 6	Series 6	Series 6	Series 8	Series 4
	60	60	30	60	60	60	60
	606 x 527mm	606 x 527mm	306 x 527mm	592 x 522mm	606 x 527mm	606 x 527mm	583 x 513mm
	560 x 490-500mm	560 x 490-500mm	270 x 490-500mm	560 x 490-500mm	560 x 490-500mm	560 x 500mm	560 x 490-500mm
	Black ceramic glass, stainless steel side profiles with bevelled front	Black ceramic glass, stainless steel side profiles with bevelled front	Black ceramic glass, stainless steel side profiles with bevelled front	Black ceramic glass, stainless steel side profiles with bevelled front	Black ceramic glass, Frameless profile with bevelled front and sides	Black ceramic glass, stainless steel side profiles with bevelled ceramic front	Black ceramic glass stainless steel fram
	4 zones including:	4 zones including:	2 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:
	3.3kW / 3.7kW (x2)	3.3kW / 3.7kW	3.3kW / 3.7kW				
	2.2kW / 3.7kW	2.2kW / 3.7kW	2.2kW / 3.7kW				
	2.2kW / 3.7kW	2.2kW / 3.7kW	2.2kW / 3.7kW				
				1.8kW / 3.1kW	1.8kW / 3.1kW	1.8kW / 2.6kW	2.2kW
		1.4kW / 2.2kW		1.4kW / 2.2kW	1.4kW / 2.2kW	1.2kW	1.2kW
				1.8kW / 3.1kW	1.8kW / 3.1kW	2kW	1.2kW
		2.2kW / 3.7kW		2.2kW / 3.7kW	2.2kW / 3.7kW	1kW / 2.2kW	2kW
-	17 stage	17 stage	17 stage	17 stage	17 stage	17 stage	9 stage
	• stage	•	• stage	•	● 17 Stage	17 Stage	J Stage
	•	•	•	•	_		
_	•	•	•				
	•	•		•			
	•			•			
_							
	•	•	•	•	•	•	
	•	•	•	•	•		
	•	•	•	•	•	•	
	•	•	•	•	•	•	
	•		•	•	•	•	
	•	•	•	•	•		
						•	
	•	•	•	•	•	•	•
	•	•	•	•		•	•
				•		•	
	•	•	•		•		
							•
	7.4kW	7.4kW	3.7kW	7.4kW	7.4kW	7.5kW	6.6kW
	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	20mm	20mm	20mm	20mm	20mm	20mm	20mm
	30mm	30mm	30mm	30mm	30mm	20mm	20mm
f	Refer to page 70	Refer to page 70	Refer to page 70	Refer to page 70			


Reference Guide Rangehoods.

Product overview	Features	Canopy				
Model		DIB091U51B	DWB091E51A	DWW098E50A	DWW097A50A	
		Series 8	Series 6	Series 6	Series 4	
Dimensions	Width (cm)	90	90	90	90	
	Appliance dimensions (HxWxD)	744-924 x 900 x 600mm (ducted) or 744-1044 x 900 x 600mm (recirculated)	628-954 x 900 x 500mm (ducted) or 628- 1064 x 900 x 500mm (recirculated)	672-954 x 900 x 500mm (ducted) or 672-1064 x 900 x 500mm (recirculated)	672-954 x 900 x 500mm (ducted) or 672-1064 x 900 x 500mm (recirculated)	
Design	Style	Island canopy	Slimline canopy	Slimline canopy	Slimline canopy	
	Finish	Stainless steel	Stainless steel	Stainless steel	Stainless steel	
	7 segment LED display	•	•	•		
	On/Off main switch control	•	•	•	•	
	Electronic controls with low lift push buttons	•	•	•		
	Electronic backlit low lift push button controls				•	
	Push button controls					
	Slide controls					
	Rocker switches					
	Concealed controls					
	Lighting	4 x 3W LED SoftLights with dimmer function	3 X 3W LED SoftLights with dimmer function	3 x 3W LED SoftLights with dimmer function	3 x 3W LED	
	Maximum extraction rate	1000m³/h	810m³/h	860m³/h	770m³/h	
	3 power levels	•	•	•	•	
	Intensive setting (s)	2	2	2	1	
	Intensive setting with automatic switch back to previous setting 6 mins	•	•	•	•	
	Residual shutdown with automatic run-on time	•	•	•	•	
	Rim ventilation system		•			
	EcoSilence Drive brushless motor	•	•	•	•	
	Powerful twin motor					
	Powerful single motor					
Noise*		46dB at 300m³/h (150mm ducted)	44dB at 250m³/h (150mm ducted)	46dB at 300m³/h (150mm ducted)	45dB at 310m³/h (150mm ducted)	
	Sound insulation mats	•	•	•	•	
Convenience	Dishwasher-safe metal grease filter(s)	3	3	3	3	
	Saturation indicator for filters	•	•	•	•	
Technical	Total connected load	272W	269W	169W	139W	
requirements	Power requirements	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	
	Connection diameter	120mm and 150mm	120mm and 150mm	120mm and 150mm	120mm and 150mm	
Optional accessory	Active Carbon Filter	•	•		•	
	Recirculating Kit	•	•	•	•	
	CleanAir Active Carbon Filter	•	•	•	•	
	CleanAir Recirculation Kit	•	•	•	•	
Other	Ducted and recirculated air operation	•	•	•	•	
	Clean Air Recirculating	•	•	•	•	

Air extraction calculation examples to help you calculate your own requirements

Kitchen dimensions: L x W x H	Room volume	Minimum extraction rate (6 x per hour)	Maximum extraction rate (12 x per hour)
3 x 4 x 2.5m =	30m³	6 x 30m³ = 180m³/h	12 x 32m³ = 360m³/h
4 x 4 x 2.5m =	40m³	6 x 40m³ = 240m³/h	12 x 40m³ = 480m³/h
4 x 5 x 2.5m =	50m³	6 x 50m³ = 300m³/h	12 x 50m³ = 600m³/h
Calculate yourself			

			Integrated			
DWB09W850A	DWW09W651A	DWW06W650A	DHL895CAU	DHL785BAU	DHL755BAU	DHL555BAU
Series 2	Series 2	Series 2	Series 8	Series 6	Series 4	Series 4
90	90	60	86	70	73	53
642 - 954 x 900 x 500mm (ducted) or 642-1064 x 900 x 500mm (recirculated)	799-976 x 900 x 500mm (ducted or recirculated)	799-976 x 600 x 500mm (ducted or recirculated)	418 x 860 x 282mm (ducted or recirculated)	418 x 700 x 282mm (ducted or recirculated)	255 x 730 x 380mm (ducted or recirculated)	255 x 530 x 380mm (ducted or recirculated
Box canopy	Pyramid canopy	Pyramid canopy	Integrated	Intgrated	Integrated	Integrated
Stainless steel	Stainless steel	Stainless steel	Steel body with metallic finish	Steel body with metallic finish	Steel body with metallic finish	Steel body with metalli finish
•	•	•	•	•	•	•
			•	•		
2 x 20W Halogen	2 x 20W Halogen	2 x 30W Halogen	2 x 1W LED with dimmer function	2 x 20W Halogen	2 x 20W Halogen	2 x 20W Halogen
750m³/h	650m³/h	650m³/h	820m3/h	730m3/h	650m3/h	650m3/h
•	•	•				
			1	1	1	1
			•	•		
			•	•		
			•			
			•			
•	•	•			•	•
						-
52dB at 300m³/h	49dB at 270m³/h	49dB at 270m³/h	41dB @ 220m³/h	53dB at 340m³/h	50dB at 240m³/h	41dB at 210m³/h
(150mm ducted)	(150mm ducted)	(150mm ducted)	(150mm ducted)	(150mm ducted)	(150mm ducted)	(150mm ducted)
3	3	2	2	2	2	2
	•	•	•	•		
290W	215W	235W	272W	315W	240W	240W
220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz
150mm	150mm	150mm	150mm	120mm and 150mm	120mm and 150mm	120mm and 150mm
•	•	•	•	•	•	•
•	•	•	•	•		
•						
•						
•	•	•	•		•	•
•						

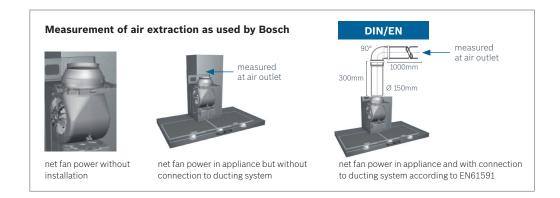

Reference Guide Gas Cooktops.

Product overview	Features					
Model		PCR915B91A	PCT915B9TA	PCI815B91A	PCQ715B90A	PCH615B9TA
		Series 6	Series 6	Series 6	Series 6	Series 6
Dimensions	Width (cm)	90	90	76	70	60
	Appliance dimensions (WxD)	915 x 520mm	915 x 520mm	762 x 520mm	702 x 520mm	582 x 520mm
	Cut-out dimensions (WxD)	850 x 490-500mm	850 x 490-500mm	560 x 480-490mm	560 x 480-490mm	560 x 480-490mm
Design		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Burner / Zone		5 burners including:	6 burners including:	4 burners including:	5 burners including:	4 burners including:
Output	Front left	High-speed burner: 10.8Mj/h	Dual flame wok burner: 18Mj/h	Triple flame wok burner: 14.4Mj/h	Economy burner: 3.6Mj/h	Dual flame wok burner: 18Mj/h
	Rear left	Economy burner: 3.6Mj/h	Economy burner: 3.6Mj/h		Standard burner: 6.1Mj/h	Standard burner: 6.1Mj/h
	Front centre	Dual flame wok burner: 18Mj/h	Economy burner: 3.6Mj/h	Economy burner: 3.6Mj/h	Triple flame wok burner: 14.4Mj/h	
	Rear centre		Standard burner: 6.1Mj/h	Standard burner: 6.1Mj/h		
	Front right	Standard burner: 6.1Mj/h	Dual flame wok burner: 18Mj/h	High speed burner: 10.8Mj/h	Standard burner: 6.1Mj/h	Economy burner: 3.6Mj/h
	Rear right	Standard burner: 6.1Mj/h	Standard burner: 6.1Mj/h		High-speed burner: 10.8Mj/h	High-speed burner: 10.8Mj/h
Convenience	Cast-iron trivets with rubber feet					
	3-pc cast-iron trivets with rubber feet	•	•			
	2-pc cast-iron trivets with rubber feet			•	•	•
	Enamelled cast-iron burner caps	•	•	•	•	•
	Enamelled steel pan supports					
	One-hand electronic ignition	•	•	•	•	
Safety Controls	Flame failure fitted to each burner	•	•	•	•	•
	Rotary controls - black & stainless steel	•	•	•	•	•
Technical		44.6Mj/h	55.4Mj/h	34.9Mj/h	41Mj/h	38.5Mj/h
requirements	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Min. thickness of worktop	30mm	30mm	30mm	30mm	30mm
Supplied accessories	Wok ring support	1	1	1	1	1
	Espresso cross support	1	1			
	LPG conversion kit	•	•	•	•	•
Other	Suitable for NG or LPG	•	•	•	•	•

Accessories.

Oven Accessories			 Glass pan.	HEZ636000
Over Accessories	Wire rack insert. Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens	HEZ324000	Fits all Series 8 60cm ovens & 45cm combination microwave ovens	HE2030000
			Glass roasting dish, 5.1L. Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens	HEZ915001
	Pizza pan. Split grill tray, enameled -	HEZ625071		
			1 level telescopic rail, full extendable - Pyro proof. Fits all Series 8 60cm built-in ovens - excluding HNG6764S1A	HEZ638170
	Pryo proof. Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens Baking tray - Pyro proof. Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens	HEZ631070	2 level telescopic rail,	HEZ638270
			full extendable - Pyro proof. Fits all Series 8 60cm built-in ovens - excluding HNG6764S1A	
			3 level telescopic rail, full extendable - Pyro proof.	HEZ638370
	Multipurpose pan - Pryo proof. Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens	HEZ632070	Fits all Series 8 60cm built-in ovens - excluding HNG6764S1A	
			1 level telescopic rail, full extendable.	HEZ638D18
	Lid for professional pan. Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens	HEZ633001	Fits CSG656BS1B	
			Porcelain container - small (steam) Fits CSG656BS1B & CSG656RS1A	HEZ36D153P
	Professional pan - Pyro proof. Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens Wire rack (standard).	HEZ633073		
			Porcelain container - large (steam). Fits CSG656BS1B & CSG656RS1A	HEZ36D353P
	Fits HBG633BS1A, HBG655HW1A, HBG655HS1A, HBG672BS1A, HBG6753S1A, HBG6767S2A & HRG6767S1A			
	Wire rack (microwave). Fits HNG6764S1A, CMG633BS1B, CMG656RS1A & CMG676BS1A	HEZ634080		
	Wire rack (steam). Fits CSG656BS1B & CSG656RS1A	HEZ664000		

Accessories.

Cooktop Accessories			 Recirculation kit.	DHZ5345
	Stainless steel roaster with glass lid. Suitable for FlexInduction cooktops & 60cm built-in ovens	HEZ390011	Suitable for DWB091E51A, DWW098E50A & DWW097A50A	DIIZSSAS
	Steam insert. Suitable for HEZ390011 roaster	HEZ390012	Recirculation kit. Suitable for DWB09W850A	DHZ5325
	Cookware set. Suitable for Induction & Ceramic cooktops. Consists of 1 frying pan, 3 saucepans & 2 glass lids	HEZ390042	Recirculation kit. Suitable for DWW09W651A & DWW06W650A	DHZ5275
	Stainless steel wok. Suitable for Induction & Ceramic cooktops	HEZ390090	Recirculation kit.	DHZ5605
	Griddle plate cast aluminium. Suitable for FlexInduction cooktops	HEZ390522	Suitable for DHL895CAU and DHL785BAU	DH25005
	Teppanyaki - small. Suitable for FlexInduction cooktops	HEZ390511	Active carbon filter. Suitable for DIB091U51B,	DHZ5346
	Teppanyaki - large. Suitable for FlexInduction cooktops	HEZ390512	DWB091E51A, DWW098E50A & DWW097A50A	
Rangehood Accessories			Active carbon filter. Suitable for DWB09W850A	DHZ5326
nalige 1000 Accessories	CleanAir recirculation kit. Suitable for DIB091U51B	DSZ6230	Active carbon filter.	DHZ5276
	CleanAir recirculation kit. Suitable for DWB09W850A	DSZ6200	Suitable for DWW09W651A & DWW06W650A	
	Suitable for EMESON SSO,		Active carbon filter. Suitable for DHL895CAU & DHL785BAU	DHZ5316
	CleanAir recirculation kit. Suitable for DWB091E51A, DWW098E50A & DWW097A50A	DSZ6240	Charcoal filter.	DHZ7305
	CleanAir active carbon filter. Suitable for DIB091U51B, DWB091E51A, DWW098E50A,	DSZ5201	Suitable for DHL755BAU & DHL555BAU	
	DWW097A50A & DWB09W850A Recirculation kit.	DHZ5385		
	Suitable for DIB091U51B			

Quality Service.

The customer service of Bosch, before and after purchase.

Important notes

Model numbers and specifications are for reference only and subject to change without prior notice.

For additional information on products, please refer to your local Bosch retailer. Bosch is continuously seeking to improve specification, design and production of its appliances, and alterations may take place regularly.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

The electrical and water connection should only be made in accordance with the regulations of the national authorities.

For model and accessory availability,

Quality service for quality appliances

Quality of our after-sales service is just as important as the quality of our products. In the unlikely event that service is required on your appliance, our extensive network of authorised service agents throughout New Zealand will ensure you are provided with the full support to ensure your appliance is operating at optimal condition.

Warranty



All Bosch products are covered under a 2-year comprehensive parts and labour warranty.



BSH Home Appliances Ltd

Unit F2, 4 Orbit Drive Mairangi Bay Auckland 0632

> PO Box 33-1033 Takapuna Auckland 0740


Phone: (09) 477 0492 Fax: (09) 477 2647

Customer Service

Phone: 0800 807 723 Fax: 0800 256 535

Email: bshnz-cs@bshg.com

www.bosch-home.co.nz



This document is printed on an environmentally responsible paper, produced using Elemental Chlorine Free (ECF), FSC Certified Mixed Source pulp sourced from Well Managed & Legally Harvested Forests, and manufactured under the strict ISO14001 Environmental Management System.

Printed in New Zealand

