
 <p>CERTIFICATE 2518.08</p> <p>MS ISO/IEC 17025 TESTING SAMM NO. 0825</p>
<p>MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.</p>	<p>FCC / ISED TEST REPORT Report Revision : Rev.B</p>
<p>Date/s Tested : 02-Aug-2022 - 24-Aug-2022 Report Issue Date : 24-Aug-2022 Manufacturer/Location : Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia Requestor : CADOGAN SEAN Product Type : Hand-held Product Version (PMN) : APX N70 Model Number (HVIN) : H35UCT9PW8AN Frequency Band : 2.402 - 2.480 GHz Max RF Output Power : 5.62 mWatts Applicant Name : Motorola Solutions Inc Applicant Address : 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322 FCC Registrations : 461337 ISED Registrations : MY0001 Firmware Version (FVIN) : D00.00.45</p> <p>The equipment was tested accordance to the requirement listed below:</p> <p>(2.4GHz BT LE) PASS 47 CFR Part 15C ISED RSS 247 Issue 2</p>	
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>	
<p>Prepared By:</p>  <p>_____ GAN BOON TEONG Test Personnel</p>	<p>Approved Signatory:</p> <p>_____ VINCENT FOONG CHUEN KIT Responsible Engineer</p>

Table of Contents

- 1.0 General Information3
- 2.0 Summary of Test Results.....4
- 3.0. Measurement Uncertainty4
- 4.0 Equipment List5
- 5.0 Test Mode Applicability and Test Channel Detail6
- 6.0 Transmitter Test Parameters7
 - 6.1 6dB Channel Bandwidth.....7
 - 6.1.1 Test Setup.....7
 - 6.1.2 Test Limits:7
 - 6.1.3 Test Data:7
 - 6.2 Maximum Peak Conducted RF Output Power11
 - 6.2.1 Test Setup.....11
 - 6.2.2 Test Limits:11
 - 6.2.3 Test Data:12
 - 6.3 Maximum Peak Power Spectral Density14
 - 6.3.1 Test Setup.....14
 - 6.3.2 Test Limits:14
 - 6.3.3 Test Result15
 - 6.4 Conducted Spurious Emission.....17
 - 6.4.1 Test Setup.....17
 - 6.4.2 Test Limits:17
 - 6.4.3 Test Result17
 - 6.5 Band edge Conducted Spurious Emission.....26
 - 6.5.1 Test Setup.....26
 - 6.5.2 Test Limits:26
 - 6.5.3 Test Result26
 - 6.6 Radiated Emission within Restricted Bands.....29
 - 6.6.1 Test Setup.....29
 - 6.6.2 Test Limits:30
 - 6.6.3 Test Results:31
 - 6.7 AC Powerline Conducted Emission65
 - 6.7.1 Test Setup.....65
 - 6.7.2 Test Limits:65
 - 6.7.3 Test Result67

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	24-Aug-2022	Gan Boon Teong
Rev. B	Amended spurious limit	11-Oct-2022	Gan Boon Teong

1.0 General Information

EUT Description:

Technologies	2.4GHz BT LE
TX Frequency range	2402MHz – 2480MHz
Modulation Type	GFSK
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	Stamped Metal

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
Hi Cap 4400mAH (using RN 2170 Li-Ion cell) Non-UL battery	MOTOROLA	PMNN4817A
GCAI-mini Programming & Test Cable	MOTOROLA	PMKN4231A
7800 Whip 762-870MHz	MOTOROLA	AN000411A01
CHARGER DESKTOP MULTI UNIT IMPRES 2 6 DISPLAYS INT PS US	MOTOROLA	PMPN4591A

Channel number and frequency information:

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR Part 15 Subpart C
KDB 558074 D01 15.247 Meas Guidance v05
ANSI C63.10-2013

Deviation from standard

Not applicable as no deviation from standard test method

Modifications to EUT

For RF conducted measurements a pigtail was soldered out of the board while for radiated measurements there were no modifications to the device

2.0 Summary of Test Results

FCC Clause	ISED Clause	Test Item	Result	Remark	Serial number tested	Tested by
15.247 (a)(2)	RSS 247 5.2 (a)	DTS & 99% Channel Bandwidth	Pass	Highest 99% OCB: BT 4.0 - 1.055 MHz (1M06F1D) BT 5.0 – 2.076 MHz (2M08F1D)	022TYP0086	Gan
15.247 (b)(3)	RSS 247 5.4 (d)	Conducted RF Output Power (Peak)	Pass	Highest output power: BT 4.0 – 6.43 dBm (4.40 mW) BT 5.0 -6.63dBm (4.60 mW)	022TYP0086	Gan
15.247(e)	RSS 247 5.2 (b)	Maximum Peak Power Spectral Density	Pass	Meet the limit requirement.	022TYP0086	Gan
15.247 (d)	RSS-247 5.5	Band-Edge Conducted Spurious Emission	Pass	Worst case emission: -43.80 dBm	022TYP0086	Gan
15.247 (b)	RSS-247 5.5	Conducted Spurious Emission	Pass	Worst case emission: -41.81 dBm	022TYP0086	Gan
15.205, 15.209, 15.247 (d)	RSS247 5.5	Radiated Emission within Restricted Bands	Pass	Worst case emission: RBE: 44.9999 dBuV/m. (Margin = 9.0001 dB) RSE: 50.9161 dBuV/m (Margin = 3.0839 dB), noise floor	022TYP0004	Qawiman&Nazrin
15.207	RSS-Gen 8.8	AC Power Line Conducted Spurious Emission	NA	Meet the limit requirement	022TYP0018 022TYP0004	Azil
15.203	-	Antenna Requirement	NA	Internal antenna is not accessible to the end-user	NA	NA

3.0. Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	5.88
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.84
	18GHz ~ 40GHz	6.02
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82

4.0 Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.11)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SPECTRUM ANALYZER	E440A	MY48250919	30-Sep-21	30-Sep-22
CHAMBER	SH-641	92003820	8-Jul-22	8-Jul-23
POWER SUPPLY	6652A	MY40001436	22-Nov-21	22-Nov-22
PULSE POWER METER	ML2495A	1845014	3-May-22	3-May-23
PULSE SENSOR	MA2411B	1726287	3-May-22	3-May-23
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA

Radiated Emission Station (SW Version: EMC FCC RE v1.6.4)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	720	06-Apr-21	06-Apr-23
DRG HORN FREQ.	SAS-571	719	13-Sep-21	13-Sep-22
Advanced Power System - Dynamic DC Power Supply, 120V, 16.7A, 2000W	N7976A	MY53410110	30-Jun-22	30-Jun-23
SIGNAL GENERATOR	SMB 100A	182511	4-Jun-21	4-Jun-24
EMI TEST RECEIVER	ESW44	101731	5-Nov-21	5-Nov-22
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	Not Required	Not Required
BILOG ANTENNA	CBL6112B	2863	22-Jun-22	22-Jun-23
BILOG ANTENNA	CBL6112D	30991	05-Oct-21	05-Oct-22
DATA LOGGER THERMOHYGROMETER	SDL500	A.016800	13-Jun-21	13-Jun-23
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONING TOWER	TLT2	NA	Not Required	Not Required
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	18-Feb-22	18-Feb-23
PREAMPLIFIER 18-40GHz	BBV9721	9721-007	Not Required	Not Required
PREAMPLIFIER	PAM-0118P	361	11-Sep-20	11-Sep-23
LOOP ANTENNA	6502	00208416	8-Oct-21	8-Oct-22

AC Powerline Station (SW Version: EMC32 Ver. 10.60.10)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETHERNET TEMPERATURE & HUMIDITY SENSOR TRANSMITTER	iTHX-SD	M21280391	20-Nov-21	20-Nov-22
V-NETWORK 2-LINE	ENV216	101135	5-Oct-21	5-Oct-22
EMI TEST RECEIVER	ESCI	10025	5-Feb-21	5-Nov-22
POWER SUPPLY	61604	616040003502	07-Dec-21	07-Dec-22

5.0 Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	23.5°C, 69.9%RH

Radiated Emission Test (Below 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	23.5°C, 69.9%RH

Power Line Conducted Emission Test

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Application Mode	0 to 39	AUTO	AUTO	23°C, 69.3%RH

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	25°C, 54.8%RH

6.0 Transmitter Test Parameters

6.1 6dB Channel Bandwidth

6.1.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
 - e. Sweep = auto
- 5) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.


6.1.2 Test Limits:

Normal Condition (25 ° C)
≥500 kHz


6.1.3 Test Data:

BTLE 1M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2402	0.666	1.055	Pass
Bluetooth L.E	GFSK	2440	0.672	1.053	Pass
Bluetooth L.E	GFSK	2480	0.679	1.053	Pass

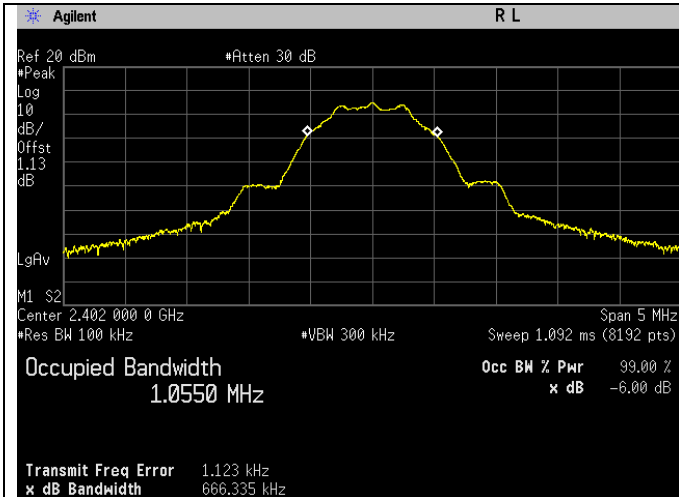


6dB Bandwidth. Bluetooth LE Frequency 2402 MHz

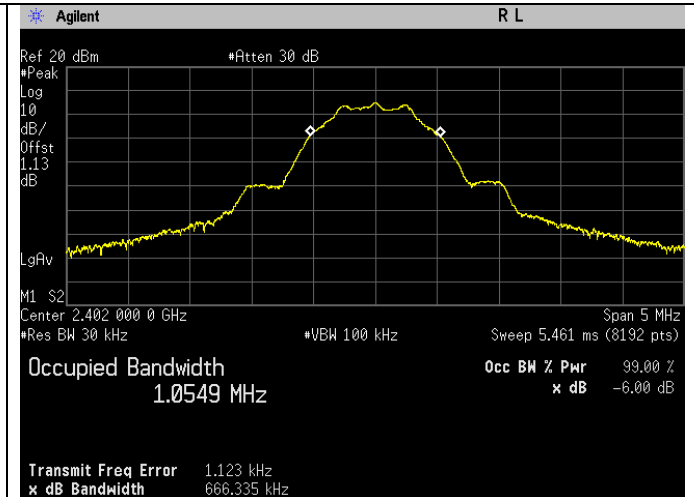


99% Bandwidth. Bluetooth LE Frequency 2402 MHz

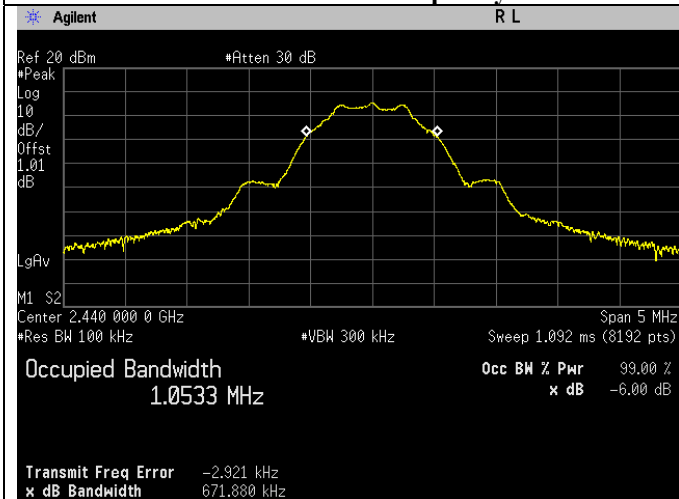


6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

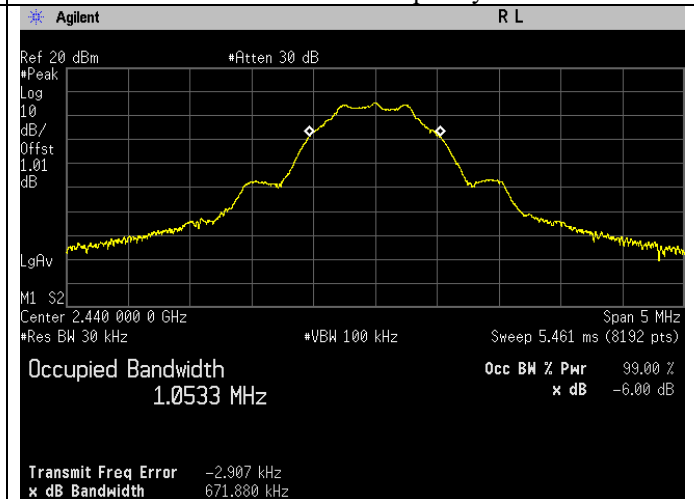

99% Bandwidth. Bluetooth LE Frequency 2440 MHz

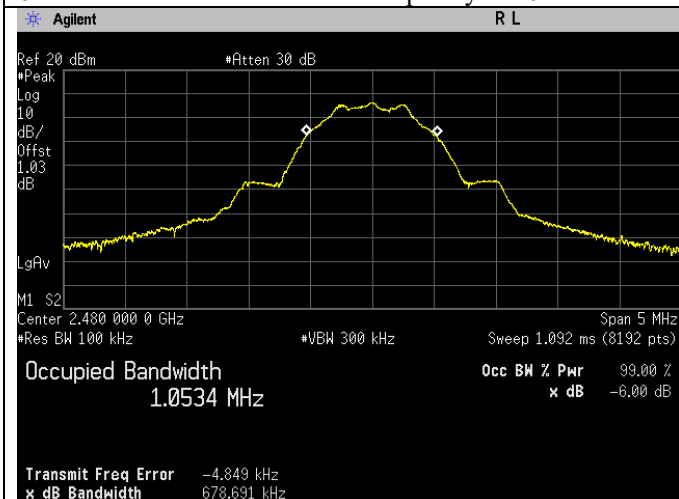


6dB Bandwidth. Bluetooth LE Frequency 2480 MHz

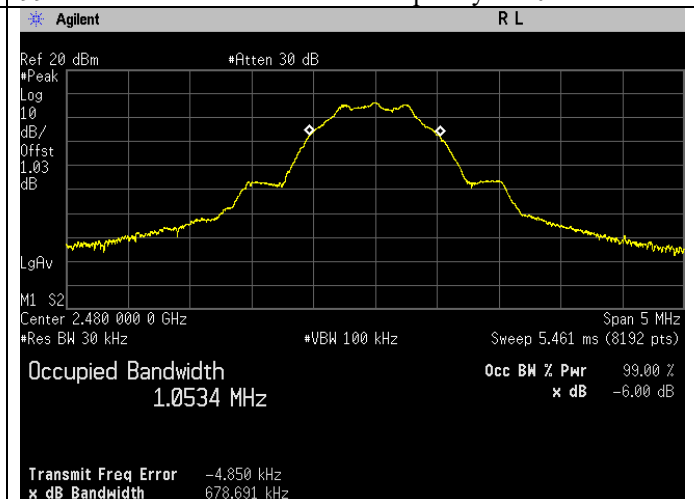


99% Bandwidth. Bluetooth LE Frequency 2480 MHz

BTLE 2M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2402	1.118	2.070	Pass
Bluetooth L.E	GFSK	2440	1.149	2.072	Pass
Bluetooth L.E	GFSK	2480	1.146	2.076	Pass

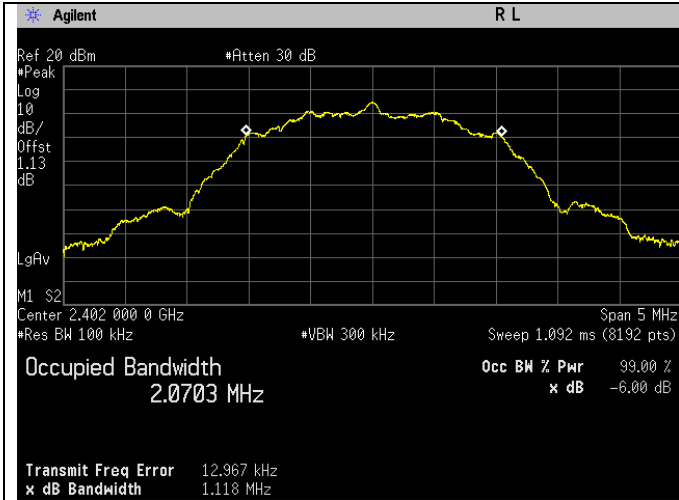


6dB Bandwidth. Bluetooth LE Frequency 2402 MHz

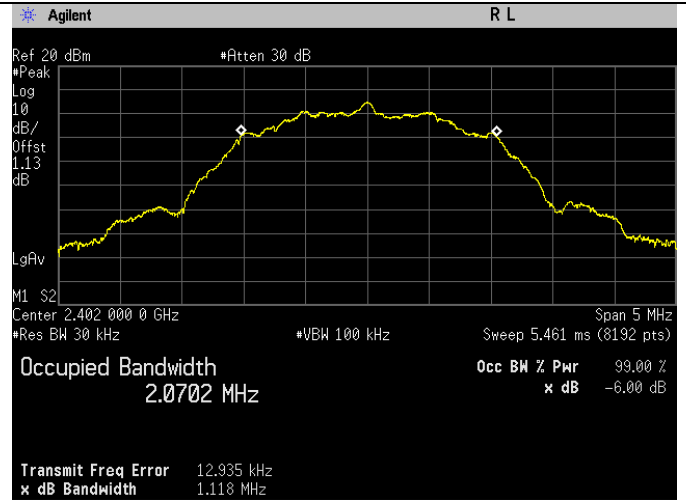



99% Bandwidth. Bluetooth LE Frequency 2402 MHz

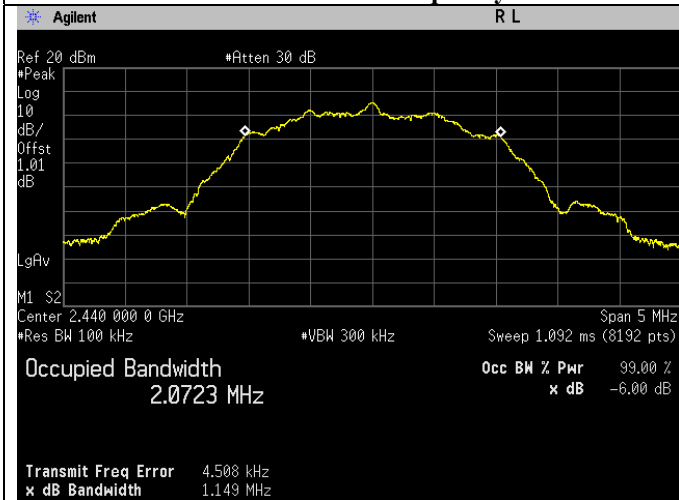

6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

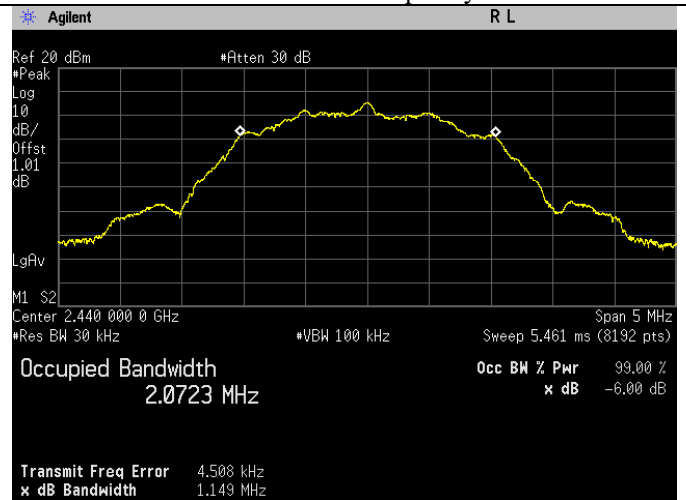


99% Bandwidth. Bluetooth LE Frequency 2440 MHz

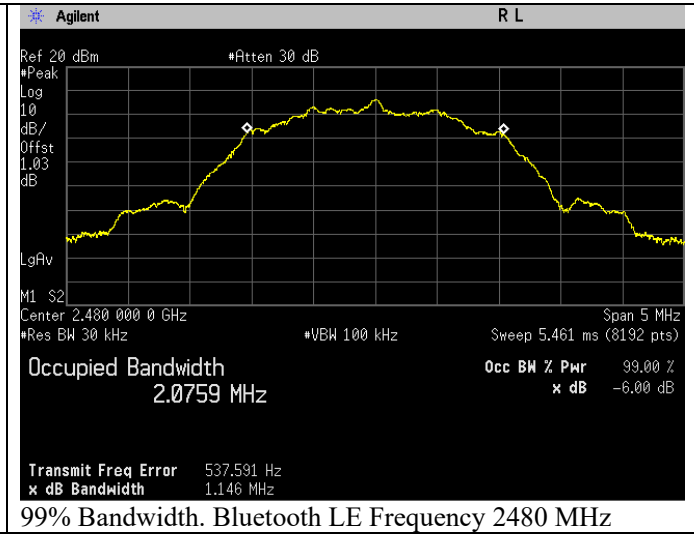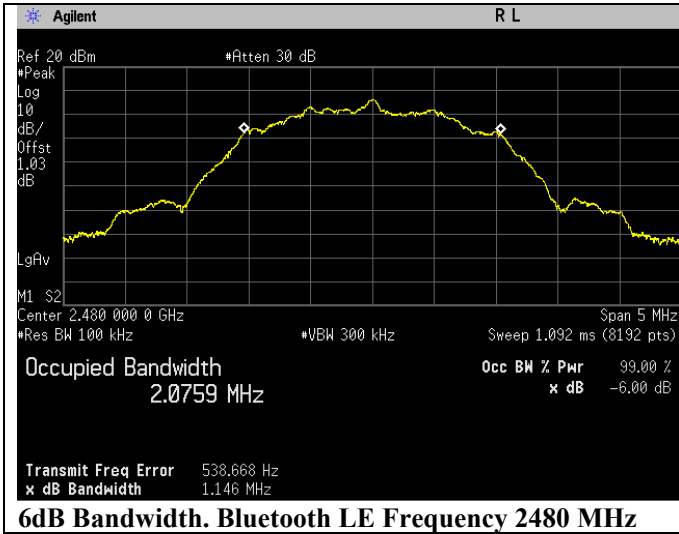

6.2 Conducted RF Output Power

6.2.1 Test Setup

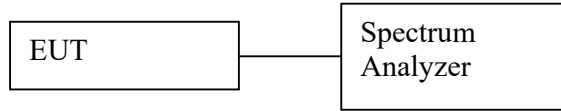

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Measure the duty cycle of transmitter output signal.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW = 30 kHz.
 - b. Set the VBW $\geq [3 \times \text{RBW}]$.
 - c. Set the span $\geq [1.5 \times \text{OBW bandwidth}]$.
 - d. Detector = Peak
 - e. Sweep time = auto couple.
 - f. Trace mode = max hold.
 - g. Allow trace to fully stabilize.


6.2.2 Test Limits:

Normal Condition (25 ° C)
≤ 1 Watt(30 dBm)


6.2.3 Test Data:

BTLE 1M


Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	4.978	Pass
Bluetooth L.E	GFSK	2440	5.621	Pass
Bluetooth L.E	GFSK	2480	6.431	Pass

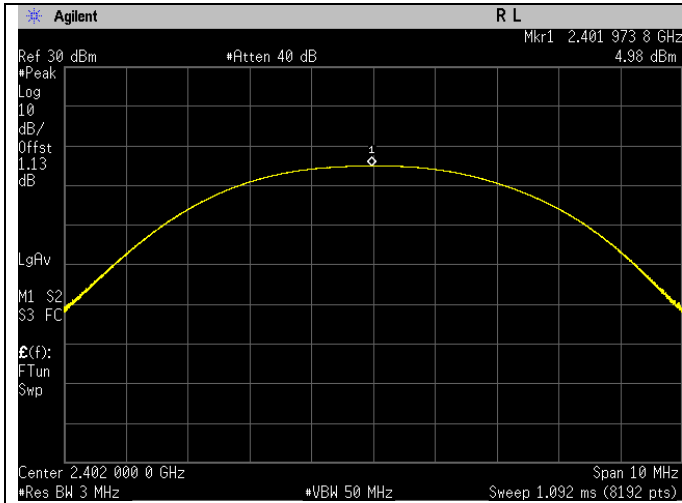

Frequency 2402 MHz

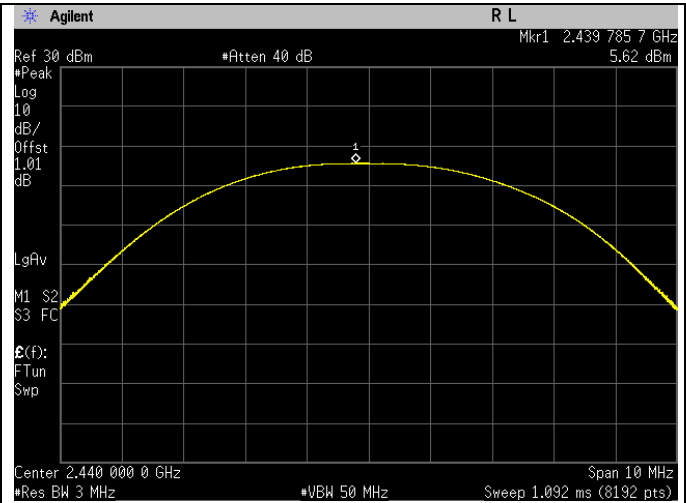




Frequency 2440 MHz

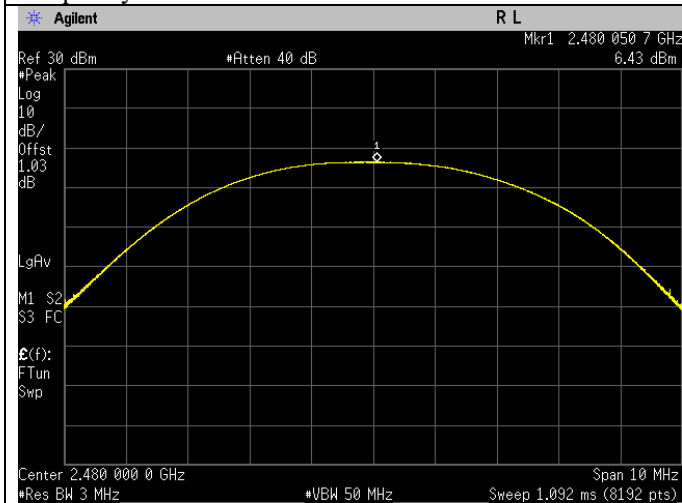

Frequency 2480 MHz


BTLE 2M

Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	5.099	Pass
Bluetooth L.E	GFSK	2440	5.864	Pass
Bluetooth L.E	GFSK	2480	6.632	Pass

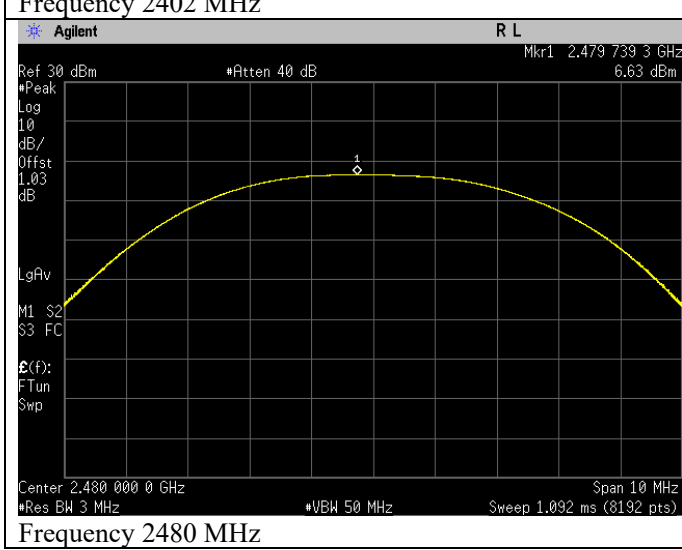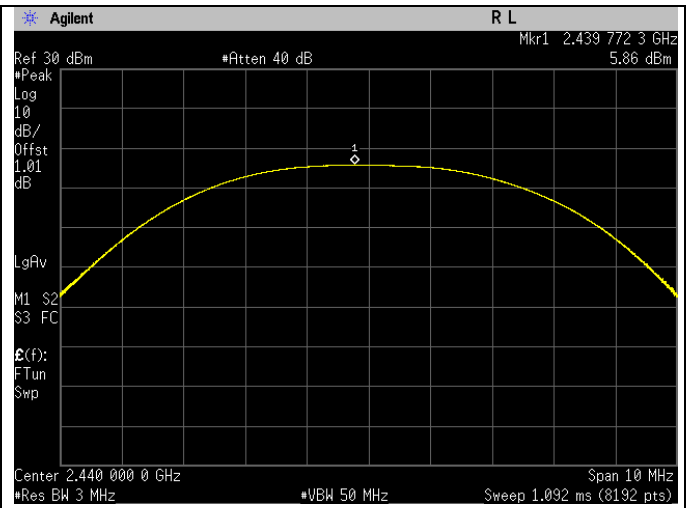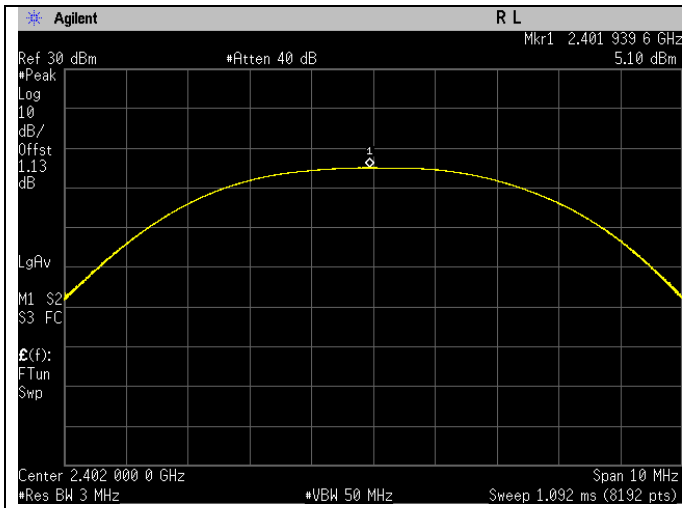

6.3 Maximum Peak Power Spectral Density

6.3.1 Test Setup



Maximum Peak

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. Set analyzer center frequency to DTS channel center frequency.
 - b. Set the span to 1.5 times the DTS bandwidth.
 - c. Set the RBW to 3 kHz.
 - d. Set the VBW $\geq [3 \times \text{RBW}]$.
 - e. Detector = peak.
 - f. Sweep time = auto couple.
 - g. Trace mode = max hold.
 - h. Allow trace to fully stabilize.
 - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


6.3.2 Test Limits:

Normal Condition (25 ° C)
$\leq 8 \text{ dBm/3kHz}$


6.3.3 Test Result

BTLE 1M


Test Conditions		Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Power (dBm/3kHz)	Status
Bluetooth L.E.	GFSK	2402	-9.91	Pass
Bluetooth L.E.	GFSK	2440	-9.32	Pass
Bluetooth L.E.	GFSK	2480	-8.35	Pass

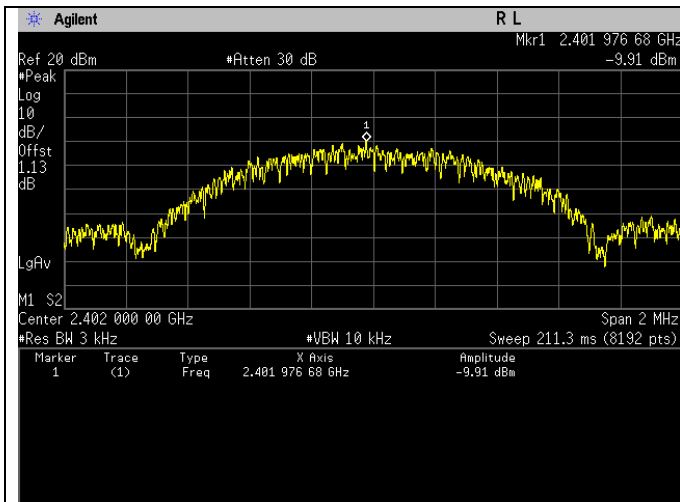

Maximum Power Spectral Density. Bluetooth LE
 Frequency 2402 MHz

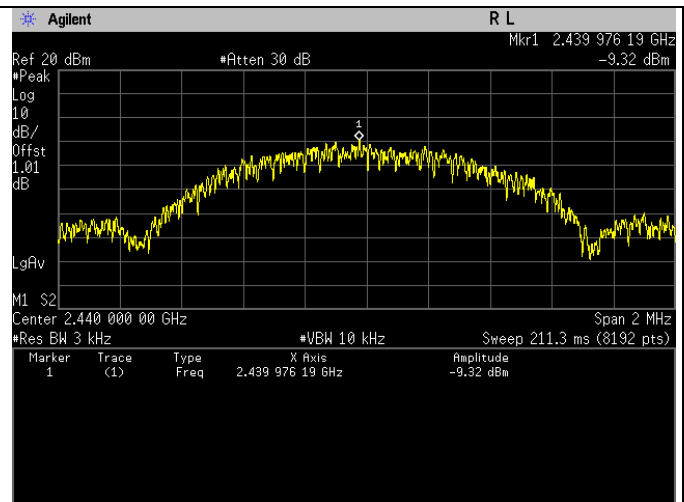


Maximum Power Spectral Density. Bluetooth LE
 Frequency 2440 MHz

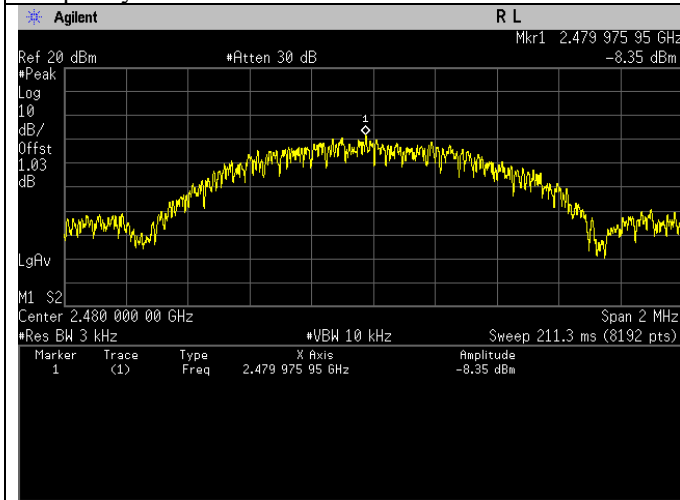


Maximum Power Spectral Density. Bluetooth LE
 Frequency 2480 MHz

BTLE 2M


Test Conditions		Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Power (dBm/3kHz)	Status
Bluetooth L.E.	GFSK	2402	-13.48	Pass
Bluetooth L.E.	GFSK	2440	-12.88	Pass
Bluetooth L.E.	GFSK	2480	-11.96	Pass

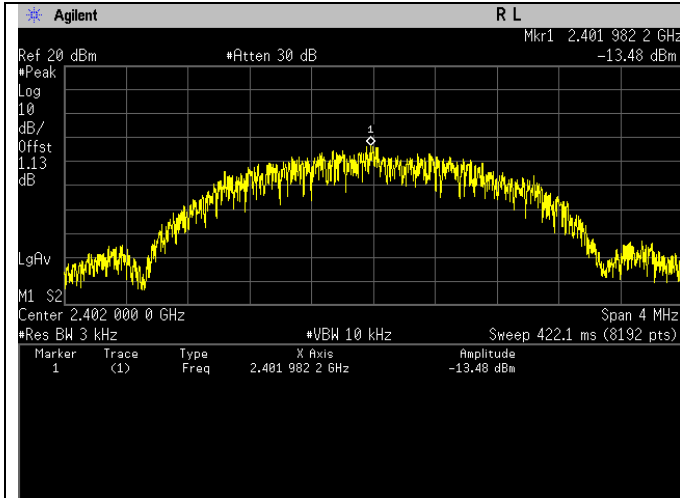

Maximum Power Spectral Density. Bluetooth LE Frequency 2402 MHz

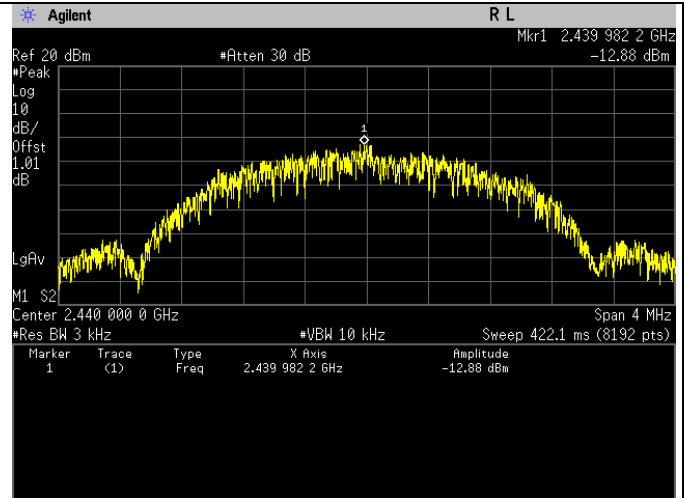


Maximum Power Spectral Density. Bluetooth LE Frequency 2440 MHz

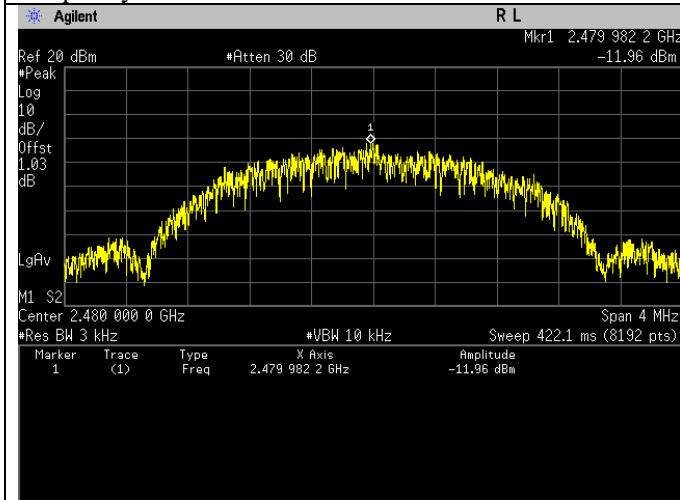

Maximum Power Spectral Density. Bluetooth LE Frequency 2480 MHz

6.4 Conducted Spurious Emission

6.4.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- 5) Use the peak marker function to measure highest emission and scan up to 10th harmonic.


6.4.2 Test Limits:

Normal Condition (25 ° C)
Shall be at least 20 dB below peak (max) power.


6.4.3 Test Result

BTLE 1M


Test Conditions			Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
Bluetooth L.E.	GFSK	2402	24708.00	-43.09	Pass
			24525.00	-43.38	Pass
			24650.00	-43.47	Pass
Bluetooth L.E.	GFSK	2440	24967.00	-42.88	Pass
			24425.00	-43.26	Pass
			24625.00	-43.67	Pass
Bluetooth L.E.	GFSK	2480	24958.00	-42.34	Pass
			24167.00	-42.98	Pass
			23733.00	-43.01	Pass

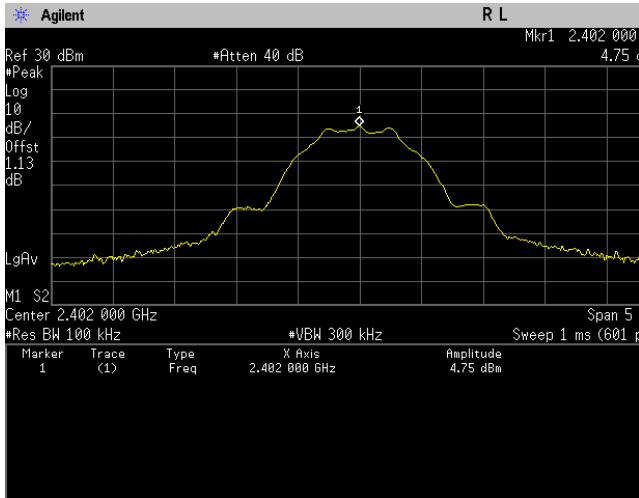


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Reference Level

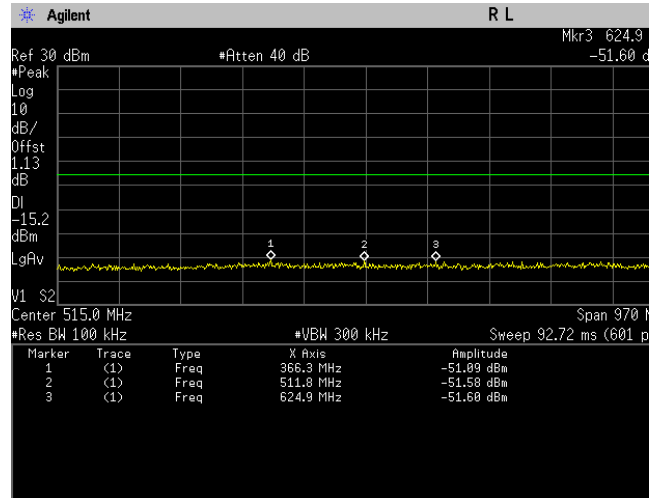


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 30 MHz -> 1 GHz

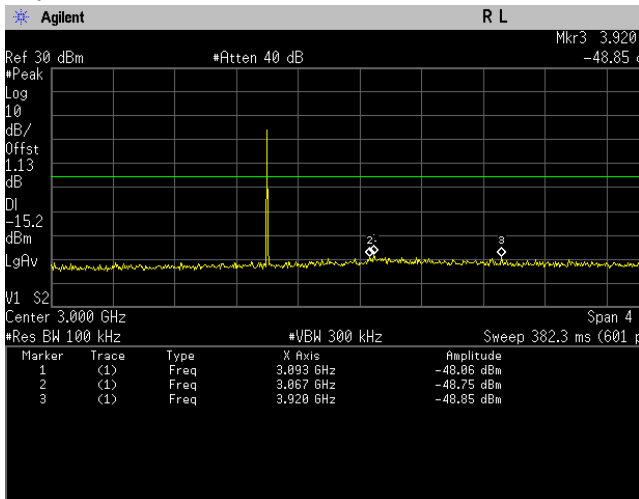


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 1 GHz -> 5 GHz

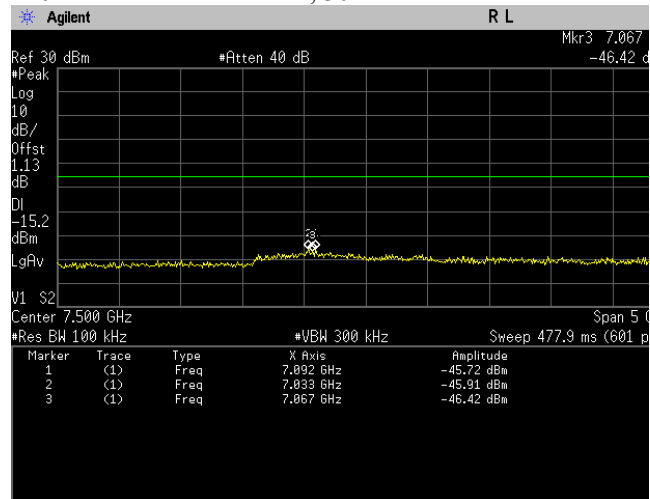


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 5 GHz -> 10 GHz

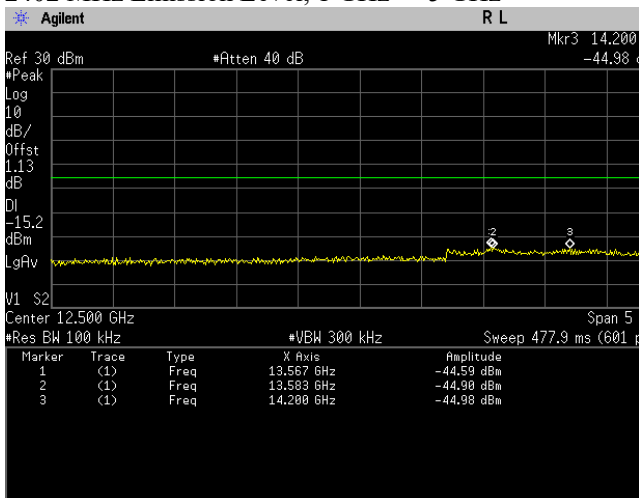


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 10 GHz -> 15 GHz

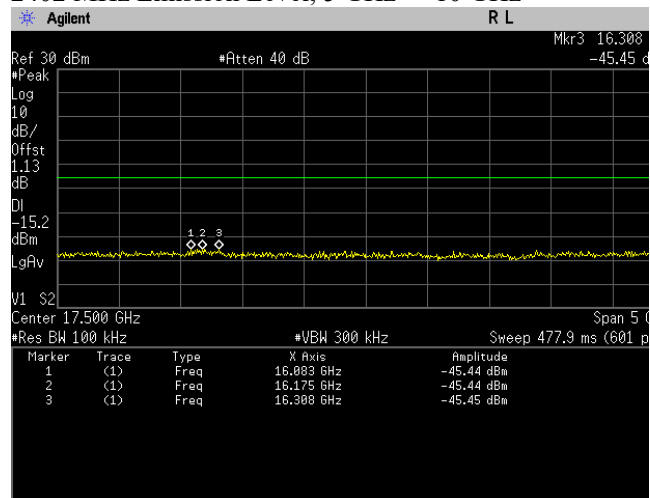


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 15 GHz -> 20 GHz

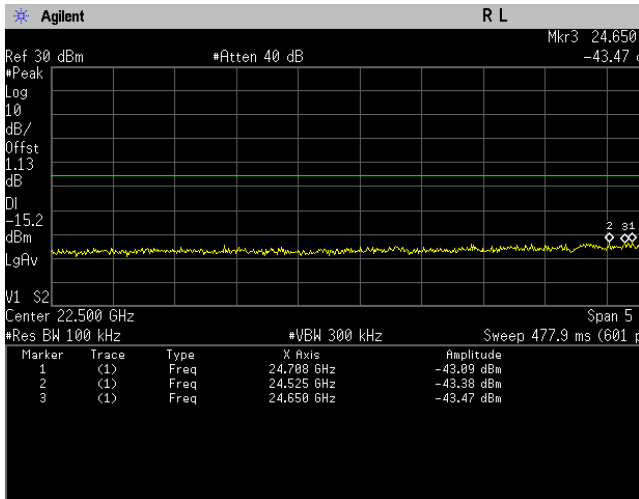


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 20 GHz -> 25 GHz

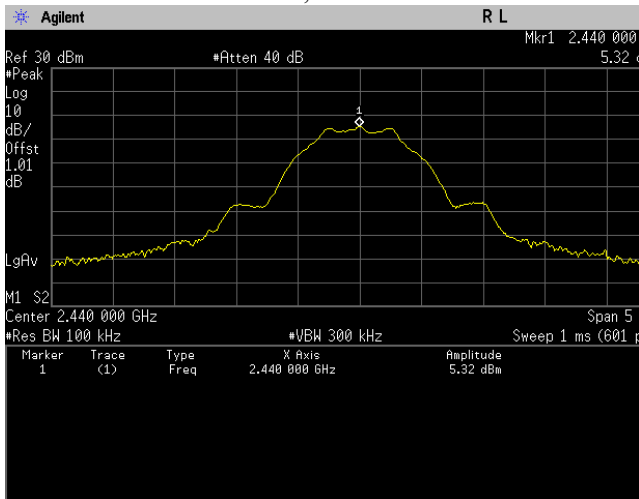


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Reference Level

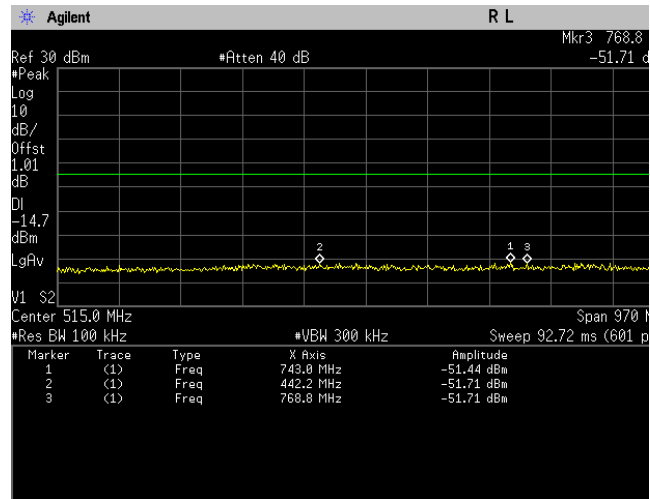


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 30 MHz -> 1 GHz

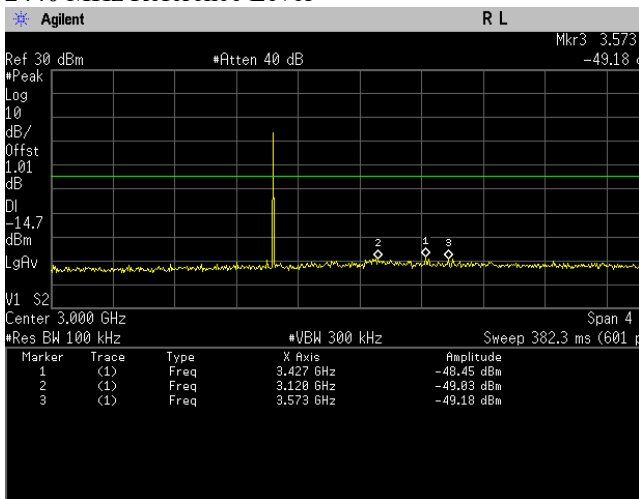


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 1 GHz -> 5 GHz

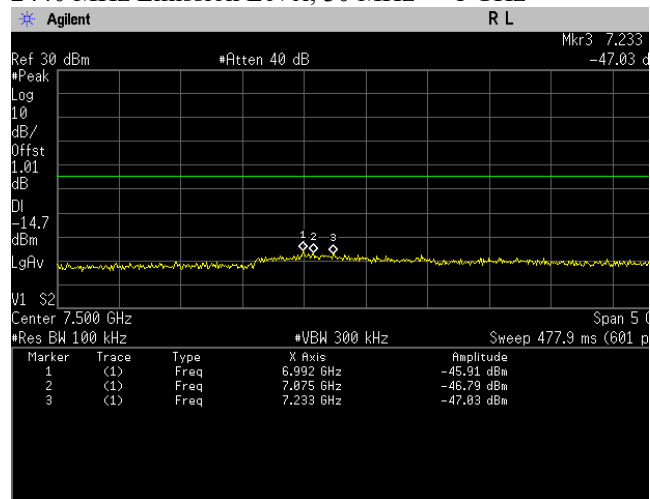


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 5 GHz -> 10 GHz

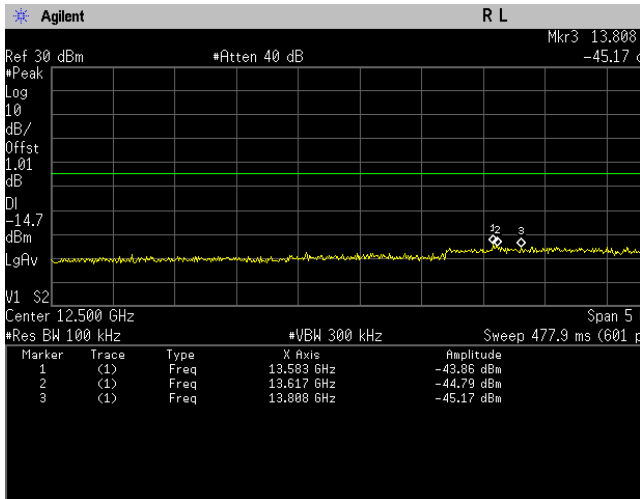

Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 Emission Level, 10 GHz -> 15 GHz

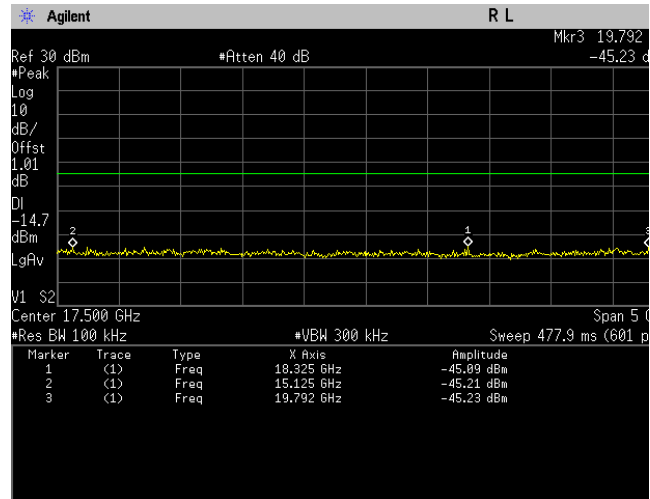


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 15 GHz -> 20 GHz

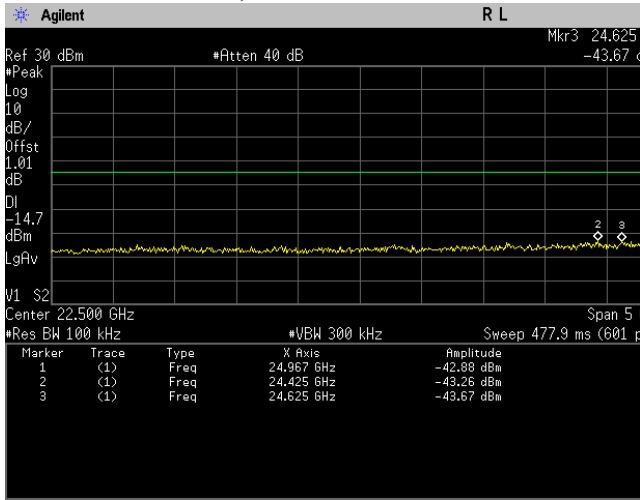


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 20 GHz -> 25 GHz

BTLE 2M


Test Conditions			Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
Bluetooth L.E.	GFSK	2402	24867.00	-41.81	Pass
			24358.00	-42.58	Pass
			24775.00	-42.72	Pass
Bluetooth L.E.	GFSK	2440	24833.00	-43.53	Pass
			23683.00	-43.63	Pass
			24683.00	-43.66	Pass
Bluetooth L.E.	GFSK	2480	23950.00	-43.16	Pass
			24983.00	-43.52	Pass
			24958.00	-43.95	Pass

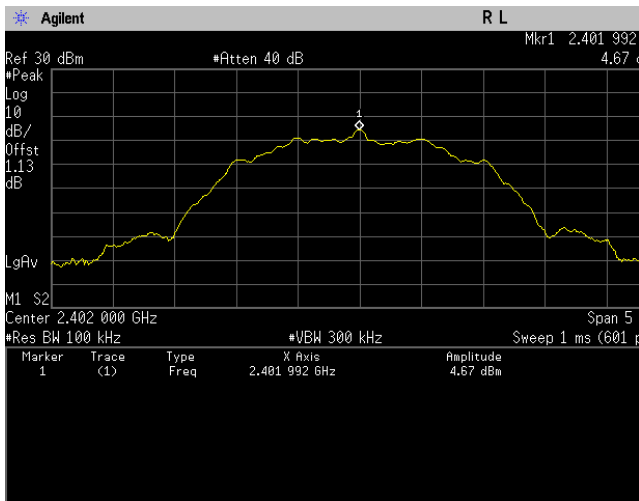


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Reference Level

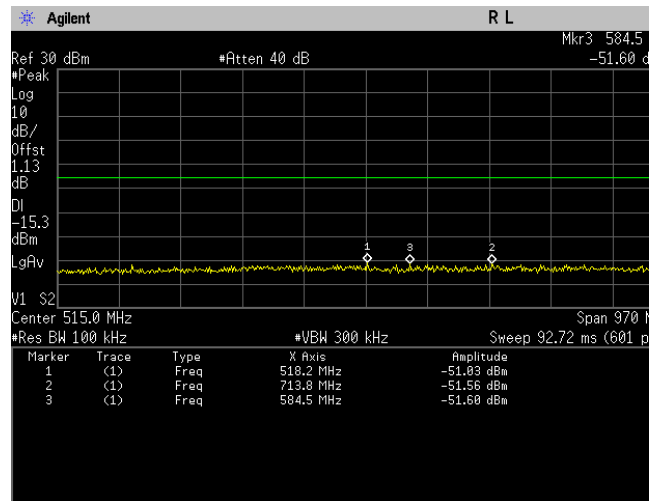


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 30 MHz -> 1 GHz

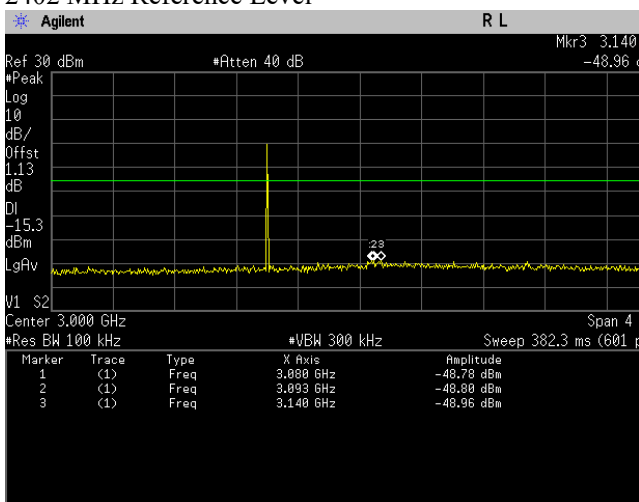


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 1 GHz -> 5 GHz

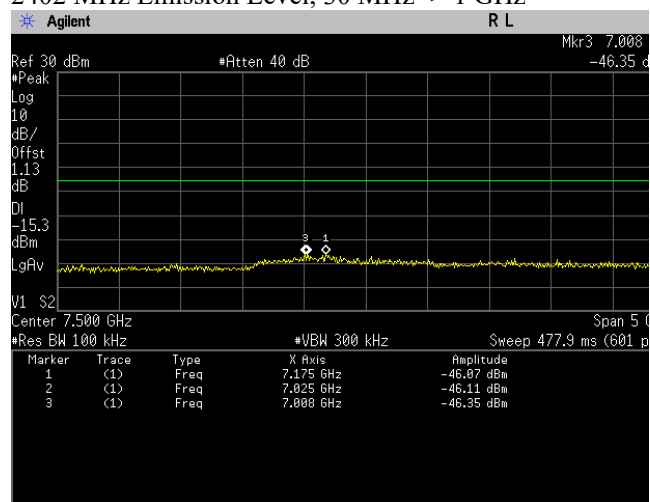


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 5 GHz -> 10 GHz

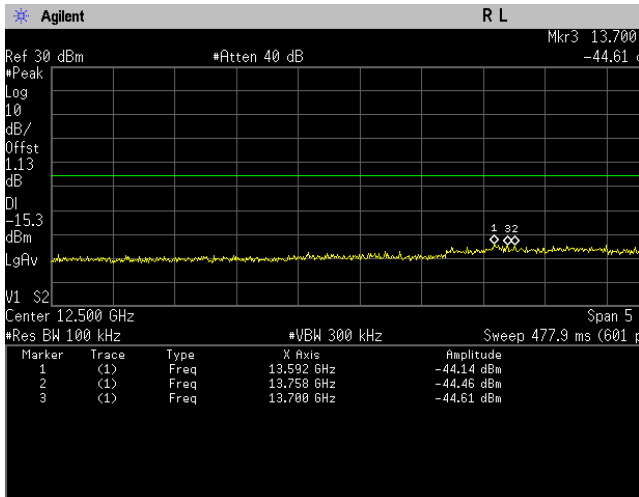


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 Emission Level, 10 GHz -> 15 GHz

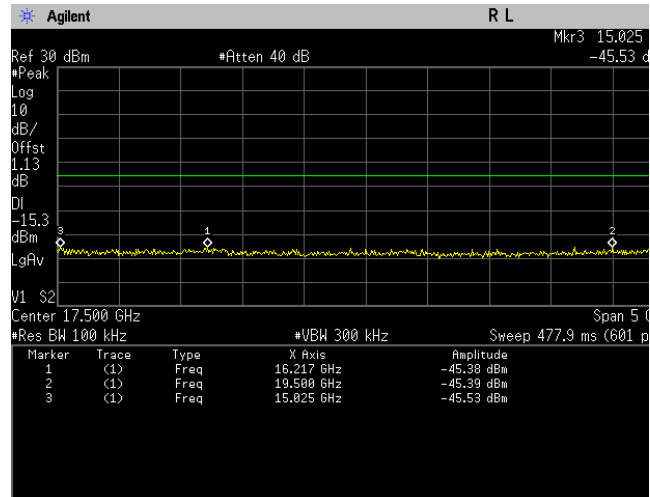


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 15 GHz -> 20 GHz

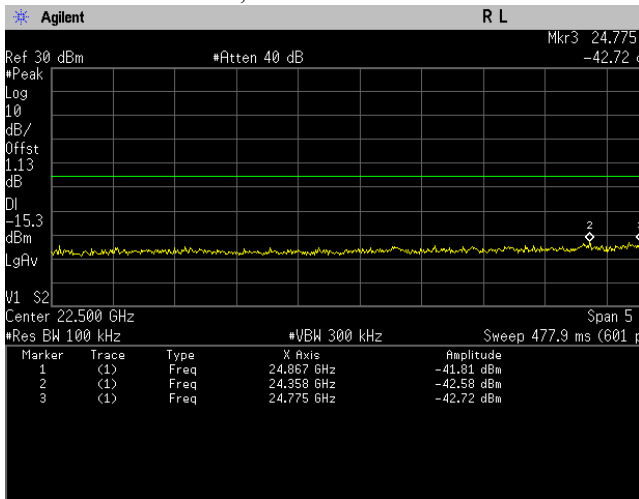


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 20 GHz -> 25 GHz

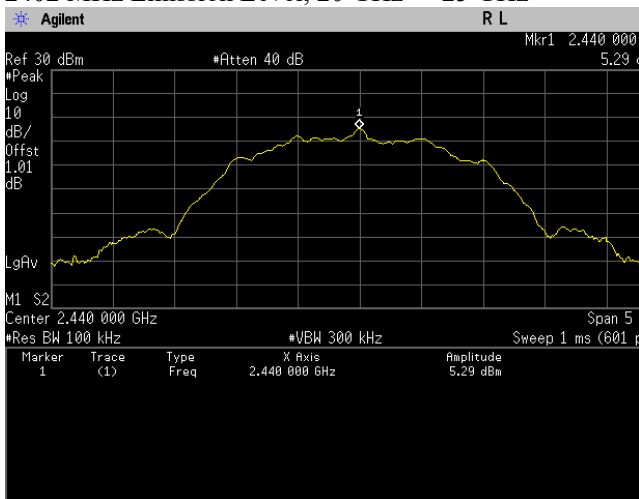


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Reference Level

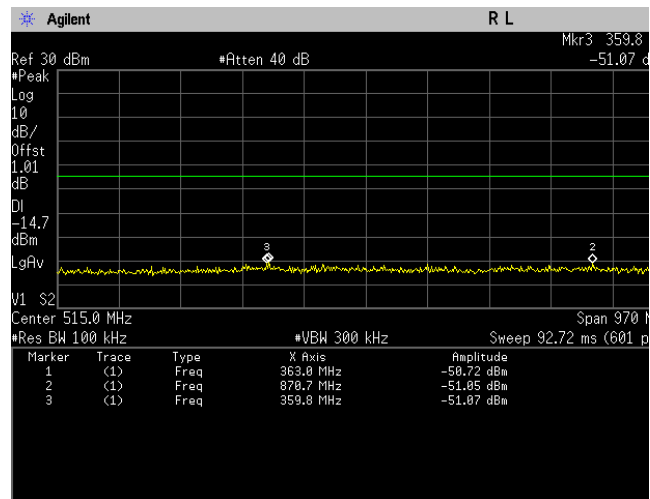


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 30 MHz -> 1 GHz

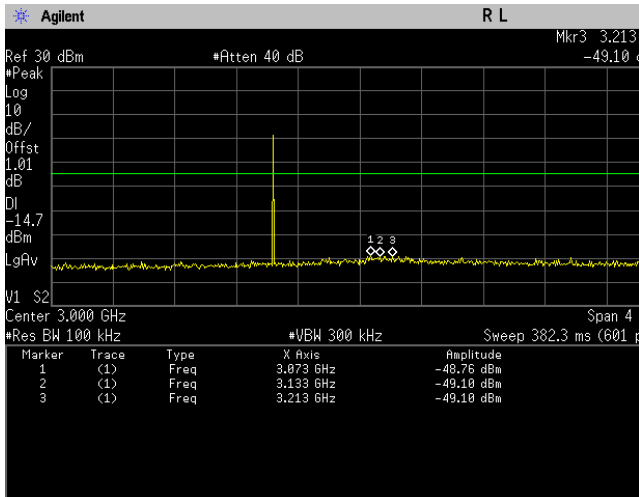


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 1 GHz -> 5 GHz

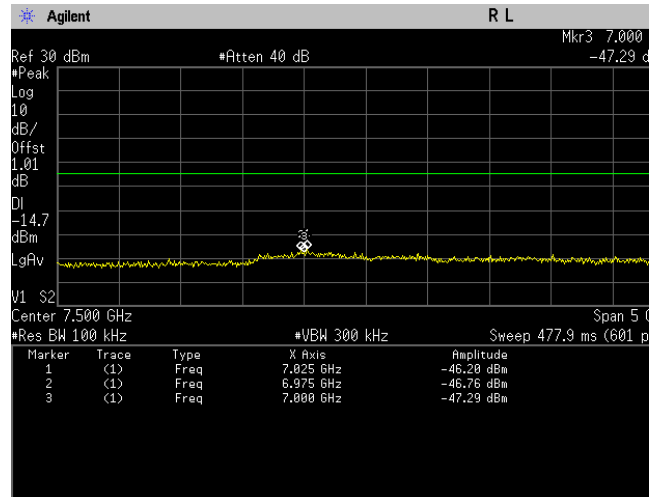


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 5 GHz -> 10 GHz

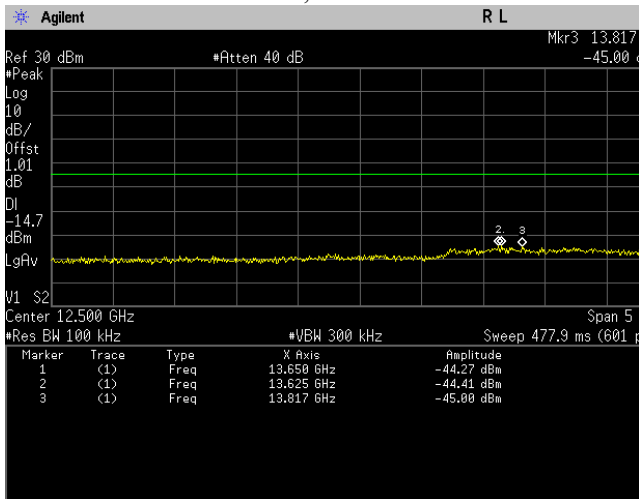


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 10 GHz -> 15 GHz

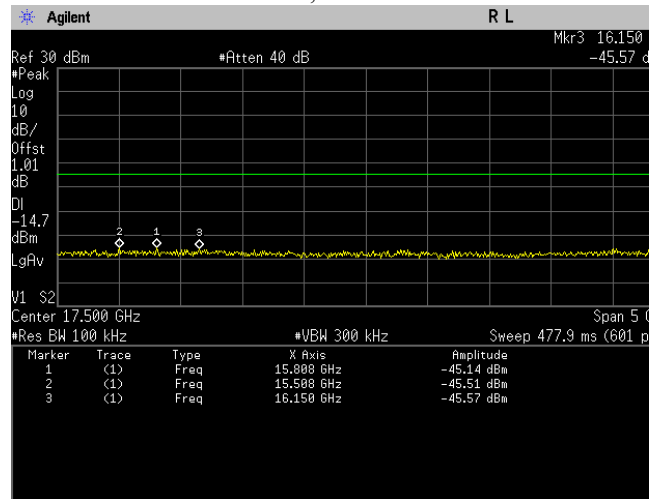


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 15 GHz -> 20 GHz

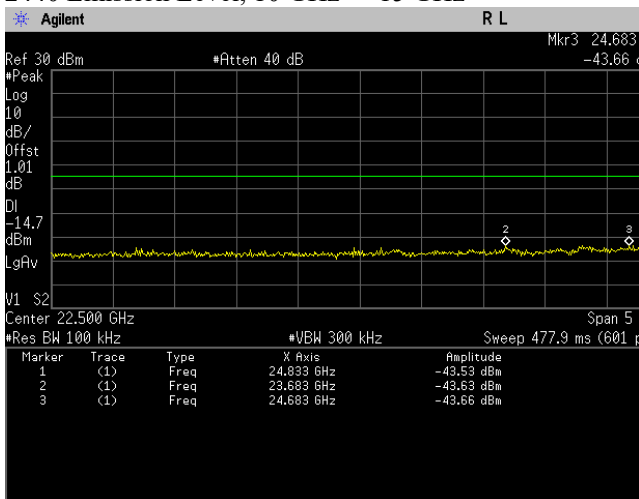


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 20 GHz -> 25 GHz

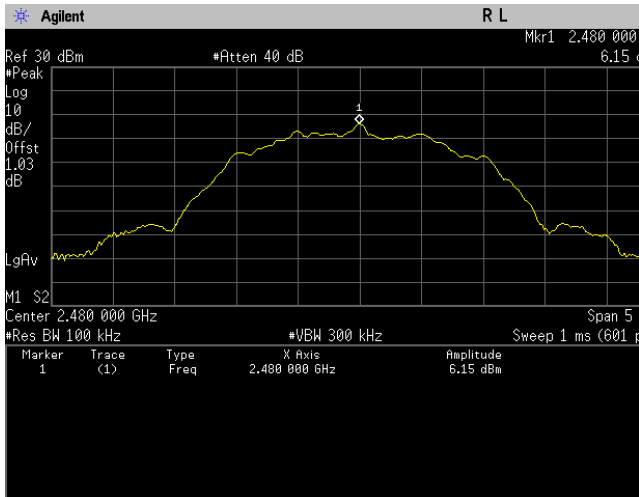


Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Reference Level

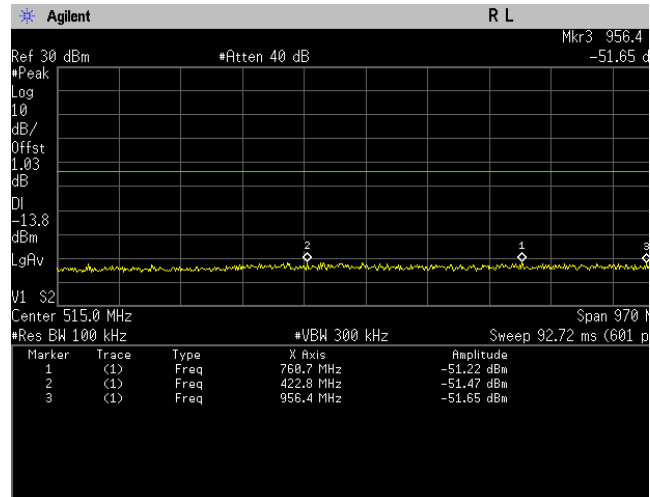


Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 30 MHz -> 1 GHz

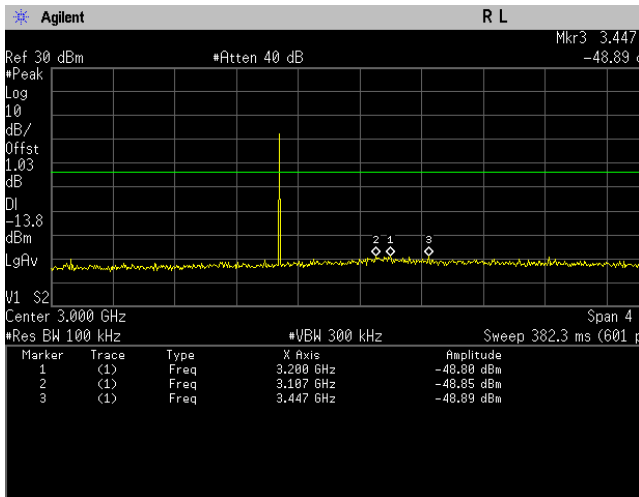


Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 1 GHz -> 5 GHz

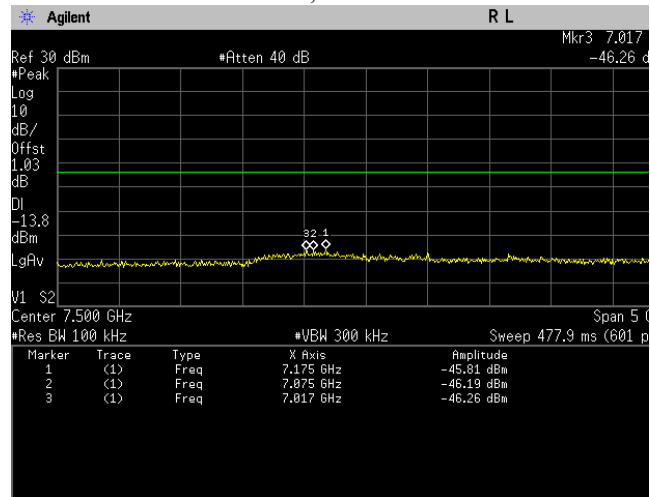


Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 5 GHz -> 10 GHz

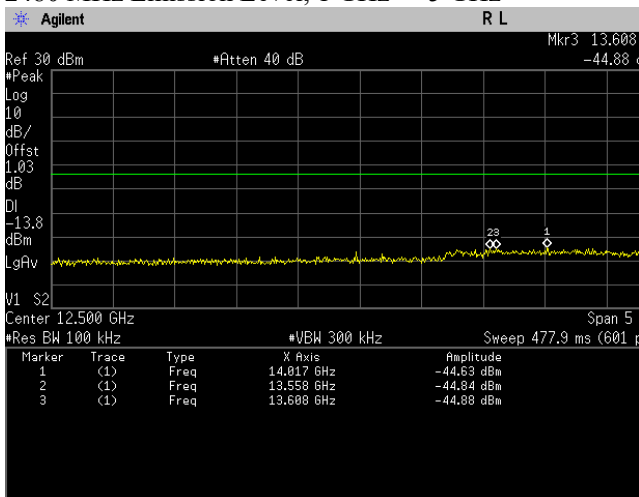

Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 10 GHz -> 15 GHz

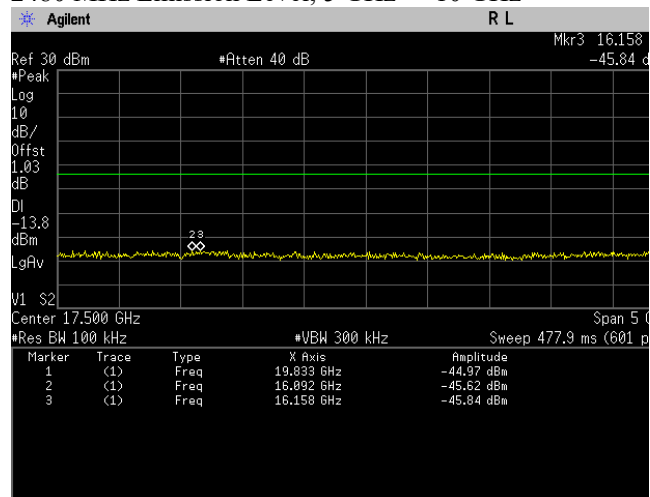


Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 15 GHz -> 20 GHz

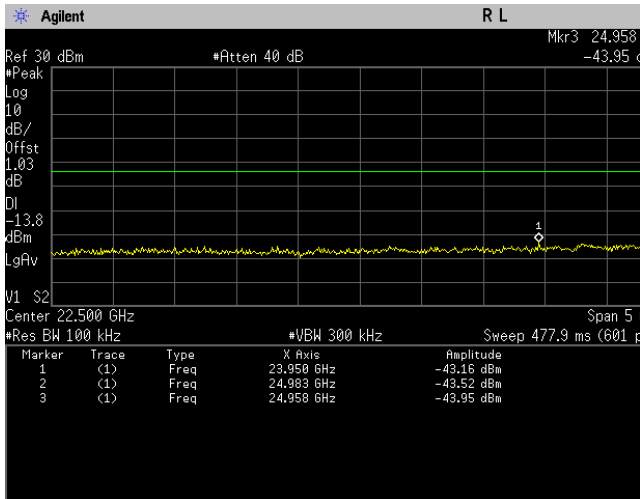

Conducted Emissions(Peak). Bluetooth LE, Frequency
2480 MHz Emission Level, 20 GHz -> 25 GHz

6.5 Band edge Conducted Spurious Emission

6.5.1 Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT’s antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.


6.5.2 Test Limits:

Normal Condition (25 ° C)
Shall be at least 20 dB below peak (max) power.


6.5.3 Test Result

BTLE 1M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
Bluetooth L.E	GFSK	2402	2400.00	-51.13	Pass
Bluetooth L.E	GFSK	2480	2483.52	-57.30	Pass

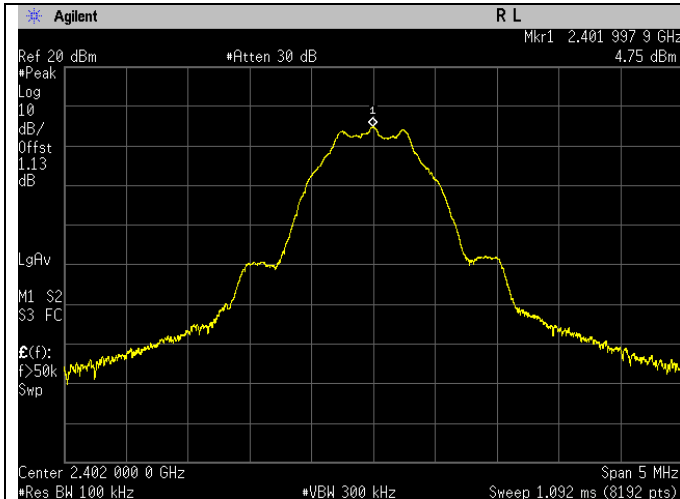


Band Edge(Peak). Bluetooth LE Frequency 2402 MHz
 Reference Level

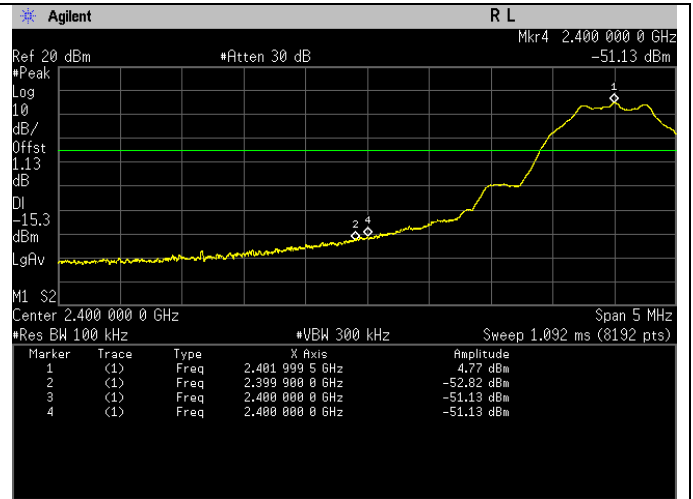

Band Edge(Peak). Bluetooth LE Frequency 2402 MHz
 Band Edge

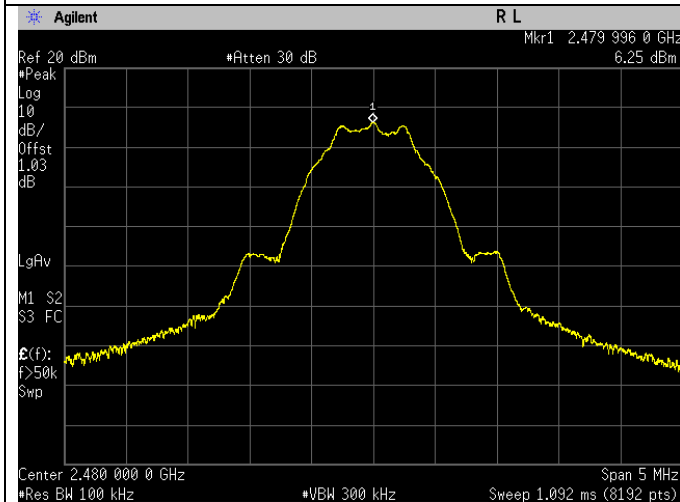


Band Edge(Peak). Bluetooth LE Frequency 2480 MHz
 Reference Level

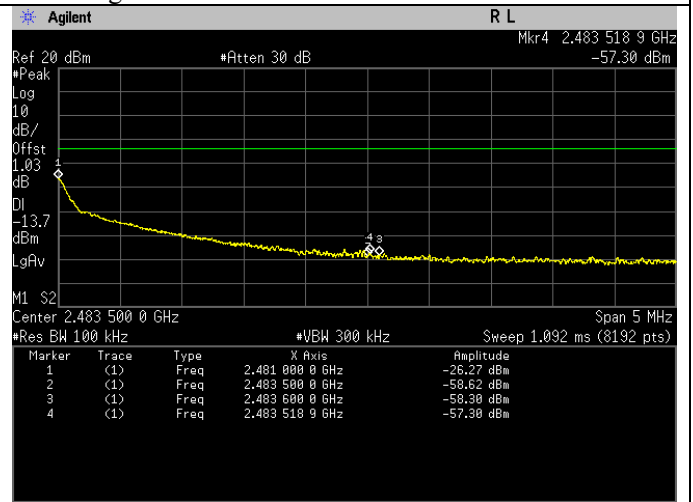


Band Edge(Peak). Bluetooth LE Frequency 2480 MHz
 Band Edge

BTLE 2M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
Bluetooth L.E	GFSK	2402	2399.99	-43.80	Pass
Bluetooth L.E	GFSK	2480	2483.56	-55.63	Pass

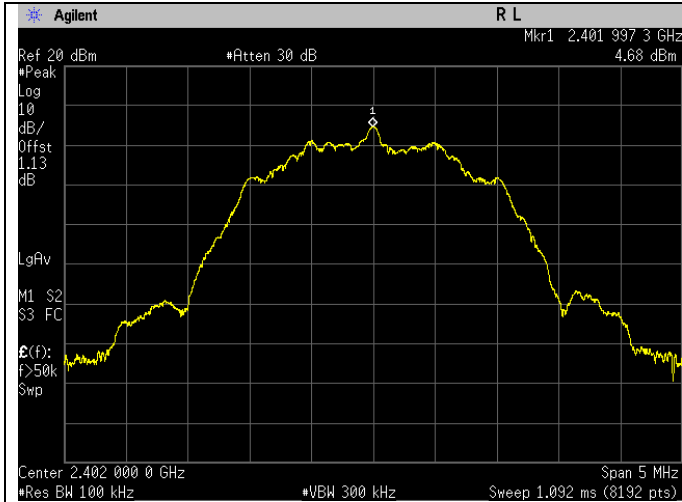


Band Edge(Peak). Bluetooth LE Frequency 2402 MHz
 Reference Level

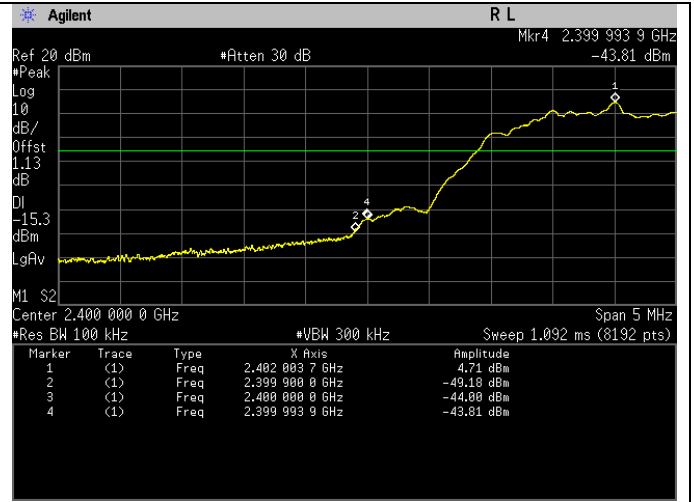

Band Edge(Peak). Bluetooth LE Frequency 2402 MHz
 Band Edge

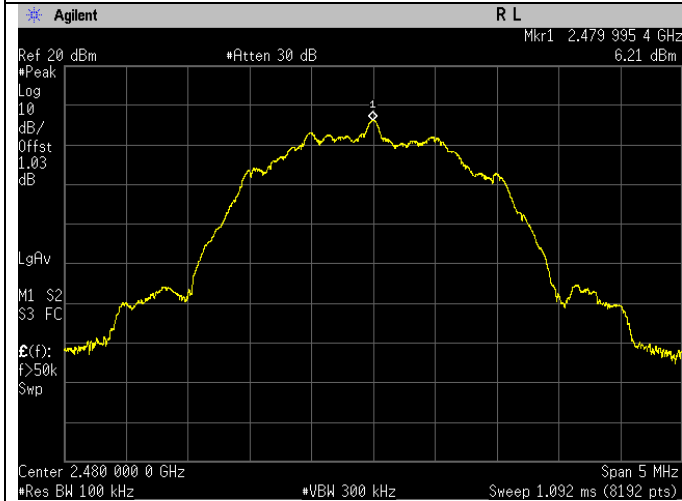


Band Edge(Peak). Bluetooth LE Frequency 2480 MHz
 Reference Level

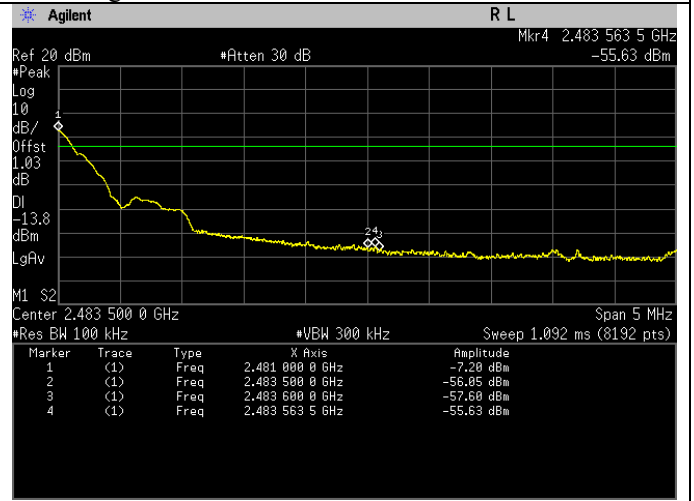

Band Edge(Peak). Bluetooth LE Frequency 2480 MHz
 Band Edge

6.6 Radiated Emission within Restricted Bands

6.6.1 Test Setup

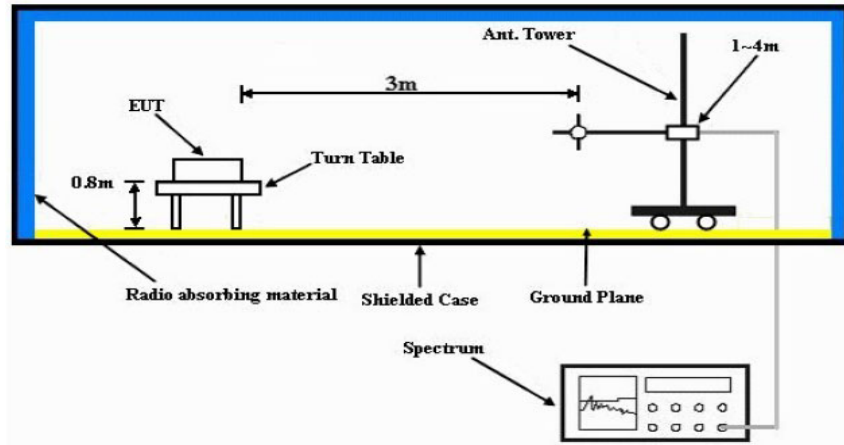

- The EUT is placed on the top of a rotating table 0.8m (<1GHz) or 1.5m (>1GHz) above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.6.2 Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:

- 1) The lower limit shall apply at the transition frequencies.
- 2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3) For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.6.3 Test Results:

Test: Bluetooth SAC Restricted Band Edge
Model Number: H35UCT9PW8AN **S/N:** 022TYP0004 **EMC SR ID#:** 26977-EMC-00104
Battery: PMNN4817A **Accessory:** AN000411A01
Test Channel: Low **Test Frequency:** 2402.0000 MHz **Test Standard:** ANSI C63.10-2013
Worst Case Plane: Z-Plane (BTLE 1M)

Restricted Band Edge (Low Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
2390.0000	-	53.5724	43.3322	-	74.0000	54.0000	-	-20.4276	-10.6678	-
Horizontal Radiated Emission Result										
2390.0000	-	53.5507	43.4457	-	74.0000	54.0000	-	-20.4493	-10.5543	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.5
 Test Performed by: Qawiman&Nazrin
 System MU: 5.84dB


Humidity (%): 69.9
 Test Date: Sat, 6 Aug, 2022

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

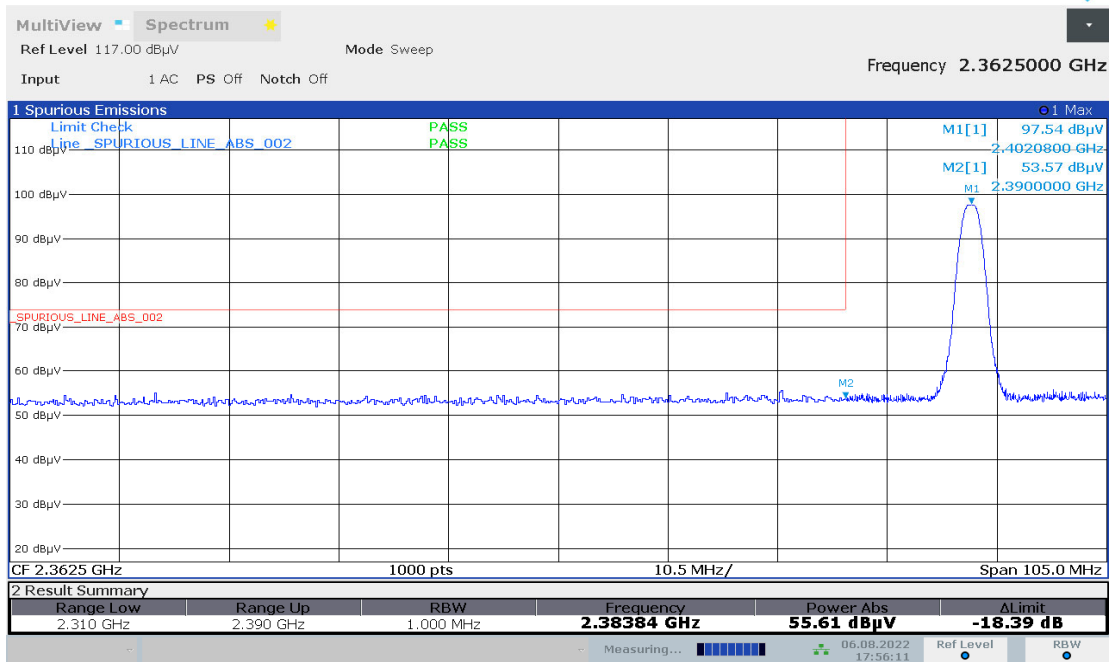


17:56:11 06.08.2022

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

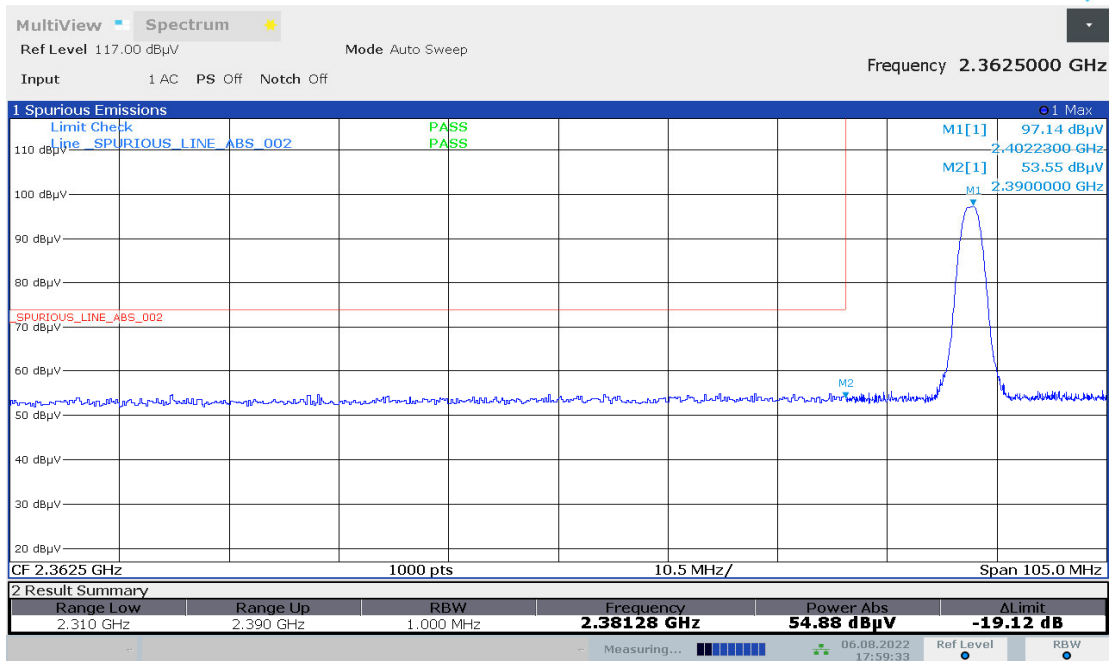


17:59:34 06.08.2022

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

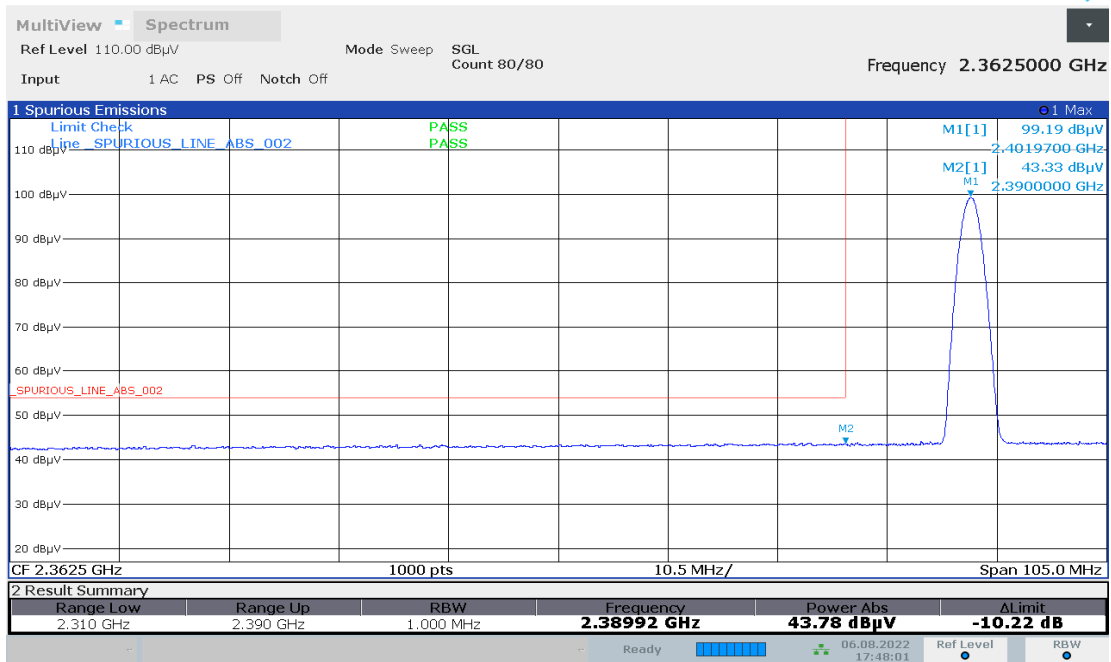

17:48:02 06.08.2022

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

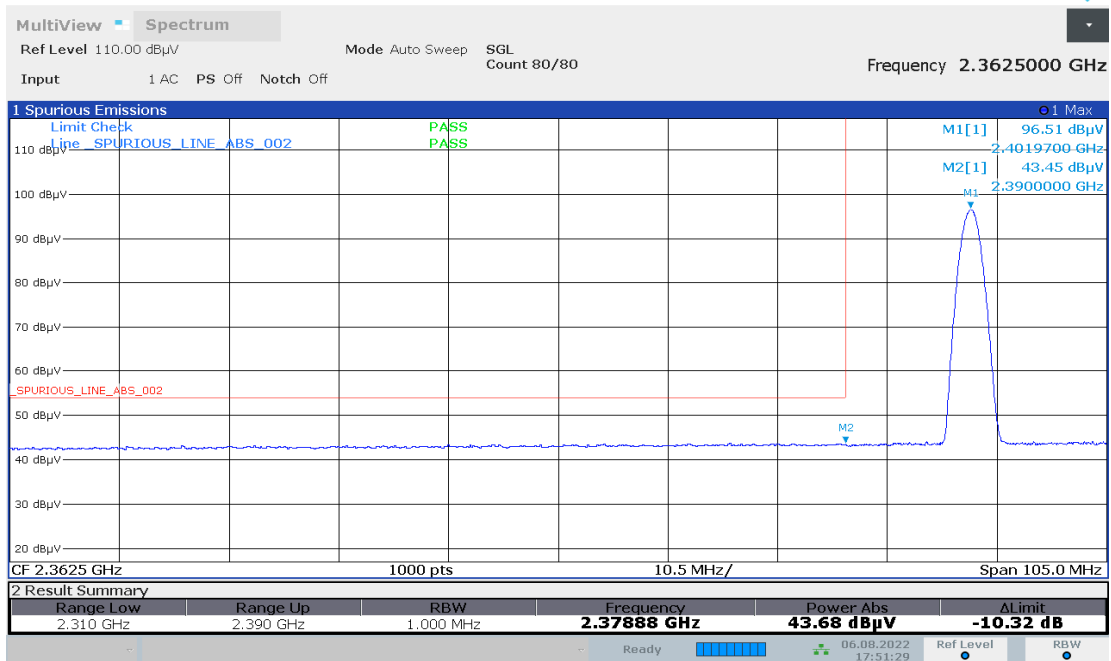

17:51:29 06.08.2022

Test: Bluetooth SAC Restricted Band Edge
Model Number: H35UCT9PW8AN S/N: 022TYP0004 EMC SR ID#: 26977-EMC-00104
Battery: PMNN4817A Accessory: AN000411A01
Test Channel: High Test Frequency: 2480.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Z-Plane (BTLE 1M)

Restricted Band Edge (High Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
2483.5000	-	55.4008	43.9511	-	74.0000	54.0000	-	-18.5992	-10.0489	-
Horizontal Radiated Emission Result										
2483.5000	-	53.0331	44.0435	-	74.0000	54.0000	-	-20.9669	-9.9565	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.5
 Test Performed by: Qawiman&Nazrin
 System MU: 5.84dB


Humidity (%): 69.9
 Test Date: Sun, 7 Aug, 2022

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

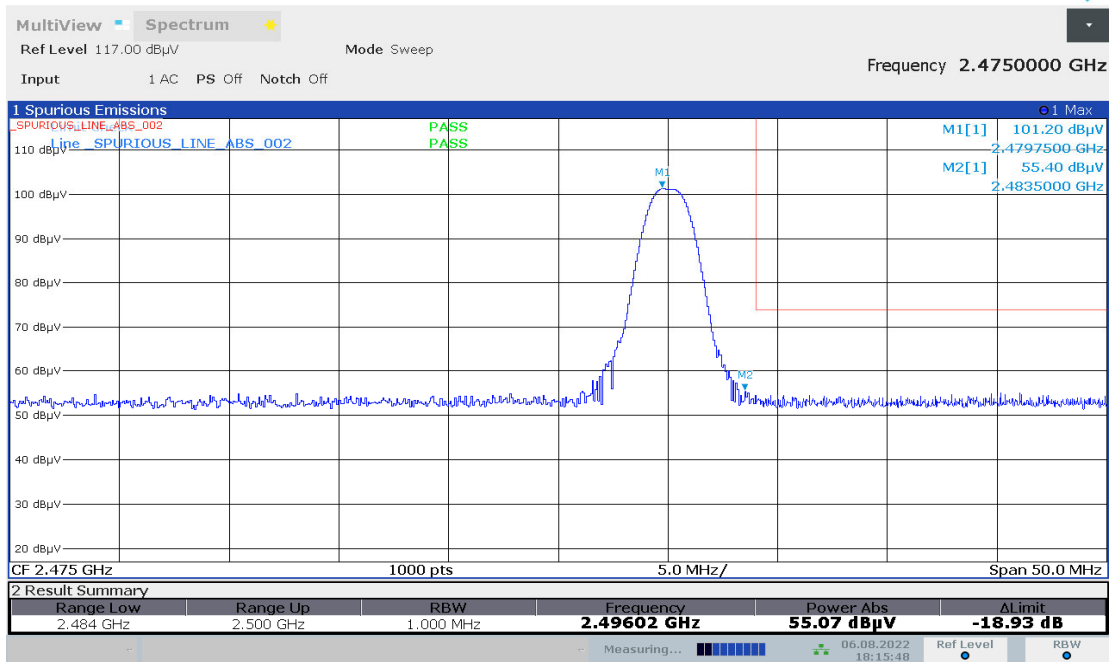


18:15:48 06.08.2022

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

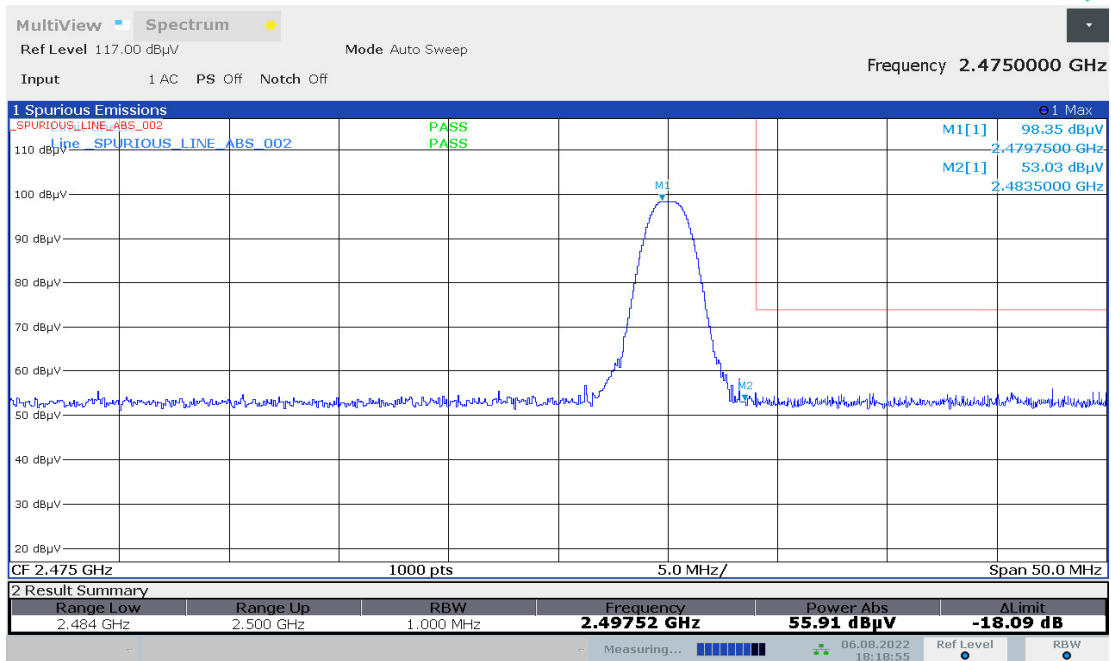


18:18:56 06.08.2022

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

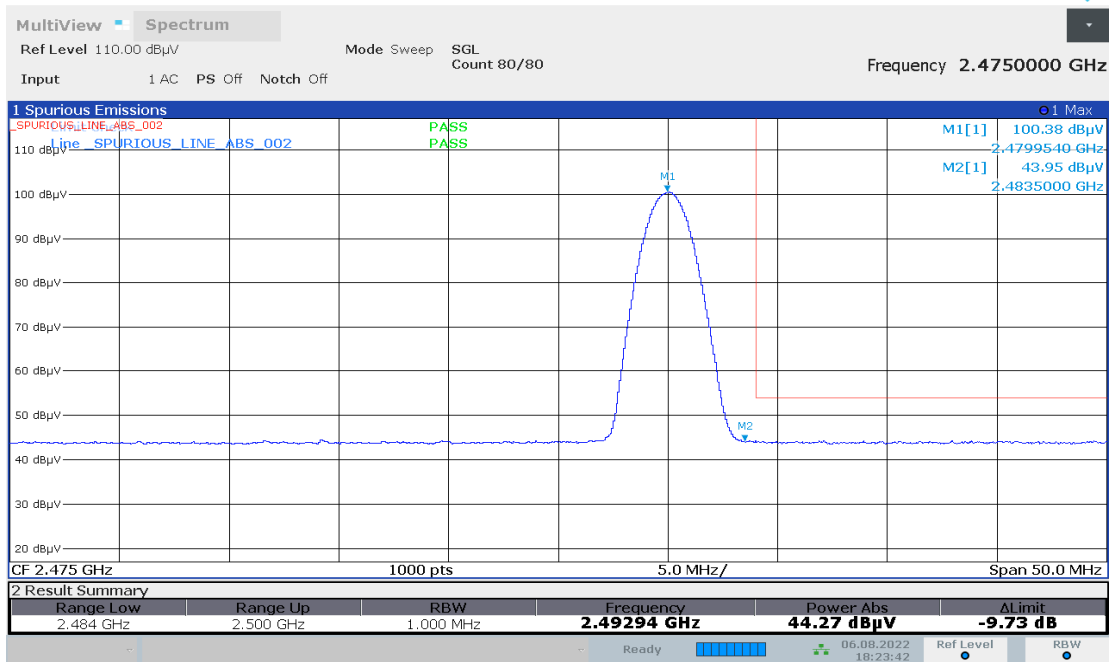

18:23:43 06.08.2022

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

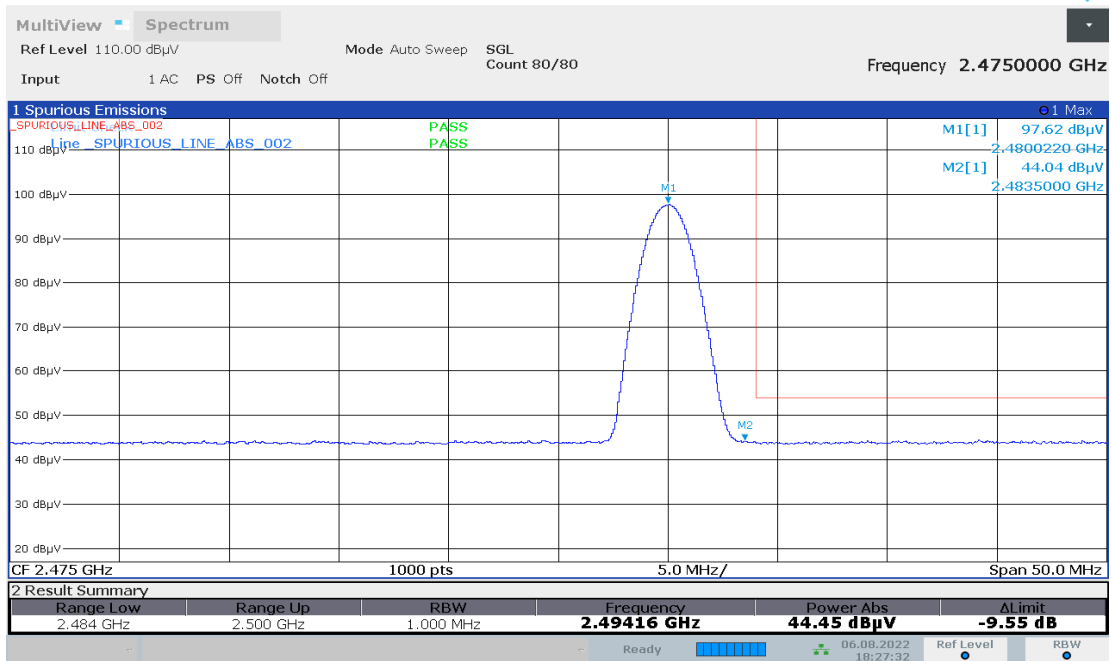

18:27:33 06.08.2022

Test: Bluetooth SAC Restricted Band Edge
Model Number: H35UCT9PW8AN S/N: 022TYP0004 EMC SR ID#: 26977-EMC-00104
Battery: PMNN4817A Accessory: AN000411A01
Test Channel: Low Test Frequency: 2402.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Z-Plane (BTLE 2M)

Restricted Band Edge (Low Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
2390.0000	-	53.7539	43.3891	-	74.0000	54.0000	-	-20.2461	-10.6109	-
Horizontal Radiated Emission Result										
2390.0000	-	54.1353	43.7777	-	74.0000	54.0000	-	-19.8647	-10.2223	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.5
 Test Performed by: Qawiman&Nazrin
 System MU: 5.84dB


Humidity (%): 69.9
 Test Date: Sun, 7 Aug, 2022

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

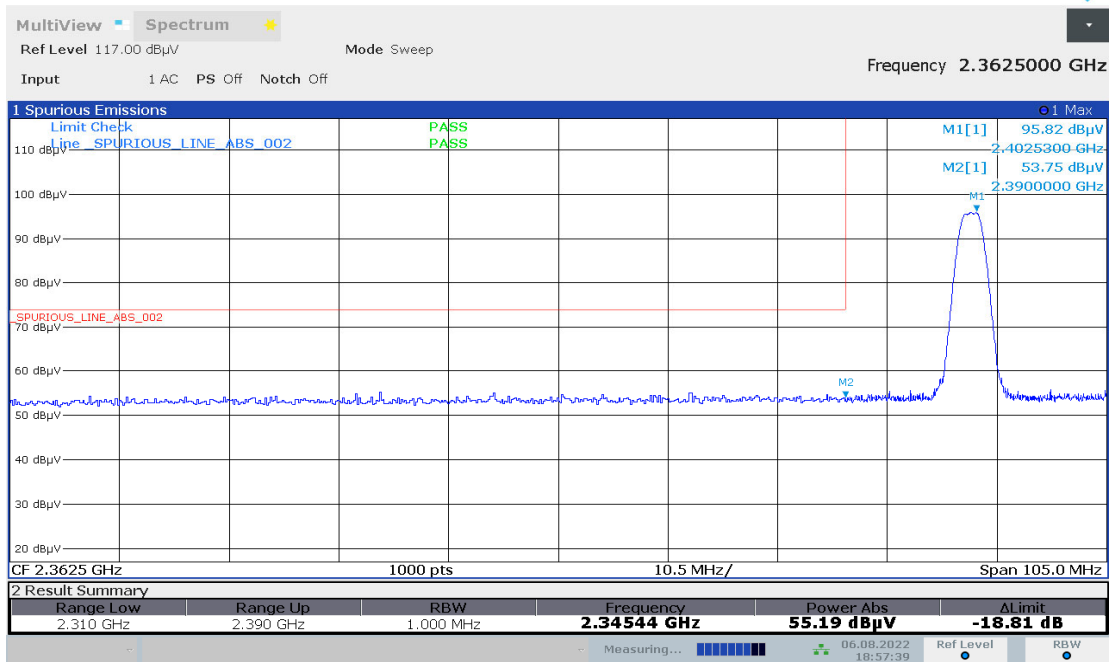


18:57:39 06.08.2022

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

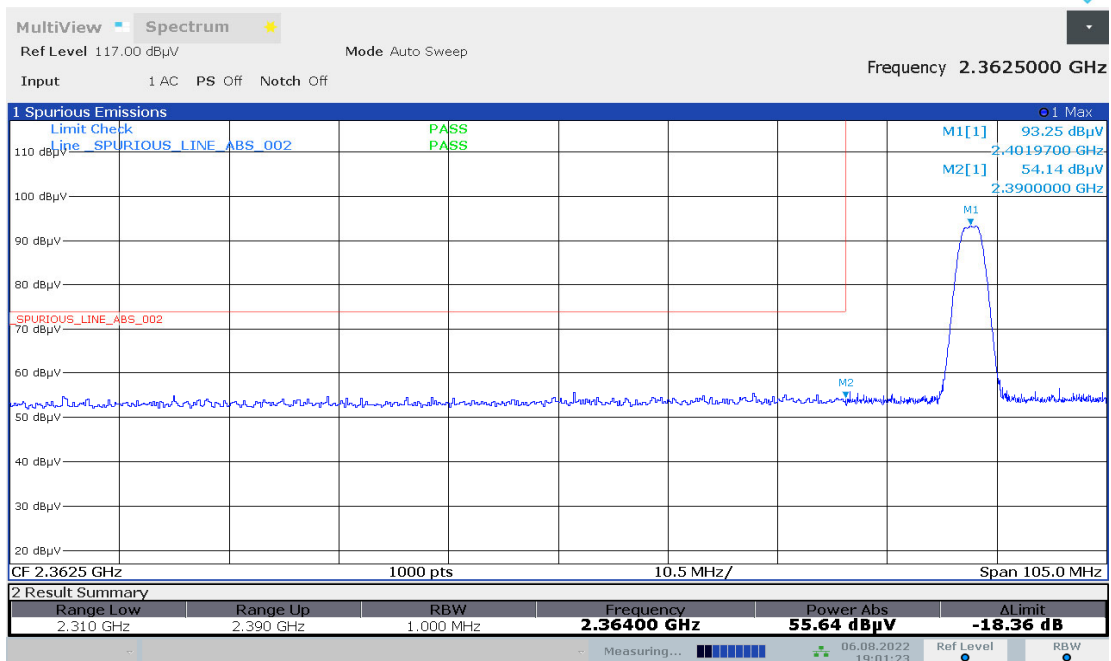


19:01:23 06.08.2022

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

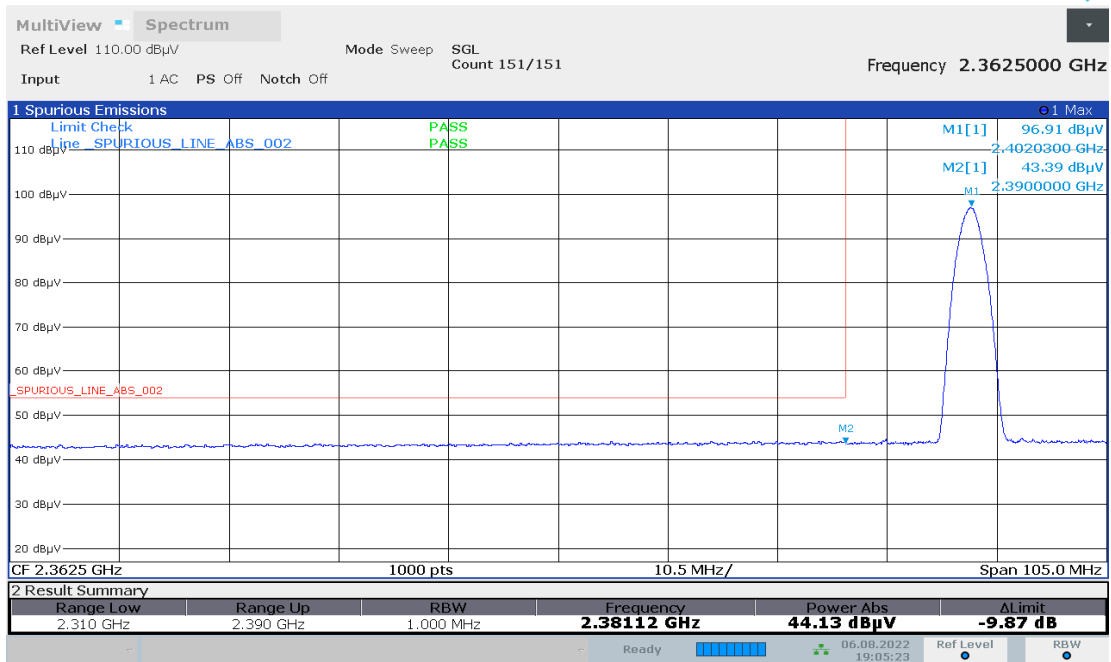

19:05:23 06.08.2022

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

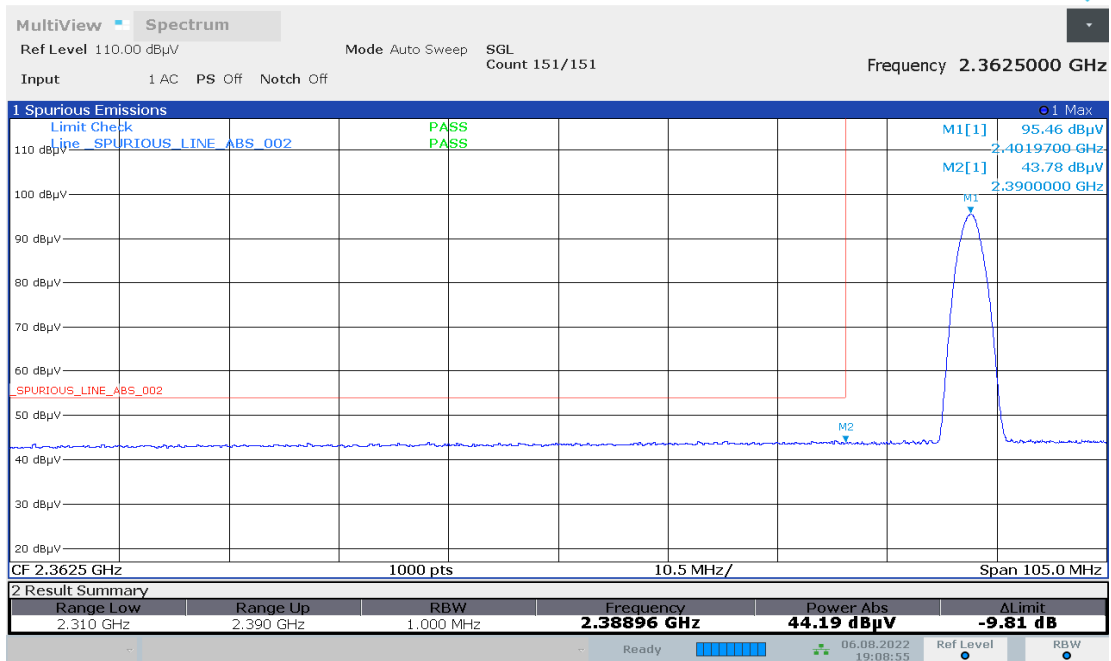

19:08:55 06.08.2022

Test: Bluetooth SAC Restricted Band Edge
Model Number: H35UCT9PW8AN S/N: 022TYP0004 EMC SR ID#: 26977-EMC-00104
Battery: PMNN4817A Accessory: AN000411A01
Test Channel: High Test Frequency: 2480.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Z-Plane (BTLE 2M)

Restricted Band Edge (High Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
2483.5000	-	53.9371	44.4475	-	74.0000	54.0000	-	-20.0629	-9.5525	-
Horizontal Radiated Emission Result										
2483.5000	-	52.9607	44.9999	-	74.0000	54.0000	-	-21.0393	-9.0001	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.5
 Test Performed by: Qawiman&Nazrin
 System MU: 5.84dB


Humidity (%): 69.9
 Test Date: Sun, 7 Aug, 2022

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

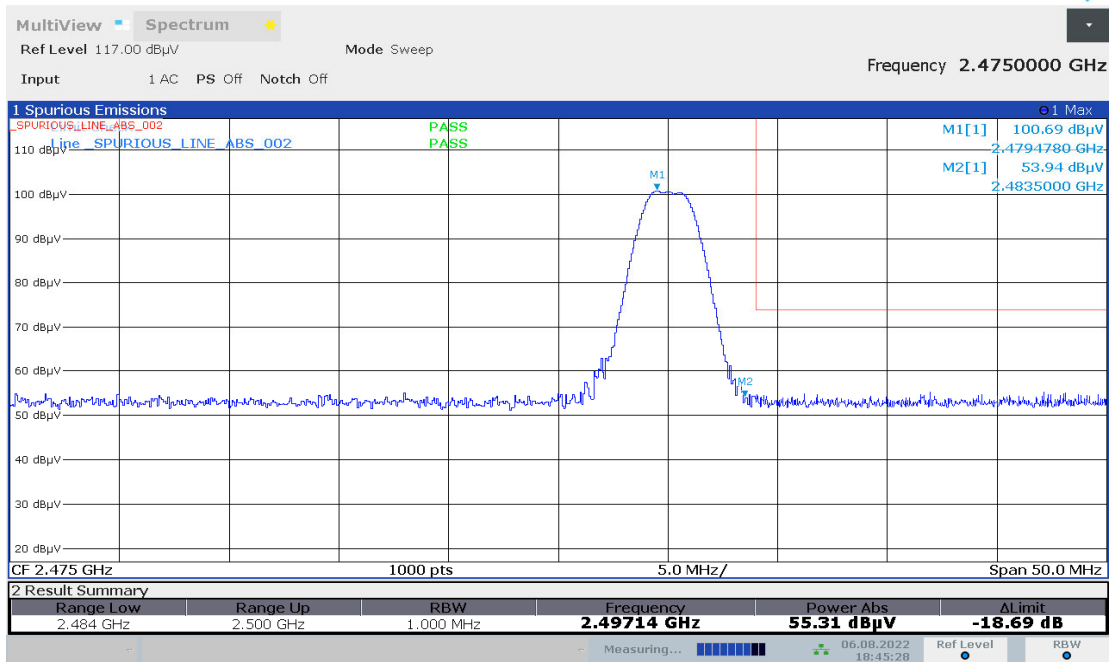


18:45:29 06.08.2022

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

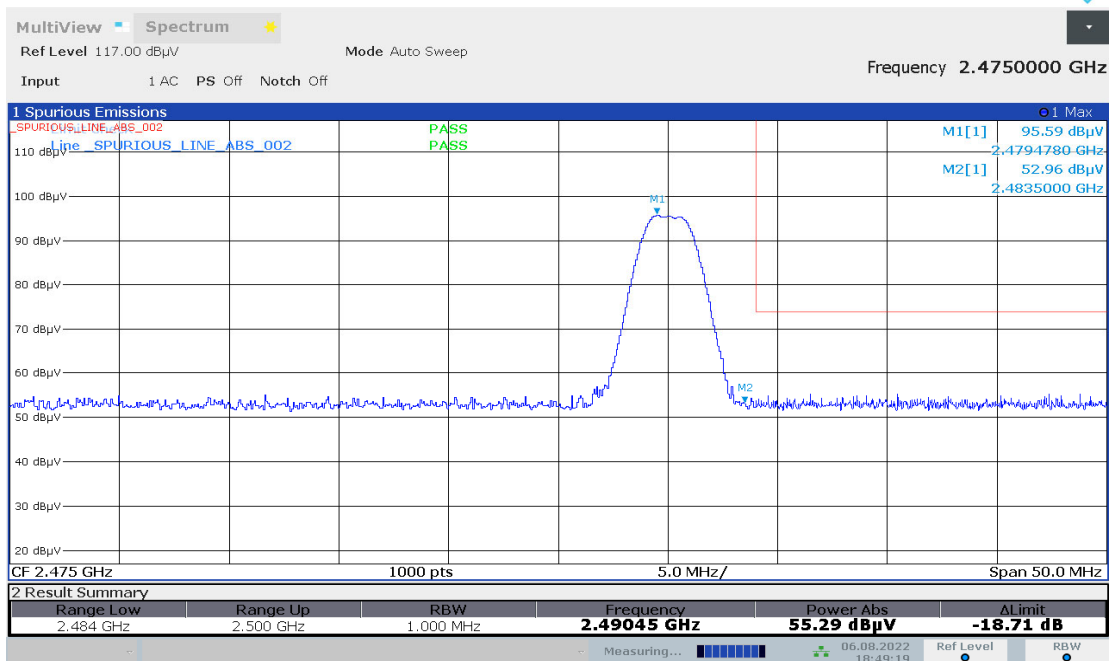


18:49:19 06.08.2022

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot


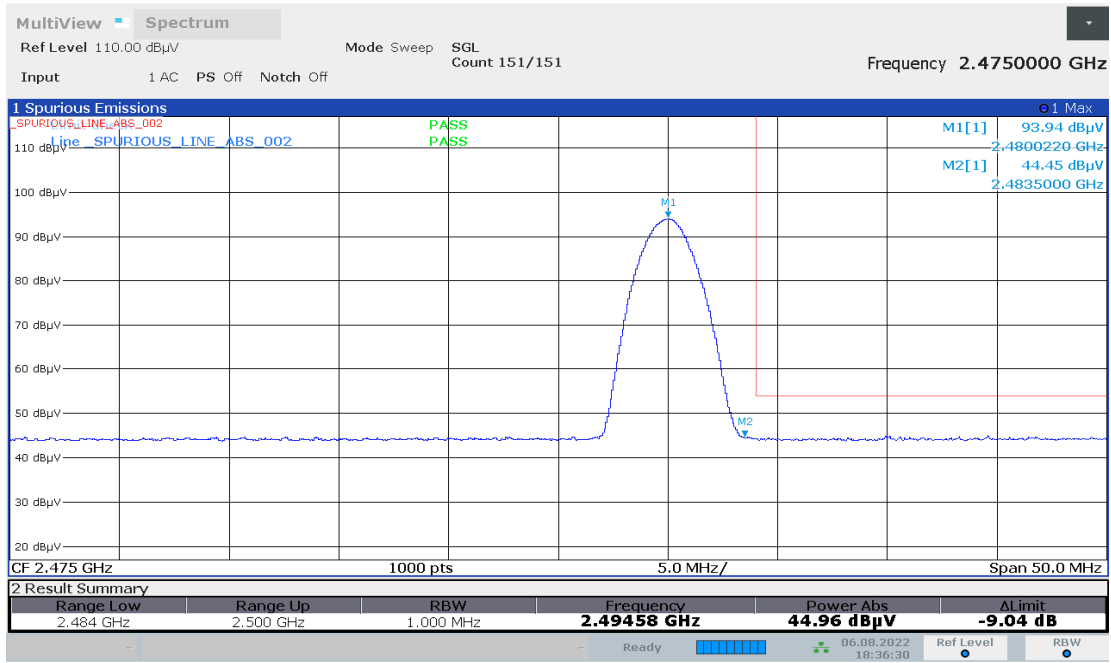


18:36:30 06.08.2022


Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

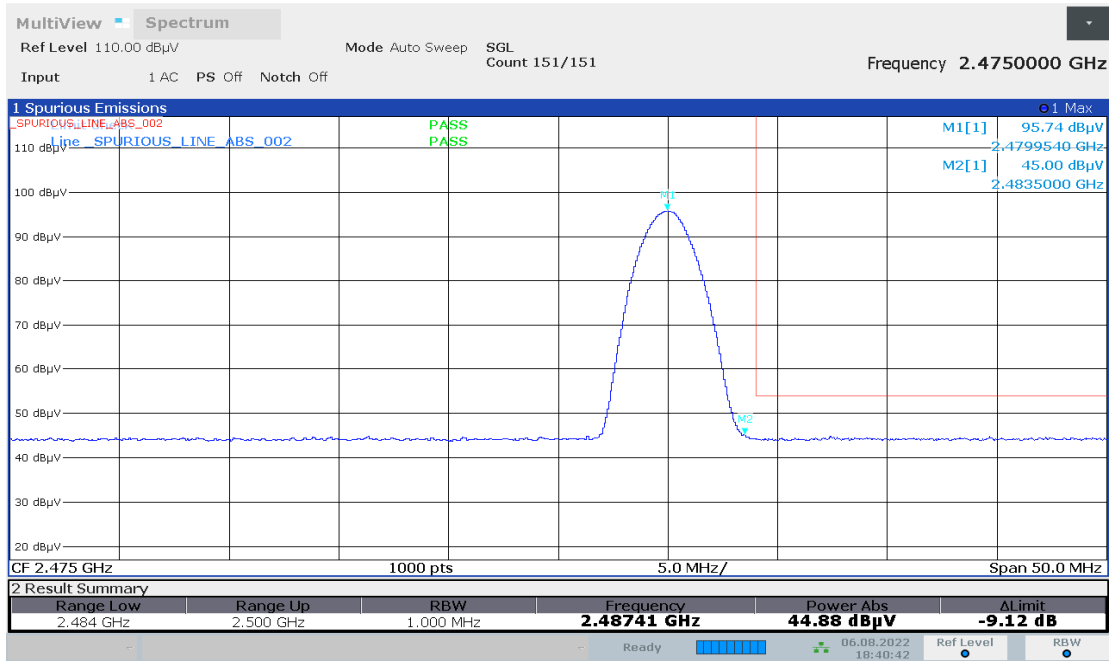


18:40:43 06.08.2022

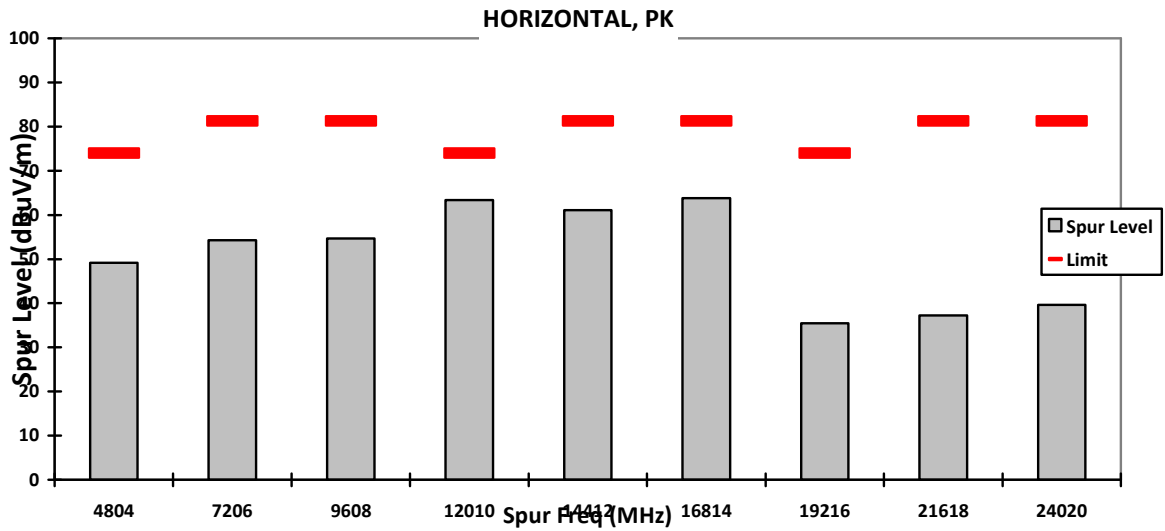
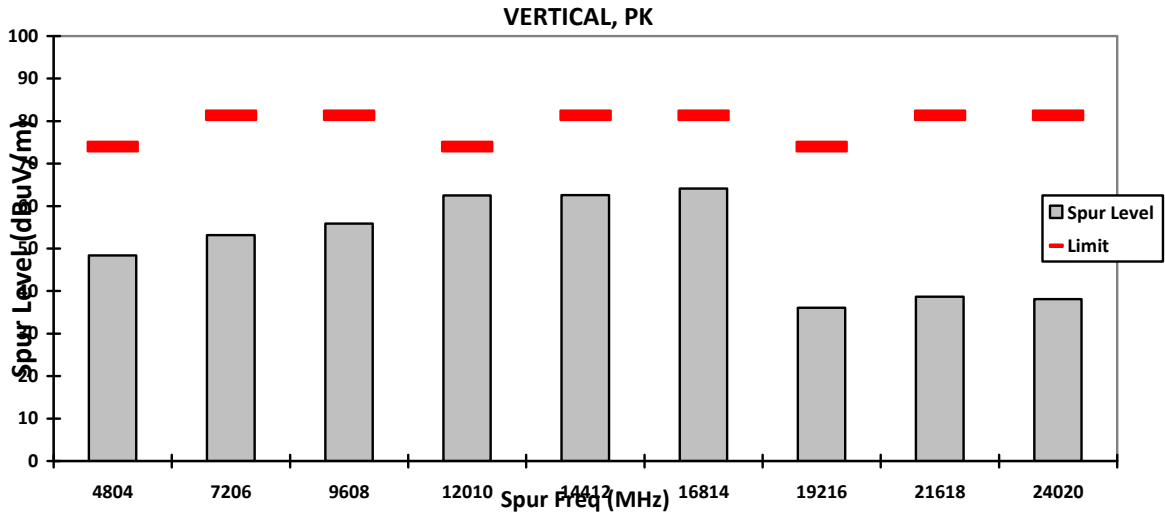


VERTICAL, AV

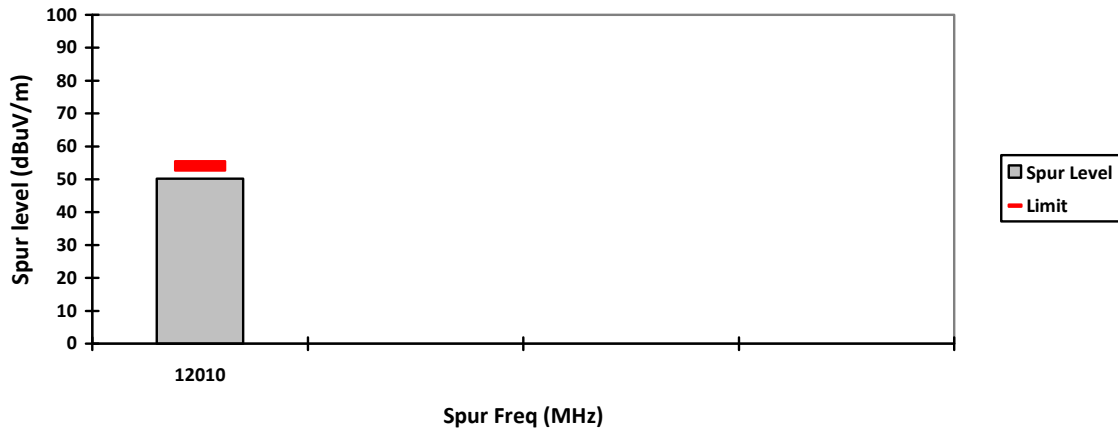


HORIZONTAL, AV

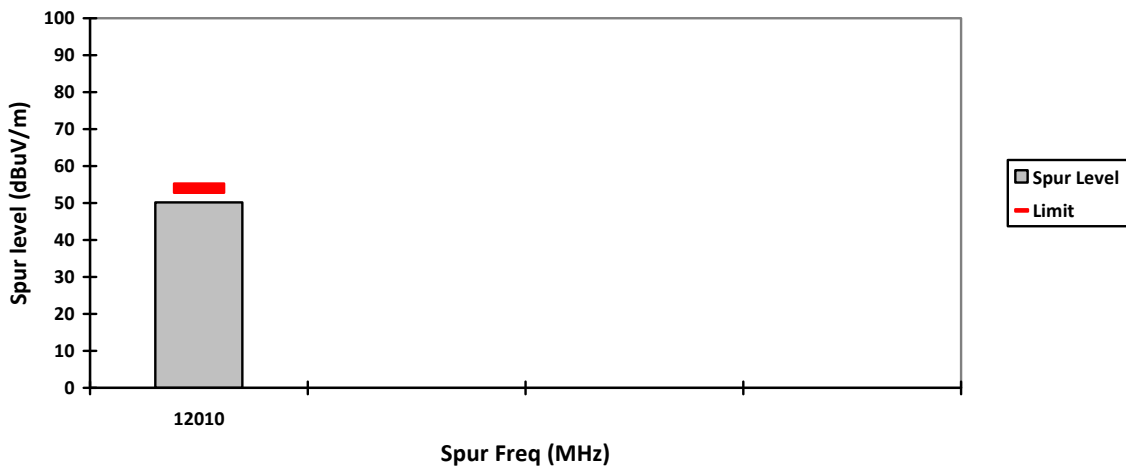


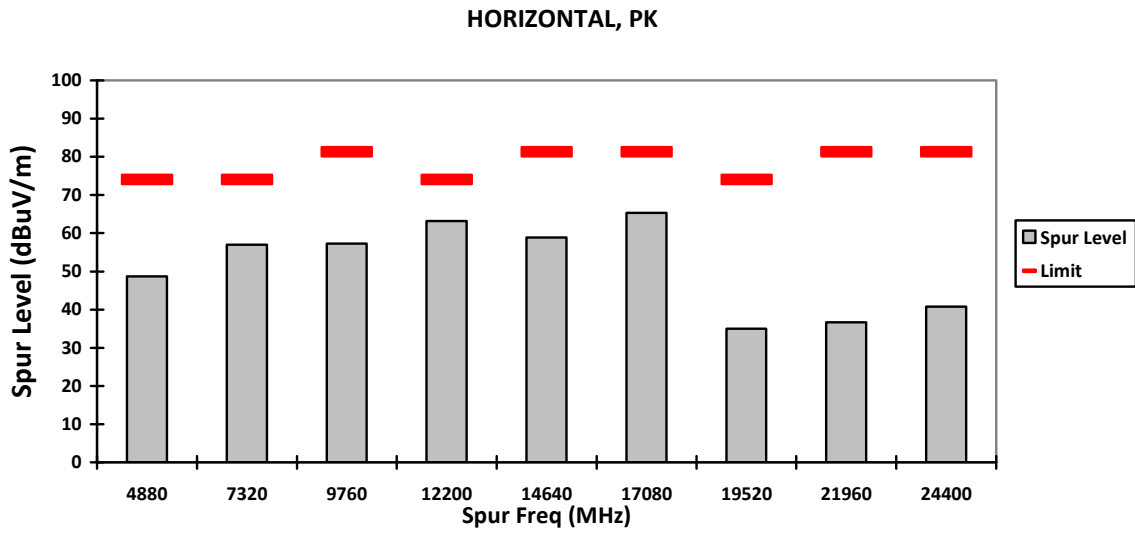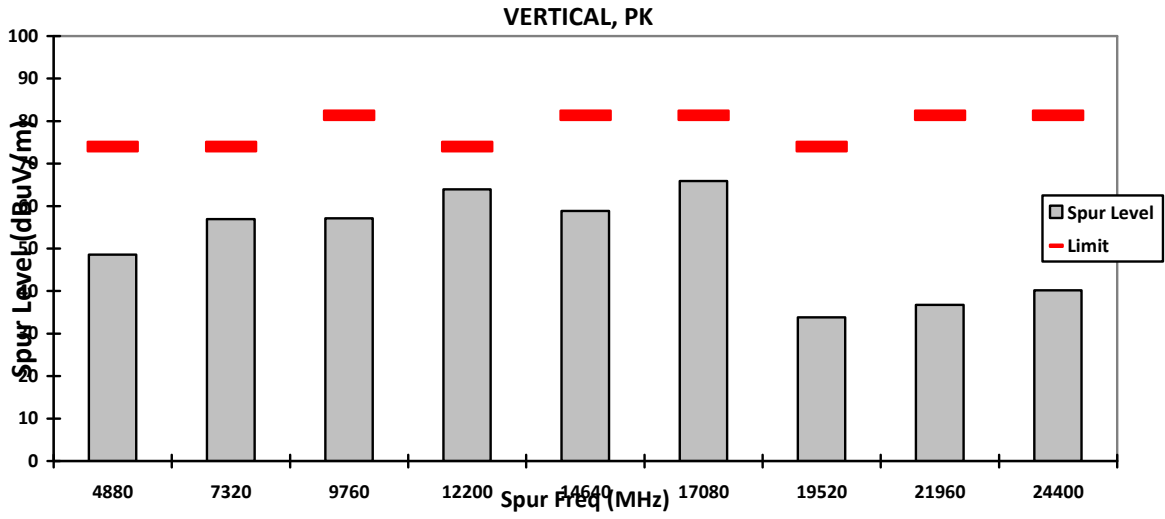

VERTICAL, AV

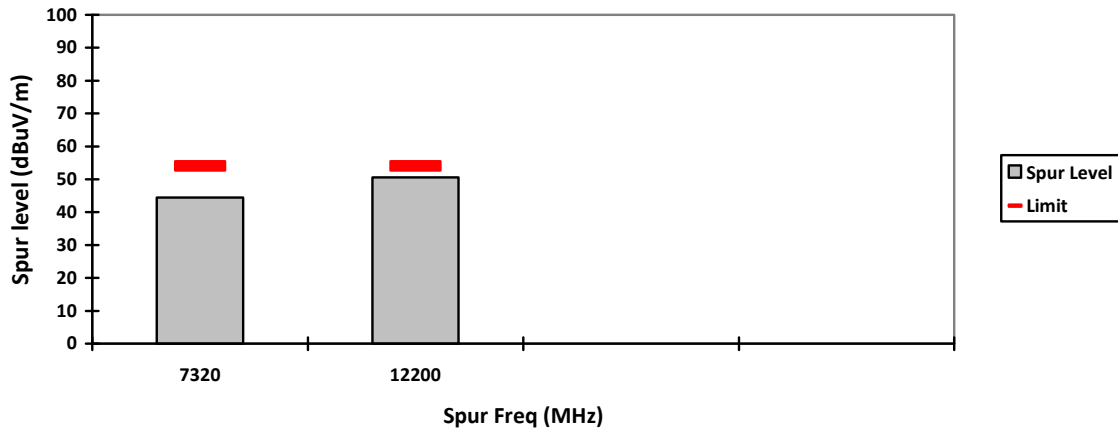

HORIZONTAL, AV

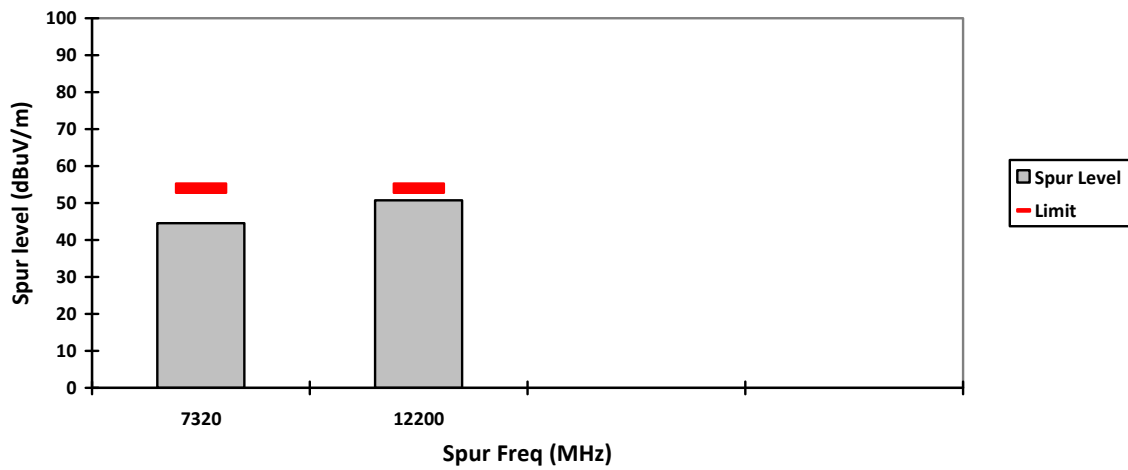

Test: Bluetooth SAC Transmitter Radiated Emission
Model#: H35UCT9PW8AN S/N: 022TYP0004 EMC SR ID#: 26977-EMC-00104
Battery: PMNN4817A Accessory: AN000411A01
Test Channel: High Test Frequency: 2480.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Z-Plane (BTLE 1M)



Radiated Emission (High Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4960	-	50.6962**	-	-	74.0000	-	-	23.3038	-	-
7440	-	57.7691**	44.7617**	-	74.0000	54.0000	-	16.2309	9.2383	-
9920	-	57.1121**	-	-	81.2993	-	-	24.1872	-	101.2993
12400	-	63.7418**	50.9161**	-	74.0000	54.0000	-	10.2582	3.0839	-
14880	-	60.9369**	-	-	81.2993	-	-	20.3624	-	101.2993
17360	-	64.9072**	-	-	81.2993	-	-	16.3921	-	101.2993
19840	-	35.2581**	-	-	74.0000	-	-	38.7419	-	-
22320	-	37.6378**	-	-	74.0000	-	-	36.3622	-	-
24800	-	41.4908**	-	-	81.2993	-	-	39.8085	-	101.2993
Horizontal Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4960	-	50.1680**	-	-	74.0000	-	-	23.8320	-	-
7440	-	57.3634**	44.8141**	-	74.0000	54.0000	-	16.6366	9.1859	-
9920	-	55.6336**	-	-	81.2993	-	-	25.6657	-	101.2993
12400	-	62.9874**	50.9132**	-	74.0000	54.0000	-	11.0126	3.0868	-
14880	-	61.3944**	-	-	81.2993	-	-	19.9049	-	101.2993
17360	-	64.9718**	-	-	81.2993	-	-	16.3275	-	101.2993
19840	-	34.6635**	-	-	74.0000	-	-	39.3365	-	-
22320	-	37.3913**	-	-	74.0000	-	-	36.6087	-	-
24800	-	40.9607**	-	-	81.2993	-	-	40.3386	-	101.2993


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.5 Humidity (%): 69.9
Test Performed by: Qawiman&Nazrin Test Date: Mon, 8 Aug, 2022
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**

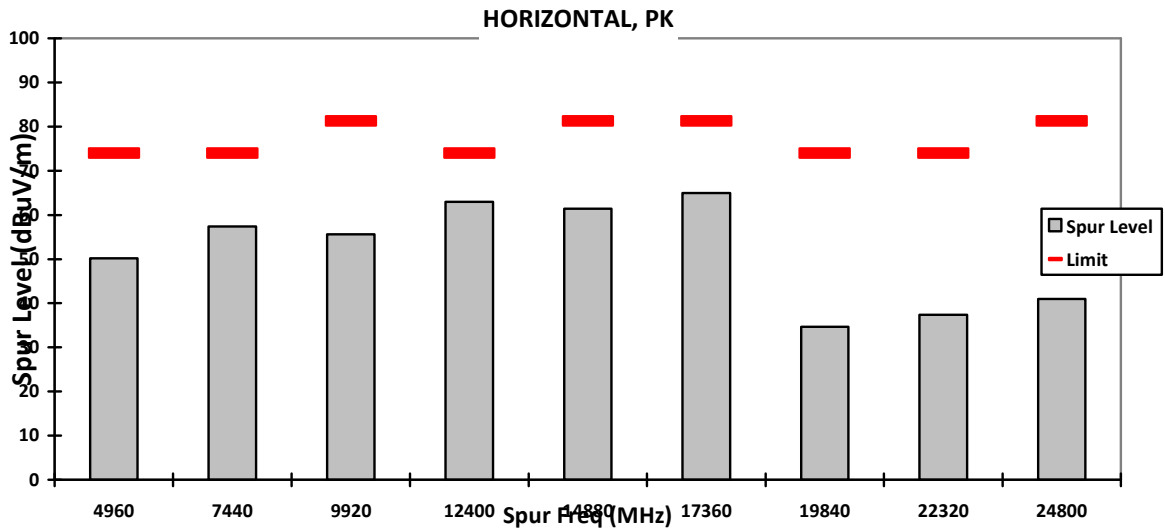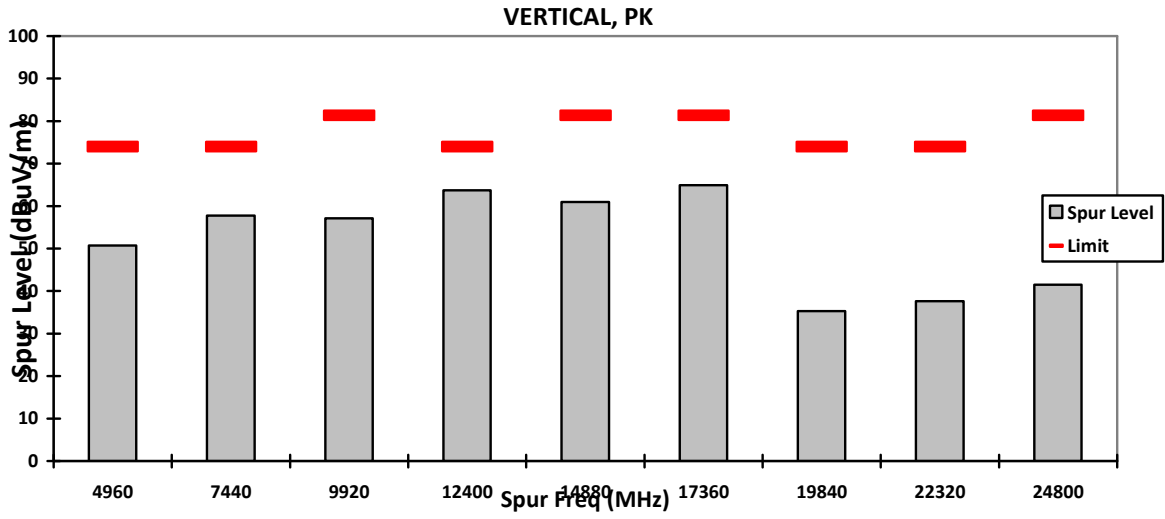

VERTICAL, AV

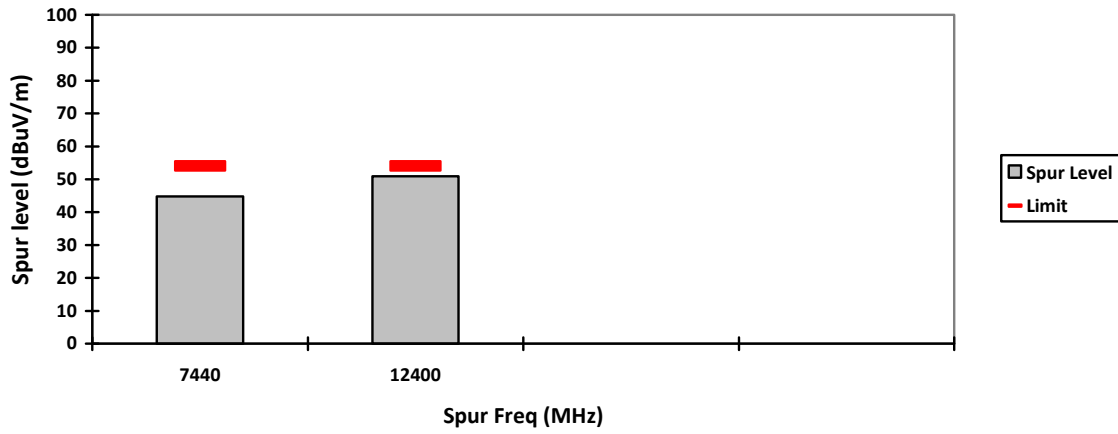

HORIZONTAL, AV

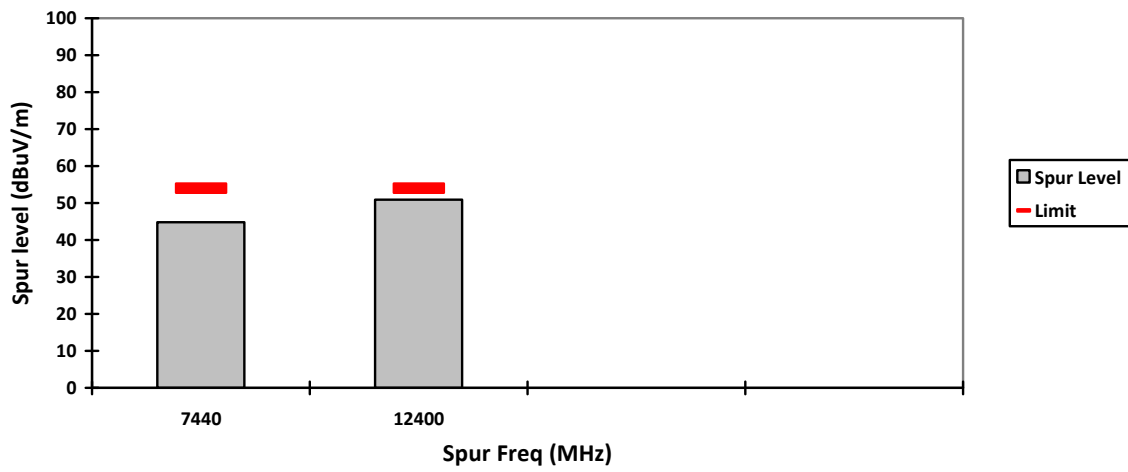

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: H35UCT9PW8AN S/N: 022TYP0004 EMC SR ID#: 26977-EMC-00104
Battery: PMNN4817A Accessory: AN000411A01
Test Channel: Low Test Frequency: 2402.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Z-Plane (BTLE 2M)

Radiated Emission (Low Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4804	-	49.8968**	-	-	74.0000	-	-	24.1032	-	-
7206	-	53.8992**	-	-	81.2993	-	-	27.4001	-	101.2993
9608	-	56.5498**	-	-	81.2993	-	-	24.7495	-	101.2993
12010	-	63.1512**	50.8423**	-	74.0000	54.0000	-	10.8488	3.1577	-
14412	-	62.4144**	-	-	81.2993	-	-	18.8849	-	101.2993
16814	-	63.8116**	-	-	81.2993	-	-	17.4877	-	101.2993
19216	-	36.3718**	-	-	74.0000	-	-	37.6282	-	-
21618	-	37.0863**	-	-	81.2993	-	-	44.2130	-	101.2993
24020	-	37.9255**	-	-	81.2993	-	-	43.3738	-	101.2993



Horizontal Radiated Emission Result

Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4804	-	48.7099**	-	-	74.0000	-	-	25.2901	-	-
7206	-	54.1530**	-	-	81.2993	-	-	27.1463	-	101.2993
9608	-	55.8870**	-	-	81.2993	-	-	25.4123	-	101.2993
12010	-	62.8153**	50.6911**	-	74.0000	54.0000	-	11.1847	3.3089	-
14412	-	61.3861**	-	-	81.2993	-	-	19.9132	-	101.2993
16814	-	64.0163**	-	-	81.2993	-	-	17.2830	-	101.2993
19216	-	35.2943**	-	-	74.0000	-	-	38.7057	-	-
21618	-	37.4835**	-	-	81.2993	-	-	43.8158	-	101.2993
24020	-	38.0017**	-	-	81.2993	-	-	43.2976	-	101.2993


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.5 Humidity (%): 69.9
Test Performed by: Qawiman&Nazrin Test Date: Mon, 8 Aug, 2022
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.

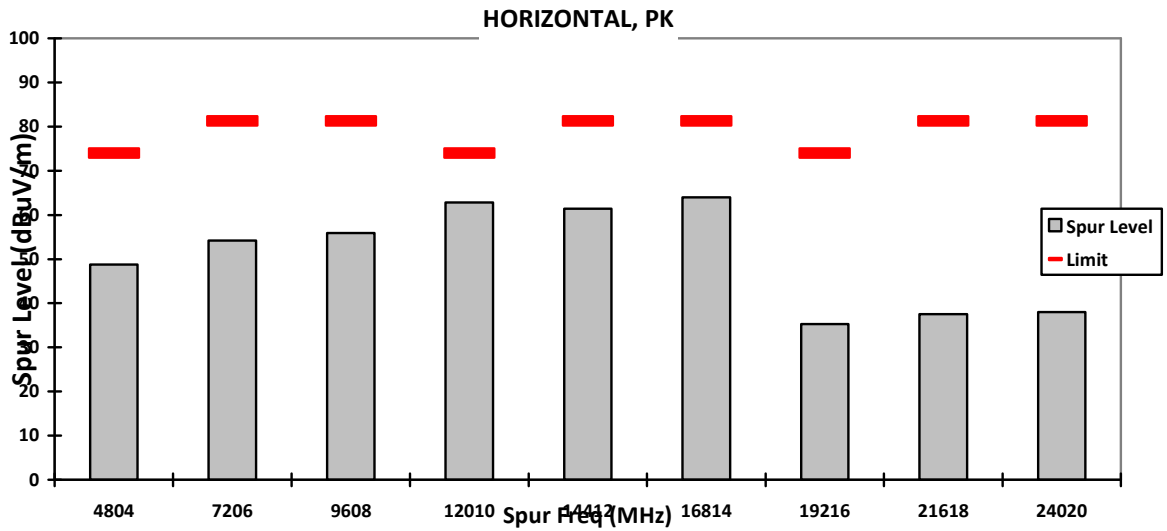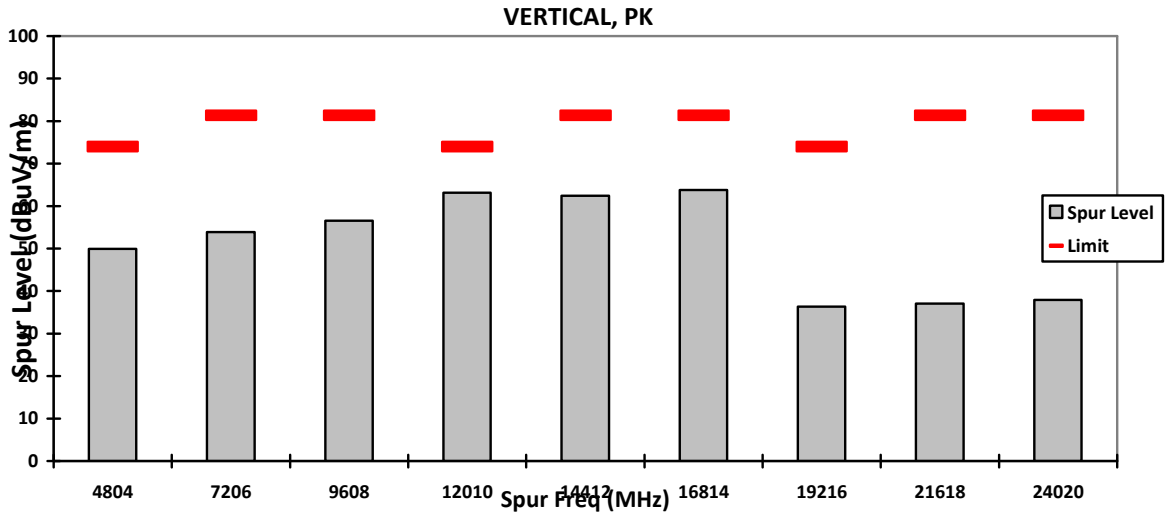

VERTICAL, AV

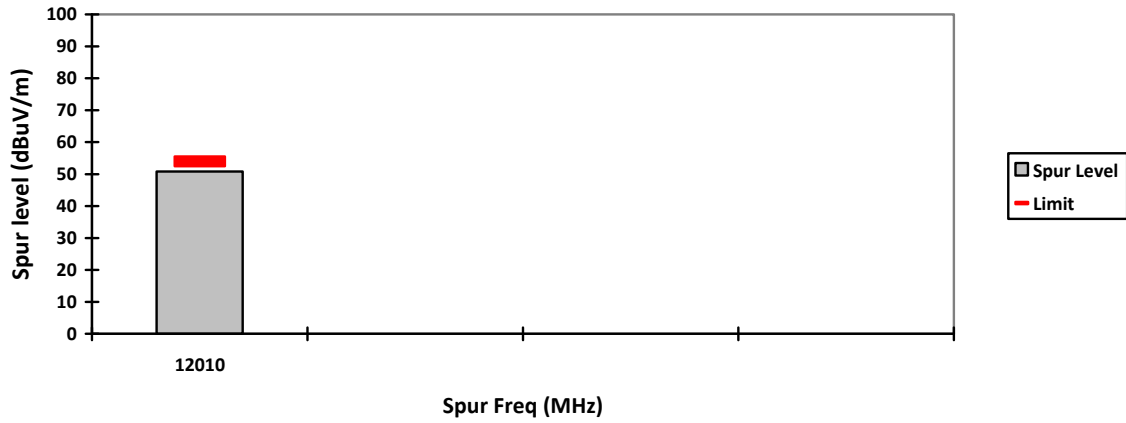

HORIZONTAL, AV

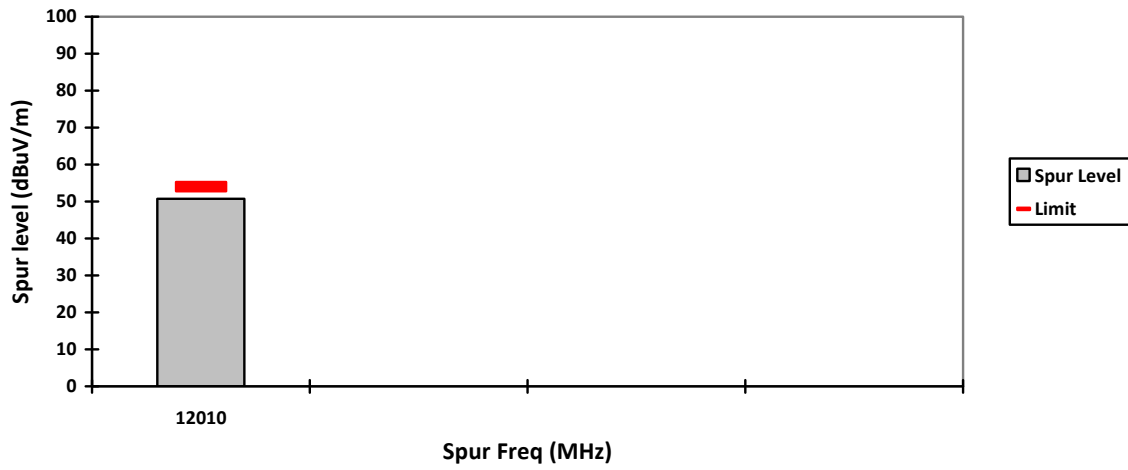

Test: Bluetooth SAC Transmitter Radiated Emission
Model#: H35UCT9PW8AN S/N: 022TYP0004 EMC SR ID#: 26977-EMC-00104
Battery: PMNN4817A Accessory: AN000411A01
Test Channel: Mid Test Frequency: 2440.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Z-Plane (BTLE 2M)



Radiated Emission (Mid Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dB μ V/m)	Spur level PK (dB μ V/m)	Spur level AV (dB μ V/m)	Limit QPK (dB μ V/m)	Limit PK (dB μ V/m)	Limit AV (dB μ V/m)	Margin QPK (dB μ V/m)	Margin PK (dB μ V/m)	Margin AV (dB μ V/m)	Carrier PK Power (dB μ V/m)
4880	-	50.0544**	-	-	74.0000	-	-	23.9456	-	-
7320	-	56.9875**	44.9902**	-	74.0000	54.0000	-	17.0125	9.0098	-
9760	-	56.1653**	-	-	81.2993	-	-	25.1340	-	101.2993
12200	-	63.4323**	51.3711**	-	74.0000	54.0000	-	10.5677	2.6289	-
14640	-	59.7423**	-	-	81.2993	-	-	21.5570	-	101.2993
17080	-	65.2452**	-	-	81.2993	-	-	16.0541	-	101.2993
19520	-	33.8535**	-	-	74.0000	-	-	40.1465	-	-
21960	-	36.9042**	-	-	81.2993	-	-	44.3951	-	101.2993
24400	-	40.7536**	-	-	81.2993	-	-	40.5457	-	101.2993
Horizontal Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dB μ V/m)	Spur level PK (dB μ V/m)	Spur level AV (dB μ V/m)	Limit QPK (dB μ V/m)	Limit PK (dB μ V/m)	Limit AV (dB μ V/m)	Margin QPK (dB μ V/m)	Margin PK (dB μ V/m)	Margin AV (dB μ V/m)	Carrier PK Power (dB μ V/m)
4880	-	49.0943**	-	-	74.0000	-	-	24.9057	-	-
7320	-	56.7852**	45.0982**	-	74.0000	54.0000	-	17.2148	8.9018	-
9760	-	56.2860**	-	-	81.2993	-	-	25.0133	-	101.2993
12200	-	63.0955**	51.2076**	-	74.0000	54.0000	-	10.9045	2.7924	-
14640	-	59.9145**	-	-	81.2993	-	-	21.3848	-	101.2993
17080	-	64.7025**	-	-	81.2993	-	-	16.5968	-	101.2993
19520	-	34.2453**	-	-	74.0000	-	-	39.7547	-	-
21960	-	36.1245**	-	-	81.2993	-	-	45.1748	-	101.2993
24400	-	41.0593**	-	-	81.2993	-	-	40.2400	-	101.2993


Remarks:	Marginal Result	Fail Result
Pass Result		

Temperature (degC): 23.5 Humidity (%): 69.9
 Test Performed by: Qawiman&Nazrin Test Date: Mon, 8 Aug, 2022
 System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.

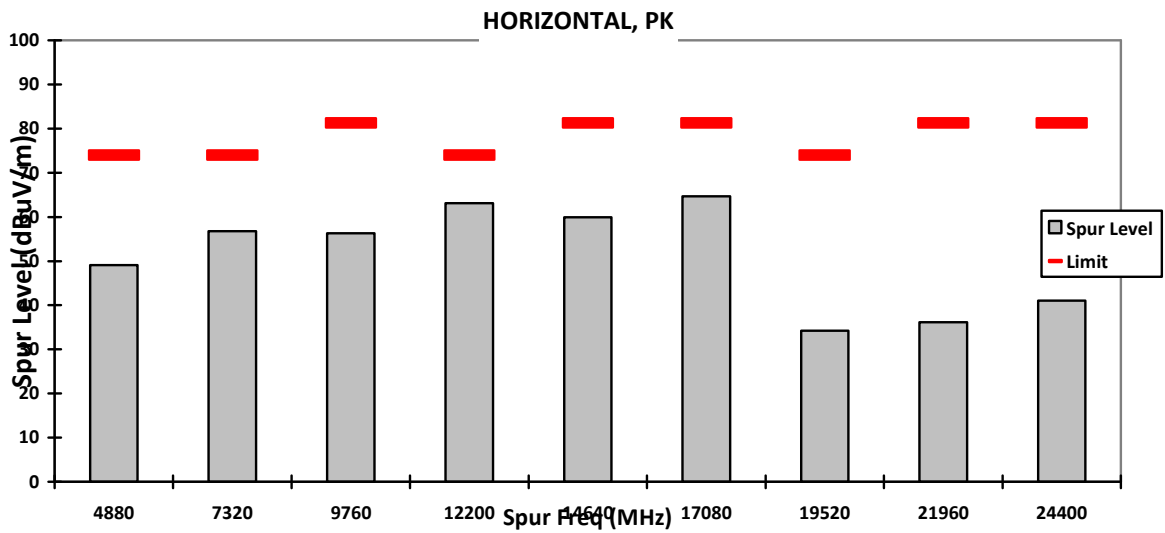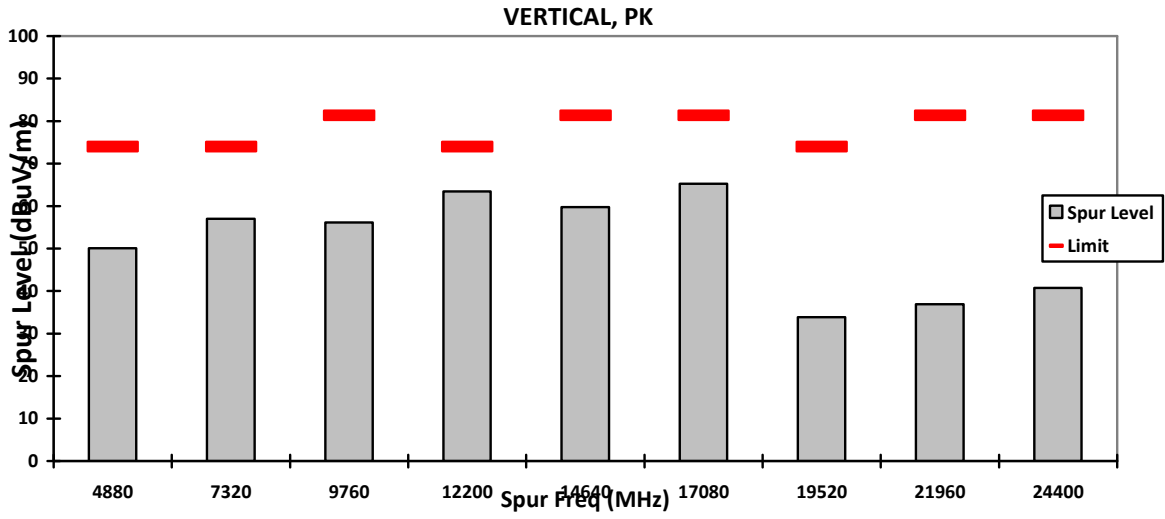

VERTICAL, AV

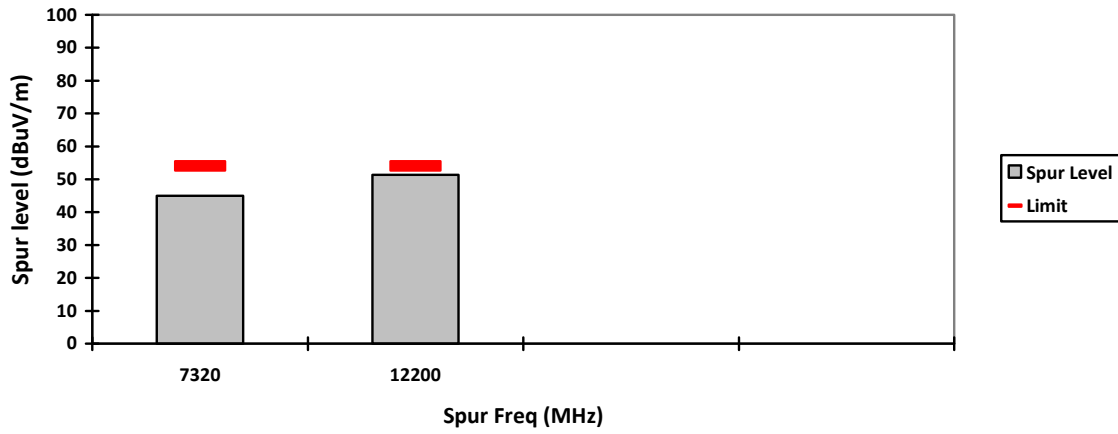

HORIZONTAL, AV

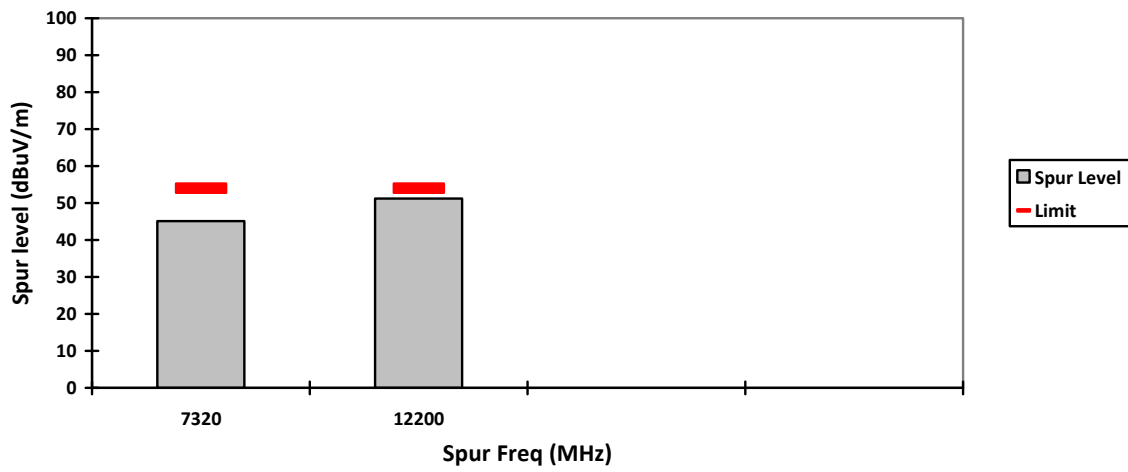

Test: Bluetooth SAC Transmitter Radiated Emission
Model#: H35UCT9PW8AN S/N: 022TYP0004 EMC SR ID#: 26977-EMC-00104
Battery: PMNN4817A Accessory: AN000411A01
Test Channel: High Test Frequency: 2480.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Z-Plane (BTLE 2M)



Radiated Emission (High Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4960	-	49.4110**	-	-	74.0000	-	-	24.5890	-	-
7440	-	57.2904**	45.3617**	-	74.0000	54.0000	-	16.7096	8.6383	-
9920	-	56.4042**	-	-	81.2993	-	-	24.8951	-	101.2993
12400	-	63.1990**	51.2689**	-	74.0000	54.0000	-	10.8010	2.7311	-
14880	-	60.6407**	-	-	81.2993	-	-	20.6586	-	101.2993
17360	-	66.0955**	-	-	81.2993	-	-	15.2038	-	101.2993
19840	-	34.6069**	-	-	74.0000	-	-	39.3931	-	-
22320	-	37.8189**	-	-	74.0000	-	-	36.1811	-	-
24800	-	41.3783**	-	-	81.2993	-	-	39.9210	-	101.2993
Horizontal Radiated Emission Result										
4960	-	49.8519**	-	-	74.0000	-	-	24.1481	-	-
7440	-	57.2107**	45.4105**	-	74.0000	54.0000	-	16.7893	8.5895	-
9920	-	57.1543**	-	-	81.2993	-	-	24.1450	-	101.2993
12400	-	63.1294**	51.2689**	-	74.0000	54.0000	-	10.8706	2.7311	-
14880	-	61.3590**	-	-	81.2993	-	-	19.9403	-	101.2993
17360	-	65.2980**	-	-	81.2993	-	-	16.0013	-	101.2993
19840	-	35.0639**	-	-	74.0000	-	-	38.9361	-	-
22320	-	39.1776**	-	-	74.0000	-	-	34.8224	-	-
24800	-	41.0784**	-	-	81.2993	-	-	40.2209	-	101.2993


Remarks:	Marginal Result	Fail Result
Pass Result		

Temperature (degC): 23.5 Humidity (%): 69.9
Test Performed by: Qawiman&Nazrin Test Date: Mon, 8 Aug, 2022
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-1800MHz), 6.02 dB (1800MHz-4000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.

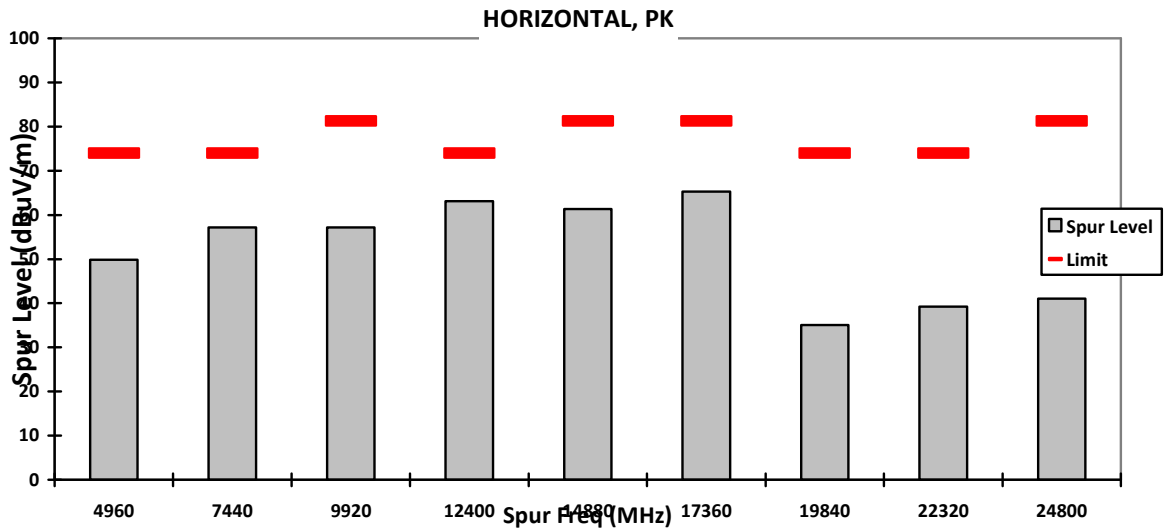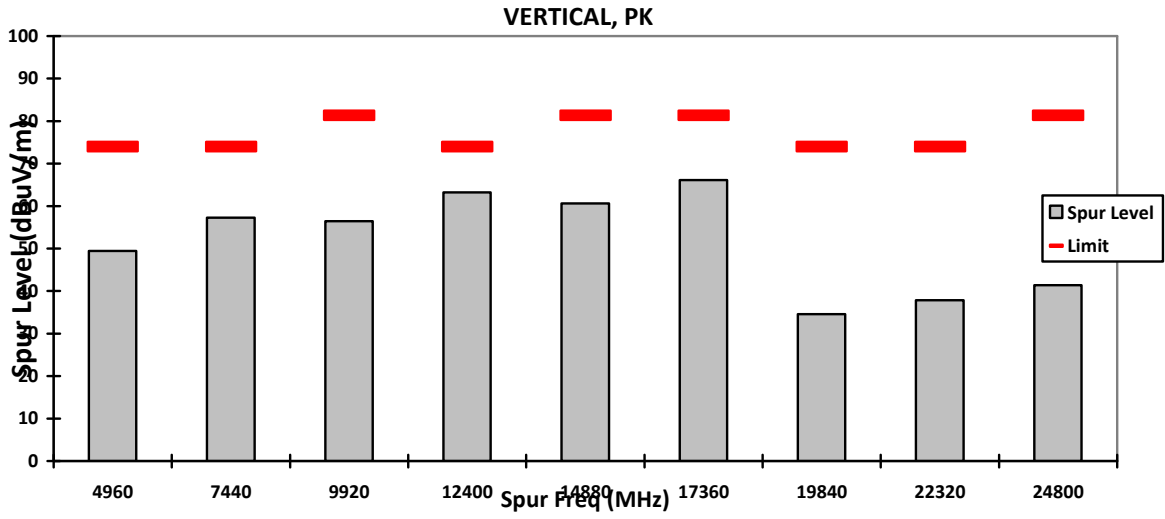

VERTICAL, AV

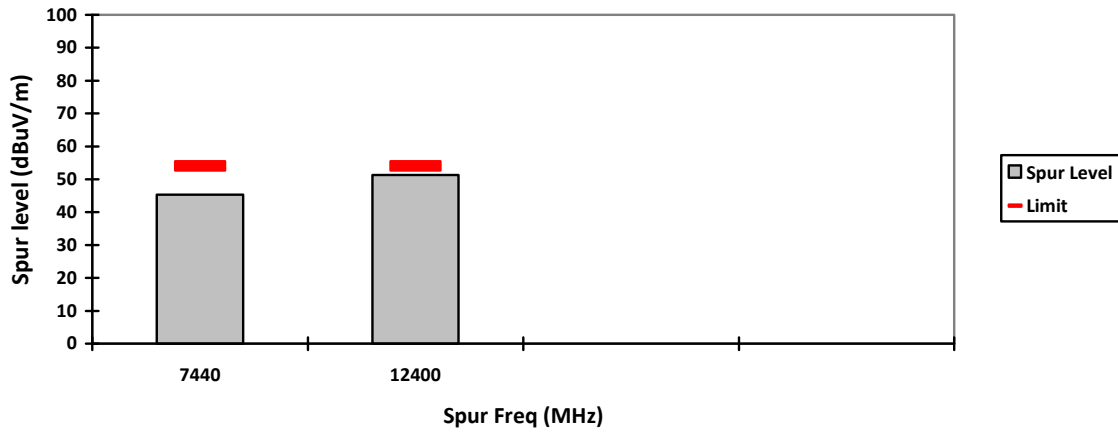

HORIZONTAL, AV

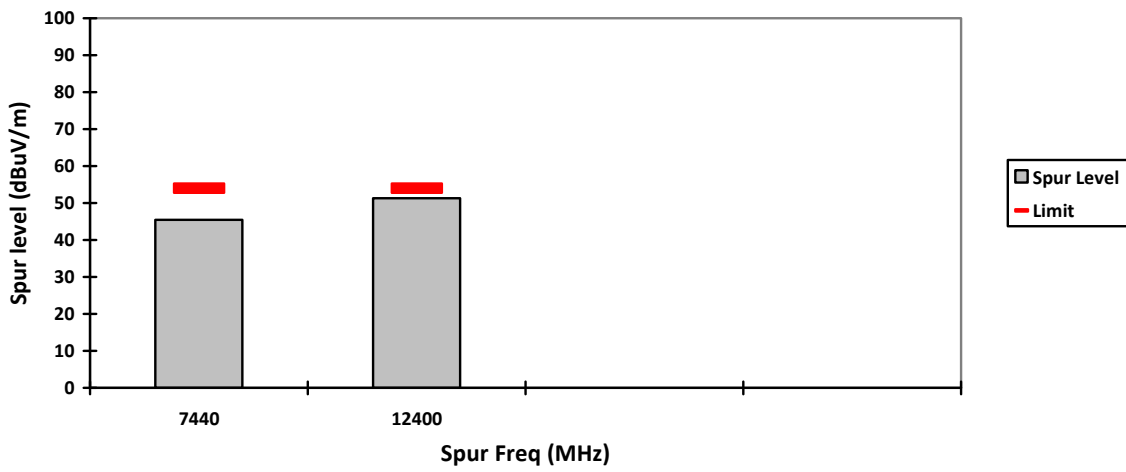

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: H35UCT9PW8AN S/N: 022TYP0018, 022TYP0003, 022TYP0004 EMC SR ID#: 26977-EMC-00118
Battery: PMNN4817A Accessory: PMPN4591A-CF5, 3087791G01, AN000411A01
Test Channel: High Test Frequency: 2480.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Y-Plane (BTLE 2M)

Radiated Emission (High Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
69.2305	24.7188	-	-	40.0000	-	-	15.2812	-	-	-
111.1154	22.8941	-	-	43.5000	-	-	20.6059	-	-	-
149.3522	19.8713	-	-	43.5000	-	-	23.6287	-	-	-
153.5372	20.9243	-	-	43.5000	-	-	22.5757	-	-	-
162.0717	20.7140	-	-	43.5000	-	-	22.7860	-	-	-
262.2263	18.3046	-	-	46.0000	-	-	27.6954	-	-	-
Horizontal Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
69.0557	24.4208	-	-	40.0000	-	-	15.5792	-	-	-
111.6159	24.1631	-	-	43.5000	-	-	19.3369	-	-	-
150.0405	27.2535	-	-	43.5000	-	-	16.2465	-	-	-
153.6011	30.1728	-	-	43.5000	-	-	13.3272	-	-	-
161.6811	27.1235	-	-	43.5000	-	-	16.3765	-	-	-
262.9286	24.9933	-	-	46.0000	-	-	21.0067	-	-	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Temperature (degC): 23.8 Humidity (%): 70.2
 Test Performed by: Qawiman&Nazrin Test Date: Sun, 28 Aug, 2022
 System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.

VERTICAL, QPK

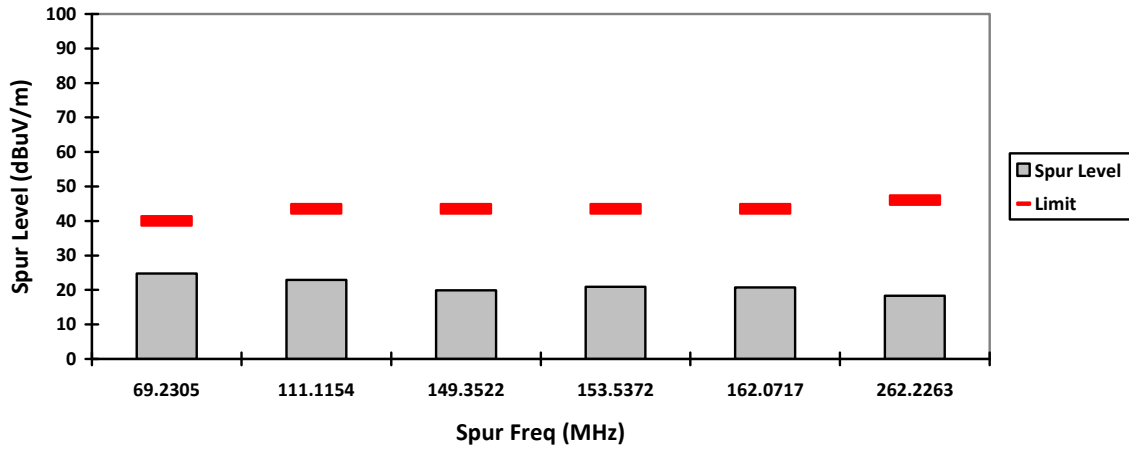

HORIZONTAL, QPK

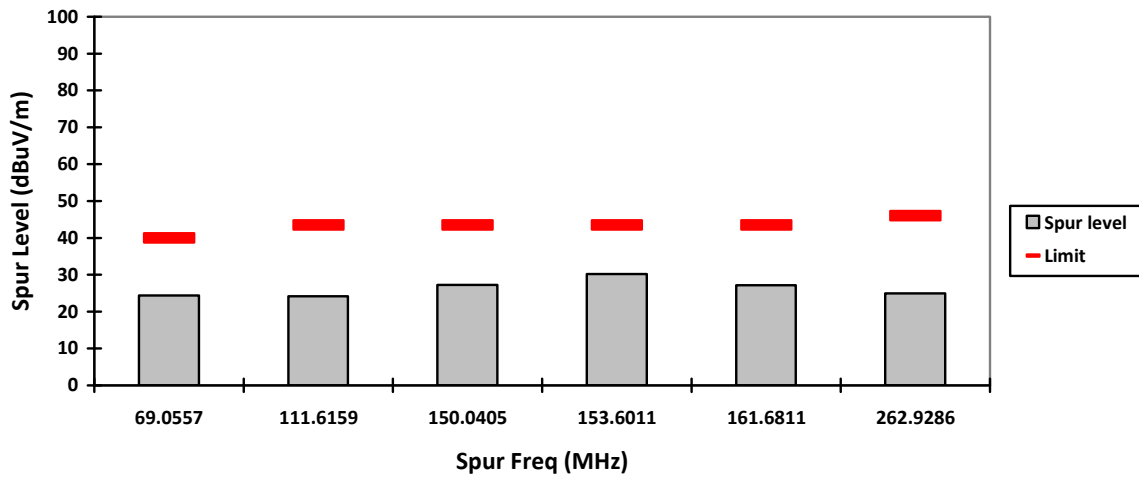

Test: Bluetooth SAC Transmitter Radiated Emission
Model#: H35UCT9PW8AN S/N: 022TYP0018, 022TYP0003, 022TYP0004 EMC SR ID#: 26977-EMC-00118
Battery: PMNN4817A Accessory: PMPN4591A-CF5, 3087791G01, AN000411A01
Test Channel: High Test Frequency: 2480.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Y-Plane (BTLE 2M)

Radiated Emission (High Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dB μ V/m)	Spur level PK (dB μ V/m)	Spur level AV (dB μ V/m)	Limit QPK (dB μ V/m)	Limit PK (dB μ V/m)	Limit AV (dB μ V/m)	Margin QPK (dB μ V/m)	Margin PK (dB μ V/m)	Margin AV (dB μ V/m)	Carrier PK Power (dB μ V/m)
51.4257	15.4954	-	-	40.0000	-	-	24.5046	-	-	-
66.0425	28.2206	-	-	40.0000	-	-	11.7794	-	-	-
108.5152	22.8803	-	-	43.5000	-	-	20.6197	-	-	-
156.3170	19.5609	-	-	43.5000	-	-	23.9391	-	-	-
177.3548	16.2397	-	-	43.5000	-	-	27.2603	-	-	-
195.4681	13.7414	-	-	43.5000	-	-	29.7586	-	-	-
262.4590	20.0413	-	-	46.0000	-	-	25.9587	-	-	-
Horizontal Radiated Emission Result										
50.7594	14.2095	-	-	40.0000	-	-	25.7905	-	-	-
65.5001	25.5987	-	-	40.0000	-	-	14.4013	-	-	-
108.3684	23.8481	-	-	43.5000	-	-	19.6519	-	-	-
156.3080	21.9090	-	-	43.5000	-	-	21.5910	-	-	-
176.8782	19.8506	-	-	43.5000	-	-	23.6494	-	-	-
196.0515	24.9439	-	-	43.5000	-	-	18.5561	-	-	-
262.0225	27.4913	-	-	46.0000	-	-	18.5087	-	-	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Temperature (degC): 23.8 **Humidity (%): 70.2**
Test Performed by: Qawiman&Nazrin **Test Date: Sun, 28 Aug, 2022** **System MU:**
5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**

VERTICAL, QPK

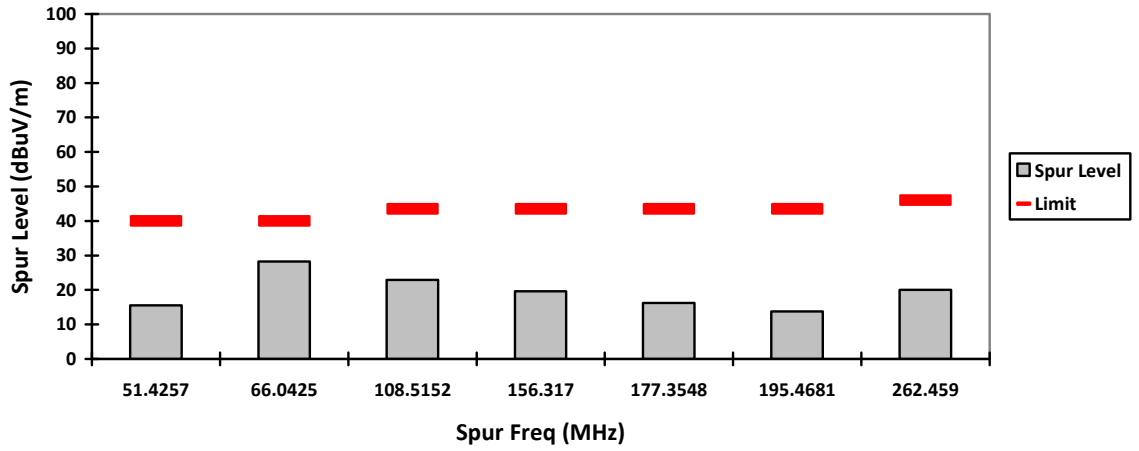


HORIZONTAL, QPK

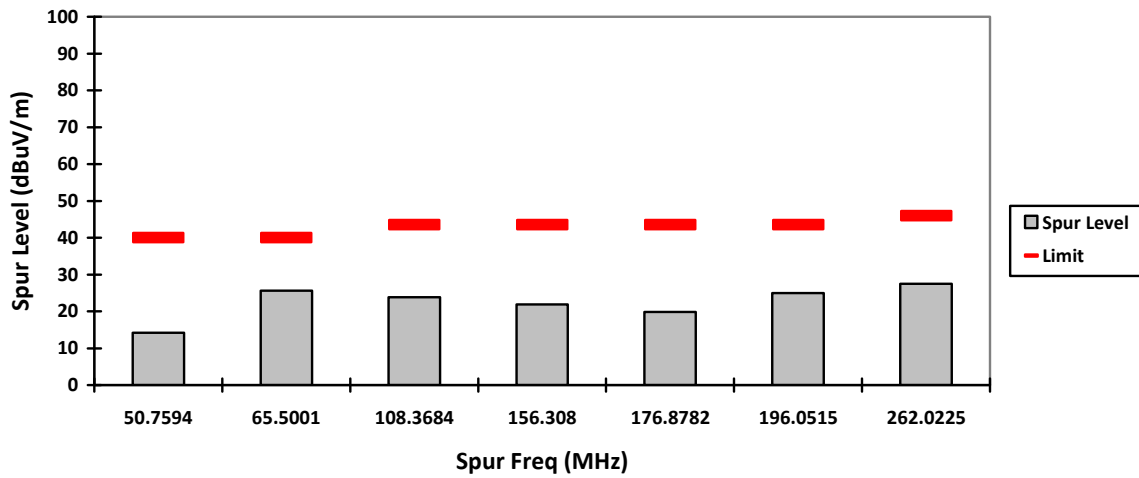

6.7 AC Powerline Conducted Emission

6.7.1 Test Setup

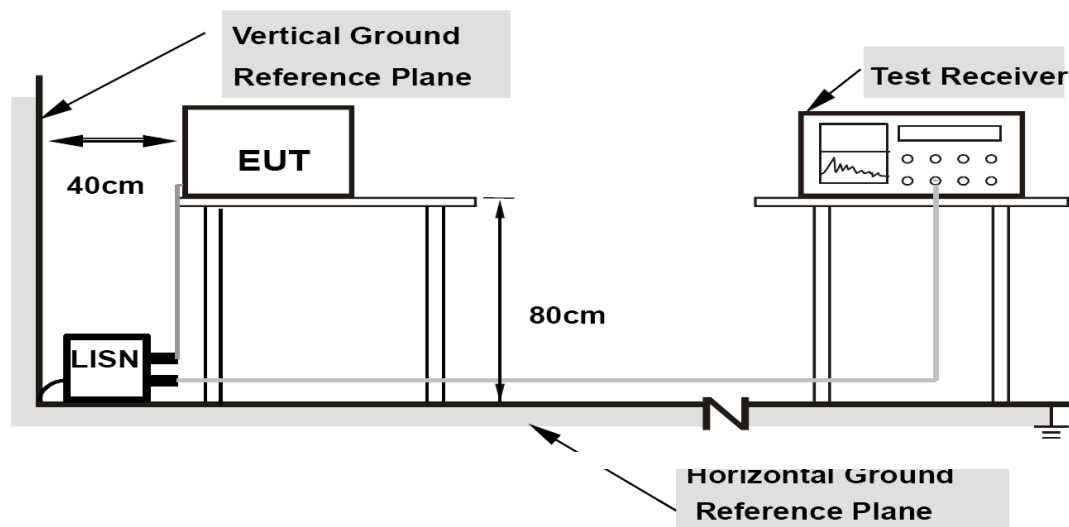

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.7.2 Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports
of class A ITE

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50


NOTE 1 The lower limit shall apply at the transition frequencies.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.7.3 Test Result

Report ID.:	: 26977-EMC-00118
Ambient Temperature:	: 23.0 °C
Humidity:	: 70.8 %RH
Tester:	: Azil
Date of test:	: 23 August 2022


1) Ambient

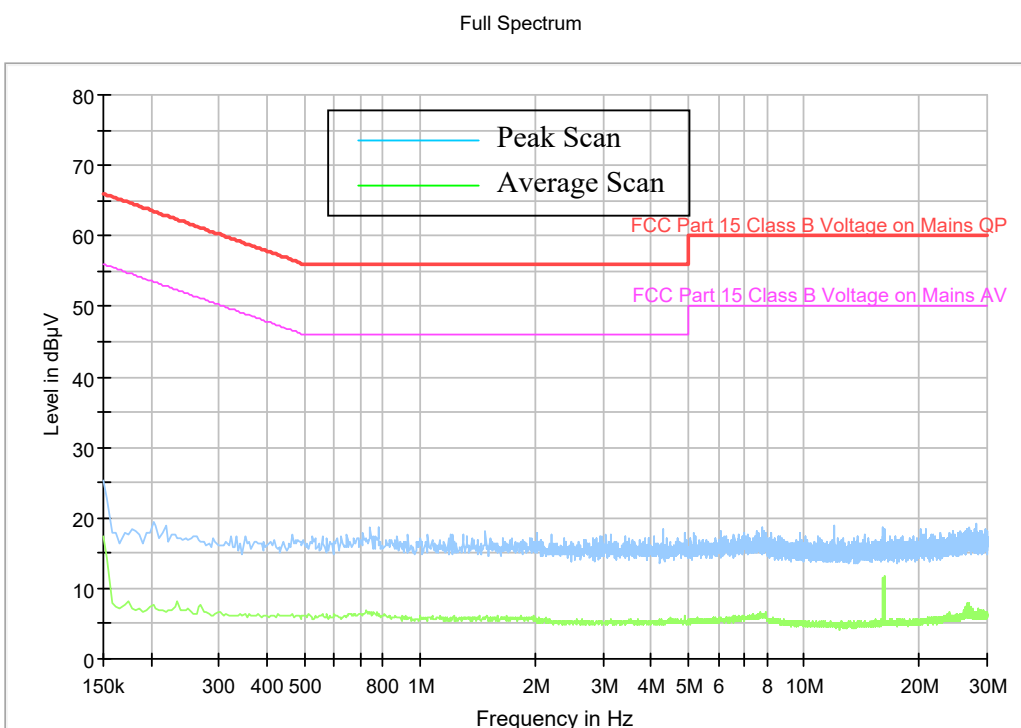

120 VAC , 60Hz


1) Charger + Radio in BTLE test mode (2480MHz, GFSK, 2M)

Full Spectrum

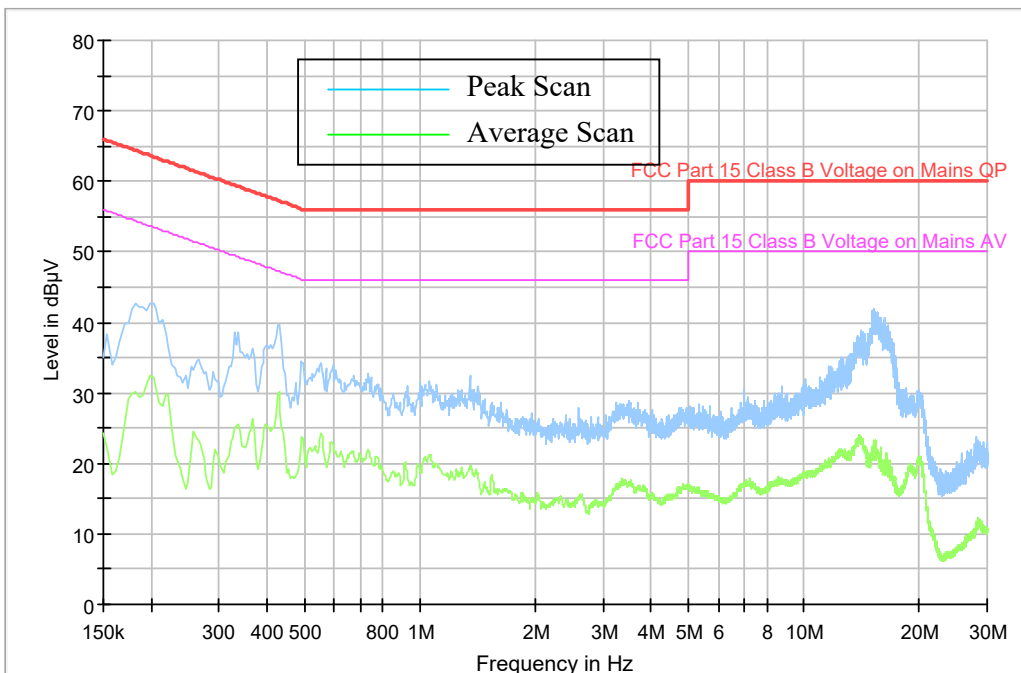

240 VAC , 50Hz

2) Charger + Radio in BTLE test mode (2480MHz, GFSK, 2M)

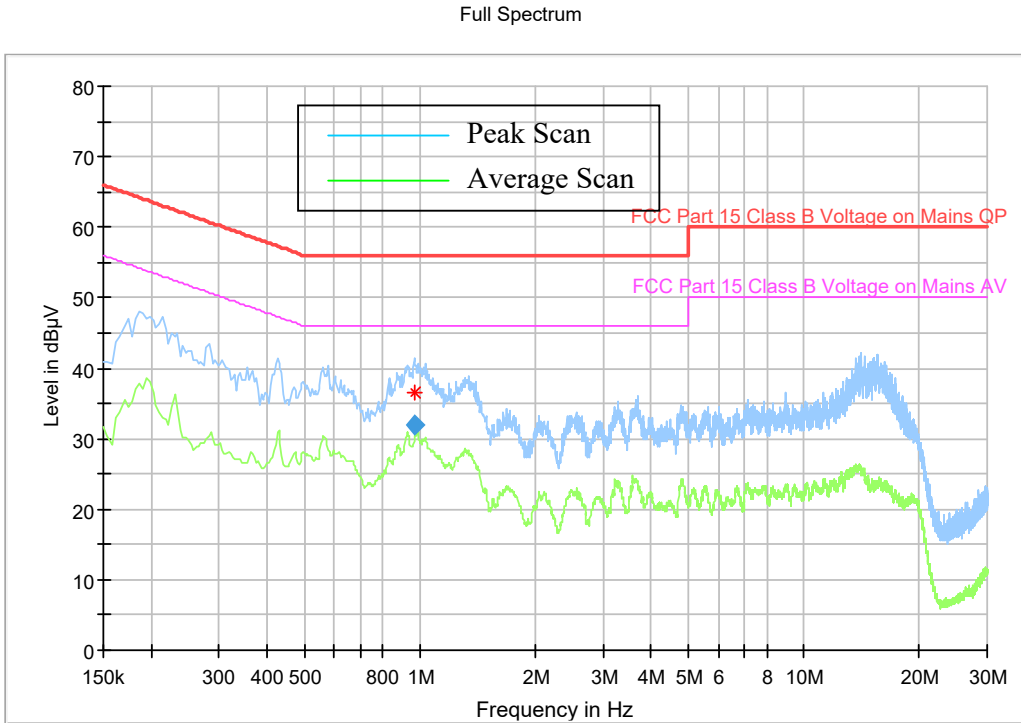

Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.970000	31.91	---	56.00	24.09	1000.0	9.000	N	ON	10.3	PASS

* Expanded Uncertainty (U) = +/- 3.48dB

END OF TEST REPORT