



REPORT NO.: 4790739578-1-RF-2

Page 763 of 767

# 11.6. APPENDIX F: DUTY CYCLE 11.6.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11A-CDD	2.98	3.12	0.9551	95.51	0.20	0.34	0.5
11AX20MIMO	3.91	4.07	0.9607	96.07	0.17	0.26	0.5
11AX40MIMO	5.44	6.79	0.8012	80.12	0.96	0.18	0.5
11AX80MIMO	5.29	5.4	0.9796	97.96	0.09	0.19	0.5
11AX160MIMO	5.39	5.57	0.9677	96.77	0.14	0.19	0.5
11BE20MIMO	5.42	5.68	0.9542	95.42	0.20	0.18	0.5
11BE40MIMO	5.36	5.52	0.9710	97.10	0.13	0.19	0.5
11BE80MIMO	5.45	6.81	0.8003	80.03	0.97	0.18	0.5
11BE160MIMO	5.44	6.83	0.7965	79.65	0.99	0.18	0.5

Note:

Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time


If that calculated VBW is not available on the analyzer then the next higher value should be used.



## 11.6.2. Test Graphs

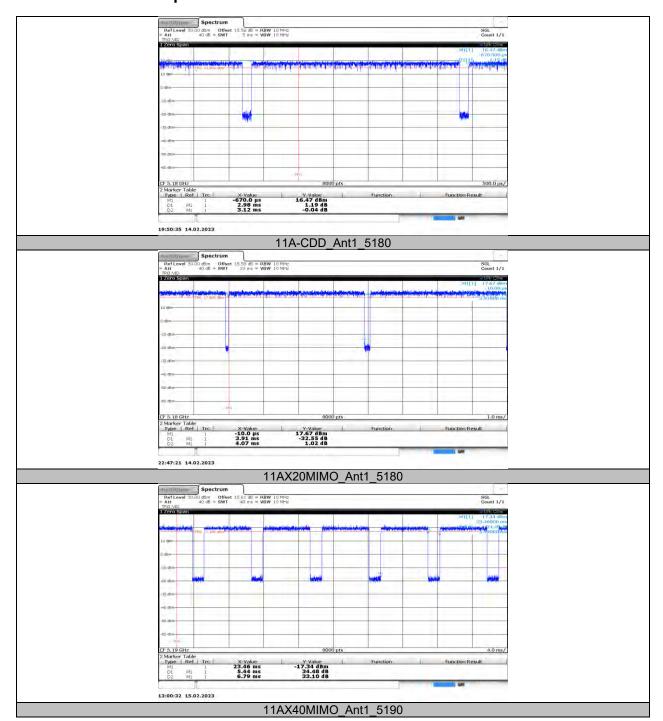



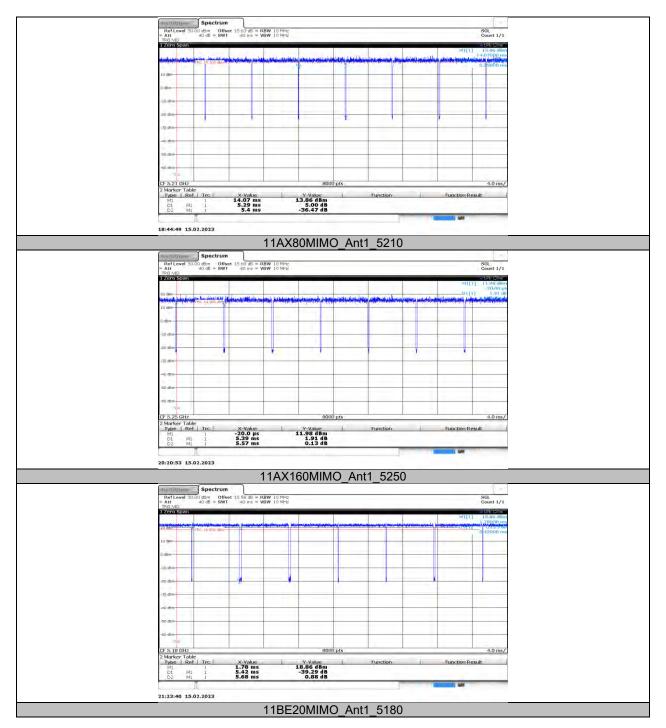







REPORT NO.: 4790739578-1-RF-2

Page 767 of 767

### 11.7. APPENDIX G: FREQUENCY STABILITY

#### 11.7.1. Test Result

				Frequen	cy Error vs. Vo	ltage					
				802	.11a:5200MHz						
Temp. Volt.	0 Minute		2 Minute		5 Minute		10 Minute				
	Volt.	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)		
TN	VL	5199.9899	-1.94	5199.9795	-3.94	5200.0144	2.77	5199.9894	-2.03		
TN	VN	5199.9949	-0.98	5200.0103	1.99	5200.0067	1.28	5199.9844	-3.01		
TN	VH	5200.0244	4.68	5200.0151	2.91	5199.9912	-1.70	5199.9971	-0.56		
Frequency Error vs. Temperature											
				802	.11a:5200MHz	2					
Temp. Volt.		0 Minute		2 Minute		5 Minute		10 Minute			
	Volt.	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)		
40	VN	5200.0055	1.06	5200.0004	0.08	5200.0027	0.52	5200.0020	0.38		
30	VN	5200.0116	2.23	5199.9974	-0.49	5199.9904	-1.85	5200.0115	2.21		
20	VN	5199.9793	-3.98	5200.0096	1.85	5199.9966	-0.66	5199.9889	-2.13		
10	VN	5200.0032	0.61	5199.9923	-1.47	5200.0115	2.21	5200.0229	4.40		
0	VN	5200.0144	2.77	5199.9822	-3.41	5199.9896	-1.99	5199.9754	-4.73		

#### Note:

- 1. All antennas, test modes and test channels have been tested, only the worst data record in the
- 2. For the detail Test Conditions, please refer to section 7.5 TEST ENVIRONMENT.

**END OF REPORT**