



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
IPOD TOUCH

**FCC ID: BCGA1574
Model Name: A1574**

**Report Number: 15U20058-S1B
Issue Date: 6/8/2015**

Prepared for
**APPLE INC.
1 INFINITE LOOP, MS 26A
CUPERTINO, CA 95014-2084**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History



Rev.	Date	Revisions	Revised By
--	5/14/2015	Initial Issue	--
A	5/29/2015	Report revised based on Reviewer's comments: 1. Sec 6.1, 6.3, 9.2 Updated 2. Appendix A Updated	Yu Chen
B	6/8/2015	Report revised based on Reviewer's comment: 1. Sec 7 Updated	Yu Chen

Table of Contents

1. Attestation of Test Results	5
2. Test Specification, Methods and Procedures.....	6
3. Facilities and Accreditation	6
4. SAR Measurement System & Test Equipment	7
4.1. SAR Measurement System.....	7
4.2. SAR Scan Procedures.....	8
4.3. Test Equipment.....	10
5. Measurement Uncertainty.....	11
6. Device Under Test (DUT) Information	12
6.1. DUT Description	12
6.2. Wireless Technologies.....	12
6.3. Nominal and Maximum Output Power.....	13
6.4. Antenna Dimensions and Separation Distances	18
7. RF Exposure Conditions (Test Configurations).....	19
8. Dielectric Property Measurements & System Check	20
8.1. Dielectric Property Measurements	20
8.2. System Check.....	22
9. Conducted Output Power Measurements.....	24
9.1. Wi-Fi 2.4GHz (DTS Band)	24
9.2. Wi-Fi 5GHz (U-NII Bands).....	25
9.3. Bluetooth	26
10. Measured and Reported (Scaled) SAR Results.....	27
10.1. Wi-Fi (DTS Band).....	28
10.2. Wi-Fi (U-NII Band).....	28
10.3. Bluetooth.....	28
11. SAR Measurement Variability.....	29
12. Simultaneous Transmission SAR Analysis.....	30
12.1. Wi-Fi 5GHz & BT.....	30
Appendixes	31
A_15U20058v1 SAR Photos	31
B_15U20058v0 SAR System Check Plots.....	31
C_15U20058v0 SAR Highest Test Plots.....	31

<i>D_15U20058v0 SAR Tissue Ingredients</i>	<i>31</i>
<i>E_15U20058v0 SAR Probe Cal. Certificates</i>	<i>31</i>
<i>F_15U20058v0 SAR Dipole Cal. Certificates.....</i>	<i>31</i>

1. Attestation of Test Results

Applicant Name	Apple Inc.			
FCC ID	BCGA1574			
Model Name	A1574			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
SAR Limits (W/Kg)				
Exposure Category	Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
The Highest Reported SAR (W/kg)				
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	U-NII	DSS (BT)
Standalone	N/A	1.190	1.190	0.309
Simultaneous TX	N/A	N/A	1.497	1.497
Date Tested	5/11/2015 to 5/13/2015			
Test Results	Pass			
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>				
Approved & Released By:		Prepared By:		
				
Bobby Bayani Senior Engineer UL Verification Services Inc.		Yu Chen Laboratory Technician UL Verification Services Inc.		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02
- 447498 D01 General RF Exposure Guidance v05r02
- 447498 D03 Supplement C Cross-Reference v01
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- 865664 D02 RF Exposure Reporting v01r01
- 941225 D07 UMPC Mini Tablet v01r01

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by [NVLAP](#), Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

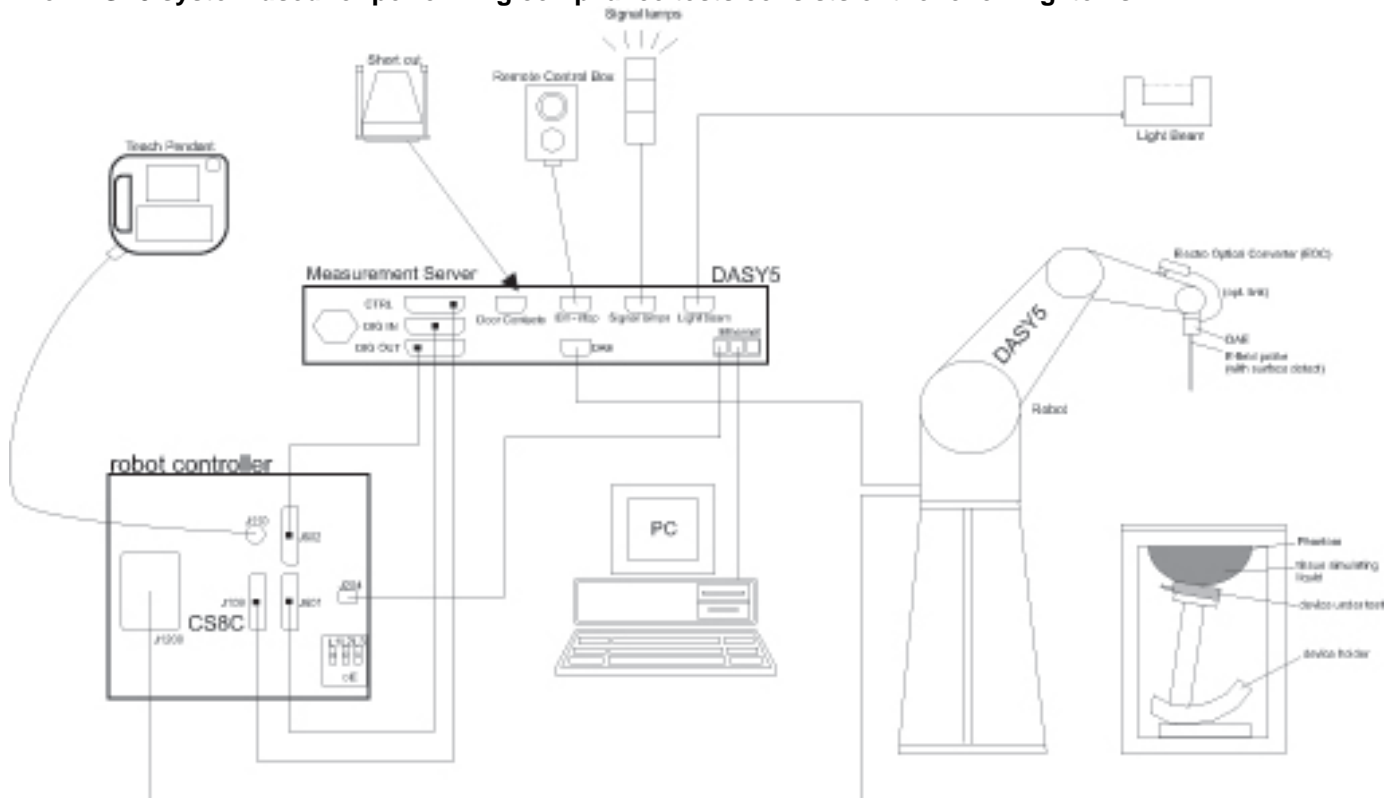

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40001647	7/17/2015
Dielectric Probe kit	SPEAG	DAK-3.5	1087	11/11/2015
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Traceable Calibration Control Co.	4242	122529162	10/8/2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	HP	8665B	3744A01155	3/18/2016
Power Meter	HP	437B	3125U11364	8/27/2015
Power Meter	HP	437B	3125U12345	8/15/2015
Power Sensor	HP	8481A	1926A27048	8/15/2015
Power Sensor	HP	8481A	2702A76223	9/17/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	BK PRECISION	1611	215-02292	N/A
E-Field Probe (SAR Lab A)	SPEAG	EX3DV4	3901	1/27/2016
E-Field Probe (SAR Lab B)	SPEAG	EX3DV4	3751	11/14/2015
Data Acquisition Electronics (SAR Lab A)	SPEAG	DAE4	1357	2/20/2016
Data Acquisition Electronics (SAR Lab B)	SPEAG	DAE4	1360	3/12/2016
System Validation Dipole	SPEAG	D2450V2	899	3/13/2016
System Validation Dipole	SPEAG	D5GHzV2	1138	9/18/2015

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY53040015	2/27/2016
Power Sensor	Agilent	N1921A	MY52270022	12/12/2016
Power Sensor	Agilent	N1921A	MY53260001	10/11/2016

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 123.4 mm x 58.6 mm Overall Diagonal: 131 mm Display Diagonal: 103 mm
Back Cover	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac(VHT20) 802.11ac(VHT40) 802.11ac(VHT80)	100%
Bluetooth	2.4 GHz	Version 4.1 LE	100% (DH5)

6.3. Nominal and Maximum Output Power

Maximum Output Power for Wi-Fi 2.4 GHz

Band (GHz)	Mode	Ch #	Freq. (MHz)	Maximum Target Power (dBm)
2.4	802.11b	1	2412	17.5
		2	2417	17.5
		3	2422	17.5
		4	2427	17.5
		5	2432	17.5
		6	2437	17.5
		7	2442	17.5
		8	2447	17.5
		9	2452	17.5
		10	2457	17.5
		11	2462	17.5
		12	2467	15.5
		13	2472	12.0
	802.11g	1	2412	15.0
		2	2417	16.5
		3	2422	17.5
		4	2427	17.5
		5	2432	17.5
		6	2437	17.5
		7	2442	17.5
		8	2447	17.5
		9	2452	17.5
		10	2457	16.5
		11	2462	13.5
		12	2467	11.0
		13	2472	3.0
	802.11n (HT20)	1	2412	15.0
		2	2417	16.5
		3	2422	17.5
		4	2427	17.5
		5	2432	17.5
		6	2437	17.5
		7	2442	17.5
		8	2447	17.5
		9	2452	17.5
		10	2457	16.5
		11	2462	13.5
		12	2467	11.0
		13	2472	3.0

Maximum Output Power for Wi-Fi 5.2 & 5.3 GHz

Band (GHz)	Mode	Ch #	Freq. (MHz)	Maximum Target Power (dBm)
5.2	802.11a	36	5180	12.5
		40	5200	12.5
		44	5220	12.5
		48	5240	12.5
	802.11n HT20	36	5180	12.5
		40	5200	12.5
		44	5220	12.5
		48	5240	12.5
	802.11n HT40	38	5190	12.5
		46	5230	12.5
	802.11ac VHT20	36	5180	12.5
		40	5200	12.5
		44	5220	12.5
		48	5240	12.5
	802.11ac VHT40	38	5190	12.5
		46	5230	12.5
	802.11ac VHT80	42	5210	12.0
5.3	802.11a	52	5260	13.0
		56	5280	13.0
		60	5300	13.0
		64	5320	13.0
	802.11n HT20	52	5260	13.0
		56	5280	13.0
		60	5300	13.0
		64	5320	13.0
	802.11n HT40	54	5270	13.0
		62	5310	13.0
	802.11ac VHT20	52	5260	13.0
		56	5280	13.0
		60	5300	13.0
		64	5320	13.0
	802.11ac VHT40	54	5270	13.0
		62	5310	13.0
	802.11ac VHT80	58	5290	13.0

Maximum Output Power for Wi-Fi 5.5 GHz

Band (GHz)	Mode	Ch #	Freq. (MHz)	Maximum Target Power (dBm)
5.5	802.11a	100	5500	13.0
		104	5520	13.0
		108	5540	13.0
		112	5560	13.0
		116	5580	13.0
		120	5600	13.0
		124	5620	13.0
		128	5640	13.0
		132	5660	13.0
		136	5680	13.0
		140	5700	13.0
		144	5720	13.0
	802.11n HT20	100	5500	13.0
		104	5520	13.0
		108	5540	13.0
		112	5560	13.0
		116	5580	13.0
		120	5600	13.0
		124	5620	13.0
		128	5640	13.0
		132	5660	13.0
		136	5680	13.0
		140	5700	13.0
		144	5720	13.0
	802.11n HT40	102	5510	12.0
		110	5550	13.0
		118	5590	13.0
		126	5630	13.0
		134	5670	13.0
		142	5710	13.0

Maximum Output Power for Wi-Fi 5.5 GHz Continued

Band (GHz)	Mode	Ch #	Freq. (MHz)	Maximum Target Power (dBm)
5.5	802.11ac VHT20	100	5500	13.0
		104	5520	13.0
		108	5540	13.0
		112	5560	13.0
		116	5580	13.0
		120	5600	13.0
		124	5620	13.0
		128	5640	13.0
		132	5660	13.0
		136	5680	13.0
		140	5700	13.0
		144	5720	13.0
	802.11ac VHT40	102	5510	12.0
		110	5550	13.0
		118	5590	13.0
		126	5630	13.0
		134	5670	13.0
		142	5710	13.0
	802.11ac VHT80	106	5530	12.0
		122	5610	13.0
		138	5690	13.0

Maximum Output Power for Wi-Fi 5.8 GHz

Band (GHz)	Mode	Ch #	Freq. (MHz)	Maximum Target Power (dBm)
5.8	802.11a	149	5745	13.0
		153	5765	13.0
		157	5785	13.0
		161	5805	13.0
		165	5825	13.0
	802.11n HT20	149	5745	13.0
		153	5765	13.0
		157	5785	13.0
		161	5805	13.0
		165	5825	13.0
	802.11n HT40	151	5755	12.0
		159	5795	13.0
	802.11ac VHT20	149	5745	13.0
		153	5765	13.0
		157	5785	13.0
		161	5805	13.0
		165	5825	13.0
	802.11ac VHT40	151	5755	12.0
		159	5795	13.0
	802.11ac VHT80	155	5775	13.0

Maximum Output Power for Bluetooth

Mode	Maximum Output Power (dBm)
Bluetooth	12.0

6.4. Antenna Dimensions and Separation Distances

Refer to separate filling document.

7. RF Exposure Conditions (Test Configurations)

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WLAN	Standalone	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D07 UMPC Mini Tablet Devices v01.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR Lab A**

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
5/11/2015	Body 5180	e'	47.9100	Relative Permittivity (ϵ_r):	47.91	49.05	-2.32	5
		e"	18.3100	Conductivity (σ):	5.27	5.27	0.04	5
	Body 5200	e'	47.9000	Relative Permittivity (ϵ_r):	47.90	49.02	-2.28	5
		e"	18.2600	Conductivity (σ):	5.28	5.29	-0.28	5
	Body 5600	e'	47.1600	Relative Permittivity (ϵ_r):	47.16	48.48	-2.72	5
		e"	18.6800	Conductivity (σ):	5.82	5.76	0.96	5
	Body 5800	e'	46.8600	Relative Permittivity (ϵ_r):	46.86	48.20	-2.78	5
		e"	18.8800	Conductivity (σ):	6.09	6.00	1.48	5
	Body 5825	e'	46.8500	Relative Permittivity (ϵ_r):	46.85	48.20	-2.80	5
		e"	18.9400	Conductivity (σ):	6.13	6.00	2.24	5

SAR Lab B

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit \pm (%)
5/11/2015	Body 2450	e'	52.5400	Relative Permittivity (ϵ_r):	52.54	52.70	-0.30	5
		e"	14.2600	Conductivity (σ):	1.94	1.95	-0.38	5
	Body 2410	e'	52.6700	Relative Permittivity (ϵ_r):	52.67	52.76	-0.17	5
		e"	14.1200	Conductivity (σ):	1.89	1.91	-0.80	5
	Body 2475	e'	52.5000	Relative Permittivity (ϵ_r):	52.50	52.67	-0.32	5
		e"	14.2800	Conductivity (σ):	1.97	1.99	-1.01	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D2450V2	899	3/13/2015	2450	1g	51.6	48.8
				10g	23.9	22.7
D5GHzV2	1138	9/18/2014	5200	1g	81.4	75.4
				10g	23.3	21.0
			5600	1g	85.1	81.9
				10g	24.2	22.6
			5800	1g	80.6	75.2
				10g	23.0	20.8

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab A

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
5/11/2015	D5GHzV2 (5.2 GHz)	1138	Body	1g	7.56	75.6	75.4	0.27	1,2
	10g			2.11	21.1	21.0	0.48		
	D5GHzV2 (5.6 GHz)			1g	8.32	83.2	81.9	1.59	
	10g			2.30	23.0	22.6	1.77		
	D5GHzV2 (5.8 GHz)			1g	7.68	76.8	75.2	2.13	
	10g			2.13	21.3	20.8	2.40		

SAR Lab B

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
5/11/2015	D2450V2	899	Body	1g	4.87	48.7	48.8	-0.20
				10g	2.24	22.4	22.7	-1.32

9. Conducted Output Power Measurements

9.1. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Average Power (dBm)	Maximum Output Power (dBm)	SAR Test (Yes/No)
2.4	802.11b	1 Mbps	1	2412	17.5	17.5	Yes
			6	2437	17.5	17.5	
			11	2462	17.5	17.5	
	802.11g	6 Mbps	1	2412	Not Required	15.0	No
			6	2437		17.5	
			11	2462		13.5	
	802.11n (HT20)	6.5 Mbps	1	2412	Not Required	15.0	No
			6	2437		17.5	
			11	2462		13.5	

9.2. Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Average Power (dBm)	Maximum Output Power (dBm)	SAR Test (Yes/No)
5.2	802.11a	6 Mbps	36	5180	Not Required	12.5	No
			40	5200		12.5	
			44	5220		12.5	
			48	5240		12.5	
	802.11n HT20	6.5 Mbps	36	5180	Not Required	12.5	No
			40	5200		12.5	
			44	5220		12.5	
			48	5240		12.5	
	802.11n HT40	13.5 Mbps	38	5190	Not Required	12.5	No
			46	5230		12.5	
	802.11ac VHT20	6.5 Mbps	36	5180	Not Required	12.5	No
			40	5200		12.5	
			44	5220		12.5	
			48	5240		12.5	
	802.11ac VHT40	13.5 Mbps	38	5190	Not Required	12.5	No
			46	5230		12.5	
	802.11ac VHT80	29.3 Mbps	42	5210	Not Required	12.0	No
5.3	802.11a	6 Mbps	52	5260	Not Required	13.0	No
			56	5280		13.0	
			60	5300		13.0	
			64	5320		13.0	
	802.11n HT20	6.5 Mbps	52	5260	Not Required	13.0	No
			56	5280		13.0	
			60	5300		13.0	
			64	5320		13.0	
	802.11n HT40	13.5 Mbps	54	5270	Not Required	13.0	No
			62	5310		13.0	
	802.11ac VHT20	6.5 Mbps	52	5260	Not Required	13.0	No
			56	5280		13.0	
			60	5300		13.0	
			64	5320		13.0	
	802.11ac VHT40	13.5 Mbps	54	5270	Not Required	13.0	No
			62	5310		13.0	
	802.11ac VHT80	29.3 Mbps	58	5290	13.0	13.0	Yes

Measured Results (Continued)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Average Power (dBm)	Maximum Output Power (dBm)	SAR Test (Yes/No)
5.5	802.11a	6 Mbps	100	5500	Not Required	13.0	No
			120	5600		13.0	
			124	5620		13.0	
			144	5720		13.0	
	802.11n HT20	6.5 Mbps	100	5500	Not Required	13.0	No
			120	5600		13.0	
			124	5620		13.0	
			144	5720		13.0	
	802.11n HT40	13.5 Mbps	102	5510	Not Required	12.0	No
			118	5590		13.0	
			126	5630		13.0	
			142	5710		13.0	
	802.11ac VHT20	6.5 Mbps	100	5500	Not Required	13.0	No
			120	5600		13.0	
			124	5620		13.0	
			144	5720		13.0	
	802.11ac VHT40	13.5 Mbps	102	5510	Not Required	12.0	No
			118	5590		13.0	
			126	5630		13.0	
			142	5710		13.0	
	802.11ac VHT80	29.3 Mbps	106	5530	12.0	12.0	Yes
			122	5610	13.0	13.0	
			138	5690	13.0	13.0	
5.8	802.11a	6 Mbps	149	5745	Not Required	13.0	No
			157	5785		13.0	
			165	5825		13.0	
	802.11n HT20	6.5 Mbps	149	5745	Not Required	13.0	No
			157	5785		13.0	
			165	5825		13.0	
	802.11n HT40	13.5 Mbps	151	5755	Not Required	12.0	No
			159	5795		13.0	
	802.11ac VHT20	6.5 Mbps	149	5745	Not Required	13.0	No
			157	5785		13.0	
			165	5825		13.0	
	802.11ac VHT40	13.5 Mbps	151	5755	Not Required	12.0	No
			159	5795		13.0	
	802.11ac VHT80	29.3 Mbps	155	5775	13.0	13.0	Yes

9.3. Bluetooth

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)
2.4	V3.0 + BDR, GFSK	0	2402	12.0
		39	2441	12.0
		78	2480	12.0

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 248227 D01 SAR meas for 802.11 v02:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. Wi-Fi (DTS Band)

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	5	Rear	6	2437.0	1.304	17.5	17.5	0.673	0.673	0.246	0.246	1
			Front	1	2412.0	1.430	17.5	17.5	1.190	1.190	0.441	0.441	
				6	2437.0	1.269	17.5	17.5	1.180	1.180	0.432	0.432	
			Edge 1	6	2437.0	0.355	17.5	17.5	0.270	0.270	0.125	0.125	
			Edge 4	6	2437.0	0.223	17.5	17.5	0.164	0.164	0.074	0.074	

10.2. Wi-Fi (U-NII Band)

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.3 GHz U-NII 2A	802.11ac VHT80	5	Rear	58	5290.0	1.050	13.0	13.0	0.616	0.616	0.175	0.175	2
			Front	58	5290.0	2.150	13.0	13.0	1.140	1.140	0.315	0.315	
			Edge 1	58	5290.0	0.380	13.0	13.0	0.211	0.211	0.068	0.068	
			Edge 4	58	5290.0	0.150	13.0	13.0	0.046	0.046	0.014	0.014	
Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.5 GHz U-NII 2C	802.11ac VHT80	5	Rear	122	5610.0	0.645	13.0	13.0	0.441	0.441	0.133	0.133	3
			Front	122	5610.0	2.430	13.0	13.0	1.080	1.080	0.302	0.302	
				138	5690.0	2.362	13.0	13.0	1.150	1.150	0.330	0.330	
			Edge 1	122	5610.0	0.304	13.0	13.0	0.171	0.171	0.055	0.055	
			Edge 4	122	5610.0	0.136	13.0	13.0	0.047	0.047	0.016	0.016	
Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.8 GHz U-NII 3	802.11ac VHT80	5	Rear	155	5775.0	0.865	13.0	13.0	0.471	0.471	0.146	0.146	4
			Front	155	5775.0	1.995	13.0	13.0	1.190	1.190	0.334	0.334	
			Edge 1	155	5775.0	0.293	13.0	13.0	0.187	0.187	0.066	0.066	
			Edge 4	155	5775.0	0.109	13.0	13.0	0.058	0.058	0.022	0.022	

10.3. Bluetooth

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	GFSK	5	Rear	39	2441.0	12.0	12.0	0.309	0.309	0.106	0.106	5
			Front	39	2441.0	12.0	12.0	0.307	0.307	0.118	0.118	
			Edge 1	39	2441.0	12.0	12.0	0.045	0.045	0.021	0.021	
			Edge 4	39	2441.0	12.0	12.0	0.094	0.094	0.040	0.040	

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
2400	Wi-Fi 802.11b/g/n	Standalone	Front	Yes	1.19	1.17	1.02
5300	Wi-Fi 802.11a/n/ac	Standalone	Front	Yes	1.14	1.10	1.04
5500	Wi-Fi 802.11a/n/ac	Standalone	Front	Yes	1.15	1.15	1.00
5800	Wi-Fi 802.11a/n/ac	Standalone	Front	Yes	1.19	1.18	1.01

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item			
Standalone	1	Wi-Fi 5 GHz	+	Bluetooth
Notes:				
1. Wi-Fi 2.4GHz Radio cannot transmit simultaneously with Bluetooth Radio.				

12.1. Wi-Fi 5GHz & BT

RF Exposure conditions	① Wi-Fi 5GHz	② BT	① + ② Wi-Fi 5GHz + BT	
			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Rear	0.616	0.309	0.925	No
Front	1.190	0.307	1.497	No
Edge 1	0.211	0.045	0.256	No
Edge 4	0.058	0.094	0.152	No

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

A_15U20058v1 SAR Photos

B_15U20058v0 SAR System Check Plots

C_15U20058v0 SAR Highest Test Plots

D_15U20058v0 SAR Tissue Ingredients

E_15U20058v0 SAR Probe Cal. Certificates

F_15U20058v0 SAR Dipole Cal. Certificates

END OF REPORT