



BEVERAGE-AIR®

YOUR COMPLETE REFRIGERATION SOURCE



2021 CATALOG

888-845-9800 | beverage-air.com



BEVERAGE-AIR®

Your Complete Refrigeration Source

Beverage-Air is a leading domestic manufacturer of commercial refrigeration solutions, with a vast product offering including over 1,000 unique models across 31 product series and 10 product categories. Manufactured in Brookville, Pennsylvania & headquartered in Winston-Salem, North Carolina, Beverage-Air is committed to producing American made equipment for the foodservice market.

Founded in 1944, Beverage-Air was acquired by the Ali Group, one of the largest and most diversified global leaders in the foodservice and equipment industry, in 2008. Today, the Ali Group employs more than 10,000 people in 30 countries and operates 59 manufacturing facilities worldwide. Often times, second and third generation employees work side by side to drive innovative thinking and quality manufacturing.

Our expansive product offering allows us to meet any operator's refrigeration need whether it be front of the house, back of the house, food preparation or point of sale merchandising. With seemingly unlimited customizable options, award winning design innovation and unparalleled customer commitment, Beverage-Air continues to be a trusted partner in the food service industry. Whether it's national accounts, high-end restaurants or small operations, Beverage-Air has a solution for any food service application.







BEVERAGE-AIR®

AFTERMARKET SERVICES

As a Beverage-Air customer, our commitment to you continues with the ongoing support of our aftermarket services. This program provides you access to a full range of support tools.

YOU HAVE ACCESS TO THE FOLLOWING:

- Ongoing technical support via telephone
- Product Customization
- Qualified parts distributor network
- Qualified network of reputable service technicians
- 24/7 Service and maintenance dispatch
- Online manuals & parts breakdown
- Online warranty claims processing
(warranty at back of catalog)

CUSTOMER COMMITMENT

Committed to innovation, excellence, and customer satisfaction, Beverage-Air continually works to leverage efficiencies in manufacturing and distribution to benefit our customers.

WE COMMIT ALL OF THE FOLLOWING TO YOU:

- Industry-leading quality and customer satisfaction
- Award-winning product innovation
- Competitive pricing
- Factory Inventory
- Energy efficient products
- Complete aftermarket services

Factory Headquarters Sales Office

3779 Champion Blvd
Winston-Salem, NC 27105
Phone: (336) 245-6400
Fax: (336) 245-6453
Email: sales@bevair.com
Web: www.beverage-air.com

24/7 Warranty Service Dispatch

(877) 866-1223

Factory Technical Service

Phone: (800) 684-1199
Fax: (800) 262-9381

Factory Customer Service

Phone: (888) 845-9800
Fax: (800) 253-5168



TABLE OF CONTENTS

Top Mount Reach-Ins 4

HR/HF	Horizon Series	6
-------	----------------	---

Bottom Mount Reach-Ins 12

RB/FB	Vista Series	14
HBR/HBF	Horizon Series	18
SR/SF	Slate Series	22
RI	RI Series	24

Spec Line 28

PR/PH/PF	P-Series	30
CT	Cross Temp Series	40
CF/BF	Blast Chillers	44
BC	Williams Blast Chillers	46

Glass Door Merchandisers 48

MT	Marketeer Series	50
MM	MarketMax Series	52
CR/CF/CTF	Countertop Units	60
BDC/NC	Dipping Cabinets	62

Open Air Merchandisers 68

BZ	Breeze Series	70
VM	VueMax	72

Deli Cases 76

CDR	Deli Cases	78
-----	------------	----

Food Prep Tables 80

SPE	Elite Series	82
DP	Pizza Prep Tables	96
SPE-S	Salad Bars	102

Worktops & Undercounters 108

WTR/WTF	Worktops	110
UCR/UCF	Undercounters	122

Chef Bases 132

WTRC/WTFC	Chef Bases	134
-----------	------------	-----

Bar & Wine Equipment 138

DD/DZ/BM	Direct Draw	140
BM23/DZ24	Bar Mobile	144
BB/DZ	Back Bar	146
DW	Bottle Coolers	156
GF/FLG	Glass & Plate Chiller	158

Milk Coolers 164

SM/SMF	Single Access	167
ST/STF	Dual Access	168

Beverage-Air

Warranty	170
Contacts/Directory	172





TOP MOUNT REACH-INS

DESIGNED TO EXCEED EXPECTATIONS IN TOUGH KITCHEN ENVIRONMENTS

HORIZON[®] SERIES

Heavy Duty Construction

2" CFC and HCFC-free foamed-in place polyurethane insulation

Full electronic Control

with one-touch defrost

Multiple finish options

Door locks standard

Solid doors only (optional on glass door models)

Field-reversible doors

Cam-lift hinges

with 120 degree stay open feature

LED lighting standard

Back rack airflow distribution system

Self-closing doors

6" heavy duty casters standard

3" casters or 6" leg option available
at no charge when specified on order

**HC models featuring environmentally friendly,
energy efficient R290 refrigerant**



**DESIGNED TO PERFORM IN
HIGH AMBIENT CONDITIONS**

**3 YEAR PARTS AND LABOR /
ADDITIONAL 4 YEAR COMPRESSOR PART WARRANTY**

MADE IN USA



BACK CHANNEL
to promote air flow



FIELD REVERSIBLE DOORS
for flexibility to get your kitchen set
up exactly how you want it

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Stainless steel front with continuous coil coated sides
- Stainless steel sides/front

INTERIOR FINISHES

- Corrosion resistant aluminum
- Stainless steel

AVAILABLE ACCESSORIES

- Tray Slides
- Additional shelves

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available



HORIZON® SERIES

REFRIGERATORS


MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

		MODEL NUMBERS				MAINTAINS PRODUCT TEMPERATURES OF 36-38 °F								
MODEL WIDTH	DOOR TYPE	STANDARD FINISH	FINISH P	FINISH S	FINISH PS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26" 1 SECTION	SOLID	HR1HC-1S	HRP1HC-1S	HRS1HC-1S	HRPS1HC-1S	1/3	115	1/4	2.7	21.17	26	33.63	78.5	326
	HALF SOLID	HR1HC-1HS	HRP1HC-1HS	HRS1HC-1HS	HRPS1HC-1HS	2/3								324
	GLASS	HR1HC-1G	HRP1HC-1G	HRS1HC-1G	HRPS1HC-1G	1/3	115	1/4	2.7	22.28				429
	HALF GLASS	HR1HC-1HG	HRP1HC-1HG	HRS1HC-1HG	HRPS1HC-1HG	2/3								356
35" 1 WIDE SECTION	SOLID	HR1WHC-1S	HRP1WHC-1S	HRS1WHC-1S	HRPS1WHC-1S	1/3	115	1/4	2.7	30.76	35	33.63	78.5	418
	GLASS	HR1WHC-1G	HRP1WHC-1G	HRS1WHC-1G	HRPS1WHC-1G									429
52" 2 SECTIONS	SOLID	HR2HC-1S	HRP2HC-1S	HRS2HC-1S	HRPS2HC-1S	2/6	115	1/3	6	46.88	52	33.63	78.5	506
	HALF SOLID	HR2HC-1HS	HRP2HC-1HS	HRS2HC-1HS	HRPS2HC-1HS	4/6								543
	GLASS	HR2HC-1G	HRP2HC-1G	HRS2HC-1G	HRPS2HC-1G	2/6								571
	HALF GLASS	HR2HC-1HG	HRP2HC-1HG	HRS2HC-1HG	HRPS2HC-1HG	4/6								543
78" 3 SECTIONS	SOLID	HR3HC-1S	HRP3HC-1S	HRS3HC-1S	HRPS3HC-1S	3/9	115	1/3	6	71.52	78	33.63	78.5	791
	HALF SOLID	HR3HC-1HS	HRP3HC-1HS	HRS3HC-1HS	HRPS3HC-1HS	6/9								791
	GLASS	HR3HC-1G	HRP3HC-1G	HRS3HC-1G	HRPS3HC-1G	3/9								737
	HALF GLASS	HR3HC-1HG	HRP3HC-1HG	HRS3HC-1HG	HRPS3HC-1HG	6/9								791

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

FINISH OPTIONS REFRIGERATOR & FREEZER		
SUFFIX	EXTERIOR	INTERIOR
(standard)	Stainless steel front with continuous coil coated sides	Corrosion resistant aluminum
P	Stainless steel front with stainless steel sides	Corrosion resistant aluminum
S	Stainless steel front with continuous coil coated sides	Stainless steel
PS	Stainless steel front with stainless steel sides	Stainless steel

AVAILABLE OPTIONS	
SUFFIX	
18	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order. Ex: HR2-1S-18	

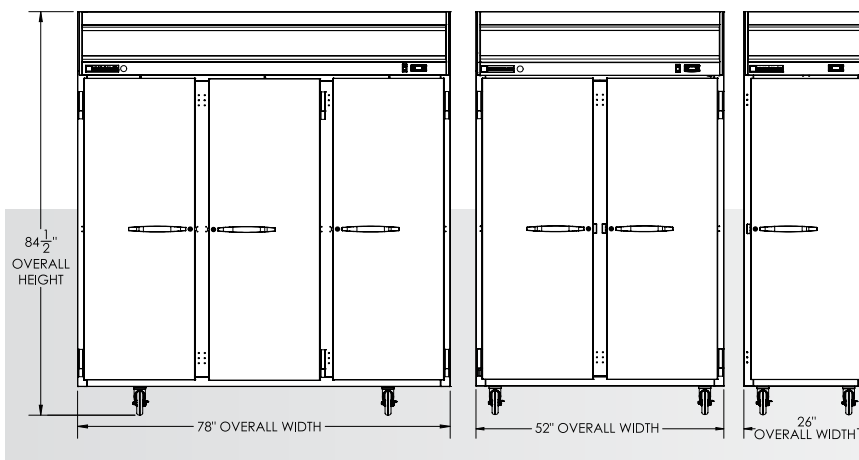

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

FREEZERS


MAINTAINS PRODUCT TEMPERATURES OF -10°F

		MODEL NUMBERS												
MODEL WIDTH	DOOR TYPE	STANDARD FINISH	FINISH P	FINISH S	FINISH PS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26" 1 SECTION	SOLID	HF1HC-1S	HFP1HC-1S	HFS1HC-1S	HFPS1HC-1S	1/3	115	3/4	11	21.06	26	33.63	78.5	336
	HALF SOLID	HF1HC-1HS	HFP1HC-1HS	HFS1-1HS	HFPS1HC-1HS	2/3								340
	GLASS	HF1HC-1G	HFP1HC-1G	HFS1HC-1G	HFPS1HC-1G	1/3								368
	HALF GLASS	HF1HC-1HG	HFP1HC-1HG	HFS1HC-1HG	HFPS1HC-1HG	2/3								360
35" 1 WIDE SECTION	SOLID	HF1WHC-1S	HFP1WHC-1S	HFS1WHC-1S	HFPS1WHC-1S	1/3	115	3/4	11	30.76	35	33.63	78.5	418
52" 2 SECTIONS	SOLID	HF2HC-1S	HFP2HC-1S	HFS2HC-1S	HFPS2HC-1S	2/6	115	3/4+	10	45.2	52	33.63	78.5	568
	HALF SOLID	HF2HC-1HS	HFP2HC-1HS	HFS2HC-1HS	HFPS2HC-1HS	4/6								550
	GLASS	HF2HC-1G	HFP2HC-1G	HFS2HC-1G	HFPS2HC-1G	2/6	115	3/4 (X2)	13.2					625
	HALF GLASS	HF2HC-1HG	HFP2HC-1HG	HFS2HC-1HG	HFPS2HC-1HG	4/6								550
78" 3 SECTIONS	SOLID	HF3HC-5S	HFP3HC-5S	HFS3HC-5S	HFPS3HC-5S	3/9	115	3/4 (X2)	13.2	69	78	33.63	78.5	732
	HALF SOLID	HF3HC-5HS	HFP3HC-5HS	HFS3HC-5HS	HFPS3HC-5HS	6/9								732
	GLASS	HF3HC-5G	HFP3HC-5G	HFS3HC-5G	HFPS3HC-5G	3/9								732
	HALF GLASS	HF3HC-5HG	HFP3HC-5HG	HFS3HC-5HG	HFPS3HC-5HG	6/9								732

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

ADAPTIVE DEFROST

- Reduces energy consumption up to 15%
- Units are able to provide a consistent product temperature throughout the cabinet even during defrost cycles
- Reduces the overall time defrosting versus traditional timed defrost
- Example: Adaptive Defrost: 48 min total in 4 cycles versus 60 min in 3 cycles (Traditional 8HR)
- High Ambient and Humidity testing shows the system's ability to perform better in high usage environments under unfavorable conditions

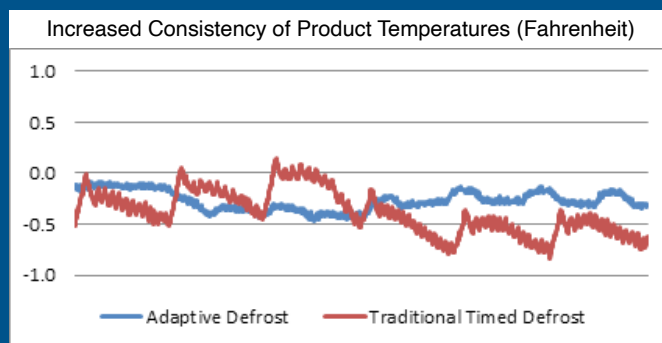

Top Mount Reach-In Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
-------------	---------	-------------

SHELVING / ORGANIZERS

Epoxy Coated Wire Shelf	H Series Flat Shelving 1 Door Unit	402-020D-01
Epoxy Coated Wire Shelf	H Series Flat Shelving HR1W Units	402-023D-01
Epoxy Coated Wire Shelf	H Series Flat Shelving 2 Door Unit	402-021D-01
Epoxy Coated Center Shelf	H Series Flat Shelving 3 Door Unit	402-022D-01
Epoxy Coated Wire Shelf	H Series Flat Shelving 3 Door Unit	402-021D-01
S/S Shelves	H Series Flat Shelving 1 Door Unit	402-020D-04
S/S Shelves	H Series Flat Shelving 1 Door Wide Unit	402-023D-04
S/S Shelves	H Series Flat Shelving 2 & 3 Door Unit	402-021D-04
S/S Shelves	H Series Flat Shelving 3 Door Unit-Center	402-022D-04
Shelf Clip	Any H Series Unit	403-169A

MOUNTING


6" Caster	Any H Series Unit (set of four)	61C01-001A
3" Caster	Any H Series Unit (set of four)	61C01-013A
6" Black Leg	Any H Series Unit (set of four)	58B02S001A
6" Seismic/Flanged Legs	Any H Series Unit (set of four)	00C31-055A

ADDITIONAL ACCESSORIES

Door Lock	Any Glass Door H Series Unit (per door)	61C11S032A
S/S Breakers Half Door	Any H Series Unit	61C08-019A
S/S Breakers Full Door	Any H Series Unit (except extra-wide units)	61C08-020A

TRAY SLIDE KITS

TYPE "A" STANDARD		
1 tray slide set for: one 18x26" pan, or two 14x18" pans	H-Series	10601211S
TYPE "A/C" STANDARD		
1 tray slide set for: one 18x26" pan, or two 14x18" pans, or two 12x20" pans	H-Series	10601201S
KIT #4 EPOXY COATED WIRE ROD TRAY SLIDE		
19 SETS PER 1/2 SECTION	H Series - 1 Door Unit	61C31-251A-01 (2)
	H Series - 2 Door Unit	61C31-251A-02 (2)
	H Series - 3 Door	61C31-251A-03 (2)

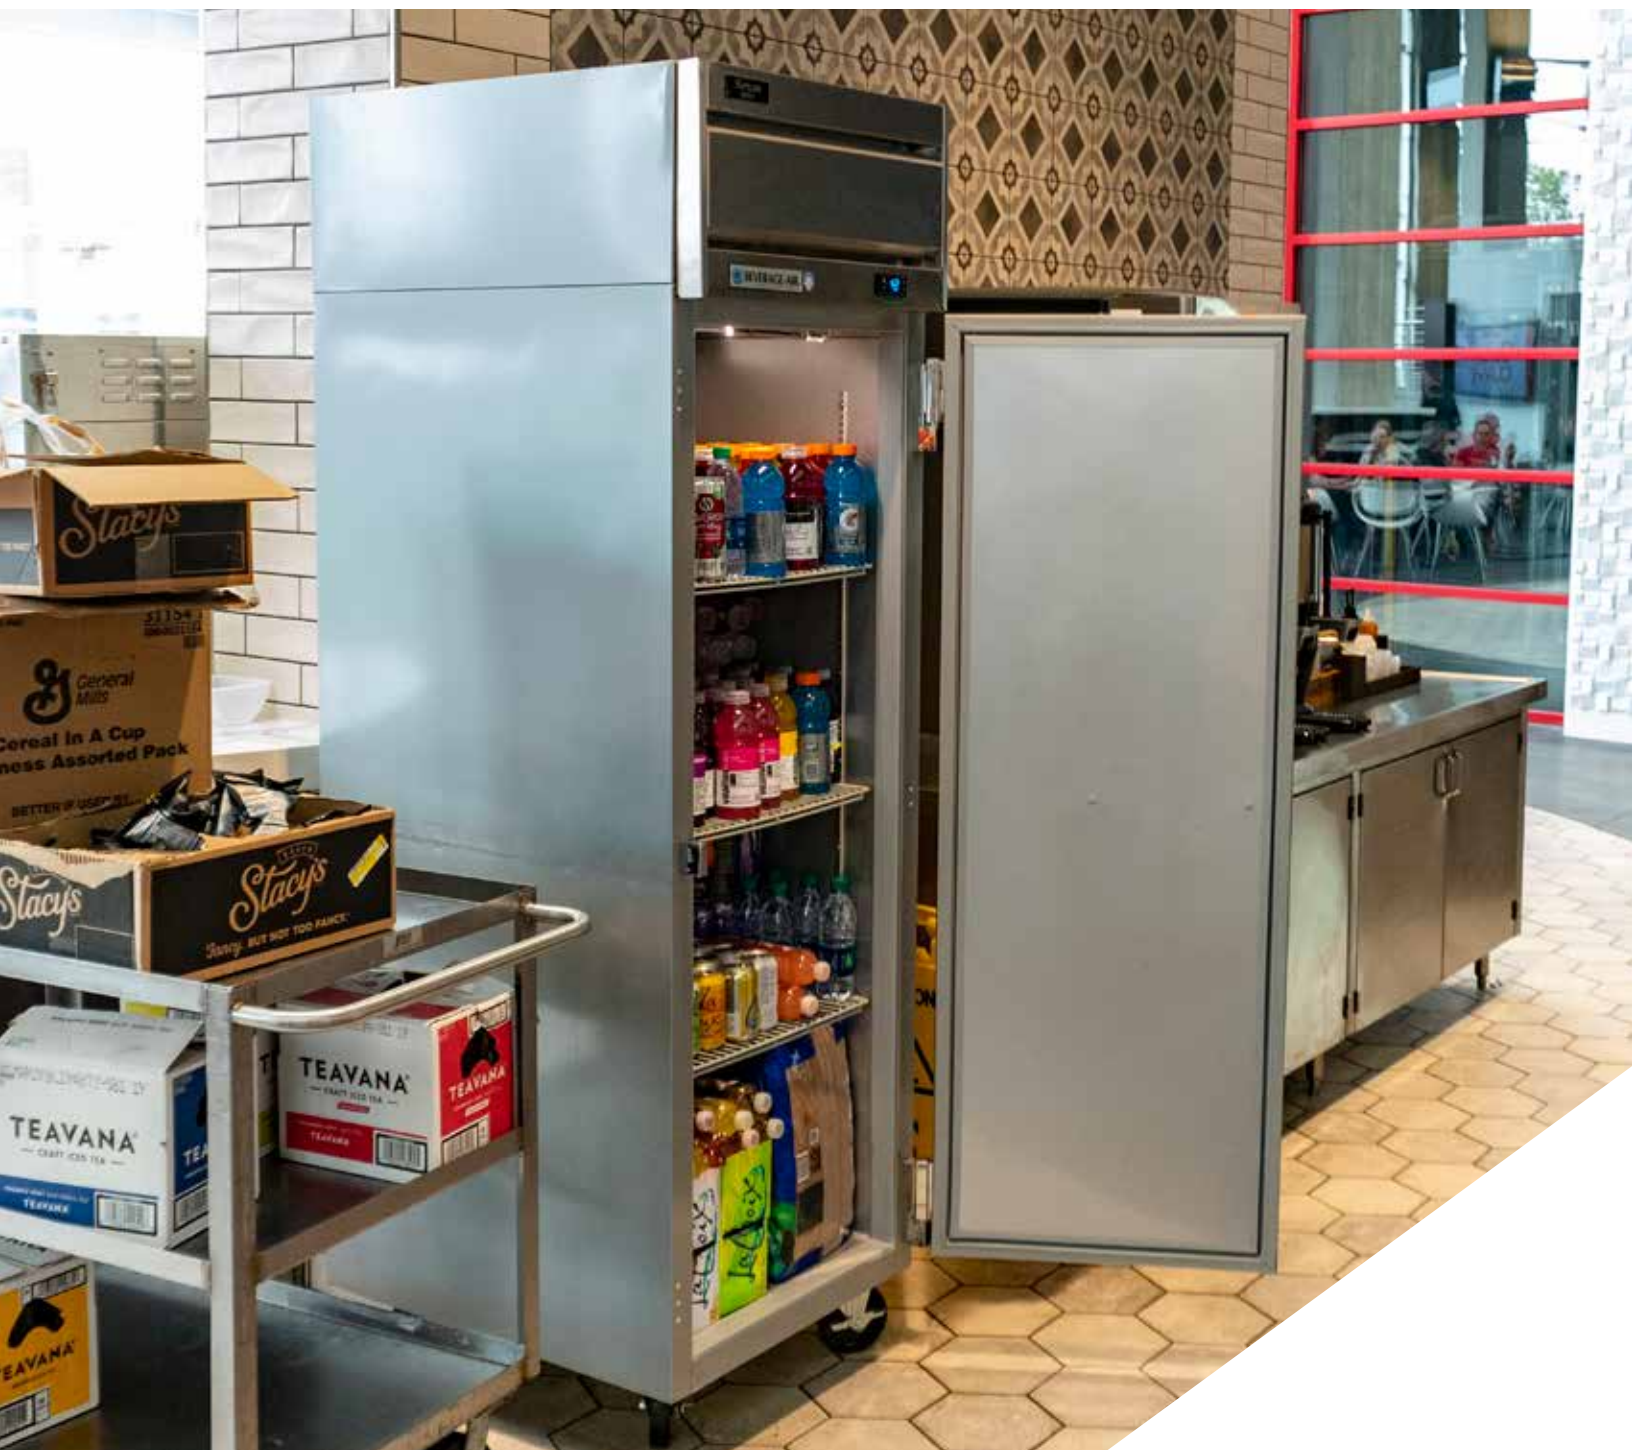





BOTTOM MOUNT REACH-INS

MULTIPLE OPTIONS TO MEET ANY COOLING CHALLENGE OR ENVIRONMENT

VISTA® SERIES

NEW SIZES
ADDED

Full electronic control

Door locks standard

(solid doors only, optional on glass door models)

One piece grille

Cartridge style door hinges

with 120 degree stay-open feature

LED lighting standard

Self-closing doors

Right and left hand hinged models available

(specify at time of order)

6" heavy duty casters standard

(3" casters or 6" leg option available
at no charge when specified on order)

HC models featuring environmentally friendly, energy efficient R290 refrigerant



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS AND LABOR / ADDITIONAL 4 YEAR COMPRESSOR PART WARRANTY

MADE IN USA



DOOR LOCKS STANDARD

on solid door units for loss prevention
(available as an option for glass doors)



FULL ELECTRONIC CONTROL
with easy to read digital display

AVAILABLE DOORS

- Solid (one full-door)
- Glass (one full-door)

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Stainless steel front with continuous coil coated sides

INTERIOR FINISHES

- Corrosion resistant aluminum

AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available



VISTA® SERIES

NEW SIZES
ADDED

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

APPROXIMATE MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24" 1 SECTION	SOLID	RB12HC-1S	1/4	115	1/6	2	12.06	24	26	62	218
27" 1 SHALLOW SECTION	SOLID	RB19HC-1S	1/3	115	1/4	3	17.87	27.25	27.56	78	292
	GLASS	RB19HC-1G									302
27" 1 SECTION	SOLID	RB23HC-1S	1/3	115	1/4	3	23.1	27.25	33.75	78	322
	GLASS	RB23HC-1G									346
30" 1 SECTION	SOLID	RB27HC-1S	1/3	115	1/4	3	25.88	30	33.75	78	358
	GLASS	RB27HC-1G									373
40" 2 SECTION	SOLID	RB35HC-1S	2/6	115	1/4	2.4	36.87	39.5	33.75	78	428
	GLASS	RB35HC-1G									475
47" 2 SECTIONS	SOLID	RB44HC-1S	2/6	115	1/3	5.4	44	47	33.75	78	484
	GLASS	RB44HC-1G									498
52" 2 SECTIONS	SOLID	RB49HC-1S	2/6	115	1/3	5.4	46.15	52	33.75	78	536
	GLASS	RB49HC-1G									566
75" 3 SECTIONS	SOLID	RB72HC-1S	3/9	115	1/2	6.2	68.93	75	33.75	78	696
	GLASS	RB72HC-1G									712


NEW SIZE!

NEW SIZE!

NEW SIZE!

NEW SIZE!

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

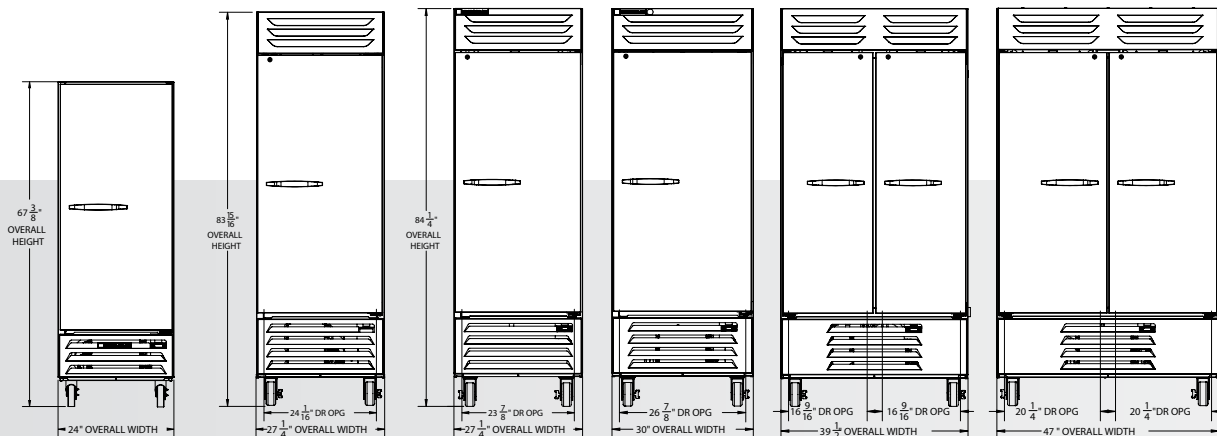

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

NEW SIZE!

NEW SIZE!


NEW SIZE!

NEW SIZE!

	APPROXIMATE MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
	24" 1 SECTION	SOLID	FB12HC-1S	1/3	115	1/2	5	11.9	24	26	62	284
	27" 1 SHALLOW SECTION	SOLID	FB19HC-1S	1/3	115	3/4	7.5	17.87	27.25	27.56	78	300
		GLASS	FB19HC-1G									310
	27" 1 SECTION	SOLID	FB23HC-1S	1/3	115	3/4	7.5	22.5	27.25	33.75	78	408
		GLASS	FB23HC-1G									432
	30" 1 SECTION	SOLID	FB27HC-1S	1/3	115	3/4	7.5	26.57	30	33.75	78	438
		GLASS	FB27HC-1G									453
	40" 2 SECTION	SOLID	FB35HC-1S	2/6	115	3/4	11	36.87	39.5	33.75	78	456
		GLASS	FB35HC-1G									503
	47" 2 SECTIONS	SOLID	FB44HC-1S	2/6	115	3/4	11	44	47	33.75	78	562
		GLASS	FB44HC-1G									588
	52" 2 SECTIONS	SOLID	FB49HC-1S	2/6	115	3/4	11	46.2	52	33.75	78	564
		GLASS	FB49HC-1G									594
	75" 3 SECTIONS	SOLID	FB72HC-5S	3/9	230	3/4 (X2)	14	68.5	75	33.75	78	725
		GLASS	FB72HC-5G									740

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

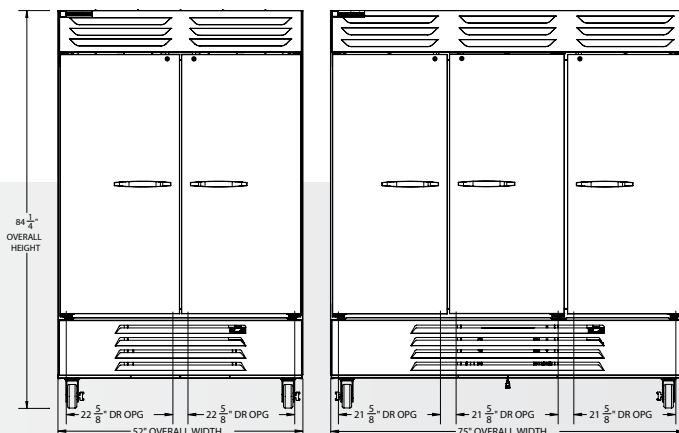

HORIZON® SERIES

Heavy Duty Construction

(2" CFC and HCFC-free foamed-in place polyurethane insulation)

Full electronic Control

with one-touch defrost

Door locks standard

(solid doors only, optional on glass door models)

Cartridge-style hinges

with 120 degree stay open feature

LED lighting standard

Self-closing doors

6" heavy duty casters standard

(3" casters or 6" leg option available at no charge when specified on order)

HC models featuring environmentally friendly, energy efficient R290 refrigerant



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS AND LABOR / ADDITIONAL 4 YEAR COMPRESSOR PART WARRANTY

MADE IN USA



FULL ELECTRONIC CONTROL
with easy to read digital display



DOOR LOCKS STANDARD
on solid door units for loss prevention
(available as an option for glass doors)

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits
- Wine models
- Dual-temp

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available



HORIZON® SERIES

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24" 1 SECTION	SOLID	HBR12HC-1	1/4	115	1/6	2	12.06	24	26	62	250
27" 1 SHALLOW SECTION	SOLID	HBR19HC-1	1/3	115	1/4	3	17.87	27.25	27.75	78	350
	GLASS	HBR19HC-1-G									353
27" 1 SECTION	SOLID	HBR23HC-1	1/3	115	1/4	3	23.1	27.25	33.75	78	392
	HALF SOLID	HBR23HC-1-HS	2/3								376
	GLASS	HBR23HC-1-G	1/3								400
	HALF GLASS	HBR23HC-1-HG	2/3								384
30" 1 SECTION	SOLID	HBR27HC-1	1/3	115	1/4	3	25.88	30	33.75	78	400
	HALF SOLID	HBR27HC-1-HS	2/3								380
	GLASS	HBR27HC-1-G	1/3								420
	HALF GLASS	HBR27HC-1-HG	2/3								410
40" 2 SECTION	SOLID	HBR35HC-1	2/6	115	1/4	2.4	36.87	39.5	33.75	78	500
	GLASS	HBR35HC-1-G									520
47" 2 SECTIONS	SOLID	HBR44HC-1	2/6	115	1/3	5.4	40.2	47	33.75	78	534
	HALF SOLID	HBR44HC-1-HS	4/6								530
	GLASS	HBR44HC-1-G	2/6								540
	HALF GLASS	HBR44HC-1-HG	4/6								538
52" 2 SECTIONS	SOLID	HBR49HC-1	2/6	115	1/3	5.4	46.15	52	33.75	78	594
	HALF SOLID	HBR49HC-1-HS	4/6								575
	GLASS	HBR49HC-1-G	2/6								608
	HALF GLASS	HBR49HC-1-HG	4/6								600
75" 3 SECTIONS	SOLID	HBR72HC-1	3/9	115	1/2	6.2	68.93	75	33.75	78	764
	HALF SOLID	HBR72HC-1-HS	6/9								771
	GLASS	HBR72HC-1-G	3/9								764
	HALF GLASS	HBR72HC-1-HG	6/9								771


NEW SIZE!

NEW SIZE!

NEW SIZE!

NEW SIZE!

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

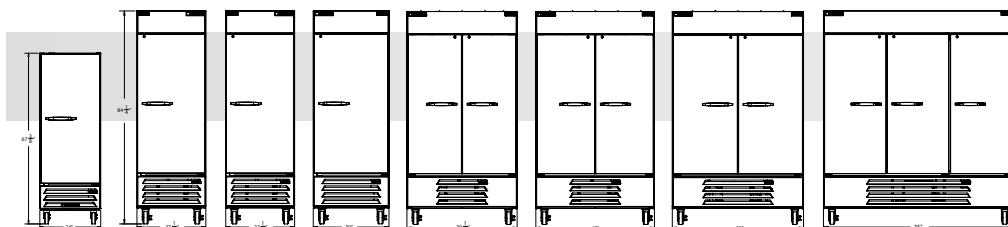

AVAILABLE OPTIONS

SUFFIX	
18	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order. Ex: HBR49-1-HS-18	

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

NEW SIZE!

NEW SIZE!

NEW SIZE!

NEW SIZE!

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24" 1 SECTION	SOLID	HBFI2HC-1	1/3	115	1/2	5	11.9	24	26	62	264
	GLASS	HBFI2HC-1-G									284
27" 1 SHALLOW SECTION	SOLID	HBFI9HC-1	1/3	115	3/4	7.5	17.87	27.25	27.75	78	350
	GLASS	HBFI9HC-1-G									353
27" 1 SECTION	SOLID	HBFI23HC-1	1/2	115	3/4	7.5	22.5	27.25	33.75	78	428
	HALF SOLID	HBFI23HC-1-HS	2/2								412
	GLASS	HBFI23HC-1-G	1/2								452
	HALF GLASS	HBFI23HC-1-HG									446
30" 1 SECTION	SOLID	HBFI27HC-1	1/2	115	3/4	7.5	26.57	30	33.75	78	516
	HALF SOLID	HBFI27HC-1-HS	2/2								500
	GLASS	HBFI27HC-1-G	1/2								530
40" 2 SECTION	SOLID	HBFI35HC-1	2/6	115	3/4	11	36.87	39.5	33.75	78	510
	GLASS	HBFI35HC-1-G									530
47" 2 SECTIONS	SOLID	HBFI44HC-1	2/6	115	3/4	11	44	47	33.75	78	588
	HALF SOLID	HBFI44HC-1-HS	4/6								562
	GLASS	HBFI44HC-1-G	2/6								598
52" 2 SECTIONS	SOLID	HBFI49HC-1	2/6	115	3/4	11	46.2	52	33.75	78	750
	HALF SOLID	HBFI49HC-1-HS	4/6								735
	GLASS	HBFI49HC-1-G	2/6								790
75" 3 SECTIONS	SOLID	HBFI72HC-5	3/9	230	3/4 (X2)	14	68.5	75	33.75	78	790
	HALF SOLID	HBFI72HC-5-HS	6/9								758
	GLASS	HBFI72HC-5-G	3/9								858

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 2 HALF SECTIONS (1 FRIDGE/1 FREEZER)	HALF SOLID	HBRF23HC-1-A-HS	2/4	115 (X2)	R: 1/10 F: 1/2	R: 2 F: 4	R: 11.5 F: 8.65	27.25	33.75	78	448
52" 2 SECTIONS (1 FRIDGE/1 FREEZER)	SOLID	HBRF49HC-1-A	2/6	115 (X2)	R: 1/4 F: 3/4	R: 2.4 F: 7.5	R: 21.01 F: 21.01	52	33.75	78	790
	GLASS	HBRF49HC-1-A-G									800
75" 3 SECTIONS (FRIDGE/FREEZER)	SOLID	HBRF72HC-1-B	3/9	115 (X2)	R: 1/4 F: 1	R: 2.4 F: 11	R: 19.62 F: 44.85	75	33.75	78	810
	GLASS	HBRF72HC-1-B-G									852

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

SLATE SERIES

NEW

Modern slate exterior finish looks great and is easy to clean

Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more

15-20% cost reduction versus current entry level bottom mount models

Electronic temperature control

LED lighting standard

Door locks standard

3 epoxy coated wire shelves per section



OFFERS FEATURES AND STYLE NOT FOUND IN OTHER ENTRY LEVEL BOTTOM MOUNT UNITS

DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

2 YEAR PARTS AND LABOR / ADDITIONAL 5 YEAR COMPRESSOR PART WARRANTY



MODERN SLATE FINISH
contrasts beautifully with the stainless steel doors and grille.



LED LIGHTING
for dynamic product presentation

AVAILABLE DOORS

- Solid (one full-door)

AGENCY CERTIFICATIONS




Intertek



Intertek

Refrigerators & Freezers

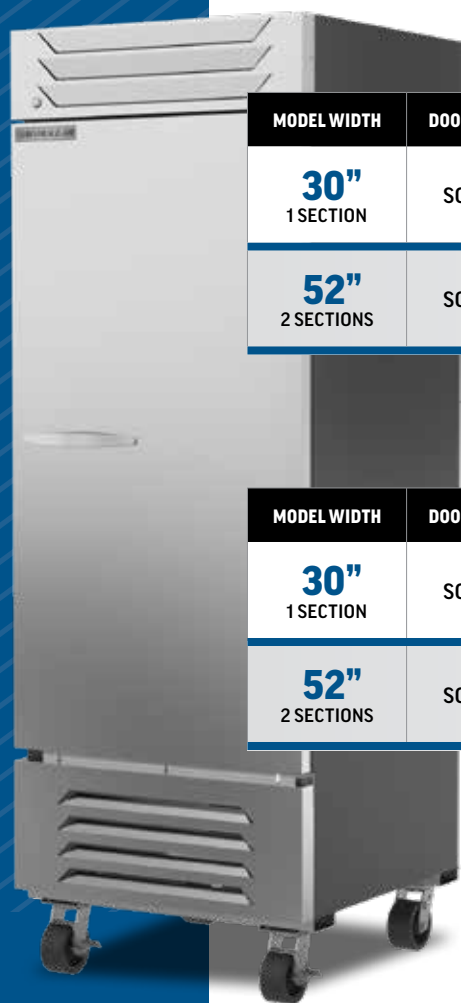

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
30" 1 SECTION	SOLID	SR1HC-1S	1/3	120	1/5	5	23	30.1	33.5	77.8	351
52" 2 SECTIONS	SOLID	SR2HC-1S	2/6	120	1/4	6	43	52	34.9	77.8	502

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF 0°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
30" 1 SECTION	SOLID	SF1HC-1S	1/3	120	1/3	5	23	30.1	33.5	77.8	344
52" 2 SECTIONS	SOLID	SF2HC-1S	2/6	120	1/2	6	43	52	34.9	77.8	502

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.



EXTERIOR FINISHES

- Stainless steel doors and grille, with modern slate finish sides

INTERIOR FINISHES

- White coated steel walls with slate finish interior door

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters

RI SERIES

Compact design

to fit challenging kitchen layouts

Heavy Duty Construction

(2" CFC and HCFC-free foamed-in place polyurethane insulation)

Cartridge-style hinges

with 120 degree stay open feature

LED lighting standard

Self-closing doors

6" heavy duty casters standard

(3" casters or 6" leg option available at no charge when specified on order)

HC models featuring environmentally friendly, energy efficient R290 refrigerant



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS AND LABOR / ADDITIONAL 4 YEAR COMPRESSOR PART WARRANTY

MADE IN USA



FULL ELECTRONIC CONTROL
with easy to read digital display



BUILT-IN LED LIGHTS
Improved LED lighting for better product display

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)
- Half Glass, Half Solid (*two half-doors*)

AGENCY CERTIFICATIONS



Refrigerators

REFRIGERATORS (REACH-IN)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 1 SECTION	SOLID	RI18HC	1/4	115	1/4	5.5	16.85	27.25	29.25	69	322
	HALF SOLID	RI18HC-HS	2/5								328
	GLASS	RI18HC-G	1/4								367
	HALF GLASS	RI18HC-HG	2/5								334
	HALF GLASS HALF SOLID	RI18HC-HGS	2/5								334

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS (PASS-THRU)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 1 SECTION	HALF SOLID	RID18HC-HS	2/5	115	1/4	5.5	18.38	27.25	32.63	69	442
	HALF GLASS HALF SOLID	RID18HC-HGS	4/5								

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

AVAILABLE OPTIONS

SUFFIX	
18	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order. Ex: RI18HC-HS-18	



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AVAILABLE ACCESSORIES

- Pass-thru models available
- Additional shelves
- Wire shelf divider
- Bottle cartridge kit

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

Bottom Mount Reach-In Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF23	403-900D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF27	403-871D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF49	403-873D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF72	403-874D-02
Epoxy Coated Wire Shelf	RI18	403-207D
Shelf Clip	RB/FB/HBR/HBF	403-169A
Flat Wine Rack with Bottle Support	RB/FB/HBR23	403-928D-03
Flat Wine Rack with Bottle Support	RB/FB/HBR27	403-929D-03
Flat Wine Rack with Bottle Support	RB/FB/HBR49	403-930D-03
Flat Wine Rack with Bottle Support	RB/FB/HBR72	403-931D-03
Wire Divider	RI Series	403-719C
MOUNTING		
3" Caster Kit	RB/FB/HBR/HBF	61C01-018D-01
6" Caster Kit	RB/FB/HBR/HBF	61C01-014D-01
6" Seismic/Flanged Legs	RB/FB/HBR/HBF Series (set of four)	00C31-055A
3" Caster	RI Series	401-695B
3" Caster With Brake	RI Series	401-696B
6" Caster	RI Series	401-275A
6" Caster With Brake	RI Series	401-276A
6" Black Legs	RI Series	401-405A
ADDITIONAL ACCESSORIES		
Door Lock (at time of order)	RB/FB/HBR/HBF (SOLID DOORS)	401-274A
TRAY SLIDE KITS		
KIT #3 STAINLESS STEEL UNIVERSAL TRAY SLIDE		
8 SETS PER 1/2 SECTION	RB/FB/HBR/HBF 23	61C08-038A-02 (2)
	RB/FB/HBR/HBF 49	61C08-038A-01 (2)







SPEC LINE

SPECIALTY UNITS READY FOR ANY LAYOUT AND PERFORMANCE SOLUTION

P SERIES

LED lighting

Full electronic control

Self-closing doors

with 120° stay-open feature, on cam-lift hinges

Expansion valve technology

Freezer only

Door locks standard

Solid and Glass doors

Magnetic gasket attached to each door

for positive seal

6" adjustable legs

(3" casters or 6" caster option available at no charge when specified on order)

3 epoxy coated wire shelves

per section

Removable access panel

for ease of service and maintenance



**MAXIMUM RESISTANCE TO WEAR AND TEAR
WITH STAINLESS STEEL BREAKER CAPS AND DOOR LINERS**

**MODULAR INTERIOR GIVES ULTIMATE FLEXIBILITY
FOR SHELF AND SLIDE COMBINATIONS**

3 YEAR PARTS AND LABOR / ADDITIONAL 4 YEAR COMPRESSOR PART WARRANTY



TRAY SLIDES A AVAILABLE
holds one 18x26" or two 14x18"



TRAY SLIDES A/C AVAILABLE
hold one 18x26", or two 14x18",
or two 12x20"

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

CONFIGURATIONS

- Reach-in
- Pass-thru
- Roll-in / Roll-thru / Extra-tall
- Dual-temp

Spec Line Refrigeration



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AGENCY CERTIFICATIONS



AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits (reach-in & pass-thru only)
- Stainless steel shelves
- Chrome-plated shelves
- Kick plate

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

MOUNTING OPTIONS

- 6" legs (standard)
- 6" casters
- 3" casters
- Flanged/seismic feet

P SERIES

REFRIGERATORS - REACH IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PR1HC-1AS	1/3	115	1/3	6.5	21.01	26.50	34.63	77.75	320
	HALF SOLID	PR1HC-1AHS	2/3	115	1/3	6.5	21.01	26.50	34.63	77.75	320
	GLASS	PR1HC-1BG	1/3	115	1/3	6.5	21.01	26.50	33.38	77.75	406
	HALF GLASS	PR1HC-1BHG	2/6	115	1/3	6.5	21.01	26.50	33.38	77.75	398
52" 2 SECTION	SOLID	PR2HC-1AS	2/6	115	1/3	6.5	44.57	52.13	34.63	77.75	483
	HALF SOLID	PR2HC-1AHS	4/6	115	1/3	6.5	44.57	52.13	34.63	77.75	483
	GLASS	PR2HC-1BG	2/6	115	1/2	6.5	44.57	52.13	33.38	77.75	600
	HALF GLASS	PR2HC-1BHG	4/6	115	1/2	6.5	44.57	52.13	33.38	77.75	624
78" 3 SECTIONS	SOLID	PR3HC-1AS	3/9	115	3/4	8.5	68.34	77.75	34.63	77.75	625
	HALF SOLID	PR3HC-1AHS	6/9		3/4	8.5	68.34				
	GLASS	PR3HC-1BG	3/9	115	3/4	8.5	68.34	77.75	33.38	77.75	841
	HALF GLASS	PR3HC-1BHG	6/9		3/4	8.5	68.34				

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - PASS-THRU

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PRD1HC-1AS	2/3	115	1/3	6.5	22.9	26.50	38.38	77.75	370
	HALF SOLID	PRD1HC-1AHS	4/3								370
	GLASS	PRD1HC-1BG	2/3								471
	HALF GLASS	PRD1HC-1BHG	4/3								436
52" 2 SECTION	SOLID	PRD2HC-1AS	4/6	115	1/3	6.5	48.33	52.13	38.38	77.75	682
	HALF SOLID	PRD2HC-1AHS	8/6								652
	GLASS	PRD2HC-1BG	4/6	115	3/4	8.5	48.33	52.13	38.38	77.75	738
	HALF GLASS	PRD2HC-1BHG	8/6								738
78" 3 SECTIONS	SOLID	PRD3HC-1AS	6/9	115	3/4	8.5	74	77.75	38.38	77.75	950
	HALF SOLID	PRD3HC-1AHS	12/9								950
	GLASS	PRD3HC-1BG	6/9	115	1/3 (X2)	10.8	75.1	77.75	38.38	77.75	912
	HALF GLASS	PRD3HC-1BHG	12/9								912

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - ROLL-IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5" 1 SECTION	SOLID	PRI1HC-1AS	1/0	115	1/3	6.5	34.86	36.5	36.13	84	426
		PRI1XTHC-1AS					38.06			89.63	438
69" 2 SECTION	SOLID	PRI2HC-1AS	2/0	115	3/4	8.5	70.84	68.88	36.13	84	735
		PRI2XTHC-1AS					77.35			89.63	766
101" 3 SECTION	SOLID	PRI3HC-1AS	3/0	115	2x 1/3	10.8	106.81	101.25	36.13	84	1,206


Depth measurement includes handles.

REFRIGERATORS - ROLL-THRU

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5" 1 SECTION	SOLID	PRT1HC-1AS	2/0	115	3/4	8.5	38.69	36.5	39.88	84	451
		PRT1XTHC-1AS					42.27			89.63	463
69" 2 SECTION	SOLID	PRT2HC-1AS	4/0	115	3/4	8.5	78.49	68.88	39.88	84	770
		PRT2XTHC-1AS					85.76			89.63	805
101" 3 SECTION	SOLID	PRT3HC-1AS	6/0	115	2x 1/3	10.8	118.3	101.25	39.88	84	1,231

Depth measurement includes handles.

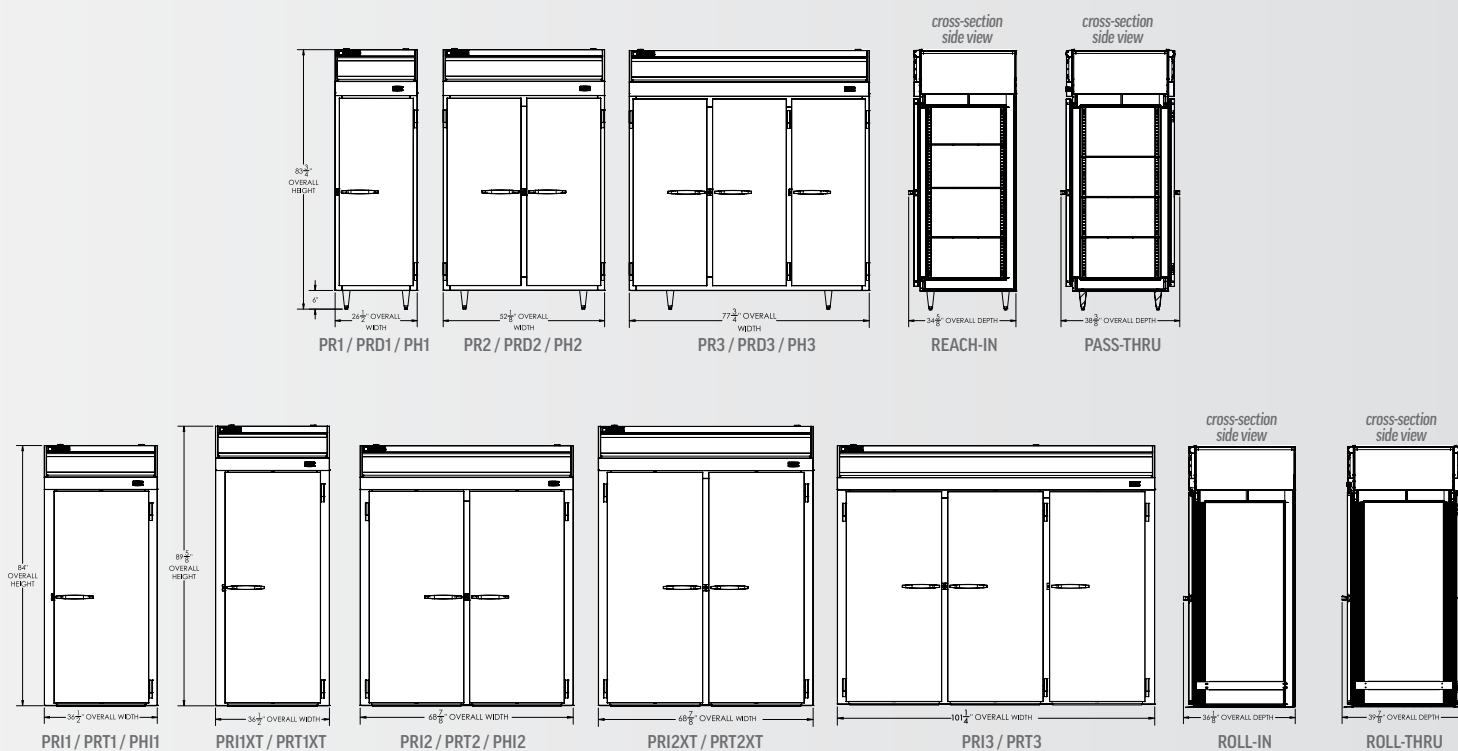

P SERIES

FREEZERS - REACH IN

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PF1HC-1AS	1/3	115	3/4	9.1	21.01	26.50	34.63	77.75	320
	HALF SOLID	PF1HC-1AHS	2/3	115	3/4	9.1	21.01	26.50	34.63	77.75	320
	GLASS	PF1HC-1BG	1/3	115	3/4	9.1	21.01	26.50	33.38	77.75	406
	HALF GLASS	PF1HC-1BHG	2/6	115	3/4	9.1	21.01	26.50	33.38	77.75	398
52" 2 SECTION	SOLID	PF2HC-1AS	2/6	115	3/4+	10.5	44.57	52.13	34.63	77.75	483
	HALF SOLID	PF2HC-1AHS	4/6	115	3/4+	10.5	44.57	52.13	34.63	77.75	483
	GLASS	PF2HC-1BG	2/6	115	2 X 3/4	13.9	44.57	52.13	33.38	77.75	600
	HALF GLASS	PF2HC-1BHG	4/6	115	2 X 3/4	13.9	44.57	52.13	33.38	77.75	624
78" 3 SECTIONS	SOLID	PF3HC-1AS	3/9	115	2 X 3/4	13.9	68.34	77.75	34.63	77.75	625
	HALF SOLID	PF3HC-1AHS	6/9		2 X 3/4	13.9	68.34				
	GLASS	PF3HC-1BG	3/9	115	2 X 3/4	13.9	68.34	77.75	33.38	77.75	841
	HALF GLASS	PF3HC-1BHG	6/9		2 X 3/4	13.9	68.34				

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS - PASS-THRU

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PFD1HC-1AS	2/3	115	3/4	9.1	22.9	26.50	38.38	77.75	370
	HALF SOLID	PFD1HC-1AHS	4/3	115	3/4	9.1	22.9	26.50	38.38	77.75	370
	GLASS	PFD1HC-1BG	2/3	115	3/4	10.5	22.9	26.50	35.88	77.75	471
	HALF GLASS	PFD1HC-1BHG	4/3	115	3/4	10.5	22.9	26.50	35.88	77.75	436
52" 2 SECTION	SOLID	PFD2HC-1AS	4/6	115	2 X 3/4	13.9	48.33	52.13	38.38	77.75	682
	HALF SOLID	PFD2HC-1AHS	8/6	115	2 X 3/4	13.9	48.33	52.13	38.38	77.75	652
	GLASS	PFD2HC-1BG	4/6	115	2 X 3/4	13.9	48.33	52.13	35.88	77.75	738
	HALF GLASS	PFD2HC-1BHG	8/6	115	2 X 3/4	13.9	48.66	52.13	35.88	77.75	738

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

Spec Line Freezers & Dual Temps

FREEZERS - ROLL-IN

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5" 1 SECTION	SOLID	PFI1HC-1AS	1/0	115	3/4	9.1	34.86	36.5	36.13	84	426
		PFI1XTHC-1AS					38.06			89.63	438
69" 2 SECTION	SOLID	PFI2HC-1AS	2/0	115	2 X 3/4	13.9	70.84	68.88	36.13	84	735
		PFI2XTHC-1AS					77.35			89.63	766
101" 3 SECTION	SOLID	PFI3HC-1AS	3/0	115	2 X 3/4	13.9	106.81	101.25	36.13	84	1,206

Depth measurement includes handles.

FREEZERS - ROLL-THRU

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5" 1 SECTION	SOLID	PFT1HC-1AS	2/0	115	3/4+	10.5	38.69	36.5	39.88	84	451
		PFT1XTHC-1AS					42.27			89.63	463
69" 2 SECTION	SOLID	PFT2HC-1AS	4/0	115	2 X 3/4	13.9	78.49	68.88	39.88	84	735
		PFT2XTHC-1AS					85.76			89.63	766

Depth measurement includes handles.


DUAL-TEMPS - REACH-IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 2 HALF SECTIONS (1 FRIDGE/1 FREEZER)	HALF SOLID	PRF12-12HC-1HS	2/4	115 (X2)	R: 1/3 F: 1/3	R: 7.5 F: 7.5	R: 9 F: 9	26.63	34.63	77.75	438
	HALF GLASS	PRF12-12HC-1HG									448
52" 2 SECTIONS (1 FRIDGE/1 FREEZER)	SOLID	PRF24-24HC-1AS	2/6	115 (X2)	R: 1/3 F: 3/4	R: 6.5 F: 9.1	R: 21 F: 21	52	33	77.75	701
	HALF SOLID	PRF24-24HC-1AHS									692

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

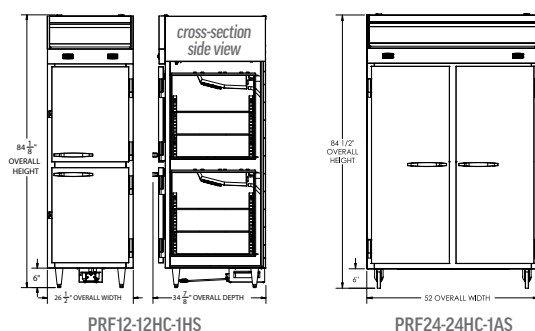

P SERIES

Stainless steel breakers

Full electronic control

Self-closing doors

with 120° stay-open feature, on cam-lift hinges

Built-in adjustable humidity control

Door locks standard

for both Solid and Glass doors

Magnetic gasket attached to each door

for positive seal

6" adjustable legs

(3" casters or 6" caster option available at no charge when specified on order)

3 chrome-plated wire shelves

per section

Removable access panel

for ease of service and maintenance

Temperature range from 80-180° F



**MAXIMUM RESISTANCE TO WEAR AND TEAR
WITH STAINLESS STEEL BREAKER CAPS AND DOOR LINERS**

**MODULAR INTERIOR GIVES MAXIMUM FLEXIBILITY
FOR SHELF AND SLIDE COMBINATIONS**

3 YEAR PARTS AND LABOR WARRANTY



TRAY SLIDES A AVAILABLE
holds one 18x26" or two 14x18"



TRAY SLIDES A/C AVAILABLE
hold one 18x26", or two 14x18",
or two 12x20"

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

CONFIGURATIONS

- Reach-in
- Pass-thru
- Roll-in / Roll-thru / Extra-tall

Spec Line Warming Cabinets



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AGENCY CERTIFICATIONS



AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits (reach-in & pass-thru only)
- Stainless steel shelves
- Kick plate

AVAILABLE OPTIONS

- Left hand hinge doors

MOUNTING OPTIONS

- 6" legs (standard)
- 6" casters
- 3" casters
- Flanged/seismic feet

P SERIES

WARMING CABINETS - REACH IN

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	WATTS	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PH1-1S	1/3	208-240	1500	6.3	21.5	26.50	35	77.75	320
	HALF SOLID	PH1-1HS	2/3	208-240	1500	6.3	21.5	26.50	35	77.75	320
	GLASS	PH1-1BG	1/3	208-240	1500	6.3	21.5	26.50	33.38	77.75	320
	HALF GLASS	PH1-1BHG	2/3	208-240	1500	6.3	21.5	26.50	33.38	77.75	320
52" 2 SECTIONS	SOLID	PH2-1S	2/6	208-240	3000	13	46.5	52.13	35	77.75	440
	HALF SOLID	PH2-1HS	4/6	208-240	3000	13	46.5	52.13	35	77.75	590
	GLASS	PH2-1BG	2/6	208-240	3000	13	46.5	52.13	33.38	77.75	440
	HALF GLASS	PH2-1BHG	4/6	208-240	3000	13	46.5	52.13	33.38	77.75	440

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

WARMING CABINETS - PASS-THRU

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	WATTS	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PH1-1S-PT	2/3	208-240	1500	6.3	21.5	26.50	38.38	77.75	320
	HALF SOLID	PH1-1HS-PT	4/3	208-240	1500	6.3	21.5	26.50	38.38	77.75	320
	GLASS	PH1-1BG-PT	2/3	208-240	1500	6.3	21.5	26.50	35.88	77.75	320
	HALF GLASS	PH1-1BHG-PT	4/3	208-240	1500	6.3	21.5	26.50	35.88	77.75	320
52" 2 SECTIONS	SOLID	PH2-1S-PT	4/6	208-240	3000	13	46.5	52.13	38.38	77.75	440
	HALF SOLID	PH2-1HS-PT	8/6	208-240	3000	13	46.5	52.13	38.38	77.75	440
	GLASS	PH2-1BG-PT	4/6	208-240	3000	13	46.5	52.13	35.88	77.75	590
	HALF GLASS	PH2-1BHG-PT	8/6	208-240	3000	13	46.5	52.13	35.88	77.75	590

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

WARMING CABINETS - ROLL-THRU

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS	VOLTS	WATTS	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5"	SOLID	PH11-1S-PT	2	208-240	1500	6.3	33.6	36.5	39.88	84.38	325
69"	SOLID	PH12-2S-PT	4	208-240	3000	13	72.4	68.88	39.88	84.38	540

Depth measurement includes handles.

Spec Line Warming Cabinets

P-Series Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	P Series, 1 section	50597706
Epoxy Coated Wire Shelf	P Series, 2 section or 3 section (left or right)	50597806
Epoxy Coated Wire Shelf	P Series, 3 section (center)	50597906
Shelf Clip	P Series	50022601
MOUNTING		
6" Caster	P Series (set of four)	0-0140-105
3" Caster	P Series (set of four)	0-0140-103
6" Seismic/Flanged Legs	P Series (set of four)	00C26-028A
LOCKS		
Door lock	P Series	50597111
TRAY SLIDE KITS		
TYPE "A" STANDARD		
1 tray slide set for: one 18x26" pan, or two 14x18" pans	P-Series	10601211S
TYPE "A/C" STANDARD		
1 tray slide set for: one 18x26" pan, or two 14x18" pans, or two 12x20" pans	P-Series	10601201S



Cross Temp[®] Series

Easily converts from refrigerator to freezer

exclusive Beverage-Air Cross Temp[®] technology

Temperature range of -15 to 40° F

Modulates coil temp to achieve desired set point

while achieving maximum energy efficiency

Single cabinet configurable to all menu initiatives

Intuitive compressor

adjusts for optimal effectiveness in high-use situations

Quicker pull-down

for both air and product temperatures

Improved product stability

Smart-defrost

Expansion valve

Rapid-recovery after defrost

consistent product temperature and ensures food quality

Door locks standard

Solid doors only (optional on glass door models)

Featuring environmentally friendly energy efficient R290 refrigerant



EASILY CONVERTS FROM REFRIGERATOR TO FREEZER

VARIABLE SPEED COMPRESSOR TECHNOLOGY ACHIEVES 30% MORE ENERGY EFFICIENCY COMPARED TO A SINGLE-SPEED



EASY-TO-USE CONTROLLER
to quickly adjust set points




VARIABLE SPEED SYSTEM
modulates coil temp

AVAILABLE DOORS

- Solid (one full-door)
- Half Solid (two half-doors)
- Glass (one full-door)
- Half Glass (two half-doors)

AGENCY CERTIFICATIONS



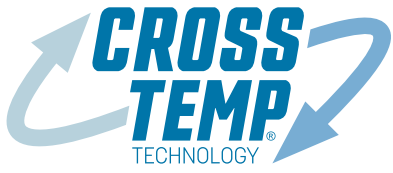

Easily converts from refrigerator to freezer
with Beverage-Air's exclusive Cross Temp® technology

Convertible Refrigeration



EXTERIOR FINISHES

- Stainless steel front with continuous coil coated sides
- Stainless steel sides/front

INTERIOR FINISHES

- Corrosion resistant aluminum
- Stainless steel

AVAILABLE ACCESSORIES

- Tray Slides
- Additional shelves

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters (single section only)
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors



Cross Temp® Series

1 SECTION & COMPRESSOR

CAN CONVERT BETWEEN FREEZER AND REFRIGERATOR
TEMPERATURES FROM -15° TO 40°F

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26" 1 SECTION	SOLID	CT1HC-1S	1/3	115	4/5	8	23.1	26	33.63	78.5	326
	HALF SOLID	CT1HC-1HS	2/3								324
	GLASS	CT1HC-1G	1/3	115	4/5	8	23.1				429
	HALF GLASS	CT1HC-1HG	2/3								356

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.


2 SECTIONS & COMPRESSORS

CAN CONVERT BETWEEN FREEZER AND REFRIGERATOR
TEMPERATURES FROM -15° TO 40°F


MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 2 SECTIONS (STACKED)	HALF SOLID	CT12-12HC-1HS	2/4	115 (X2)	1: 1/3 2: 1/3	1: 7.5 2: 7.5	1: 9 2: 9	26.5	34.88	78.13	438
	HALF GLASS	CT12-12HC-1HG	2/4								360

Depth measurement includes handles.


For total height, add 6 inches for your mounting choice.

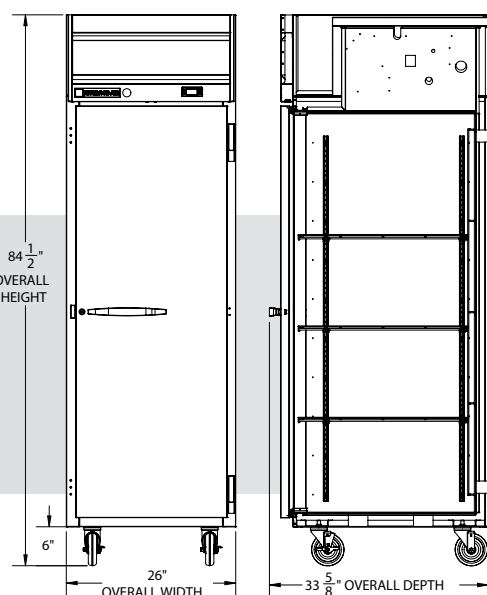

CT1HC

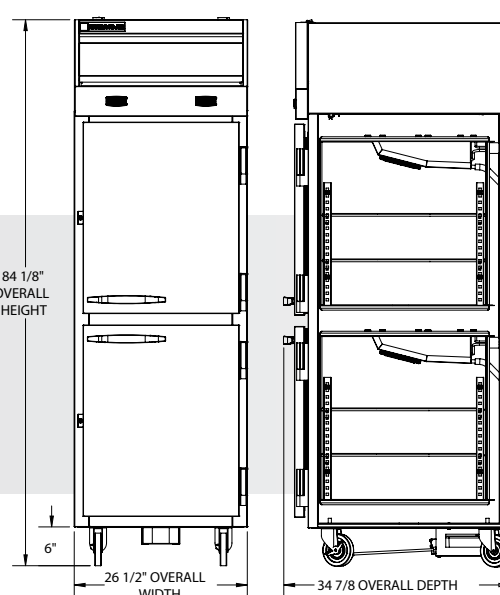

CT12-12HC-1HS

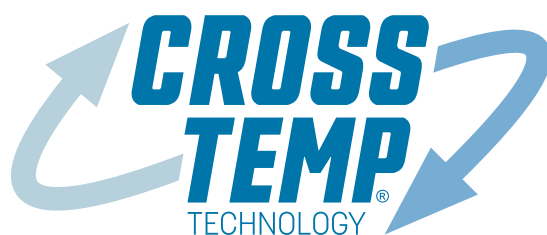

WHAT IS CROSS TEMP® TECHNOLOGY?

New from Beverage-Air, Cross Temp™ technology allows the user to easily switch the unit back and forth from refrigerator to freezer as needed, with a range of -15° to 40°F.

THE PURPOSE OF CROSS TEMP®

Simply put, Cross Temp technology lets the user get the most flexibility from the unit, by letting them switch from fridge to freezer as their menus change with the seasons and initiatives, including ice-cream storage.

IS CROSS TEMP ENERGY EFFICIENT?

The Cross Temp® units are intuitive and self-adjust for optimal effectiveness based on usage. Even in high-usage situations, Cross Temp units adjust to maintain maximum energy efficiency.

HOW LONG DOES THE CONVERSION TAKE?

On average, a Cross Temp unit can convert from refrigerator to freezer or vice versa, in under an hour. (Conditions and results will vary)

Cross Temp® Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	Cross Temp Flat Shelving 1 Door Unit (CT1)	403-889D-01
S/S Shelves	Cross Temp Flat Shelving 1 Door Unit (CT1)	403-889D-04
Epoxy Coated Wire Shelf	Cross Temp Flat Shelving (CT12)	50597706
Shelf Clip	Cross Temp 1 Door Unit (CT1)	403-169A
Shelf Clip	Cross Temp (CT12)	50022601
MOUNTING		
6" Caster	Cross Temp 1 Door Unit (CT1) (set of four)	61C01-001A
3" Caster	Cross Temp 1 Door Unit (CT1) (set of four)	61C01-013A
6" Black Leg	Cross Temp 1 Door Unit (CT1) (set of four)	58B02S001A
6" Seismic/Flanged Legs	Cross Temp 1 Door Unit (CT1) (set of four)	00C31-055A
ADDITIONAL ACCESSORIES		
Door Lock	Cross Temp Series - Glass Doors (per door)	61C11S032A
TRAY SLIDE KITS		
TYPE "A" STANDARD		
1 tray slide set for: one 18x26" pan, or two 14x18" pans	P-Series, Cross Temp Series	10601211S
TYPE "A/C" STANDARD		
1 tray slide set for: one 18x26" pan, or two 14x18" pans, or two 12x20" pans	P-Series, Cross Temp Series	10601201S

BLAST CHILLERS/FREEZERS

Compact construction

Electronic control board display

Custom chill/freeze cycles

Core temperature probe

Manual defrost

**Insulation is CFC and HCFC free,
high density polyurethane**

R404A refrigeration

Self-contained refrigeration

**3 Year parts and labor / Additional 2 year
compressor part warranty**

Automatic product storing at end of cycle

Up to 99 custom programmable cycles



WHAT IS BLAST CHILLING AND FREEZING?

Blast Chilling extracts the heat out of food, rapidly lowering the temperature. Department of Health guidelines require that all food temperatures be reduced from 150°F to 38°F degrees within a 90 minute period to keep food out of the “danger zone” of 145°F to 46°F, where bacteria multiplies fast.

Blast freezing rapidly lowers food temperatures from 150°F to 0°F vs. chilling temperatures above.

WHAT IS SOFT CHILL?

The Soft Chill cycle is ideal for the rapid, but gentle chilling of any dish (i.e., rice, pasta, fish, and fruit). This cycle brings the temperature of the food down while maintaining positive air temperatures of 37°F or above. This prevents ice crystals from forming that can damage the structure of delicate foods and allows for delicate foods to keep their brilliant colors.

WHAT IS HARD CHILL?

The Hard Chill cycle is ideal for chilling “standard products” such as cooked meat, lasagna, and individually portioned meals.

BENEFITS OF BLAST CHILLING

- Always serve fresh, top quality products
- Color, texture, and nutritional value are locked in
- The fast cooling process of blast chilling dramatically reduces bacteria reproduction, minimizing food spoilage
- Delicate foods like rice, pasta, fish, and fruit are protected
- Kitchen Efficiency – Saves Time & Money
- Allows advance food prep by preparing larger batches that can be refrigerated or frozen for later use
- Can enhance profits by increasing product capacity and reducing food waste
- Allows left over food from serving line to be quickly and safely chilled for later use
- Use Blast Chiller/Freezers on raw or cooked food

BLAST CHILLER/FREEZERS

MODEL WIDTH	MODEL #	VOLTS	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	PAN CAPACITY	CHILLING CYCLE	CHILLING CAPACITY
22"	CF031AG	115-120	9.9	7.3	22.05	27.6	20.47	104	3	194° to 37° F (90 minutes)	17.6 lbs
										194° to 0° F (240 minutes)	11 lbs

Depth measurement includes handles.
Height measurement includes mounting height.

BLAST CHILLER/FREEZERS

Self-closing doors

with still position at 100 degrees

Ergonomic handles

6" casters standard

APPROXIMATE MODEL WIDTH	MODEL #	VOLTS	AMPS	WIDTH	DEPTH	HEIGHT	PAN CAPACITY	CHILLING CYCLE	CHILLING CAPACITY
31"	BF051AP	208-240 6-15P	6.1	31.13	27.5	33.5	5	194° to 37° F (90 minutes)	45 lbs
								194° to 0° F (240 minutes)	30 lbs
31"	BF084AP	208-240 6-15P	10.1	31.13	31.5	52	8	194° to 37° F (90 minutes)	70 lbs
								194° to 0° F (240 minutes)	40 lbs
31"	BF124AP	208-240 15-20P	9	31.13	31.5	70.88	12	194° to 37° F (90 minutes)	100 lbs
								194° to 0° F (240 minutes)	70 lbs
31"	BF164AP	208-240 15-20P	13.2	31.1	31.5	76.75	16	194° to 37° F (90 minutes)	140 lbs
								194° to 0° F (240 minutes)	100 lbs
71"	BF224AP	208-240 15-30P	24	31.1	34.63	70.88	24 12x20" 12 18x26"	194° to 37° F (90 minutes)	200 lbs
								194° to 0° F (240 minutes)	140 lbs

Depth measurement includes handles.
Height measurement includes mounting height.

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
3.2" Casters	BF051AG	920596
Casters	BF084AP / BF124AP / BF164AP	FR965868
Casters	BF224AP	FR920596
Casters	BF224AP	FR920019
ADDITIONAL ACCESSORIES		
Replacement probe for BF series	All BF Models	FR6638321
Secondary probe	All BF Models	FR966428



CORE PROBE
measures product temperature



ELECTRONIC CONTROL DISPLAY
intuitive programmable display

FINISHES

- Stainless steel interior and exterior

ACCESSORIES

- UV Lamp (must be added at time of order)

AGENCY CERTIFICATIONS



BLAST CHILLER/FREEZER/THAWER

NEW

Stainless Steel Exterior And Interior

Rounded interior corners for proper cleaning

High Density, Polyurethane Insulation

Hinged Door With Gasket

with Closing Ramp System and Ergonomic Vertical Door Handle

Anti-Condensation Resistance

Placed On The Door Under The Gasket

Stainless Steel Door Liner

Thick Stainless Steel Internal Bumper

to Avoid Damage Caused By The Cart

Die-Formed Leak-Proof Floor

Heated Core Probe

with 4 Measuring Points

Customized Blast Chilling, Blast Freezing and Thawing Cycles

320 cycles can be memorized

USB Connection

for Uploading And Downloading Data And Recipes



5" HIGH DEFINITION, EASY-TO-USE TOUCH DISPLAY
BLAST CHILLING, SHOCK FREEZING, THAWING MODE
SELF-CONTAINED REFRIGERATION SYSTEM



EXPANDABILITY AND CONTROL
 easily add, edit or rename recipes, all organized by product type and function

TOUCH CONTROL PHOTO MENU
 is easy to use, and the function selection is immediate and intuitive

AGENCY CERTIFICATIONS



BLAST CHILLER/FREEZERS

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CHILLING CYCLE	CHILLING CAPACITY
39"	BF200RB-PFO	1	208	2.8	25.6	49.95	39	64.25	94.5	1697	160° to 38° F (90 minutes)	187 lbs

*Depth measurement includes handles.
Height measurement includes mounting height.*



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AVAILABLE ACCESSORIES

- UV Sterilization Lamp
(must be added at time of order)
- Additional Single Sensor Probe

INTERIOR SPACE CAPACITY

- Maximum Interior Dimensions for Carts:
30.9"W x 37"D x 75.5"H





GLASS DOOR MERCHANDISERS

CONSISTENT COOLING POWER WITH WELL LIT PRODUCT DISPLAY

MARKETEER®

NEW SIZES
AVAILABLE

Double pane, Low-E argon-filled glass doors

LED lighting

creates dynamic product presentation

Electronic temperature control

Energy efficient and environmentally friendly R290 refrigerant

**DOE 2017 compliant
& Energy Star 4.0 rated**

Self-closing hinged doors
with mechanical locks, standard

**1 & 2 door models available in
Black or White finish options**

Sliding glass doors available
on select units



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

ENERGY STAR 4.0 RATED

UNIQUE SIZING OPTIONS



MECHANICAL LOCKS
standard on all hinged units
(excluding MT21 models)



BUILT-IN LED LIGHTS
for dynamic product presentation

AVAILABLE DOORS

- Hinged
- Sliding door

AGENCY CERTIFICATIONS



Refrigerators

REFRIGERATORS

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
19" 1 DOOR	HINGED	MT08-1H6B	1/5	115	1/8	1.8	7.69	18.88	20.63	71.38	189	BLACK
		MT08-1H6W										WHITE
25" 1 DOOR	HINGED	MT10-1B	1/3	115	1/6	3.2	9.43	24.88	22.5	54.38	171	BLACK
		MT10-1W										WHITE
	HINGED	MT12-1B	1/4	115	1/6	4.1	11.5	24.88	22.81	63.63	210.32	BLACK
		MT12-1W										WHITE
30" 1 DOOR	HINGED	MT23-1B	1/5	115	1/3	7	19.2	29.56	26.13	78.63	246.91	BLACK
		MT23-1W										WHITE
39" 2 DOORS	HINGED	MT34-1B	2/10	115	1/3	7.6	26.12	39.5	27.5	79	324.1	BLACK
		MT34-1W										WHITE
40" 2 CURVED DOORS	HINGED	MT21-1B	2/10	115	1/3	3.6	16.8	40.13	24.5	57.5	275.6	BLACK
		MT21-1W										WHITE
47" 2 DOORS	HINGED	MT49-1B	2/10	115	1/2	8.3	37.42	47.13	30.13	79	441.8	BLACK
		MT49-1W										WHITE
	SLIDING	MT49-1-SDB	2/10	115	1/2	8.3	39.03	47.13	30.13	78.63	441.8	BLACK
		MT49-1-SDW *										WHITE
54" 2 DOORS	HINGED	MT53-1B	2/10	115	1/2	8.3	41.66	54.25	29.38	79	483.91	BLACK
		MT53-1W										WHITE
	SLIDING	MT53-1-SDB	2/10	115	1/2	8.7	41.66	54.25	29.38	78.63	483.91	BLACK
		MT53-1-SDW *										WHITE

* Sliding glass doors and door frames are black on black exterior and white exterior units. / Depth measurement includes handles.

EXTERIOR FINISHES

- Black
- White

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Visislide shelving kit
- Extra shelves & clips
- 3" Casters
- 2" Leveling Legs



MARKETMAX®

Double pane, lowE argon-filled glass doors

Freezers have triple pane

Field reversible (refrigerator only)

Requires additional hardware kit

Self-closing doors

120° stay open feature

LED lighting

creates dynamic product presentation

Brightly lit sign panel

Custom door decals and signage available

Full electronic temperature control

Energy efficient and environmentally friendly R290 refrigerant

5 epoxy coated wire shelves per section

1, 2 & 3 door model options available

Sliding glass doors available on select units



**ENERGY EFFICIENT R290 PROVIDES SOLUTION
FOR ALL ENVIRONMENTAL CONCERNS**

DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

MADE IN THE USA



FULL ELECTRONIC CONTROL
with easy to read digital display



BRIGHTLY LIT HEADER PANEL
to grab attention and increase sales

AVAILABLE DOORS

- Hinged
- Sliding door

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Black
- White
- Stainless steel

INTERIOR FINISHES

- Black
- White
- Stainless steel

AVAILABLE ACCESSORIES

- Electronic locks
- Dual-temp models
- Wine models
- Door locks
- Gravity-Flo kits
- Price-tag molding
- Custom graphics
- Field reversible door kit (refrigerators only)

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available
- Header signs

MOUNTING OPTIONS

- 6" casters
- 6" legs
- 3" casters

MARKETMAX®

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL NUMBERS		DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
		BLACK	WHITE									
27"	HINGED	MMR19HC-1-B	MMR19HC-1-W	1/3	115	1/4	3	31.87	27.25	27.5	78	280
27"	HINGED	MMR23HC-1-B	MMR23HC-1-W	1/5	115	1/4	3	40.98	27	33.63	78	358
30"	HINGED	MMR27HC-1-B	MMR27HC-1-W	1/5	115	1/4	3	45.53	30	33.63	78	382
40"	HINGED	MMR35HC-1-B	MMR35HC-1-W	2/6	115	1/4	2.4	65	39.5	33.5	78	400
43.5"	SLIDING	MMR38HC-1-B	MMR38HC-1-W	2/10	115	1/3	5.4	63.32	43.5	32.25	78	478
47"	HINGED	MMR44HC-1-B	MMR44HC-1-W	2/10	115	1/3	5.4	71.07	47	33.63	78	544
52"	SLIDING	MMR45HC-1-B	MMR45HC-1-W	2/10	115	1/3	5.4	75.70	52	32.25	78	555
	HINGED	MMR49HC-1-B	MMR49HC-1-W	2/10	115	1/3	5.4	78.63	52	33.63	78	584
75"	SLIDING	MMR66HC-1-B	MMR66HC-1-W	3/15	115	1/2	6.2	108.76	75	32.25	78	726
	HINGED	MMR72HC-1-B	MMR72HC-1-W	3/15	115	1/2	6.2	113.41	75	33.63	78	750

NEW
SIZE!NEW
SIZE!

Depth measurement includes handles.

FREEZERS

UTILIZES EXPANSION VALVE TECHNOLOGY TO
MAINTAIN TEMPERATURE OF 0° TO -10°F.

MODEL WIDTH	DOOR TYPE	MODEL NUMBERS		DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
		BLACK	WHITE									
24"	HINGED	MMF12HC-1-B	MMF12HC-1-W	1/4	115	1/2	5	22.39	24.13	25.75	62	291
27"	HINGED	MMF19HC-1-B	MMF19HC-1-W	1/3	115	3/4	7.5	31.87	27.25	27.5	78	280
27"	HINGED	MMF23HC-1-B	MMF23HC-1-W	1/5	115	3/4	7.5	40.98	27	33.63	78	416
30"	HINGED	MMF27HC-1-B	MMF27HC-1-W	1/5	115	3/4	7.5	45.53	30	33.63	78	427
40"	HINGED	MMF35HC-1-B	MMF35HC-1-W	2/6	115	3/4	11	65	39.5	33.5	78	400
47"	HINGED	MMF44HC-1-B	MMF44HC-1-W	2/10	115	3/4	11	63.32	47	33.63	78	568
52"	HINGED	MMF49HC-1-B	MMF49HC-1-W	2/10	115	3/4	11	78.63	52	33.63	78	596
75"	HINGED	MMF72HC-5-B	MMF72HC-5-W	3/15	230*	3/4 (X2)	14	113.41	75	33.63	78	971

NEW
SIZE!NEW
SIZE!*Freezers powered by 115/208-230 volts are designed for field wiring
(requires 4-wire electrical circuit, hard-wired).

Depth measurement includes handles.

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
52" 2 DOORS	HINGED	MMRF49HC-1-A-BW	2/10	115 (X2)	R: 1/4 F: 3/4	R: 2.4 F: 7.5	R: 21.01 F: 21.01	52	33.63	78	696	BLACK
		MMRF49HC-1-A-WW										WHITE
52" 2 DOORS	HINGED	MMRR49HC-1-A-BW	2/10	115 (X2)	R: 1/4 R: 1/4	R: 2.4 R: 2.4	R: 21.01 R: 21.01	52	33.63	78	696	BLACK
		MMRR49HC-1-A-WW										WHITE
75" 3 DOORS	HINGED	MMRF72HC-1-B-BW	3/15	115 (X2)	R: 1/4 F: 1	R: 2.4 F: 11	R: 19.62 F: 44.85	75	33.63	78	942	BLACK
		MMRF72HC-1-B-WW										WHITE
75" 3 DOORS	HINGED	MMRR72HC-1-B-BW	3/15	115 (X2)	R: 1/4 R: 1/4	R: 2.4 R: 2.4	R: 19.62 R: 44.85	75	33.63	78	942	BLACK
		MMRR72HC-1-B-WW										WHITE

Depth measurement includes handles.

**All options for MarketMax Dual Temps are specified within
the model number using the designated codes described below.**

MMRF49HC EXAMPLE

Customer orders a MMRF49HC-1-A-BW

- Exterior will be black. Interior of the freezer AND the refrigerator will be white. (BW)
- The refrigerator will be on the LEFT with left hand hinged door. The freezer will be on the RIGHT with right hand hinged door. (RF)

MMRF72 EXAMPLE

Customer orders a MMRF72HC-1-B-WW

- Exterior will be white. Interior of the freezer AND the refrigerators will also be white. (WW)
- The refrigerator will be on the left and freezer will be on the right (RF)
- Single section on the left, and double section on the right (B)

MM (RF, FR) 49 - COOLER CONFIGURATIONS

SINGLE DOOR ON LEFT - SINGLE DOOR ON RIGHT

FR	Freezer on the Left with Left Hand Hinged Door, Refrigerator on the Right with Right Hand Hinged Door
RF	Refrigerator on the Left with Left Hand Hinged Door, Freezer on the Right with Right Hand Hinged Door
RR	One Refrigerator on the Left, second Refrigerator on Right

SPECIAL DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

-18	All Left Hand Hinged Doors
-015	All Right Hand Hinged Doors

MM (RF, FR) 72 - COOLER CONFIGURATIONS

Refrigerator/Freezer Location

FR	Freezer on the Left, Refrigerator on the right
RF	Refrigerator on the Left, Freezer on the right
RR	One Refrigerator on the Left, second Refrigerator on Right

Door Configuration

B	Single section on left, Double section on right
C	Double section on left, Single section on right

COLOR COMBINATIONS

(BOTH CABINET INTERIORS BEING THE SAME COLOR)

BW	Black Exterior / White Interior
WW	White Exterior / White Interior
SW	Stainless Exterior / White Interior
BB	Black Exterior / Black Interior
BS	Black Exterior / Stainless Interior
WB	White Exterior / Black Interior
WS	White Exterior / Stainless Interior
SS	Stainless Exterior / Stainless Interior
SB	Stainless Exterior / Black Interior

B DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

	Standard - Single section on the Left with Left Hand Hinged Door, 2 Door Section on the Right with Left/Right Hand Hinged Doors
-282	Single section on the Left with Left Hand Hinged Door, 2 Door Section on the Right with 2 Right Hand Hinged Doors
-18	Single section on the Left with Left Hand Hinged Door, 2 Door Section on the Right with 2 Left Hand Hinged Doors
-015	Single section on the Left with Right Hand Hinged Door, 2 Door Section on the Right with 2 Right Hand Hinged Doors

C DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

	Standard - 2 Door Section on the Left with Left/Right Hand Hinged Doors, Single Door Section on the Right with Right Hand Hinged Door
-18	2 Door Section on the Left with 2 Left Hand Hinged Doors, Single Door Section on the Right with Left Hand Hinged Door
-015	2 Door Section on the Left with 2 Right Hand Hinged Doors, Single Door Section on the Right with Right Hand Hinged Door
-103	2 Door Section on the Left with 2 Left Hand Hinged Doors, Single Door Section on the Right with Right Hand Hinged Door

MARKETMAX® IQ

Sleek design

Keeps unattended merchandisers secure in your micro-market

NAMA certified, UL & NSF compliant

Secures temperature-sensitive products for worry-free operation

Automatically locks when power loss or temperature drop is sensed

Unlocks automatically if outage is less than 30 minutes

LED indicator to quickly view status

Flashes to indicate if protection event occurs

Easy-access test switch for health inspectors

Built-in safety feature allows escape in case of accidental lock-in

Optional features such as remote monitoring, fault alerts, and remote unlocking can be added using FreshTraq.com



ENERGY EFFICIENT R290 PROVIDES SOLUTION FOR ALL ENVIRONMENTAL CONCERNS

DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

MADE IN THE USA

Detects power loss or temperature failure, and automatically locks the unit.

AVAILABLE DOORS

- Hinged
- Sliding door

AGENCY CERTIFICATIONS





Merchandisers with Electronic Smart Lock Feature

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
24" 1 DOOR	HINGED	MMR12HC-1-B-IQ	1/4	115	1/6	2	22.39	24.125"	25.75	62	291	BLACK
		MMR12HC-1-W-IQ										WHITE
27" 1 DOOR	HINGED	MMR23HC-1-B-IQ	1/5	115	1/4	3	40.98	27"	33.63	78	358	BLACK
		MMR23HC-1-W-IQ										WHITE
30" 1 DOOR	HINGED	MMR27HC-1-B-IQ	1/5	115	1/4	3	45.53	30"	33.63	78	382	BLACK
		MMR27HC-1-W-IQ										WHITE
47" 2 DOORS	HINGED	MMR44HC-1-B-IQ	2/10	115	1/3	5.4	63.32	47	33.63	78	544	BLACK
		MMR44HC-1-W-IQ										WHITE
52" 2 DOORS	HINGED	MMR49HC-1-B-IQ	2/10	115	1/3	5.4	78.63	52	33.63	78	584	BLACK
		MMR49HC-1-W-IQ										WHITE

*The IQ locks on single door units are external and will add 1 inch to the overall width shown above.

Depth measurement includes handles.

FREEZERS

UTILIZES EXPANSION VALVE TECHNOLOGY TO MAINTAIN TEMPERATURE OF 0° TO -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
24" 1 DOOR	HINGED	MMF12HC-1-B-IQ	1/4	115	1/2	5	22.39	24.125"	25.75	62	291	BLACK
		MMF12HC-1-W-IQ										WHITE
27" 1 DOOR	HINGED	MMF23HC-1-B-IQ	1/4	115	3/4	7.5	40.98	27"	33.63	78	416	BLACK
		MMF23HC-1-W-IQ										WHITE
30" 1 DOOR	HINGED	MMF27HC-1-B-IQ	1/4	115	3/4	7.5	45.53	30"	33.63	78	427	BLACK
		MMF27HC-1-W-IQ										WHITE
47" 2 DOORS	HINGED	MMF44HC-1-B-IQ	2/10	115	3/4	11	63.32	47	33.63	78	568	BLACK
		MMF44HC-1-W-IQ										WHITE
52" 2 DOORS	HINGED	MMF49HC-1-B-IQ	2/10	115	3/4	11	78.63	52	33.63	78	596	BLACK
		MMF49HC-1-W-IQ										WHITE

*The IQ locks on single door units are external and will add 1 inch to the overall width shown above.

Depth measurement includes handles.

EXTERIOR FINISHES

- Black
- White
- Stainless steel

INTERIOR FINISHES

- Black
- White
- Stainless steel

AVAILABLE ACCESSORIES

- Electronic locks
- Dual-temp models
- Wine models
- Door locks
- Gravity-Flo kits
- Price-tag molding
- Custom graphics
- Field reversible door kit

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available
- Header signs

MOUNTING OPTIONS

- 6" casters
- 6" legs
- 3" casters

MARKETMAX® WINE UNITS

standard MarketMax wine unit comes with standard doorlocks, wine thermostat, and five standard epoxy shelves




MarketMax wine unit with upgrades



The MarketMax wine units have the same great MarketMax features, with wine-specific options to create the ultimate wine merchandiser.

SHELVING UPGRADES

We offer curved and flat wine racks, designed to secure the bottles while keeping them prominently on display. Available in white, black, and chrome finish.

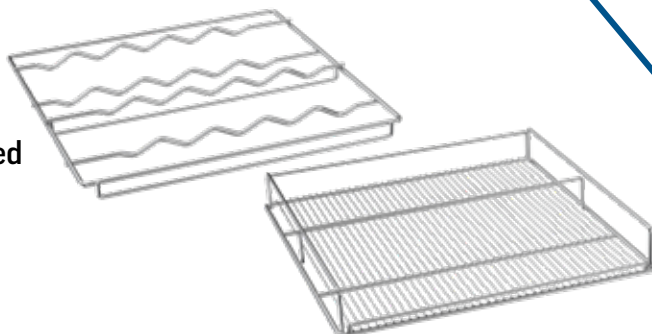

BASE UNIT

WINE OPTION UPGRADES

WINE REFRIGERATORS



SHELVING



SIGNAGE



UNIT MODEL # (BLACK EXTERIOR - B)	W	D	H	FLAT RACK	CURVED SHELF		
MMR23HC-1-B-WINE	27	33.63	78	403-933D	412-076D	409-418C-065	409-418C-064
MMR27HC-1-B-WINE	30	33.63	78	403-934D	412-078D	409-419C-150	409-419C-149
MMR44HC-1-B-WINE	47	33.63	78	412-070D	412-074D	409-421C-080	409-421C-079
MMR49HC-1-B-WINE	52	33.63	78	403-936D	412-077D	409-422C-121	409-422C-120
MMR72HC-1-B-WINE	75	33.63	78	412-071D	412-073D	409-423C-070	409-423C-069

Depth measurement includes handles.

Add your shelf color choice to the end of the shelf model #
-01 for white; -02 for black; -04 for chrome finish

DUAL-TEMP WINE REFRIGERATORS

SHELVING



SIGNAGE



UNIT MODEL #	W	D	H	FLAT RACK	CURVED SHELF		
MMRR49HC-1-A-BW-WINE	52	33.63	78	412-072D	412-075D	409-422C-121	409-422C-120
MMRR72HC-1-B-BW-WINE	75	33.63	78	412-071D (double section) 412-070D (single section)	412-073D (double section) 412-074D (single section)	409-423C-070	409-423C-069

Depth measurement includes handles.

Add your shelf color choice to the end of the shelf model #
-01 for white; -02 for black; -04 for chrome finish

CONTROLLER

Easily programmed to keep unit and its contents at the necessary set point (between 35-62° F)

To have your controller pre-programmed for white wines, change the WINE in the unit model number to WWINE; for red wines, change it to RWINE.



FINISHES

MarketMax exterior is standard black with optional white or stainless steel.

MarketMax interior is standard white with optional black or stainless steel.



COUNTERTOPS



CT96

Double pane, tempered glass door with locks

Heavy-duty black textured steel exterior
with black plastic door frames

Heavy-duty white epoxy coated steel interior

LED lighting
creates dynamic product presentation

3 epoxy coated shelves
top 2 shelves are adjustable

Full electronic temperature control with display

Refrigeration system uses R600a refrigerant
to comply with all environmental concerns

System is serviceable from the rear

Custom graphics available

1 year parts & labor warranty

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

AGENCY CERTIFICATIONS



MODEL	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	EXTERIOR COLOR	INTERIOR COLOR
CT96	CT96HC-1-B	1/3	115	1/5	1.3	5.9	21.38	25.5	37.5	112	BLACK	WHITE

*Depth measurement includes handles.
Height measurement includes mounting height.*

ENERGY EFFICIENT REFRIGERANT PROVIDES SOLUTION FOR ALL ENVIRONMENTAL CONCERNS

DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS



LED LIGHTING
for dynamic product presentation
(CT96 & CF3 only)



CUSTOM GRAPHICS AVAILABLE
for brand or product promotion
(CT96 & CF3 only)

Refrigerators & Freezers



CF3

Triple pane, tempered glass door

Pre-painted, steel interior and exterior
for easy cleaning

LED lighting
creates dynamic product presentation

3 shelves standard
one full & one half shelf

Custom graphics available

AGENCY CERTIFICATIONS



2" leveling legs
with up to 1" for leveling of the unit

Refrigeration system
uses R290 refrigerant
to comply with all environmental concerns

1 year parts & labor warranty



UCF20

Glass door provides clear
merchandising of ice cream

Oversized refrigeration system holds
-15°F to -10°F product temperature

Full electronic control
for enhanced defrost

AGENCY CERTIFICATIONS



Forced air design does not require
unit to undergo manual defrost
which is a major advantage to
comparable cold wall freezers

20" footprint for countertop
or undercounter applications

FREEZERS

MODEL	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR	OPERATING TEMPERATURE
CF3	CF3HC-1-W	1/2	115	1/4	4	4	23.75	22.5	28.5	120	WHITE	-10° F
UCF20	UCF20HC-25-15	1/2	115	1/2	3.65	2.25	20	24.5	31.13	117	STAINLESS	-10 to -15° F

Depth measurement includes handles.



DIPPING CABINETS

Galvanized metal cabinet

with powder coated painted surface

Easy-to-clean interior

Full electronic control

Sliding glass lids are LowE tempered

Lock and keys standard

2" Heavy-duty casters

allow easy and fast movement

Drain plug for easy cleaning

Lexan sneeze guard

Heavy-duty PVC coated wire support racks

allows containers to be positioned on top level for optimal storage

Each rack designed to hold

multiple 3-gallon ice cream containers

**R290 refrigerant provides low energy consumption
and is environmentally friendly**



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

**R290 REFRIGERANT PROVIDES LOW ENERGY CONSUMPTION
AND IS ENVIRONMENTALLY FRIENDLY**



LID LOCKS STANDARD
for loss prevention



LED LIGHTING
for dynamic product presentation

ACCESS OPTIONS

- Glass lids

AGENCY CERTIFICATIONS



DIPPING CABINETS

COLD WALL SYSTEM MAINTAINS TEMPERATURES OF 0 to -10°F.

MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
50"	BDC-HC-8	120	1/3	5.4	15.2	50.4	26.4	52	225	White
68"	BDC-HC-12	120	1/3	5.2	20.9	68.2	26.4	52	280	White

*Depth measurement includes handles.
For total height, add 2 inches for the caster height.*

BDC-HC-8 Capacity

Top rack: eight 3-gallon ice cream containers
Bottom rack: six 3-gallon ice cream containers

BDC-HC-12 Capacity

Top rack: twelve 3-gallon ice cream containers
Bottom rack: ten 3-gallon ice cream containers

EXTERIOR FINISHES

- White

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Custom graphics
- 2 Ring tub



NOVELTY CASES

White coated steel exterior

White powder coated surface interior

R290 refrigerant provides low energy consumption
and is environmentally friendly

LED lighting

Adjustable thermostat

Operating temperature of -10°F

Angle top design with LowE tempered glass lids

Lids are easily removable

Lid lock & keys

Round exterior edges

Integrated tag molding

2" heavy duty casters

Drain plug for easy cleaning

5 Removable baskets



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

**R290 REFRIGERANT PROVIDES LOW ENERGY CONSUMPTION
AND IS ENVIRONMENTALLY FRIENDLY**



LID LOCKS STANDARD
for loss prevention



LED LIGHTING
for dynamic product presentation

ACCESS OPTIONS

- Glass lids

AGENCY CERTIFICATIONS



NOVELTY CASES

MAINTAINS TEMPERATURES OF -10°F.

MODEL WIDTH	MODEL #	LIDS/ BASKETS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
28"	NC28HC-1-W	2/2	115	1/5	3	4.31	28.1	26.4	32.2	144	White
34"	NC34HC-1-W	2/3	115	1/4	3	5.67	34.1	26.4	32.2	155	White
43"	NC43HC-1-W	2/4	115	1/4	3.5	7.63	42.7	26.4	32.2	180	White
51"	NC51HC-1-W	2/5	115	1/4	3.5	9.43	50.6	26.4	32.2	200	White
60"	NC60HC-1-W	2/6	115	1/3	4	11.66	60.4	26.4	34.2	224	White
68"	NC68HC-1-W	2/7	115	1/3	4	21	68.3	26.4	34.2	251	White

NEW SIZE!

NEW SIZE!

*Depth measurement includes handles.
For total height, add 2 inches for the caster height.*



EXTERIOR FINISHES

- White

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Custom graphics
- Dip well



Glass Door Merchandiser Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	MMR/MMF23	403-900D-01
Epoxy Coated Wire Shelf	MMR/MMF27	403-871D-01
Epoxy Coated Wire Shelf	MMR/MMF49	403-873D-01
Epoxy Coated Wire Shelf	MMR/MMF72	403-874D-01
Epoxy Coated Wire Shelf, Black	MMR/MMF23	403-900D-03
Epoxy Coated Wire Shelf, Black	MMR/MMF27	403-871D-03
Epoxy Coated Wire Shelf, Black	MMR/MMF49	403-873D-03
Epoxy Coated Wire Shelf, Black	MMR/MMF72	403-874D-03
Wire Shelf	CT96/CTF96 (New Model)	CT9652
FLAT Wine Rack	MMR23	403-933D
FLAT Wine Rack	MMR27	403-934D
FLAT Wine Rack	MMR44	412-070D
FLAT Wine Rack	MMR49	403-936D
FLAT Wine Rack	MMR72	412-071D
FLAT Wine Rack	MMRR49	412-072D
FLAT Wine Rack	MMRR72	412-071D (double section) 412-070D (single section)
CURVED Wine Rack	MMR23	412-076D
CURVED Wine Rack	MMR27	412-078D
CURVED Wine Rack	MMR44	412-074D
CURVED Wine Rack	MMR49	412-077D
CURVED Wine Rack	MMR72	412-073D
CURVED Wine Rack	MMRR49	412-072D
CURVED Wine Rack	MMRR72	412-073D (double section) 412-074D (single section)
Shelf Clip	MMR/MMF Series	403-169A
Novelty Basket (White)	All MMF models	403-941D-01
Novelty Basket (Black)	All MMF models	403-941D-02
Shelf Clip	CT96	CT9651
Shelf Clip	CTR3	80FA39
Gravity Flo Kits	MM23	61C31-253D-01
Gravity Flo Kits	MM27	61C31-193A-01
Gravity Flo Kits	MM49/72	61C31-199A-01
MOUNTING		
3" Casters	MT Series (set of four)	61C01-011A
2" Leveling Feet	MT Series (set of four)	2016557
6" Seismic/Flanged Legs	MMR/MMF Series (set of four)	00C31-055A

Designate shelf color by adding one of these to the part number:

-01 White
-02 Black
-04 Chrome Finish



Chilled Wine Sign - Vineyard



Chilled Wine Sign - Corks

DESCRIPTION	UNIT(S)	PART NUMBER
SIGNAGE		
Price Tag Molding (per shelf)	MMR/F 23, 45/49, 66/72	61A32-082D-01
Price Tag Molding (per shelf)	MMR/F 27	61A32-090D-02
Price tag strips (5 p/kit)	MT08-1H6	2039785
Price tag strips (5 p/kit)	MT10-1	2039789
Price tag strips (5 p/kit)	MT23-1	2039787
Price tag strips (10 p/kit)	MT34-1	2082716
Price tag strips (10 p/kit)	MT49-1	2082715
Price tag strips (5 p/kit)	MT53-1	2030792
Brushed sign 26-3/8" x 8.5"	MMR23/MMF23	409-505B-01
Brushed sign 29 1/8" x 8.5"	MMR27/MMF27	409-505B-02
Brushed sign 46.13" W x 8.5"	MMR44/MMF44	409-505B-04
Brushed sign 51 1/8" x 8.5"	MMR/MMF49	409-505B-05
Brushed sign 74 1/4" x 8.5"	MMR/MMF72	409-505B-06
Flat Black Sign	MMR23/MMF23	409-488B-01
Flat Black Sign	MMR/MMF27	409-488B-02
Flat Black Sign	MMR/MMF49	409-488B-05
Flat Black Sign	MMR/MMF72	409-488B-06
Flat White Sign	MMR23/MMF23	409-418C-053
Flat White Sign	MMR/MMF27	409-419C-140
Flat White Sign	MMR/MMF49	409-422C-109
Flat White Sign	MMR/MMF72	409-423C-061
Self-Serve Sign	MMR23/MMF23	409-418C-054
Self-Serve Sign	MMR/MMF27	409-419C-141
Self-Serve Sign	MMR/MMF49/MMRF49	409-422C-110
Self-Serve Sign	MMR/MMF72/MMRF72	409-423C-062
Fresh Foods Sign	MMR23/MMF23	409-418C-056
Fresh Foods Sign	MMR/MMF27	409-419C-143
Fresh Foods Sign	MMR/MMF49	409-422C-112
Fresh Foods Sign	MMR/MMF72	409-423C-064
Cold Drinks Sign	MMR23	409-418C-055
Cold Drinks Sign	MMR27	409-419C-142
Cold Drinks Sign	MMR49	409-422C-111
Cold Drinks Sign	MMR72	409-423C-063
Chilled Wine Sign - Vineyard	MMR23	409-418C-064
Chilled Wine Sign - Vineyard	MMR27	409-419C-149
Chilled Wine Sign - Vineyard	MMR44	409-421C-079
Chilled Wine Sign - Vineyard	MMR49	409-422C-120
Chilled Wine Sign - Vineyard	MMR72	409-423C-069
Chilled Wine Sign - Corks	MMR23	409-418C-065
Chilled Wine Sign - Corks	MMR27	409-419C-150
Chilled Wine Sign - Corks	MMR44	409-421C-080
Chilled Wine Sign - Corks	MMR49	409-422C-121
Chilled Wine Sign - Corks	MMR72	409-423C-070
Got Milk Sign	MMR27	409-419C-102
Got Milk Sign	MMR 45/49	409-422C-087
Got Milk Sign	MMR 66/72	409-423C-054
ADDITIONAL ACCESSORIES		
Door Lock	CT96	61C11S043A
Door Lock	CR5	61C11-040A





OPEN AIR MERCHANDISERS

EASY-ACCESS AND HIGH VISIBILITY PRODUCT DISPLAYS

BREEZE™

Exterior finish is a heavy-duty steel
with a durable, baked on black or white coating

Curved design with open front & side shield
to maximize product display

Interior is white coated steel

2 recessed interior lights
provide maximum product visibility

3 epoxy coated shelves

Modern grille is easy to remove
for cleaning or service

Gravity-Flo organizer

Holds unit temperature from 34°-40°F

**Certified for bottled beverage
& packaged foods**

Brightly lit sign panel



**3 YEAR PARTS & LABOR WARRANTY
WITH AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

UNIQUE SIZE SUITED FOR ENDCAPS AND SCHOOLS

CUSTOM GRAPHICS AVAILABLE



SIDE SHIELD
to maximize product display



GRAVITY FLO
organizer standard

AGENCY CERTIFICATIONS



REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 32-38°F.

MODEL WIDTH	MODEL #	SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
30"	BZ13-1-B	3	115	1/2	12	12.63	30	32.75	54.38	336	BLACK
	BZ13-1-W										WHITE



EXTERIOR FINISHES

- Black
- White

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Black dividers
- Black shelves
- Roller kit
- Custom graphics and signage



VUEMAX™

NEWLY
REDESIGNED

NEW SLIM
MODEL

Heavy duty steel exterior
with a durable paint finish

Glass sides enhance product visibility
from side viewpoints

Foamed in place CFC-free polyurethane
insulation enhances the structural strength of the cabinet and increases energy efficiency

LED lighting
enhances product illumination
for maximum product visibility

Shelving display flexibility
Shelves can be installed in two positions

Full electronic temperature control
from 36° -40°F, with display

**Certified for bottled beverage
& packaged foods**

Night curtain

Stylish impact bumper

**Featuring environmentally friendly
energy-efficient R290 refrigerant**



SIDE SHIELD
to maximize product display



CUSTOM GRAPHICS AVAILABLE
for brand or product promotion

AGENCY CERTIFICATIONS





REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
35.5"	VMHC-7-1	3	115	1/3	10	9.58	35.5	31.75	63.88	423
	VMHC-12-1	5	115	(2) 1/4	12	15.45	35.13	31.75	83.13	520
52"	VMHC-18-1	5	115	(2) 1/3	12	23.87	52	31.75	83.38	637



SLIM MODEL

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
47.3"	VMHCSL-18	5	115	2 (1/3)	12	23	47.3	24.38	83.5	454



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

**IDEAL FOR GOURMET SHOPS, DELICATESSENS,
CONVENIENCE STORES & BAKERIES**

EXTERIOR FINISHES

- Black wrap over stainless steel
- White wrap over stainless steel
- Grey painted stainless steel

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Security Cover
- Bar/bag hooks
- Price tag molding
- Spring-loaded Product Dispensers
- Custom graphics available

MOUNTING OPTIONS

- 6" adjustable legs (standard)
- 5" casters

Open Air Merchandiser Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	BZ13	403-749D-01
Shelf Clip	BZ13	403-168A
Divider, 20oz	BZ13	403-750D-01
MOUNTING		
2" Roller Kit	BZ13	61C01-010A
5" Casters (set of 4)	VM7/VM12/VM18/VM18SL	61C01-014D-01
MERCHANDISING ACCESSORIES		
Front Product Display	VM7 / VM12	183602102
Front Product Display	VM18	183602101
Side Saddle Bag Assembly (4 shelves)	VM7	183110203
Side Saddle Bag Assembly (7 shelves)	VM18	183110202
Clearcool Curtain Assembly, Plastic Strips	VM7	CLEARCOOL55
Clearcool Curtain Assembly, Plastic Strips	VM12	CLEARCOOL77
Clearcool Curtain Assembly, Plastic Strips	VM18	CLEARCOOL120
Wonder Bar Assembly, 48" Saddle Style Black w/6 Pegs	VM7 / VM12	WonderBar-ALPA-55/77 BLACK
Wonder Bar Assembly, 48" Saddle Style Black w/6 Pegs	VM18	WonderBar-ALPA-99/120 BLACK
ADDITIONAL ACCESSORIES		
Locking Cage w/Lock	VM7	103304002-ASM
Locking Cage w/Lock	VM12	103304001-ASM
Locking Cage w/Lock	VM15	103304003-ASM
Locking Cage w/Lock	VM18	103304000-ASM
Locking Cage w/Lock	VM18 Slim	183629010







DELI CASES

BOLD AND SPACIOUS PRODUCT DISPLAY FOR ANY DELI OR BAKERY

DELI CASES

NEW

**OPEN-FOOD
RATED!**

Open-food rated

Sliding glass, removable doors

Curved front glass

**Full electronic control with
various set points**

LED lighting with on and off switch


**Additional electrical outlet
for scale**

**Adjustable shelves for better
product display**

Price tag molding standard

**Powder coated galvanized steel
exterior**

**Stainless steel floor with mirrored
interior end caps**

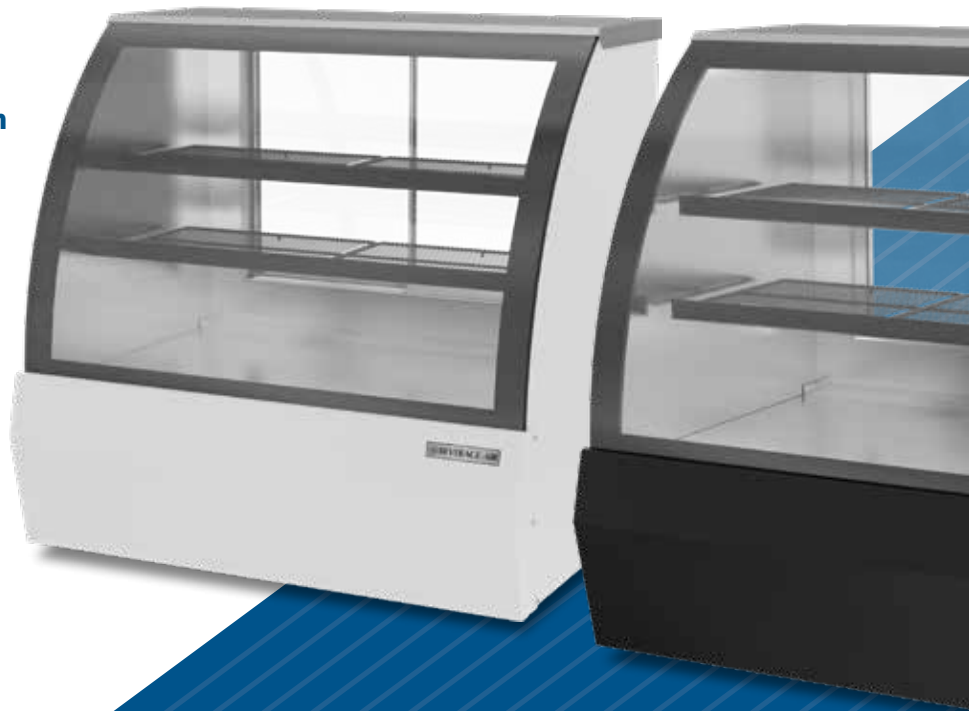

**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

**IDEAL FOR GOURMET SHOPS, DELICATESSENS,
CONVENIENCE STORES & BAKERIES**



ACCESSIBLE OUTLET

Conveniently located for secondary
small equipment such as scales.



REMOVABLE SLIDING DOORS

for easy maintenance and cleaning of
the unit and doors.

AGENCY CERTIFICATIONS



REFRIGERATED UNITS

MAINTAINS PRODUCT TEMPERATURES OF 33-41°F.

APPROXIMATE MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	WEIGHT	FINISH
37"	CDR3HC-1-B	115	1/6	4	10	37.25	35.75	48.5	400	BLACK
	CDR3HC-1-W									WHITE
49"	CDR4HC-1-B	115	1/6	4	14	49.25	35.75	48.5	490	BLACK
	CDR4HC-1-W									WHITE
60"	CDR5HC-1-W	115	1/4	5	17	60.25	35.75	48.5	571	BLACK
	CDR5HC-1-B									WHITE
74"	CDR6HC-1-B	115	1/4	5	21	73.75	35.75	48.5	654	BLACK
	CDR6HC-1-W									WHITE

DRY CASES (NON-REFRIGERATED)

APPROXIMATE MODEL WIDTH	MODEL #	CUBIC FEET	WIDTH	DEPTH	HEIGHT	WEIGHT	FINISH
37"	CDR3HC-1-B-D	10	37.25	35.75	48.5	400	BLACK
	CDR3HC-1-W-D						WHITE
49"	CDR4HC-1-B-D	14	49.25	35.75	48.5	490	BLACK
	CDR4HC-1-W-D						WHITE
60"	CDR5HC-1-W-D	17	60.25	35.75	48.5	571	BLACK
	CDR5HC-1-B-D						WHITE
74"	CDR6HC-1-B-D	21	73.75	35.75	48.5	654	BLACK
	CDR6HC-1-W-D						WHITE



EXTERIOR FINISHES

- Black
- White

INTERIOR FINISHES


- Stainless steel floor with mirrored interior end caps

AVAILABLE OPTIONS

- Dry units

MOUNTING OPTIONS

- 3" casters
- 5" casters

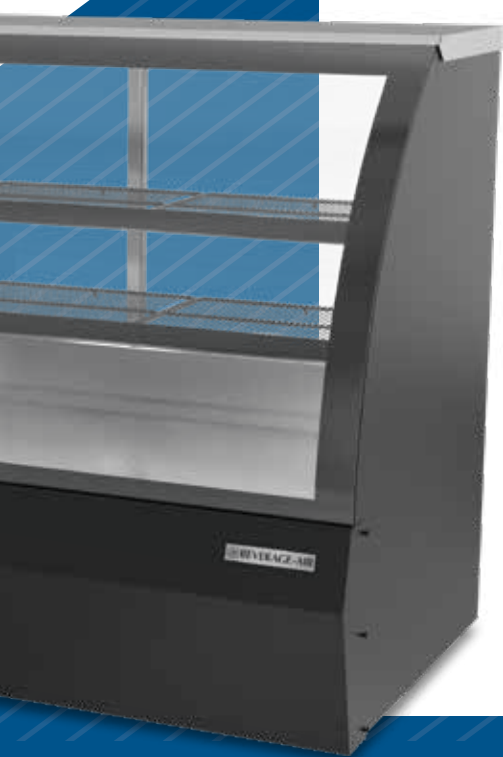





FOOD PREP TABLES

BACK BONE OF FOOD SERVICE WITH ALMOST LIMITLESS OPTIONS

SANDWICH PREP

Full electronic control

Reversible cutting boards

1/2" thick, 10" deep

Locking divider bars

Heavy-duty aluminum pan liner

easy to clean and prevents spills from falling into cabinet while also ensuring coldest air flows across bottom of pans

Field reversible doors

with 120 degree stay-open feature

Two epoxy coated shelves

per door section standard

Snap-in door gaskets

Accommodates up to 6" deep food service pans

4" deep 1/6 size polycarbonate pans are included

Heavy duty insulated covers

protects products and eliminates sweating when closed

6" heavy duty casters standard

3" casters or 6" leg option available at no charge when specified on order



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS


3 YEAR PARTS & LABOR WARRANTY WITH AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY

MADE IN USA



PERFECT SEAL PAN LINER

ensures airflow under pans and protects bottom of cabinet from pan spills



CLEAR LIDS AVAILABLE

for optimized product display

ACCESS OPTIONS

- Doors
- Drawers
- Dual-sided

AGENCY CERTIFICATIONS



Food Prep Tables



EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE ACCESSORIES

- 12" crossbar
- Side/front crumb catchers
- Overshelf kits
- Composite cutting boards
- Bun tray rack
- Locks (for solid doors)

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

LID OPTIONS

- Clear lids
- Flat-hinged lids
- Lift-off lids
- See-thru lids

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

SANDWICH PREP

Standard Top

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27" 1 DOOR	SPE27HC	1/2	115	1/6	2	6.91	27	32	39.25	202	(6) 1/6 size, (2) 1/9 size
	SPE27HC-B										(8) 1/6
32" 1 DOOR	SPE32HC-08	1/2	115	1/6	2	8.01	32	32	39.25	239	(8) 1/6 size
36" 2 DOORS	SPE36HC-08	2/4	115	1/6	2	10.01	36	32	39.25	250	(8) 1/6 size
	SPE36HC-10									252	(10) 1/6 size
48" 2 DOORS	SPE48HC-08	2/4	115	1/6	2.2	13.01	48	32	39.25	296	(8) 1/6 size
	SPE48HC-10									296	(10) 1/6 size
	SPE48HC-12									302	(12) 1/6 size
60" 2 DOORS	SPE60HC-08	2/4	115	1/3	5.4	16.02	60	32	39.25	346	(8) 1/6 size
	SPE60HC-10									348	(10) 1/6 size
	SPE60HC-12									342	(12) 1/6 size
	SPE60HC-16									360	(16) 1/6 size
72" 3 DOORS	SPE72HC-08	3/6	115	1/3	5.4	20.02	72	32	39.25	432	(8) 1/6 size
	SPE72HC-10									432	(10) 1/6 size
	SPE72HC-12									398	(12) 1/6 size
	SPE72HC-18									388	(18) 1/6 size

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.

CONDIMENT STATIONS WITH SNEEZEGUARD

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPE27HC-SNZ	1/2	115	1/6	2	7.3	27	32	53	202	(6) 1/6 pans, (2) 1/9
48"	SPE48HC-12-SNZ	2/4	115	1/6	2.2	13.9	48	32	53.13	308	(12) 1/6 pans

AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order	

DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPED27HC	2	—	115	1/6	2	6.91	27	32	39.25	232	(6) 1/6 size & (2) 1/9 size
	SPED27HC-B	2	—								238	(8) 1/6 size
32"	SPED32HC-08-2	2	—	115	1/6	2	8.01	32	32	39.25	269	(8) 1/6 size
36"	SPED36HC-08-2	2	—	115	1/6	2	10.01	36	32	39.25	276	(8) 1/6 size
	SPED36HC-10-2	2	—								278	(10) 1/6 size
48"	SPED48HC-08-2	2	1/2	115	1/6	2.2	13.01	48	32	39.25	358	(8) 1/6 size
	SPED48HC-08-4	4	—								358	(8) 1/6 size
	SPED48HC-10-2	2	1/2	115	1/6	2.2	13.01	48	32	39.25	326	(10) 1/6 size
	SPED48HC-10-4	4	—								326	(10) 1/6 size
	SPED48HC-12-2	2	1/2	115	1/6	2.2	13.01	48	32	39.25	332	(12) 1/6 size
	SPED48HC-12-4	4	—								356	(12) 1/6 size
60"	SPED60HC-08-2	2	1/2	115	1/3	5.4	16.02	60	32	39.25	404	(8) 1/6 size
	SPED60HC-08-4	4	—								404	(8) 1/6 size
	SPED60HC-10-2	2	1/2	115	1/3	5.4	16.02	60	32	39.25	356	(10) 1/6 size
	SPED60HC-10-4	4	—								406	(10) 1/6 size
	SPED60HC-12-2	2	1/2	115	1/3	5.4	16.02	60	32	39.25	408	(12) 1/6 size
	SPED60HC-12-4	4	—								402	(12) 1/6 size
	SPED60HC-16-2	2	1/2	115	1/3	5.4	16.02	60	32	39.25	382	(16) 1/6 size
	SPED60HC-16-4	4	—								414	(16) 1/6 size
72"	SPED72HC-08-2	2	2/4	115	1/3	5.4	20.02	72	32	39.25	450	(8) 1/6 size
	SPED72HC-08-4	4	1/2								450	(8) 1/6 size
	SPED72HC-08-6	6	—								456	(8) 1/6 size
	SPED72HC-10-2	2	2/4	115	1/3	5.4	20.02	72	32	39.25	448	(10) 1/6 size
	SPED72HC-10-4	4	1/2								450	(10) 1/6 size
	SPED72HC-10-6	6	—								452	(10) 1/6 size
	SPED72HC-12-2	2	2/4	115	1/3	5.4	20.02	72	32	39.25	418	(12) 1/6 size
	SPED72HC-12-4	4	1/2								442	(12) 1/6 size
	SPED72HC-12-6	6	—								484	(12) 1/6 size
	SPED72HC-18-2	2	2/4	115	1/3	5.4	20.02	72	32	39.25	432	(18) 1/6 size
	SPED72HC-18-4	4	1/2								460	(18) 1/6 size
	SPED72HC-18-6	6	—								484	(18) 1/6 size

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.

SANDWICH PREP

Clear Lid Standard Top

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27" 1 DOOR	SPE27HC-CL	1/2	115	1/6	2	6.91	27	32	44.75	202	(6) 1/6 size, (2) 1/9 size
	SPE27HC-B-CL										(8) 1/6
32" 1 DOOR	SPE32HC-08-CL	1/2	115	1/6	2	8.01	32	32	44.75	239	(8) 1/6 size
36" 2 DOORS	SPE36HC-08-CL	2/4	115	1/6	2	10.01	36	32	44.5	250	(8) 1/6 size
	SPE36HC-10-CL									252	(10) 1/6 size
48" 2 DOORS	SPE48HC-08-CL	2/4	115	1/6	2.2	13.01	48	32	44.5	296	(8) 1/6 size
	SPE48HC-10-CL									296	(10) 1/6 size
	SPE48HC-12-CL									302	(12) 1/6 size
60" 2 DOORS	SPE60HC-08-CL	2/4	115	1/3	5.4	16.02	60	32	44.5	346	(8) 1/6 size
	SPE60HC-10-CL									348	(10) 1/6 size
	SPE60HC-12-CL									342	(12) 1/6 size
	SPE60HC-16-CL									360	(16) 1/6 size
72" 3 DOORS	SPE72HC-08-CL	3/6	115	1/3	5.4	20.02	72	32	44.5	432	(8) 1/6 size
	SPE72HC-10-CL									432	(10) 1/6 size
	SPE72HC-12-CL									398	(12) 1/6 size
	SPE72HC-18-CL									388	(18) 1/6 size

AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order	

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.

CLEAR LIDS



DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPED27HC-CL	2	—	115	1/6	2	6.91	27	32	44.75	232	(6) 1/6 size & (2) 1/9 size
	SPED27HC-B-CL	2	—								238	(8) 1/6 size
32"	SPED32HC-08-2-CL	2	—	115	1/6	2	8.01	32	32	44.75	269	(8) 1/6 size
36"	SPED36HC-08-2-CL	2	—	115	1/6	2	10.01	36	32	44.5	276	(8) 1/6 size
	SPED36HC-10-2-CL	2	—								278	(10) 1/6 size
48"	SPED48HC-08-2-CL	2	1/2	115	1/6	2.2	13.01	48	32	44.5	358	(8) 1/6 size
	SPED48HC-08-4-CL	4	—								358	(8) 1/6 size
	SPED48HC-10-2-CL	2	1/2	115	1/6	2.2	13.01	48	32	44.5	326	(10) 1/6 size
	SPED48HC-10-4-CL	4	—								326	(10) 1/6 size
	SPED48HC-12-2-CL	2	1/2	115	1/6	2.2	13.01	48	32	44.5	332	(12) 1/6 size
	SPED48HC-12-4-CL	4	—								356	(12) 1/6 size
60"	SPED60HC-08-2-CL	2	1/2	115	1/3	5.4	16.02	60	32	44.5	404	(8) 1/6 size
	SPED60HC-08-4-CL	4	—								404	(8) 1/6 size
	SPED60HC-10-2-CL	2	1/2	115	1/3	5.4	16.02	60	32	44.5	356	(10) 1/6 size
	SPED60HC-10-4-CL	4	—								406	(10) 1/6 size
	SPED60HC-12-2-CL	2	1/2	115	1/3	5.4	16.02	60	32	44.5	408	(12) 1/6 size
	SPED60HC-12-4-CL	4	—								402	(12) 1/6 size
	SPED60HC-16-2-CL	2	1/2	115	1/3	5.4	16.02	60	32	44.5	382	(16) 1/6 size
	SPED60HC-16-4-CL	4	—								414	(16) 1/6 size
72"	SPED72HC-08-2-CL	2	2/4	115	1/3	5.4	20.02	72	32	44.5	450	(8) 1/6 size
	SPED72HC-08-4-CL	4	1/2								450	(8) 1/6 size
	SPED72HC-08-6-CL	6	—								456	(8) 1/6 size
	SPED72HC-10-2-CL	2	2/4	115	1/3	5.4	20.02	72	32	44.5	448	(10) 1/6 size
	SPED72HC-10-4-CL	4	1/2								450	(10) 1/6 size
	SPED72HC-10-6-CL	6	—								452	(10) 1/6 size
	SPED72HC-12-2-CL	2	2/4	115	1/3	5.4	20.02	72	32	44.5	418	(12) 1/6 size
	SPED72HC-12-4-CL	4	1/2								442	(12) 1/6 size
	SPED72HC-12-6-CL	6	—								484	(12) 1/6 size
	SPED72HC-18-2-CL	2	2/4	115	1/3	5.4	20.02	72	32	44.5	432	(18) 1/6 size
	SPED72HC-18-4-CL	4	1/2								460	(18) 1/6 size
	SPED72HC-18-6-CL	6	—								484	(18) 1/6 size

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.

SANDWICH PREP

Mega Top

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27" 1 DOOR	SPE27HC-12M-B	1/2	115	1/6	2	6.91	27	38.5	39.25	220	(12) 1/6 size
32" 1 DOOR	SPE32HC-12M	1/2	115	1/6	2	8.01	32	38.5	39.25	246	(12) 1/6 size
36" 2 DOORS	SPE36HC-12M	2/4	115	1/6	2	10.01	36	38.5	39.25	276	(12) 1/6 size
	SPE36HC-15M									274	(15) 1/6 size
48" 2 DOORS	SPE48HC-12M	2/4	115	1/6	2.2	13.01	48	38.5	39.25	336	(12) 1/6 size
	SPE48HC-18M									336	(18) 1/6 size
60" 2 DOORS	SPE60HC-12M	2/4	115	1/3	5.4	16.02	60	38.5	39.25	342	(12) 1/6 size
	SPE60HC-18M									374	(18) 1/6 size
	SPE60HC-24M									392	(24) 1/6 size
72" 3 DOORS	SPE72HC-12M	3/6	115	1/3	5.4	20.02	72	38.5	39.25	432	(12) 1/6 size
	SPE72HC-18M									434	(18) 1/6 size
	SPE72HC-24M									404	(24) 1/6 size
	SPE72HC-30M									446	(30) 1/6 size

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPE27HC-12M-B-DS	1/2	115	1/6	2	6.91	27	48.75	40.75	244	(12) 1/6
48"	SPE48HC-18M-DS	2/4	115	1/6	2.2	13.01	48	48.75	40.75	376	(18) 1/6 size
60"	SPE60HC-24M-DS	2/4	115	1/3	5.4	16.02	60	48.75	40.75	430	(24) 1/6 size
72"	SPE72HC-30M-DS	3/6	115	1/3	5.4	20.02	72	48.75	40.75	504	(30) 1/6 size

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
36"	SPE36HC-15M-STL	2/4	115	1/6	2	10.01	36	38.38	53.75	274	(15) 1/6 size
48"	SPE48HC-18M-STL	2/4	115	1/6	2.2	13.01	48	38.38	53.75	354	(18) 1/6 size
60"	SPE60HC-24M-STL	2/4	115	1/3	5.4	16.02	60	38.38	53.75	414	(24) 1/6 size
72"	SPE72HC-30M-STL	3/6	115	1/3	5.4	20.02	72	38.38	53.75	464	(30) 1/6 size

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPED27HC-12M	2	—	115	1/6	2	6.91	27	38.38	39.25	250	(9) 1/6 size & (3) 1/9 size
	SPED27HC-12M-B	2	—								238	(12) 1/6 size
32"	SPED32HC-12M-2	2	—	115	1/6	2	8.01	32	38.5	39.25	280	(12) 1/6 size
36"	SPED36HC-12M-2	2	—	115	1/6	2	10.01	36	38.38	39.25	300	(12) 1/6 size
	SPED36HC-15M-2	2	—								302	(15) 1/6 size
48"	SPED48HC-12M-2	2	1/2	115	1/6	2.2	13.01	48	38.38	39.25	354	(12) 1/6 size
	SPED48HC-12M-4	4	—								360	(12) 1/6 size
	SPED48HC-18M-2	2	1/2	115	1/6	2.2	13.01	48	38.38	39.25	366	(18) 1/6 size
	SPED48HC-18M-4	4	—								394	(18) 1/6 size
60"	SPED60HC-12M-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39.25	390	(12) 1/6 size
	SPED60HC-12M-4	4	—								436	(12) 1/6 size
	SPED60HC-18M-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39.25	406	(18) 1/6 size
	SPED60HC-18M-4	4	—								456	(18) 1/6 size
	SPED60HC-24M-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39.25	424	(24) 1/6 size
	SPED60HC-24M-4	4	—								456	(24) 1/6 size
72"	SPED72HC-12M-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.25	482	(12) 1/6 size
	SPED72HC-12M-4	4	1/2								484	(12) 1/6 size
	SPED72HC-12M-6	6	—								484	(12) 1/6 size
	SPED72HC-18M-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.25	450	(18) 1/6 size
	SPED72HC-18M-4	4	1/2								450	(18) 1/6 size
	SPED72HC-18M-6	6	—								505	(18) 1/6 size
	SPED72HC-24M-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.25	470	(24) 1/6 size
	SPED72HC-24M-4	4	1/2								492	(24) 1/6 size
	SPED72HC-24M-6	6	—								496	(24) 1/6 size
	SPED72HC-30M-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.25	480	(30) 1/6 size
	SPED72HC-30M-4	4	1/2								508	(30) 1/6 size
	SPED72HC-30M-6	6	—								528	(30) 1/6 size

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

SANDWICH PREP

Clear Lid Mega Top

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27" 1 DOOR	SPE27HC-12M-B-CL	1/2	115	1/6	2	6.91	27	38.5	50.75	220	(12) 1/6 size
32" 1 DOOR	SPE32HC-12M-CL	1/2	115	1/6	2	8.01	32	38.5	50.75	246	(12) 1/6 size
36" 2 DOORS	SPE36HC-12M-CL	2/4	115	1/6	2	10.01	36	38.5	50.75	276	(12) 1/6 size
	SPE36HC-15M-CL									274	(15) 1/6 size
48" 2 DOORS	SPE48HC-12M-CL	2/4	115	1/6	2.2	13.01	48	38.5	50.75	336	(12) 1/6 size
	SPE48HC-18M-CL									336	(18) 1/6 size
60" 2 DOORS	SPE60HC-12M-CL	2/4	115	1/3	5.4	16.02	60	38.5	50.75	342	(12) 1/6 size
	SPE60HC-18M-CL									374	(18) 1/6 size
	SPE60HC-24M-CL									392	(24) 1/6 size
72" 3 DOORS	SPE72HC-12M-CL	3/6	115	1/3	5.4	20.02	72	38.5	50.75	432	(12) 1/6 size
	SPE72HC-18M-CL									434	(18) 1/6 size
	SPE72HC-24M-CL									404	(24) 1/6 size
	SPE72HC-30M-CL									446	(30) 1/6 size

AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order	

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

CLEAR LIDS



DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPED27HC-12M-CL	2	—	115	1/6	2	6.91	27	38.38	50.75	250	(9) 1/6 size & (3) 1/9 size
	SPED27HC-12M-B-CL	2	—								238	(12) 1/6 size
32"	SPED32HC-12M-2-CL	2	—	115	1/6	2	8.01	32	38.5	50.75	280	(12) 1/6 size
36"	SPED36HC-12M-2-CL	2	—	115	1/6	2	10.01	36	38.38	50.75	300	(12) 1/6 size
	SPED36HC-15M-2-CL	2	—								302	(15) 1/6 size
48"	SPED48HC-12M-2-CL	2	1/2	115	1/6	2.2	13.01	48	38.38	50.75	354	(12) 1/6 size
	SPED48HC-12M-4-CL	4	—								360	(12) 1/6 size
	SPED48HC-18M-2-CL	2	1/2	115	1/6	2.2	13.01	48	38.38	50.75	366	(18) 1/6 size
	SPED48HC-18M-4-CL	4	—								394	(18) 1/6 size
60"	SPED60HC-12M-2-CL	2	1/2	115	1/3	5.4	16.02	60	38.38	50.75	390	(12) 1/6 size
	SPED60HC-12M-4-CL	4	—								436	(12) 1/6 size
	SPED60HC-18M-2-CL	2	1/2	115	1/3	5.4	16.02	60	38.38	50.75	406	(18) 1/6 size
	SPED60HC-18M-4-CL	4	—								456	(18) 1/6 size
	SPED60HC-24M-2-CL	2	1/2	115	1/3	5.4	16.02	60	38.38	50.75	414	(24) 1/6 size
	SPED60HC-24M-4-CL	4	—								456	(24) 1/6 size
72"	SPED72HC-12M-2-CL	2	2/4	115	1/3	5.4	20.02	72	38.38	50.75	482	(12) 1/6 size
	SPED72HC-12M-4-CL	4	1/2								484	(12) 1/6 size
	SPED72HC-12M-6-CL	6	—								484	(12) 1/6 size
	SPED72HC-18M-2-CL	2	2/4	115	1/3	5.4	20.02	72	38.38	50.75	450	(18) 1/6 size
	SPED72HC-18M-4-CL	4	1/2								450	(18) 1/6 size
	SPED72HC-18M-6-CL	6	—								505	(18) 1/6 size
	SPED72HC-24M-2-CL	2	2/4	115	1/3	5.4	20.02	72	38.38	50.75	470	(24) 1/6 size
	SPED72HC-24M-4-CL	4	1/2								492	(24) 1/6 size
	SPED72HC-24M-6-CL	6	—								496	(24) 1/6 size
	SPED72HC-30M-2-CL	2	2/4	115	1/3	5.4	20.02	72	38.38	50.75	480	(30) 1/6 size
	SPED72HC-30M-4-CL	4	1/2								508	(30) 1/6 size
	SPED72HC-30M-6-CL	6	—								528	(30) 1/6 size

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

SANDWICH PREP

Cutting Top

17" DEEP REVERSIBLE CUTTING BOARD

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.


MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27" 1 DOOR	SPE27HC-C	1/2	115	1/6	2	6.91	27	38.38	39.25	212	(6) 1/6 size & (2) 1/9 size
	SPE27HC-C-B									212	(8) 1/6 size
36" 2 DOORS	SPE36HC-08C	2/4	115	1/6	2	10.01	36	38.38	39.25	268	(8) 1/6 size
	SPE36HC-10C									276	(10) 1/6 size
48" 2 DOORS	SPE48HC-08C	2/4	115	1/6	2.2	13.01	48	38.38	39.25	326	(8) 1/6 size
	SPE48HC-10C									322	(10) 1/6 size
	SPE48HC-12C									326	(12) 1/6 size
60" 2 DOORS	SPE60HC-08C	2/4	115	1/3	5.4	16.02	60	38.38	39.25	332	(8) 1/6 size
	SPE60HC-10C									334	(10) 1/6 size
	SPE60HC-12C									342	(12) 1/6 size
	SPE60HC-16C									376	(16) 1/6 size
72" 3 DOORS	SPE72HC-08C	3/6	115	1/3	5.4	20.02	72	38.38	39.25	396	(8) 1/6 size
	SPE72HC-10C									427	(10) 1/6 size
	SPE72HC-12C									420	(12) 1/6 size
	SPE72HC-18C									438	(18) 1/6 size

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.


AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order	


DRAWER PAN CONFIGURATIONS for all SPED units



SPED27 / SPED32 / SPED60



SPED36



SPED48 / SPED72

DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.


MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPED27HC-C	2	—	115	1/6	2	6.91	27	38.38	39.25	238	(6) 1/6 size & (2) 1/9 size
	SPED27HC-C-B	2	—								238	(8) 1/6 size
36"	SPED36HC-08C-2	2	—	115	1/6	2	10.01	36	38.38	39.25	276	(8) 1/6 size
	SPED36HC-10C-2	2	—								278	(10) 1/6 size
48"	SPED48HC-08C-2	2	1/2	115	1/6	2.2	13.01	48	38.38	39.25	358	(8) 1/6 size
	SPED48HC-08C-4	4	—								358	(8) 1/6 size
	SPED48HC-10C-2	2	1/2	115	1/6	2.2	13.01	48	38.38	39.25	326	(10) 1/6 size
	SPED48HC-10C-4	4	—								326	(10) 1/6 size
	SPED48HC-12C-2	2	1/2	115	1/6	2.2	13.01	48	38.38	39.25	348	(12) 1/6 size
	SPED48HC-12C-4	4	—								380	(12) 1/6 size
60"	SPED60HC-08C-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39.25	404	(8) 1/6 size
	SPED60HC-08C-4	4	—								404	(8) 1/6 size
	SPED60HC-10C-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39.25	406	(10) 1/6 size
	SPED60HC-10C-4	4	—								406	(10) 1/6 size
	SPED60HC-12C-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39.25	402	(12) 1/6 size
	SPED60HC-12C-4	4	—								368	(12) 1/6 size
	SPED60HC-16C-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39.25	420	(16) 1/6 size
	SPED60HC-16C-4	4	—								456	(16) 1/6 size
72"	SPED72HC-08C-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.25	450	(8) 1/6 size
	SPED72HC-08C-4	4	1/2								454	(8) 1/6 size
	SPED72HC-08C-6	6	—								456	(8) 1/6 size
	SPED72HC-10C-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.25	448	(10) 1/6 size
	SPED72HC-10C-4	4	1/2								450	(10) 1/6 size
	SPED72HC-10C-6	6	—								452	(10) 1/6 size
	SPED72HC-12C-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.25	418	(12) 1/6 size
	SPED72HC-12C-4	4	1/2								442	(12) 1/6 size
	SPED72HC-12C-6	6	—								508	(12) 1/6 size
	SPED72HC-18C-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.25	468	(18) 1/6 size
	SPED72HC-18C-4	4	1/2								486	(18) 1/6 size
	SPED72HC-18C-6	6	—								538	(18) 1/6 size

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.


SANDWICH PREP

Pan Configurations


Standard Top



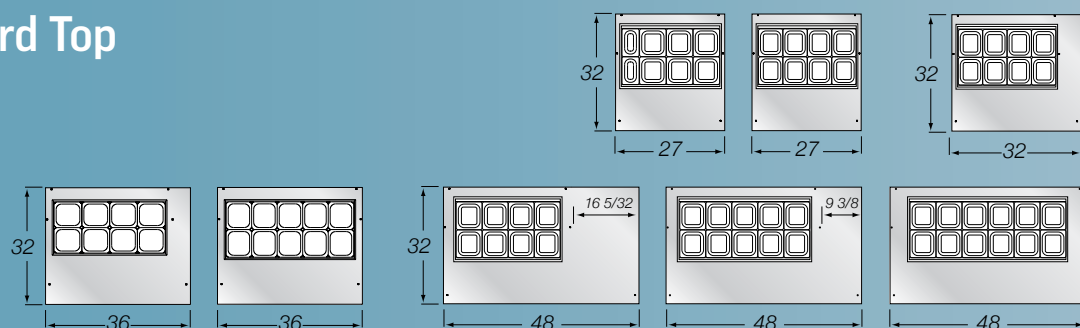


Mega Top

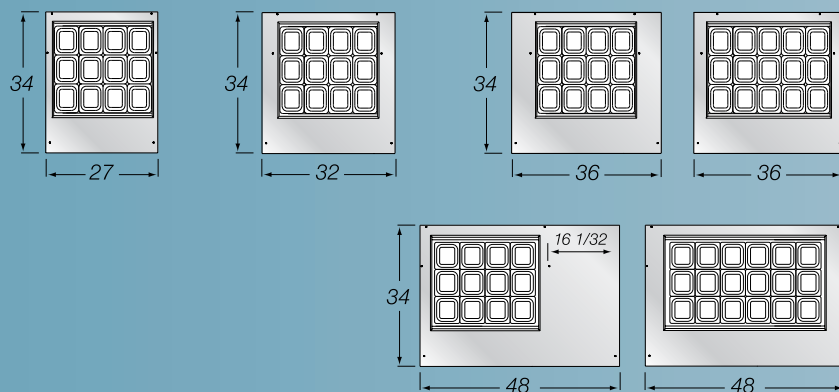

Cutting Top

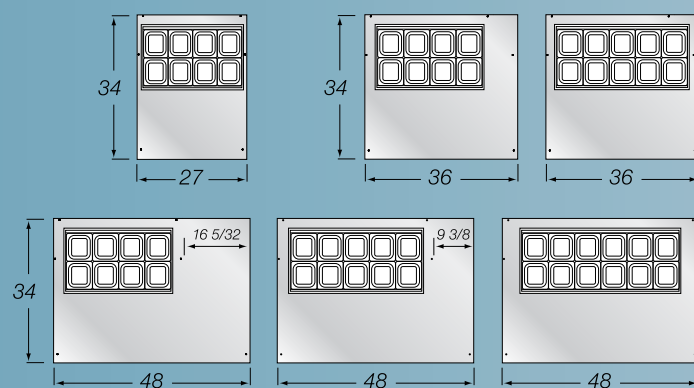

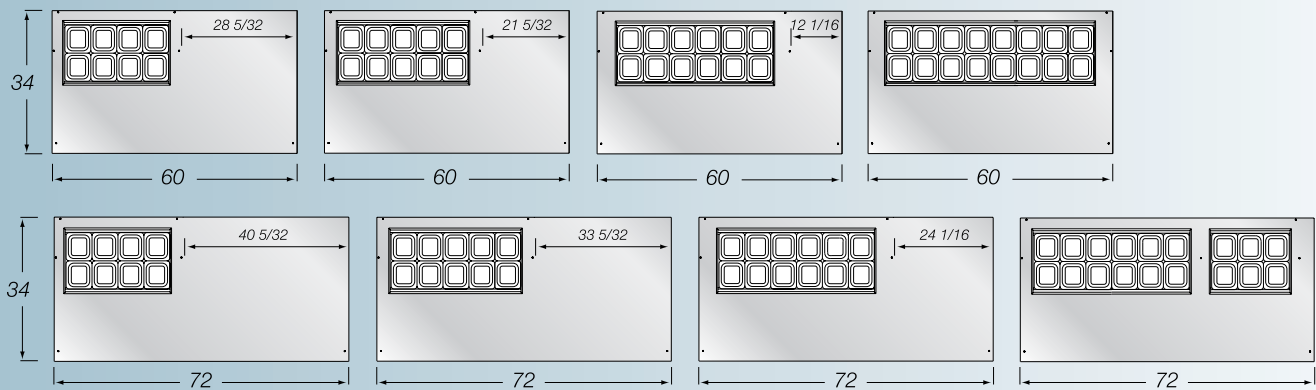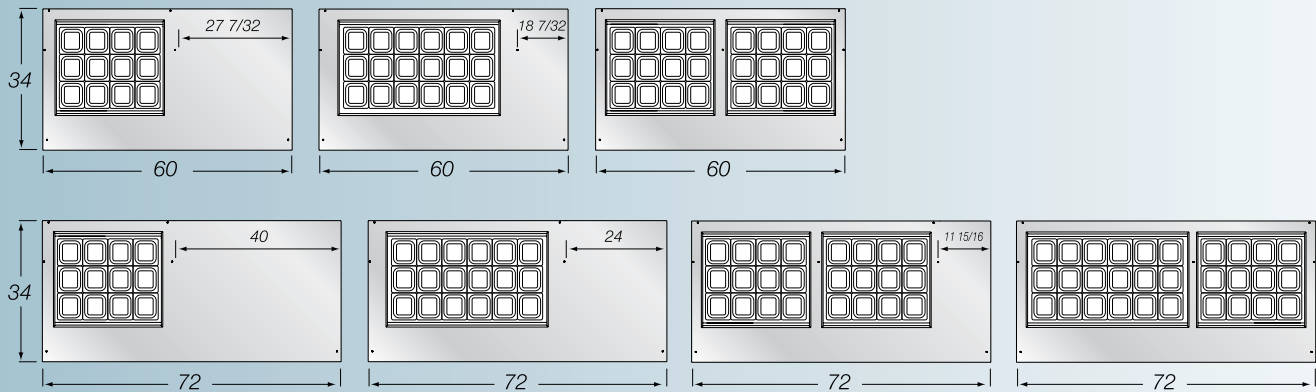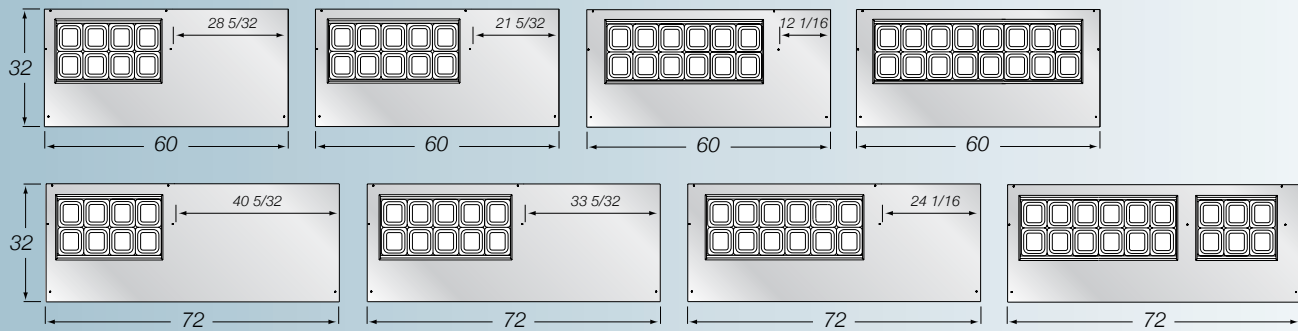

PIZZA PREP

New duct system features uniform airflow distribution
over evaporator coil and throughout raised rail

Newly designed easy-open lid system
provides easier accessibility

Electronic controller with smart-defrost

12-Gauge stainless steel drawer slides
with Delrin® rollers rated at 275 lbs

Electrical defrost heater
terminates defrost sooner, reducing product instability

Right or left compressor placement
specify at time of order

Field reversible doors
with 120 degree stay open feature

Heavy-duty aluminum pan liner
is easy to clean and prevents spills from falling into cabinet

Accommodates up to 6" deep food service pans
Not included

Improved serviceability
Removable service panel for easy access to refrigeration system

Featuring environmentally friendly
energy efficient R290 refrigerant



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS
LOW-PROFILE DESIGN FOR ENHANCED ERGONOMICS AND PRODUCT DISPLAY
IMPROVED AIRFLOW MAINTAINS CONSISTENT PAN TEMPERATURE IN TOP RAIL



3 DRAWERS IN SINGLE SECTION
available on all sizes



CLEAR LIDS AVAILABLE
for optimized product display

ACCESS OPTIONS

- Doors
- Drawers (stacks of 2 or 3)

LID OPTIONS

- Clear lids
- Flat Lift-off lids

AGENCY CERTIFICATIONS



Pizza & Deli Prep Tables



EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless

AVAILABLE ACCESSORIES

- Composite cutting boards
- Bun tray racks
- Overshelf
- Locks
- Additional shelves
- Pan slides (18x26)



AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available
- Alternate compressor locations

MOUNTING OPTIONS

- 3" casters (standard)
- 6" casters
- 6" legs

PIZZA PREP

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	FULL SIZE PAN CAPACITY
46"	DP46HC	1/2	115	1/3	4.5	11.91	46	37	49.75	336	2
60"	DP60HC	2/4	115	1/3	4.5	17	60	37	49.75	440	3 & 1 half
67"	DP67HC	2/4	115	1/3	4.5	20.68	67	37	49.75	440	3
72"	DP72HC	2/4	115	1/3	4.5	21.87	72	37	49.75	438	3
93"	DP93HC	3/6	115	1/2	7.8	31.54	93	37	49.75	574	4
119"	DP119HC	4/8	115	1/2	7.8	42.2	119	37	49.75	712	5 & 1 third


Depth measurement includes cutting board.
For total height, add 3 or 6 inches, based on your mounting choice.



DPD72HC-3 (see page 90)



PAN CONFIGURATIONS for DP and DPD units

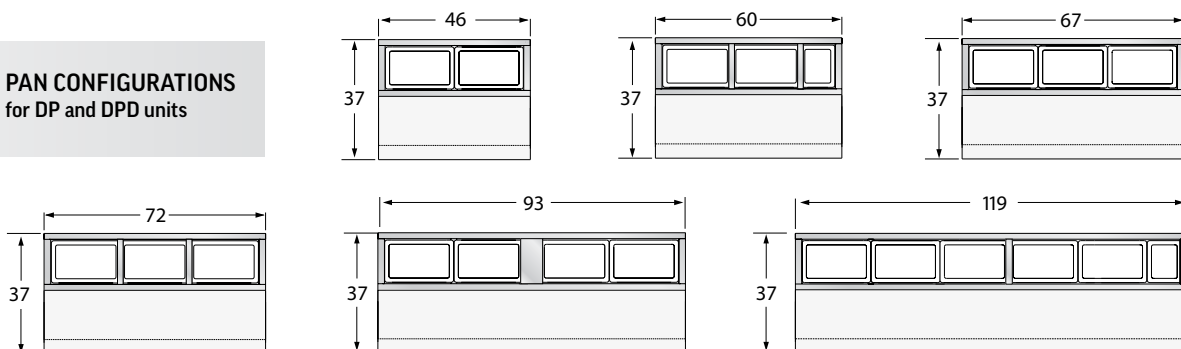

PIZZA PREP


DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.


MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	FULL SIZE PAN CAPACITY
46"	DPD46HC-2	2	-	115	1/3	4.5	11.91	46	37	49.75	311	2
	DPD46HC-3	3										
60"	DPD60HC-2	2	-	115	1/3	4.5	17	60	37	49.75	454	3 & 1 half
	DPD60HC-3	3										
67"	DPD67HC-2	2	1/2	115	1/3	4.5	20.68	67	37	49.75	484	3
	DPD67HC-3	3										
	DPD67HC-4	4	-									
	DPD67HC-6	6										
72"	DPD72HC-2	2	1/2	115	1/3	4.5	21.87	72	37	49.75	540	3
	DPD72HC-3	3										
	DPD72HC-4	4	-									
	DPD72HC-6	6										
93"	DPD93HC-2	2	2/4	115	1/2	7.8	31.54	93	37	49.75	600	4
	DPD93HC-3	3										
	DPD93HC-4	4	1/2									
	DPD93HC-6	6	-									
119"	DPD119HC-2	2	3/6	115	1/2	7.8	42.2	119	37	49.75	703	5 & 1 third
	DPD119HC-3	3	3/6									
	DPD119HC-4	4	2/4									
	DPD119HC-6	6	1/2									
	DPD119HC-6T	6	2/4									
	DPD119HC-8	8	-									
	DPD119HC-9	9	1/2									

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.





















DRAWER PAN CONFIGURATIONS for DPD units



DPD46 / DPD67 / DPD72 / DPD93 / DPD119

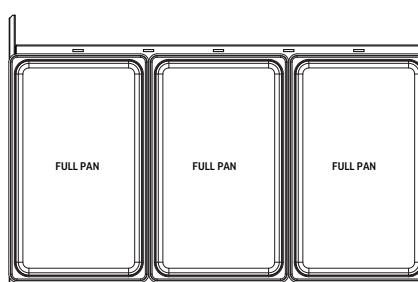

DPD60

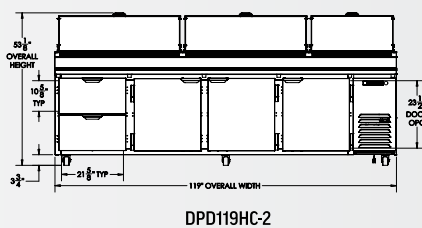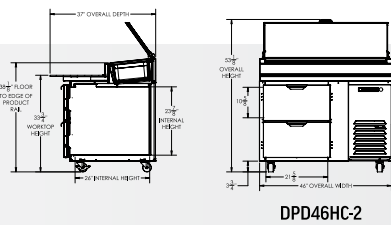

SALAD BARS

NEW

Locking divider bars

Lift-off lids standard

to help maintain product temperature

Heavy-duty aluminum pan liner

Easy to clean and prevents spills from falling into cabinet while also ensuring coldest air flows across bottom of pans

Field reversible doors with 120 degree stay-open feature

Two epoxy coated shelves per door section standard

Snap-in door gaskets

Accommodates up to 6" deep food service pans

4" deep 1/3 size polycarbonate pans are included

6" heavy duty casters standard

3" casters or 6" leg option available at no charge when specified on order

AVAILABLE ACCESSORIES

- Foldable tray slides for single or dual-sided service
- Dual-sided sneeze guard, with optional add on for single side service



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS & LABOR WARRANTY WITH AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY

MADE IN USA



PERFECT SEAL PAN LINER

ensures airflow under pans and protects bottom of cabinet from pan spills



LIFT-OFF LIDS STANDARD

to help maintain product temperature

ACCESS OPTIONS

- Doors

AGENCY CERTIFICATIONS



SALAD BARS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

APPROXIMATE MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	STANDARD PANS 4" DEEP
36"	SPE36HC-S	2/4	115	1/6	2	10	36	30.13	30.88	(6) 1/3 size
48"	SPE48HC-S	2/4	115	1/6	2.2	13	48	30.13	30.88	(9) 1/3 size
60"	SPE60HC-S	2/4	115	1/3	5.4	16	60	30.13	30.88	(12) 1/3 size
72"	SPE72HC-S	3/6	115	1/3	5.4	20	72	30.13	30.88	(15) 1/3 size

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.



EXTERIOR FINISHES

- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE ACCESSORIES

- Foldable tray slides for single or dual-sided service
- Dual-sided sneeze guard, with optional add on for single side service
- Locks

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

LID OPTIONS

- Lift-Off Lids

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

Food Prep Table Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf (Large)	SPE27/27-12M/27C	403-826B
Epoxy Coated Wire Shelf (Small)	SPE27/SPE27-12M/SPE27C	403-912D-01
Epoxy Coated Wire Shelf (Large)	SPE36/SPE36M/SPE36C	403-911D-01
Epoxy Coated Wire Shelf (Small)	SPE36/SPE36M/SPE36C	403-915D-01
Epoxy Coated Wire Shelf (Large)	SPE48/48M/48C	403-828B
Epoxy Coated Wire Shelf (Small)	SPE48/SPE48M/SPE48C	403-913D-01
Epoxy Coated Wire Shelf (Large)	SPE60/60M/60C	403-829B
Epoxy Coated Wire Shelf (Small)	SPE60/SPE60M/SPE60C	403-914D-01
Epoxy Coated Ctr Section Wire Shelf (Large)	SPE72/72M/72C	403-827B
Epoxy Coated Wire Shelf L&R (Large)	SPE72/72M/72C	403-828B
Epoxy Coated Ctr Section Wire Shelf (Small)	SPE72/SPE72M/SPE72C	403-912D-01
Epoxy Coated Wire Shelf L&R (Small)	SPE72/SPE72M/SPE72C	403-913D-01
Shelf Clip	All SPE/SPED/DP/DPD	403-169A
Epoxy Coated Large Shelf	SPE27	403-722C
Epoxy Coated Small Shelf	SPE27	403-721C
Epoxy Coated Large Shelf	SPE36	403-723C
Epoxy Coated Small Shelf	SPE36	403-721C
Epoxy Coated Large Shelf	SPE48	403-723C
Epoxy Coated Small Shelf	SPE48	403-721C
Epoxy Coated Large Shelf	SPE60	403-723C
Epoxy Coated Small Shelf	SPE60	403-721C
Epoxy Coated Large Shelf	SPE72	403-723C
Epoxy Coated Small Shelf	SPE72	403-721C
Bottle Organizer (Holds Qty. 10 Bottles) 16 oz.	SPE Mega Tops	00B23-023D-01
Bottle Organizer (Holds Qty. 10 Bottles) 24 oz.	SPE Mega Tops	00B23-024D-01
Bottle Organizer (Holds Qty. 8 Bottles) 16 oz.	SPE Standard & Cutting Tops	00B23-025D-01
Bottle Organizer (Holds Qty. 6 Bottles) 24 oz.	SPE Standard & Cutting Tops	00B23-026D-01
CRUMBCATCHERS		
Crumbcatcher Kit	SPE27A/SPE27B/SPE27MA/SPE27MB	00C23-071A-01
Crumbcatcher Kit	SPE36/36M	00C23-071A-09
Crumbcatcher Kit	SPE48/48M	00C23-071A-02
Crumbcatcher Kit	SPE60/60M	00C23-071A-03
Crumbcatcher Kit	SPE72/72M	00C23-071A-04
Crumbcatcher Kit	SPE27C	00C23-071A-05
Crumbcatcher Kit	SPE36C	00C23-071A-10
Crumbcatcher Kit	SPE48C	00C23-071A-06
Crumbcatcher Kit	SPE60C	00C23-071A-07
Crumbcatcher Kit	SPE72C	00C23-071A-08
Side Crumbcatcher Kit	SPE Series	00C23-072A
TRAY SLIDES & PAN INSERTS		
Pan Insert	SPE27A	00B23-032D-01
Pan Insert	SPE27B	00B32-033D-01

SPE WHITE POLY CUTTING BOARDS		
10" Cutting Board	SPE27/27-12M, SPED27	705-290C-01
10" Cutting Board	SPE36/SPE36 MEGA/SPED36	705-290C-05
10" Cutting Board	SPE48/48M, SPED48	705-290C-02
10" Cutting Board	SPE60/60M, SPED60	705-290C-03
10" Cutting Board	SPE72/72M, SPED72	705-290C-04
17" Cutting Board	SPE27C, SPED27C	705-264C
17" Cutting Board	SPE32C, SPED32C	705-414D-02
17" Cutting Board	SPE36C/SPED36C	705-414D-01
17" Cutting Board	SPE48C, SPED48C	705-265C
17" Cutting Board	SPE60C, SPED60C	705-266C
17" Cutting Board	SPE72C, SPED72C	705-267C

DP WHITE POLY CUTTING BOARDS (1/2" THICK)		
19" Cutting Board	DP46	705-307C-01
19" Cutting Board	DP67	705-286B
19" Cutting Board	DP93	705-287B
19" Cutting Board	DP119	705-288B

SPE COMPOSITE CUTTING BOARDS (1/2" THICK)		
10" Composite Cutting Board	SPE27M	705-392D-06
17" Composite Cutting Board	SPE27C	705-392D-07
10" Composite Cutting Board	SPE36A	705-392D-15
10" Composite Cutting Board	SPE48	705-392D-04
12" Composite Cutting Board	SPE48	705-378B-01
15" Composite Cutting Board	SPE48C	705-392D-01
17" Composite Cutting Board	SPE48C	705-392D-08
10" Composite Cutting Board	SPE60	705-392D-05
15" Composite Cutting Board	SPE60C	705-392D-02
17" Composite Cutting Board	SPE60C	705-392D-09
10" Composite Cutting Board	SPE72	705-378B-02
17" Composite Cutting Board	SPE72C	705-392D-10

DP COMPOSITE CUTTING BOARDS (1/2" THICK)		
19" X 46" Composite Cutting Board	DP46	705-392D-11
19" X 67" Composite Cutting Board	DP67	705-392D-12
19" X 93" Composite Cutting Board	DP93	705-392D-13
19" X 119" Composite Cutting Board	DP119	705-392D-14

ADDITIONAL ACCESSORIES		
Door Lock	DP, SPE (per door)	00C30-099A
Digital Thermometer	DD, SPE	402-249A

MOUNTING		
3" Caster	SPE units (set of four)	00C31-041A
6" Caster	SPE units (set of four)	00C31-038A
3" Caster	DP46,67,93 (set of four)	61C01-013A
6" Caster	DP46,67,93 (set of four)	61C01-001A
3" Caster	DP119 (set of six)	61C01-012A
6" Black Leg	SPE units (set of four)	58B02S001A
6" Black Leg	DP46,67,93 (set of four)	58B02S001A
6" Black Leg	DP119 (set of six)	58B02S002A
6" Seismic/Flanged Legs	SPE Series (set of four)	00C31-055A
6" Seismic/Flanged Legs	DP Series (set of four)	00C31-055A
2 3/4 in Caster Kit	Low Profile (set of four) SPE	00C31-049A
2" Roller Kit	SPE units	00C31S045A

Food Prep Table Accessories

OVERSHELVES		
10" Single	SPE27	00C23S026A
10" Single	SPE36-08	00C23-074A-11
10" Single	SPE36-10	00C23-074A-12
10" Single	SPE48	00C23-027A
10" Single	SPE60	00C23-028A
10" Single	SPE72	00C23-029A
10" Double	SPE27	00C23-030A
10" Double	SPE36-08	00C23-075A-08
10" Double	SPE36-10	00C23-075A-09
10" Double	SPE48	00C23-031A
10" Double	SPE60	00C23-032A
10" Double	SPE72	00C23-033A
Single	SPE27-12M	00C23-074A-01
Single	SPE32-12M	00C23-074A-02
Single	SPE36-12M	00C23-074A-10
Single	SPE36-15M	00C23-074A-12
Single	SPE48/60/72-12M	00C23-074A-02
Single	SPE48-18M	00C23-074A-03
Single / For Dual-Sided	SPE48-18M-DS	00C23-105D
Single	SPE60-18M	00C23-074A-04
Single	SPE60-24M	00C23-074A-05
Single / For Dual-Sided	SPE60-24M-DS	00C23-106D
Single	SPE72-18M	00C23-074A-06
Single	SPE72-24M	00C23-074A-07
Single	SPE72-30M	00C23-074A-08
Single / For Dual-Sided	SPE72-30M-DS	00C23-093A
Double	SPE27-12M	00C23-030A
Double	SPE27-12M-B	00C23-075A-06
Double	SPE36-12M	00C23-075A-8
Double	SPE36-15M	00C23-075A-09
Double	SPE48-12M	00C23-075A-01
Double / For Dual-Sided	SPE48-18M-DS	00C23-107D-02
Double	SPE60-12M	00C23-075A-01
Double	SPE72-12M	00C23-075A-01
Double	SPE48-18M	00C23-075A-02
Double	SPE60-18M	00C23-075A-03
Double	SPE60-24M	00C23-075A-04
Double / For Dual-Sided	SPE60-24M-DS	00C23-107D-03
Double	SPE72-24M	00C23-032A
Double	SPE72-30M	00C23-075A-05
Double / For Dual-Sided	SPE72-30M-DS	00C23-107D-04
Single - 14" Deep	DP46	00C23-044A
Single - 14" Deep	DP60	00C23-161D-01
Single - 14" Deep	DP67	00C23-045A
Single - 14" Deep	DP72	00C23-161D-03
Single - 14" Deep	DP93	00C23-046A
Single - 14" Deep	DP119	00C23-161D-05

Clear-lid models (-CL) of SPE and SPED units cannot have an overshelf

OVERSHELVES CONT'D		
Double - 14" Deep	DP46	00C23-119D-01
Double - 14" Deep	DP60	00C23-161D-02
Double - 14" Deep	DP67	00C23-116D-01
Double - 14" Deep	DP72	00C23-161D-04
Double - 14" Deep	DP93	00C23-120D-00
Double - 14" Deep	DP119	00C23-161D-06
Single - 14" Deep	SPE36-15M-STL	00C23-110D
Single - 14" Deep	SPE48-18M-STL	00C23-094D
Single - 14" Deep	SPE60-24M-STL	00C23-095D
Single - 14" Deep	SPE72-30M-STL	00C23-096D
Single - 14" Deep with side guards & LED light	SPE48-18M-STL	00C23-113D-01
Single - 14" Deep with side guards & LED light	SPE60-24M-STL	00C23-113D-02
Single - 14" Deep with side guards & LED light	SPE72-30M-STL	00C23-113D-03
Double - 10" Deep	SPE27 (will not work on B top)	00C23-123D-00
Double - 10" Deep	SPE36	00C23-124D-00
Double - 10" Deep	SPE48	00C23-125D-00
Double - 10" Deep	SPE60	00C23-126D-00
Double - 10" Deep	SPE72	00C23-127D-00
Double - 18" Deep	SPE27-M (will not fit on B top)	00C23-128D-00
Double - 18" Deep	SPE36-M	00C23-129D-00
Double - 18" Deep	SPE48-M	00C23-130D-00
Double - 18" Deep	SPE60-M	00C23-131D-00
Double - 18" Deep	SPE72-M	00C23-132D-00

Clear-lid models (-CL) of SPE and SPED units cannot have an overshelf

NIGHT COVERS FOR STANDARD PREP	COVERS REQUIRED	DESCRIPTION	PART NUMBER
SPE27HCHC	1	8 pan cover	00C32-013A-02
SPE32HCHC-08	1	8 pan cover	00C32-013A-06
SPE36HC-08	1	8 pan cover	00C32-013A-06
SPE36HC-10	1	10 pan cover	00C32-013A-07
SPE48HC-08	1	8 pan cover	00C32-013A-02
SPE48HC-10	1	10 pan cover	00C32-013A-03
SPE48HC-12	1	12 pan cover	00C32-013A-04
SPE60HC-08	1	8 pan cover	00C32-013A-02
SPE60HC-10	1	10 pan cover	00C32-013A-03
SPE60HC-12	1	12 pan cover	00C32-013A-04
SPE60HC-16	1	16 pan cover	00C32-013A-05
SPE72HC-08	1	8 pan cover	00C32-013A-02
SPE72HC-10	1	10 pan cover	00C32-013A-03
SPE72HC-12	1	12 pan cover	00C32-013A-04
SPE72HC-18	2	12 pan cover	00C32-013A-04
		6 pan cover	00C32-013A-01

NIGHT COVERS FOR MEGATOP PREP	COVERS REQUIRED	DESCRIPTION	PART NUMBER
SPE27HC-12M	1	12 pan cover	00C32-014A-03
SPE32HC-12M	1	12 pan cover	00C32-014A-01
SPE36HC-12M	1	12 pan cover	00C32-014A-01
SPE36HC-15M	1	15 pan cover	00C32-014A-04
SPE48HC-12M	1	12 pan cover	00C32-014A-01
SPE48HC-18M	1	18 pan cover	00C32-014A-02
SPE60HC-12M	1	12 pan cover	00C32-014A-01
SPE60HC-18M	1	18 pan cover	00C32-014A-02
SPE60HC-24M	2	12 pan cover (order two)	00C32-014A-01
SPE72HC-12M	1	12 pan cover	00C32-014A-01
SPE72HC-18M	1	18 pan cover	00C32-014A-02
SPE72HC-24M	2	12 pan cover (order two)	00C32-014A-01
SPE72HC-30M	2	12 pan cover	00C32-014A-01
		18 pan cover	00C32-014A-02





WORKTOPS & UNDERCOUNTERS

FOUNDATION OF KITCHEN LAYOUTS BUILT TO PERFORM

WORKTOPS

Stainless steel top

Full electronic control

Interior thermometer

Self-closing doors

with 120° stay-open feature,
on cartridge style hinges

Easy door removal

for service and cleaning

Magnetic gasket

attached to each door
for positive seal

Two epoxy-coated steel wire shelves per section

Field-reversible doors

On select models

6" heavy duty casters

3" casters or 6" leg option available
at no charge when specified on order



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

MADE IN USA



REMOVABLE BACKSPASH

available as an option, as well as a Flat
Top, or a Foamed-in-Place backsplash



FIELD REVERSIBLE DOORS

for layout flexibility

ACCESS OPTIONS

- Doors
- Drawers

AGENCY CERTIFICATIONS





EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless

AVAILABLE ACCESSORIES

- Composite cutting boards (only available on rear-mounted worktops)
- Bun tray rack
- Locks (doors only)
- Glass doors (rear-mount units only)
- 16-gauge stainless steel top

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

BACKSPLASH OPTIONS

- Removable
- 4" foamed-in-place
- Flat-top

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

WORKTOPS

Rear-Mounted Refrigeration


REFRIGERATORS - DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.


MODEL WIDTH	MODEL DEPTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
24"	Solid	WTR24AHC	1/2	115	1/6	2	5.16	24	32	33.63	168	REMOVABLE
	Solid	WTR24AHC-FIP	1/2	115	1/6	2	5.16	24	32	33.63	182	FOAM
	Solid	WTR24AHC-FLT	1/2	115	1/6	2	5.16	24	32	29.63	168	FLAT TOP
27"	Solid	WTR27AHC	1/2	115	1/6	2	6.13	27	32	33.63	184	REMOVABLE
	Solid	WTR27AHC-FIP	1/2	115	1/6	2	6.13	27	32	33.63	172	FOAM
	Solid	WTR27AHC-FLT	1/2	115	1/6	2	6.13	27	32	29.63	180	FLAT TOP
32"	Solid	WTR32AHC	1/2	115	1/6	2	7.2	32	32	33.63	184	REMOVABLE
	Solid	WTR32AHC-FIP	1/2	115	1/6	2	7.2	32	32	33.63	172	FOAM
	Solid	WTR32AHC-FLT	1/2	115	1/6	2	7.2	32	32	29.63	180	FLAT TOP
36"	Solid	WTR36AHC	2/4	115	1/6	2	8.5	36	32	33.63	216	REMOVABLE
	Solid	WTR36AHC-FIP	2/4	115	1/6	2	8.5	36	32	33.63	226	FOAM
	Solid	WTR36AHC-FLT	2/4	115	1/6	2	8.5	36	32	29.63	212	FLAT TOP
48"	Solid	WTR48AHC	2/4	115	1/6	2.2	11.82	48	32	33.63	258	REMOVABLE
	Solid	WTR48AHC-FIP	2/4	115	1/6	2.2	11.82	48	32	33.63	266	FOAM
	Solid	WTR48AHC-FLT	2/4	115	1/6	2.2	11.82	48	32	29.63	235	FLAT TOP
60"	Solid	WTR60AHC	2/4	115	1/5	3	14.75	60	32	33.63	312	REMOVABLE
	Solid	WTR60AHC-FIP	2/4	115	1/5	3	14.75	60	32	33.63	322	FOAM
	Solid	WTR60AHC-FLT	2/4	115	1/5	3	14.75	60	32	29.63	300	FLAT TOP
72"	Solid	WTR72AHC	3/6	115	1/5	3	17.88	72	32	33.63	334	REMOVABLE
	Solid	WTR72AHC-FIP	3/6	115	1/5	3	17.88	72	32	33.63	362	FOAM
	Solid	WTR72AHC-FLT	3/6	115	1/5	3	17.88	72	32	29.63	347	FLAT TOP

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.


BACKSPLASH OPTIONS	
SUFFIX	EXTERIOR
(standard)	Removable backsplash
FIP	4" foamed-in-place backsplash
FLT	Flat-top with no backsplash



STANDARD



FOAMED IN PLACE




FLAT-TOP

REFRIGERATORS (SHALLOW DEPTH) - DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
20"	Solid	WTR20HC	1/2	115	1/6	2	2.34	20	24.5	30.13	116	REMOVABLE
	Solid	WTR20HC-FIP	1/2	115	1/6	2	2.34	20	24.5	30.13	124	FOAM
	Solid	WTR20HC-FLT	1/2	115	1/6	2	2.34	20	24.5	26.13	119	FLAT TOP
27"	Solid	WTR27HC	1/2	115	1/6	2	5.25	27	29.88	33.63	161	REMOVABLE
	Solid	WTR27HC-FIP	1/2	115	1/6	2	5.25	27	29.88	33.63	161	FOAM
	Solid	WTR27HC-FLT	1/2	115	1/6	2	5.25	27	29.88	29.63	160	FLAT TOP
34"	Solid	WTR34HC	2/4	115	1/6	2	3.88	34	24.63	30.13	171	REMOVABLE
	Solid	WTR34HC-FIP	2/4	115	1/6	2	3.88	34	24.63	30.13	172	FOAM
	Solid	WTR34HC-FLT	2/4	115	1/6	2	3.88	34	24.63	26.13	172	FLAT TOP

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

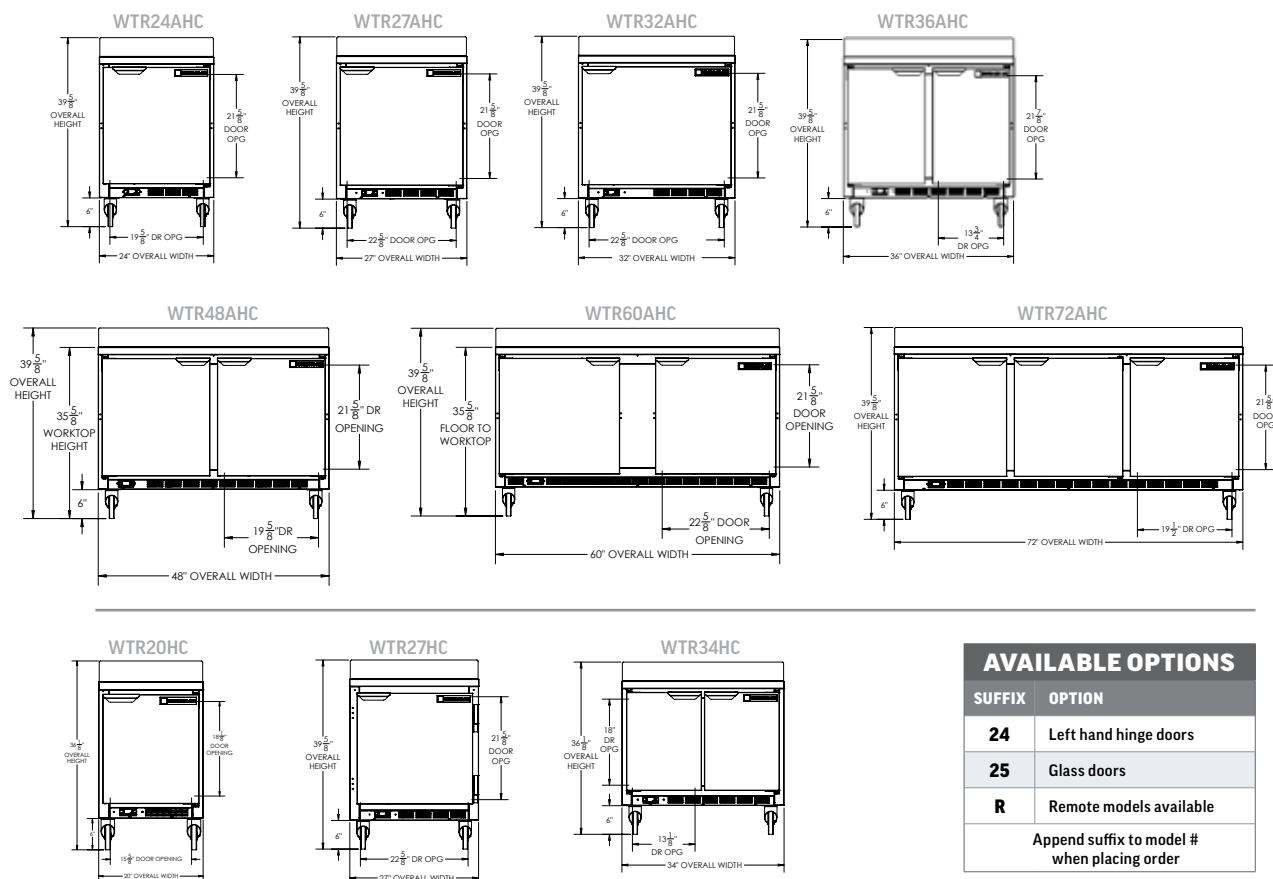

WORKTOPS

Rear-Mounted Refrigeration


REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
27"	WTRD27AHC-2	2	—	115	1/6	2	6.13	27	32	33.63	202	REMOVABLE
	WTRD27AHC-2-FIP	2	—	115	1/6	2	6.13	27	32	33.63	202	FOAM
	WTRD27AHC-2-FLT	2	—	115	1/6	2	6.13	27	32	29.63	192	FLAT TOP
32"	WTRD32AHC-2	2	—	115	1/6	2	7.2	32	32	33.63	230	REMOVABLE
	WTRD32AHC-2-FIP	2	—	115	1/6	2	7.2	32	32	33.63	244	FOAM
	WTRD32AHC-2-FLT	2	—	115	1/6	2	7.2	32	32	29.63	226	FLAT TOP
36"	WTRD36AHC-2	2	—	115	1/6	2	8.5	36	32	33.63	244	REMOVABLE
	WTRD36AHC-2-FIP	2	—	115	1/6	2	8.5	36	32	33.63	258	FOAM
	WTRD36AHC-2-FLT	2	—	115	1/6	2	8.5	36	32	29.63	240	FLAT TOP
48"	WTRD48AHC-2	2	1/2	115	1/6	2.2	11.82	48	32	33.63	282	REMOVABLE
	WTRD48AHC-4	4	—	115	1/6	2.2	11.82	48	32	33.63	326	REMOVABLE
	WTRD48AHC-2-FIP	2	1/2	115	1/6	2.2	11.82	48	32	33.63	282	FOAM
	WTRD48AHC-4-FIP	4	—	115	1/6	2.2	11.82	48	32	33.63	334	FOAM
	WTRD48AHC-2-FLT	2	1/2	115	1/6	2.2	11.82	48	32	29.63	242	FLAT TOP
	WTRD48AHC-4-FLT	4	—	115	1/6	2.2	11.82	48	32	29.63	326	FLAT TOP

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.





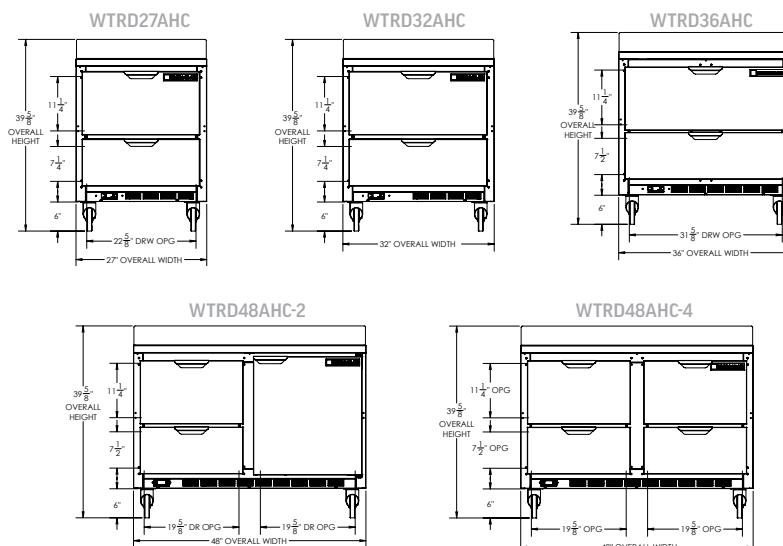


REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
60"	WTRD60AHC-2	2	1/2	115	1/5	3	14.75	60	32	33.63	342	REMOVABLE
	WTRD60AHC-4	4	—	115	1/5	3	14.75	60	32	33.63	356	REMOVABLE
	WTRD60AHC-2-FIP	2	1/2	115	1/5	3	14.75	60	32	33.63	342	FOAM
	WTRD60AHC-4-FIP	4	—	115	1/5	3	14.75	60	32	33.63	386	FOAM
	WTRD60AHC-2-FLT	2	1/2	115	1/5	3	14.75	60	32	29.63	330	FLAT TOP
	WTRD60AHC-4-FLT	4	—	115	1/5	3	14.75	60	32	29.63	271	FLAT TOP
72"	WTRD72AHC-2	2	2/4	115	1/5	3	17.88	72	32	33.63	370	REMOVABLE
	WTRD72AHC-4	4	1/2	115	1/5	3	17.88	72	32	33.63	370	REMOVABLE
	WTRD72AHC-6	6	—	115	1/5	3	17.88	72	32	33.63	330	REMOVABLE
	WTRD72AHC-2-FIP	2	2/4	115	1/5	3	17.88	72	32	33.63	370	FOAM
	WTRD72AHC-4-FIP	4	1/2	115	1/5	3	17.88	72	32	33.63	370	FOAM
	WTRD72AHC-6-FIP	6	—	115	1/5	3	17.88	72	32	33.63	370	FOAM
	WTRD72AHC-2-FLT	2	2/4	115	1/5	3	17.88	72	32	29.63	370	FLAT TOP
	WTRD72AHC-4-FLT	4	1/2	115	1/5	3	17.88	72	32	29.63	330	FLAT TOP
	WTRD72AHC-6-FLT	6	—	115	1/5	3	17.88	72	32	29.63	422	FLAT TOP

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

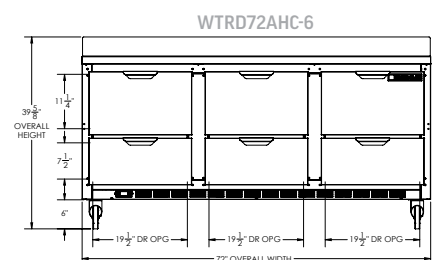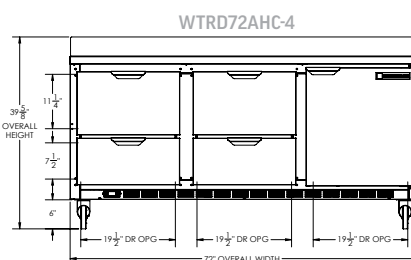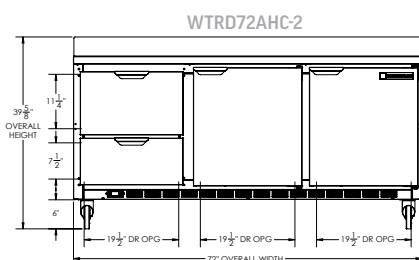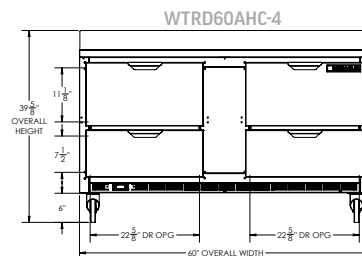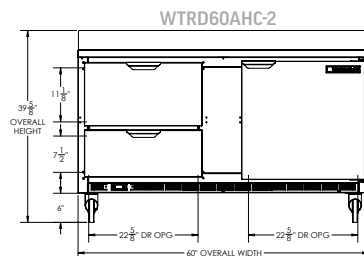

WORKTOPS

Rear-Mounted Refrigeration

FREEZERS - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	MODEL DEPTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
24"	Solid	WTF24AHC	1/2	115	1/4	2.5	5.16	24	32	33.63	190	REMOVABLE
	Solid	WTF24AHC-FIP	1/2	115	1/4	2.5	5.16	24	32	33.63	184	FOAM
	Solid	WTF24AHC-FLT	1/2	115	1/4	2.5	5.16	24	32	29.63	184	FLAT TOP
27"	Solid	WTF27AHC	1/2	115	1/4	2.5	6.13	27	32	33.63	190	REMOVABLE
	Solid	WTF27AHC-FIP	1/2	115	1/4	2.5	6.13	27	32	33.63	202	FOAM
	Solid	WTF27AHC-FLT	1/2	115	1/4	2.5	6.13	27	32	29.63	184	FLAT TOP
32"	Solid	WTF32AHC	1/2	115	1/3+	4	7.2	32	32	33.63	220	REMOVABLE
	Solid	WTF32AHC-FIP	1/2	115	1/3+	4	7.2	32	32	33.63	230	FOAM
	Solid	WTF32AHC-FLT	1/2	115	1/3+	4	7.2	32	32	29.63	215	FLAT TOP
36"	Solid	WTF36AHC	2/4	115	1/4	6	8.69	36	32	33.63	232	REMOVABLE
	Solid	WTF36AHC-FIP	2/4	115	1/4	6	8.69	36	32	33.63	246	FOAM
	Solid	WTF36AHC-FLT	2/4	115	1/2	6	8.69	36	32	29.63	218	FLAT TOP
48"	Solid	WTF48AHC	2/4	115	1/2	7	11.04	48	32	33.63	294	REMOVABLE
	Solid	WTF48AHC-FIP	2/4	115	1/2	7	11.04	48	32	33.63	214	FOAM
	Solid	WTF48AHC-FLT	2/4	115	1/2	7	11.04	48	32	29.63	246	FLAT TOP
60"	Solid	WTF60AHC	2/4	115	1/2	7	14.39	60	32	33.63	320	REMOVABLE
	Solid	WTF60AHC-FIP	2/4	115	1/2	7	14.39	60	32	33.63	340	FOAM
	Solid	WTF60AHC-FLT	2/4	115	1/2	7	14.39	60	32	29.63	320	FLAT TOP

NEW

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

BACKSPLASH OPTIONS	
SUFFIX	EXTERIOR
(standard)	Removable backsplash
FIP	4" foamed-in-place backsplash
FLT	Flat-top with no backsplash

AVAILABLE OPTIONS	
SUFFIX	OPTION
24	Left hand hinge doors
25	Glass doors
R	Remote models available
Append suffix to model # when placing order	

FREEZERS (SHALLOW DEPTH) - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
20"	Solid	WTF20HC	1/2	115	1/4	2.5	2.34	20	24.50	30.13	134	REMOVABLE
	Solid	WTF20HC-FIP	1/2	115	1/4	2.5	2.34	20	24.50	30.13	134	FOAM
	Solid	WTF20HC-FLT	1/2	115	1/4	2.5	2.34	20	24.50	26.13	134	FLAT TOP
27"	Solid	WTF27HC	1/2	115	1/4	2.5	5.25	27	29.88	33.63	185	REMOVABLE
	Solid	WTF27HC-FIP	1/2	115	1/4	2.5	5.25	27	29.88	33.63	192	FOAM
	Solid	WTF27HC-FLT	1/2	115	1/4	2.5	5.25	27	29.88	29.63	185	FLAT TOP

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

DUAL-TEMPS - DOORS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND 0°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
48"	Solid	WTRF48AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.31 R: 5.31	48	32	33.63	302	REMOVABLE
		WTFR48AHC										
50"	Solid	WTRF50AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.31 R: 5.76	50	32	33.63	307	REMOVABLE
		WTFR50AHC										
52"	Solid	WTRF52AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.76 R: 5.76	52	32	33.63	315	REMOVABLE
		WTFR52AHC										

"RF" in the model # designates refrigerator on the left, freezer on the right.

"FR" in the model # designates freezer on the left, refrigerator on the right.

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

NEW

WORKTOPS

Rear-Mounted Refrigeration


FREEZERS - DRAWERS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
27"	WTFD27AHC-2	2	—	115	1/4	2.5	6.13	27	32	33.63	218	REMOVABLE
	WTFD27AHC-2-FIP	2	—	115	1/4	2.5	6.13	27	32	33.63	218	FOAM
	WTFD27AHC-2-FLT	2	—	115	1/4	2.5	6.13	27	32	29.63	228	FLAT TOP
32"	WTFD32AHC-2	2	—	115	1/3+	4	7.2	32	32	33.63	248	REMOVABLE
	WTFD32AHC-2-FIP	2	—	115	1/3+	4	7.2	32	32	33.63	248	FOAM
	WTFD32AHC-2-FLT	2	—	115	1/3+	4	7.2	32	32	29.63	258	FLAT TOP
36"	WTFD36AHC-2	2	—	115	1/2	6	8.69	36	32	33.63	264	REMOVABLE
	WTFD36AHC-2-FIP	2	—	115	1/2	6	8.69	36	32	33.63	262	FOAM
	WTFD36AHC-2-FLT	2	—	115	1/2	6	8.69	36	32	29.63	264	FLAT TOP

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

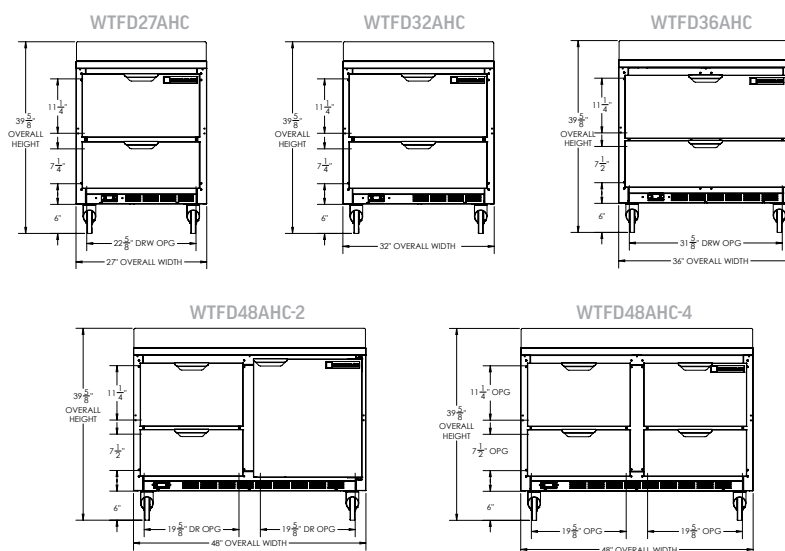



FREEZERS - DRAWERS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.


MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
48"	WTFD48AHC-2	2	1/2	115	1/2	7	11.44	48	32	33.63	325	REMOVABLE
	WTFD48AHC-4	4	—	115	1/2	7	11.44	48	32	33.63	356	REMOVABLE
	WTFD48AHC-2-FIP	2	1/2	115	1/2	7	11.44	48	32	33.63	324	FOAM
	WTFD48AHC-4-FIP	4	—	115	1/2	7	11.44	48	32	33.63	356	FOAM
	WTFD48AHC-2-FLT	2	1/2	115	1/2	7	11.44	48	32	29.63	310	FLAT TOP
	WTFD48AHC-4-FLT	4	—	115	1/2	7	11.44	48	32	29.63	356	FLAT TOP
60"	WTFD60AHC-2	2	1/2	115	1/2	7	14.36	60	32	33.63	390	REMOVABLE
	WTFD60AHC-4	4	—	115	1/2	7	14.36	60	32	33.63	392	REMOVABLE
	WTFD60AHC-2-FIP	2	1/2	115	1/2	7	14.36	60	32	33.63	390	FOAM
	WTFD60AHC-4-FIP	4	—	115	1/2	7	14.36	60	32	33.63	392	FOAM
	WTFD60AHC-2-FLT	2	1/2	115	1/2	7	14.36	60	32	29.63	390	FLAT TOP
	WTFD60AHC-4-FLT	4	—	115	1/2	7	14.36	60	32	29.63	392	FLAT TOP

Depth measurement includes handles.


For total height, add 3 or 6 inches, based on your mounting choice.

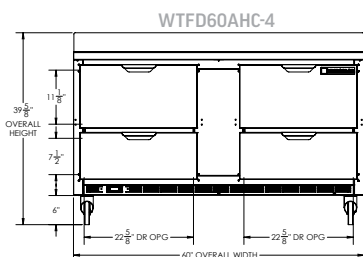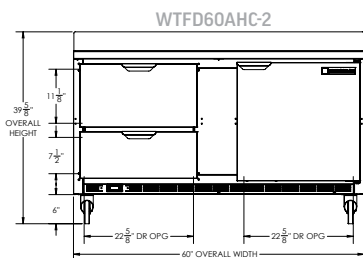


DRAWER PAN CONFIGURATIONS for WTRD and WTFD units




WTRD27 / WTRD32 / WTRD60
WTFD27 / WTFD32 / WTFD60



WTRD46 / WTRD67 / WTRD93 / WTRD119
WTFD46 / WTFD67 / WTFD93 / WTFD119

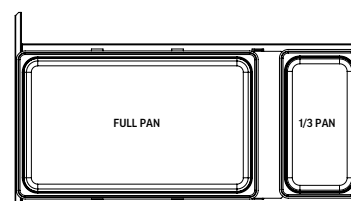

WTRD36 / WTFD36



WTRD46 / WTRD72 / WTFD46

WORKTOPS

Side-Mounted Refrigeration

REFRIGERATORS - DOORS


MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
41"	Solid	WTR41AHC	1/2	115	1/6	2.2	7.94	41	34	33.5	290	FOAM
46"	Solid	WTR46AHC	1/2	115	1/6	3	10.8	46	34	33.5	325	FOAM
67"	Solid	WTR67AHC	2/4	115	1/5	3	18.97	67	34	33.5	400	FOAM
93"	Solid	WTR93AHC	3/6	115	1/3	5	29.7	93	34	33.5	528	FOAM
119"	Solid	WTR119AHC	4/8	115	1/3	5	40.12	119	34	33.5	675	FOAM

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

AVAILABLE OPTIONS	
SUFFIX	OPTION
24	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order	

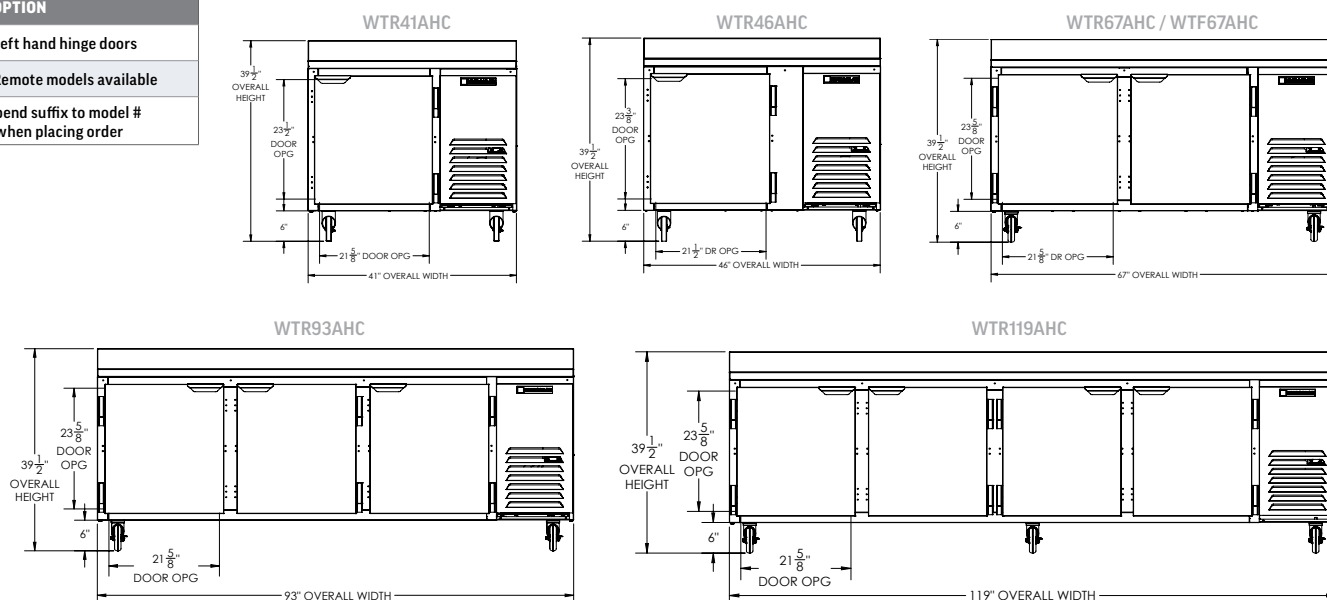

FREEZERS - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
67"	Solid	WTF67AHC	2/4	115	3/4	8.9	20.8	67	34	33.50	431	FOAM

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
46"	WTRD46AHC-2	2	—	115	1/5	3	10.8	46	34	33.5	282	FOAM
67"	WTRD67AHC-2	2	1/2	115	1/5	3	18.97	67	34	33.5	435	FOAM
	WTRD67AHC-4	4	—	115	1/5	3	18.97	67	34	33.5	450	FOAM
93"	WTRD93AHC-2	2	2/4	115	1/3	5	29.7	93	34	33.5	562	FOAM
	WTRD93AHC-4	4	1/2	115	1/3	5	29.7	93	34	33.5	588	FOAM
	WTRD93AHC-6	6	—	115	1/3	5	29.7	93	34	33.5	606	FOAM
119"	WTRD119AHC-2	2	3/6	115	1/3	4.9	40.12	119	34	33.5	604	FOAM
	WTRD119AHC-4	4	2/4	115	1/3	4.9	40.12	119	34	33.5	604	FOAM
	WTRD119AHC-6	6	1/2	115	1/3	4.9	40.12	119	34	33.5	604	FOAM
	WTRD119AHC-8	8	—	115	1/3	4.9	40.12	119	34	33.5	604	FOAM

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.



UNDERCOUNTERS

Undercounter units feature a 1/2" thick sub-top

Full electronic control

Interior thermometer

Self-closing doors

with 120° stay-open feature, on cartridge style hinges

Easy door removal for service and cleaning

Magnetic gasket attached to each door

for positive seal

6" heavy duty casters standard

3" casters or 6" leg option available
at no charge when specified on order

Two epoxy-coated steel wire shelves

per section

Field-reversible doors

On select models



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

MADE IN USA



3" CASTERS AVAILABLE
at no charge when specified at the
time of order



FIELD REVERSIBLE DOORS
for layout flexibility

ACCESS OPTIONS

- Doors
- Drawers

AGENCY CERTIFICATIONS





EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless

AVAILABLE ACCESSORIES

- Bun tray rack
- Locks (doors only)
- Glass doors (rear-mount units only)



AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

UNDERCOUNTERS

Rear-Mounted Refrigeration

REFRIGERATORS (SHALLOW DEPTH) - DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
20"	Solid	UCR20HC	1/2	115	1/6	2	2.34	20	24.5	25.13	119
27"	Solid	UCR27HC	1/2	115	1/6	2	5.25	27	29.88	28.63	157
34"	Solid	UCR34HC	2/2	115	1/6	2	3.88	34	24.63	25.13	167



Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24"	Solid	UCR24AHC	1/2	115	1/6	2	4.48	24	32	28.63	164
27"	Solid	UCR27AHC	1/2	115	1/6	2	6.13	27	32	28.63	164
32"	Solid	UCR32AHC	1/2	115	1/6	2	7.2	32	32	28.63	190
36"	Solid	UCR36AHC	2/4	115	1/6	2	8.5	36	32	28.63	204
48"	Solid	UCR48AHC	2/4	115	1/6	2	11.82	48	32	28.63	252
60"	Solid	UCR60AHC	2/4	115	1/5	3	14.75	60	32	28.63	290
72"	Solid	UCR72AHC	3/6	115	1/5	3	17.88	72	32	28.63	336

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

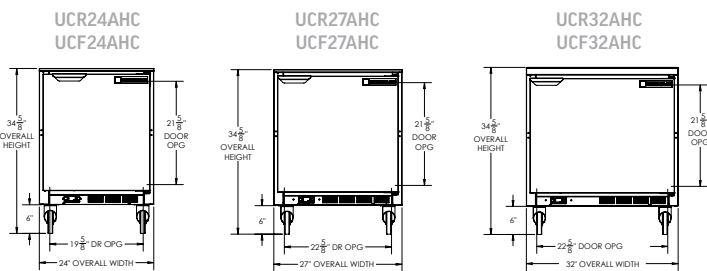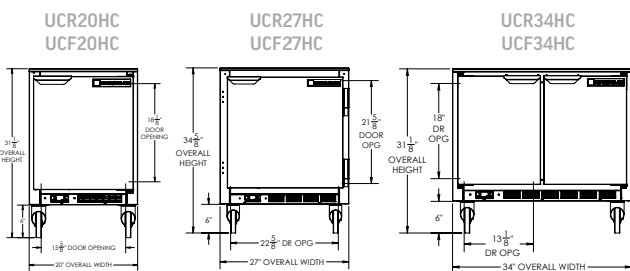

FREEZERS (SHALLOW DEPTH) - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
20"	Solid	UCF20HC	1/2	115	1/4	2.5	2.34	20	24.5	25.13	130
24"	Solid	UCF24HC	1/2	115	1/4	2.5	4.48	24	29.88	28.63	182
27"	Solid	UCF27HC	1/2	115	1/4	2.5	5.25	27	29.88	28.63	180

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.


MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24"	Solid	UCF24AHC	1/2	115	1/4	2.5	5.16	24	32	28.63	182
27"	Solid	UCF27AHC	1/2	115	1/4	2.5	6.13	27	32	28.63	178
32"	Solid	UCF32AHC	1/2	115	1/3+	4	7.2	32	32	28.63	206
36"	Solid	UCF36AHC	2/4	115	1/2	6	8.69	36	32	28.63	218
48"	Solid	UCF48AHC	2/4	115	1/2	7	11.04	48	32	28.63	272
60"	Solid	UCF60AHC	2/4	115	1/2	7	14.39	60	32	28.63	330

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.


AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
25	Glass doors
R	Remote models available
Append suffix to model # when placing order	


UCR36AHC
UCF36AHC




UCR48AHC
UCF48AHC



UCR60AHC
UCF60AHC

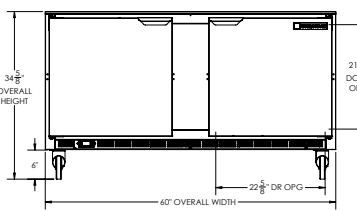

UCR72AHC

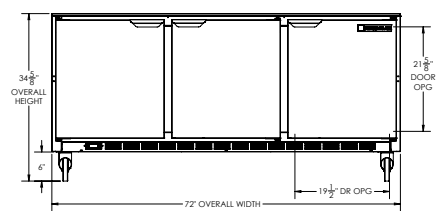

UNDERCOUNTERS

Rear-Mounted Refrigeration

REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27"	UCRD27AHC-2	2	—	115	1/6	2	6.13	27	32	28.63	196
32"	UCRD32AHC-2	2	—	115	1/6	2	7.2	32	32	28.63	222
36"	UCRD36AHC-2	2	—	115	1/6	2	8.5	36	32	28.63	240
48"	UCRD48AHC-2	2	1/2	115	1/6	2.2	11.6	48	32	28.63	259
	UCRD48AHC-4	4	—								
60"	UCRD60AHC-2	2	1/2	115	1/5	3	14.4	60	32	28.63	235
	UCRD60AHC-4	4	—								
72"	UCRD72AHC-2	2	2/4	115	1/5	3	17.1	72	32	28.63	372
	UCRD72AHC-4	4	1/2								
	UCRD72AHC-6	6	—								

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS - DRAWERS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27"	UCFD27AHC-2	2	—	115	1/4	2.5	6.13	27	32	28.63	196
32"	UCFD32AHC-2	2	—	115	1/3+	4	7.2	32	32	28.63	230
36"	UCFD36AHC-2	2	—	115	1/2	6	8.7	36	32	28.63	256
48"	UCFD48AHC-2	2	1/2	115	1/2	7	11.6	48	32	28.63	306
	UCFD48AHC-4	4	—								
60"	UCFD60AHC-2	2	1/2	115	1/2	7	15.8	60	32	28.63	382
	UCFD60AHC-4	4	—								

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

DUAL-TEMPS - DOORS


MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND 0°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
48"	Solid	UCRF48AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.31 R: 5.31	48	32	28.63	297
		UCFR48AHC									
50"	Solid	UCRF50AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.31 R: 5.76	50	32	28.63	298
		UCFR50AHC									
52"	Solid	UCRF52AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.76 R: 5.76	52	32	28.63	304
		UCFR52AHC									

NEW

"RF" in the model # designates refrigerator on the left, freezer on the right.
"FR" in the model # designates freezer on the left, refrigerator on the right.

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

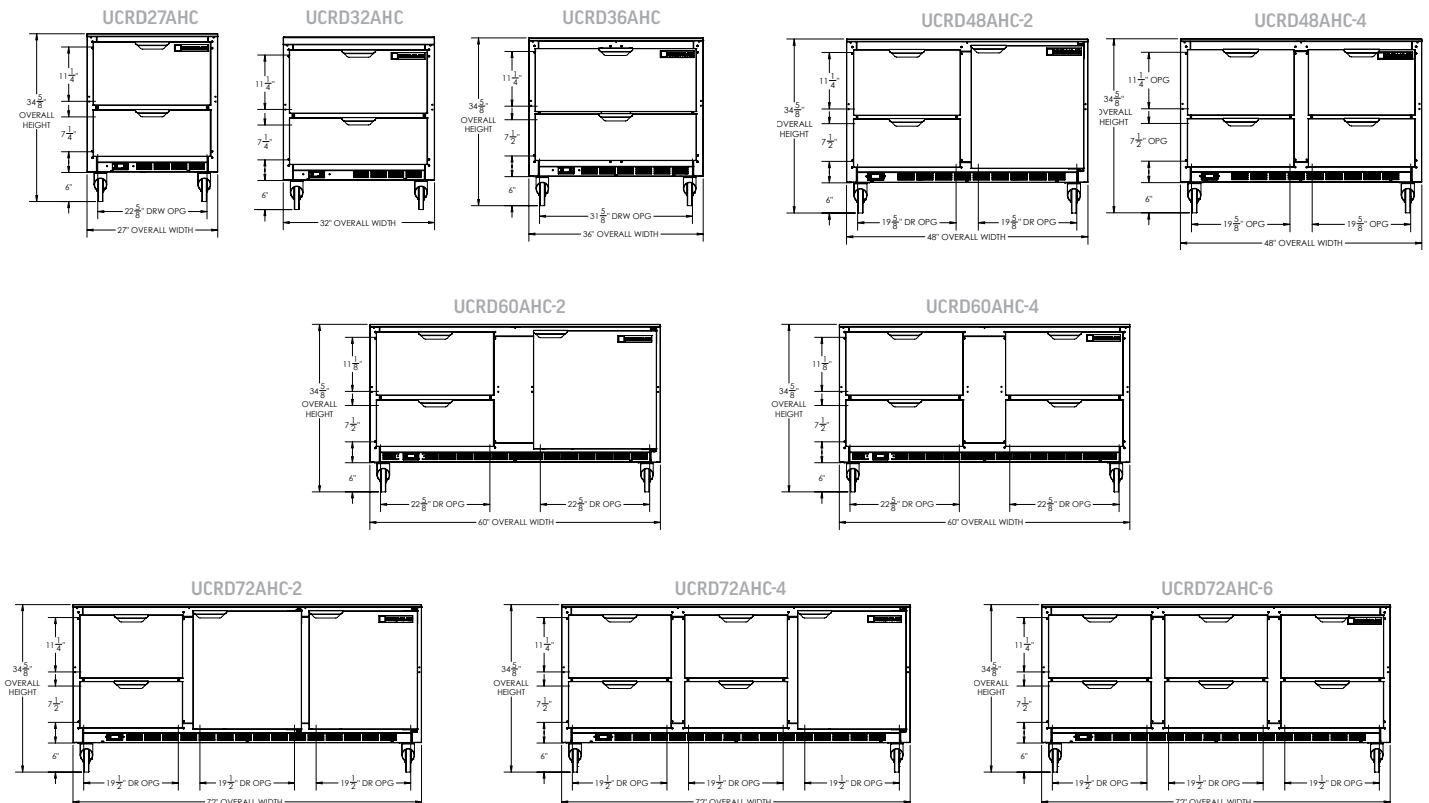

UNDERCOUNTERS

Side-Mounted Refrigeration

REFRIGERATORS - DOORS






MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
41"	Solid	UCR41AHC	1/2	115	1/5	2.2	7.94	41	32.88	28.5	261
46"	Solid	UCR46AHC	1/2	115	1/5	3	10.8	46	32.88	28.5	281
67"	Solid	UCR67AHC	2/4	115	1/5	2.2	18.97	67	32.88	28.5	358
93"	Solid	UCR93AHC	3/6	115	1/3	5	29.7	93	32.88	28.5	468
119"	Solid	UCR119AHC	4/8	115	1/3	5	40.12	119	32.88	28.5	590

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order	

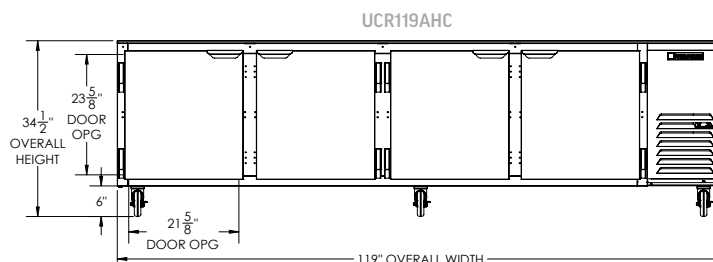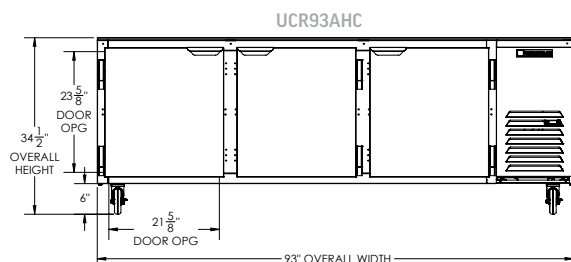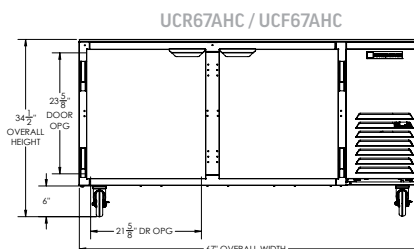

FREEZERS - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0°F AND BELOW.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
67"	Solid	UCF67AHC	2/4	115	3/4	9	20.08	67	32.88	28.5	266

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
46"	UCRD46AHC-2	2	—	115	1/5	3	10.8	46	32	28.5	180
67"	UCRD67AHC-2	2	1/2	115	1/5	2.2	19.2	67	32	28.5	342
	UCRD67AHC-4	4	—	115	1/5	2.2	19.2	67	32	28.5	342
93"	UCRD93AHC-2	2	2/4	115	1/5	3	29.7	93	32	28.5	496
	UCRD93AHC-4	4	1/2	115	1/5	3	29.7	93	32	28.5	520
	UCRD93AHC-6	6	—	115	1/5	3	29.7	93	32	28.5	565
119"	UCRD119AHC-2	2	3/6	115	1/3	4.9	40.5	119	32	28.5	563
	UCRD119AHC-4	4	2/4	115	1/3	4.9	40.5	119	32	28.5	563
	UCRD119AHC-6	6	1/2	115	1/3	4.9	40.5	119	32	28.5	563
	UCRD119AHC-8	8	—	115	1/3	4.9	40.5	119	32	28.5	563

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.



Worktop & Undercounter Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR27A	403-826B
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR27A	403-912D-01
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR36A	403-911D-01
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR36A	403-915D-01
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR48A	403-828B
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR48A	403-913D-01
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR60A	403-829D
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR60A	403-914D-01
Epoxy Coated Ctr Section Wire Shelf (Large)	UCR/WTR72A	403-827B
Epoxy Coated Wire Shelf L&R (Large)	UCR/WTR72A	403-828B
Epoxy Coated Ctr Section Wire Shelf (Small)	UCR/WTR72A	403-912D-01
Epoxy Coated Wire Shelf L&R (Small)	UCR/WTR72A	403-913D-01
Epoxy Coated Wire Shelf	UCR46A/67A, UCF67A	403-834D
Epoxy Coated Wire Shelf	UCR93A/119A	403-834D
Epoxy Coated Wire Shelf	WTR41/46/67A/93A	403-834D
Epoxy Coated Wire Shelf	WTR119A, WTF67A	403-834D
Epoxy Coated Wire Shelf	UCF/UCR/WTR20	403-419D
Epoxy Coated Wire Shelf	UCR/WTR34Y	403-339D
Epoxy Coated Wire Shelf	UCR/UCF/WTF/WTR27 Shallow Depth	403-294D
Shelf Clip	UCR/WTR/UCRD/WTRD	403-169A
Epoxy Coated Large Shelf	WTR27A/UCR27A	403-722C
Epoxy Coated Small Shelf	WTR27A/UCR27A	403-721C
Epoxy Coated Large Shelf	WTR36A, UCR36A	403-723C
Epoxy Coated Small Shelf	WTR36A, UCR36A	403-721C
Epoxy Coated Large Shelf	WTR48A/UCR48A	403-723C
Epoxy Coated Small Shelf	WTR48A/UCR48A	403-721C
Epoxy Coated Large Shelf	WTR60A/UCR60A	403-723C
Epoxy Coated Small Shelf	WTR60A/UCR60A	403-721C
Epoxy Coated Large Shelf	WTR72A/UCR72A	403-723C
Epoxy Coated Small Shelf	WTR72A/UCR72A	403-721C
STACKING COLLARS		
Stacking Collar	UCR20HC, UCF20HC	00C32-015A-01
Wall Mount Shelf	UCR20HC, UCF20HC (3/16" anchors recommended for mounting)	00A24-136D-05
Stacking Collar	UCR27AHC, UCF27AHC	00C32-012A

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
3" Caster	UCR20,UCF20,UCR27,UCF27,UCR34	00C31-041A
6" Caster	UCR20,UCF20,UCR27,UCF27,UCR34	00C31-038A
3" Caster	29" Undercounter/Worktop (set of four)	00C31-041A
6" Caster	29" Undercounter/Worktop (set of four)	00C31-038A
3" Caster	32" Undercounter/Worktop (set of four)	61C01-013A
6" Caster	32" Undercounter/Worktop (set of four)	61C01-001A
3" Caster	UCR/WTR 119A (set of six)	61C01-012A
6" Black Leg	29" Undercounter/Worktop (set of four)	58B02S001A
6" Black Leg	32" Undercounter/Worktop (set of four)	58B02S001A
6" Black Leg	UCR/WTR 119A (set of six)	58B02S002A
6" Seismic/Flanged Legs	29" WT/UC (set of four)	00C31-055A
6" Seismic/Flanged Legs	32" WT/UC (set of four)	00C31-055A
6" Seismic/Flanged Legs	UC Shallow Depth (set of four)	00C31-055A
2 3/4 in Caster Kit	WT/UC	00C31-049A
2" Roller Kit	WT/UC	00C31S045A

WORKTOP WHITE POLY CUTTING BOARDS (1/2" THICK)		
Set of (2) Brackets Required	All Units	00C23-076A-01
29" Cutting Board	WTR27A/WTF27A	705-397D-05
29" Cutting Board	WTR36A/WTF36A	705-397D-19
29" Cutting Board	WTR48A/WTF48A	705-397D-06
29" Cutting Board	WTR60A/WTF60A	705-397D-07
29" Cutting Board	WTR72A/WTF72A	705-397D-08

COMPOSITE CUTTING BOARDS (1/2" THICK)		
Set of (2) Brackets Required	All Units	00C23-076A-01
Composite Cutting Board	WTR27A/WTF27A	705-397D-03
Composite Cutting Board	WTR36A/WTF36A	705-397D-17
Composite Cutting Board	WTR41	705-397D-18
Composite Cutting Board	WTR48A/WTF48A	705-397D-02
Composite Cutting Board	WTR60A/WTF60A	705-397D-04
Composite Cutting Board	WTR72A	705-397D-01

ADDITIONAL ACCESSORIES		
Door Lock (solid doors only)	UCR,WTR (per door; solid doors only)	00C30-099A





CHEF BASES

AMPLE COLD STORAGE WHILE SUPPORTING WORK SPACES

**NEWLY
REDESIGNED**

CHEF BASES

12-gauge stainless steel drawer slides with Delrin® rollers rated at 275 lbs

Heavy-duty, fireproof, reinforced, insulated 16-gauge top – No heat shield required
(must adhere to manufacturer's clearance)

Compressor available on left or right side
(specify at time of order)

Full refrigeration system serviceability from the front of the cabinet, eliminating the need to remove the lid

Redesigned airflow for more consistent product temperature

Redesigned drawer systems for easier installation, field adjustment, and increased pan capacity

Accommodates 6-inch-deep full-size food service pans in top & bottom drawers

Featuring environmentally friendly energy-efficient R290 refrigerant



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

**3 YEAR PARTS & LABOR WARRANTY WITH AN
ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

LIFETIME WARRANTY ON ALL DRAWERS AND SLIDES (PARTS ONLY)



12-GAUGE DRAWER SLIDES
with 3 Delrin encased stainless steel roller bearings per each drawer slide



ACCOMMODATES 6" PANS IN
top and bottom drawers

ACCESS OPTIONS

- Drawers

AGENCY CERTIFICATIONS





EXTERIOR FINISHES

- Stainless steel with galvanized back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE ACCESSORIES

- Custom flat top sizes available, up to 6" overhang on either side to create a custom sized top
- Gasket guards



AVAILABLE OPTIONS

- Flat Top edge in lieu of marine edge on standard sizes
- Remote models available

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

CHEF BASES

REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	FULL SIZE PAN CAPACITY	VOLTS	HP	AMPS	CUBIC FEET	TOP WIDTH	CABINET WIDTH	DEPTH	HEIGHT W/ CASTERS	CRATED WEIGHT
36"	WTRCS36HC	2	4	115	1/6	1.7	5.64	36	36	34.75	24.38	350
	WTRCS36HC-48							48	36	34.75	24.38	400
NEW 48"	WTRCS48HC	2	4	115	1/6	1.7	8.59	48	48	34.75	24.38	375
52"	WTRCS52HC	2	6	115	1/6	1.7	9.58	52	52	34.75	24.38	400
60"	WTRCS60HC	2	6	115	1/6	1.7	11.55	60	60	34.75	24.38	475
	WTRCS60HC-64							64	60	34.75	24.38	525
72"	WTRCS72HC	4	8	115	1/3	5	14.51	72	72	34.75	24.38	575
	WTRCS72HC-76							76	72	34.75	24.38	625
84"	WTRCS84HC	4	10	115	1/3	5	17.46	84	84	34.75	24.38	650
	WTRCS84HC-89							89	84	34.75	24.38	700
	WTRCS84HC-96							96	84	34.75	24.38	725
NEW 96"	WTRCS96HC	4	12	115	1/3	5	20.42	96	96	34.75	24.38	675
112"	WTRCS112HC	6	14	115	1/3	5	24.36	112	112	34.75	24.38	800
	WTRCS112HC-120							120	112	34.75	24.38	850

CHEF BASE ACCESSORIES

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
3" Caster	WTRCS Series	00C26-017A
ADDITIONAL ACCESSORIES		
Gasket Guard	WTRCS36	00B23S041D-02
Gasket Guard	WTRCS60	00B23S041D-01
Gasket Guard	WTRCS72	00B23S041D-03
Additional Gasket Guards available for other sizes of Chef Bases.		


FREEZERS - DRAWERS

MAINTAINS PRODUCT TEMPERATURE AT -10° F AND BELOW.

MODEL WIDTH	MODEL #	DRAWERS	FULL SIZE PAN CAPACITY	VOLTS	HP	AMPS	CUBIC FEET	TOP WIDTH	CABINET WIDTH	DEPTH	HEIGHT W/ CASTERS	CRATED WEIGHT
36"	WTFCS36HC	2	4	115	1/2	4.5	5.64	36	36	34.75	24.38	336
	WTFCS36HC-48							48	36	34.75	24.38	346
48"	WTFCS48HC	2	4	115	1/2	4.5	8.59	48	48	34.75	24.38	375
52"	WTFCS52HC	2	6	115	1/2	4.5	9.58	52	52	34.75	24.38	400
60"	WTFCS60HC	2	6	115	3/4	6.5	11.55	60	60	34.75	24.38	475
	WTFCS60HC-64							64	60	34.75	24.38	525
72"	WTFCS72HC	4	8	115	3/4	6.5	14.51	72	72	34.75	24.38	575
	WTFCS72HC-76							76	72	34.75	24.38	625
84"	WTFCS84HC	4	10	115	3/4	6.5	17.46	84	84	34.75	24.38	650
	WTFCS84HC-89							89	84	34.75	24.38	700
	WTFCS84HC-96							96	84	34.75	24.38	725
NEW 96"	WTFCS96HC	4	12	115	3/4	6.5	20.42	96	96	34.75	24.38	675

Depth measurement includes handles. Height includes 3 inch casters.



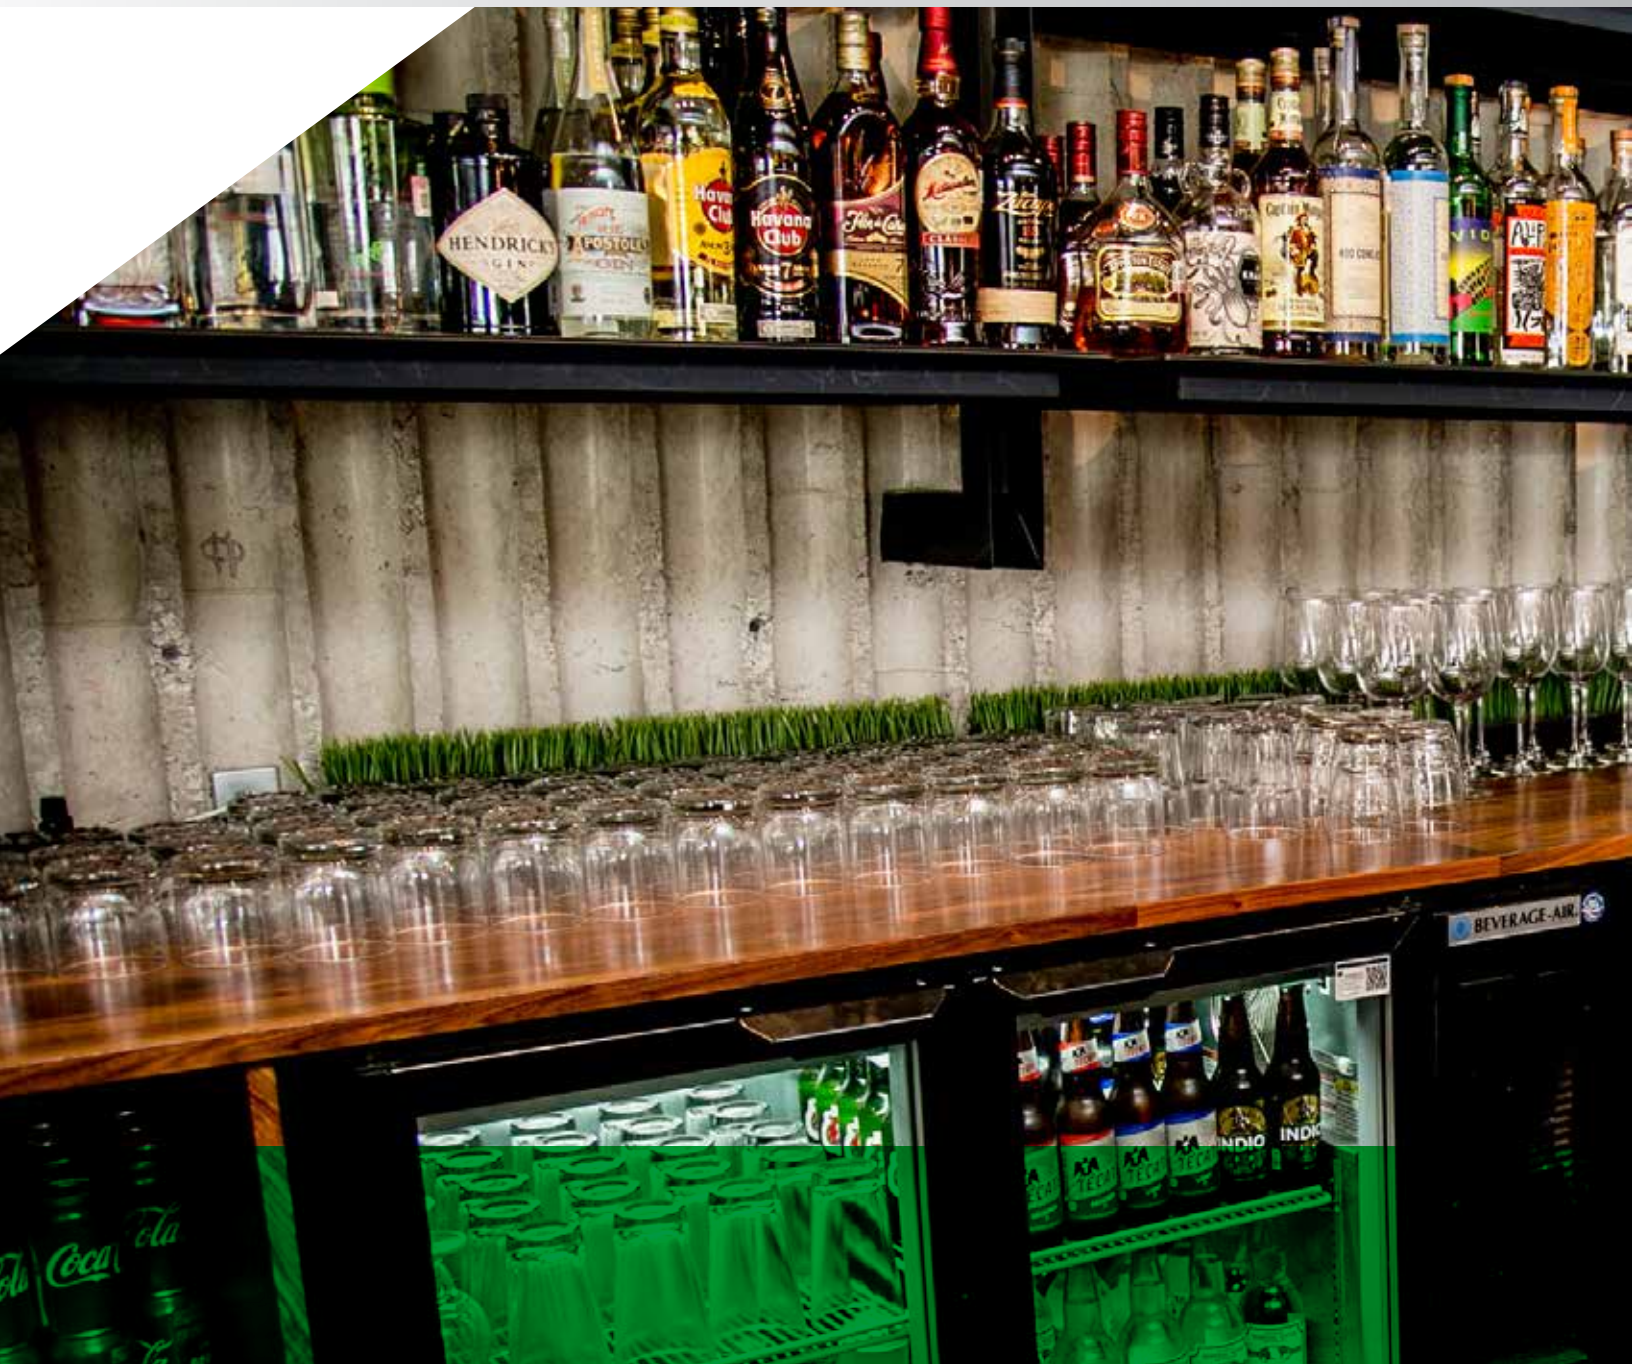



BAR & WINE EQUIPMENT

DYNAMIC PERFORMANCE THAT ENHANCES THE FRONT OF THE HOUSE

DIRECT DRAWS

3-IN-1 DRAFT SOLUTIONS

Dispense beer, wine, or coffee (other non-alcoholic beverages) with the same tap—no line/manifold changes needed!



Stainless steel top with drip tray

Galvanized steel interior liner
with heavy duty stainless steel floor

Full electronic control

Drain tube located at bottom front of cooler
connects to floor drain

Self-closing doors with locks

Magnetic gasket attached to each door
for positive seal

Field reversible door

Compressor available on left or right side
specify at time of order

WIDE VARIETY OF OPTIONS AND ACCESSORIES

**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

MADE IN USA



LEFT OR RIGHT COMPRESSOR
Specify which side the compressor
should be located at time of order



DRAIN TUBE
bottom front of cooler (condensor side)
and connects directly to floor drain

ACCESS OPTIONS

- Doors

AGENCY CERTIFICATIONS



REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	FINISH
24"	DD24HC-1-B	1	115	1/6	2	7.66	24	30.13	37.75	174	1	BLACK
	DD24HC-1-S									184	1	STAINLESS FRONT
36"	DD36HC-1-B	1	115	1/4	2.5	8.31	36	24.5	36	250	1	BLACK
	DD36HC-1-S									242	1	STAINLESS
48"	DD48HC-1-B	2	115	1/4	2.50	12.4	48	24.5	36	284	2	BLACK
	DD48HC-1-S										2	STAINLESS
50.5"	DD50HC-1-B	2	115	1/4	2.50	17.86	50.5	29	37.38	290	2	BLACK
	DD50HC-1-S									310	2	STAINLESS FRONT
	DD50HC-1-C-B	2	115	1/4	2.50	17.86	50.5	29	37.38	310	2	BLACK
	DD50HC-1-C-S									310	2	STAINLESS FRONT
59"	DD58HC-1-B	2	115	1/4	2.50	21.86	59	29	37.38	342	3	BLACK
	DD58HC-1-S									376	3	STAINLESS FRONT
	DD58HC-1-C-B	2	115	1/4	2.50	21.86	59	29	37.38	342	3	BLACK
	DD58HC-1-C-S									342	3	STAINLESS FRONT
69"	DD68HC-1-B	2	115	1/3	5.5	25.93	69	29	37.38	380	3	BLACK
	DD68HC-1-S									379	3	STAINLESS FRONT
	DD68HC-1-C-B	2	115	1/3	5.5	25.93	69	29	37.38	400	3	BLACK
	DD68HC-1-C-S									400	3	STAINLESS FRONT
72"	DD72HC-1-B	3	115	1/3	3.1	19.95	72	24.5	36	424	3	BLACK
	DD72HC-1-S									376	3	STAINLESS
79"	DD78HC-1-B	3	115	1/3	5.5	33.59	79	29	37.38	400	4	BLACK
	DD78HC-1-S									400	4	STAINLESS FRONT
	DD78HC-1-B-12T	3	115	1/3	5.5	33.59	79	29	37.38	478	4	BLACK
	DD78HC-1-S-12T									478	4	STAINLESS FRONT
95"	DD94HC-1-B	3	115	1/3	5.5	37.82	95	29	37.38	458	5	BLACK
	DD94HC-1-S									458	5	STAINLESS FRONT
	DD94HC-1-B-12T	3	115	1/3	5.5	37.82	95	29	37.38	532	5	BLACK
	DD94HC-1-S-12T									458	5	STAINLESS FRONT

Depth measurement includes handles.
Height measurement includes mounting height (DD24 only), but excludes tap height. Add average tap height of 15" for total unit height.



EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized walls with reinforced stainless steel floor
- Stainless steel

AVAILABLE ACCESSORIES

- Wine Models
- Wine Taps
- Faucet Locks
- Glass Rinser
- 1-6 Insulated Stainless Towers/Taps
- Optional 12 Tap Tower for 94" Models
- Dual Tap Placement Option
- No Draft Arm with Hole Cover

AVAILABLE OPTIONS

- Left or right side compressor
- Remote models available


MOUNTING OPTIONS

- 6" casters
- 3" casters
- 6" legs


DIRECT DRAWS

Keg Capacities


DD24 / DD36




DD48 / DD50




DD58 / DD68 / DD72



DD78



DD94



RC-500 SERIES RAPID CHILL GLASS FROSTER

Freeze any type of glass in a flash

Ideal for chilling beer, champagne, wine, and cocktail glasses

Also ideal for chilling the exterior of bottles

Simply push down on the froster head to dispense jet of CO2

Neon, color changing lights illuminate the glass as you frost

Does not taint the taste of drinks

RC-500 mounts to any table or bar counter

Sterilizes the glass due to the cooling process, for a more hygienic drink service

Will not affect the carbonation or temperature of drinks

No need for electrical connection, for greater portability and practicality

LED lights require (2) AA batteries

Requires food grade CO2 cylinders with liquid dip tube (siphon tank)

MODEL #	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
RC-500	10.63	5.11	16.14	12



BAR MOBILES

Stainless steel drip tray for easy cleaning

Heavy-duty stainless steel floor

Stainless steel top with black glass rails

4" casters

Full electronic control

Interior thermometer

Tower has continuous source of cold air

Portable unit with waste bottle

for beer and wine from drain

Self-closing doors with locks

Field-reversible door

Magnetic gasket attached to each door

for positive seal



WIDE VARIETY OF OPTIONS AND ACCESSORIES

**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

MADE IN USA



PORTABLE WASTE BOTTLE
for beer and wine from drain



STAINLESS STEEL DRIP TRAY
for easy cleaning

ACCESS OPTIONS

- Doors

AGENCY CERTIFICATIONS



REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	FINISH
24"	BM23HC-B	1	115	1/6	2	7.66	24	30.13	53	176	1	BLACK
	BM23HC-B-28	1	115	1/6	2	7.66	24	30.13	39.37	174	1	BLACK
	BM23HC-S-31	1	115	1/6	2	7.66	24	30.13	53	180	1	STAINLESS
	BM23HC-C-B	1	115	1/6	2	7.66	24	30.13	53.25	180	1	BLACK
	BM23HC-C-S	1	115	1/6	2	7.66	24	30.13	53.25	186	1	STAINLESS

Depth measurement includes handles.

Height measurement includes mounting height and tap height if applicable.

DUAL ZONE

LEFT COMPARTMENT MAINTAINS 32-40°F.
RIGHT COMPARTMENT MAINTAINS 50-65°F.

MODEL WIDTH	MODEL #	DOORS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	FINISH
24"	DZ24-1-B	1	115	1/5	4	7.12	24	30.13	53	220	(4) 1/6	BLACK
	DZ24-1-S											STAINLESS

Not intended for beer/beer configuration.

Depth measurement includes handles.

Height measurement includes mounting height and tap height.



EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized steel with reinforced stainless steel floor
- Stainless steel

AVAILABLE ACCESSORIES

- Club top (BM23 only)
- 1-4 insulated stainless towers/taps
- Wine models available
- 2, 3, or 4-way manifolds
- Faucet locks
- No draft arm with hole cover

AVAILABLE OPTIONS

- Outdoor approved unit available (BM23 only)

MOUNTING OPTIONS

- 4" casters

BACK BAR COOLERS

Galvanized Steel Interior

Stainless Steel Floor

Full electronic control

Compressor Available on Left or Right Side
specify at time of order

LED Lighting

Two Epoxy Coated Shelves per section

Stay Open Door and Locks

Field Reversible Doors
on select models

Sliding Glass Doors
on select models (door frames only come in black)

Pass Thru Models Available

Magnetic gasket attached to each door
for positive seal



WIDE VARIETY OF OPTIONS AND ACCESSORIES

**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**

MADE IN USA



LEFT OR RIGHT COMPRESSOR
Specify which side the compressor
should be located at time of order



OPEN FOOD RATED MODELS
for increased storage options

ACCESS OPTIONS

- Hinge doors
- Slide doors
- Pass-thru

AGENCY CERTIFICATIONS





EXTERIOR FINISHES

- Black
- Stainless Steel front/sides
- Stainless steel front with continuous coil coated sides

INTERIOR FINISHES

- Galvanized steel with reinforced stainless steel floor
- Stainless steel

AVAILABLE ACCESSORIES

- Wine models available
- Food rated models
- Glass door
- Stainless steel top and galvanized sub-tops available
- Extra shelves



AVAILABLE OPTIONS

- Left or right side compressor
- Remote models available

MOUNTING OPTIONS

- 6" casters
- 3" casters
- 6" legs

BACK BAR COOLERS

Standard

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
24"	BB24HC-1-B	1/2	115	1/6	2	7.66	24	30.13	37.75	186	1	180	140	110	BLACK
	BB24HC-1-S									188	1	180	140	110	STAINLESS FRONT
36"	BB36HC-1-B	1/2	115	1/4	2.5	8.31	36	24.5	34	228	1	240	220	170	BLACK
	BB36HC-1-S									243	1	240	220	170	STAINLESS
	BB36HC-1-B-27	1/2	115	1/4	2.5	8.31	36	24.5	36	232	1	240	220	170	BLACK
	BB36HC-1-S-27									243	1	240	220	170	STAINLESS
48"	BB48HC-1-B	2/4	115	1/4	2.5	12.4	48	24.5	34	270	2	288	300	325	BLACK
	BB48HC-1-S									306	2	288	300	325	STAINLESS
	BB48HC-1-B-27	2/4	115	1/4	2.5	12.4	48	24.5	36	297	2	288	300	325	BLACK
	BB48HC-1-S-27									292	2	288	300	325	STAINLESS
59"	BB58HC-1-B	2/4	115	1/4	2.5	21.86	59	29.13	37.25	350	2	528	440	365	BLACK
	BB58HC-1-S									354	2	528	440	365	STAINLESS FRONT
69"	BB68HC-1-B	2/4	115	1/3	5.3	25.93	69	29.13	37.25	401	3	672	550	435	BLACK
	BB68HC-1-S									401	3	672	550	435	STAINLESS FRONT
72"	BB72HC-1-B	3/6	115	1/3	3.1	19.92	72	24.5	34	325	3	540	480	505	BLACK
	BB72HC-1-S									359	3	540	480	505	STAINLESS
	BB72HC-1-B-27	3/6	115	1/3	3.1	19.92	72	24.5	36	325	3	540	480	505	BLACK
	BB72HC-1-S-27									359	3	540	480	505	STAINLESS
79"	BB78HC-1-B	3/6	115	1/3	5.5	33.59	79	29.13	37.25	448	4	740	630	560	BLACK
	BB78HC-1-S									444	4	740	630	560	STAINLESS FRONT
95"	BB94HC-1-B	3/6	115	1/3	5.5	37.82	95	29.13	37.25	494	5	920	785	675	BLACK
	BB94HC-1-S									494	5	920	785	675	STAINLESS FRONT

Depth measurement includes handles.
BB24 height measurement includes mounting height.

AVAILABLE OPTIONS

SUFFIX	OPTION
27	2" Stainless steel top
R	Remote models available
Append suffix to model # when placing order. Ex: BB36HC-1-S-27	

GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
24"	BB24HC-1-G-B	1/2	115	1/6	2	7.66	24	30.13	37.75	192	1	180	140	110	BLACK
	BB24HC-1-G-S									202	1	180	140	110	STAINLESS FRONT
36"	BB36HC-1-G-B	1/2	115	1/4	2.5	8.36	36	24.50	34	232	1	240	220	170	BLACK
	BB36HC-1-G-S									243	1	240	220	170	STAINLESS
	BB36HC-1-G-B-27	1/2	115	1/4	2.5	8.36	36	24.50	36	244	1	240	220	170	BLACK
	BB36HC-1-G-S-27									243	1	240	220	170	STAINLESS
48"	BB48HC-1-G-B	2/4	115	1/4	2.5	12.4	48	24.50	34	286	2	288	300	325	BLACK
	BB48HC-1-G-S														STAINLESS
	BB48HC-1-G-B-27	2/4	115	1/4	2.5	12.4	48	24.50	36	296	2	288	300	325	BLACK
	BB48HC-1-G-S-27														STAINLESS
59"	BB58HC-1-G-B	2/4	115	1/4	2.5	21.86	59	29.13	37.25	354	2	528	440	365	BLACK
	BB58HC-1-G-S														STAINLESS FRONT
69"	BB68HC-1-G-B	2/4	115	1/3	5.3	25.93	69	29.13	37.25	401	3	672	550	435	BLACK
	BB68HC-1-G-S														STAINLESS FRONT
72"	BB72HC-1-G-B	3/6	115	1/3	3.1	19.92	72	24.50	34	375	3	540	480	505	BLACK
	BB72HC-1-G-S									388	3	540	480	505	STAINLESS
	BB72HC-1-G-B-27	3/6	115	1/3	3.1	19.92	72	24.50	36	375	3	540	480	505	BLACK
	BB72HC-1-G-S-27									381	3	540	480	505	STAINLESS
79"	BB78HC-1-G-B	3/6	115	1/3	5.5	33.59	79	29.13	37.25	444	4	740	630	560	BLACK
	BB78HC-1-G-S														STAINLESS FRONT
95"	BB94HC-1-G-B	3/6	115	1/3	5.5	37.82	95	29.13	37.25	544	5	920	785	675	BLACK
	BB94HC-1-G-S														STAINLESS FRONT

GLASS DOORS (SLIDING) (Door frame only comes in black)

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-GS-B	2/4	115	1/4	2.5	12.4	48	23.63	34	278	2	288	300	325	BLACK
	BB48HC-1-GS-S									306	2	288	300	325	STAINLESS
	BB48HC-1-GS-B-27	2/4	115	1/4	2.5	12.4	48	23.63	36	292	2	288	300	325	BLACK
	BB48HC-1-GS-S-27									306	2	288	300	325	STAINLESS
59"	BB58HC-1-GS-B	2/4	115	1/4	2.5	21.86	59	28.25	37.25	354	2	528	440	365	BLACK
	BB58HC-1-GS-S														STAINLESS FRONT
72"	BB72HC-1-GS-B	3/6	115	1/3	3.1	19.92	72	23.63	34	381	3	540	480	505	BLACK
	BB72HC-1-GS-S														STAINLESS
	BB72HC-1-GS-B-27	3/6	115	1/3	3.1	19.92	72	23.63	36	381	3	540	480	505	BLACK
	BB72HC-1-GS-S-27														STAINLESS

Depth measurement includes handles.
BB24 height measurement includes mounting height.

BACK BAR COOLERS

Pass-thru

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-PT-B	4/4	115	1/3	3.1	13.6	48	27.38	34	306	2	288	300	325	BLACK
	BB48HC-1-PT-S														STAINLESS
	BB48HC-1-PT-B-27	4/4	115	1/3	3.1	13.6	48	27.38	36	306	2	288	300	325	BLACK
72"	BB72HC-1-PT-B	6/6	115	1/3	3.1	22.1	72	27.38	34	381	3	540	480	505	BLACK
	BB72HC-1-PT-S														STAINLESS
	BB72HC-1-PT-B-27	6/6	115	1/3	3.1	22.1	72	27.38	36	359	3	540	480	505	BLACK
	BB72HC-1-PT-S-27														STAINLESS

Depth measurement includes handles.



GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-G-PT-B	4/4	115	1/3	3.1	13.6	48	27.38	34	316	2	288	300	325	BLACK
	BB48HC-1-G-PT-S														STAINLESS
	BB48HC-1-G-PT-B-27	4/4	115	1/3	3.1	13.6	48	27.38	36	334	2	288	300	325	BLACK
	BB48HC-1-G-PT-S-27														STAINLESS
72"	BB72HC-1-G-PT-B	6/6	115	1/3	3.1	22.1	72	27.38	34	425	3	540	480	505	BLACK
	BB72HC-1-G-PT-S														STAINLESS
	BB72HC-1-G-PT-B-27	6/6	115	1/3	3.1	22.1	72	27.38	36	425	3	540	480	505	BLACK
	BB72HC-1-G-PT-S-27														STAINLESS

GLASS DOORS (SLIDING) (Door frame only comes in black)

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-GS-PT-B	4/4	115	1/3	3.1	13.6	48	25.75	34	316	2	288	300	325	BLACK
	BB48HC-1-GS-PT-S														STAINLESS
	BB48HC-1-GS-PT-B-27	4/4	115	1/3	3.1	13.6	48	25.75	36	316	2	288	300	325	BLACK
	BB48HC-1-GS-PT-S-27														STAINLESS
72"	BB72HC-1-GS-PT-B	6/6	115	1/3	3.1	22.1	72	23.75	34	408	3	540	480	505	BLACK
	BB72HC-1-GS-PT-S														STAINLESS
	BB72HC-1-GS-PT-B-27	6/6	115	1/3	3.1	22.1	72	23.75	36	448	3	540	480	505	BLACK
	BB72HC-1-GS-PT-S-27														STAINLESS

Depth measurement includes handles.

AVAILABLE OPTIONS

SUFFIX	OPTION
27	2" Stainless steel top
R	Remote models available

Append suffix to model # when placing order. Ex: BB36HC-1-S-27

BACK BAR COOLERS

Food Rated

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
24"	BB24HC-1-F-B	1/2	115	1/6	2	7.66	24	30.13	37.75	200	1	180	140	110	BLACK
	BB24HC-1-F-S														STAINLESS FRONT
36"	BB36HC-1-F-B	1/2	115	1/4	2.5	8.31	36	24.5	34	232	1	240	220	170	BLACK
	BB36HC-1-F-S														STAINLESS
	BB36HC-1-F-B-27	1/2	115	1/4	2.5	8.31	36	24.5	36	243	1	240	220	170	BLACK
	BB36HC-1-F-S-27														STAINLESS
48"	BB48HC-1-F-B	2/4	115	1/4	2.5	12.4	48	24.5	34	284	2	288	300	325	BLACK
	BB48HC-1-F-S														STAINLESS
	BB48HC-1-F-B-27	2/4	115	1/4	2.5	12.4	48	24.5	36	320	2	288	300	325	BLACK
	BB48HC-1-F-S-27														STAINLESS
59"	BB58HC-1-F-B	2/4	115	1/4	2.5	21.86	59	29.13	37.25	354	2	528	440	365	BLACK
	BB58HC-1-F-S														STAINLESS FRONT
69"	BB68HC-1-F-B	2/4	115	1/3	5.3	25.93	69	29.13	37.25	410	3	672	550	435	BLACK
	BB68HC-1-F-S														STAINLESS FRONT
72"	BB72HC-1-F-B	3/6	115	1/3	3.1	19.92	72	24.50	34	325	3	540	480	505	BLACK
	BB72HC-1-F-S														STAINLESS
	BB72HC-1-F-B-27	3/6	115	1/3	3.1	19.92	72	24.50	36	325	3	540	480	505	BLACK
	BB72HC-1-F-S-27														STAINLESS
79"	BB78HC-1-F-B	3/6	115	1/3	5.5	33.59	79	29.13	37.25	375	4	740	630	560	BLACK
	BB78HC-1-F-S														STAINLESS FRONT
95"	BB94HC-1-F-B	3/6	115	1/3	5.5	37.82	95	29.13	37.25	510	5	920	785	675	BLACK
	BB94HC-1-F-S														STAINLESS FRONT

Depth measurement includes handles.
BB24 height measurement includes mounting height.

AVAILABLE OPTIONS

SUFFIX	OPTION
27	2" Stainless steel top
R	Remote models available
Append suffix to model # when placing order. Ex: BB36HC-1-S-27	

GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
24"	BB24HC-1-FG-B	1/2	115	1/6	2	7.66	24	30.13	37.75	200	1	180	140	110	BLACK
	BB24HC-1-FG-S														STAINLESS FRONT
36"	BB36HC-1-FG-B	1/2	115	1/4	2.5	8.36	36	24.50	34	250	1	240	220	170	BLACK
	BB36HC-1-FG-S														STAINLESS
	BB36HC-1-FG-B-27	1/2	115	1/4	2.5	8.36	36	24.50	36	250	1	240	220	170	BLACK
	BB36HC-1-FG-S-27														STAINLESS
48"	BB48HC-1-FG-B	2/4	115	1/4	2.5	12.4	48	24.50	34	320	2	288	300	325	BLACK
	BB48HC-1-FG-S														STAINLESS
	BB48HC-1-FG-B-27	2/4	115	1/4	2.5	12.4	48	24.50	36	320	2	288	300	325	BLACK
	BB48HC-1-FG-S-27														STAINLESS
59"	BB58HC-1-FG-B	2/4	115	1/4	2.5	21.86	59	29.13	37.25	354	2	528	440	365	BLACK
	BB58HC-1-FG-S														STAINLESS FRONT
69"	BB68HC-1-FG-B	2/4	115	1/3	5.3	25.93	69	29.13	37.25	401	3	672	550	435	BLACK
72"	BB72HC-1-FG-B	3/6	115	1/3	3.1	19.92	72	24.50	34	325	3	540	480	505	BLACK
	BB72HC-1-FG-S														STAINLESS
	BB72HC-1-FG-B-27	3/6	115	1/3	3.1	19.92	72	24.50	36	410	3	540	480	505	BLACK
	BB72HC-1-FG-S-27														STAINLESS
79"	BB78HC-1-FG-B	3/6	115	1/3	5.5	33.59	79	29.13	37.25	476	4	740	630	560	BLACK
	BB78HC-1-FG-S														STAINLESS FRONT
95"	BB94HC-1-FG-B	3/6	115	1/3	5.5	37.82	95	29.13	37.25	544	5	920	785	675	BLACK
	BB94HC-1-FG-S														STAINLESS FRONT

GLASS DOORS (SLIDING) (Door frame only comes in black)

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-F-GS-B	2/4	115	1/4	2.5	12.4	48	23.63	34	284	2	288	300	325	BLACK
	BB48HC-1-F-GS-S														STAINLESS
	BB48HC-1-F-GS-B-27	2/4	115	1/4	2.5	12.4	48	23.63	36	300	2	288	300	325	BLACK
	BB48HC-1-F-GS-S-27														STAINLESS
59"	BB58HC-1-F-GS-B	2/4	115	1/4	2.5	21.86	59	28.25	37.25	352	2	528	440	365	BLACK
72"	BB72HC-1-F-GS-B	3/6	115	1/3	3.1	19.92	72	23.63	34	392	3	540	480	505	BLACK
	BB72HC-1-F-GS-S														STAINLESS
	BB72HC-1-F-GS-B-27	3/6	115	1/3	3.1	19.92	72	23.63	36	392	3	540	480	505	BLACK
	BB72HC-1-F-GS-S-27														STAINLESS

Depth measurement includes handles.
BB24 height measurement includes mounting height.

BACK BAR COOLERS

Food Rated Pass-thru

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-F-PT-B	4/4	115	1/3	3.1	13.6	48	27.38	34	302	2	288	300	325	BLACK
	BB48HC-1-F-PT-S														STAINLESS
	BB48HC-1-F-PT-B-27	4/4	115	1/3	3.1	13.6	48	27.38	36	302	2	288	300	325	BLACK
	BB48HC-1-F-PT-S-27														STAINLESS
72"	BB72HC-1-F-PT-B	6/6	115	1/3	3.1	22.1	72	27.38	34	375	3	540	480	505	BLACK
	BB72HC-1-F-PT-S														STAINLESS
	BB72HC-1-F-PT-B-27	6/6	115	1/3	3.1	22.1	72	27.38	36	375	3	540	480	505	BLACK
	BB72HC-1-F-PT-S-27														STAINLESS

Depth measurement includes handles.

AVAILABLE OPTIONS

SUFFIX	OPTION
27	2" Stainless steel top
R	Remote models available
Append suffix to model # when placing order. Ex: BB36HC-1-S-27	

GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-FG-PT-B	4/4	115	1/3	3.1	13.6	48	27.38	34	320	2	288	300	325	BLACK
	BB48HC-1-FG-PT-S														STAINLESS
	BB48HC-1-FG-PT-B-27	4/4	115	1/3	3.1	13.6	48	27.38	36	302	2	288	300	325	BLACK
	BB48HC-1-FG-PT-S-27														STAINLESS
72"	BB72HC-1-F-G-PT-B	6/6	115	1/3	3.1	22.1	72	27.38	34	456	3	540	480	505	BLACK
	BB72HC-1-F-G-PT-S														STAINLESS
	BB72HC-1-F-G-PT-B-27	6/6	115	1/3	3.1	22.1	72	27.38	36	456	3	540	480	505	BLACK
	BB72HC-1-F-G-PT-S-27														STAINLESS

GLASS DOORS (SLIDING) (Door frame only comes in black)

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-GS-F-PT-B	4/4	115	1/3	3.1	13.6	48	25.75	34	316	2	288	300	325	BLACK
	BB48HC-1-GS-F-PT-S														STAINLESS
	BB48HC-1-GS-F-PT-B-27	4/4	115	1/3	3.1	13.6	48	25.75	36	316	2	288	300	325	BLACK
	BB48HC-1-GS-F-PT-S-27														STAINLESS
72"	BB72HC-1-GS-F-PT-B	6/6	115	1/3	3.1	22.1	72	23.75	34	366	3	540	480	505	BLACK
	BB72HC-1-GS-F-PT-S														STAINLESS
	BB72HC-1-GS-F-PT-B-27	6/6	115	1/3	3.1	22.1	72	23.75	36	366	3	540	480	505	BLACK
	BB72HC-1-GS-F-PT-S-27														STAINLESS

Depth measurement includes handles.

BOTTLE COOLERS

Galvanized steel interior and floor

Full electronic temperature control

100% Metal lids
toughest in the industry
to prevent bowing of lids

Stainless steel top

Easy-glide metal lids and raised edge

Bottle opener and cap catcher standard

Adjustable wire dividers



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**
MADE IN USA



ADJUSTABLE DIVIDERS
to organize cooler to meet your
specific needs



100% METAL LIDS
toughest in the industry to prevent
bowing of lids

ACCESS OPTIONS

- Metal lids

AGENCY CERTIFICATIONS



FROSTY BREW™ 30-32°

MAINTAINS PRODUCT TEMPERATURES OF 30-32°F.

MODEL WIDTH	MODEL #	LIDS/ DIVIDERS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	FINISH
50"	DW49HC-B-29	2/3	115	1/4	2.5	13.7	50	26.5	33.75	272	BLACK
	DW49HC-S-29									274	STAINLESS FRONT
65"	DW64HC-B-29	2/4	115	1/4	2.5	18.5	65	26.5	33.75	322	BLACK
	DW64HC-S-29									332	STAINLESS FRONT
80"	DW79HC-B-29	3/5	115	1/4	2.5	24.1	80	26.5	33.75	390	BLACK
	DW79HC-S-29									432	STAINLESS FRONT
95"	DW94HC-B-29	4/6	115	1/4	2.5	28.63	95	26.5	33.75	450	BLACK
	DW94HC-S-29									456	STAINLESS FRONT

STANDARD 36-40°

MAINTAINS PRODUCT TEMPERATURES OF 36-40°F.

MODEL WIDTH	MODEL #	LIDS/ DIVIDERS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	FINISH
35"	SF34HC-B	1/2	115	1/10	1.2	7.5	34.88	26.5	33.63	210	BLACK
	SF34HC-SS									228	STAINLESS FRONT
50"	DW49HC-B	2/3	115	1/4	2.5	13.7	50	26.5	33.75	272	BLACK
	DW49HC-S									274	STAINLESS FRONT
65"	DW64HC-B	2/4	115	1/4	2.5	18.5	65	26.5	33.75	322	BLACK
	DW64HC-S									332	STAINLESS FRONT
80"	DW79HC-B	3/5	115	1/4	2.5	24.1	80	26.5	33.75	390	BLACK
	DW79HC-S									432	STAINLESS FRONT
95"	DW94HC-B	4/6	115	1/4	2.5	28.63	95	26.5	33.75	450	BLACK
	DW94HC-S									456	STAINLESS FRONT

Depth measurement includes handles.
Height measurement includes mounting height.

EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized steel
- Stainless steel

AVAILABLE ACCESSORIES

- Frosty brew model (30-32° F)
- Extra wide dividers
- Locks

MOUNTING OPTIONS

- 3" casters
- 6" legs

AVAILABLE OPTIONS

- Remote models available



GLASS & PLATE CHILLERS

Front or top loading

Interior thermometer

Self-closing door with 120° stay-open feature
(Front Loading Models)

Field-reversible door
(Front Loading Models)

Easy door removal
for service and cleaning (Top Loading)

Magnetic gasket attached to each door
for positive seal

Auto-defrost

Built-in Condensate Evaporator System

Operating Temperature -10F

Two Epoxy Coated Shelves

R290 Refrigerant



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY**
MADE IN USA



ADJUSTABLE DIVIDERS
to organize cooler to meet your
specific needs



100% METAL LIDS
toughest in the industry to prevent
bowing of lids

ACCESS OPTIONS

- Doors
- Metal lids

AGENCY CERTIFICATIONS



FRONT LOADING

CHILLS TO -10°F, PRODUCING FROST WHEN REMOVED

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY		FINISH
											12oz MUGS	8" PLATES	
24"	FLG24HC-1-B	1/2	115	1/4	2.5	5.06	24	30.13	32	208	80	100	BLACK
	FLG24HC-1-S												STAINLESS

Front breathing

needs no installation clearances on the side, back or bottom

Depth measurement includes handles.

TOP LOADING

CHILLS TO -10°F, PRODUCING FROST WHEN REMOVED

MODEL WIDTH	MODEL #	LIDS/ DIVIDERS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY		FINISH
											12oz MUGS	8" PLATES	
24"	GF24HC-B	1/2	115	1/2	3.5	4	24	26.13	33.63	186	76	100	BLACK
	GF24HC-S												STAINLESS
34"	GF34HC-B	1/2	115	1/2	3.5	6.4	34	26.13	33.63	223	94	150	BLACK
	GF34HC-S												STAINLESS
48"	GF48HC-B	2/4	115	1/2	3.5	9.65	48	26.13	33.63	292	164	250	BLACK
	GF48HC-S												STAINLESS

Depth measurement includes handles.



EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized steel with reinforced stainless steel floor
- Stainless steel

AVAILABLE ACCESSORIES

- Locks factory installed available for GF24L & GF34L

AVAILABLE OPTIONS

- Remote models available

MOUNTING OPTIONS

- 3" casters (GF models only)
- 6" legs (GF models only)

Bar & Wine Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	DD48	403-322D
Epoxy Coated Wire Shelf	DD50/50C Shelf Kit (set of 2)	00C21-022A
Epoxy Coated Wire Shelf	DD58 Shelf Kit (set of 2)	00C21-007A
Epoxy Coated Wire Shelf	DD68 Shelf Kit (set of 2)	00C21-006A
Epoxy Coated Wire Shelf	DD72	403-326D
Epoxy Coated Wire Shelf	DD78 Shelf Kit (set of 3)	00C21-023A
Epoxy Coated Wire Shelf	DD94 Left/Right Shelf	403-216D
Epoxy Coated Wire Shelf	DD94 Center Shelf	403-249D
Epoxy Coated Wire Shelf	BB24	403-943D-02
Epoxy Coated Wire Shelf	BB36	403-924D-02
Epoxy Coated Wire Shelf	BB48/48G	403-322D
Epoxy Coated Wire Shelf	BB58/58G	403-582D
Epoxy Coated Wire Shelf	BB68/68G	403-216D (RH) 403-249D (LH)
Epoxy Coated Wire Shelf	BB72/72G	403-326D
Epoxy Coated Wire Shelf	BB78/78G CTR	403-582D
Epoxy Coated Wire Shelf	BB78/78G RH	403-584D
Epoxy Coated Wire Shelf	BB94/94G CTR	403-216D
Epoxy Coated Wire Shelf	BB94/94G RH	403-249D
Epoxy Coated Wire Shelf	DP46/67/93/119, DPD46/67/93/119	403-834D
Shelf Clip	DD48/72/94	403-168A
Shelf Clip	All BB's	403-168A

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
6" Caster	BB24/BB36	00C31-038A
6" Caster	BB48, BB72 (set of four)	00C31-038A
3" Caster	BB48, BB72 (set of four)	00C31-041A
3" Caster	BB58, BB68 (set of four)	00C26-012A
3" Caster	BB78, BB94 (set of six)	00C26-017A
3" Caster	DD36	00C31-041A
6" Caster	DD36	00C31-038A
6" Caster	DD48, DD72 (set of four)	00C31-038A
3" Caster	DD48, DD72 (set of four)	00C31-041A
3" Caster	DD50, DD58, DD68 (set of four)	00C26-012A
3" Caster	DD78, DD94 (set of six)	00C26-017A
3" Caster	DW49 (set of four)	00C31-034ABB
3" Caster	DW64 (set of four)	00C31-031ABB
3" Caster	DW79, DW94 (set of six)	00C31-030ABB
3" Plate Casters	SF34 (set of four)	00C28S092AAA
3" Caster	GF24, 34, 48 (set of four)	00C28S110A--
6" Adjustable with Plate	DW49 (set of four)	00C31-036A--
6" Adjustable with Plate	DW64 (set of four)	00C31-033ABB
6" Adjustable with Plate	DW79, 94 (set of six)	00C31-032ABB
6" Adjustable with Plate	SF34 (set of four)	00C31-035AAA
Leg Accessory Kit	BM23 (set of four)	00C06-002A--
6" Adjustable with Plate	GF24, 34, 48 (set of four)	00C31-035AAA
6" Black Leg	BB/DD 24, 36, 48, 72 (set of four)	58B02S001A
6" Adjustable with Plate	BB58, 68, DD50, 58, 68 (set of four)	00C26S014A
6" Adjustable with Plate	BB/DD 78, 94 (set of six)	00C26S015A
LID LOCKS		
Lid Lock	GF24/34	00C30-100A
Lid Lock	GF48	00C30-101A
Lid Lock	SF34	00C30-031ABB
Lid Lock	DW49 Solid Lid	00C30-030AAA
Lid Lock	DW64 Solid Lid	00C30-029AAA
Lid Lock	DW79 Solid Lid	00C30-028AAA
Lid Lock (2 required for DW94)	DW94 Solid Lid	00C30-030AAA

Bar & Wine Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
TAPS / FAUCETS / MANIFOLDS		
Hole cover for cut out on DD units	ALL DD UNITS	00C10-006A
1 Tap 3" OD Beer Faucet	ALL DD UNITS	406-053A
1 Tap 2 1/2" OD Beer/Wine Faucet	ALL DD UNITS	406-004A
2 Tap 3" OD Beer/Wine Faucet	ALL DD UNITS	406-054A
3 Tap 3" OD Beer/Wine Faucet	ALL DD UNITS	406-055A
4 Tap 3" OD Beer/Wine Faucet	ALL DD UNITS	406-064A
5 Tap 3" OD Beer/Wine Faucet	ALL DD UNITS	406-075A
Single Faucet Adapter	ALL DD UNITS	406-056A
Double Faucet Adapter	ALL DD UNITS	406-057A
2 Way Manifold	ALL DD UNITS	402-188A
3 Way Manifold	ALL DD UNITS	402-189A
4 Way Manifold	ALL DD UNITS	402-191A
ADDITIONAL ACCESSORIES		
Wire Divider (Step)	DW UNITS	403-114D
Wire Divider (Adjustable)	DW UNITS	403-113D
Wire Divider Spring	DW UNITS	401-090AAB
Cap Catcher (black)	DW & SF UNITS	09B30S025C
Draft Arm Faucet Lock (slide on)	ALL DD UNITS	401-909A
Glass Rinser	ALL DD UNITS	406-067A





Super Bright RGB LED Liquor Shelves

- 50,000 hours minimum life
- Environmentally friendly: no mercury, lead or toxic gases
- Color-rich, programmable LED's
- Available up to 8' Long
- 44 Key RGB Wireless Remote Control to control unlimited colors with multiple lighting effects
- Independent level control: choose colors for each step independent of the others
- Plugs into any standard wall outlet
- Modular Construction
- Includes UL listed power supply
- 100% Black Acrylic bottle tiers. Glossy black on front and sides with frosted acrylic tops.

DESCRIPTION	PART NUMBER
2' LED Liquor Shelf, 24"L X 4.5"W X .75" Thick, 2 wall brackets	LS2-24L
3' LED Liquor Shelf, 36"L X 4.5"W X .75" Thick, 2 wall brackets	LS3-36L
4' LED Liquor Shelf, 48"L X 4.5"W X .75" Thick, 3 wall brackets	LS4-48L
5' LED Liquor Shelf, 60"L X 4.5"W X .75" Thick, 4 wall brackets	LS5-60L
6' LED Liquor Shelf, 72"L X 4.5"W X .75" Thick, 5 wall brackets	LS6-72L
2' Double Wide LED Liquor Shelf, 24"L X 9"W X .75 Thick, 2 wall brackets	LS2-24L-DW
3' Double Wide LED Liquor Shelf, 36"L X 9"W X .75 Thick, 2 wall brackets	LS3-36L-DW
4' Double Wide LED Liquor Shelf, 48"L X 9"W X .75 Thick, 3 wall brackets	LS4-48L-DW
5' Double Wide LED Liquor Shelf, 60"L X 9"W X .75 Thick, 4 wall brackets	LS5-60L-DW
6' Double Wide LED Liquor Shelf, 72"L X 9"W X .75 Thick, 5 wall brackets	LS6-72L-DW
2' Two Tier LED Bottle Display, 24"L X 9"D X 8"H	LBD2-24L
3' Two Tier LED Bottle Display, 36"L X 9"W X 8"H	LBD2-36L
4' Two Tier LED Bottle Display, 48"L X 9"W X 8"H	LBD2-48L
5' Two Tier LED Bottle Display, 60"L X 9"W X 8"H	LBD2-60L
6' Two Tier LED Bottle Display, 72"L X 9"W X 8"H	LBD2-72L
2' Three Tier LED Bottle Display, 24"L X 13.5"D X 12"H	LBD3-24L
3' Three Tier LED Bottle Display, 36"L X 13.5"D X 12"H	LBD3-36L
4' Three Tier LED Bottle Display, 48"L X 13.5"D X 12"H	LBD3-48L
5' Three Tier LED Bottle Display, 60"L X 13.5"D X 12"H	LBD3-60L
6' Three Tier LED Bottle Display, 72"L X 13.5"D X 12"H	LBD3-72L
2' Four Tier LED Bottle Display, 24"L X 18"W X 16"H	LBD4-24L
3' Four Tier LED Bottle Display, 36"L X 18"W X 16"H	LBD4-36L
4' Four Tier LED Bottle Display, 48"L X 18"W X 16"H	LBD4-48L
5' Four Tier LED Bottle Display, 60"L X 18"W X 16"H	LBD4-60L
6' Four Tier LED Bottle Display, 72"L X 18"W X 16"H	LBD4-72L







MILK COOLERS

MADE TO DELIVER CONSISTENT PERFORMANCE DURING REPEATED ACCESS

MILK COOLERS

CFC & HCFC-free insulation is foamed-in-place
for increased structural strength & energy efficiency

Epoxy coated, steel wire racks included
for added floor protection

Flexible compression door gaskets
ensure a tight seal for added temperature control

Cylinder Locks

Bottom drain for connection to drain hose and easy cleaning

External digital thermometer

Coolers hold milk between 36°-38°F
until ready to serve for maximum refreshment



ONE-PIECE BOTTOM FOR MAXIMUM SUPPORT

3 YEAR PARTS & LABOR WARRANTY WITH AN ADDITIONAL 4 YEAR COMPRESSOR WARRANTY

MADE IN USA



ONE-PIECE REINFORCED FLOOR
for maximum milk crate support and made with stainless steel



SINGLE AND DUAL ACCESS
models available

ACCESS OPTIONS

- Metal lids

AGENCY CERTIFICATIONS



COLD WALL - SINGLE ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY 13 X 13 X 11"	CASE CAPACITY 19 X 13 X 11"	EXTERIOR FINISH	INTERIOR FINISH
34"	SM34HC-S	115	1/3	2.2	12.73	34	30.63	41.13	271	8	4	STAINLESS	STAINLESS
	SM34HC-W								277	8	4	WHITE	WHITE
	SM34HC-W-02								237	8	4	WHITE	STAINLESS
49"	SM49HC-S	115	1/3	2.2	20.32	49	30.63	41.13	338	12	8	STAINLESS	STAINLESS
	SM49HC-W								339	12	8	WHITE	WHITE
	SM49HC-W-02								340	12	8	WHITE	STAINLESS
58"	SM58HC-S	115	1/3	2.2	22.63	58	30.63	41.13	384	16	10	STAINLESS	STAINLESS
	SM58HC-W								376	16	10	WHITE	WHITE
	SM58HC-W-02								376	16	10	WHITE	STAINLESS

Depth measurement includes handles. Height measurement includes mounting height.

FORCED AIR - SINGLE ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY 13 X 13 X 11"	CASE CAPACITY 19 X 13 X 11"	EXTERIOR FINISH	INTERIOR FINISH
34"	SMF34HC-1-S	115	1/4	3	13.59	34	33.63	46.88	335	8	4	STAINLESS	STAINLESS
	SMF34HC-1-W								335	8	4	WHITE	WHITE
	SMF34HC-1-W-02								335	8	4	WHITE	STAINLESS
49"	SMF49HC-1-S	115	1/4	4	19.66	49	33.63	46.88	437	12	8	STAINLESS	STAINLESS
	SMF49HC-1-W								437	12	8	WHITE	WHITE
	SMF49HC-1-W-02								437	12	8	WHITE	STAINLESS
58"	SMF58HC-1-S	115	1/3	3.3	24	58	33.63	46.88	458	16	10	STAINLESS	STAINLESS
	SMF58HC-1-W								458	16	10	WHITE	WHITE
	SMF58HC-1-W-02								458	16	10	WHITE	STAINLESS

Depth measurement includes handles. Height measurement includes mounting height.

EXTERIOR FINISHES

- White coated steel
- Stainless steel

INTERIOR FINISHES

- Galvanized steel
- Stainless Steel

AVAILABLE ACCESSORIES

- Cow Spot graphics
- Custom graphics available
- Corner & Wrap-around bumpers

MOUNTING OPTIONS

- 4" casters (SM models only)
- 6" casters (SMF models only)



MILK COOLERS

COLD WALL - DUAL ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY 13 X 13 X 11"	CASE CAPACITY 19 X 13 X 11"	EXTERIOR FINISH	INTERIOR FINISH
34"	ST34HC-S	115	1/2	3.7	12.37	34	31.25	41.13	270	8	4	STAINLESS	STAINLESS
	ST34HC-W								270	8	4	WHITE	WHITE
	ST34HC-W-02								270	8	4	WHITE	STAINLESS
49"	ST49HC-S	115	1/2	3.7	18.97	49	31.25	41.13	336	12	8	STAINLESS	STAINLESS
	ST49HC-W								336	12	8	WHITE	WHITE
	ST49HC-W-02								336	12	8	WHITE	STAINLESS
58"	ST58HC-S	115	1/2	3.7	22.5	58	31.25	41.13	372	16	10	STAINLESS	STAINLESS
	ST58HC-W								372	16	10	WHITE	WHITE
	ST58HC-W-02								372	16	10	WHITE	STAINLESS

Depth measurement includes handles.
Height measurement includes mounting height.

FORCED AIR - DUAL ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY 13 X 13 X 11"	CASE CAPACITY 19 X 13 X 11"	EXTERIOR FINISH	INTERIOR FINISH
49"	STF49HC-1-S	115	1/3	3.5	20.55	49	34	47.75	400	12	8	STAINLESS	STAINLESS
	STF49HC-1-W								417	12	8	WHITE	WHITE
	STF49HC-1-W-02								417	12	8	WHITE	STAINLESS
58"	STF58HC-1-S	115	1/3	4	24.3	58	34	47.75	498	16	10	STAINLESS	STAINLESS
	STF58HC-1-W								498	16	10	WHITE	WHITE
	STF58HC-1-W-02								498	16	10	WHITE	STAINLESS

Depth measurement includes handles.
Height measurement includes mounting height.

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
4" Plate Caster (standard)	SM/ST 34,49,58 (per caster-2 required per cabinet)	401-094A
4" Plate Caster w/brake (standard)	SM/ST 34,49,58 (per caster-2 required per cabinet)	401-099A
7" Plate Caster (standard)	SMF34,SMF49,SMF58 (per caster-2 required per cabinet)	401-519A
7" Plate Caster w/brake (standard)	SMF34,SMF49,SMF58 (per caster-2 required per cabinet)	401-520A
5" Plate Caster w/brake (standard)	STF49/STF58 (per caster-2 required per cabinet)	401-127A
5" Plate Caster (standard)	STF49/STF58 (per caster-2 required per cabinet)	401-209A
6" Adjustable with Plate	SM34,49,58 ST34,49,58 (set of four)	00C06-003A

BUMPERS <i>(Require field tapping and installation)</i>		
Wrap Around Bumpers	SM/ST34	00C01-004A
Wrap Around Bumpers	SM/ST49	00C01-005A
Wrap Around Bumpers	SM/ST58	00C01-006A
Wrap Around Bumpers	SMF34	00C01-009A
Wrap Around Bumpers	SMF49	00C01-010A
Wrap Around Bumpers	SMF58	00C01-011A
Corner Bumpers (single)	All Milk Coolers	703-868A
Corner Bumpers (Set of 4)	Corner Bumper Kit (set of 4)	00C01-012A-01

DECALS		
Base Kit (Cow Spots)	SM34, ST34, SMF34	807-836C
1 Base Kit (Cow Spots)	SM49, ST49, SMF49	807-836C
Supplemental Kit (Cow Spots)	SM49, ST49, SMF49	807-837C
1 Base Kit (Cow Spots)	SM58, ST58, SMF58	807-836C
Supplemental Kit (Cow Spots)	SM58, ST58, SMF58 (2 kits required)	807-837C
Got Milk® Lid Decal	SMF/SM/ST34	807-839C-001
Got Milk Lid Decal	SMF/SM/ST49	807-839C-002
Got Milk Lid Decal	SMF/SM/ST58	807-839C-003
Got Milk Lid Decal	STF49	807-839C-004
Got Milk Lid Decal	STF58	807-839C-005
Got Milk Door Decal	SMF/SM/ST34	807-839C-006
Got Milk Door Decal	SMF/SM/ST49	807-839C-007
Got Milk Door Decal	SMF/SM/ST58	807-839C-008

WARRANTY

SALES TERMS

PRICES & SPECIFICATIONS

Beverage-Air reserves the right to change the price and specifications of the equipment and/or material without notice. Prices are F.O.B. plant of manufacture.

CANCELLATION

Buyer may cancel its order, reduce quantities, revise specifications, or extend schedules only by mutual agreement as to reasonable and proper cancellation charges which shall take into account expenses already incurred and commitment made by seller, and buyer shall indemnify seller against any loss.

FREIGHT CLASS

All Beverage-Air products ship under 150 freight classification.

CUSTOMER'S FREIGHT DAMAGE PROCEDURE

Before signing the carrier's freight bill the customer should do the following:

Visible Damage:

1. Inspect shipment for any damage. If you see damage or feel there may be concealed damage, mark the carrier's copy of the freight bill "damaged".
2. If there is damage to your shipment, action must be taken by you to notify Beverage-Air immediately. A freight claim must be filed with the carrier and an inspection scheduled by the carrier. It is the duty of the carrier to give you a written report upon notification. (VISIBLE AND CONCEALED).
3. For visible damage, where possible, do not accept delivery unless the condition noted on your copy of the freight bill and signed by the driver.

Concealed Damage:

If the damage is concealed, notify the carrier within 5 days of the receipt of the product by phone and in writing as well as Beverage Air. Ask them to send their agent to complete an inspection report. Retain all cartons and merchandise for inspection. It is critical that the customer take the above actions; without these steps claims for concealed damages may be denied.

3RD PARTY FREIGHT

3rd Party Freight shipments are FOB Beverage-Air and are not eligible for refusal at time of delivery. ALL 3rd PARTY SHIPMENTS ARE THE RESPONSIBILITY OF THE SHIPPER.

Claims for damaged product are to be filed by the shipper and Beverage-Air will not be liable. This product is not eligible for return to our warehouse facility.

RETURN OF PRODUCT

EQUIPMENT - Prior Authorization must be granted by Beverage-Air before equipment can be returned for credit. Returns will only be authorized within 90 days of invoice date. Return authorizations are valid for 30 days. Equipment approved for return is subject to a 25% restocking charge.

Returned equipment must be shipped freight prepaid, packed in original carton, and received in good condition.

PARTS - Prior Authorization must be granted by Beverage-Air before parts can be returned for credit. Returns will only be authorized within 30 days of invoice date. Return authorizations are valid for 30 days. Parts approved for return are subject to a 25% or \$25.00 restocking charge (whichever is greater). Returned parts must be shipped freight prepaid, in the original packaging, and received in good condition.

WARRANTY (Warranty valid in USA and Canada)

THREE (3) YEAR PARTS AND LABOR WARRANTY:

Beverage-Air Corporation warrants to the original purchaser of Beverage-Air branded equipment, including all parts thereof, that such equipment is free from defects in material and workmanship, under normal use, proper maintenance, and service as indicated by Beverage-Air installation and operation instructions, for a period of three (3) years from the date of installation, or thirty-nine

(39) Months from the date of shipment from the manufacturer, whichever is earlier.

ADDITIONAL FOUR (4) YEAR COMPRESSOR PART WARRANTY*:

In addition to the warranty set forth above, Beverage-Air warrants the hermetically/semi-hermetically sealed compressor (part only) for an additional FOUR (4) years beyond the first three (3) years warranty period; not to exceed eighty-seven (87) months from the date of shipment from Beverage-Air, provided upon receipt of the compressor, manufacturer examination shows the sealed compressor to be defective. This extended warranty does not cover freight for the replacement compressor or freight for the return of the failed compressor.

* Units shipped after 03/01/2020. Previous warranty applies to units shipped prior.

EXCEPTIONS:

- CT96 Models carry a one (1) year parts and labor warranty, limited to fifteen (15) months from date of shipment from Beverage-Air. These are excluded from additional compressor warranty.
- SR/SF (Slate) models carry a two (2) year parts and labor warranty, limited to twenty-seven (27) months from date of shipment from the Beverage-Air.
- Blast Chillers carry a three (3) year parts and labor warranty; additional two (2) years compressor part only.
- Units installed in Residential applications will be not covered under this warranty. Units are intended for Commercial use only.

Also, this extended compressor-part only warranty does NOT apply to any electrical controls, condenser, evaporator, fan motors, overload switch, starting relay, capacitors, temperature control, filter/drier, accumulator, refrigeration tubing, wiring harness, labor charges, or supplies which are covered by the warranty above.

Normal wear type parts, such as light bulbs/lamps and gaskets are not covered by this warranty. For the purpose of this warranty, the original purchaser shall be deemed to mean the individual or company for who the product was originally installed.

Our obligation under this warranty shall be limited to repairing or replacing, including labor, any part of such product, which proves thus defective. Beverage-Air reserves the right to examine any product claimed to be defective.

The labor warranty shall be for self-contained units only and for standard straight time, which is defined as normal service rate time, for service performed during normal working hours. Any service requested outside of a servicer's normal working hours will be covered under this warranty at the normal rate and any additional overtime rate will be at the responsibility of the equipment purchaser.

Any part or accessory determined to be defective in the product should be returned to the company within thirty (30) days under the terms of this warranty and must be accompanied by a record of the cabinet model, serial number, and identified with a return material authorization number (RMA#) issued by the manufacturer.

Special installation/applications, including remote locations, are limited in coverage by this warranty. Any installation that requires extra work, and/or travel, to gain access to the unit for service is the sole responsibility of the equipment purchaser.

Improper operation resulting from factors, including but not limited to, improper or negligent cleaning and maintenance, low voltage conditions, inadequate wiring, outdoor use (unless otherwise specified) and accidental damage are no manufacturing defects and are strictly the responsibility of the purchaser.

With the exception of Blast Chillers product is designed for maintaining temperature and not bringing food to a desired temperature therefore cannot be held responsible for this function under warranty.

Units must be in a conditioned environment or warranty will be void.

Condensing coils must be cleaned at regular intervals. Failure to do so can cause compressor malfunction and will void warranty. Although cleaning requirements vary in accordance with operation of various products, Beverage-Air recommends a minimum monthly cleaning.

NO CLAIMS CAN BE MADE AGAINST THIS WARRANTY FOR SPOILAGE OF FOOD, PRODUCTS, LOSS OF SALES OR CONSEQUENTIAL DAMAGES.

THE FOREGOING WARRANTIES ARE EXPRESSLY GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HERBY DISCLAIMED, ALL OTHER OBLIGATIONS OR LIABILITIES ON OUR PART, AND WE NEITHER ASSUME, NOR AUTHORIZE ANY OTHER PERSON TO ASSUME FOR US, ANY OBLIGATION OR LIABILITY IN CONNECTION WITH THE SALE OF SAID REFRIGERATION UNITS OR ANY PARTS THERE OF.

This warranty shall not be assignable and shall be honored only in so far as the original purchaser. This warranty does not apply outside the limits of the United States of America and Canada, nor does it apply to any part that has been subject to misuse, neglect alteration, accident, or to any damage caused by transportation, flood, fire, acts of terrorism, or acts of God.

LIMITATION OF LIABILITY:

Beverage-Air Corporation or their affiliates shall not be liable for any indirect, incidental, special or consequential damages, or losses of a commercial nature arising out of malfunction equipment or its parts components thereof, as a result of defects in material or workmanship.

THE ORIGINAL OWNER'S SOLE AND EXCLUSIVE REMEDY AND BEVERAGE-AIR'S SOLE AND EXCLUSIVE LIABILITY SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT OF PARTS OR COMPONENTS CONTAINED IN THE EQUIPMENT IDENTIFIED ABOVE WHICH UNDER NORMAL USE AND SERVICE MALFUNCTION AS A RESULT OF DEFECTS IN MATERIAL OR WORKMANSHIP, SUBJECT TO THE APPLICABLE PROVISIONS AND LIMITATIONS STATED ABOVE.

Note: Additional Terms and Conditions of sale may apply. Notice: Specifications Subject to Change without Notice. Contact Beverage-Air for specific model agency approval. All prices are ex-works Brookville, Pennsylvania 03/01/2020

CONTACTS

1 CR Peterson

ph: (800) 257-4040
fax: (508) 238-3647
email: jim@crpeterson.com
territory: Maine, New Hampshire, Vermont, Connecticut, Rhode Island, Massachusetts

2 J Wilson Marketing

ph: (518) 692-8083
fax: (518) 692-8084
email: joe@jwilsonmarketing.com
territory: New York (except Metro/ NYC)

3 TD Marketing

ph: (201) 935-1600
fax: (201) 935-1260
email: fdoyle@tdmarketingco.com
territory: New Jersey (Northern half of NJ), New York (Metro)

4 4 Star Reps

ph: (267) 522-8991
Fax: (267) 502-3277
email: khiggins@4starreps.com
territory: Delaware (entire state), Pennsylvania (east of and including Bradford, Lycoming, Milton, Union, Mifflin, Juniata, Perry, Cumberland, & Adam Counties) New Jersey (south of and including Mercer, Burlington, and Ocean counties)

5 The Schmid-Wilson Group

ph: (410) 998-9191
fax: (410) 998-9195
email: swg@theswg.com
territory: Maryland, District of Columbia, Virginia

6 Phoenix Marketing

ph: 1.(866) 377-8417
fax: (317) 986-4167
email: sammi@phoenix-reps.com
territory: Indiana, Michigan

7 Professional Reps

ph: (877) 995-8922
fax: (602) 864-1754
email: sales@goprorereps.com
territory: Ohio, Kentucky, Western quarter of Pennsylvania, West Virginia

11 Swanson-Girard

ph: (704) 521-8811
fax: (704) 521-8801
email: sgirard@swanson-girard.com
territory: North Carolina, South Carolina

12 Charles Pace & Associates, Inc.

ph: (770) 969-0488
fax: (770) 969-7277
email: pace@pacereps.com
territory: Georgia, Alabama, Tennessee (Central and Eastern), Florida (panhandle)

13 Tepper & Associates, Inc.

ph: (727) 322-1212
fax: (727) 322-1313
email: info@tepperreps.com
territory: Florida (except the panhandle)

14 Marketing Agents South

ph: (601) 956-4661
fax: (601) 956-4726
email: sales@masouth.com
territory: Mississippi, Western Tennessee, Arkansas, Louisiana

15 Ettinger-Rosini/Waypoint

ph: (214) 343-2548
fax: (214) 343-2727
email: julie@ettros.com
territory: Oklahoma, Texas (except El Paso County)

16 Central Marketing Associates, Inc.

ph: (913) 897-2390
fax: (913) 897-2391
email: steve@cmafoodservice.com
territory: Missouri, Kansas, Iowa, Nebraska, Illinois (Southern two thirds of state)

17 Cassidy's Pro Line

ph: (630) 627-7353
fax: (630) 628-3529
email: dennis@cassidysproline.com
territory: Illinois (Northern third of state)

19 The YES Group

ph: (651) 452-9889
fax: (651) 452-3804
email: justin@TheYesGroup.com
territory: Minnesota, North Dakota, South Dakota, Wisconsin

20 Professional Reps

ph: (877) 995-8922
fax: (602) 864-1754
email: sales@goprorereps.com
territory: Arizona, Colorado, New Mexico, Utah, Wyoming, Texas (El Paso County only)

22 Lund-Iorio

ph: (949) 443-4855
fax: (949) 443-4856
email: scott@lund-iorio.com
territory: Nevada (Clark County), California (CA/Mexico border and southern third of state)

24 Walter Zebrowski Associates

ph: (415) 883-3222
fax: (415) 883-9332
email: tom@walterzebrowskiassoc.com
territory: Nevada (entire state except Clark County), California (Northern two thirds of state)

25 Kelly-Mincks

ph: (425) 481-9036
fax: (425) 806-5283
email: jim@kelly-mincks.com
territory: Washington, Oregon, Alaska, Montana, Idaho, Hawaii

26 W.D. Colledge

Services 26a - 26f
ph: (877) 677-4428
fax: (905) 677-5337
email: tmoffatt@wdcolledge.com
territory: Canada

Factory Headquarters Sales Office

3779 Champion Blvd
Winston-Salem, NC 27105
Phone: (336) 245-6400
Fax: (336) 245-6453
Email: sales@bevair.com
Web: www.beverage-air.com

Food Service Manufacturing Facility

Parts RG's:
1082 Route 28
Brookville, PA 15825


Equipment RG's:
1082 Route 28
Brookville, PA 15825

24/7 Warranty Service
(877) 866-1223

Factory Technical Service
Phone: (800) 684-1199
Fax: (800) 262-9381

Factory Customer Service
Phone: (888) 845-9800
Fax: (800) 253-5168

For 24/7 warranty services
please call Warranty Dispatch
at (877) 866-1223 or you can
email dispatch@alirefna.com
M-F 8am-5pm EST.

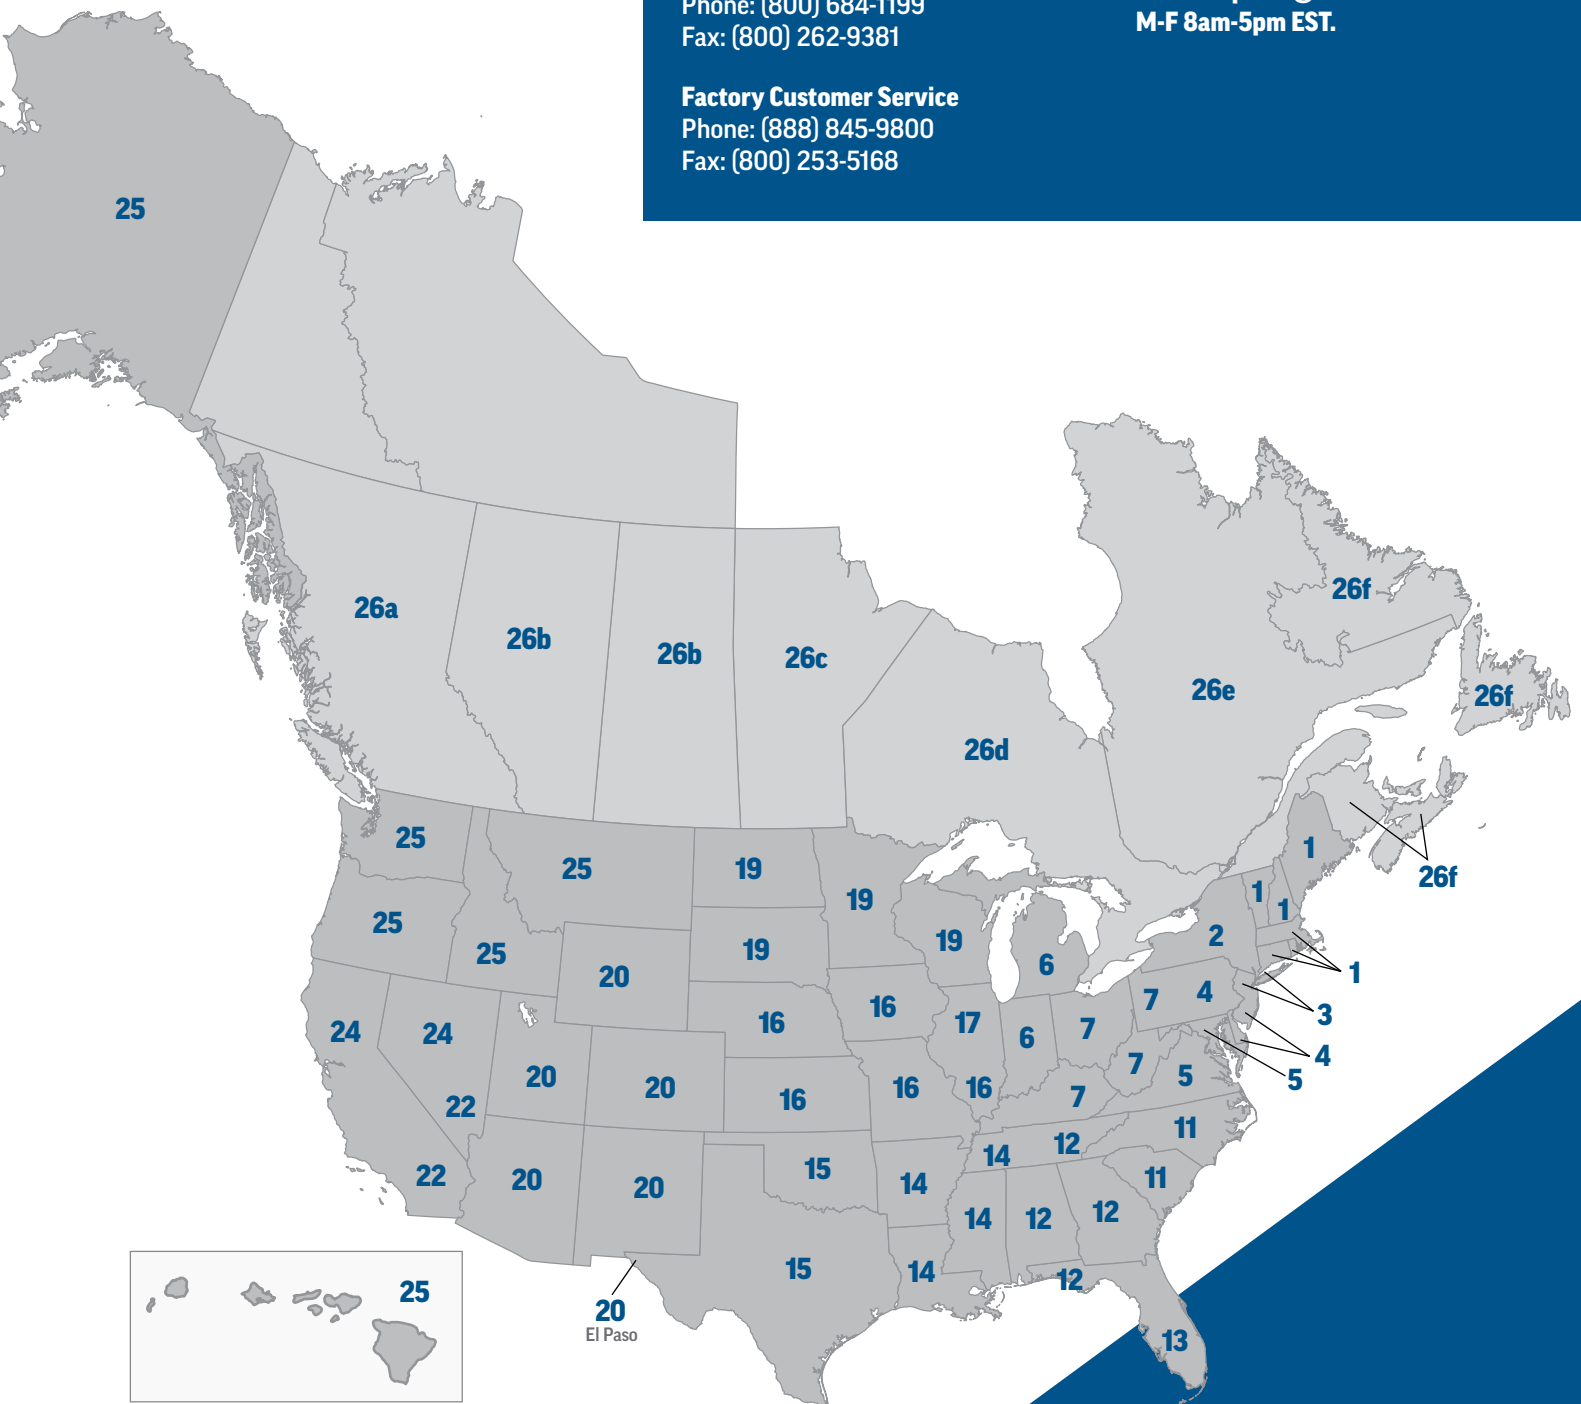



BASES LOADED.

Our chef base units lead the industry in structural integrity with their heavy-duty frames, drawer slides, & reinforced tops.



888-845-9800
beverage-air.com

3779 CHAMPION BLVD.
WINSTON-SALEM, NC 27105
PHONE: (888) 845-9800
FAX: (800) 253-5168
EMAIL: SALES@BEVAIR.COM

@beverageair



MASTER20210421

an Ali Group Company



The Spirit of Excellence