


RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-22N-RWD-056
Reception No. : 2209002852
Applicant : LG Electronics USA
Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, 07632, United States
Manufacturer : LG Electronics Inc.
Address : 222 LG-ro, Jinwi-Myeon, Pyeongtaek -Si, Gyeonggi-Do, 451-713, Korea
Type of Equipment : Car Navigation
FCC ID. : BEJ-MIB3OI01
Model Name : MIB3 OI
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 31 pages (including this page)
Date of Incoming : October 13, 2022
Date of issue : November 21, 2022

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.
 This report is not correlated with the "KS Q ISO/IEC 17025 and KOLAS accreditation" of Korean Laboratory Accreditation Scheme.





Tested by
 Ju-Yun, Park / Manager
 ONETECH Corp.

Reviewed by
 Tae-Ho, Kim / General Manager
 ONETECH Corp.

Approved by
 Ki-Hong, Nam / General Manager
 ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	9
4. EUT MODIFICATIONS.....	9
5. SYSTEM TEST CONFIGURATION	10
5.1 JUSTIFICATION.....	10
5.2 PERIPHERAL EQUIPMENT	10
5.3 MODE OF OPERATION DURING THE TEST	10
5.4 CONFIGURATION OF TEST SYSTEM.....	12
5.5 ANTENNA REQUIREMENT	12
6. PRELIMINARY TEST	12
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	12
6.2 GENERAL RADIATED EMISSIONS TESTS	12
7. MIMIMUM 6 DB BANDWIDTH	13
7.1 OPERATING ENVIRONMENT	13
7.2 TEST SET-UP	13
7.3 TEST DATE	13
7.4 TEST DATA FOR 802.11B WLAN MODE.....	14
7.5 TEST DATA FOR 802.11G WLAN MODE	14
7.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	14
8. MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER	15
8.1 OPERATING ENVIRONMENT	15
8.2 TEST SET-UP	15
8.3 TEST DATE	15

8.4 TEST DATA FOR 802.11B WLAN MODE.....	16
8.5 TEST DATA FOR 802.11G WLAN MODE	16
8.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	16
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	17
9.1 OPERATING ENVIRONMENT	17
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	17
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	17
9.4 TEST DATE	17
9.5 TEST DATA FOR CONDUCTED EMISSION	17
9.6 TEST DATA FOR RADIATED EMISSION.....	18
9.6.1 Radiated Emission which fall in the Restricted Band.....	18
9.6.2 Spurious & Harmonic Radiated Emission.....	21
10. POWER SPECTRAL DENSITY	24
10.1 OPERATING ENVIRONMENT	24
10.2 TEST SET-UP	24
10.3 TEST DATE	24
10.4 TEST DATA FOR 802.11B WLAN MODE.....	25
10.5 TEST DATA FOR 802.11G WLAN MODE	25
10.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	25
11. RADIATED EMISSION TEST	26
11.1 OPERATING ENVIRONMENT	26
11.2 TEST SET-UP	26
11.3 TEST DATE	27
11.4 TEST DATA FOR 30 MHZ ~ 1 000 MHZ	28
11.4.1 Test data for WLAN 2.4 GHz	28
11.4.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz)	29
11.5 Test data for Below 30 MHz.....	30
11.6 TEST DATA FOR ABOVE 1 GHZ	30
12. LIST OF TEST EQUIPMENT	31

※ Please refer to the Annex section for All test plots

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-22N-RWD-056	November 21, 2022	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Electronics USA
 Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, 07632, United States
 Contact Person : Sung Soo, Kim / Director, Regulatory and Environmental Affairs
 Telephone No. : +201-266-2215
 FCC ID : BEJ-MIB3OI01
 Model Name : MIB3 OI
 Brand Name : Volkswagen, Seat
 Serial Number : N/A
 Date : November 21, 2022

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Car Navigation
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not performed because the EUT is operated by only using DC Power.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Electronics USA, Model MIB3 OI (referred to as the EUT in this report) is a Car Navigation. The product specification described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Car Navigation	
OPERATING FREQUENCY	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
	WLAN 5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40))
		5 210 MHz (802.11ac(VHT80))
	WLAN 5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20))
		5 755 MHz ~ 5 795 MHz (802.11n(HT40))
		5 775 MHz (802.11ac(VHT80))
MODULATION TYPE	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation (DBPSK/DQPSK/CCK)
		802.11g/n(HT20): OFDM Modulation (BPSK/QPSK/16QAM/64QAM)
WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	

RF OUTPUT POWER	Bluetooth	1 Mbps	2.16 dBm	
		2 Mbps	0.93 dBm	
		3 Mbps	1.07 dBm	
	WLAN 2.4 GHz	10.49 dBm(802.11b) 10.88 dBm(802.11g) 11.11 dBm(802.11n_HT20)		
	WLAN 5 150 MHz ~ 5 250 MHz Band	Antenna 0	9.39 dBm(802.11a) 8.37 dBm(802.11n_HT20) 8.24 dBm(802.11n_HT40) 8.21 dBm(802.11ac_VHT80)	
		Antenna 1	8.46 dBm(802.11a) 8.45 dBm(802.11n_HT20) 8.29 dBm(802.11n_HT40) 8.24 dBm(802.11ac_VHT80)	
		Multiple Antenna	11.96 dBm(802.11a) 11.42 dBm(802.11n_HT20) 11.28 dBm(802.11n_HT40) 11.24 dBm(802.11ac_VHT80)	
	WLAN 5 725 MHz ~ 5 850 MHz Band	Antenna 0	13.70 dBm(802.11a) 13.72 dBm(802.11n_HT20) 13.86 dBm(802.11n_HT40) 13.98 dBm(802.11ac_VHT80)	
		Antenna 1	12.68 dBm(802.11a) 12.71 dBm(802.11n_HT20) 12.62 dBm(802.11n_HT40) 12.67 dBm(802.11ac_VHT80)	
		Multiple Antenna	16.22 dBm(802.11a) 16.25 dBm(802.11n_HT20) 16.29 dBm(802.11n_HT40) 16.38 dBm(802.11ac_VHT80)	

ANTENNA TYPE	Bluetooth	PCB Antenna		
	WLAN 2.4 GHz	Chip Antenna		
	WLAN 5 GHz	Antenna 0	Chip Antenna	
Antenna 1		PCB Antenna		
ANTENNA GAIN	Bluetooth	1.39 dBi		
	WLAN 2.4 GHz	4.64 dBi		
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	3.19 dBi	
		Antenna 1	4.62 dBi	
		Multiple Antenna	6.97 dBi	
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	2.29 dBi	
		Antenna 1	7.30 dBi	
		Multiple Antenna	8.49 dBi	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		55.466 67 MHz, 40 MHz, 32 MHz, 28.63636 MHz, 25 MHz, 26 MHz, 20 MHz. 19.2 MHz		
RATED SUPPLY VOLTAGE		DC 12.0 V		

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
MIB3 OI	LG Electronics Inc.	Car Navigation (EUT)	-
GP-4303D	LG Precision Co.,Ltd	DC Power Supply	EUT
ProBook 4540s	HP	Notebokk PC	EUT

5.3 Mode of operation during the test

-. Channel List (WLAN 2.4 GHz)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
1	2 412.00	6	2 437.00	11	2 462.00
2	2 417.00	7	2 442.00		
3	2 422.00	8	2 447.00		
4	2 427.00	9	2 452.00		
5	2 432.00	10	2 457.00		

-. Duty Cycle

Band	TEST Mode	Data Rate	On Time (ms)	Total Time (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
WLAN 2.4 GHz	802.11 b	1	8.624	8.635	99.87	0.01
		2	4.408	4.419	99.75	0.01
		5.5	1.725	1.736	99.37	0.03
		11	0.959	0.970	98.87	0.05
	802.11 g	6	1.432	1.449	98.83	0.05
		9	0.960	0.977	98.26	0.08
		12	0.728	0.745	97.72	0.10
		18	0.492	0.509	96.66	0.15
		24	0.376	0.393	95.67	0.19
		36	0.256	0.273	93.77	0.28
		48	0.200	0.217	92.17	0.35
		54	0.180	0.197	91.37	0.39
	802.11 n(HT20)	MCS0	1.340	1.357	98.75	0.05
		MCS1	0.688	0.705	97.59	0.11
		MCS2	0.472	0.489	96.52	0.15
		MCS3	0.364	0.381	95.54	0.20
		MCS4	0.256	0.273	93.77	0.28
		MCS5	0.200	0.217	92.17	0.35
		MCS6	0.184	0.201	91.54	0.38
		MCS7	0.168	0.185	90.81	0.42

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by only using DC Power.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a PCB Antenna and Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by DC Power.	

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MIMIMUM 6 dB BANDWIDTH


7.1 Operating environment

Temperature : 23 °C

Relative humidity : 48 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

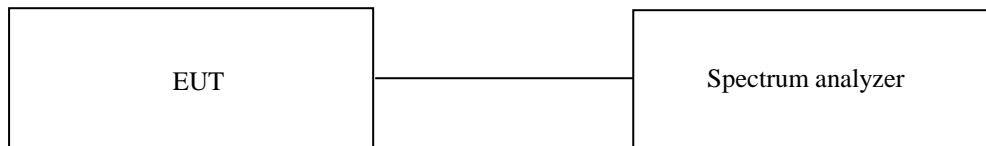

7.3 Test Date

October 17, 2022 ~ October 31, 2022

7.4 Test data for 802.11b WLAN Mode

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	10.09	0.50	9.59
Middle	2 437.00	10.09	0.50	9.59
High	2 462.00	10.09	0.50	9.59

Remark. Margin = Measured Value – Limit

7.5 Test data for 802.11g WLAN Mode

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	16.33	0.50	15.83
Middle	2 437.00	16.28	0.50	15.78
High	2 462.00	16.28	0.50	15.78

Remark. Margin = Measured Value – Limit

7.6 Test data for 802.11n_HT20 WLAN Mode

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	17.28	0.50	16.78
Middle	2 437.00	17.03	0.50	16.53
High	2 462.00	17.23	0.50	16.73

Remark. Margin = Measured Value – Limit

8. MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER

8.1 Operating environment


Temperature : 23 °C

Relative humidity : 48 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to 1 MHz, the video bandwidth is set to 3 times the resolution bandwidth.

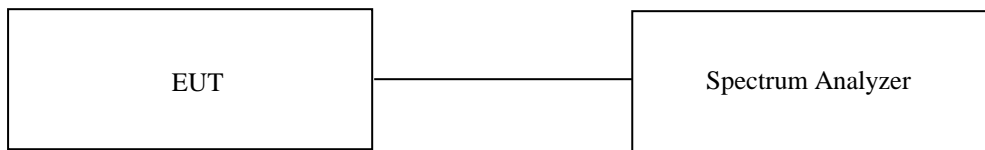

8.3 Test Date

October 17, 2022 ~ October 31, 2022

8.4 Test data for 802.11b WLAN Mode

-. Test Result : Pass

-. Duty Cycle : 99.87 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	Duty Factor(dB)	Total Value(dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	10.15	0.01	10.16	30.00	19.84
MIDDLE	2 437.00	10.20	0.01	10.21	30.00	19.79
HIGH(11)	2 462.00	10.48	0.01	10.49	30.00	19.51

Remark. Margin = Limit – Result (=Measured Value + Duty Factor)

8.5 Test data for 802.11g WLAN Mode

-. Test Result : Pass

-. Duty Cycle : 98.83 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	Duty Factor(dB)	Total Value(dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	10.43	0.05	10.48	30.00	19.52
MIDDLE	2 437.00	10.37	0.05	10.42	30.00	19.58
HIGH(11)	2 462.00	10.83	0.05	10.88	30.00	19.12

Remark. Margin = Limit – Result (=Measured Value + Duty Factor)

8.6 Test data for 802.11n HT20 WLAN Mode

-. Test Result : Pass

-. Duty Cycle : 98.75 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	Duty Factor(dB)	Total Value(dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	10.65	0.05	10.70	30.00	19.30
MIDDLE	2 437.00	10.52	0.05	10.57	30.00	19.43
HIGH(11)	2 462.00	11.06	0.05	11.11	30.00	18.89

Remark. Margin = Limit – Result (=Measured Value + Duty Factor)

9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND


9.1 Operating environment

Temperature : 23 °C

Relative humidity : 48 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz and video bandwidth is set to 300 kHz, and peak detection was used.

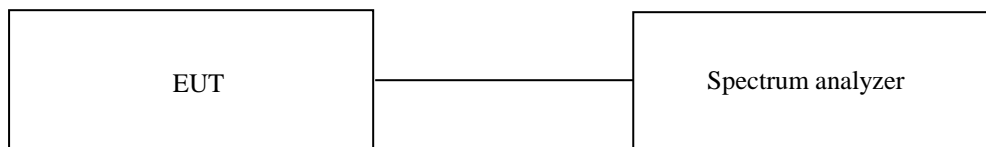

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test Date

October 17, 2022 ~ October 31, 2022

9.5 Test data for conducted emission

Please refer to the Annex

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

9.6.1.1 Test data for 802.11b WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 99.87 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	ATT (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel											
2 390.00	52.91	Peak	H	28.40	7.60	44.94	5.77	-	49.74	74.00	24.26
2 389.84	42.07	Average	H	28.40	7.60	44.94	5.77	0.01	38.91	54.00	15.09
2 390.00	53.00	Peak	V	28.40	7.60	44.94	5.77	-	49.83	74.00	24.17
2 389.74	42.58	Average	V	28.40	7.60	44.94	5.77	0.01	39.42	54.00	14.58
Test Data for High Channel											
2 484.80	53.52	Peak	H	28.83	7.65	44.91	5.77	-	50.86	74.00	23.14
2 483.62	42.38	Average	H	28.83	7.65	44.91	5.77	0.01	39.73	54.00	14.27
2 484.00	53.69	Peak	V	28.83	7.65	44.91	5.77	-	51.03	74.00	22.97
2 484.42	42.35	Average	V	28.83	7.65	44.91	5.77	0.01	39.70	54.00	14.30

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{ATT} + \text{Duty Factor} - \text{AMP Gain}$$

9.6.1.2 Test data for 802.11g WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 98.83 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	ATT (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel											
2 389.74	63.23	Peak	H	28.40	7.60	44.94	5.77	-	60.06	74.00	13.94
2 390.00	47.87	Average	H	28.40	7.60	44.94	5.77	0.05	44.75	54.00	9.25
2 389.94	62.86	Peak	V	28.40	7.60	44.94	5.77	-	59.69	74.00	14.31
2 390.00	45.49	Average	V	28.40	7.60	44.94	5.77	0.05	42.37	54.00	11.63
Test Data for High Channel											
2 484.15	66.88	Peak	H	28.83	7.65	44.91	5.77	-	64.22	74.00	9.78
2 483.62	49.04	Average	H	28.83	7.65	44.91	5.77	0.05	46.43	54.00	7.57
2 484.04	66.47	Peak	V	28.83	7.65	44.91	5.77	-	63.81	74.00	10.19
2 483.54	50.65	Average	V	28.83	7.65	44.91	5.77	0.05	48.04	54.00	5.96

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{ATT} + \text{Duty Factor} - \text{AMP Gain}$$

9.6.1.3 Test data for 802.11n_HT20 WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 98.75 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	ATT (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel											
2 389.94	62.79	Peak	H	28.40	7.60	44.94	5.77	-	59.62	74.00	14.38
2 389.94	47.59	Average	H	28.40	7.60	44.94	5.77	0.05	44.47	54.00	9.53
2 389.33	62.38	Peak	V	28.40	7.60	44.94	5.77	-	59.21	74.00	14.79
2 389.74	46.49	Average	V	28.40	7.60	44.94	5.77	0.05	43.37	54.00	10.63
Test Data for High Channel											
2 483.77	70.01	Peak	H	28.83	7.65	44.91	5.77	-	67.35	74.00	6.65
2 483.58	53.73	Average	H	28.83	7.65	44.91	5.77	0.05	51.12	54.00	2.88
2 483.62	69.82	Peak	V	28.83	7.65	44.91	5.77	-	67.16	74.00	6.84
2 483.51	53.90	Average	V	28.83	7.65	44.91	5.77	0.05	51.29	54.00	2.71

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{ATT} + \text{Duty Factor} - \text{AMP Gain}$$

9.6.2 Spurious & Harmonic Radiated Emission

9.6.2.1 Test data for 802.11b WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 99.87 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 824.000	49.27	Peak	H	33.45	11.81	44.66	-	49.87	74.00	24.13
4 824.000	37.54	Average	H	33.45	11.81	44.66	0.01	38.15	54.00	15.85
4 824.000	49.74	Peak	V	33.45	11.81	44.66	-	50.34	74.00	23.66
4 824.000	37.55	Average	V	33.45	11.81	44.66	0.01	38.16	54.00	15.84
Test Data for Middle Channel										
4 874.000	49.42	Peak	H	33.45	11.93	44.67	-	50.13	74.00	23.87
4 874.000	37.44	Average	H	33.45	11.93	44.67	0.01	38.16	54.00	15.84
4 874.000	49.36	Peak	V	33.45	11.93	44.67	-	50.07	74.00	23.93
4 874.000	37.40	Average	V	33.45	11.93	44.67	0.01	38.12	54.00	15.88
Test Data for High Channel										
4 924.000	49.73	Peak	H	33.55	11.93	44.68	-	50.53	74.00	23.47
4 924.000	37.57	Average	H	33.55	11.93	44.68	0.01	38.38	54.00	15.62
4 924.000	50.14	Peak	V	33.53	11.93	44.68	-	50.92	74.00	23.08
4 924.000	37.55	Average	V	33.55	11.93	44.68	0.01	38.36	54.00	15.64

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Duty Factor} - \text{AMP Factor}$$

9.6.2.2 Test data for 802.11g WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 98.83 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 824.000	49.82	Peak	H	33.45	11.81	44.66	-	50.42	74.00	23.58
4 824.000	37.80	Average	H	33.45	11.81	44.66	0.05	38.45	54.00	15.55
4 824.000	49.72	Peak	V	33.45	11.81	44.66	-	50.32	74.00	23.68
4 824.000	37.69	Average	V	33.45	11.81	44.66	0.05	38.34	54.00	15.66
Test Data for Middle Channel										
4 874.000	49.94	Peak	H	33.45	11.93	44.67	-	50.65	74.00	23.35
4 874.000	37.50	Average	H	33.45	11.93	44.67	0.05	38.26	54.00	15.74
4 874.000	49.60	Peak	V	33.45	11.93	44.67	-	50.31	74.00	23.69
4 874.000	37.54	Average	V	33.45	11.93	44.67	0.05	38.30	54.00	15.70
Test Data for High Channel										
4 924.000	50.04	Peak	H	33.55	11.93	44.68	-	50.84	74.00	23.16
4 924.000	37.65	Average	H	33.55	11.93	44.68	0.05	38.50	54.00	15.50
4 924.000	49.77	Peak	V	33.53	11.93	44.68	-	50.55	74.00	23.45
4 924.000	37.58	Average	V	33.55	11.93	44.68	0.05	38.43	54.00	15.57

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Duty Factor} - \text{AMP Factor}$$

9.6.2.3 Test data for 802.11n_HT20 WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 98.75 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 824.000	50.21	Peak	H	33.45	11.81	44.66	-	50.81	74.00	23.19
4 824.000	37.67	Average	H	33.45	11.81	44.66	0.05	38.32	54.00	15.68
4 824.000	49.97	Peak	V	33.45	11.81	44.66	-	50.57	74.00	23.43
4 824.000	37.80	Average	V	33.45	11.81	44.66	0.05	38.45	54.00	15.55
Test Data for Middle Channel										
4 874.000	49.53	Peak	H	33.45	11.93	44.67	-	50.24	74.00	23.76
4 874.000	37.65	Average	H	33.45	11.93	44.67	0.05	38.41	54.00	15.59
4 874.000	49.82	Peak	V	33.45	11.93	44.67	-	50.53	74.00	23.47
4 874.000	37.61	Average	V	33.45	11.93	44.67	0.05	38.37	54.00	15.63
Test Data for High Channel										
4 924.000	50.02	Peak	H	33.55	11.93	44.68	-	50.82	74.00	23.18
4 924.000	38.05	Average	H	33.55	11.93	44.68	0.05	38.90	54.00	15.10
4 924.000	49.84	Peak	V	33.53	11.93	44.68	-	50.62	74.00	23.38
4 924.000	37.77	Average	V	33.55	11.93	44.68	0.05	38.62	54.00	15.38

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Duty Factor} - \text{AMP Factor}$$

10. POWER SPECTRAL DENSITY

10.1 Operating environment


Temperature : 23 °C

Relative humidity : 48 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

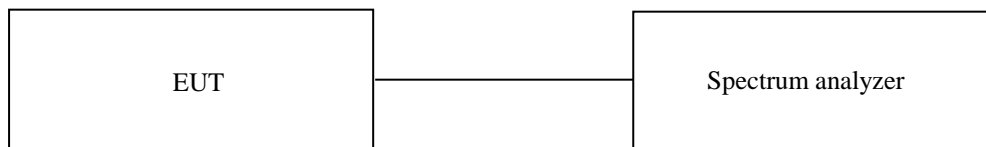

10.3 Test Date

October 17, 2022 ~ October 31, 2022

10.4 Test data for 802.11b WLAN Mode

-. Test Result : Pass

-. Duty Cycle : 99.87 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	Duty Factor(dB)	Total Value(dBm)	LIMIT (dBm / 3 kHz)	MARGIN (dB)
LOW	2 412.00	-22.98	0.01	-22.97	8.00	30.97
MIDDLE	2 437.00	-22.90	0.01	-22.89	8.00	30.89
HIGH(11)	2 462.00	-22.50	0.01	-22.49	8.00	30.49

Remark. Margin = Limit – Result (=Measured Value + Duty Factor)

10.5 Test data for 802.11g WLAN Mode

-. Test Result : Pass

-. Duty Cycle : 98.83 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	Duty Factor(dB)	Total Value(dBm)	LIMIT (dBm / 3 kHz)	MARGIN (dB)
LOW	2 412.00	-24.13	0.05	-24.08	8.00	32.08
MIDDLE	2 437.00	-24.20	0.05	-24.15	8.00	32.15
HIGH(11)	2 462.00	-23.74	0.05	-23.69	8.00	31.69

Remark. Margin = Limit – Result (=Measured Value + Duty Factor)

10.6 Test data for 802.11n HT20 WLAN Mode

-. Test Result : Pass

-. Duty Cycle : 98.75 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	Duty Factor(dB)	Total Value(dBm)	LIMIT (dBm / 3 kHz)	MARGIN (dB)
LOW	2 412.00	-24.00	0.05	-23.95	8.00	31.95
MIDDLE	2 437.00	-24.28	0.05	-24.23	8.00	32.23
HIGH(11)	2 462.00	-23.74	0.05	-23.69	8.00	31.69

Remark. Margin = Limit – Result (=Measured Value + Duty Factor)

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23 °C
 Relative humidity : 48 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


- 1. Below 30 MHz

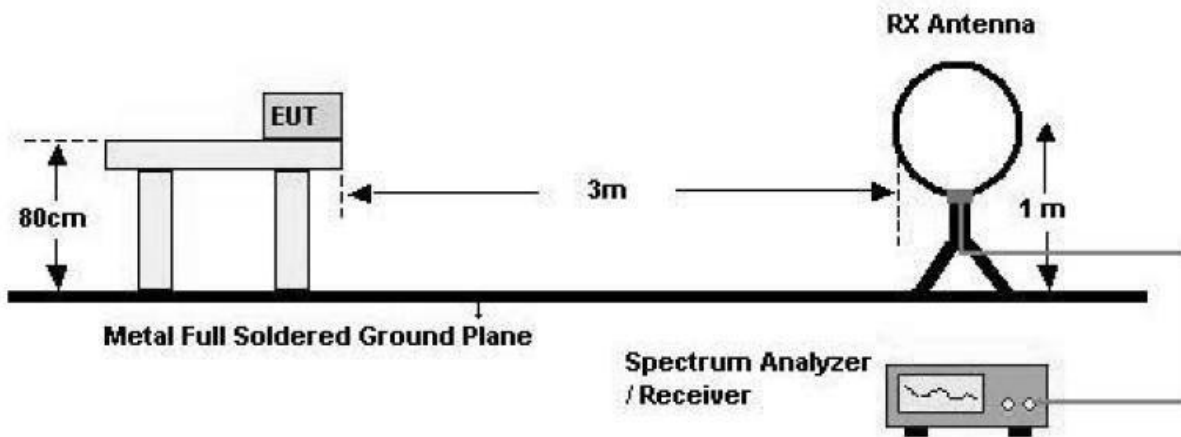

2. 30 MHz - 1 GHz

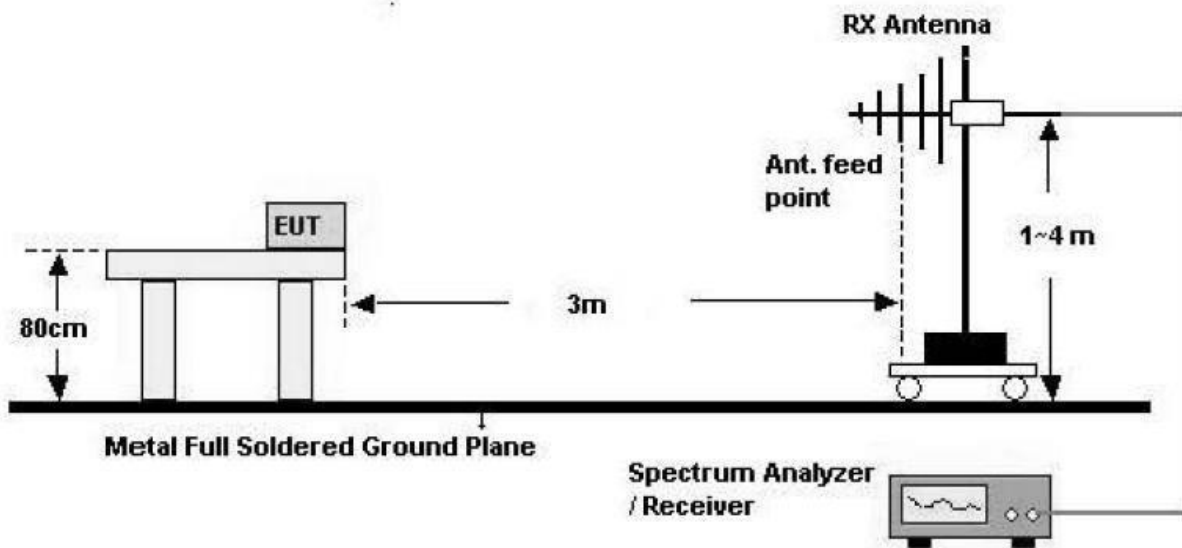

3. Above 1 GHz

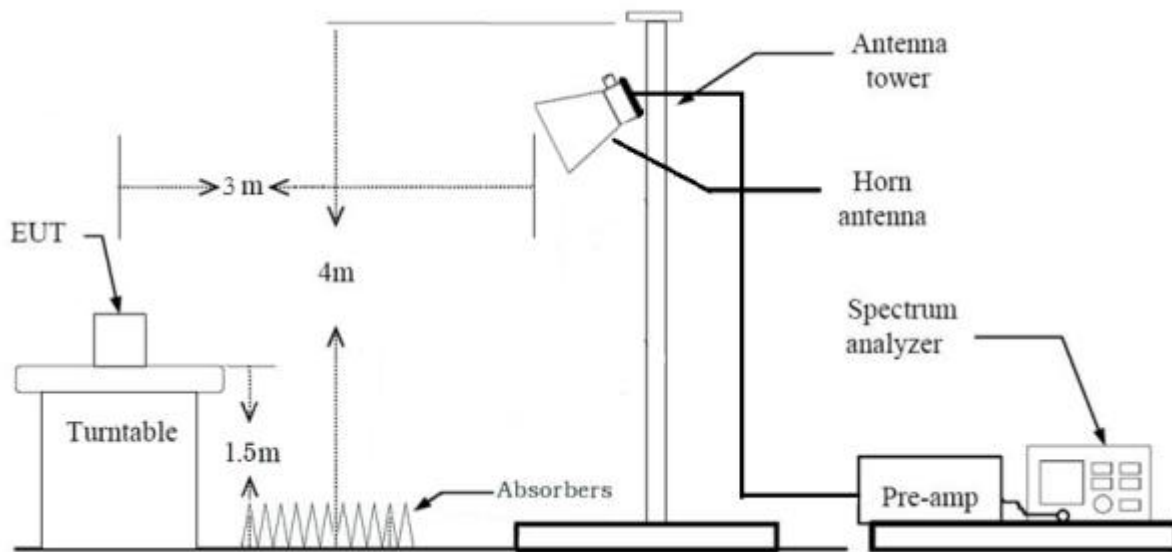

11.3 Test Date

October 17, 2022 ~ October 31, 2022

11.4 Test data for 30 MHz ~ 1 000 MHz


11.4.1 Test data for WLAN 2.4 GHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Car Navigation


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

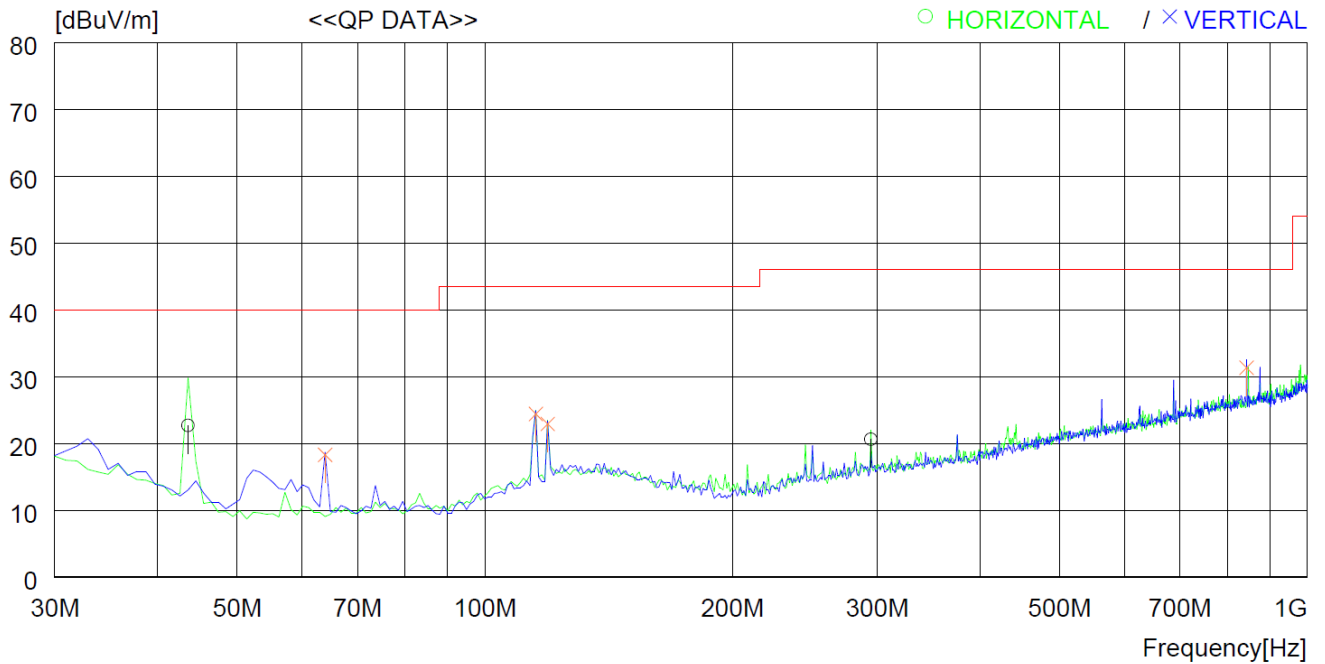

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	43.580	38.5	15.4	0.8	32.0	22.7	40.0	17.3	400	26
2	294.810	31.6	19.0	2.2	32.2	20.6	46.0	25.4	100	0
----- Vertical -----										
3	63.950	36.8	12.5	1.0	32.0	18.3	40.0	21.7	100	359
4	115.360	37.3	17.8	1.4	32.1	24.4	43.5	19.1	200	0
5	119.240	35.1	18.5	1.4	32.1	22.9	43.5	20.6	100	49
6	843.821	32.5	27.2	3.8	32.2	31.3	46.0	14.7	100	332

11.4.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz)

- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

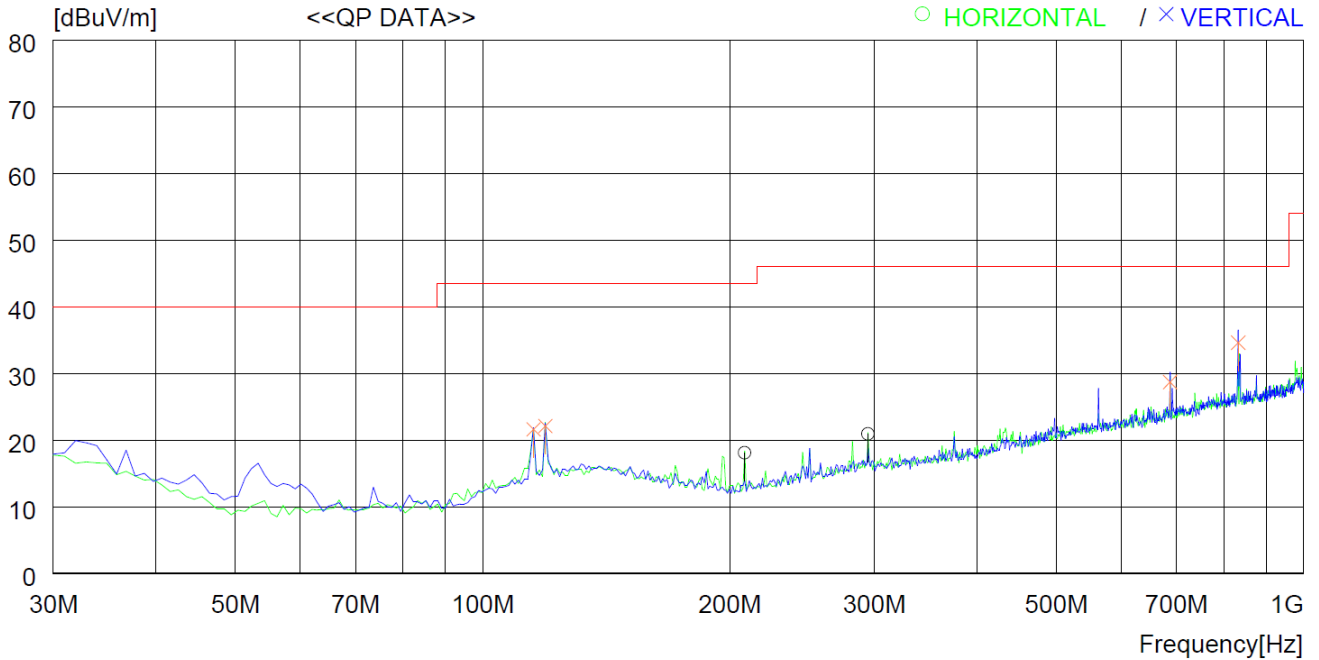

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	208.480	32.6	15.8	1.8	32.1	18.1	43.5	25.4	200	359
2	294.810	31.9	19.0	2.2	32.2	20.9	46.0	25.1	100	112
----- Vertical -----										
3	115.360	34.5	17.8	1.4	32.1	21.6	43.5	21.9	400	0
4	119.240	34.3	18.5	1.4	32.1	22.1	43.5	21.4	100	359
5	687.655	32.5	25.2	3.4	32.4	28.7	46.0	17.3	100	359
6	832.181	35.8	27.2	3.8	32.2	34.6	46.0	11.4	200	0

11.5 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.6 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSVA40	Rohde & Schwarz	Signal Analyzer	101586	Apr. 21, 2022 (1Y)
ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 07, 2022 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 13, 2022 (1Y)
SCU18	Rohde & Schwarz	Signal Conditioning unit	102266	Jul. 12, 2022 (1Y)
SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Jan. 18, 2022 (1Y)
WT-A3882-R10	Microwave	Cavity Band Rejection Filter	WT22040502-1	Jun. 21, 2022 (1Y)
GP-4303D	LG Precision Co.,Ltd	DC POWER SUPPLY	5071069	Jan. 03, 2022 (1Y)
DT2000-2t	Innco System	Turn Table	N/A	N/A
MA-4640-XPET	Innco System	Antenna Master	MA4640/652/43100318/P	N/A
CO3000	Innco System	Controller	1026/40960617/P	N/A
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2022 (2Y)
HLP-2008	TDK	Hybrid Antenna	131316	Mar. 07, 2022 (2Y)
BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1349	Jul. 08, 2022 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jan. 21, 2022 (1Y)