



SYLVANIA LED Fixtures

Contractor Guide

Let's work together

A handy guide to make it easier

SYLVANIA LED fixtures and retrofit kits are the ideal solution to fit your needs for everyday applications. These fixtures have all the necessary features and functions for the application they have been developed for — no more and no less.

Product Finder


Edge-Lit Panel	4
Volumetric Troffer	6
Troffer Retrofit Kit	8
Strip	10
Slim Downlight	12
ULTRA LED™ RT5/6 HO and RT8	14
ULTRA LED RT4 and RT5/6	16
ULTRA LED 4" and 6" MICRODISK	18
Surface Mount Series	20
Slim Convertible LED Undercabinet Light	22
PenduLum™	23
High Bay	24
Linear High Bay	26
Vapor Tight	28
Garage	30
Slim Floodlight	32
Area Light	34
Slim Wall Pack	36
Wall Pack Cutoff	38
Wall Pack Non-Cutoff	40
Product Ordering Guide	42
Accessories	66

For warranty information for our SYLVANIA LED fixtures please visit: www.sylvania.com/warranty

Edge-Lit Panel



Dimensions

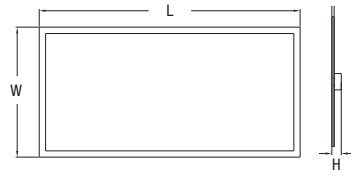

L x W x H
1x4: 47.8" x 11.8" x 1.7"
2x2: 23.8" x 23.8" x 1.7"
2x4: 47.8" x 23.8" x 1.7"

- Robust, rigid construction for high quality and simple installation
- Edge-lit LED light guide design provides even, low-glare light output
- Thin profile, IC and damp rated for use in most ceiling applications

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Fixture Lumens	LPW*
74243	PANELF1A/032UNVD835/14G/WH	32	3500K	1x4	3200	102
74244	PANELF1A/032UNVD840/14G/WH	32	4000K	1x4	3300	104
74938	PANELF1A/032UNVD850/14G/WH	32	5000K	1x4	3400	110
74251	PANELF1A/032UNVD835/22G/WH	32	3500K	2x2	3500	110
74252	PANELF1A/032UNVD840/22G/WH	32	4000K	2x2	3500	110
74797	PANELF1A/032UNVD850/22G/WH	32	5000K	2x2	3500	114
74247	PANELF1A/032UNVD835/24G/WH	32	3500K	2x4	3300	104
74248	PANELF1A/032UNVD840/24G/WH	32	4000K	2x4	3300	104
74935	PANELF1A/032UNVD850/24G/WH	32	5000K	2x2	3500	112
74249	PANELF1A/040UNVD835/24G/WH	40	3500K	2x4	4200	109
74250	PANELF1A/040UNVD840/24G/WH	40	4000K	2x4	4200	110
74934	PANELF1A/040UNVD850/24G/WH	40	5000K	2x4	4300	110

*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
32 (1x4)	49	2x28W T8	35%
32 (1x4)	56	2x32W T8	43%
32 (2x2)	48	3x17W T8	33%
32 (2x2)	56	2U31 T8	43%
32 (2x4)	56	2x32W T8	43%
40 (2x4)	75	3x32W T8	47%

Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Fixture Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
1'x4' 32W	74243	44fc/3.2	36fc/2.9	32fc/2.0	43fc/2.7	35fc/2.4	31fc/1.8	42fc/2.5	34fc/2.3	31fc/1.8
	74244									
2'x2' 32W	74251	47fc/3.2	39fc/2.9	35fc/2.0	46fc/2.7	38fc/2.4	33fc/1.8	44fc/2.4	37fc/2.3	33fc/1.8
	74252									
2'x4' 32W	74247	44fc/3.3	36fc/2.8	32fc/2.0	43fc/2.7	35fc/2.4	31fc/1.8	42fc/2.5	34fc/2.3	31fc/1.7
	74248									
2'x4' 40W	74249	62fc/3.3	51fc/2.8	46fc/2.0	60fc/2.7	50fc/2.4	44fc/1.8	59fc/2.5	48fc/2.3	43fc/1.7
	74250									

- Illuminance target: 30-50 footcandles avg.
- Initial illuminance measured at desk height
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

Additional Options

Please see pages 42-67 for more details on:


- | | | |
|--------------------------|-------------------------------------|-------------------------------------|
| Sensor | Emergency | Accessories |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |



Volumetric Troffer



Dimensions



L x W x H
2x2: 23.7" x 23.7" x 3.5"
2x4: 47.7" x 23.7" x 3.5"

- Lightweight and sturdy one piece construction for easy installation
- Seamless design for even light output without light leaks or shadows
- Wet location rated for covered applications

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Fixture Lumens	LPW*
74352	VOLUME1A/035UNVD835/22G/WH	35	3500K	2x2	3500	107
74353	VOLUME1A/035UNVD840/22G/WH	35	4000K	2x2	3600	113
74441	VOLUME1A/042UNVD835/24G/WH	42	3500K	2x4	4400	103
74442	VOLUME1A/042UNVD840/24G/WH	42	4000K	2x4	4400	103
71725	VOLUME2A/025UNVD835/22G/WH	25	3500K	2x2	3200	134
71726	VOLUME2A/025UNVD840/22G/WH	25	4000K	2x2	3300	136
74309	VOLUME2A/035UNVD835/24G/WH	35	3500K	2x4	4600	135
74348	VOLUME2A/035UNVD840/24G/WH	35	4000K	2x4	4600	138

*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.



**DLC Premium only applicable on 2A versions.

Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
35 (2x2)	56	2xU31W T8	38%
25* (2x2)	56	2xU31W T8	55%
42 (2x4)	75	3x32W T8	44%
35* (2x4)	75	3x32W T8	53%

* Volume 2A Version

Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Fixture Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
2'x2'	71725	41.5/1.48	34.2/1.29	30.3/1.51	40.2/1.55	33.3/1.40	29.2/1.32	38.6/1.60	32.1/1.48	28.1/1.26
25W	71726	42.0/1.48	34.6/1.29	30.7/1.52	40.8/1.55	33.8/1.40	29.6/1.32	39.2/1.60	32.5/1.49	28.5/1.26
2'x2'	74352	42.5/1.46	35.2/1.29	31.2/1.64	41.1/1.52	34.1/1.40	29.9/1.35	39.4/1.58	32.7/1.47	28.6/1.30
35W	74353	42.9/1.46	35.4/1.30	31.4/1.59	41.4/1.53	34.4/1.40	30.1/1.33	39.7/1.57	32.9/1.48	28.8/1.24
2'x4'	74309	57.1/1.47	47.3/1.29	42.0/1.51	55.5/1.54	46.1/1.40	40.5/1.32	53.2/1.59	44.3/1.48	38.9/1.26
35W	74348	58.0/1.47	48.1/1.29	42.7/1.51	56.4/1.54	46.9/1.40	41.1/1.31	54.1/1.60	45.0/1.48	39.5/1.26
2'x4'	74441	54.0/1.48	44.8/1.31	39.6/1.45	52.3/1.55	43.5/1.41	38.2/1.30	50.2/1.60	41.7/1.49	36.6/1.26
42W	74442	58.3/1.48	48.3/1.30	42.7/1.45	56.5/1.55	46.9/1.41	41.2/1.29	54.1/1.59	45.0/1.48	39.5/1.25


- Illuminance target: 30-50 footcandles avg.
- Initial illuminance measured at desk height
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

Additional Options

Please see pages 42-67 for more details on:


Sensor	Emergency	Accessories
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Troffer Retrofit Kit

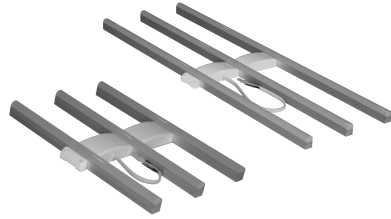

- Quick and easy installation in under 4 minutes
- 2-lamp and 3-lamp options to keep the tube look
- 120° beam angle

Dimensions

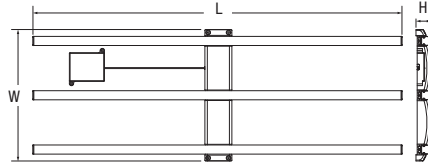

L x W x H
2x2: 20.3" x 14.8" x 1.7"
2x4: 43.7" x 14.8" x 1.7"

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Fixture Lumens	LPW*
75460	LEDR/TROFF/2L/024/UNV/D/830/22/WH	24	3000K	2ft - 2 Lamp	3000	125
75461	LEDR/TROFF/2L/024/UNV/D/835/22/WH	24	3500K	2ft - 2 Lamp	3000	125
75462	LEDR/TROFF/2L/024/UNV/D/840/22/WH	24	4000K	2ft - 2 Lamp	3000	125
75463	LEDR/TROFF/2L/024/UNV/D/850/22/WH	24	5000K	2ft - 2 Lamp	3000	125
75431	LEDR/TROFF/3L/026/UNV/D/830/22/WH	26	3000K	2ft - 3 Lamp	3200	123
75432	LEDR/TROFF/3L/026/UNV/D/835/22/WH	26	3500K	2ft - 3 Lamp	3200	123
75433	LEDR/TROFF/3L/026/UNV/D/840/22/WH	26	4000K	2ft - 3 Lamp	3200	123
75434	LEDR/TROFF/3L/026/UNV/D/850/22/WH	26	5000K	2ft - 3 Lamp	3200	123
75427	LEDR/TROFF/2L/027/UNV/D/830/24/WH	27	3000K	4ft - 2 Lamp	3200	119
75428	LEDR/TROFF/2L/027/UNV/D/835/24/WH	27	3500K	4ft - 2 Lamp	3200	119
75429	LEDR/TROFF/2L/027/UNV/D/840/24/WH	27	4000K	4ft - 2 Lamp	3200	119
75430	LEDR/TROFF/2L/027/UNV/D/850/24/WH	27	5000K	4ft - 2 Lamp	3200	119
75496	LEDR/TROFF/3L/040/UNV/D/830/24/WH	40	3000K	4ft - 3 Lamp	4800	120
75497	LEDR/TROFF/3L/040/UNV/D/835/24/WH	40	3500K	4ft - 3 Lamp	4800	120
75498	LEDR/TROFF/3L/040/UNV/D/840/24/WH	40	4000K	4ft - 3 Lamp	4800	120
75499	LEDR/TROFF/3L/040/UNV/D/850/24/WH	40	5000K	4ft - 3 Lamp	4800	120

*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.



Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height			
		On Center Fixture Spacing									
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	
2 ft 2 Lamp 24W	75460										
	75461	39 / 1.6	32 / 1.4	28 / 1.5	37 / 1.6	31 / 1.5	26 / 1.4	36 / 1.6	30 / 1.6	25 / 1.5	
	75462										
	75463										
2 ft 3 Lamp 26W	75431										
	75432	42 / 1.6	35 / 1.4	30 / 1.5	40 / 1.6	33 / 1.5	28 / 1.4	38 / 1.6	31 / 1.6	27 / 1.5	
	75433										
	75434										
4 ft 2 Lamp 27W	75427										
	75428	44 / 1.6	36 / 1.4	31 / 1.5	42 / 1.6	34 / 1.5	29 / 1.4	40 / 1.6	33 / 1.6	28 / 1.5	
	75429										
	75430										
4 ft 3 Lamp 40W	75496										
	75497	63 / 1.6	52 / 1.4	44 / 1.5	60 / 1.6	49 / 1.5	42 / 1.4	57 / 1.6	47 / 1.6	41 / 1.5	
	75498										
	75499										


- Illuminance target: 30-50 footcandles avg.
- Initial illuminance measured at desk height
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

Additional Options

Please see pages 42-67 for more details on:

Sensor Emergency Accessories

Strip



Dimensions

- Snap fit for quick and easy tool-less access
- End-to-end linkable for customized run lengths
- Integrated LED design allows for energy savings up to 63% compared to T8

L	x	W	x	H
2ft:	24"	x	2.5"	x 3.1"
4ft:	47.3"	x	2.5"	x 3.1"

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Fixture Lumens	LPW*
70525	STRIP1A/016UNVD835/24S/WH	16	3500K	2ft	2000	124
70526	STRIP1A/016UNVD840/24S/WH	16	4000K	2ft	1900	119
70527	STRIP1A/016UNVD850/24S/WH	16	5000K	2ft	2000	122
74774	STRIP1A/032UNVD835/48S/WH	32	3500K	4ft	3900	121
74775	STRIP1A/032UNVD840/48S/WH	32	4000K	4ft	4000	127
74776	STRIP1A/032UNVD850/48S/WH	32	5000K	4ft	4000	124
70522	STRIP1A/047UNVD835/48S/WH	47	3500K	4ft	5900	123
70523	STRIP1A/047UNVD840/48S/WH	47	4000K	4ft	6200	126
70524	STRIP1A/047UNVD850/48S/WH	47	5000K	4ft	6000	124

*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Photometric Data

		7 ft Mounting Height			10 ft Mounting Height			13 ft Mounting Height		
		On Center Fixture Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
2 ft 16W	70525									
	70526	23fc/1.4	19fc/1.2	17fc/1.6	22fc/1.5	18fc/1.4	16fc/1.3	20fc/1.6	17fc/1.5	15fc/1.3
4 ft 32W	74774									
	74775	49fc/1.38	40fc/1.2	35fc/1.6	47fc/1.5	39fc/1.4	34fc/1.3	44fc/1.6	36fc/1.5	32fc/1.3
	74776									
4 ft 47W	70522									
	70523	76fc/1.4	62fc/1.2	55fc/1.5	72fc/1.5	60fc/1.4	52fc/1.3	67fc/1.6	56fc/1.5	49fc/1.2
	70524									

		12 ft Mounting Height*			16 ft Mounting Height*			20 ft Mounting Height*		
		On Center Fixture Spacing								
		8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
4 ft 32W	74774									
	74775	56fc/1.7	55fc/1.5	53fc/1.5	51fc/1.7	50fc/1.5	49fc/1.4	47fc/1.6	46fc/1.5	45fc/1.4
	74776									
4 ft 47W	70522									
	70523	86fc/1.7	85fc/1.5	82fc/1.5	79fc/1.7	77fc/1.5	75fc/1.4	72fc/1.7	71fc/1.6	69fc/1.5
	70524									

- Illuminance target: 15-40 footcandles avg.
- Initial illuminance measured at floor
- 80/50/20 reflectances

*Continuous rows within a room with no objects or obstructions



Additional Options

Please see pages 42-67 for more details on:

Sensor Emergency Accessories



Slim Downlight

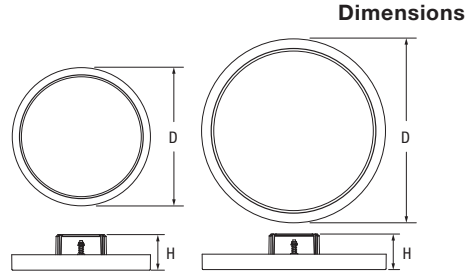

Dimensions

- Self leveling and twist lock features for simple installation into standard j-box
- Edge-lit LED light guide design provides even, low-glare light output
- Low profile, seamless design enhances interior appearance in new construction and retrofit applications

D x H		
6in:	6"	x 1.56"
8in:	8"	x 1.57"

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size	Total Fixture Lumens	LPW*
60003	SLMDNLR1A/010UNVT827/06J/WH	10	2700K	6in	700	70
60004	SLMDNLR1A/010UNVT830/06J/WH	10	3000K	6in	750	75
60005	SLMDNLR1A/010UNVT840/06J/WH	10	4000K	6in	800	80
60058	SLMDNLR1A/014UNVT827/08J/WH	14	2700K	8in	980	70
60057	SLMDNLR1A/014UNVT830/08J/WH	14	3000K	8in	1050	75
60056	SLMDNLR1A/014UNVT840/08J/WH	14	4000K	8in	1120	80

*LPW per LM79 report.
Only dimmable at 120V.

Contact your local SYLVANIA Product Distributor for more information.



Photometric Data

		6' Corridor 8.0-8.5 ft Mounting Height	6' Corridor 9.0-9.5 ft Mounting Height	6' Corridor 10.0-10.5 ft Mounting Height
		10' Fixture Spacing		
10W	60003			
	60004	7.1fc/1.15(Avg/Min)	6.4fc/1.11(Avg/Min)	5.8fc/1.11(Avg/Min)
	60005			
14W	60058			
	60057	10.5fc/1.14(Avg/Min)	9.5fc/1.12(Avg/Min)	8.6fc/1.09(Avg/Min)
	60056			

- Initial illuminance measured at floor
- 80/50/20 (ceiling/wall/floor)
- Summary table: average initial illuminance/uniformity (avg/min)

Additional Options

Please see pages 42-67 for more details on:


- | | | |
|--------------------------|--------------------------|--------------------------|
| Sensor | Emergency | Accessories |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

ULTRA LED™ RT5/6 HO and RT8 Recessed Downlights



- Optimal for new construction and retrofit applications
- UL1598 Listed and Classified for stand-alone and retrofit
- Optional trim ring extender

Dimensions

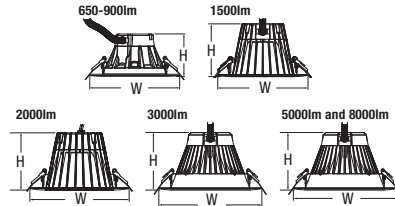

	W	x	H
650-900lm:	7.36"	x	3.46"
1500lm:	7.36"	x	4.31"
2000lm:	9.25"	x	5.31"
3000lm:	9.45"	x	4.88"
5000-8000lm:	9.45"	x	5.51"

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Total Fixture Lumens	LPW	Dimmable
75332	LED/RT5/6/650/940	8	650	72	Yes (Phase Cut)
75231	LED/RT5/6/HO/700/840	8	700	87	Yes (Phase Cut)
75139	LED/RT5/6/HO/900/840	13	900	69	Yes (0-10V Low Voltage)
75327	LED/RT5/6/HO/900/840/347V	13	900	69	No
72530	LED/RT5/6/1500/HO/840	17	1500	88	Yes (0-10V Low Voltage)
75328	LED/RT5/6/HO/1500/840/347V	17	1500	88	No
72509	LED/RT8/2000/840	27	2000	74	No
74468**	LED/RT8/2000/840	24	2000	83	Yes (0-10V Low Voltage)
75398***	LED/RT8/2000/840/347V	23	2000	86	No
72628	LED/RT8/3000/940	40	3000	75	Yes (0-10V Low Voltage)
79742	LED/RT8/5000/840	54	5000	92	Yes (0-10V Low Voltage)
75435	LED/RT8/5000/840/347V	54	5000	100	No
79756	LED/RT8/8000/840	92	8000	87	Yes (0-10V Low Voltage)

**74466 replaces 72503, 74467 replaces 72504, 74468 replaces 72509.
***347V kits are not ENERGY STAR® listed.

Contact your local SYLVANIA Product Distributor for more information.



*Only available for RT5/6 HO.

Wattage Comparison Chart

LED System Wattage	Traditional Source	Energy Savings*
8W	13W CFL DD, DT	\$27.00
13W	18W CFL DD, DT	\$27.00
17W	26W CFL DD, DT	\$49.00
17W	32W CFL DD, DT	\$82.00
24W	39W Compact Fluorescent	\$82.50
23W	42W Compact Fluorescent	\$104.50
40W	64W Compact Fluorescent	\$132.00
54W	84W Compact Fluorescent	\$165.00
92W	133W Compact Fluorescent	\$225.00

* Based on \$0.11/kWh over 50,000 hours life.

Photometric Data

		6' Corridor 8.0-8.5 ft Mounting Height	6' Corridor 9.0-9.5 ft Mounting Height	6' Corridor 10.0-10.5 ft Mounting Height
		10' Fixture Spacing		
8W	75332	6.3fc/1.4		
	75231	7.3fc/1.4		
13W	75139	10.2fc/1.4	9.3fc/1.5	
17W	72530		13.4fc/1.4	12.3fc/1.4

- Initial illuminance measured at floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

Additional Options

Please see pages 42-67 for more details on:

Sensor Emergency Accessories


ULTRA LED™ RT4 and RT5/6

Recessed Downlights



- CEC Compliant
- California Title 24 Fixture
- Integrated white trim, white baffle reflector socket adaptor included

Dimensions

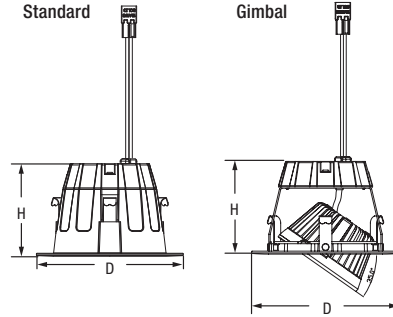

	D	x	H
4" Standard:	5.04"	x	3.18"
4" Gimbal:	5.04"	x	3.18" w/35" Gimbal
5/6" Standard:	7.37"	x	3.4"
5/6" Gimbal:	7.28"	x	3.4" w/30" Gimbal

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Total Fixture Lumens	R9
74288	LED/RT4/600/940/FL80	9	600	—
74926	LED/RTQ4/600/940	9	600	>50
74292	LED/RT5/6/700/940/FL80	10	700	15
74930	LED/RTQ5/6/900/940	13	900	>50
79752	LED/RT5/6/1200/930RP	16	1200	15
79753	LED/RT5/6/1200/940	16	1200	15

*Based on 4000K CCT; for more CCT information please see pages 48-51.

Wattage Comparison Chart

LED System Wattage	Traditional Source	Energy Savings*
9W	Incandescent 50R20	\$225
9W	Halogen 50PAR20/WFL	\$225
9W	Compact Fluorescent 14R20	\$27
10W	Incandescent 65WBR30	\$302
13W	Incandescent 75WBR40	\$341
16W	Incandescent 100WBR40	\$462

* Based on \$0.11/kWh over 50,000 hours life.

Photometric Data

		6' Corridor 8.0-8.5 ft Mounting Height	6' Corridor 9.0-9.5 ft Mounting Height	6' Corridor 10.0-10.5 ft Mounting Height
		10' Fixture Spacing		
9W	74288	6.3fc/1.4		
10W	74292	7.3fc/1.4		
13W	74930	10.2fc/1.4	9.3fc/1.5	
16W	79753	12.0fc/1.4	11.0fc/1.4	10.0fc/1.4

- Initial illuminance measured at floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

Additional Options

Please see pages 42-67 for more details on:

Sensor Emergency Accessories

-




ULTRA LED™ 4" and 6" MICRODISK Surface Mount Downlights



- LED Downlight kit with remote driver that operates on 120-277V
- 1" Thin design allows for installation directly under joists
- Does not require housing for installation

Dimensions



D x H
4in: 5.19" x 1.0"
6in: 7.32" x 1.0"

Ordering Information

Item Number	Ordering Abbreviation	Delivered Light Output (lm)	Color Temperature
75030	LED/MD4/700/830/UNV	700	3000K
71196	LED/MD4/700/840/UNV	700	4000K
75031	LED/MD4/700/850/UNV	700	5000K
75032	LED/MD6/1100/830/UNV	1100	3000K
71197	LED/MD6/1100/840/UNV	1100	4000K
75033	LED/MD6/1100/850/UNV	1100	5000K

Contact your local SYLVANIA Product Distributor for more information.

Wattage Comparison Chart

Basic Product Description	Traditional Source	Energy Savings*
MICRODISK	Incandescent 100BR40	\$313
MICRODISK	120W Incandescent	\$568

* Based on \$0.11/kWh over 50,000 hours life.

Photometric Data

		6' Corridor 8.0-8.5 ft Mounting Height	6' Corridor 9.0-9.5 ft Mounting Height
		10' Fixture Spacing	
8W	71196	6.3fc/1.4	
13W	71197	10.2fc/1.4	9.3fc/1.5

- Initial illuminance measured at floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

Additional Options

Please see pages 42-67 for more details on:

- Sensor Emergency Accessories
-



Surface Mount Series



- Easy to install, lightweight fixtures in multiple styles for any surface mount application
- Phase-cut dimmer compatibility for use with many light switches and controls
- Energy Star qualified to ensure quality and incentive compliance

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Total Fixture Lumens	LPW	Dimmable
74305	LEDFLUSHRND11IN16DIM827WH	17.5	1000	57	Yes (Phase-cut)
74306	LEDFLUSHRND11IN16DIM840WH	17.5	1200	68	Yes (Phase-cut)
74263	SURFACER1A/025120T827/14S/WH	25	1500	60	Yes (Phase-cut)
74264	SURFACER1A/025120T840/14S/WH	25	1600	65	Yes (Phase-cut)
71500	LEDFLUSHDRM11IN15DIM830WH	15	1000	67	Yes (Phase-cut)
71505	LEDFLUSHDRM11IN15DIM840WH	15	1000	67	Yes (Phase-cut)
74302	LEDFLUSHDOME11IN20DIM827BN	21	1000	47	Yes (Phase-cut)
74303	LEDFLUSHSQ11IN16DIM827WH	17.5	1000	57	Yes (Phase-cut)
74304	LEDFLUSHSQ11IN16DIM840WH	17.5	1200	68	Yes (Phase-cut)
71403	LEDFLUSHRND10IN15DIM830BN	15	1000	67	Yes (Phase-cut)
71404	LEDFLUSHRND10IN15DIM840BN	15	1000	67	Yes (Phase-cut)
71405	LEDFLUSHRND12IN15DIM830BN	15	1000	67	Yes (Phase-cut)
71406	LEDFLUSHRND12IN15DIM840BN	15	1000	67	Yes (Phase-cut)
72517	LEDEDGELITFLUSH15INCHRNDDBN	26	1800	69	Yes (Phase-cut)
74307	LEDFLUSHRNDTRM11IN20DIM827WH	21	1000	47	Yes (Phase-cut)
74308	LEDFLUSHRNDTRM11IN20DIM840WH	21	1200	57	Yes (Phase-cut)

Contact your local SYLVANIA Product Distributor for more information.



Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings*
25	1x32W CFL	36	31%
25	100W Incandescent	100	75%


* Based on \$0.11/kWh over 50,000 hours life.

Additional Options

Please see pages 42-67 for more details on:

Sensor Emergency Accessories

Slim Convertible LED Undercabinet Light

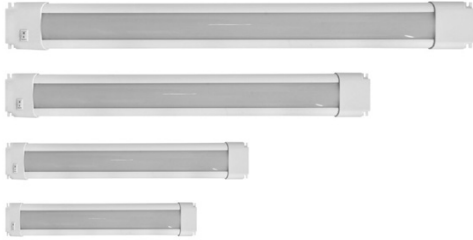

Dimensions

	L	x	W	x	H
9":	9"	x	2.4"	x	.5"
12":	12"	x	2.4"	x	.5"
18":	18"	x	2.4"	x	.5"
24":	24"	x	2.4"	x	.5"

- Thin profile fixture barely visible when used in undercabinet and shelving applications
- Jumper cable included for connecting multiple units
- Individual units are direct wire or plug-in capable for retrofit and new construction applications

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Size (in)	Total Fixture Lumens*	LPW*
71347	LEDSLIMUCCONVER9IN	4.5	3000K	9	352	82
74346	LEDSLIMUCCONVER12IN	6	3000K	12	406	71
74345	LEDSLIMUCCONVER18IN	8	3000K	18	626	82
74344	LEDSLIMUCCONVER24IN	10	3000K	24	756	78

*Lumens and LPW per LM79 report.


Contact your local SYLVANIA Product Distributor for more information.

Additional Options


Please see pages 42-67 for more details on:

- Sensor Emergency Accessories
-

PenduLum™



Dimensions




- Socket attached to 6ft cord with a 5ft tether allowing for versatility in mounting positions
- Perfect for high ceilings and in combination with medium base vintage/filament lamps
- Offered in 2 color options: Oil-rubbed bronze and brushed nickel

Ordering Information

Item Number	Ordering Abbreviation	Textile Cord Length	Steel Rope Length	Canopy Diameter	Color
74279	PNDLUM1A/120/78/OB	78in	66in	4.5in	Oil Rubbed Bronze
74280	PNDLUM1A/120/78/BN	78in	66in	4.5in	Brushed Nickel

Contact your local SYLVANIA Product Distributor for more information.

Multiple Mounting Configurations



Additional Options


Please see pages 42-67 for more details on:

- Sensor Emergency Accessories
-

PENDANT



High Bay

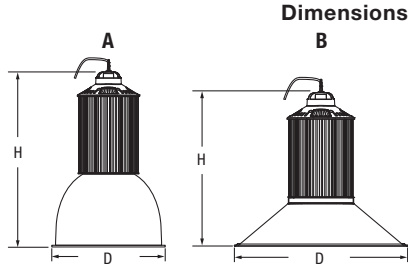

	D	x	H	D	x	H
100W:	A: 16.2"	x	21.8"	B: 19.7"	x	17"
200W:	A: 16.2"	x	23.6"	B: 19.7"	x	18.8"
300W:	A: 16.2"	x	25.2"	B: 19.7"	x	20.4"

- Lightweight, impact resistant fixture is designed for easy and safe installation
- Traditional design with multiple optic choices that enhance lumen output
- 1 for 1 replacement up to 1000W MH/HPS fixture and wide operating temperature

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Total Fixture Lumens*	LPW*
74230	HIBAY1A/100UNVD840/GR	100	4000K	10,800	108
74231	HIBAY1A/100UNVD850/GR	100	5000K	10,800	108
74232	HIBAY1A/200UNVD840/GR	200	4000K	22,200	114
74233	HIBAY1A/200UNVD850/GR	200	5000K	22,500	115
71731	HIBAY1A/300UNVD840/GR	300	4000K	29,600	102
71732	HIBAY1A/300UNVD850/GR	300	5000K	30,300	104
74509	HIBAY1A/100HUV840/GR	100	4000K	10,800	108
74510	HIBAY1A/100HUV850/GR	100	5000K	10,800	108
74511	HIBAY1A/200HUV840/GR	200	4000K	23,300	123
74512	HIBAY1A/200HUV850/GR	200	5000K	23,100	122

*Lumens and LPW based on housing with refractor. LPW per LM79 report.
Contact your local SYLVANIA Product Distributor for more information.

Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
100	250W HPS	295	66%
200	400W HPS	460	57%
300	750W HPS	840	64%
300	1000W HPS	1100	73%

Photometric Data

		15 ft Mounting Height			20 ft Mounting Height			25 ft Mounting Height			30 ft Mounting Height			35 ft Mounting Height		
		On Center Fixture Spacing														
		10'x15'	15'x15'	15'x20'	10'x15'	15'x15'	15'x20'	10'x15'	15'x15'	15'x20'	10'x15'	15'x15'	15'x20'	10'x15'	15'x15'	15'x20'
100W	74231	76fc/2.2	53fc/2.3	39fc/3.7	72fc/1.8	50fc/1.4	37fc/2.1	69fc/2.1	48fc/1.8	66.4fc/2.2	46.1fc/2.1	66.5fc/2.1	44.3fc/2.1			

		20 ft Mounting Height			25 ft Mounting Height			30 ft Mounting Height			35 ft Mounting Height		
		On Center Fixture Spacing											
		15'x20'	20'x20'	20'x25'	15'x20'	20'x20'	20'x25'	15'x20'	20'x20'	20'x25'	15'x20'	20'x20'	20'x25'
200W	74233	70fc/2.5	51.7fc/4.3	41.8fc/5.1	67fc/2.1	49.3fc/2.8	39.9fc/3.7	64.6fc/2.0	47fc/2.4	38.2fc/2.7	62fc/2.1	45fc/2.3	36.5fc/2.4

		40 ft Mounting Height		60 ft Mounting Height		80 ft Mounting Height	
		On Center Fixture Spacing					
		20'x20'	20'x25'	20'x20'	20'x25'	15'x20'	
300W	71732	64fc/2.1	52fc/2.0	55fc/1.9	44fc/1.9	47fc/1.8	

- Illuminance target: 40-65 footcandles avg.
- Initial illuminance measured at 30" above floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

*Information based on High Bay with refractor

Additional Options

Please see pages 42-67 for more details on:

- Sensor Emergency Accessories
-



Linear High Bay

Dimensions



- Stainless steel mounting accessories (V-Hook and 2 6ft chains) included; LED hanging tray for easy installation
- Clear or diffused lens included for aisle and wide distribution options
- Integrated motion/daylight sensor for additional energy savings

L x W x H	
100W-165W:	46.0" x 7.9" x 2.9"
225W:	46.0" x 11.8" x 2.9"

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Lens	Total Fixture Lumens	LPW*
74839	LNHIBA1A/100UNVD840/A/WH	100	4000K	Clear	13,000	127
74840	LNHIBA1A/100UNVD850/A/WH	100	5000K	Clear	13,000	127
74837	LNHIBA1A/100UNVD840/W/WH	100	4000K	Frosted	12,900	127
74838	LNHIBA1A/100UNVD850/W/WH	100	5000K	Frosted	12,900	127
74845	LNHIBA1A/150UNVD840/W/WH	150	4000K	Clear	19,700	133
74846	LNHIBA1A/150UNVD850/W/WH	150	5000K	Clear	19,700	133
74831	LNHIBA1A/165UNVD840/A/WH	165	4000K	Clear	18,900	117
74832	LNHIBA1A/165UNVD850/A/WH	165	5000K	Clear	18,900	117
74829	LNHIBA1A/165UNVD840/W/WH	165	4000K	Frosted	18,100	112
74830	LNHIBA1A/165UNVD850/W/WH	165	5000K	Frosted	18,100	112
74823	LNHIBA1A/225UNVD840/A/WH	225	4000K	Clear	25,300	112
74824	LNHIBA1A/225UNVD850/A/WH	225	5000K	Clear	25,300	112
74821	LNHIBA1A/225UNVD840/W/WH	225	4000K	Frosted	26,600	117
74822	LNHIBA1A/225UNVD850/W/WH	225	5000K	Frosted	26,600	117

*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.



*DLC Premium only applicable to 100W and 150W versions.

Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
100	250W HPS	295	66%
150	250W MH	290	48%
150	250W HPS	295	49%
165	4-lamp 54T5H0	220	25%
165	320W MH	370	55%
225	6-Lamp 54T5H0	350	36%
225	400W MH	450	50%

Photometric Data

		20 ft Mounting Height			25 ft Mounting Height		
		On Center Fixture Spacing					
		15'x20'	20'x20'	20'x25'	15'x20'	20'x20'	20'x25'
100W	74838	41fc/1.9			45fc/1.9		
150W	74846	68fc/1.6	50fc/1.8	41fc/1.9	60fc/1.9	47fc/1.9	38fc/1.9
165W	74830	63fc/1.6	47fc/1.8	38fc/1.9	56fc/1.9	44fc/1.9	35fc/1.9

		30 ft Mounting Height		35 ft Mounting Ht		40 ft Mounting Ht		45 ft Mounting Ht	
		On Center Fixture Spacing							
		20'x20'	20'x25'	20'x20'	20'x25'	20'x20'	20'x25'	20'x20'	20'x25'
225W	74822	60fc/1.9	49fc/1.9	57fc/1.9	47fc/1.9	54fc/1.8	44fc/1.9	52fc/1.8	42fc/1.8

- Illuminance target: 40-65 footcandles avg.
- Initial illuminance measured at 30" above floor
- 80/50/20 reflectances
- Summary table: average initial illuminance/minimum contrast

*Information based on wide distribution


Additional Options

Please see pages 42-67 for more details on:

Sensor	Emergency	Accessories
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Vapor Tight

Dimensions

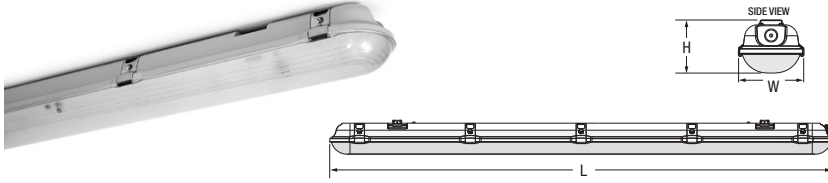

- Corrosion resistant housing with captive stainless steel mounting accessories and included waterproof compression fitting
- IP65/66 rated, ETL sanitation listed for NSF splash zones, and a wide operating temperature of -40°C to 50°C
- Optional integrated microwave (daylight/motion) sensor for additional energy savings

	L	x	W	x	H
2ft (25W):	24.9"	x	4.0"	x	3.3"
4ft (20W):	48.5"	x	3.4"	x	3.3"
4ft (40W):	48.5"	x	4.0"	x	3.3"
4ft (IP66):	49.1"	x	4.0"	x	3.2"

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Total Fixture Lumens*	LPW*
74530	VAPOR1A/025UNVD840/24EC/GR	25	4000K	3100	135
74531	VAPOR1A/025UNVD850/24EC/GR	25	5000K	3100	137
74552	VAPOR1A/050HUV840/48EC/GR	50	4000K	5700	111
74553	VAPOR1A/050HUV850/48EC/GR	50	5000K	5700	111
74536	VAPOR1B/020UNVD840/48EC/GR/D	20	4000K	2600	127
74537	VAPOR1B/020UNVD850/48EC/GR/D	20	5000K	2600	128
74376	VAPOR1B/040UNVD840/48EC/GR	40	4000K	5300	139
74377	VAPOR1B/040UNVD850/48EC/GR	40	5000K	5300	137

* Lumens and LPW based on clear/etched lens. LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.



*DLC Premium only applicable to 25W and 40W versions with clear lens option.

Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
20/25	50W HPS	62	68%/60%
25	2 F17T8	33	24%
25	70W HPS	92	67%
40	2 F32 T8	54	26%
40	70W HPS	91	56%

Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Fixture Spacing (AxB)								
		20'x30'	30'x30'	50'x30'	20'x30'	30'x30'	50'x30'	20'x30'	30'x30'	50'x30'
40W	74376*	6.7fc/5.6	4.1fc/13.7	2.7fc/13.7	6.4fc/4.3	4.0fc/7.9	2.6fc/8.9	6.1fc/3.6	3.8fc/6.3	2.5fc/6.3
	74377	8.2fc/5.8	5.0fc/12.6	3.3fc/17.0	7.9fc/4.4	4.4fc/8.9	3.3fc/10.9	7.5fc/3.6	4.7fc/6.7	3.1fc/7.8

- Illuminance target: 3 footcandles avg.
- Initial illuminance measured at floor
- 20/20/20 reflectances
- Summary table: average initial illuminance/minimum contrast

*Indicates information based on Vapor Tight with diffuse lens

Additional Options


Please see pages 42-67 for more details on:

Sensor	Emergency	Accessories
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Garage



Dimensions



L	x	W	x	H
12.5"	x	12.5"	x	2.32"

- Slim design and optimal light distribution to minimize costs while maintaining performance
- IP66 rated powder coated aluminum construction for weather resistance
- Optional integrated motion/daylight sensor for additional energy savings

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Fixture Lumens	LPW*
74501	GARAG1A/035UNVD740/G5/SV	35	4000K	Garage Type V	4200	123
74502	GARAG1A/035UNVD750/G5/SV	35	5000K	Garage Type V	4200	119
74503	GARAG1A/055UNVD740/G5/SV	55	4000K	Garage Type V	6200	119
74504	GARAG1A/055UNVD750/G5/SV	55	5000K	Garage Type V	6200	118

*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.

Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
35	100W HPS	120	65%
35	150W HPS	170	75%
55	150W HPS	170	66%
55	175W MH	210	72%

Photometric Data

		8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
		On Center Fixture Spacing								
		20'x30'	30'x30'	50'x30'	20'x30'	30'x30'	50'x30'	20'x30'	30'x30'	50'x30'
35W	74501	5.8fc/3.0	3.7fc/7.4	2.5fc/8.2	5.4fc/2.5	3.4fc/4.2	2.3fc/4.6	5.0fc/2.3	3.2fc/2.8	2.1fc/3.0
55W	74503	8.6fc/3.0	5.5fc/6.9	3.6fc/9.0	8.0fc/2.5	5.1fc/4.2	3.4fc/5.0	7.4fc/2.3	4.7fc/3.2	3.2fc/3.2

- Illuminance target: 3 footcandles avg.
- Initial illuminance measured at floor
- 20/20/20 reflectances
- Summary table: average initial illuminance/minimum contrast

*Information based on Garage with glare shield

Additional Options

Please see pages 42-67 for more details on:

- | | | |
|-------------------------------------|--------------------------|-------------------------------------|
| Sensor | Emergency | Accessories |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |




Slim Floodlight



- Lightweight, compact design discretely blends into landscape, flood and signage applications
- Ideal for exterior applications with IP66 rating and wide flood distribution
- High efficacy meets DLC premium requirements to ensure quality and incentive qualifications

Dimensions



	L x W x H
20-30W:	9.1" x 1.6" x 10.5"
50W:	10.6" x 1.6" x 11.3"

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Fixture Lumens	LPW*
74906	SLMFLD1A/020UNV830/WF/BZ	20	3000K	Wide Flood	2000	103
74907	SLMFLD1A/020UNV840/WF/BZ	20	4000K	Wide Flood	2200	111
74908	SLMFLD1A/030UNV840/WF/BZ	30	4000K	Wide Flood	3400	110
74909	SLMFLD1A/030UNV850/WF/BZ	30	5000K	Wide Flood	3500	114
74910	SLMFLD1A/050UNV840/WF/BZ	50	4000K	Wide Flood	6100	119
74911	SLMFLD1A/050UNV850/WF/BZ	50	5000K	Wide Flood	6300	121

*LPW per LM79 report.

Contact your local SYLVANIA Product Distributor for more information.




*DLC Premium is only applicable to 4000K and 5000K versions.

Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
20	70W MH	91	78%
20	150 Q Halogen	150	87%
30	100W MH	130	69%
30	200W Q Halogen	200	85%
50	150W MH	188	73%
50	175W MH	210	76%

FLOOD

Photometric Data

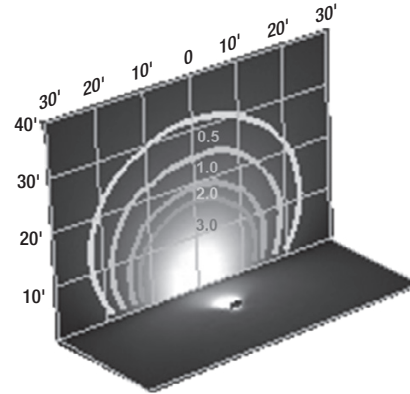

- Illuminance target: 3-5 footcandles avg.
- Fixture mounted at grade; 30° tilt
- Initial illuminance measured at grade
- Direct illuminance only – no reflectance values
- Calculation zone = one fixture MH from the wall

Additional Options


Please see pages 42-67 for more details on:

Sensor Emergency Accessories

Area Light



- Integrated photocontrol receptacle compatible with 3 or 5 pin photosensors
- Slim design with multiple mounting and distribution options
- Energy savings up to 68%

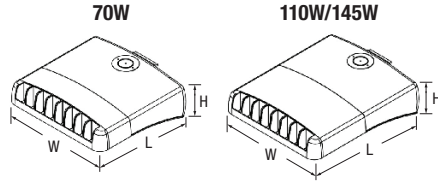

Dimensions

	L	x	W	x	H
70W:	12.2"	x	12.6"	x	4.9"
110W-145W:	15.2"	x	12.6"	x	4.9"

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Fixture Lumens	LPW*
70956	AREAFLD1A/070UNVD840/T3/BZ	70	4000K	Type III	8100	116
71078	AREAFLD1A/070UNVD840/T4/BZ	70	4000K	Type IV	8200	117
71079	AREAFLD1A/070UNVD840/T5/BZ	70	4000K	Type V	8500	121
71153	AREAFLD1A/070UNVD850/T3/BZ	70	5000K	Type III	8600	123
71170	AREAFLD1A/070UNVD850/T4/BZ	70	5000K	Type IV	8700	125
71171	AREAFLD1A/070UNVD850/T5/BZ	70	5000K	Type V	9000	130
60037	AREAFLD1A/110UNVD840/T3/BZ	110	4000K	Type III	12,600	117
60038	AREAFLD1A/110UNVD840/T4/BZ	110	4000K	Type IV	12,700	117
60039	AREAFLD1A/110UNVD840/T5/BZ	110	4000K	Type V	13,300	123
60040	AREAFLD1A/110UNVD850/T3/BZ	110	5000K	Type III	13,300	124
60041	AREAFLD1A/110UNVD850/T4/BZ	110	5000K	Type IV	13,300	125
60042	AREAFLD1A/110UNVD850/T5/BZ	110	5000K	Type V	13,300	124
60031	AREAFLD1A/145UNVD840/T3/BZ	145	4000K	Type III	17,000	116
60032	AREAFLD1A/145UNVD840/T4/BZ	145	4000K	Type IV	17,100	117
60033	AREAFLD1A/145UNVD840/T5/BZ	145	4000K	Type V	17,900	122
60034	AREAFLD1A/145UNVD850/T3/BZ	145	5000K	Type III	17,000	117
60035	AREAFLD1A/145UNVD850/T4/BZ	145	5000K	Type IV	17,000	117
60036	AREAFLD1A/145UNVD850/T5/BZ	145	5000K	Type V	17,900	123

*LPW per LM79 report.


Contact your local SYLVANIA Product Distributor for more information.



Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
70	150W MH	188	63%
70	175W MH	210	67%
110	250W HPS	295	63%
110	250W MH	290	62%
145	320W MH	370	61%
145	400W MH	450	68%

Photometric Data

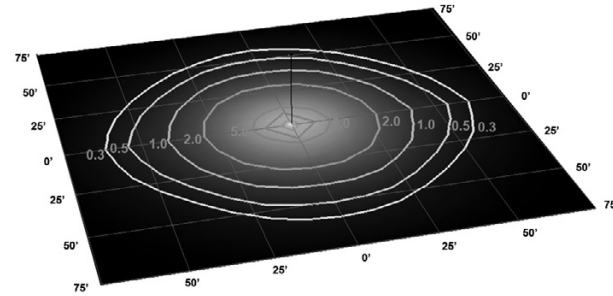

- 145W
- Illuminance target: 1-5 footcandles avg.
- Fixture mounting height: 25 ft.
- Calculation zone = one fixture MH from ground

Additional Options


Please see pages 42-67 for more details on:

- | | | |
|-------------------------------------|--------------------------|-------------------------------------|
| Sensor | Emergency | Accessories |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Slim Wall Pack



Dimensions



L	x	W	x	H
7.5"	x	2.8"	x	8.0"

- Slim, low-profile design for subtle illumination of exterior walls and surfaces
- Available knuckle and trunnion mount accessories enable a family of exterior floodlights (see image above)
- Optional photocell available for greater energy savings

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Fixture		BUG Rating
					Lumens	LPW*	
74340	SLMWPk1A/013UNV740/CO/BZ	13	4000K	Cutoff	1400	113	B1-U0-G1
74341	SLMWPk1A/013UNV750/CO/BZ	13	5000K	Cutoff	1400	113	B1-U0-G1
74192	SLMWPk1A/030UNV740/CO/BZ	30	4000K	Cutoff	2800	92	B1-U0-G1
74195	SLMWPk1A/030UNV750/CO/BZ	30	5000K	Cutoff	2800	84	B1-U0-G1
74193	SLMWPk1A/040UNV740/CO/BZ	40	4000K	Cutoff	4100	99	B2-U0-G1
74196	SLMWPk1A/040UNV750/CO/BZ	40	5000K	Cutoff	3900	98	B2-U0-G1
74194	SLMWPk1A/060UNV740/CO/BZ	60	4000K	Cutoff	5500	94	B2-U0-G1
74197	SLMWPk1A/060UNV750/CO/BZ	60	5000K	Cutoff	5100	83	B2-U0-G1
72966	SLMWPk1A/030347750/CO/BZ	30	5000K	Cutoff	3400	109	B1-U0-G1
72992	SLMWPk1A/040347750/CO/BZ	40	5000K	Cutoff	4300	104	B2-U0-G1
74381	SLMWPk2A/030UNV750/CO/BZ	30	5000K	Cutoff	3300	112	B1-U0-G1
74380	SLMWPk2A/060UNV740/CO/BZ	60	4000K	Cutoff	7000	117	B2-U0-G1
74382	SLMWPk2A/060UNV750/CO/BZ	60	5000K	Cutoff	7200	121	B2-U0-G1

*LPW per LM79 report.


Contact your local SYLVANIA Product Distributor for more information.



Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
13	100W Inc	100	87%
30	70W HPS	91	67%
40	100W MH	130	69%
60	175W MH	210	71%

Photometric Data

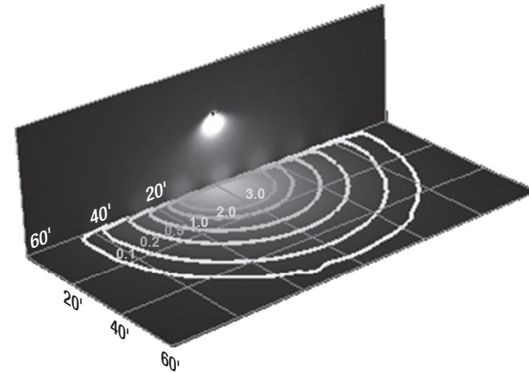

- Illuminance target: 1-3 footcandles avg.
- Fixture mounting height = bottom of fixture to ground
- Initial illuminance measured at grade
- Direct illuminance only – no reflectance values
- Calculation zone = one fixture MH from the wall

Additional Options

Please see pages 42-67 for more details on:


- | | | |
|-------------------------------------|--------------------------|-------------------------------------|
| Sensor | Emergency | Accessories |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Wall Pack Cutoff



- Traditional or sleek housing and optics designed to maximize spacing and improve light distribution
- Traditional backplate with hinged housing cover and knockouts for easy installation
- High efficacy meets DLC standard or premium requirements to ensure quality and incentive qualifications

Dimensions

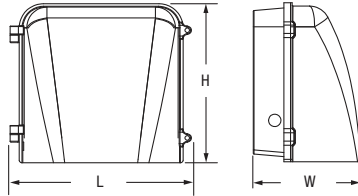

	L	x	W	x	H
1C	12.6"	x	11.4"	x	9.5"
2C	14.3"	x	5.7"	x	9.3"

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Fixture Lumens	LPW*	BUG Rating
74186	WALPAK1C/036UNV740/CO/BZ	36	4000K	Cutoff	3300	92	B1-U0-G1
74189	WALPAK1C/036UNV750/CO/BZ	36	5000K	Cutoff	2900	82	B1-U0-G1
74187	WALPAK1C/050UNV740/CO/BZ	50	4000K	Cutoff	5200	107	B2-U0-G1
74190	WALPAK1C/050UNV750/CO/BZ	50	5000K	Cutoff	5000	102	B2-U0-G1
74191	WALPAK1C/075UNV750/CO/BZ	75	5000K	Cutoff	6400	88	B2-U0-G1
72993	WALPAK1C/040347750/CO/BZ	40	5000K	Cutoff	4500	107	B1-U0-G1
72994	WALPAK1C/055347750/CO/BZ	55	5000K	Cutoff	5500	101	B2-U0-G1
72995	WALPAK1C/080347750/CO/BZ	80	5000K	Cutoff	8900	113	B2-U0-G1
74912	WALPAK2C/030UNV740/CO/BZ	30	4000K	Cutoff	3800	135	B2-U1-G1
74915	WALPAK2C/030UNV750/CO/BZ	30	5000K	Cutoff	3800	135	B2-U1-G1
74913	WALPAK2C/050UNV740/CO/BZ	50	4000K	Cutoff	6200	126	B2-U1-G2
74916	WALPAK2C/050UNV750/CO/BZ	50	5000K	Cutoff	6300	128	B2-U1-G2
74914	WALPAK2C/075UNV740/CO/BZ	75	4000K	Cutoff	9000	120	B3-U1-G2
74917	WALPAK2C/075UNV750/CO/BZ	75	5000K	Cutoff	9100	121	B3-U1-G2

*LPW per LM79 report.


Contact your local SYLVANIA Product Distributor for more information.



Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
30 / 40	70W HPS	91	67% / 56%
30 / 40	100W MH	130	77% / 69%
50 / 55	150W HPS	170	71% / 68%
50 / 55	175W MH	210	76% / 74%
75 / 80	175W MH	210	64% / 62%
75 / 80	250W HPS	295	75% / 73%

Photometric Data

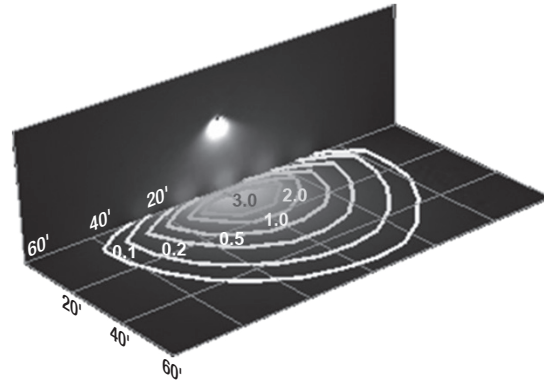

- Illuminance target: 1-3 footcandles avg.
- Fixture mounting height = bottom of fixture to ground
- Initial illuminance measured at grade
- Direct illuminance only – no reflectance values
- Calculation zone = one fixture MH from the wall

Additional Options


Please see pages 42-67 for more details on:

- | | | |
|-------------------------------------|-------------------------------------|-------------------------------------|
| Sensor | Emergency | Accessories |
| <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

Wall Pack Non-Cutoff



Dimensions

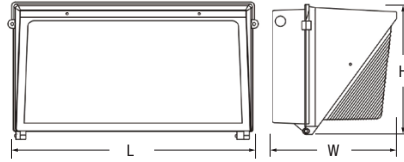

	L x W x H
1N/2N	14.4" x 7.1" x 9.3"
3N	18" x 9.4" x 9.8"

- Traditional design enables quick and easy update of existing installations
- Multiple output levels allowing up to 400W MH replacement
- Optional photocell available for greater energy savings

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Color Temp (CCT)	Distribution	Total Fixture Lumens	LPW*	BUG Rating
74201	WALPAK1N/036UNV750/NC/BZ	36	5000K	Type IV	3300	95	B1-U3-G3
74202	WALPAK1N/050UNV750/NC/BZ	50	5000K	Type IV	5300	108	B1-U4-G3
74203	WALPAK1N/075UNV750/NC/BZ	75	5000K	Type IV	8600	115	B1-U5-G5
72996	WALPAK1N/040347750/NC/BZ	40	5000K	Type IV	4300	102	B1-U4-G3
72997	WALPAK1N/055347750/NC/BZ	55	5000K	Type IV	6300	108	B1-U4-G3
72998	WALPAK1N/080347750/NC/BZ	80	5000K	Type IV	9400	120	B1-U5-G5
74386	WALPAK2N/030UNV740/NC/BZ	30	4000K	Type IV	3400	122	B1-U4-G3
74482	WALPAK2N/030UNV750/NC/BZ	30	5000K	Type IV	3500	125	B1-U3-G3
74485	WALPAK2N/050UNV740/NC/BZ	50	4000K	Type IV	5500	113	B1-U4-G3
74486	WALPAK2N/050UNV750/NC/BZ	50	5000K	Type IV	5600	116	B1-U4-G3
74489	WALPAK2N/075UNV740/NC/BZ	75	4000K	Type IV	8900	118	B1-U5-G5
74490	WALPAK2N/075UNV750/NC/BZ	75	5000K	Type IV	9200	121	B1-U5-G5
74528	WALPAK3N/105UNV740/NC/BZ	105	4000K	Type IV	12,500	119	B3-U4-G4
74529	WALPAK3N/105UNV750/NC/BZ	105	5000K	Type IV	12,400	118	B2-U4-G5

*LPW per LM79 report.


Contact your local SYLVANIA Product Distributor for more information.



Wattage Comparison Chart

LED System Wattage	Traditional Source	Traditional System Wattage	Energy Savings
30 / 40	100W HPS	120	75% / 67%
30 / 40	100W MH	130	77% / 69%
50 / 55	150W HPS	170	71% / 68%
50 / 55	175W MH	210	76% / 74%
75 / 80	175W MH	210	64% / 62%
75 / 80	250W HPS	295	75% / 73%
105	320W MH	370	72%
105	400W HPS	460	77%

Photometric Data

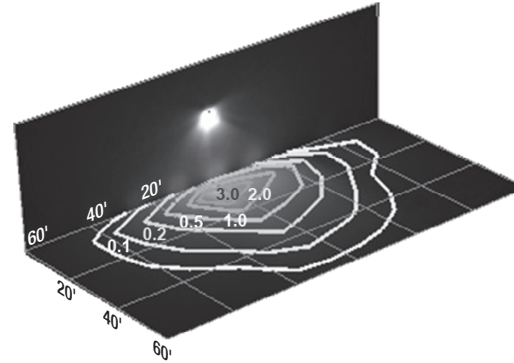

- Illuminance target: 1-3 footcandles avg.
- Fixture mounting height = bottom of fixture to ground
- Initial illuminance measured at grade
- Direct illuminance only – no reflectance values
- Calculation zone = one fixture MH from the wall

Additional Options

Please see pages 42-67 for more details on:

- | | | |
|-------------------------------------|-------------------------------------|-------------------------------------|
| Sensor | Emergency | Accessories |
| <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

Product Ordering Guide

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR	
Edge-Lit Panel	74243	PANELF1A/032UNVD835/14G/WH	32	0-10	835	47.8" x 11.8" x 1.7"	3,200	102	≥50,000	Dry	2x32W T8	-	Standard	
	74244	PANELF1A/032UNVD840/14G/WH	32	0-10	840	47.8" x 11.8" x 1.7"	3,300	104	≥50,000	Dry	2x32W T8	-	Standard	
	74251	PANELF1A/032UNVD835/22G/WH	32	0-10	835	23.8" x 23.8" x 1.7"	3,500	110	≥50,000	Dry	2x32W T8	-	Standard	
	74252	PANELF1A/032UNVD840/22G/WH	32	0-10	840	23.8" x 23.8" x 1.7"	3,500	110	≥50,000	Dry	2x32W T8	-	Standard	
	74247	PANELF1A/032UNVD835/24G/WH	32	0-10	835	47.8" x 23.8" x 1.7"	3,300	104	≥50,000	Dry	2x32W T8	-	Standard	
	74248	PANELF1A/032UNVD840/24G/WH	32	0-10	840	47.8" x 23.8" x 1.7"	3,300	104	≥50,000	Dry	2x32W T8	-	Standard	
	74249	PANELF1A/040UNVD835/24G/WH	40	0-10	835	47.8" x 23.8" x 1.7"	4,200	109	≥50,000	Dry	3x32W T8	-	Standard	
	74250	PANELF1A/040UNVD840/24G/WH	40	0-10	840	47.8" x 23.8" x 1.7"	4,200	110	≥50,000	Dry	3x32W T8	-	Standard	
	74245	PANELF1A/032UNVD835/14G/WH/E	32	0-10	835	47.8" x 11.8" x 1.7"	3,200	102	≥50,000	Dry	2x32W T8	E	-	
	74246	PANELF1A/032UNVD840/14G/WH/E	32	0-10	840	47.8" x 11.8" x 1.7"	3,300	104	≥50,000	Dry	2x32W T8	E	-	
	74253	PANELF1A/032UNVD835/22G/WH/E	32	0-10	835	23.8" x 23.8" x 1.7"	3,500	110	≥50,000	Dry	2x32W T8	E	-	
	74254	PANELF1A/032UNVD840/22G/WH/E	32	0-10	840	23.8" x 23.8" x 1.7"	3,500	110	≥50,000	Dry	2x32W T8	E	-	
	74239	PANELF1A/032UNVD835/24G/WH/E	32	0-10	835	47.8" x 23.8" x 1.7"	3,300	104	≥50,000	Dry	2x32W T8	E	-	
	74240	PANELF1A/032UNVD840/24G/WH/E	32	0-10	840	47.8" x 23.8" x 1.7"	3,300	104	≥50,000	Dry	2x32W T8	E	-	
	74241	PANELF1A/040UNVD835/24G/WH/E	40	0-10	835	47.8" x 23.8" x 1.7"	4,200	109	≥50,000	Dry	3x32W T8	E	-	
	74242	PANELF1A/040UNVD840/24G/WH/E	40	0-10	840	47.8" x 23.8" x 1.7"	4,200	110	≥50,000	Dry	3x32W T8	E	-	
	74938	PANELF1A/032UNVD850/14G/WH	32	0-10	850	47.8" x 11.8" x 1.7"	3,400	110	≥50,000	Damp	2x32W T8	-	-	
	74935	PANELF1A/032UNVD850/24G/WH	32	0-10	850	47.8" x 23.8" x 1.7"	3,500	112	≥50,000	Damp	2x32W T8	-	-	
	74934	PANELF1A/040UNVD850/24G/WH	40	0-10	850	47.8" x 23.8" x 1.7"	4,300	113	≥50,000	Damp	3x32W T8	-	-	
	74797	PANELF1A/032UNVD850/22G/WH	32	0-10	850	23.8" x 23.8" x 1.7"	3,500	114	≥50,000	Damp	2x32W T8	-	-	
	74939	PANELF1A/032UNVD850/14G/WH/E	32	0-10	850	47.8" x 11.8" x 1.7"	3,300	104	≥50,000	Damp	2x32W T8	E	-	
	74937	PANELF1A/032UNVD850/24G/WH/E	32	0-10	850	47.8" x 23.8" x 1.7"	3,300	104	≥50,000	Damp	2x32W T8	E	-	
	74936	PANELF1A/040UNVD850/24G/WH/E	40	0-10	850	47.8" x 23.8" x 1.7"	4,200	110	≥50,000	Damp	3x32W T8	E	-	
	74798	PANELF1A/032UNVD850/22G/WH/E	32	0-10	850	23.8" x 23.8" x 1.7"	3,500	110	≥50,000	Damp	2x32W T8	E	-	
	Volumetric Troffer	74352	VOLUME1A/035UNVD835/22G/WH	35	0-10	835	23.7" x 23.7" x 3.5"	3,500	107	≥100,000	Wet	3x17W T8/2U31 T8	-	Standard
		74353	VOLUME1A/035UNVD840/22G/WH	35	0-10	840	23.7" x 23.7" x 3.5"	3,600	113	≥100,000	Wet	3x17W T8/2U31 T8	-	Standard
74441		VOLUME1A/042UNVD835/24G/WH	42	0-10	835	47.7" x 23.7" x 3.5"	4,400	103	≥100,000	Wet	2x32W T8	-	Standard	
74442		VOLUME1A/042UNVD840/24G/WH	42	0-10	840	47.7" x 23.7" x 3.5"	4,400	103	≥100,000	Wet	2x32W T8	-	Standard	
71725		VOLUME2A/025UNVD835/22G/WH	25	0-10	835	23.7" x 23.7" x 3.5"	3,200	134	≥70,000	Wet	3x17W T8/2U31 T8	-	Premium	
71726		VOLUME2A/025UNVD840/22G/WH	25	0-10	840	23.7" x 23.7" x 3.5"	3,300	136	≥70,000	Wet	3x17W T8/2U31 T8	-	Premium	
74309		VOLUME2A/035UNVD835/24G/WH	35	0-10	835	47.7" x 23.7" x 3.5"	4,600	135	≥70,000	Wet	2x32W T8	-	Premium	
74348		VOLUME2A/035UNVD840/24G/WH	35	0-10	840	47.7" x 23.7" x 3.5"	4,600	138	≥70,000	Wet	2x32W T8	-	Premium	

*LPW per LM79 report
 **Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order
 Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
	74354	VOLUME1A/035UNVD835/22G/WH/E	35	0-10	835	23.7" x 23.7" x 3.5"	3,500	107	≥100,000	Wet	3x17W T8/2U31 T8	E	Standard
	74355	VOLUME1A/035UNVD840/22G/WH/E	35	0-10	840	23.7" x 23.7" x 3.5"	3,600	113	≥100,000	Wet	3x17W T8/2U31 T8	E	Standard
	74443	VOLUME1A/042UNVD835/24G/WH/E	42	0-10	835	47.7" x 23.7" x 3.5"	4,400	103	≥100,000	Wet	2x32W T8	E	Standard
	74444	VOLUME1A/042UNVD840/24G/WH/E	42	0-10	840	47.7" x 23.7" x 3.5"	4,400	103	≥100,000	Wet	2x32W T8	E	Standard
	71727	VOLUME2A/025UNVD835/22G/WH/E	25	0-10	835	23.7" x 23.7" x 3.5"	3,200	134	≥70,000	Wet	3x17W T8/2U31 T8	E	Premium
	71728	VOLUME2A/025UNVD840/22G/WH/E	25	0-10	840	23.7" x 23.7" x 3.5"	3,300	136	≥70,000	Wet	3x17W T8/2U31 T8	E	Premium
	74349	VOLUME2A/035UNVD835/24G/WH/E	35	0-10	835	47.7" x 23.7" x 3.5"	4,600	135	≥70,000	Wet	2x32W T8	E	Premium
	74356	VOLUME2A/035UNVD840/24G/WH/E	35	0-10	840	47.7" x 23.7" x 3.5"	4,600	138	≥70,000	Wet	2x32W T8	E	Premium
Troffer Retrofit Kit	75460	LEDR/TROFF/2L/024/UNV/D/830/22/WH	24	0-10	830	20.3" x 14.8" x 1.7"	3,000	125	≥50,000	Damp	3x17W T8/2U31 T8	-	Standard
	75461	LEDR/TROFF/2L/024/UNV/D/835/22/WH	24	0-10	835	20.3" x 14.8" x 1.7"	3,000	125	≥50,000	Damp	3x17W T8/2U31 T8	-	Standard
	75462	LEDR/TROFF/2L/024/UNV/D/840/22/WH	24	0-10	840	20.3" x 14.8" x 1.7"	3,000	125	≥50,000	Damp	3x17W T8/2U31 T8	-	Standard
	75463	LEDR/TROFF/2L/024/UNV/D/850/22/WH	24	0-10	850	20.3" x 14.8" x 1.7"	3,000	125	≥50,000	Damp	3x17W T8/2U31 T8	-	Standard
	75431	LEDR/TROFF/3L/026/UNV/D/830/22/WH	26	0-10	830	20.3" x 14.8" x 1.7"	3,200	123	≥50,000	Damp	3x17W T8/2U31 T8	-	Standard
	75432	LEDR/TROFF/3L/026/UNV/D/835/22/WH	26	0-10	835	20.3" x 14.8" x 1.7"	3,200	123	≥50,000	Damp	3x17W T8/2U31 T8	-	Standard
	75433	LEDR/TROFF/3L/026/UNV/D/840/22/WH	26	0-10	840	20.3" x 14.8" x 1.7"	3,200	123	≥50,000	Damp	3x17W T8/2U31 T8	-	Standard
	75434	LEDR/TROFF/3L/026/UNV/D/850/22/WH	26	0-10	850	20.3" x 14.8" x 1.7"	3,200	123	≥50,000	Damp	3x17W T8/2U31 T8	-	Standard
	75276	LEDR/TROFF/2L/027/UNV/D/830/22/WH	27	0-10	830	20.3" x 14.8" x 1.7"	3,000	111	≥50,000	Damp	3x17W T8/2U31 T8	-	-
	75277	LEDR/TROFF/2L/027/UNV/D/835/22/WH	27	0-10	835	20.3" x 14.8" x 1.7"	3,000	111	≥50,000	Damp	3x17W T8/2U31 T8	-	-
	75278	LEDR/TROFF/2L/027/UNV/D/840/22/WH	27	0-10	840	20.3" x 14.8" x 1.7"	3,000	111	≥50,000	Damp	3x17W T8/2U31 T8	-	-
	75279	LEDR/TROFF/2L/027/UNV/D/850/22/WH	27	0-10	850	20.3" x 14.8" x 1.7"	3,000	111	≥50,000	Damp	3x17W T8/2U31 T8	-	-
	75427	LEDR/TROFF/2L/027/UNV/D/830/24/WH	27	0-10	830	43.7" x 14.8" x 1.7"	3,200	119	≥50,000	Damp	3x32W T8	-	Standard
	75428	LEDR/TROFF/2L/027/UNV/D/835/24/WH	27	0-10	835	43.7" x 14.8" x 1.7"	3,200	119	≥50,000	Damp	3x32W T8	-	Standard
	75429	LEDR/TROFF/2L/027/UNV/D/840/24/WH	27	0-10	840	43.7" x 14.8" x 1.7"	3,200	119	≥50,000	Damp	3x32W T8	-	Standard
	75430	LEDR/TROFF/2L/027/UNV/D/850/24/WH	27	0-10	850	43.7" x 14.8" x 1.7"	3,200	119	≥50,000	Damp	3x32W T8	-	Standard
	75056	LEDR/TROFF/3L/029/UNV/D/830/22/WH	29	0-10	830	20.3" x 14.8" x 1.7"	3,200	110	≥50,000	Damp	3x17W T8/2U31 T8	-	-
	75057	LEDR/TROFF/3L/029/UNV/D/835/22/WH	29	0-10	835	20.3" x 14.8" x 1.7"	3,200	110	≥50,000	Damp	3x17W T8/2U31 T8	-	-
	75058	LEDR/TROFF/3L/029/UNV/D/840/22/WH	29	0-10	840	20.3" x 14.8" x 1.7"	3,200	110	≥50,000	Damp	3x17W T8/2U31 T8	-	-
	75059	LEDR/TROFF/3L/029/UNV/D/850/22/WH	29	0-10	850	20.3" x 14.8" x 1.7"	3,200	110	≥50,000	Damp	3x17W T8/2U31 T8	-	-
	75051	LEDR/TROFF/2L/029/UNV/D/830/24/WH	29	0-10	830	43.7" x 14.8" x 1.7"	3,200	110	≥50,000	Damp	3x32W T8	-	-
	75052	LEDR/TROFF/2L/029/UNV/D/835/24/WH	29	0-10	835	43.7" x 14.8" x 1.7"	3,200	110	≥50,000	Damp	3x32W T8	-	-
	75053	LEDR/TROFF/2L/029/UNV/D/840/24/WH	29	0-10	840	43.7" x 14.8" x 1.7"	3,200	110	≥50,000	Damp	3x32W T8	-	-

*LPW per LM79 report
**Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order
Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
	75054	LEDR/TROFF/2L/029/UNV/D/850/24/WH	29	0-10	850	43.7" x 14.8" x 1.7"	3,200	110	≥50,000	Damp	3x32W T8	-	-
	75496	LEDR/TROFF/3L/040/UNV/D/830/24/WH	40	0-10	830	43.7" x 14.8" x 1.7"	4,800	120	≥50,000	Damp	3x32W T8	-	Standard
	75497	LEDR/TROFF/3L/040/UNV/D/835/24/WH	40	0-10	835	43.7" x 14.8" x 1.7"	4,800	120	≥50,000	Damp	3x32W T8	-	Standard
	75498	LEDR/TROFF/3L/040/UNV/D/840/24/WH	40	0-10	840	43.7" x 14.8" x 1.7"	4,800	120	≥50,000	Damp	3x32W T8	-	Standard
	75499	LEDR/TROFF/3L/040/UNV/D/850/24/WH	40	0-10	850	43.7" x 14.8" x 1.7"	4,800	120	≥50,000	Damp	3x32W T8	-	Standard
	75234	LEDR/TROFF/3L/044/UNV/D/830/24/WH	44	0-10	830	43.7" x 14.8" x 1.7"	4,850	110	≥50,000	Damp	3x32W T8	-	-
	75235	LEDR/TROFF/3L/044/UNV/D/835/24/WH	44	0-10	835	43.7" x 14.8" x 1.7"	4,850	110	≥50,000	Damp	3x32W T8	-	-
	75236	LEDR/TROFF/3L/044/UNV/D/840/24/WH	44	0-10	840	43.7" x 14.8" x 1.7"	4,850	110	≥50,000	Damp	3x32W T8	-	-
	75237	LEDR/TROFF/3L/044/UNV/D/850/24/WH	44	0-10	850	43.7" x 14.8" x 1.7"	4,850	110	≥50,000	Damp	3x32W T8	-	-
Strip	70525	STRIP1A/016UNVD835/24S/WH	16	0-10	835	24.1" x 2.48" x 3.13"	2,000	124	≥50,000	Damp	1x32W	-	Standard
	70526	STRIP1A/016UNVD840/24S/WH	16	0-10	840	24.1" x 2.48" x 3.13"	1,900	119	≥50,000	Damp	1x32W	-	Standard
	70527	STRIP1A/016UNVD850/24S/WH	16	0-10	850	24.1" x 2.48" x 3.13"	2,000	122	≥50,000	Damp	1x32W	-	Standard
	74774	STRIP1A/032UNVD835/48S/WH	32	0-10	835	47.30" x 2.48" x 3.13"	3,900	121	≥50,000	Damp	2x32W	-	Standard
	74775	STRIP1A/032UNVD840/48S/WH	32	0-10	840	47.30" x 2.48" x 3.13"	4,000	127	≥50,000	Damp	2x32W	-	Standard
	74776	STRIP1A/032UNVD850/48S/WH	32	0-10	850	47.30" x 2.48" x 3.13"	4,000	124	≥50,000	Damp	2x32W	-	Standard
	70522	STRIP1A/047UNVD835/48S/WH	47	0-10	835	47.30" x 2.48" x 3.13"	5,900	123	≥50,000	Damp	3x32W	-	Standard
	70523	STRIP1A/047UNVD840/48S/WH	47	0-10	840	47.30" x 2.48" x 3.13"	6,200	126	≥50,000	Damp	3x32W	-	Standard
	70524	STRIP1A/047UNVD850/48S/WH	47	0-10	850	47.30" x 2.48" x 3.13"	6,000	124	≥50,000	Damp	3x32W	-	Standard
Slim Downlight	60003	SLMDNLR1A/010UNVT827/06J/WH	10	Phase-cut	827	6" x 1.56"	600	60	≥50,000	Damp	-	-	E-Star
	60004	SLMDNLR1A/010UNVT830/06J/WH	10	Phase-cut	830	6" x 1.56"	650	65	≥50,000	Damp	-	-	E-Star
	60005	SLMDNLR1A/010UNVT840/06J/WH	10	Phase-cut	840	6" x 1.56"	650	65	≥50,000	Damp	-	-	E-Star
	60058	SLMDNLR1A/014UNVT827/08J/WH	14	Phase-cut	827	8" x 1.57"	1,000	71	≥50,000	Damp	-	-	E-Star
	60057	SLMDNLR1A/014UNVT830/08J/WH	14	Phase-cut	830	8" x 1.57"	1,050	75	≥50,000	Damp	-	-	E-Star
	60056	SLMDNLR1A/014UNVT840/08J/WH	14	Phase-cut	840	8" x 1.57"	1,000	71	≥50,000	Damp	-	-	E-Star
MICRODISK	75030	LED/MD4/700/830/UNV	8	0-10	830	5.19" x 1.0"	700	87	50,000	Wet	65W Incandescent	T, TE	E-Star
	71196	LED/MD4/700/840/UNV	8	0-10	840	5.19" x 1.0"	700	87	50,000	Wet	65W Incandescent	T, TE	E-Star
	75031	LED/MD4/700/850/UNV	8	0-10	850	5.19" x 1.0"	700	87	50,000	Wet	65W Incandescent	T, TE	E-Star
	75032	LED/MD6/1100/830/UNV	13	0-10	830	7.32" x 1.0"	1,100	85	50,000	Wet	100W Incandescent	T, TE	E-Star
	71197	LED/MD6/1100/840/UNV	13	0-10	840	7.32" x 1.0"	1,100	85	50,000	Wet	100W Incandescent	T, TE	E-Star
	75033	LED/MD6/1100/850/UNV	13	0-10	850	7.32" x 1.0"	1,100	85	50,000	Wet	100W Incandescent	T, TE	E-Star

*LPW per LM79 report

**Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	
ULTRA LED RT8	72503	LED/RT8/2000/830	27	0-10	830	9.25" x 5.31"	
	74466	LED/RT8/2000/830	24	0-10	830	9.25" x 5.31"	
	72504	LED/RT8/2000/835	27	0-10	835	9.25" x 5.31"	
	74467	LED/RT8/2000/835	24	0-10	835	9.25" x 5.31"	
	74468	LED/RT8/2000/840	24	0-10	840	9.25" x 5.31"	
	75397	LED/RT8/2000/830/347V	23	-	830	9.25" x 5.31"	
	75398	LED/RT8/2000/840/347V	23	-	840	9.25" x 5.31"	
	75399	LED/RT8/2000/850/347V	23	-	850	9.25" x 5.31"	
	72625	LEDRT8/3000/930	40	0-10	930	9.45" x 4.88"	
	72626	LEDRT8/3000/935	40	0-10	935	9.45" x 4.88"	
	72628	LEDRT8/3000/940	40	0-10	940	9.45" x 4.88"	
	79740	LEDRT8/5000/830	54	0-10	830	9.45" x 5.51"	
	79741	LEDRT8/5000/835	54	0-10	835	9.45" x 5.51"	
	79742	LEDRT8/5000/840	54	0-10	840	9.45" x 5.51"	
	75435	LED/RT8/5000/840/347V	50	-	840	9.45" x 5.51"	
	79754	LED/RT8/8000/830	92	0-10	830	9.45" x 5.51"	
	79755	LED/RT8/8000/835	92	0-10	835	9.45" x 5.51"	
	79756	LED/RT8/8000/840	92	0-10	840	9.45" x 5.51"	
	ULTRA LED RT5/6	75331	LED/RT5/6/650/930	9	Phase-cut	930	7.36" x 3.46"
		75332	LED/RT5/6/650/940	9	Phase-cut	940	7.36" x 3.46"
75228		LED/RT5/6/HO/700/827	8	Phase-cut	827	7.36" x 3.46"	
75229		LED/RT5/6/HO/700/830	8	Phase-cut	830	7.36" x 3.46"	
75230		LED/RT5/6/HO/700/835	8	Phase-cut	835	7.36" x 3.46"	
75231		LED/RT5/6/HO/700/840	8	Phase-cut	840	7.36" x 3.46"	
74928		LED/RTQ5/6/900/927	13	Phase-cut	927	7.32" x 3.27"	
74929		LED/RTQ5/6/900/930	13	Phase-cut	930	7.32" x 3.27"	
74930		LED/RTQ5/6/900/940	13	Phase-cut	940	7.32" x 3.27"	
74931		LED/RTQ5/6/900/950	13	Phase-cut	950	7.32" x 3.27"	
75137		LED/RT5/6/HO/900/827	13	0-10	827	7.36" x 3.46"	
75138		LED/RT5/6/HO/900/830	13	0-10	830	7.36" x 3.46"	
75140		LED/RT5/6/HO/900/835	13	0-10	835	7.36" x 3.46"	

Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
2,000	74	50,000	Wet	2 x 26W CFL	T, TE	E-Star
2,000	83	50,000	Wet	2 x 26W CFL	T, TE	E-Star
2,000	74	50,000	Wet	2 x 26W CFL	T, TE	E-Star
2,000	83	50,000	Wet	2 x 26W CFL	T, TE	E-Star
2,000	83	50,000	Wet	2 x 26W CFL	T, TE	E-Star
2,000	86	50,000	Wet	2 x 26W CFL	T, TE	E-Star
2,000	86	50,000	Wet	2 x 26W CFL	T, TE	E-Star
2,000	86	50,000	Wet	2 x 26W CFL	T, TE	E-Star
3,000	75	50,000	Wet	2 x 26W CFL	T, TE	E-Star
3,000	75	50,000	Wet	2 x 26W CFL	T, TE	E-Star
3,000	75	50,000	Wet	2 x 26W CFL	T, TE	E-Star
5,000	92	50,000	Wet	2 x 26W CFL	T, TE	E-Star
5,000	92	50,000	Wet	2 x 26W CFL	T, TE	E-Star
5,000	92	50,000	Wet	2 x 26W CFL	T, TE	E-Star
5,000	100	50,000	Wet	2 x 26W CFL	T, TE	E-Star
8,000	87	50,000	Wet	150W HPS/175W MH	T, TE	E-Star
8,000	87	50,000	Wet	150W HPS/175W MH	T, TE	E-Star
8,000	87	50,000	Wet	150W HPS/175W MH	T, TE	E-Star
650	72	50,000	Wet	13W CFL	T, TE	E-Star
650	72	50,000	Wet	13W CFL	T, TE	E-Star
700	87	50,000	Wet	13W CFL	T, TE	E-Star
700	87	50,000	Wet	13W CFL	T, TE	E-Star
700	87	50,000	Wet	13W CFL	T, TE	E-Star
700	87	50,000	Wet	13W CFL	T, TE	E-Star
900	69	50,000	Wet	75WBR40	T	E-Star
900	69	50,000	Wet	75WBR40	T	E-Star
900	69	50,000	Wet	75WBR40	T	E-Star
900	69	50,000	Wet	75WBR40	T	E-Star
900	69	50,000	Wet	18W CFL	T, TE	E-Star
900	69	50,000	Wet	18W CFL	T, TE	E-Star
900	69	50,000	Wet	18W CFL	T, TE	E-Star

*LPW per LM79 report
 **Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order
 Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions
	75139	LED/RT5/6/HO/900/840	13	0-10	840	7.36" x 3.46"
	75327	LED/RT5/6/HO/900/840/347V	13	-	840	7.36" x 3.46"
	72528	LEDRT5/6/1500/HO/830	17	0-10	830	9.25" x 4.31"
	72529	LEDRT5/6/1500/HO/835	17	0-10	835	9.25" x 4.31"
	72530	LEDRT5/6/1500/HO/840	17	0-10	840	9.25" x 4.31"
	75328	LED/RT5/6/HO/1500/840/347V	17	-	840	9.25" x 4.31"
	74404	LED/RT5/6/625/827	9	Phase-cut	827	5.04" x 3.18"
	74405	LED/RT5/6/625/830	9	Phase-cut	830	5.04" x 3.18"
	74406	LED/RT5/6/625/840	9	Phase-cut	840	5.04" x 3.18"
	74407	LED/RT5/6/625/850	9	Phase-cut	850	5.04" x 3.18"
	74290	LED/RT5/6/700/927/FL80	10	Phase-cut	927	5.04" x 3.18"
	74291	LED/RT5/6/700/930/FL80	10	Phase-cut	930	5.04" x 3.18"
	74292	LED/RT5/6/700/940/FL80	10	Phase-cut	940	5.04" x 3.18"
	74293	LED/RT5/6/700/950/FL80	10	Phase-cut	950	5.04" x 3.18"
	74294	LED/RT5/6/900/927/FL80	13	Phase-cut	927	5.04" x 3.18"
	74295	LED/RT5/6/900/930/FL80	13	Phase-cut	930	5.04" x 3.18"
	74296	LED/RT5/6/900/930/RP	13	Phase-cut	930	5.04" x 3.18"
	74297	LED/RT5/6/900/950/RP	13	Phase-cut	950	5.04" x 3.18"
	73466	LEDRT5/6/G/900/827/FL80/RP	13	Phase-cut	827	5.04" x 3.18"
	73467	LEDRT5/6/G/900/830	13	Phase-cut	830	5.04" x 3.18"
	79750	LED/RT5/6/1200/927	16	Phase-cut	927	5.04" x 3.18"
	79751	LED/RT5/6/1200/930	16	Phase-cut	930	5.04" x 3.18"
	79752	LED/RT5/6/1200/930RP	16	Phase-cut	930	5.04" x 3.18"
	79753	LED/RT5/6/1200/940	16	Phase-cut	940	5.04" x 3.18"
ULTRA LED RT4	70520	LED/RT4/550/827	8	Phase-cut	827	5.04" x 3.18"
	70521	LED/RT4/550/830	8	Phase-cut	830	5.04" x 3.18"
	74181	LED/RT4/550/840	8	Phase-cut	840	5.04" x 3.18"
	74182	LED/RT4/550/850	8	Phase-cut	850	5.04" x 3.18"
	74925	LED/RTQ4/600/927	9	Phase-cut	927	7.32" x 3.12"
	74924	LED/RTQ4/600/930	9	Phase-cut	930	7.32" x 3.12"
	74926	LED/RTQ4/600/940	9	Phase-cut	940	7.32" x 3.12"
	74927	LED/RTQ4/600/950	9	Phase-cut	950	7.32" x 3.12"

*LPW per LM79 report
 **Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order
 Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
900	69	50,000	Wet	18W CFL	T, TE	E-Star
900	69	50,000	Wet	18W CFL	T, TE	E-Star
1,500	88	50,000	Wet	32W CFL	T, TE	E-Star
1,500	88	50,000	Wet	32W CFL	T, TE	E-Star
1,500	88	50,000	Wet	32W CFL	T, TE	E-Star
1,500	88	50,000	Wet	32W CFL	T, TE	E-Star
625	69	11,000	Wet	50W Incandescent	T, TE	E-Star
625	69	11,000	Wet	50W Incandescent	T, TE	E-Star
625	69	11,000	Wet	50W Incandescent	T, TE	E-Star
625	69	11,000	Wet	50W Incandescent	T, TE	E-Star
700	70	50,000	Wet	65W Incandescent	T, TE	E-Star
700	70	50,000	Wet	65W Incandescent	T, TE	E-Star
700	70	50,000	Wet	65W Incandescent	T, TE	E-Star
700	70	50,000	Wet	65W Incandescent	T, TE	E-Star
900	69	50,000	Wet	75W Incandescent	T, TE	E-Star
900	69	50,000	Wet	75W Incandescent	T, TE	E-Star
900	69	50,000	Wet	75W Incandescent	T, TE	E-Star
900	69	50,000	Wet	75W Incandescent	T, TE	E-Star
1,200	75	50,000	Wet	100W Incandescent	T, TE	E-Star
1,200	75	50,000	Wet	100W Incandescent	T, TE	E-Star
1,200	75	50,000	Wet	100W Incandescent	T, TE	E-Star
1,200	75	50,000	Wet	100W Incandescent	T, TE	E-Star
550	69	11,000	Wet	50W Incandescent	T	E-Star
550	69	11,000	Wet	50W Incandescent	T	E-Star
550	69	11,000	Wet	50W Incandescent	T	E-Star
550	69	11,000	Wet	50W Incandescent	T	E-Star
600	66	50,000	Wet	65WBR30	T	E-Star
600	66	50,000	Wet	65WBR30	T	E-Star
600	66	50,000	Wet	65WBR30	T	E-Star
600	66	50,000	Wet	65WBR30	T	E-Star

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
	74285	LEDRT4/600/927/FL80	9	Phase-cut	927	7.37" x 3.4"	600	67	50,000	Wet	50W Incandescent	T	E-Star
	74286	LEDRT4/600/930/FL80	9	Phase-cut	930	7.37" x 3.4"	600	67	50,000	Wet	50W Incandescent	T	E-Star
	74288	LEDRT4/600/940/FL80	9	Phase-cut	940	7.37" x 3.4"	600	67	50,000	Wet	50W Incandescent	T	E-Star
	74289	LEDRT4/600/950/FL80	9	Phase-cut	950	7.37" x 3.4"	600	67	50,000	Wet	50W Incandescent	T	E-Star
	70387	LEDRT4/G/600/827	9	Phase-cut	827	7.28" x 3.4"	600	67	50,000	Wet	50W Incandescent	T	E-Star
	70395	LEDRT4/G/600/830	9	Phase-cut	830	7.28" x 3.4"	600	67	50,000	Wet	50W Incandescent	T	E-Star
Surface Mount	74263	SURFACER1A/025120T827/14S/WH	25	Phase-cut	827	14.0" x 4.5"	1,500	60	≥50,000	Dry	100W Incandescent	-	-
	74264	SURFACER1A/025120T840/14S/WH	25	Phase-cut	840	14.0" x 4.5"	1,600	65	≥50,000	Dry	100W Incandescent	-	-
	74305	LEDFLUSHRND11IN16DIM827WH	17.5	Phase-cut	827	11" x 3.6"	1,000	57	≥50,000	Dry	75W Incandescent	-	E-Star
	74306	LEDFLUSHRND11IN16DIM840WH	17.5	Phase-cut	840	11" x 3.6"	1,200	68	≥50,000	Dry	75W Incandescent	-	E-Star
	72517	LEDEGELITFLUSH15INCHRNDNB	26	Phase-cut	840	15" x 1.5"	1,800	69	≥35,000	Damp	75W Incandescent	-	-
	71405	LEDFLUSHRND12IN15DIM830BN	15	Phase-cut	830	12" x 3.5"	1,000	67	≥35,000	Dry	75W Incandescent	-	E-Star
	71406	LEDFLUSHRND12IN15DIM840BN	15	Phase-cut	840	12" x 3.5"	1,000	67	≥35,000	Dry	75W Incandescent	-	E-Star
	71403	LEDFLUSHRND10IN15DIM830BN	15	Phase-cut	830	10" x 3.5"	1,000	67	≥35,000	Dry	75W Incandescent	-	E-Star
	71404	LEDFLUSHRND10IN15DIM840BN	15	Phase-cut	840	10" x 3.5"	1,000	67	≥35,000	Dry	75W Incandescent	-	E-Star
	74303	LEDFLUSHSQ11IN16DIM827WH	17.5	Phase-cut	827	11" x 11" x 3.3"	1,000	57	≥35,000	Dry	75W Incandescent	-	E-Star
	74304	LEDFLUSHSQ11IN16DIM840WH	17.5	Phase-cut	840	11" x 11" x 3.3"	1,200	68	≥35,000	Dry	75W Incandescent	-	E-Star
	74307	LEDFLUSHRNDTRM11IN20DIM827WH	21	Phase-cut	827	11" x 3.3"	1,000	47	≥35,000	Dry	75W Incandescent	-	E-Star
	74308	LEDFLUSHRNDTRM11IN20DIM840WH	21	Phase-cut	840	11" x 3.3"	1,200	57	≥35,000	Dry	75W Incandescent	-	E-Star
	74302	LEDFLUSHDOME11IN20DIM827BN	21	Phase-cut	827	11" x 4"	1,000	47	≥35,000	Dry	75W Incandescent	-	E-Star
	71500	LEDFLUSHDRM11IN15DIM830WH	15	Phase-cut	830	11" x 3"	1,000	67	≥50,000	Damp	75W Incandescent	-	E-Star
	71505	LEDFLUSHDRM11IN15DIM840WH	15	Phase-cut	840	11" x 3"	1,000	67	≥50,000	Damp	75W Incandescent	-	E-Star
Undercabinet	74347	LEDSLIMUCCONVER9IN	4.5	Phase-cut	827	9" x 2.4" x .5"	352	82	≥35,000	Damp	15W Incandescent	-	E-Star
	74346	LEDSLIMUCCONVER12IN	6	Phase-cut	827	12" x 2.4" x .5"	406	71	≥35,000	Damp	25W Incandescent	-	E-Star
	74345	LEDSLIMUCCONVER18IN	8	Phase-cut	827	18" x 2.4" x .5"	626	82	≥35,000	Damp	30W Incandescent	-	E-Star
	74344	LEDSLIMUCCONVER24IN	10	Phase-cut	827	24" x 2.4" x .5"	756	78	≥35,000	Damp	40W Incandescent	-	E-Star
PenduLum	74279	PndLum1A/120/78/OB	-	-	-	4.5" x 1.0"	-	-	-	Dry	-	-	-
	74280	PndLum1A/120/78/BN	-	-	-	4.5" x 1.0"	-	-	-	Dry	-	-	-
High Bay	74234	HIBAY1A/16H5 (Reflector)	-	-	-	16.2" x 10.4"	-	-	-	-	-	-	-
	74395	HIBAY1A/20ALH5 (Reflector)	-	-	-	20.0" x 5.6"	-	-	-	-	-	-	-
	74230	HIBAY1A/100UNVD840/GR	100	0-10	840	7.0" x 13.4"	10,800	108	≥63,000	Damp	250W HPS/MH	-	Standard
	74231	HIBAY1A/100UNVD850/GR	100	0-10	850	7.0" x 13.4"	10,800	108	≥63,000	Damp	250W HPS/MH	-	Standard

*LPW per LM79 report

**Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
	74232	HIBAY1A/200UNVD840/GR	200	0-10	840	8.8" x 15.2"	22,200	114	≥150,000	Damp	400W HPS/MH	-	Standard
	74233	HIBAY1A/200UNVD850/GR	200	0-10	850	8.8" x 15.2"	22,500	115	≥150,000	Damp	400W HPS/MH	-	Standard
	71731	HIBAY1A/300UNVD840/GR	300	0-10	840	8.9" x 17.4"	33,300	109	≥73,000	Damp	1000W HPS/MH	-	Standard
	71732	HIBAY1A/300UNVD850/GR	300	0-10	850	8.9" x 17.4"	33,700	110	≥73,000	Damp	1000W HPS/MH	-	Standard
	74509	HIBAY1A/100HUV840/GR	100	0-10	840	7.0" x 13.4"	10,800	108	≥150,000	Damp	250W HPS/MH	-	Standard
	74510	HIBAY1A/100HUV850/GR	100	0-10	850	7.0" x 13.4"	10,800	108	≥150,000	Damp	250W HPS/MH	-	Standard
	74511	HIBAY1A/200HUV840/GR	200	0-10	840	8.8" x 15.2"	23,300	123	≥150,000	Damp	400W HPS/MH	-	Standard
	74512	HIBAY1A/200HUV850/GR	200	0-10	850	8.8" x 15.2"	23,100	122	≥150,000	Damp	400W HPS/MH	-	Standard
	74515	HIBAY1A/200UNVD840/GR/E	200	0-10	840	16.2" x 23.6"	20,900	107	≥150,000	Damp	400W HPS/MH	E	-
	74516	HIBAY1A/200UNVD850/GR/E	200	0-10	850	16.2" x 23.6"	22,300	108	≥150,000	Damp	400W HPS/MH	E	-
Linear High Bay	74839	LNHIBA1A/100UNVD840/A/WH	100	0-10	840	46.0" x 7.9" x 2.9"	13,000	127	≥80,000	Damp	250W HPS/MH	-	Premium
	74840	LNHIBA1A/100UNVD850/A/WH	100	0-10	850	46.0" x 7.9" x 2.9"	13,000	127	≥80,000	Damp	250W HPS/MH	-	Premium
	74837	LNHIBA1A/100UNVD840/W/WH	100	0-10	840	46.0" x 7.9" x 2.9"	12,900	127	≥80,000	Damp	250W HPS/MH	-	Premium
	74838	LNHIBA1A/100UNVD850/W/WH	100	0-10	850	46.0" x 7.9" x 2.9"	12,900	127	≥80,000	Damp	250W HPS/MH	-	Premium
	74845	LNHIBA1A/150UNVD840/W/WH	150	0-10	840	46.0" x 7.9" x 2.9"	19,700	133	≥100,000	Damp	250W HPS/MH	-	Premium
	74846	LNHIBA1A/150UNVD850/W/WH	150	0-10	850	46.0" x 7.9" x 2.9"	19,700	133	≥100,000	Damp	250W HPS/MH	-	Premium
	74831	LNHIBA1A/165UNVD840/A/WH	165	0-10	840	46.0" x 7.9" x 2.9"	18,900	117	≥80,000	Damp	320W MH	-	Standard
	74832	LNHIBA1A/165UNVD850/A/WH	165	0-10	850	46.0" x 7.9" x 2.9"	18,900	117	≥80,000	Damp	320W MH	-	Standard
	74829	LNHIBA1A/165UNVD840/W/WH	165	0-10	840	46.0" x 7.9" x 2.9"	18,100	112	≥80,000	Damp	320W MH	-	Standard
	74830	LNHIBA1A/165UNVD850/W/WH	165	0-10	850	46.0" x 7.9" x 2.9"	18,100	112	≥80,000	Damp	320W MH	-	Standard
	74823	LNHIBA1A/225UNVD840/A/WH	225	0-10	840	46.0" x 11.8" x 2.9"	25,300	112	≥80,000	Damp	400W HPS/MH	-	Standard
	74824	LNHIBA1A/225UNVD850/A/WH	225	0-10	850	46.0" x 11.8" x 2.9"	25,300	112	≥80,000	Damp	400W HPS/MH	-	Standard
	74821	LNHIBA1A/225UNVD840/W/WH	225	0-10	840	46.0" x 11.8" x 2.9"	26,600	117	≥80,000	Damp	400W HPS/MH	-	Standard
	74822	LNHIBA1A/225UNVD850/W/WH	225	0-10	850	46.0" x 11.8" x 2.9"	26,600	117	≥80,000	Damp	400W HPS/MH	-	Standard
	74847	LNHIBA1A/150UNVD840/A/WH (MTO)	150	0-10	840	46.0" x 7.9" x 2.9"	19,100	130	≥100,000	Damp	250W HPS/MH	-	Premium
	74848	LNHIBA1A/150UNVD850/A/WH (MTO)	150	0-10	850	46.0" x 7.9" x 2.9"	19,100	130	≥100,000	Damp	250W HPS/MH	-	Premium
	74843	LNHIBA1A/100UNVD840/A/WH/D (MTO)	100	0-10	840	46.0" x 7.9" x 2.9"	13,000	127	≥80,000	Damp	250W HPS/MH	D	Premium
	74844	LNHIBA1A/100UNVD850/A/WH/D (MTO)	100	0-10	850	46.0" x 7.9" x 2.9"	13,000	127	≥80,000	Damp	250W HPS/MH	D	Premium
	74841	LNHIBA1A/100UNVD840/W/WH/D (MTO)	100	0-10	840	46.0" x 7.9" x 2.9"	12,900	127	≥80,000	Damp	250W HPS/MH	D	Premium
	74842	LNHIBA1A/100UNVD850/W/WH/D (MTO)	100	0-10	850	46.0" x 7.9" x 2.9"	12,900	127	≥80,000	Damp	250W HPS/MH	D	Premium
	74853	LNHIBA1A/150UNVD840/A/WH/D (MTO)	150	0-10	840	46.0" x 7.9" x 2.9"	19,100	130	≥100,000	Damp	250W HPS/MH	D	Premium
	74905	LNHIBA1A/150UNVD850/A/WH/D (MTO)	150	0-10	850	46.0" x 7.9" x 2.9"	19,100	130	≥100,000	Damp	250W HPS/MH	D	Premium

*LPW per LM79 report

**Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
	74849	LNHIBA1A/150UNVD840/W/WH/D (MTO)	150	0-10	840	46.0" x 7.9" x 2.9"	19,700	133	≥100,000	Damp	250W HPS/MH	D	Premium
	74850	LNHIBA1A/150UNVD850/W/WH/D (MTO)	150	0-10	850	46.0" x 7.9" x 2.9"	19,700	133	≥100,000	Damp	250W HPS/MH	D	Premium
	74835	LNHIBA1A/165UNVD840/A/WH/D (MTO)	165	0-10	840	46.0" x 7.9" x 2.9"	18,900	117	≥80,000	Damp	320W MH	D	Standard
	74836	LNHIBA1A/165UNVD850/A/WH/D (MTO)	165	0-10	850	46.0" x 7.9" x 2.9"	18,900	117	≥80,000	Damp	320W MH	D	Standard
	74833	LNHIBA1A/165UNVD840/W/WH/D (MTO)	165	0-10	840	46.0" x 7.9" x 2.9"	18,100	112	≥80,000	Damp	320W MH	D	Standard
	74834	LNHIBA1A/165UNVD850/W/WH/D (MTO)	165	0-10	850	46.0" x 7.9" x 2.9"	18,100	112	≥80,000	Damp	320W MH	D	Standard
	74827	LNHIBA1A/225UNVD840/A/WH/D (MTO)	225	0-10	840	46.0" x 11.8" x 2.9"	25,300	112	≥80,000	Damp	400W HPS/MH	D	Standard
	74828	LNHIBA1A/225UNVD850/A/WH/D (MTO)	225	0-10	850	46.0" x 11.8" x 2.9"	25,300	112	≥80,000	Damp	400W HPS/MH	D	Standard
	74825	LNHIBA1A/225UNVD840/W/WH/D (MTO)	225	0-10	840	46.0" x 11.8" x 2.9"	26,600	117	≥80,000	Damp	400W HPS/MH	D	Standard
	74826	LNHIBA1A/225UNVD850/W/WH/D (MTO)	225	0-10	850	46.0" x 11.8" x 2.9"	26,600	117	≥80,000	Damp	400W HPS/MH	D	Standard
Vapor Tight	74530	VAPOR1A/025UNVD840/24EC/GR	25	0-10	840	24.9" x 4.0" x 3.3"	3,100	135	≥122,000	IP65	70W HPS	-	Premium
	74531	VAPOR1A/025UNVD850/24EC/GR	25	0-10	850	24.9" x 4.0" x 3.3"	3,100	137	≥122,000	IP65	70W HPS	-	Premium
	74532	VAPOR1B/025UNVD840/24EC/GR/D	25	0-10	840	24.9" x 4.0" x 3.3"	3,100	135	≥122,000	IP65	70W HPS	D	-
	74533	VAPOR1B/025UNVD850/24EC/GR/D	25	0-10	850	24.9" x 4.0" x 3.3"	3,100	137	≥122,000	IP65	70W HPS	D	-
	60074	VAPOR1B/025UNVD840/24EC/GR/E	25	0-10	840	24.9" x 4.0" x 3.3"	3,100	135	≥120,000	IP65	70W HPS	E	-
	60075	VAPOR1B/025UNVD850/24EC/GR/E	25	0-10	850	24.9" x 4.0" x 3.3"	3,100	137	≥120,000	IP65	70W HPS	E	-
	74534	VAPOR1B/020UNVD840/48EC/GR	20	0-10	840	48.5" x 3.4" x 3.3"	2,600	127	≥68,000	IP65	70W HPS	-	Premium
	74535	VAPOR1B/020UNVD850/48EC/GR	20	0-10	850	48.5" x 3.4" x 3.3"	2,600	128	≥68,000	IP65	70W HPS	-	Premium
	74536	VAPOR1B/020UNVD840/48EC/GR/D	20	0-10	840	48.5" x 3.4" x 3.3"	2,600	127	≥68,000	IP65	70W HPS	D	-
	74537	VAPOR1B/020UNVD850/48EC/GR/D	20	0-10	850	48.5" x 3.4" x 3.3"	2,600	128	≥67,000	IP65	70W HPS	D	-
	60043	VAPOR1B/020UNVD840/48EC/GR/E	20	0-10	840	48.5" x 3.4" x 3.3"	2,600	127	≥68,000	IP65	70W HPS	E	Premium
	60044	VAPOR1B/020UNVD850/48EC/GR/E	20	0-10	850	48.5" x 3.4" x 3.3"	2,600	128	≥68,000	IP65	70W HPS	E	Premium
	60045	VAPOR1B/020UNVD840/48EC/GR/DE	20	0-10	840	48.5" x 3.4" x 3.3"	2,600	127	≥68,000	IP65	70W HPS	D, E	-
	60046	VAPOR1B/020UNVD850/48EC/GR/DE	20	0-10	850	48.5" x 3.4" x 3.3"	2,600	128	≥67,000	IP65	70W HPS	D, E	-
	74376	VAPOR1B/040UNVD840/48EC/GR	40	0-10	840	48.5" x 4.0" x 3.3"	5,300	139	≥120,000	IP65	70W MH	-	Premium
	74377	VAPOR1B/040UNVD850/48EC/GR	40	0-10	850	48.5" x 4.0" x 3.3"	5,300	137	≥120,000	IP65	70W MH	-	Premium
	74378	VAPOR1B/040UNVD840/48EC/GR/D	40	0-10	840	48.5" x 4.0" x 3.3"	5,400	140	≥120,000	IP65	70W MH	D	Premium
	74379	VAPOR1B/040UNVD850/48EC/GR/D	40	0-10	850	48.5" x 4.0" x 3.3"	5,400	137	≥120,000	IP65	70W MH	D	Premium
	74554	VAPOR1B/040UNVD840/48EC/GR/E	40	0-10	840	48.5" x 4.0" x 3.3"	5,300	139	≥120,000	IP65	70W MH	E	Premium
	74555	VAPOR1B/040UNVD850/48EC/GR/E	40	0-10	850	48.5" x 4.0" x 3.3"	5,300	137	≥120,000	IP65	70W MH	E	Premium
	74556	VAPOR1B/040UNVD840/48EC/GR/DE	40	0-10	840	48.5" x 4.0" x 3.3"	5,400	140	≥120,000	IP65	70W MH	D, E	Premium
	74557	VAPOR1B/040UNVD850/48EC/GR/DE	40	0-10	850	48.5" x 4.0" x 3.3"	5,400	137	≥120,000	IP65	70W MH	D, E	Premium

*LPW per LM79 report
**Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order
Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
	60047	VAPOR2B/040UNVD840/48EC/GR	40	0-10	840	48.1" x 4.8" x 3.3"	5,000	129	≥120,000	IP66	70W MH	-	Premium
	60048	VAPOR2B/040UNVD850/48EC/GR	40	0-10	850	48.1" x 4.8" x 3.3"	5,100	131	≥120,000	IP66	70W MH	-	Premium
	60049	VAPOR2B/040UNVD840/48EC/GR/D	40	0-10	840	48.1" x 4.8" x 3.3"	5,000	129	≥120,000	IP66	70W MH	D	Premium
	60050	VAPOR2B/040UNVD850/48EC/GR/D	40	0-10	850	48.1" x 4.8" x 3.3"	5,100	131	≥120,000	IP66	70W MH	D	Premium
	74227	VAPOR1A/050UNVD850/48EC/GR/E	50	0-10	850	48.5" x 4.0" x 3.3"	5,000	103	≥66,000	IP65	70W MH	E	Standard
	74552	VAPOR1A/050HUV840/48EC/GR	50	0-10	840	48.5" x 4.0" x 3.3"	5,700	111	≥84,000	IP65	70W MH	-	Standard
	74553	VAPOR1A/050HUV850/48EC/GR	50	0-10	850	48.5" x 4.0" x 3.3"	5,700	111	≥84,000	IP65	70W MH	-	Standard
Garage	74501	GARAG1A/035UNVD740/G5/SV	35	0-10	740	12.5" x 12.5" x 2.3"	4,200	123	≥125,000	IP66	150W MH	-	Premium
	74502	GARAG1A/035UNVD750/G5/SV	35	0-10	750	12.5" x 12.5" x 2.3"	4,200	119	≥125,000	IP66	150W MH	-	Premium
	74503	GARAG1A/055UNVD740/G5/SV	55	0-10	740	12.5" x 12.5" x 2.3"	6,200	119	≥125,000	IP66	175W MH	-	Premium
	74504	GARAG1A/055UNVD750/G5/SV	55	0-10	750	12.5" x 12.5" x 2.3"	6,200	118	≥125,000	IP66	175W MH	-	Premium
	74505	GARAG1A/035UNVD740/G5/SV/D	35	0-10	740	12.5" x 12.5" x 2.3"	4,200	123	≥125,000	IP66	150W MH	D	Premium
	74506	GARAG1A/035UNVD750/G5/SV/D	35	0-10	750	12.5" x 12.5" x 2.3"	4,200	119	≥125,000	IP66	150W MH	D	Premium
	74507	GARAG1A/055UNVD740/G5/SV/D	55	0-10	740	12.5" x 12.5" x 2.3"	6,200	119	≥125,000	IP66	175W MH	D	Premium
	74508	GARAG1A/055UNVD750/G5/SV/D	55	0-10	750	12.5" x 12.5" x 2.3"	6,200	118	≥125,000	IP66	175W MH	D	Premium
Slim Floodlight	74906	SLMFLD1A/020UNV830/WF/BZ	20	-	830	9.1" x 1.6" x 10.5"	2,000	103	≥150,000	IP66	70W HPS/MH	-	Standard
	74907	SLMFLD1A/020UNV840/WF/BZ	20	-	840	9.1" x 1.6" x 10.5"	2,200	111	≥150,000	IP66	70W HPS/MH	-	Premium
	74908	SLMFLD1A/030UNV840/WF/BZ	30	-	840	9.1" x 1.6" x 10.5"	3,400	110	≥150,000	IP66	100W HPS/MH	-	Premium
	74909	SLMFLD1A/030UNV850/WF/BZ	30	-	850	9.1" x 1.6" x 10.5"	3,500	114	≥150,000	IP66	100W HPS/MH	-	Premium
	74910	SLMFLD1A/050UNV840/WF/BZ	50	-	840	10.7" x 1.6" x 11.3"	6,100	119	≥150,000	IP66	175W HPS/MH	-	Premium
	74911	SLMFLD1A/050UNV850/WF/BZ	50	-	850	10.7" x 1.6" x 11.3"	6,300	121	≥150,000	IP66	175W HPS/MH	-	Premium
Area Light	70956	AREAFLD1A/070UNVD840/T3/BZ	70	0-10	840	12.2" x 12.6" x 4.9"	8,100	116	≥140,000	IP66	175W HID	-	Premium
	71078	AREAFLD1A/070UNVD840/T4/BZ (MTO)	70	0-10	840	12.2" x 12.6" x 4.9"	8,200	117	≥140,000	IP66	175W HID	-	Premium
	71079	AREAFLD1A/070UNVD840/T5/BZ (MTO)	70	0-10	840	12.2" x 12.6" x 4.9"	8,500	121	≥140,000	IP66	175W HID	-	Premium
	71153	AREAFLD1A/070UNVD850/T3/BZ	70	0-10	850	12.2" x 12.6" x 4.9"	8,600	123	≥140,000	IP66	175W HID	-	Premium
	71170	AREAFLD1A/070UNVD850/T4/BZ (MTO)	70	0-10	850	12.2" x 12.6" x 4.9"	8,700	125	≥140,000	IP66	175W HID	-	Premium
	71171	AREAFLD1A/070UNVD850/T5/BZ (MTO)	70	0-10	850	12.2" x 12.6" x 4.9"	9,000	130	≥140,000	IP66	175W HID	-	Premium
	60037	AREAFLD1A/110UNVD840/T3/BZ	110	0-10	840	15.2" x 12.6" x 4.9"	12,600	117	≥140,000	IP66	250W HPS/MH	-	Premium
	60038	AREAFLD1A/110UNVD840/T4/BZ (MTO)	110	0-10	840	15.2" x 12.6" x 4.9"	12,700	117	≥140,000	IP66	250W HPS/MH	-	Premium
	60039	AREAFLD1A/110UNVD840/T5/BZ (MTO)	110	0-10	840	15.2" x 12.6" x 4.9"	13,300	123	≥140,000	IP66	250W HPS/MH	-	Premium
	60040	AREAFLD1A/110UNVD850/T3/BZ	110	0-10	850	15.2" x 12.6" x 4.9"	13,300	124	≥140,000	IP66	250W HPS/MH	-	Premium
	60041	AREAFLD1A/110UNVD850/T4/BZ (MTO)	110	0-10	850	15.2" x 12.6" x 4.9"	13,300	125	≥140,000	IP66	250W HPS/MH	-	Premium

*LPW per LM79 report
**Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order
Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
	60042	AREAFLD1A/110UNVD850/T5/BZ (MTO)	110	0-10	850	15.2" x 12.6" x 4.9"	13,300	124	≥140,000	IP66	250W HPS/MH	-	Premium
	60031	AREAFLD1A/145UNVD840/T3/BZ	145	0-10	840	15.2" x 12.6" x 4.9"	17,000	116	≥140,000	IP66	400W HPS/MH	-	Premium
	60032	AREAFLD1A/145UNVD840/T4/BZ (MTO)	145	0-10	840	15.2" x 12.6" x 4.9"	17,100	117	≥140,000	IP66	400W HPS/MH	-	Premium
	60033	AREAFLD1A/145UNVD840/T5/BZ (MTO)	145	0-10	840	15.2" x 12.6" x 4.9"	17,900	122	≥140,000	IP66	400W HPS/MH	-	Premium
	60034	AREAFLD1A/145UNVD850/T3/BZ	145	0-10	850	15.2" x 12.6" x 4.9"	17,000	117	≥140,000	IP66	400W HPS/MH	-	Premium
	60035	AREAFLD1A/145UNVD850/T4/BZ (MTO)	145	0-10	850	15.2" x 12.6" x 4.9"	17,000	117	≥140,000	IP66	400W HPS/MH	-	Premium
	60036	AREAFLD1A/145UNVD850/T5/BZ (MTO)	145	0-10	850	15.2" x 12.6" x 4.9"	17,900	123	≥140,000	IP66	400W HPS/MH	-	Premium
Slim Wall Pack	74340	SLMWP1A/013UNV740/CO/BZ	13	-	740	7.5" x 2.8" x 8.0"	1,400	113	≥150,000	Wet	100W INC	-	Standard
	74341	SLMWP1A/013UNV750/CO/BZ	13	-	750	7.5" x 2.8" x 8.0"	1,400	113	≥150,000	Wet	100W INC	-	Standard
	74192	SLMWP1A/030UNV740/CO/BZ	30	-	740	7.5" x 2.8" x 8.0"	2,800	92	≥125,000	Wet	70W HPS	-	Standard
	74195	SLMWP1A/030UNV750/CO/BZ	30	-	750	7.5" x 2.8" x 8.0"	2,800	84	≥125,000	Wet	70W HPS	-	-
	74193	SLMWP1A/040UNV740/CO/BZ	40	-	740	7.5" x 2.8" x 8.0"	4,100	99	≥125,000	Wet	100W HPS/MH	-	Standard
	74196	SLMWP1A/040UNV750/CO/BZ	40	-	750	7.5" x 2.8" x 8.0"	3,900	98	≥125,000	Wet	100W HPS/MH	-	Standard
	74194	SLMWP1A/060UNV740/CO/BZ	60	-	740	7.5" x 2.8" x 8.0"	5,500	94	≥125,000	Wet	175W MH	-	Standard
	74197	SLMWP1A/060UNV750/CO/BZ	60	-	750	7.5" x 2.8" x 8.0"	5,100	83	≥125,000	Wet	175W MH	-	-
	74342	SLMWP1A/013120740/CO/BZ/P	13	-	740	7.5" x 2.8" x 8.0"	1,400	113	≥150,000	Wet	100W Incandescent	P	Standard
	74343	SLMWP1A/013120750/CO/BZ/P	13	-	750	7.5" x 2.8" x 8.0"	1,400	113	≥150,000	Wet	100W Incandescent	P	Standard
	74204	SLMWP1A/030120740/CO/BZ/P	30	-	740	7.5" x 2.8" x 8.0"	2,800	92	≥125,000	Wet	70W HPS	P	Standard
	74207	SLMWP1A/030120750/CO/BZ/P	30	-	750	7.5" x 2.8" x 8.0"	2,800	84	≥125,000	Wet	70W HPS	P	-
	74205	SLMWP1A/040120740/CO/BZ/P	40	-	740	7.5" x 2.8" x 8.0"	4,100	99	≥125,000	Wet	100W HPS/MH	P	Standard
	74208	SLMWP1A/040120750/CO/BZ/P	40	-	750	7.5" x 2.8" x 8.0"	3,900	98	≥125,000	Wet	100W HPS/MH	P	Standard
	74206	SLMWP1A/060120740/CO/BZ/P	60	-	740	7.5" x 2.8" x 8.0"	5,500	94	≥125,000	Wet	175W MH	P	Standard
	74209	SLMWP1A/060120750/CO/BZ/P	60	-	750	7.5" x 2.8" x 8.0"	5,100	83	≥125,000	Wet	175W MH	P	-
	72966	SLMWP1A/030347750/CO/BZ	30	-	750	7.5" x 2.8" x 8.0"	3,400	109	≥125,000	Wet	70W HPS	-	Standard
	72992	SLMWP1A/040347750/CO/BZ	40	-	750	7.5" x 2.8" x 8.0"	4,300	104	≥125,000	Wet	100W HPS/MH	-	Standard
	74381	SLMWP2A/030UNV750/CO/BZ	30	-	750	7.5" x 2.8" x 8.0"	3,300	112	≥125,000	Wet	70W HPS	-	Premium
	74380	SLMWP2A/060UNV740/CO/BZ	60	-	740	7.5" x 2.8" x 8.0"	7,000	117	≥125,000	Wet	175W MH	-	Premium
	74382	SLMWP2A/060UNV750/CO/BZ	60	-	750	7.5" x 2.8" x 8.0"	7,200	121	≥125,000	Wet	175W MH	-	Premium
	74384	SLMWP2A/030120750/CO/BZ/P	30	-	750	7.5" x 2.8" x 8.0"	3,300	112	≥125,000	Wet	70W HPS	P	Premium
	74383	SLMWP2A/060120740/CO/BZ/P	60	-	740	7.5" x 2.8" x 8.0"	7,000	117	≥125,000	Wet	175W MH	P	Premium
	74385	SLMWP2A/060120750/CO/BZ/P	60	-	750	7.5" x 2.8" x 8.0"	7,200	121	≥125,000	Wet	175W MH	P	Premium

*LPW per LM79 report
**Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order
Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
Wall Pack Cutoff	74186	WALPAK1C/036UNV740/CO/BZ	36	–	740	12.6" x 11.4" x 9.5"	3,300	92	≥150,000	Wet	100W HPS/MH	–	Standard
	74189	WALPAK1C/036UNV750/CO/BZ	36	–	750	12.6" x 11.4" x 9.5"	2,900	82	≥150,000	Wet	100W HPS/MH	–	–
	74187	WALPAK1C/050UNV740/CO/BZ	50	–	740	12.6" x 11.4" x 9.5"	5,200	107	≥150,000	Wet	175W MH	–	Standard
	74190	WALPAK1C/050UNV750/CO/BZ	50	–	750	12.6" x 11.4" x 9.5"	5,000	102	≥150,000	Wet	175W MH	–	Standard
	74191	WALPAK1C/075UNV750/CO/BZ	75	–	750	12.6" x 11.4" x 9.5"	6,400	88	≥150,000	Wet	250W HPS/MH	–	–
	74213	WALPAK1C/036UNV750/CO/BZ/P	36	–	750	12.6" x 11.4" x 9.5"	2,900	82	≥150,000	Wet	100W HPS/MH	P	Standard
	74211	WALPAK1C/050UNV740/CO/BZ/P	50	–	740	12.6" x 11.4" x 9.5"	5,200	107	≥150,000	Wet	175W MH	P	Standard
	74214	WALPAK1C/050UNV750/CO/BZ/P	50	–	750	12.6" x 11.4" x 9.5"	5,000	102	≥150,000	Wet	175W MH	P	Standard
	74212	WALPAK1C/075UNV740/CO/BZ/P	75	–	740	12.6" x 11.4" x 9.5"	6,600	91	≥150,000	Wet	250W HPS/MH	P	–
	74215	WALPAK1C/075UNV750/CO/BZ/P	75	–	750	12.6" x 11.4" x 9.5"	6,400	88	≥150,000	Wet	250W HPS/MH	P	–
	72993	WALPAK1C/040347750/CO/BZ	40	–	750	12.6" x 11.4" x 9.5"	4,500	107	≥150,000	Wet	100W HPS/MH	–	Standard
	72994	WALPAK1C/055347750/CO/BZ	55	–	750	12.6" x 11.4" x 9.5"	5,500	101	≥150,000	Wet	175W MH	–	Standard
	72995	WALPAK1C/080347750/CO/BZ	80	–	750	12.6" x 11.4" x 9.5"	8,900	113	≥150,000	Wet	250W HPS/MH	–	Standard
	74497	WALPAK1C/050UNV740/CO/BZ/E (MTO)	50	–	740	12.6" x 11.4" x 9.5"	5,200	107	≥50,000	Wet	175W MH	E	Standard
	74498	WALPAK1C/050UNV750/CO/BZ/E (MTO)	50	–	750	12.6" x 11.4" x 9.5"	5,000	102	≥50,000	Wet	175W MH	E	Standard
	74912	WALPAK2C/030UNV740/CO/BZ	30	–	840	14.3" x 5.7" x 9.3"	3,800	135	≥150,000	Wet	100W HPS/MH	–	Premium
	74915	WALPAK2C/030UNV750/CO/BZ	30	–	850	14.3" x 5.7" x 9.3"	3,800	135	≥150,000	Wet	100W HPS/MH	–	Premium
	74913	WALPAK2C/050UNV740/CO/BZ	50	–	840	14.3" x 5.7" x 9.3"	6,200	126	≥150,000	Wet	175W MH	–	Premium
	74916	WALPAK2C/050UNV750/CO/BZ	50	–	850	14.3" x 5.7" x 9.3"	6,300	128	≥150,000	Wet	175W MH	–	Premium
	74914	WALPAK2C/075UNV740/CO/BZ	75	–	840	14.3" x 5.7" x 9.3"	9,000	120	≥150,000	Wet	250W HPS/MH	–	Premium
74917	WALPAK2C/075UNV750/CO/BZ	75	–	850	14.3" x 5.7" x 9.3"	9,100	121	≥150,000	Wet	250W HPS/MH	–	Premium	
Small Wall Pack	60064	SMWLPK1N/015UNV740/NC/BZ	15	–	740	11.0" x 5.1" x 6.9"	1,700	119	≥150,000	Wet	100W HPS/MH	–	Standard
	60065	SMWLPK1N/015UNV750/NC/BZ	15	–	750	11.0" x 5.1" x 6.9"	1,700	119	≥150,000	Wet	100W HPS/MH	–	Standard
	60066	SMWLPK1N/015UNV740/NC/BZ/P	15	–	740	11.0" x 5.1" x 6.9"	1,700	119	≥150,000	Wet	100W HPS/MH	–	Standard
	60067	SMWLPK1N/015UNV750/NC/BZ/P	15	–	750	11.0" x 5.1" x 6.9"	1,700	119	≥150,000	Wet	100W HPS/MH	–	Standard
	Wall Pack Non-Cutoff	74201	WALPAK1N/036UNV750/NC/BZ	36	–	750	14.4" x 7.1" x 9.3"	3,300	95	≥150,000	Wet	100W HPS/MH	–
74202		WALPAK1N/050UNV750/NC/BZ	50	–	750	14.4" x 7.1" x 9.3"	5,300	108	≥150,000	Wet	175W MH	–	–
74200		WALPAK1N/075UNV740/NC/BZ	75	–	740	14.4" x 7.1" x 9.3"	8,600	115	≥150,000	Wet	250W HPS/MH	–	–
74203		WALPAK1N/075UNV750/NC/BZ	75	–	750	14.4" x 7.1" x 9.3"	8,600	115	≥150,000	Wet	250W HPS/MH	–	–
74217		WALPAK1N/050UNV740/NC/BZ/P	50	–	740	14.4" x 7.1" x 9.3"	5,000	104	≥150,000	Wet	175W MH	P	–
74221		WALPAK1N/075UNV750/NC/BZ/P	75	–	750	14.4" x 7.1" x 9.3"	8,600	115	≥150,000	Wet	250W HPS/MH	P	–
72996		WALPAK1N/040347750/NC/BZ	40	–	750	14.4" x 7.1" x 9.3"	4,300	102	≥150,000	Wet	100W HPS/MH	–	–

*LPW per LM79 report

**Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order

Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Product Type	Item Number	Ordering Abbreviation	Watts	Dim (V)	CRI/CCT	Dimensions	Lumens	LPW*	LED L70 Lifetime (h)	Dry/Wet/Damp	Replaces Traditional Equivalent Up To	Options **	DLC (Std/Prem) & ENERGY STAR
	72997	WALPAK1N/055347750/NC/BZ	55	–	750	14.4" x 7.1" x 9.3"	6,300	108	≥150,000	Wet	175W MH	–	–
	72998	WALPAK1N/080347750/NC/BZ	80	–	750	14.4" x 7.1" x 9.3"	9,400	120	≥150,000	Wet	250W HPS/MH	–	Standard
	74499	WALPAK1N/050UNV740/NC/BZ/E (MTO)	50	–	740	14.4" x 7.1" x 9.3"	5,000	104	≥50,000	Wet	175W MH	E	Standard
	74500	WALPAK1N/050UNV750/NC/BZ/E (MTO)	50	–	750	14.4" x 7.1" x 9.3"	5,300	108	≥50,000	Wet	175W MH	E	Standard
	74386	WALPAK2N/030UNV740/NC/BZ	30	–	740	14.4" x 7.1" x 9.3"	3,400	122	≥150,000	Wet	100W HPS/MH	–	Premium
	74482	WALPAK2N/030UNV750/NC/BZ	30	–	750	14.4" x 7.1" x 9.3"	3,500	125	≥150,000	Wet	100W HPS/MH	–	Premium
	74485	WALPAK2N/050UNV740/NC/BZ	50	–	740	14.4" x 7.1" x 9.3"	5,500	113	≥150,000	Wet	175W MH	–	Standard
	74486	WALPAK2N/050UNV750/NC/BZ	50	–	750	14.4" x 7.1" x 9.3"	5,600	116	≥150,000	Wet	175W MH	–	Standard
	74489	WALPAK2N/075UNV740/NC/BZ	75	–	740	14.4" x 7.1" x 9.3"	8,900	118	≥150,000	Wet	250W HPS/MH	–	Standard
	74490	WALPAK2N/075UNV750/NC/BZ	75	–	750	14.4" x 7.1" x 9.3"	9,200	121	≥150,000	Wet	250W HPS/MH	–	Standard
	74387	WALPAK2N/030UNV740/NC/BZ/P	30	–	740	14.4" x 7.1" x 9.3"	3,400	122	≥150,000	Wet	100W HPS/MH	P	Premium
	74483	WALPAK2N/030UNV750/NC/BZ/P	30	–	750	14.4" x 7.1" x 9.3"	3,500	125	≥150,000	Wet	100W HPS/MH	P	Premium
	74487	WALPAK2N/050UNV740/NC/BZ/P	50	–	740	14.4" x 7.1" x 9.3"	5,500	113	≥150,000	Wet	175W MH	P	Standard
	74488	WALPAK2N/050UNV750/NC/BZ/P	50	–	750	14.4" x 7.1" x 9.3"	5,600	116	≥150,000	Wet	175W MH	P	Standard
	74491	WALPAK2N/075UNV740/NC/BZ/P	75	–	740	14.4" x 7.1" x 9.3"	8,900	118	≥150,000	Wet	250W HPS/MH	P	Standard
	74492	WALPAK2N/075UNV750/NC/BZ/P	75	–	750	14.4" x 7.1" x 9.3"	9,200	121	≥150,000	Wet	250W HPS/MH	P	Standard
	74528	WALPAK3N/105UNV740/NC/BZ	105	–	740	18" x 9.37" x 9.84"	12,500	119	≥150,000	Wet	400W HPS/MH	–	Standard
	74529	WALPAK3N/105UNV750/NC/BZ	105	–	750	18" x 9.37" x 9.84"	12,500	119	≥150,000	Wet	400W HPS/MH	–	Standard

*LPW per LM79 report
 **Options: D = Dual (Motion/Daylight) Sensor, P = Photocontrol, E = Emergency, T = Trim Rings, TE = Trim Extender (MTO) = Made to Order
 Note: All luminaires and retrofit kits are UL/ETL, FCC, RoHS and backed by a 5 year warranty

For accessories information see pages 66-67.

Accessories

Compatible Fixtures	Item Number	Ordering Abbreviation	Product Description
High Bay	74449	HIBAY1A/BOTTOMLENS/16H5	Refractor Bottom Lens
Linear High Bay	71758	SENSOR1A/REMOTE/D	Sensor Remote
	74597	LNHIBA1A/OBIN/WG/WH	Wire Guard for 100W, 150W, and 165W versions
	74598	LNHIBA1A/12IN/WG/WH	Wire Guard for 225W versions
Vapor Tight	74310	VAPOR1A/REMOTE	Vapor Tight Sensor Remote compatible with VAPOR1A
	74541	VAPOR1B/REMOTE	Vapor Tight Sensor Remote compatible with VAPOR1B
	74744	VAPOR1X/LENS/24D5	2ft Diffused Lens
	74538	VAPOR1X/LENS/48D5	4ft Diffused Lens
	74448	VAPOR1A/LENS/48EC	4ft Replacement Lens
	74920	VAPOR1A/CONN/BL	Tandem Wiring Connector
Canopy	74446	CANOPYA/MTGPLATE/12/WH	12.5" Mounting Plate, White Finish
	74447	CANOPYA/MTGPLATE/16/WH	16" Mounting Plate, White Finish
Garage	74745	GARAG1A/MTGPLATE/16/SV	16" Mounting Plate, Silver Finish
	74921	GARAG1A/SHIELD	Polycarbonate Glare Shield
	74550	GARAG1A/CONN/1/SV	Wire Through Connector – (Set of 1)
	74551	GARAG1A/CONN/2/SV	Wire Through Connector – (Set of 2)
	71758	SENSOR1A/REMOTE/D	Sensor Remote
Area Light	71733	AREAFLD1A/POLEMOUNT/BZ	Pole Mount, Bronze
	71734	AREAFLD1A/SLIPFITTER/BZ	Slip Fitter Mount Bronze
	60128	AREAFLD1A/RNDADAPT/BZ	Round Adapter, Bronze
	60129	AREAFLD1A/WALLMNT/BZ	Wall Mount, Bronze
	60130	AREAFLD1A/WALLTENON/BZ	Wall Tenon Mount, Bronze
Slim Wall Pack	74392	SLMWP1A/JBOX/BZ	Junction Box, Bronze Finish
	74393	SLMWP1A/TRUNNION/BZ	Junction Box Trunnion Mount, Bronze Finish
	74394	SLMWP1A/KNUCKLE/BZ	Junction Box Knuckle Mount, Bronze Finish
Wall Pack Cutoff	74396	WALPAK1C/LENS/BZ	Replacement Lens with Frame
Wall Pack Non-Cutoff 30W-80W	74390	WALPAK1N/TOPVISOR/BZ	Top Visor, Bronze Finish
	74391	WALPAK1N/WIREGUARD	Wire Guard
	74397	WALPAK1N/LENS/BZ	Replacement Glass Lens with Frame
	74445	WALPAK1N/PLENS/BZ	Polycarbonate Lens with Frame
Wall Pack Non-Cutoff 105W	74539	WALPAK3N/TOPVISOR/BZ	Top Visor, Bronze Finish
	74540	WALPAK3N/WIREGUARD	Wire Guard
Edge-Lit Panel	74595	WALPAK3N/LENS/BZ	Replacement Glass Lens with Frame
	70132	SMKIT1A/14A/WH	1x4 Surface Mount Kit, White Finish
	70380	SMKIT1A/22A/WH	2x2 Surface Mount Kit, White Finish
70381	SMKIT1A/24A/WH	2x4 Surface Mount Kit, White Finish	

Compatible Fixtures	Item Number	Ordering Abbreviation	Product Description
Recessed Downlight	79775	RTQ4TRIMDKBZ	Dark Bronze Trim Ring for RT4 QUAD Recessed Downlight
	79776	RTQ4TRIMBLK	Black Trim Ring for RT4 QUAD Recessed Downlight
	79777	RTQ4TRIMORBZ	Bronze Trim Ring for RT4 QUAD Recessed Downlight
	79778	RTQ4TRIMSN	Satin Nickel Trim Ring for RT4 QUAD Recessed Downlight
	70696	RT4/TRIM/BLK	Black Trim Ring for RT4 Recessed Downlight
	70697	RT4/TRIM/ORBZ	Bronze Trim and Reflector for RT4 Recessed Downlight
	75109	RT4/TRIM/DKBZ	Dark Bronze Trim and Reflector for RT4 Recessed Downlight
	70698	RT4/TRIM/SN	Satin Nickel Trim and Reflector for RT4 Recessed Downlight
	70716	RT4/TRIM/ALZAK	White Trim and Alzak Reflector for RT4 Recessed Downlight
	79779	RTQ56TRIMDKBZ	Dark Bronze Trim Ring for RT5/6 QUAD Recessed Downlight
	79780	RTQ56TRIMBLK	Black Trim Ring for RT5/6 QUAD Recessed Downlight
	79781	RTQ56TRIMORBZ	Bronze Trim Ring for RT5/6 QUAD Recessed Downlight
	79782	RTQ56TRIMSN	Satin Nickel Trim Ring for RT5/6 QUAD Recessed Downlight
	75097	RT5/6/TRIM/BLK	Black Trim Ring for RT5/6 Recessed Downlight
	75095	RT5/6/TRIM/DKBZ	Dark Bronze Ring for RT5/6 Recessed Downlight
	75098	RT5/6/TRIM/ORBZ	Bronze Trim and Reflector for RT5/6 Recessed Downlight
	75099	RT5/6/TRIM/SN	Satin Nickel Trim and Reflector for RT5/6 Recessed Downlight
	70663	RT6/RETROFIT/BAND	Retrofit Band for RT5/6 Recessed Downlight
	75092	RT8/TRIM/ALZAK	Alzak Trim Ring for RT8 Recessed Downlight
	75093	RT8/TRIM/SN	Satin Nickel Trim Ring for RT8 Recessed Downlight
	75082	RT6/8TRIMEXT	Trim Ring Extender for RT5/6 Recessed Downlight
	75083	RT8/10/TRIMEXT	8 to 10 inch Trim Ring Extender for RT8 Recessed Downlight
	74991	RT8/12/TRIMEXT	8 to 12 inch Trim Ring Extender for RT8 Recessed Downlight
	71709	LED/RT8/FRAME	Rough In Frame for RT8 Recessed Downlight
	75096	LEDADAPTORMEDBASE	Medium Base Socket Adapter for RT5/6
	75107	LEDADAPTOR/PUSHWIRE	Push Wire Adapter for RT4 and RT5/6 Recessed Downlight
	75105	LEDADAPTOR/GU24	GU24 Socket Adapter for RT4 and RT5/6 Recessed Downlights
MICRODISK	74992	LED/MD4TRIMDKBZ	Dark Bronze Trim Ring for MICRODISK 4"
	74993	LED/MD4TRIMBLK	Black Trim Ring for MICRODISK 4"
	74994	LED/MD4TRIMORBZ	Bronze Trim Ring for MICRODISK 4"
	74995	LED/MD4TRIMSN	Satin Trim Ring for MICRODISK 4"
	74996	LED/MD6TRIMDKBZ	Dark Bronze Trim Ring for MICRODISK 6"
	74997	LED/MD6TRIMBLK	Black Trim Ring for MICRODISK 6"
	74998	LED/MD6TRIMORBZ	Bronze Trim Ring for MICRODISK 6"
	74999	LED/MD6TRIMSN	Satin Trim Ring for MICRODISK 6"
	75082	RT6/8/TRIMEXT	6 to 12 inch Trim Ring Extender for MICRODISK

With almost 9,000 employees and active in more than 120 countries, LEDVANCE is one of the world's leading general lighting providers for professional users and retail customers. Emerged from the general lighting business of OSRAM GmbH, the company offers advanced LED lamps, standardized LED luminaires, intelligent, networked Smart Home and Building solutions, and traditional light sources.



LEDVANCE LLC
200 Ballardvale Street
Wilmington, MA 01887 USA
Phone: 1-800-LIGHTBULB
(1-800-544-4828)
www.sylvania.com



© 2018 LEDVANCE LLC

Licensee of product trademark
SYLVANIA in general lighting



VISIT SYLVANIA.COM