



Guard Dawg 4G Tracker Installation Guide

When mounting the Guard Dawg Tracker, find a suitable covert mounting location that is not obstructed by metal ensuring the white printed identification label is facing down. Good locations include the rear window deck, Under carpet of the floorboard or center console, under non-metal area of the dash.

Power for the Guard Dawg Tracker should always be taken directly from the vehicle battery when possible or from a wire that reads the exact same voltage as read at the battery terminals.




Installation Steps

Connect the **(RED)** power wire from the device to a constant +12V power source.

Connect the **(BLACK)** ground wire from the device to a chassis ground or directly to the battery ground terminal.

Connect the **(WHITE)** wire to a wire that is a +12V power source when your bikes Ignition is switched to ON.

If you added the optional Starter Cut Off, make the following additional connections

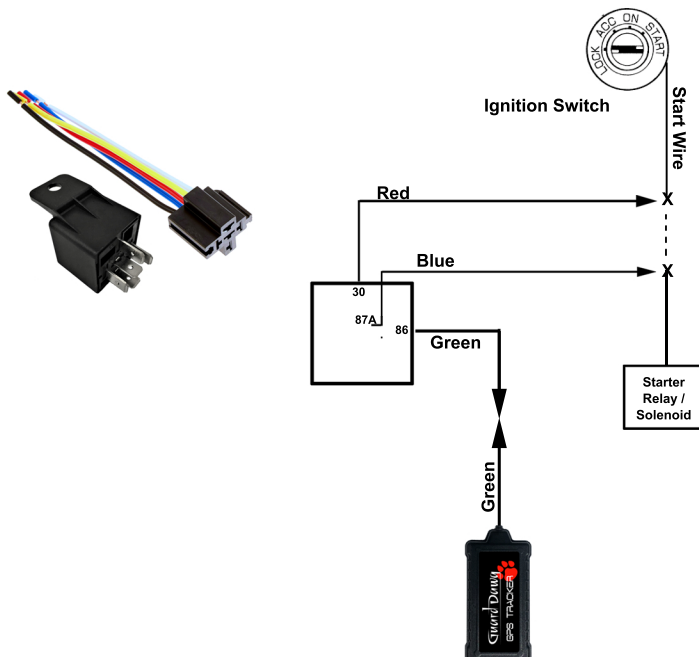

Understanding the LED Lights

Successful Operation can be verified by observing the LED indicators on the module. A correctly installed device will have both LED's solid ON.

GREEN LED : Blinking-Searching for GPS - Solid = GPS lock

AMBER LED : Fast Blinking-Searching- Solid = Cellular lock

* Note: If AMBER LED does not turn solid after 3 minutes, cycle power to the module and try again.