

LED

CATALOGUE 2023



QUALITY MATTERS

Ortech Industries Inc. is proud to provide you the highest quality construction materials. We pride ourselves on delivering the highest quality, so you can focus on what matters most to you.

Since our inception in 2004, we have stood by our products, providing customers with the most reliable construction materials ranging from lighting, electrical and ventilation products.

Now a national supplier, ORTECH products can be found in more than 2 million homes across Canada and the USA.

TABLE OF CONTENTS

RESIDENTIAL LIGHTING

Bulbs	4
Slim Lights	6
Flush Mounts	19
Closet Lights	24
Step Lights	25
Puk Lights	28
Strip Lights	31

OUTDOOR LIGHTING

Landscape Lights	36
Security Lights	40
Wall Sconces	42

COMMERCIAL LIGHTING

Exit Signs	43
Emergency Lights	44
Panel Lights	46
Vapour Tights	46
Shop Lights	47
Wrap-Around Light	47
Area Lights	48
Wall Packs	48
UFO & Linear High Bays	50
Commercial Downlight	51
Commercial Canopies	51



LED BULBS

A19 14WD

14W 1600 LMN DIMMABLE LED BULB
AVAILABLE IN WARM AND COOL WHITE

Wattage	14W
Voltage	120V AC
Lumens	1600 lm
Beam Angle	230°
Lifetime	25000 Hours
Dimmable	Yes
Colour Temp.	3000K / 5000K
Dimensions (WxH)	2-3/8" x 4-5/8"



A19 9WD

9W 800 LMN DIMMABLE LED BULB
AVAILABLE IN WARM AND COOL WHITE

Wattage	9W
Voltage	120V AC
Lumens	800 lm
Beam Angle	240°
Lifetime	15000 Hours
Dimmable	Yes
Colour Temp.	3000K / 5000K
Dimensions (WxH)	2-3/8" x 4-5/16"



A19 9W

9W 800 LMN NON-DIMMABLE LED BULB
AVAILABLE IN WARM AND COOL WHITE

Wattage	9W
Voltage	120V AC
Lumens	800 lm
Beam Angle	220°
Lifetime	15000 Hours
Dimmable	No
Colour Temp.	3000K / 5000K
Dimensions (WxH)	2-3/8" x 4-5/16"



BR20 7WD

7W 500 LMN DIMMABLE LED BULB
AVAILABLE IN WARM AND COOL WHITE

Wattage	7W
Voltage	120V AC
Lumens	800 lm
Beam Angle	250°
Lifetime	15000 Hours
Dimmable	Yes
Colour Temp.	3000K / 5000K
Dimensions (WxH)	2-3/8" x 4-5/16"



G4 3WD | G9 5WD

DIMMABLE LED BULB AVAILABLE IN
WARM AND COOL WHITE

Wattage	3W 3.5W
Voltage	120V AC
Lumens	360 lm 420 lm
Beam Angle	360°
Lifetime	30000 25000 Hours
Dimmable	Yes
Colour Temp.	3000K / 5000K
Warranty	2 Years



PAR20 COB 8WD

8.5W 520 LMN DIMMABLE LED BULB
AVAILABLE IN WARM AND COOL WHITE

Wattage	8.5W
Voltage	120V AC
Lumens	520 lm
Beam Angle	36°
Lifetime	25000 Hours
Dimmable	Yes
Colour Temp.	3000K / 5000K
Dimensions (WxH)	2-11/16" x 3-1/2"



PAR30 COB 10W

LONG NECK DIMMABLE LED BULB
AVAILABLE IN WARM AND COOL WHITE

Wattage	10W
Voltage	120V AC
Lumens	800 lm
Beam Angle	40°
Lifetime	15000 Hours
Dimmable	Yes
Colour Temp.	3000K / 5000K
Dimensions (WxH)	3-5/8" x 4-5/16"



GU10 6WD

6.5W 500 LMN DIMMABLE LED BULB
AVAILABLE IN WARM AND COOL WHITE

Wattage	6.5W
Voltage	120V AC
Lumens	500 lm
Beam Angle	40°
Lifetime	15000 Hours
Dimmable	Yes
Colour Temp.	3000K / 5000K
Dimensions (WxH)	2" x 2-1/8"



PAR30 COB 10WDWS

SHORT NECK DIMMABLE LED BULB
AVAILABLE IN WARM WHITE

Wattage	10W
Voltage	120V AC
Lumens	800 lm
Beam Angle	40°
Lifetime	15000 Hours
Dimmable	Yes
Colour Temp.	3000K
Dimensions (WxH)	3-5/8" x 3-5/16"



PAR16S 6WD

6W 500 LMN DIMMABLE LED BULB
AVAILABLE IN WARM WHITE

Wattage	6W
Voltage	120V AC
Lumens	500 lm
Beam Angle	40°
Lifetime	15000 Hours
Dimmable	Yes
Colour Temp.	3000K
Dimensions (WxH)	2" x 2-5/16"



PAR30 COB 13WD

LONG NECK DIMMABLE LED BULB
AVAILABLE IN WARM AND COOL WHITE

Wattage	13W
Voltage	120V AC
Lumens	800 lm
Beam Angle	40°
Lifetime	15000 Hours
Dimmable	Yes
Colour Temp.	3000K / 5000K
Dimensions (WxH)	3-11/16" x 4-5/8"



PAR30 COB 13WDS

SHORT NECK DIMMABLE LED BULB
AVAILABLE IN WARM WHITE

Wattage	13W
Voltage	120V AC
Lumens	800 lm
Beam Angle	40°
Lifetime	15000 Hours
Dimmable	Yes
Colour Temp.	3000K
Dimensions (WxH)	3-11/16" x 3-1/2"





SLIM LIGHTS

SLIM-TL2-5CCT

2" 8W ROUND LED TRIMLESS DOWNLIGHT WITH 5CCT SELECTABLE



DESCRIPTION:

- Durable airtight aluminium body
- No housing required
- Flangeless installation provides a more high end look
- Fast installation and no junction box needed

AVAILABLE FINISHES:



ACCESSORIES (SOLD SEPARATELY)

EXTENSION CORD 24"/60"/120"/240"

Extension cords for ORTECH slim lights



PLATE2-HB

Galvanized steel mounting plate with hanger bars for ORTECH 2" LED lights



PLATE26-2

2" new construction plate made up of galvanized steel of recessed lighting



Wattage Voltage	8W 120V AC
Lumens Beam Angle	600 lmn 38°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Power Factor	>0.9
Grade of Protection	IP44
Rating	IC Rated / Indoor Use / Damp Location
Application	Recessed Ceiling / Halls / Home / Office / Store / Cafe
Operating Temp.	-20°C ~ +40°C

SLIM LIGHTS

SLIM-RG2-5CCT

2" 8W SLIM REGRESS DOWNLIGHT WITH 5CCT SELECTABLE



DESCRIPTION:

- With Aluminum die-cast construction + driver
- No housing required
- Suitable for wet location
- IC rated for direct contact with insulation

AVAILABLE FINISHES:



ACCESSORIES (SOLD SEPARATELY)

DMD-ELV

Electronic low voltage dimmer switch with single pole 3 way wiring



PLATE2-HB

Galvanized steel mounting plate with hanger bars for ORTECH 2" LED lights



PLATE26-2

2" new construction plate made up of galvanized steel



Wattage Voltage	8W 120V AC
Lumens Beam Angle	600 lmn 38°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Cutout	Ø2-7/8" (73mm)
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Wet Location
Application	Recessed Ceiling / Halls / Home / Office / Store / Cafe
Operating Temp.	-20°C ~ +40°C

2"

SLIM LIGHT ACCESSORIES (SOLD SEPARATELY)

INTERCHANGEABLE REFLECTORS



SLIM2RG-RF-ALCH
Alzek Chrome



SLIM2RG-RF-ALHZ
Alzek Haze



SLIM2RG-RF-BFSN
Satin Nickel Baffle



SLIM2RG-RF-BFWH
White Baffle



SLIM2RG-RF-BFBK
Black Baffle

INTERCHANGEABLE SHOWER RINGS



SLIM2-RINGSH-WH
Shower Ring White



SLIM2-RINGSH-BK
Shower Ring Black

INTERCHANGEABLE OVAL RINGS



SLIM2-RINGOV-WH
Oval Ring White



SLIM2-RINGOV-BK
Oval Ring Black

INTERCHANGEABLE SMALL ROUND RINGS



SLIM2-RINGRS-WH
Small Round Ring White



SLIM2-RINGRS-BK
Small Round Ring Black

INTERCHANGEABLE SCOOP RINGS



SLIM2-RINGSP-WH
Scoop Ring White



SLIM2-RINGSP-BK
Scoop Ring Black

INTERCHANGEABLE REGULAR RINGS



SLIM2-RING-WH
Regular Ring White



SLIM2-RING-SN
Regular Ring Satin Nickel



SLIM2-RING-BK
Regular Ring Black

SLIM LIGHTS

3" SLIM LIGHTS

SLIM3CONT-3CCT

3" SLIM LIGHT WITH INTERCHANGEABLE TRIMS

DESCRIPTION:

- 8W with driver in connection box
- Easy and fast installation
- No housing required
- IC rated for direct contact with insulation



AVAILABLE FINISHES:



ACCESSORIES (SOLD SEPARATELY)

EXTENSION CORD 24"/60"/120"/240"

Extension cords for ORTECH slim lights



PLATE3-HB

Galvanized steel mounting plate with hanger bars for ORTECH 3" LED lights



PLATE26-3

3" new construction plate made up of galvanized steel



Wattage Voltage	8W 120V AC
Lumens Beam Angle	500 lm 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	3000K / 4000K / 5000K
Power Factor	>0.9
Grade of Protection	IP44
Rating	IC Rated / Indoor Use / Damp Location
Application	Recessed Ceiling / Balcony / Overhanging eaves
Operating Temp.	-20°C ~ +40°C

INTERCHANGEABLE TRIMS



SLIM3GIM-5CCT

3" 5 ADJUSTABLE CCT SLIM GIMBAL LIGHT

DESCRIPTION:

- Tilting gimbal light source for directional lighting
- Durable aluminium body with adjustable gimbal
- No housing required
- Type IC and damp location rated



AVAILABLE FINISHES:



ACCESSORIES (SOLD SEPARATELY)

DMD-ELV

Electronic low voltage dimmer switch with single pole 3 way wiring



PLATE3-HB

Galvanized steel mounting plate with hanger bars for ORTECH 3" LED lights



PLATE26-3

3" new construction plate made up of galvanized steel



Wattage Voltage	8W 120V AC
Lumens Beam Angle	550 lm 38°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Cutout	Ø3-1/8" (78 mm)
Grade of Protection	IP44
Rating	IC Rated / Indoor Use / Damp Location
Application	Recessed Ceiling / Halls / Home / Office / Store / Cafe
Operating Temp.	-20°C ~ +40°C

SLIM-RG3-5CCT

3" 5 ADJUSTABLE CCT SLIM REGRESS DOWNLIGHT



DESCRIPTION:

- 8W anti-glare design with driver
- Suitable for damp location
- No housing required
- Adjustable/Fixed aluminium body options

AVAILABLE FINISHES:



ACCESSORIES (SOLD SEPARATELY)

DMD-ELV

Electronic low voltage dimmer switch with single pole 3 way wiring



PLATE3A-HB

Galvanized steel mounting plate with hanger bars for ORTECH 3" LED lights



PLATE26-3A

3" new construction plate made up of galvanized steel



Wattage Voltage	8W 120V AC
Lumens Beam Angle	550 lm 38°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Cutout	Ø3-3/8" (86 mm)
Grade of Protection	IP44
Rating	IC Rated / Indoor Use / Damp Location
Application	Recessed Ceiling / Halls / Home / Office / Store / Cafe
Operating Temp.	-20°C ~ +40°C

4" SLIM LIGHTS

DISC4FL-GM

4" SLIM GIMBAL DOWNLIGHT

DESCRIPTION:

- 90° tilt and 360° rotation, 1-3/8" depth
- Perfect for directional accent lighting
- No recessed housing required
- Install directly into ceiling with clips

AVAILABLE FINISHES:



ACCESSORIES (SOLD SEPARATELY)

DMD-ELV

Electronic low voltage dimmer switch with single pole 3 way wiring



PLATE4-HB

Galvanized steel mounting plate with hanger bars for ORTECH 4" LED lights



PLATE26-4

4" new construction plate made up of galvanized steel



Wattage Voltage	9W 120V AC
Lumens Beam Angle	700-740 lm 38°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	3000K / 5000K
Cutout	Ø4-1/4" (108 mm)
Grade of Protection	IP42
Rating	IC Rated / Indoor Use / Damp Location
Application	Recessed Ceiling / Balcony / Overhanging eaves
Operating Temp.	-20°C ~ +40°C

OLT2-410-5CCT

4" LED RETROFIT RECESSED LIGHT WITH ADJUSTABLE CCT



NEW ARRIVAL



AVAILABLE FINISHES:



White

DESCRIPTION:

- Easy installation
- No additional accessories are required
- Aluminum construction
- Compatible with most dimmers



Wattage Voltage	10W 120V AC
Lumens Beam Angle	800 lm 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Wet Location
Application	Recessed Ceiling / Balcony / Overhanging eaves
Operating Temp.	-20°C ~ +40°C

SLIM4-3CCT

4" 3 ADJUSTABLE CCT SLIM LIGHT WITH INTERCHANGEABLE TRIMS



AVAILABLE FINISHES:



White

DESCRIPTION:

- 12W LED slim light
- Suitable for damp location
- No housing required
- Available in contractor pack (SLIM4CONT-3CCT)



ACCESSORIES (SOLD SEPARATELY)

DMD-ELV

Electronic low voltage dimmer switch with single pole 3 way wiring

PLATE4-HB

Galvanized steel mounting plate with hanger bars for ORTECH 4" LED lights

PLATE26-4

4" new construction plate made up of galvanized steel



Wattage Voltage	12W 120V AC
Lumens Beam Angle	900 lm 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	3000K / 4000K / 5000K
Cutout	Ø4-1/4" (108 mm)
Grade of Protection	IP42
Rating	IC Rated / Indoor Use / Damp Location
Application	Recessed Ceiling / Balcony / Overhanging Eaves
Operating Temp.	-20°C ~ +40°C

INTERCHANGEABLE TRIMS



SLIM4DGR-5CCT

4" 5 ADJUSTABLE CCT SLIM REGRESS GIMBAL LIGHT



AVAILABLE FINISHES:



White



Black

DESCRIPTION:

- High end product with anti-glare design
- Suitable for damp location
- No housing required
- 38° wide beam, 30° tilt and 360° rotation



ACCESSORIES (SOLD SEPARATELY)

EXTENSION CORD 24"/60"/120"/240"

Extension cords for ORTECH slim lights



PLATE4-HB

Galvanized steel mounting plate with hanger bars for ORTECH 4" LED lights



PLATE26-4


4" new construction plate made up of galvanized steel



Wattage Voltage	12W 120V AC
Lumens Beam Angle	900 lm 38°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Cutout	Ø4-1/4" (108 mm)
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Damp Location
Application	Recessed Ceiling / Halls / Home / Office / Store / Cafe
Operating Temp.	-20°C ~ +40°C

SLIM4DGF-5CCT

4" 5 ADJUSTABLE CCT GIMBAL RECESSED LIGHT



AVAILABLE FINISHES:



White



Black

DESCRIPTION:

- High end product
- Suitable for damp location
- No housing required
- Tilting light source for directional lighting



ACCESSORIES (SOLD SEPARATELY)

EXTENSION CORD 24"/60"/120"/240"

Extension cords for ORTECH slim lights



PLATE4-HB

Galvanized steel mounting plate with hanger bars for ORTECH 4" LED lights



PLATE26-4

4" new construction plate made up of galvanized steel



Wattage Voltage	12W 120V AC
Lumens Beam Angle	900 lm 38°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Cutout	Ø4-1/4" (108 mm)
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Damp Location
Application	Recessed Ceiling / Halls / Home / Office / Store / Cafe
Operating Temp.	-20°C ~ +40°C

SLIM4BP-5CCT
4" SLIM LED DOWNLIGHT WITH ADJUSTABLE CCT



- DESCRIPTION:**
- Multiple installation - Recessed & Surface mounted
 - Uniform light distribution without uneven shadow
 - **White colour trim included in box**
 - Easy and fast installation



ACCESSORIES (SOLD SEPARATELY)

DMD-ELV
Electronic low voltage dimmer switch with single pole 3 way wiring



PLATE4-HB
Galvanized steel mounting plate with hanger bars for ORTECH 4" LED lights



PLATE26-4
4" new construction plate made up of galvanized steel



E26 BASE AND METAL PLATE

INTERCHANGEABLE TRIMS



FREE WHITE TRIM
** INCLUDED IN PACKAGING **

SLIM4GIM-5CCT
4" 5 ADJUSTABLE CCT GIMBAL DOWNLIGHT



- DESCRIPTION:**
- High brightness and energy efficient with 30° tilt
 - Easy & fast installation
 - No housing required
 - Class 2 transformer in junction box is included



ACCESSORIES (SOLD SEPARATELY)

EXTENSION CORD 24"/60"/120"/240"
Extension cords for ORTECH slim lights



PLATE4-HB
Galvanized steel mounting plate with hanger bars for ORTECH 4" LED lights



PLATE26-4
4" new construction plate made up of galvanized steel



INTERCHANGEABLE TRIMS



FREE WHITE TRIM
** INCLUDED IN PACKAGING **

Wattage Voltage	9W 120V AC
Lumens Beam Angle	715 lm 110°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Damp Location
Application	Drop Ceilings / Office / Attics / Kitchen / Hallways / Bathroom / Basements
Operating Temp.	-20°C ~ +40°C

SLIM-RG4-5CCT
4" 5 ADJUSTABLE CCT SLIM REGRESS DOWNLIGHT



- DESCRIPTION:**
- Aluminum die-cast construction
 - Customize to desired look
 - No housing required
 - Easy installation



ACCESSORIES (SOLD SEPARATELY)

EXTENSION CORD 24"/60"/120"/240"
Extension cords for ORTECH slim lights



PLATE3A-HB
Mounting plate with hanger bars for ORTECH SLIM4RG/SLIM-RG3/SLIM-RG4



PLATE26-3A
4" new construction plate made up of galvanized steel



INTERCHANGEABLE TRIMS



Wattage Voltage	15W 120V AC
Lumens Beam Angle	1000 lm 38°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Cutout	Ø3-3/4" (95 mm)
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Wet Location
Application	Recessed Ceiling / Halls / Home / Office / Store / Cafe
Operating Temp.	-20°C ~ +40°C

SLIM4ID
4" SLIM INDIRECT LIGHT FOR MOUNTING UNDER JOISTS OR DUCT WORK

- DESCRIPTION:**
- Driver in connection box
 - Easy and Fast installation
 - No housing required
 - IC rated for direct contact with insulation



ACCESSORIES (SOLD SEPARATELY)

DMD-ELV
Electronic low voltage dimmer switch with single pole 3 way wiring



PLATE4-HB
Galvanized steel mounting plate with hanger bars for ORTECH 4" LED lights



PLATE26-4
4" new construction plate made up of galvanized steel



INTERCHANGEABLE TRIMS



Wattage Voltage	9W 120V AC
Lumens Beam Angle	550 lm 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	3000K - 2200K / 5000K - 4000K
Cutout	Ø4-1/4" (108 mm)
Grade of Protection	IP42
Rating	IC Rated / Indoor Use / Damp Location
Application	Drop Ceiling / Office / Hallways / Bathroom / Kitchen
Operating Temp.	-20°C ~ +40°C

DISC4-3CCT
4" LED SLIM LIGHT WTH
ADJUSTABLE CCT



- DESCRIPTION:**
- Class 2 transformer in junction box
 - No housing required
 - Easy & fast installation
 - I.C. Rated For Direct Contact With Insulation



ACCESSORIES (SOLD SEPARATELY)

EXTENSION CORD A24/A120
Flexible Connector 2FT/10FT



PLATE4-HB
Galvanized steel mounting plate with hanger bars
for ORTECH 4" LED lights



PLATE26-4
4" new construction plate made up of galvanized
steel



INTERCHANGEABLE TRIMS



Wattage Voltage	12W 120V AC
Lumens Beam Angle	900 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	3000K / 4000K / 5000K
Cutout	Ø4-1/4" (108 mm)
Grade of Protection	IP44
Rating	IC Rated / Indoor Use / Damp Location
Application	Recessed ceiling / Balcony / Overhanging eaves
Operating Temp.	-20°C ~ +40°C

SLIM4DR-5CCT
4" DEEP REGRESS SLIM PANEL LIGHT
WITH ADJUSTABLE CCT



- DESCRIPTION:**
- Edge-lit Technology, No Glare Or Dark Spots
 - No Existing Recessed Housing Or Junction Box Required
 - Easy-access CCT Switch and Frosted Lens
 - I.C. Rated For Direct Contact With Insulation



ACCESSORIES (SOLD SEPARATELY)

EXTENSION CORD A24/A120
Flexible Connector 2FT/10FT



PLATE4-HB
Galvanized steel mounting plate with hanger bars
for ORTECH 4" LED lights



PLATE26-4
4" new construction plate made up of galvanized
steel



INTERCHANGEABLE TRIMS



Wattage Voltage	12W 120V AC
Lumens Beam Angle	750 lmn 100°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP44
Rating	IC Rated / Damp Location
Application	Drop Ceilings / Office / Attics / Kitchen / Hallways / Bathroom / Basements
Operating Temp.	-20°C ~ +40°C

SLIM4FR-5CCT
4" FIRE RATED RECESSED DOWNLIGHT
WITH ADJUSTABLE CCT



- DESCRIPTION:**
- 2-hour fire rating
 - Residential/Commercial grade driver included
 - Tested & Certified to comply with UL 263-2011(R2022)
& ASTM E119-20 & CAN/ULC-S101-14



ACCESSORIES (SOLD SEPARATELY)


PLATE4A-HB
Mounting plate with hanger bars for ORTECH
SLIM4FR-5CCT/SLIM4FL+FR-5CCT



PLATE26-4A
4" new construction plate made up of galvanized
steel



INTERCHANGEABLE TRIMS



Wattage Voltage	12W 120V AC
Lumens Beam Angle	800 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Power Factor	>0.9
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Wet Location
Application	Recessed Ceiling / Halls / Home / Office / Store / Cafe
Operating Temp.	-20°C ~ +40°C

SLIM4FL+FR-5CCT
4" FIRE RATED FLOATING GIMBAL
RECESSED LED WITH ADJUSTABLE CCT



- DESCRIPTION:**
- 2-hour fire rating
 - Commercial grade driver included
 - Tested & Certified to comply with UL 263-2011(R2022)
& ASTM E119-20 & CAN/ULC-S101-14



ACCESSORIES (SOLD SEPARATELY)

PLATE4A-HB
Mounting plate with hanger bars for ORTECH
SLIM4FR-5CCT/SLIM4FL+FR-5CCT



PLATE26-4A
4" new construction plate made up of galvanized
steel



Wattage Voltage	9W 120V AC
Lumens Beam Angle	750 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP44
Rating	IC Rated / Damp Location
Application	Recessed Ceiling / Balcony / Overhanging eaves
Operating Temp.	-20°C ~ +40°C

6" SLIM LIGHTS

SLIM6ID

6" SLIM INDIRECT LIGHT FOR MOUNTING UNDER JOISTS OR DUCT WORK

DESCRIPTION:

- 12W with driver in connection box
- Can be installed directly into drywall
- No housing required
- Includes 2 spring loaded clips

AVAILABLE FINISHES:



White



ACCESSORIES (SOLD SEPARATELY)

DMD-ELV

Electronic low voltage dimmer switch with single pole 3 way wiring

PLATE6-HB

Galvanized steel mounting plate with hanger bars for ORTECH 6" LED lights

PLATE26-6

6" new construction plate made up of galvanized steel



Wattage Voltage	12W 120V AC
Lumens Beam Angle	700 lmn 110°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	3000K-2200K / 5000K-4000K
Cutout	Ø6-19/64" (160 mm)
Grade of Protection	IP44
Rating	IC Rated / Indoor Use / Damp Location
Application	Drop ceilings / Office / Attics / Hallways / Bathrooms / Kitchen / Basements
Operating Temp.	-20°C ~ +40°C

SLIM6-3CCT

6" ROUND LED SLIM DOWNLIGHT WITH INTERCHANGEABLE TRIMS



DESCRIPTION:

- Edge-lit technology, no glare or dark spots
- Instant-On
- Suitable for damp location
- Dimming: TRIAC down to 10%

AVAILABLE FINISHES:



White



ACCESSORIES (SOLD SEPARATELY)

DMD-ELV

Electronic low voltage dimmer switch with single pole 3 way wiring

PLATE6-HB

Galvanized steel mounting plate with hanger bars for ORTECH 6" LED lights

PLATE26-6

6" new construction plate made up of galvanized steel



Wattage Voltage	15W 120V AC
Lumens Beam Angle	1100 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	3000K / 4000K / 5000K
Power Factor	>0.9
Grade of Protection	IP44
Rating	IC Rated / Indoor Use / Damp Location
Application	Recessed Ceiling / Balcony / Overhanging Eaves
Operating Temp.	-20°C ~ +40°C

INTERCHANGEABLE TRIMS



SLIM6FR-5CCT

6" FIRE RATED RECESSED DOWNLIGHT WITH ADJUSTABLE CCT



NEW ARRIVAL



DESCRIPTION:

- 2-hour fire rating
- Residential/Commercial grade driver included
- Tested & Certified to comply with UL 263-2011(R2022) & ASTM E119-20 & CAN/ULC-S101-14



ACCESSORIES (SOLD SEPARATELY)

PLATE6-HB

Mounting plate with hanger bars for ORTECH 6" Slim Lights



PLATE26-6

6" new construction plate made up of galvanized steel



INTERCHANGEABLE TRIMS



Wattage Voltage	15W 120V AC
Lumens Beam Angle	1000 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Wet Location
Application	Recessed Ceiling / Halls / Home / Office / Store / Cafe
Operating Temp.	-20°C ~ +40°C

SLIM6FL+FR-5CCT

6" FIRE RATED FLOATING GIMBAL RECESSED LED WITH ADJUSTABLE CCT



NEW ARRIVAL



DESCRIPTION:

- 2-hour fire rating
- Commercial grade driver included
- Tested & Certified to comply with UL 263-2011(R2022) & ASTM E119-20 & CAN/ULC-S101-14



ACCESSORIES (SOLD SEPARATELY)

PLATE6-HB

Mounting plate with hanger bars for ORTECH 6" Slim Lights



PLATE26-6

6" new construction plate made up of galvanized steel



Wattage Voltage	15W 120V AC
Lumens Beam Angle	1000 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP44
Rating	IC Rated / Damp Location
Application	Recessed Ceiling / Balcony / Overhanging eaves
Operating Temp.	-20°C ~ +40°C

OLT2-615-5CCT
6" LED RETROFIT RECESSED LIGHT WITH ADJUSTABLE CCT



NEW ARRIVAL



AVAILABLE FINISHES:



White


- DESCRIPTION:**
- Easy installation
 - No additional accessories are required
 - Aluminum construction
 - Compatible with most dimmers



Wattage Voltage	15W 120V AC
Lumens Beam Angle	1000 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable Air Tight	Yes Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Wet Location
Application	Recessed Ceiling / Balcony / Overhanging eaves
Operating Temp.	-20°C ~ +40°C



SLIM LIGHTS

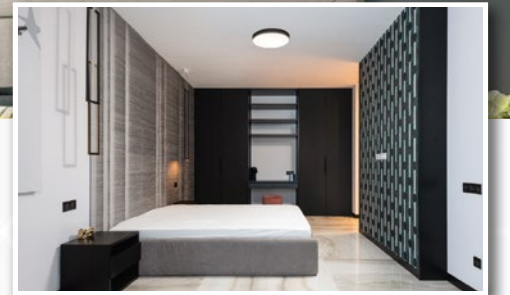

FLUSH MOUNTS

1300T-10-3CCT | 1302T-14-3CCT | 1303T-16-3CCT
10", 14" AND 16" FLUSH MOUNTS WITH COLD ROLLED STEEL PLATE AND RINGS



DESCRIPTION:

- Efficient heat dissipation
- Uniform Lighting
- UV protection for outdoor light up
- High quality cover

AVAILABLE FINISHES:



Wattage Voltage	16W, 26W, 36W 120V AC
Lumens Beam Angle	1120 lmn, 1820 lmn, 2520 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 4000K / 5000K
Size	Ø10x2.5", Ø14x2.6", Ø16x2.8"
Grade of Protection	IP20
Rating	IC Rated / Indoor Use / Damp Location
Application	Corridor / Lobbies / Kitchen / Bedroom / Bathroom
Operating Temp.	-20°C ~ +40°C



FLUSH MOUNTS

1501-11WH-3CCT | 1502-14WH-3CCT

11" AND 14" FLUSH MOUNTS WITH HIGH LUMEN TRANSMISSION COVER



DESCRIPTION:

- High Transmittance
- Uniform Lighting
- UV protection for outdoor light up
- High quality cover

AVAILABLE FINISHES:



Wattage Voltage	20W, 26W 120V AC
Lumens Beam Angle	1400 lmn, 2100 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Rating	IC Rated / Damp Location
Application	Corridor / Lobbies / Kitchen / Bedroom / Bathroom / Balconies
Operating Temp.	-20°C ~ +40°C

3109-3CCT | 3112-3CCT | 3116-3CCT

9", 12" AND 16" LED FRAMELESS FLUSH MOUNT WITH ADJUSTABLE CCT



DESCRIPTION:

- Uniform lighting, no glare or dark spots
- Easy rotatable installation
- Good quality LGP (Light Guide Plate)
- Good quality diffuser plate

AVAILABLE FINISHES:



Wattage Voltage	20W, 25W, 30W 120V AC
Lumens Beam Angle	1600 lmn, 2000 lmn, 2400 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Rating	IC Rated / Indoor Use / Damp Location
Application	Corridor / Lobbies / Kitchen / Bedroom / Bathroom
Operating Temp.	-20°C ~ +40°C

1701-12SN | 1702-14SN

12" AND 14" FLUSH MOUNTS WITH OPAL ACRYLIC DIFFUSER

DESCRIPTION:

- Energy saving cost effective solution
- Enhances any decor
- Offers abundant of light
- Low profile light

AVAILABLE FINISHES:



Wattage Voltage	15W, 22W 120V AC
Lumens Beam Angle	1050 lmn, 1400 lmn 115°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Damp Location
Application	Living room / Hallway / Office / Closet / Bedroom / Kitchen / Stairway
Operating Temp.	-20°C ~ +40°C

2104-5CCT | 2106-5CCT | 2109-5CCT | 2112-5CCT

5", 7", 9" AND 12" SUPER SLIM FRAME DESIGN FLUSH MOUNTS WITH ADJUSTABLE CCT



DESCRIPTION:

- Edge-lit technology, no glare or dark spots
- Easy installation
- White translucent acrylic lens
- 5/8" thickness

AVAILABLE FINISHES:



Wattage Voltage	10W, 15W, 18W, 22W 120V AC
Lumens Beam Angle	600 lmn, 900 lmn, 1200 lmn, 1450 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Damp Location
Application	Corridor / Lobbies / Kitchen / Bedroom / Bathroom / Balconies
Operating Temp.	-20°C ~ +40°C

INTERCHANGEABLE TRIMS



2104-5CCT-RING-SN | 2106-5CCT-RING-SN
2109-5CCT-RING-SN | 2112-5CCT-RING-SN
Satin Nickel



2104-5CCT-RING-BK | 2106-5CCT-RING-BK
2109-5CCT-RING-BK | 2112-5CCT-RING-BK
Black

2135-3CCT | 2180-3CCT | 2225-3CCT | 2300-3CCT

4", 6", 9" AND 12" SLIM LED FLUSH MOUNT WITH ADJUSTABLE CCT



DESCRIPTION:

- Built-in driver
- TRIAC Dimming
- Can be installed to J-box
- Can be installed as a recessed fixture

AVAILABLE FINISHES:



Wattage Voltage	6W, 12W, 18W, 24W 120V AC
Lumens Beam Angle	400 lmn, 840 lmn, 1530 lmn, 2160 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 4000K / 5000K
Size	Ø135x13, Ø180x13, Ø225x13, Ø225x13mm
Grade of Protection	IP20
Rating	IC Rated / Indoor Use / Damp Location
Application	Corridor / Lobbies / Kitchen / Bedroom / Bathroom / Balconies
Operating Temp.	-20°C ~ +40°C



INTERCHANGEABLE TRIMS



2400-3CCT

16" SURFACE FLUSH MOUNT/SEMI-FLUSH MOUNT WITH ADJUSTABLE CCT



DESCRIPTION:

- Good quality LGP (Light Guide Plate)
- Uniform Lighting, no black dots or shadow
- Good quality diffuser plate
- Highly efficient

AVAILABLE FINISHES:



Wattage Voltage	30W 120V AC
Lumens Beam Angle	2700 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Rating	IC Rated / Indoor Use / Damp Location
Application	Corridor / Lobbies / Kitchen / Bedroom / Bathroom / Balconies
Operating Temp.	-20°C ~ +40°C



FLUSH MOUNTS

4110-3CCT | 4112-3CCT | 4116-3CCT

10", 12" AND 16" ROUND LED FLUSH MOUNTS WITH BACKLIGHT AND ADJUSTABLE CCT



DESCRIPTION:

- Backlight to light up the ambience
- Rotatable easy installation
- Super slim design
- Frames sold separately

AVAILABLE FINISHES:



Wattage Voltage	15W, 18W, 30W 120V AC
Lumens Beam Angle	1200 lmn, 1440 lmn, 2400 lmn 120°
Lifetime	50000 Hours
Dimmable Air Tight	Yes Yes
Colour Temp.	3000K / 4000K / 5000K
Size	Ø250x47.5mm, Ø300x48.5mm, Ø400x48.5mm
Grade of Protection	IP54
Rating	IC Rated / Indoor Use
Application	Corridor / Lobbies / Kitchen / Bedroom / Bathroom / Balconies
Operating Temp.	-20°C ~ +40°C



INTERCHANGEABLE FRAMES



2225PS

9" LED FLUSH MOUNT WITH PASSIVE INFRARED SENSOR (PIR SENSOR)

DESCRIPTION:

- Fits all ceiling types
- Screwless design
- Uniform light distribution
- Includes PIR Sensor (Passive Infrared Sensor)


AVAILABLE FINISHES:



Wattage Voltage	18W 120V AC
Lumens Beam Angle	1440 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable	No
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP44
Rating	IC Rated / Indoor Use / Wet Location
Application	Corridors / Lobbies / Kitchens / Balconies / Bathrooms / Closets
Operating Temp.	-20°C ~ +40°C



FLUSH MOUNTS

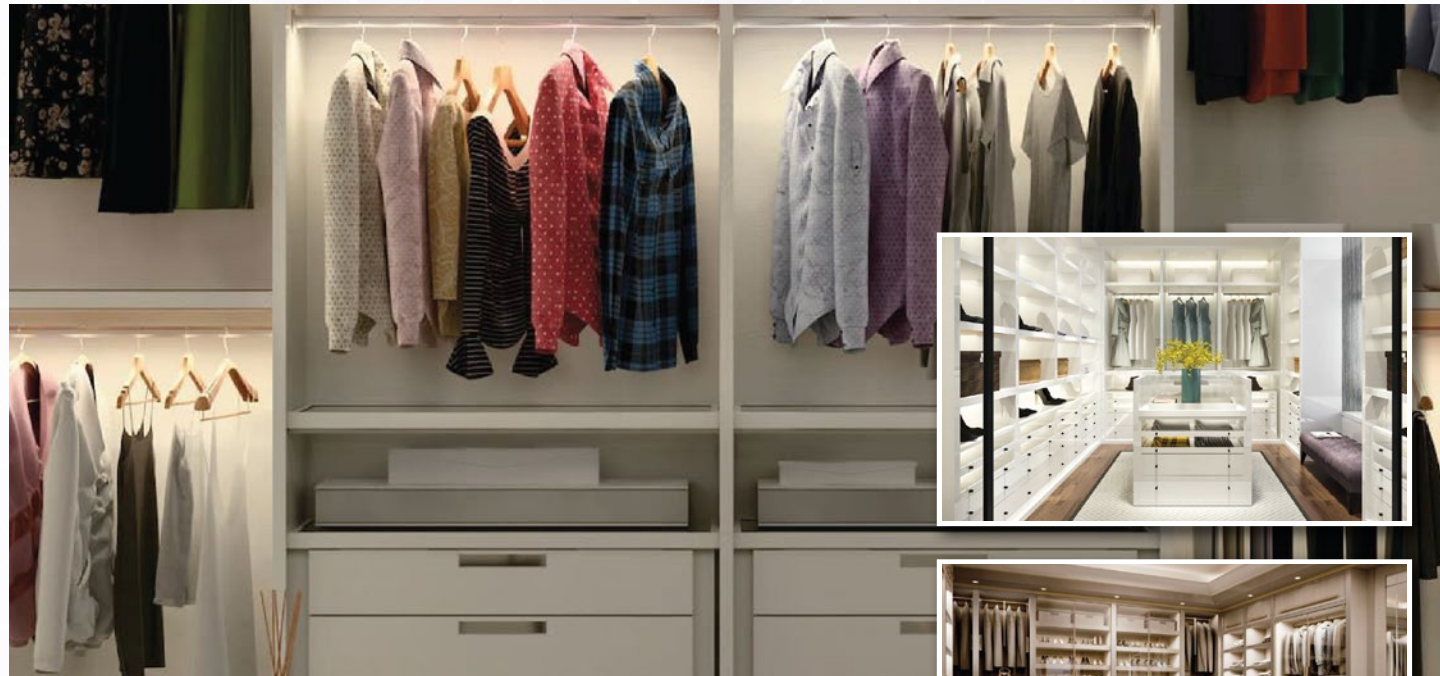

CLOSET LIGHTS

1051 | 1051-S

CEILING OR WALL MOUNTABLE LED CLOSET LIGHT WITH OPAL DIFFUSER AND PIR SENSOR

DESCRIPTION:

- Energy efficient
- Fits 3-1/4" and 4" ceiling boxes
- Easy installation
- Can be used for outdoor covered areas

AVAILABLE FINISHES:



Wattage Voltage	9W 110-240V AC
Lumens Beam Angle	900 lmn 100°
Lifetime CRI	50000 Hours >70
Dimmable	No
Colour Temp.	3000K / 4000K / 5000K, 3000K / 5000K
Detection Method	Passive Infrared Sensor
Grade of Protection	IP43
Rating	Non-IC Rated / Dry and Damp Location
Application	Closets / Storage rooms / Attics / / Basements / Outdoor covered area
Operating Temp.	-20°C ~ +50°C

CLOSET LIGHTS



STEP LIGHTS

RD12-6LED

LOW VOLTAGE MINI LED STEP LIGHT


DESCRIPTION:

- Recess mounted
- Simple pressure fit installation
- Perfect for step, wall or path lighting
- Available with square or round trims

Wattage Voltage	0.17W 12V DC
Lumens Beam Angle	10 lmn 60°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP66
Rating	Non-IC Rated / Indoor Use / Damp location
Application	Under cabinet / Home / Office / Kitchen
Operating Temp.	-20°C ~ +40°C



INTERCHANGEABLE TRIMS



RD12-3-WH
White Square
Trim Ring



RD12-3-SN
Satin Nickel Square
Trim Ring



RD12-3-BK
Black Square
Trim Ring



RD12-4-WH
White Round
Trim Scoop Ring



RD12-4-SN
Satin Nickel Round
Trim Scoop Ring



RD12-4-BK
Black Round
Trim Scoop Ring

STEP LIGHTS

ST-1025

HORIZONTAL / VERTICAL MOUNTED
STEP LIGHT

DESCRIPTION:

- Suitable for both indoor and outdoor use
- IC rated for direct contact with insulation
- Enhances overall look of the stairs
- Suitable for wet locations

AVAILABLE FINISHES:



Wattage Voltage	2.5W 120V AC
Lumens Beam Angle	125 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable	No
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP67
Rating	IC Rated / Wet Location
Application	Indoor and outdoor wall mount applications
Operating Temp.	-20°C ~ +40°C



STR1W | STS1W

ROUND AND SQUARE STEP LIGHTS
FOR INDOOR USE

DESCRIPTION:

- Round and square 2 inches
- Cannot be installed outdoors
- Easy installation
- Suitable for damp locations

AVAILABLE FINISHES:



Wattage Voltage	1W 12V DC
Lumens Beam Angle	20 lmn 60°
Lifetime CRI	50000 Hours 80
Dimmable	No
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Rating	Non-IC Rated / Indoor Use / Damp Location
Application	Under Cabinet / Home / Office / Kitchen
Operating Temp.	-20°C ~ +40°C



PUK M

SUPER SLIM LED PUK LIGHT FOR MOUNTING
ON STAIR STEPS

DESCRIPTION:

- Inherently protected
- Good for mounting inside cabinets as well
- Suitable for damp location
- Must be used only with class 2 power unit

AVAILABLE FINISHES:



Wattage Voltage	1W 12V DC
Lumens Beam Angle	70 lmn 60°
Lifetime CRI	50000 Hours 80
Dimmable	No
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP42
Rating	Non-IC Rated / Indoor Use / Damp Location
Application	Under Cabinet / Home / Office / Stairs / Kitchen
Operating Temp.	-20°C ~ +40°C

COMPATIBLE DRIVERS FOR STEP LIGHTS



OT-08D
Maximum 8W
Class 2 driver




OT-15D
Maximum 15W
Class 2 driver



OT-24D
Maximum 24W
Class 2 driver



OT-48D
Maximum 48W
Class 2 driver



OT-60D
Maximum 60W
Class 2 driver



OT-96D
Maximum 8W
Class 2 driver





PUK LIGHTS


PUK 021

MINI LED PUK DOWNLIGHT FOR INDOOR USE

DESCRIPTION:

- Easy installation
- High brightness
- Energy efficient
- Perfect for cabinet, closet or a wine bar

AVAILABLE FINISHES:

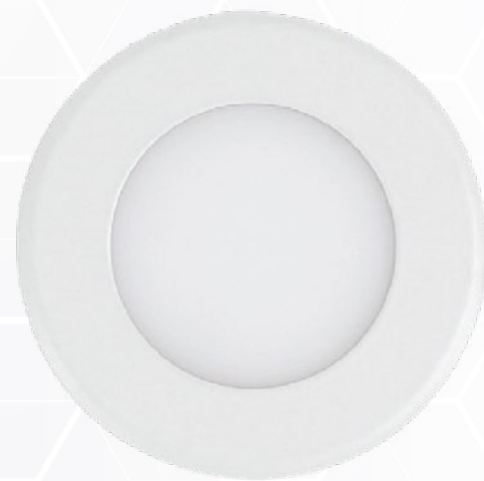

Wattage Voltage	1.5W 12V DC
Lumens Beam Angle	100 lmn 104°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP43
Rating	Non-IC Rated / Indoor Use / Damp Location
Application	Under Cabinet / Home / Office / Kitchen
Operating Temp.	-10°C ~ +40°C



PUK M2G

MINI LED PUK DOWNLIGHT MADE OF GIMBAL FOR INDOOR USE ONLY

DESCRIPTION:

- Easy installation
- Comes with 2 loose wires
- Suitable for damp location
- High brightness

AVAILABLE FINISHES:



Wattage Voltage	2W 12V DC
Lumens Beam Angle	160 lmn 21°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Damp Location
Application	Under Cabinet / Home / Office / Kitchen / Workshop
Operating Temp.	-20°C ~ +40°C



PUK M3G

MINI LED PUK DOWNLIGHT MADE OF GIMBAL FOR INDOOR USE ONLY

DESCRIPTION:

- Easy installation
- Energy efficient
- Suitable for damp location
- High brightness

AVAILABLE FINISHES:



Wattage Voltage	3W 12V DC
Lumens Beam Angle	300 lmn 21°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP54
Rating	IC Rated / Indoor Use / Damp Location
Application	Under Cabinet / Home / Office / Kitchen / Workshop
Operating Temp.	-20°C ~ +40°C



PUK SS

SUPER SLIM LED PUK LIGHT
FOR MOUNTING UNDER KITCHEN CABINET



DESCRIPTION:

- High brightness
- Toolless access to fixture components
- Easy installation
- Enhance residential or commercial setting

AVAILABLE FINISHES:



Wattage Voltage	2.2W 12V DC
Lumens Beam Angle	150 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP42
Rating	Non-IC Rated / Indoor Use / Damp Location
Application	Under Cabinet / Home / Office / Kitchen / Workshop
Operating Temp.	-20°C ~ +40°C

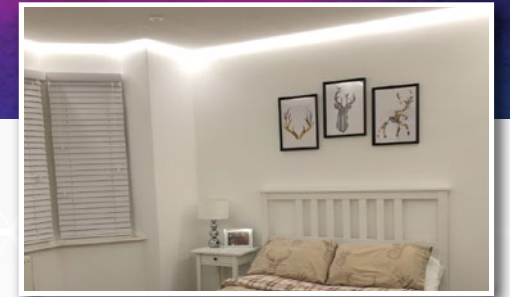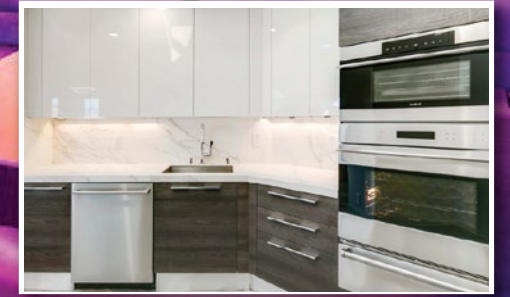

COMPATIBLE DRIVERS FOR PUK LIGHTS



OT-08D
Maximum 8W
Class 2 driver




OT-15D
Maximum 15W
Class 2 driver



OT-24D
Maximum 24W
Class 2 driver



OT-48D
Maximum 48W
Class 2 driver



OT-60D
Maximum 60W
Class 2 driver



OT-96D
Maximum 8W
Class 2 driver

STRIP LIGHTS

SL-25M

ULTRA THIN, FLEXIBLE LED STRIP LIGHT
OF 25 METERS LENGTH, 60 LEDS PER METER

DESCRIPTION:

- Easy installation
- Double sided 3M tape on back
- 3528 SMD light source
- High brightness


Wattage Voltage	4.8W per meter 12V DC
Lumens Beam Angle	475 lmn per meter 120°
Lifetime CRI	50000 Hours >90
Dimmable	Yes
Colour Temp.	3000K / 5000K / BLUE
Warranty	5 Years
Grade of Protection	IP20
Rating	Non-IC Rated / Indoor Use / Dry Location
Application	Cove Lighting / Display Lighting / Mood Lighting / Under Cabinet Lighting
Operating Temp.	-25°C ~ +65°C



ACCESSORIES (SOLD SEPARATELY)



SL-CONN
Solderless connector
good for power to cut
pieces.



SL-CONN(TWO)
Solderless connector with
wire good for
corners.



SL-CONN(SNAP)
Solderless connector for
SL-25M and
SL120-25M.



YD-1607
16mm PCB width
strip light
channels.



YD-1806
13mm PCB width
strip light
channels.



SL120-25M

ULTRA THIN, HIGH LIGHT LED STRIP LIGHT OF 25 METERS LENGTH, 120 LEDS PER METER

DESCRIPTION:

- Easy installation
- Double sided 3M tape on back
- 3528 SMD light source
- High brightness

Wattage Voltage	9.6W per meter 12V DC
Lumens Beam Angle	950 lmn per meter 120°
Lifetime CRI	50000 Hours >90
Dimmable	Yes
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Rating	Non-IC Rated / Indoor Use / Dry Location
Application	Accent Lighting / Display Lighting / Back bar Lighting / Under Cabinet Lighting
Operating Temp.	-25°C ~ +65°C



ACCESSORIES (SOLD SEPARATELY)



SL-50M

CUTTABLE AND CONNECTABLE LED STRIP LIGHT OF 50 METERS LENGTH, 60 LEDS PER METER

DESCRIPTION:

- Easy installation, Plug and play
- Clip or channel mount
- No need for driver and soldering

Wattage Voltage	8-10W per meter 120V AC
Lumens Beam Angle	780 lmn per meter 120°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP67
Rating	Non-IC Rated / Dry Location
Application	Under Cabinet Lighting / Home / Office / Garage / Kitchen
Operating Temp.	-30°C ~ +40°C



ACCESSORIES (SOLD SEPARATELY)



STRIP LIGHTS

SLS-B3300-6 | SLS-B3300-12 | SLS-B3300-24 | SLS-B3300-36 | SLS-B3300-48

6", 12", 24", 36" AND 48" LED UNDER STRIP LIGHTS TO ADD EXTRA STYLE TO YOUR HOME


DESCRIPTION:

- Link up to 10 fixtures
- No shadow linking connector
- Durable extruded aluminum frame with frosted milky photocell lens
- Powered by LED integral strip that maintains uniform intensity

Wattage Voltage	2W, 3W, 6W, 9W, 12W 12V DC
Lumens Beam Angle	90lmn, 200lmn, 400lmn, 600lmn, 800lmn 110°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Rating	Non-IC Rated / Indoor Use / Damp Location
Application	Under Cabinet / Home / Office / Garage / Kitchen
Operating Temp.	-20°C ~ +40°C



ACCESSORIES (INCLUDED)

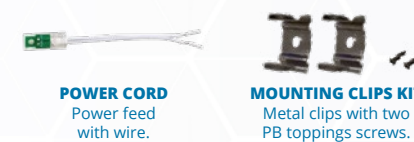

ACCESSORIES (SOLD SEPARATELY)



SL-RGB25M

25M LENGTH CUTTABLE LED RGB STRIP LIGHT OF 30 LEDS PER METER

DESCRIPTION:

- Easy installation, Plug and play
- Double sided 3M tape
- 5050 SMD light source synchronized colour change

Wattage Voltage	7.2W per meter 12V DC
Lumens Beam Angle	175 lmn per meter 120°
Lifetime	36000 Hours
Dimmable	Yes
Colour Temp.	RGB / Multicolour
Warranty	5 Years
Grade of Protection	IP20, IP54, IP65, IP67, IP68
Rating	Non-IC Rated / Dry, Damp, Wet Location
Application	Cave Lighting / Display Lighting / Mood Lighting / Under Cabinet Lighting
Operating Temp.	-25°C ~ +60°C



ACCESSORIES (SOLD SEPARATELY)



STRIP LIGHTS

SLS5-25M

COB LED FLEXIBLE STRIP LIGHT
OF 25 METERS LENGTH, 480 LEDS PER METER

DESCRIPTION:

- Easy installation
- For general low level lighting in cars, boats, caravans
- 3M brand adhesive backing
- Extremely luminous with wide viewing angle

Wattage Voltage	5W per meter 12V DC
Lumens Beam Angle	4800 lmn 180°
Lifetime CRI	50000 Hours >90
Dimmable	Yes
Colour Temp.	3000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Rating	Non-IC Rated / Indoor Use / Dry Location
Application	Display Lighting / Mood Lighting / Under Cabinet Lighting
Operating Temp.	-25°C ~ +65°C



ACCESSORIES (SOLD SEPARATELY)



SLS5-CONN
Solderless connector for SLS5-25M that is good for power to cut pieces.



SLS5-CONN(TWO)
Solderless connector for SLS5-25M that is good for corners.

SL-RGB5LO

LED LOW VOLTAGE RGB STRIP
OF 5 METERS LENGTH, 60 LEDS PER METER

DESCRIPTION:

- Has 20 colours, 4 levels of brightness, 4 modes
- Mounted with 3m tape backing
- Produces little heat, making the strip safe to touch

Wattage Voltage	12W per meter 12V DC
Lumens Beam Angle	N/A 120°
Lifetime	30000 Hours
Dimmable	Yes
Colour Temp.	RGB / Multicolour
Warranty	5 Years
Grade of Protection	IP65
Rating	Non-IC Rated / Wet Location
Application	Under Cabinet Lighting / Home / Office / Garage / Kitchen
Operating Temp.	-20°C ~ +45°C



INCLUDED IN PACKAGING

5M LED
TAPE LIGHT

PLUG-IN DRIVER
(POWER SUPPLY)

COLOUR CHANGING
CONTROLLER WITH
IR SENSOR

REMOTE

SL-RGB50M

CUTTABLE AND CONNECTABLE LED STRIP LIGHT
OF 50 METERS, 60 LEDS PER METER

DESCRIPTION:

- Easy installation
- No need for driver and soldering
- Plug and play, one plug cord can run the longest 164 ft.(50m)
- Save effort and labour cost on changing lights frequently

Wattage Voltage	2-10W 120V AC
Lumens Beam Angle	780 lmn 120°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	RGB / Multicolour
Warranty	5 Years
Grade of Protection	IP67
Rating	Non-IC Rated / Dry, Damp, Wet Location
Application	Under Cabinet / Home / Office / Garage / Kitchen
Operating Temp.	-30°C ~ +40°C



* SL-RGB50M CANNOT be used under water for long time.



ACCESSORIES (SOLD SEPARATELY)



REMOTE25M-SLRGB
Transformer + Remote
for SL-RGB50M.



REMOTE50M-SLRGB
Transformer + Remote
for SL-RGB50M.



RGB50M-END CAP
End cap for
SL-RGB50M.



RGB50M-CONN(L)
L connector for
SL-RGB50M.



RGB50M-CONN(T)
T connector for
SL-RGB50M.



RGB50M-CONN
Straight connector
for SL-RGB50M.





LANDSCAPE LIGHTS

OD-DKB201U | OD-DKB202


LED DECK LIGHTS WITH SOLID BRASS HOUSING

Voltage	12V AC
Housing Lamp Base	Solid Brass GU5.3 Bi-pin base
Lamp Lens	12V G4 bulb (not included) Frosted
Wiring	3'18/2 UL wire, SPT-2W leads
Operating Temp.	-20°C ~ +40°C
Warranty	5 Years

OD-HSA201U | OD-HSB201

LED HARDSCAPE LIGHTS WITH SOLID BRASS HOUSING

Wattage Voltage	4W 12V AC
Housing Colour Temp.	Aluminium, Solid Brass 2700K
Mounting Lens	3pcs stainless steel bracket Clear
Wiring	3'18/2 UL wire, SPT-2W leads
Operating Temp.	-25°C ~ +40°C
Warranty	5 Years

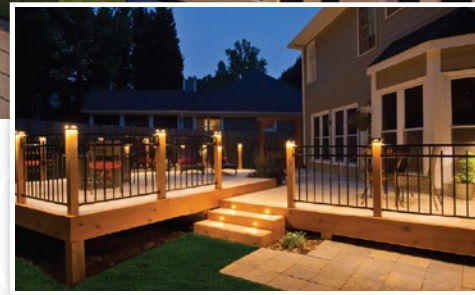

OD-PTA201 | OD-PTA203 | OD-PTA204 | OD-UPA207

BLACK ALUMINUM LANDSCAPE FIXTURES WITH VERY DURABLE COATING TO SURVIVE HARSH ENVIRONMENTS

Voltage	12V AC
Housing Lamp Base	Aluminum GU5.3 Bi-pin base/Fixed socket
Lamp Lens	12V G4/MR16 bulb (not included) Frosted
Wiring	3'18/2 UL wire, SPT-2W leads
Operating Temp.	-25°C ~ +40°C
Warranty	5 Years

OD-PTB201U | OD-PTB204U | OD-PTB214U

LED PATH LIGHT WITH SOLID BRASS HOUSING

Voltage	12V AC
Housing Lamp Base	Solid Brass GU5.3 Bi-pin base
Lamp Lens	12V G4 bulb (not included) Frosted
Wiring	3'18/2 UL wire, SPT-2W leads
Operating Temp.	-25°C ~ +40°C
Warranty	5 Years

OD-STB201 | OD-STB204

LED STEP LIGHTS WITH FROSTED LENS, LOUVERED FACE AND FLAT FACE PLATE

Voltage	12V AC
Housing Lamp Base	Solid Brass GU5.3 Bi-pin base
Lamp Lens	12V G4 bulb (not included) Frosted
Wiring	3'18/2 UL wire, SPT-2W leads
Operating Temp.	-25°C ~ +40°C
Warranty	5 Years

OD-UGB201A

LED INGROUND LIGHT WITH ALUMINUM GIMBAL HOUSING

Voltage	12V AC
Housing Lamp Base	Aluminum gimbal GU5.3 Bi-pin base
Lamp Lens	12V MR16 bulb (not included) Clear
Wiring	3'18/2 UL wire, SPT-2W leads
Operating Temp.	-25°C ~ +40°C
Warranty	5 Years

OD-HSA202

LED LANDSCAPE LIGHT WHICH FEATURES A HIGHLY EFFICIENT EMBEDDED INTEGRATED LED'S

Wattage Voltage	1.5W 12V AC
Lumen Light Source	150 lmn Integrated LED's
Colour Temp. Lens	2700K Clear
Wiring CRI	3'SPT-1W 80
Operating Temp.	-20°C ~ +40°C
Warranty	5 Years



OD-UGB201U | OD-UGB202U

LED INGROUND LIGHT WITH SOLID BRASS HOUSING

Voltage	12V AC
Housing Lamp Base	Solid Brass GU5.3 Bi-pin base
Lamp Lens	12V MR16 bulb (not included) Convex glass
Wiring	3'18/2 UL wire, SVT-2W leads
Operating Temp.	-25°C ~ +40°C
Warranty	5 Years



OD-UPB104U

LED LANDSCAPE LIGHTING WALL WASH WITH ANTIQUE BRASS COLOUR THUMB

Voltage	12V AC
Housing Lamp Base	Solid Brass GU5.3 Bi-pin base, Fixed socket
Lamp Lens	12V G4 bulb (not included) Frosted
Wiring	3'18/2 UL wire, SPT-2W leads
Operating Temp.	-25°C ~ +40°C
Warranty	5 Years



OD-UPB201U-FIX | OD-UPB203

LED LANDSCAPE LIGHTING UPLIGHT WITH FIXED SOCKET LAMP BASE

Voltage	12V AC
Housing Lamp Base	Solid Brass GU5.3 Bi-pin base
Lamp Lens	12V MR16 bulb (not included) Convex glass
Wiring	3'18/2 UL wire, SPT-2W leads
Operating Temp.	-25°C ~ +40°C
Warranty	5 Years



OD-A1012W

MODERN AND COMPACT MINI DECK LIGHT WHICH GIVES OUT SMOOTH LIGHT

Wattage Voltage	1W 9-15V AC
Lumen Light Source	40 lmn Integrated LED's
Colour Temp. Lens	2700K Frosted
Wiring CRI	3'SPT-1W 80
Operating Temp.	-20°C ~ +40°C
Warranty	5 Years



OD-A2012W

MODERN AND COMPACT DECK LIGHT WHICH PROVIDES A GENEROUS AND ENERGY EFFICIENT LIGHT OUTPUT

Wattage Voltage	2W 9-15V AC
Lumen Light Source	30 lmn Integrated LED's
Colour Temp. Lens	2700K Frosted
Wiring CRI	3'SPT-1W 80
Operating Temp.	-20°C ~ +40°C
Warranty	5 Years



LANDSCAPE LIGHTS

OD-A2022

LED DOWNWARD AND DIRECT DISTRIBUTION DECK LIGHT

Wattage Voltage	2W 9-15V AC
Lumen Light Source	30 lmn Integrated LED's
Colour Temp. Lens	2700K Frosted
Wiring CRI	3'SPT-1W 80
Operating Temp.	-20°C ~ +40°C
Warranty	5 Years



OD-A2032W

UNIQUE LED DECK LIGHT WITH DIE-CAST ALUMINUM CONSTRUCTION

Wattage Voltage	2W 9-15V AC
Lumen Light Source	30 lmn Integrated LED's
Colour Temp. Lens	2700K Frosted
Wiring CRI	3'SPT-1W 80
Operating Temp.	-20°C ~ +40°C
Warranty	5 Years



OD-A2022W

MODERN LED LANDSCAPE STEP LIGHTS TO GUIDE YOUR STEPS

Wattage Voltage	2W 9-15V AC
Lumen Light Source	20 lmn Integrated LED's
Colour Temp. Lens	2700K Frosted
Wiring CRI	3'SPT-1W 80
Operating Temp.	-20°C ~ +40°C
Warranty	5 Years



PL50FT-2700K

50 FT. PATIO STRING LIGHT PERFECT FOR ANY OUTDOOR LIGHTING DISPLAY

Wattage Voltage	1.2W per bulb 120V AC
IP Rating Beam Angle	IP65 270°
Colour Temp. Lamp	2700K E26 base
Wiring CRI	SJTW 18AWG cable 80
Operating Temp.	-20°C ~ +40°C
Warranty	2 Years



NEW ARRIVAL



PL50FT-3000K

M50 FT. PATIO STRING LIGHT PERFECT FOR ANY PATIO LIGHTING

Wattage Voltage	1.2W per bulb 120V AC
IP Rating Beam Angle	IP44 270°
Colour Temp. Lamp	3000K E26 base
Wiring CRI	SJTW 18AWG cable 80
Operating Temp.	-20°C ~ +40°C
Warranty	2 Years



LANDSCAPE LIGHTS



SECURITY LIGHTS

SL2-5CCT

NEW GENERATION SECURITY LIGHT WITH 5CCT AND BUILT-IN MOTION SENSOR

DESCRIPTION:

- High lumens output upto 2120 lmn
- Upto 60 ft. detection distance
- 180° detection angle
- Detection distance, LUX & Time are adjustable

Wattage Voltage	20W 120V AC
Lumens Beam Angle	1975 - 2120 lmn 100°
Lifetime CRI	50000 Hours >80
Dimmable	No
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP65
Rating	Wet Location
Application	Entryways / Front porch / Backyard / Sheds / Deck / Walkways / Fences
Operating Temp.	-20°C ~ +45°C



AVAILABLE FINISHES:



OL-1H

LED SECURITY LIGHT WITH 1 HEAD AVAILABLE IN 10W

DESCRIPTION:

- Easy installation
- Has in-built sensor
- Used for crime prevention
- Helps detecting intrusions

AVAILABLE FINISHES:



Wattage Voltage	10W 110-240V AC
Lumens Beam Angle	1200 lmn 100°
Lifetime CRI	40000 Hours >70
Dimmable	No
Colour Temp.	5000K
Sensor Range	Maximum 50ft. (15m) front
Grade of Protection	IP54
Rating	Non-IC Rated / Dry and Damp Location
Application	Warehouses / Gymnasiums / Industrial spaces
Operating Temp.	-20°C ~ +50°C



OL-S

LED MOTION SENSOR FOR SECURITY LIGHTS WITH FULL ANGLE ADJUSTABLE SENSOR HEAD

DESCRIPTION:


- Easy installation
- Far-range 20m 240° motion detector
- Has a full angle adjustable sensor head
- Temp. compensated for consistent range

AVAILABLE FINISHES:



Wattage Voltage	10W 110-240V AC
Lumens Beam Angle	1200 lmn 100°
Lifetime CRI	40000 Hours >70
Dimmable	No
Colour Temp.	3000K
Sensor Range	Maximum 50ft. (15m) front
Grade of Protection	IP54
Rating	Non-IC Rated / Dry and Damp Location
Application	Warehouses / Gymnasiums / Industrial spaces
Operating Temp.	-20°C ~ +50°C



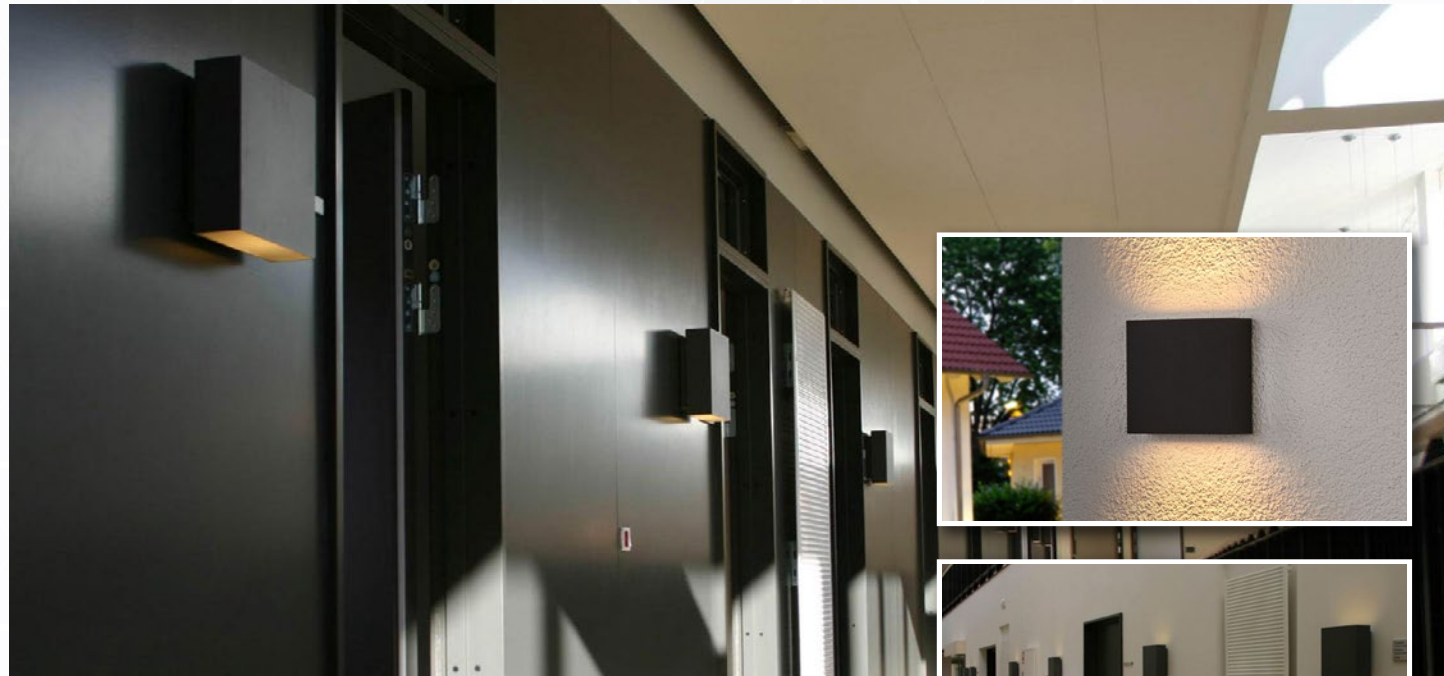

WALL SCONCES

SSC-DL-5CCT-BK | SSC-UD-5CCT-BK
 LOW PROFILE LED UP AND DOWN WALL SCONCE
 WHICH CAN BE USED INTERIOR OR EXTERIOR



DESCRIPTION:

- Aluminum body with glass diffuser
- Elegant design
- TRIAC dimming
- Up/Down lighting direction



Wattage Voltage	15W 120-277V AC
Lumens Beam Angle	1000 lmn 110°
Lifetime CRI	50000 Hours 80
Dimmable	Yes
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP65
Rating	Wet Location
Lighting Direction	Down Up/Down
Operating Temp.	-20°C ~ +45°C



EXIT SIGNS

OE-316
 4.5W LED RUNNING MAN COMBO
 EXIT SIGN WITH 120 MINUTE BACKUP TIME

Wattage	4.5W
Voltage	120-347V AC
Battery	3.6V 1800mAh
Emergency Time	≥120 min
Insulation	II, Range: 80m²
Grade of Protection	IP20
Operating Temp.	0°C ~ +40°C
Warranty	5 Years



OE-DC126
 LED PICTOGRAM EXIT SIGN THAT
 REQUIRES NO BATTERY

Wattage	1W
Voltage	6-24V DC
Battery	N/A
Emergency Time	N/A
Insulation	II, Range: N/A
Grade of Protection	IP20
Operating Temp.	0°C ~ +40°C
Warranty	5 Years



OE-126
 4.5W LED PICTOGRAM EXIT SIGN WITH 120
 MINUTE EMERGENCY DURATION TIME


Wattage	4.5W
Voltage	120-347V AC
Battery	3.6V 900mAh
Emergency Time	≥120 min
Insulation	II, Range: 80m²
Grade of Protection	IP20
Operating Temp.	0°C ~ +40°C
Warranty	5 Years



OE-G026
 LED EDGE LIT RUNNING MAN EXIT SIGN
 FOR UNIVERSAL MOUNTING

Wattage	2W
Voltage	120-347V AC
Battery	3.6V 300mAh
Emergency Time	≥90 min
Insulation	II, Range: 80m²
Grade of Protection	IP20
Operating Temp.	0°C ~ +40°C
Warranty	5 Years



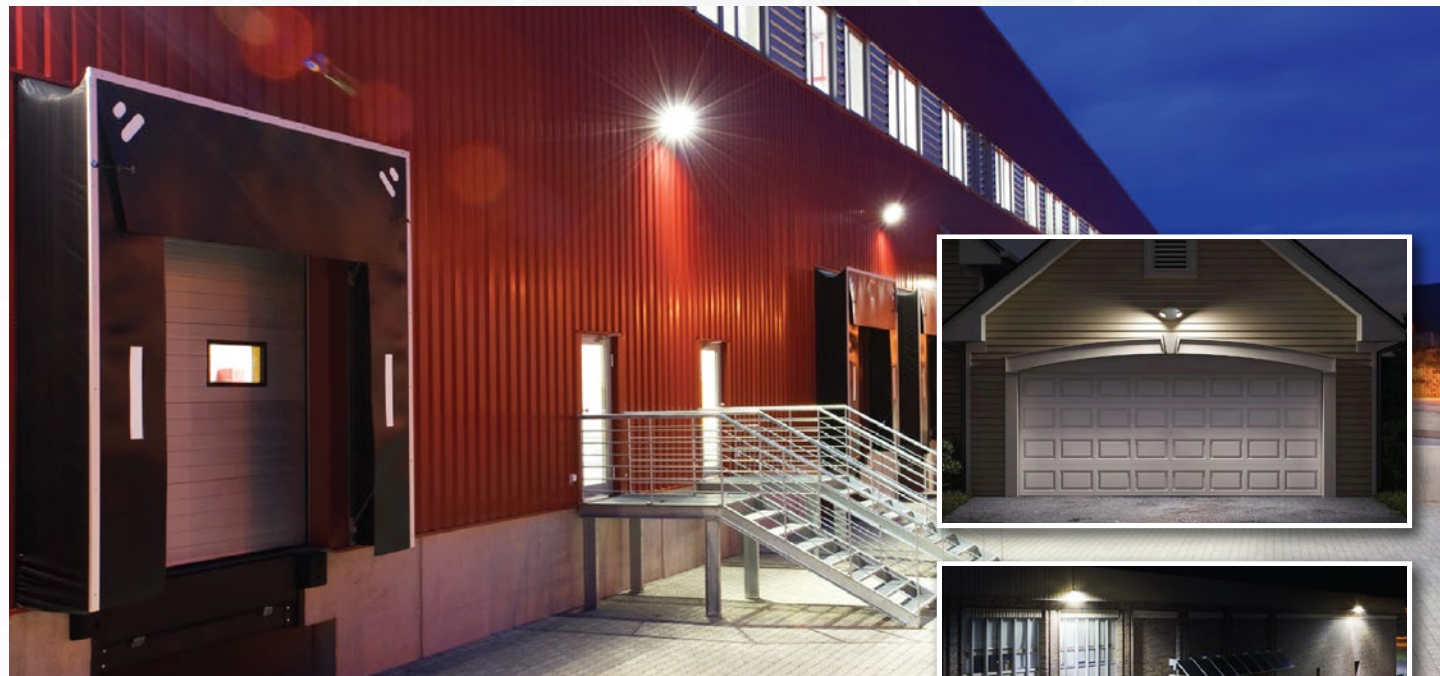

EMERGENCY LIGHTS

OE-212BP

36W MAX. LED DUAL HEAD EMERGENCY LIGHT

Wattage	36W Max.
Voltage	120-277-347V AC
Battery	6V 7Ah
Lumens	260 lmn
Colour Temp.	6500K
Discharge Current	0.67-6.67A
Operating Temp.	0°C ~ +40°C
Warranty	5 Years



OE-216-72W | OE-216-150W

LED DAUL HEAD EMERGENCY LIGHT WITH 120 EMERGENCY DURATION TIME

Wattage	72W Max., 150W Max.
Voltage	120-277-347V AC
Battery	12V 7Ah, 2pcs 6V 12Ah
Lumens	260 lmn
Colour Temp.	6500K
Discharge Current	0.3-6.3A, 0.3-12.8A
Operating Temp.	+10°C ~ +40°C
Warranty	5 Years



OE-212

LED DAUL HEAD EMERGENCY LIGHT WITH 120 EMERGENCY DURATION TIME

Wattage	2W (AC), 2*1.2W (DC)
Voltage	120-347V AC
Battery	3.6V 1200mAh
Lumens	260 lmn
Colour Temp.	6500K
Discharge Current	430-500mA
Operating Temp.	0°C ~ +40°C
Warranty	5 Years



OE-C212

LED COMPACT SIZE DUAL HEAD EMERGENCY LIGHT

Wattage	2W
Voltage	120-277V AC
Battery	3.6V 1000mAh
Lumens	>200 lmn
Colour Temp.	6016K
Discharge Current	700-900mA
Operating Temp.	0°C ~ +40°C
Warranty	5 Years



OE-703-1H

LED EMERGENCY HEAD FOR WALL AND CEILING MOUNTING

Wattage Voltage	2W 3.6-15V DC
Rating	Dry location
Dimmable	No
Grade of Protection	IP20
Colour Temp.	6500K-7500K
Insulation	II, Range: 80m ² /860ft ²
Operating Temp.	0°C ~ +40°C
Warranty	5 Years



OE-703H

LED EMERGENCY HEADS FOR WALL AND CEILING MOUNTING

Wattage Voltage	4W 3.6-24V DC
Rating	Dry location
Dimmable	No
Grade of Protection	IP20
Colour Temp.	6500K-7500K
Insulation	II, Range: 80m ² /860ft ²
Operating Temp.	0°C ~ +40°C
Warranty	5 Years



PANEL LIGHTS

OD-1x4-3CCT+3WT | OD-2x2-3CCT+3WT | OD-2x4-3CCT+3WT


COMMERCIAL GRADE BACK LIT PANELS WITH GREAT HEAT DISSIPATION



DESCRIPTION:

- Uniform and soft luminance
- Low light degradation
- Extremely slim and beautiful

Wattage	30W,35W,40W 30W,35W,40W 30W,40W,50W
Lumens Beam Angle	125lm/W 120°
Lifetime CRI	50000 Hours ≥80
Dimmable Voltage	Yes 120-347V AC
Colour Temp.	3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Rating	IC Rated / Indoor use / Dry and damp location
Application	Office / Factory / Supermarket, etc.
Operating Temp.	-20°C ~ +45°C

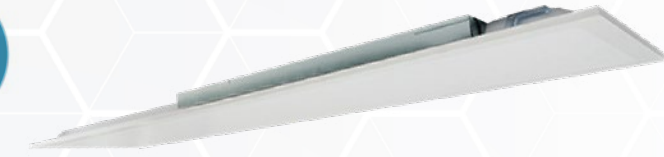

BACK LIT PANEL FRAMES

DESCRIPTION:

- Quick connection without screws
- Right angle connector - friendly connect with metal hose
- Mechanism structure to hold cover in place after wires have been jammed



OD-1x4-3CCT+3WT Compatible with FRAME-1x4-3CCT
 OD-2x2-3CCT+3WT Compatible with FRAME-2x2-3CCT
 OD-2x4-3CCT+3WT Compatible with FRAME-2x4-3CCT

VAPOUR TIGHTS


VT-40W-3CCT+W | VT-40WMS-3CCT+W

LED VAPOUR TIGHT SUITABLE FOR WET LOCATION



DESCRIPTION:

- Slotted iron Board, excellent heat dissipation
- Suitable for all commercial needs
- WMS model comes with motion sensor

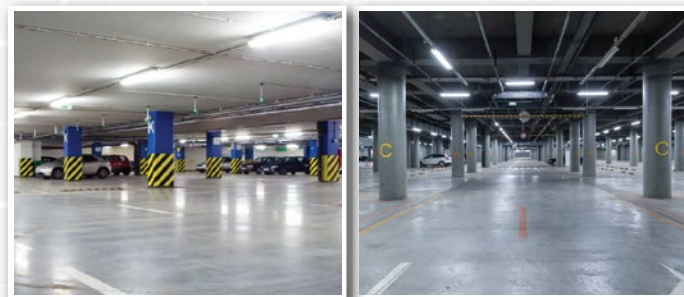

Wattage	30W,40W,50W
Lumens Beam Angle	130lm/W 120°
Lifetime CRI	50000 Hours >80
Dimmable Voltage	Yes 110-347V AC
Colour Temp.	3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP65
Rating	IC Rated / Wet location
Sensor	Variable dimming microwave sensor in WMS model
Operating Temp.	-20°C ~ +40°C

COMMERCIAL LIGHTING

SHOP LIGHTS

OL-ST4-3CCT+W | OL-ST8-3CCT+W

LED LINEAR STRIP LIGHT WITH ADJUSTABLE CCT AND WATTAGE



DESCRIPTION:

- Daisy connection
- Suspending and surface-mounted installation
- Motion sensor compatible (sold separately)



Wattage	30W,40W,50W 50W,60W,70W
Lumens Beam Angle	130lm/W 120°
Lifetime CRI	50000 Hours 80
Dimmable Voltage	Yes 120-347V AC
Colour Temp.	3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Rating	IC Rated / Indoor use / Dry and damp location
Application	School / Hospital / Supermarket / Office / Warehouse
Operating Temp.	-20°C ~ +40°C



ACCESSORIES (SOLD SEPARATELY)



WRAP-AROUND LIGHT

4WA-3CCT+W

POWER AND CCT ADJUSTABLE WRAP-AROUND LIGHT




DESCRIPTION:

- Diffused light and damp location rated
- Surface-mounted installation
- Polycarbonate lens



Wattage	30W,40W,50W
Lumens Beam Angle	110lm/W 110°
Lifetime CRI	50000 Hours >80
Dimmable Voltage	Yes 120-347V AC
Colour Temp.	3000K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Power Factor	>0.9
Application	School / Hospital / Supermarket / Office / Warehouse
Operating Temp.	-20°C ~ +40°C

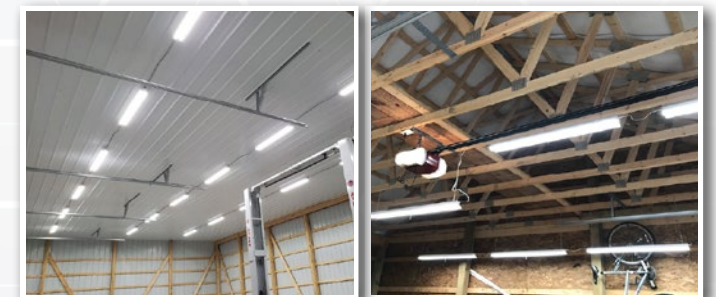

COMMERCIAL LIGHTING

AREA LIGHTS

SB150-3CCT+W | SB300-3CCT+W

COMMERCIAL GRADE LED AREA LIGHT WITH SOCKET BASE

DESCRIPTION:

- High luminous efficiency and long life
- Cast aluminium design with better cooling
- Special designed rotatable lens



Wattage	70W,100W,150W 200W,250W,300W
Lumens Beam Angle	135lm/W TYPE III
Lifetime CRI	50000 Hours >80
Dimmable Voltage	Yes 120-347V AC
Colour Temp.	3000K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP65
Rating	Wet location
Application	Parking lots / Streets / Stadiums / Parks / Warehouses / Industrial spaces
Operating Temp.	-40°C ~ +45°C



ACCESSORIES (SOLD SEPARATELY)



WALL PACKS

WP40-3CCT+W | WP100-3CCT+W


WATERPROOF LED WALL PACK WITH GLASS COVER

DESCRIPTION:

- Dustproof
- Built-in bubble level ensures horizontal installation
- Waterproof



Wattage	20W,30W,40W 60W,80W,100W
Lumens Beam Angle	>135lm/W 70°x110°
Lifetime CRI	50000 Hours >80
Dimmable Voltage	Yes 120-347V AC
Colour Temp.	3000K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP65
Rating	Both indoor & outdoor / Wet location
Application	Warehouses / Gymnasiums / Industrial spaces/ etc.
Operating Temp.	-40°C ~ +45°C

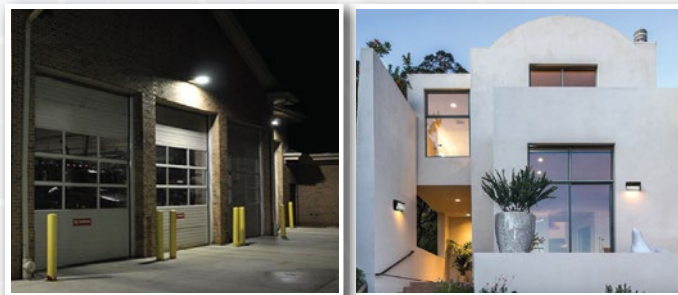

COMMERCIAL LIGHTING

M-WP25-3CCT+W

CCT & WATTAGE SELECTABLE LED MINI WALL PACK WITH INTEGRATED PHOTOCELL SENSOR

DESCRIPTION:

- Excellent optics design
- Die-cast aluminum cooling design
- Easy installation, with surface mounted kit (included)



Wattage	15W,20W,25W
Lumens Beam Angle	>125lm/W 90°x140°
Lifetime CRI	50000 Hours >80
Dimmable Voltage	Yes 100-277V AC
Colour Temp.	3000K / 4000K / 5000K
Warranty	5 Years
Rate Current	0.28A
Rating	Wet location
Materials Mounting	ADC12 Bracket fixed
Operating Temp.	-20°C ~ +40°C



COMMERCIAL LIGHTING

UFO & LINEAR HIGH BAYS

2HB165-3CCT+W | 4HB250-3CCT+W


COMMERCIAL GRADE 2&4 FEET LED LINEAR HIGH BAYS WITH ADJUSTABLE CCT AND WATTAGE



DESCRIPTION:

- High quality driver
- Flicker free
- Suitable for dry location

Wattage	90W,120W,165W 200W,225W,250W
Lumens Beam Angle	135lm/W 90°
Lifetime CRI	50000 Hours >80
Dimmable Voltage	Yes 120-347V AC
Colour Temp.	3000K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP20
Rating	Non-IC rated / Indoor use / Dry location
Application	Warehouses / Gymnasiums / Industrial spaces, etc.
Operating Temp.	-40°C ~ +45°C

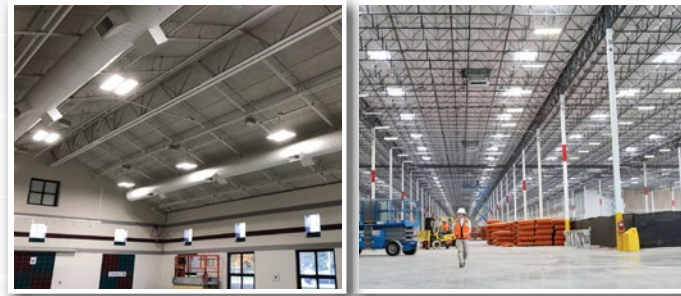

ACCESSORIES (SOLD SEPARATELY)



PENDANT HANGER



WIRE GUARD

UFO-150-3CCT+W | UFO-240-3CCT+W


SMALL SIZE, LIGHT WEIGHT CCT AND WATTAGE ADJUSTABLE UFO HIGH BAYS



DESCRIPTION:

- Simple and stylish appearance
- Excellent heat dissipation
- Round EM driver for fast installation

Wattage	100W,125W,150W 150W,200W,240W
Lumens Beam Angle	135lm/W 110°
Lifetime CRI	50000 Hours >80
Dimmable Voltage	Yes 120-347V AC
Colour Temp.	3500K / 4000K / 5000K
Warranty	5 Years
Grade of Protection	IP65
Rating	Wet location
Application	Warehouses / Storage spaces / Industrial spaces/ etc.
Operating Temp.	-20°C ~ +40°C

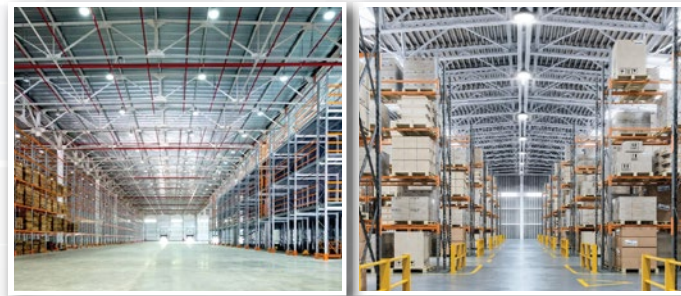

ACCESSORIES (SOLD SEPARATELY)



PNP-SENSOR

COMMERCIAL LIGHTING

COMMERCIAL DOWNLIGHT

OD-C618 | OD-C822

6" AND 8" DUAL SELECTABLE ROUND COMMERCIAL DOWNLIGHTS



DESCRIPTION:

- Type IC and Air tight
- Regressed optics with low glare
- Suitable for new construction and retrofit applications

Wattage	7W,10W,18W 10W,15W,22W
Lumens	650-1600lm 950-2000lm
Lifetime CRI	50000 Hours 80+
Dimmable Voltage	Yes 120-347V AC
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Warranty Beam Angle	5 Years 120°
Grade of Protection	IP54
Rating	Indoor use
Application	New construction / Retrofit, etc.
Operating Temp.	-20°C ~ +40°C



COMMERCIAL CANOPIES

CNP40-3CCT+W | CNP100-3CCT+W

SLIM, DURABLE GARAGE AND CANOPY LED WITH A LIGHT WEIGHT DESIGN



DESCRIPTION:

- Plug and play sensor
- High light reflectivity reflectors
- Power tunable and CCT selective functions

Wattage	20W,30W,40W 60W,80W,100W
Lumens	135LMN/W
Lifetime CRI	50000 Hours >80
Dimmable Voltage	No 120-347V AC
Colour Temp.	3500K / 4000K / 5000K
Warranty Beam Angle	5 Years 150°
Grade of Protection	IP54
Rating	Wet location
Application	Parking garage / Car port / Driveway / Underpass, etc.
Operating Temp.	-40°C ~ +113°C



COMMERCIAL LIGHTING

EXPLORE OUR RANGE OF
OTHER CATALOGUES AS WELL

- HVAC
- FIREPLACE
- ELECTRICAL





WWW.ORTECHINDUSTRIES.CA

13376 Comber Way, Surrey, BC V3W 5V9
205 Summerlea Rd, Brampton, ON L6T 4E5

1-888-543-6473
info@ortechindustries.com