## **WRR-P-S206S**

Wisenet WAVE Network Video Recorder





The WRR-P-S206S series offers an affordable and reliable 2U rackmount solution for any entry level deployment. Up to 416TB of raw video-optimized storage is provided by 24/7 duty cycle SATA drives.

The latest Intel® Xeon® Silver 4216 Series Processor allows for high powered computing power, and 32GB of DDR4 RAM provides the system resources to scale as needed.

A dedicated solid state drive for applications and the operating system enables fast boot and load times. Supports RAID 0, 1, 5, 6, and 10 storage configuration allowing for increased reliability, and a 5-year, on-site, Next Business Day, Keep Your Hard Drive warranty ensures peace of mind.

Each server is pre-configured with Wisenet WAVE VMS and preloaded with 4 Professional licenses to ensure guick and easy deployment with minimum setup time.

### **Key Features**

- Preloaded and configured with Wisenet WAVE video management system
- 470 Mbps of recording throughput
- Pre-configured for RAID 6
- Up to 416TB of Raw Storage
- Supports RAID 0, 1, 5, 6, 10 configurations
- SSD & 24/7 Duty Cycle SATA Drives
- IPMI Management
- Includes USB mouse and keyboard
- Includes Sliding Rack Rail with Cable Management Arm
- 5-Year, On-site, Next Business Day, Keep Your Hard Drive Warranty
- Supports Wisenet and ONVIF conformant IP cameras
- •Supports up tp 128 2MP cameras @ 54 days retention, H.264, 30 fps
- Supports up to 128 4MP cameras @ 34 days retention, H.264, 30 fps



	WRR-P-S206S				
SYSTEM					
Video Management Software	Wisenet WAVE				
Recording Bandwidth	Up to 470 Mbps				
Pre-loaded Licenses	4 x Wisenet WAVE Professional Licenses				
OS Drive Bays	2 x 240GB Dual RAID 1 SSD (internally mounted)				
Data Drive Bays	24 x 3.5" Front Hot Swappable Bays / 2 x 3.5" Rear Hot Swappable Bays				
Data Storage	Up to 416TB raw storage, 349TB usable after formatting & RAID 6				
RAID Support	Supports RAID 0, 1, 5, 6, 10, 8GB NV Cache (RAID 6 default configuration)				
Network Interface	2 x RJ45 Gigabit Ethernet / 2 x 10GbE SFP+ Ports				
Processor	2 x Intel® Xeon® Silver 4216 Series Processor, 2.1 to 3.2Ghz, 16 Cores / 32 Threads				
Memory	32 GB DDR4				
Operating System	Windows Server 2019 Standard				
Video Outputs	$3 \times MiniDP$ (1 MiniDP to HDMI adapter included) $1 \times VGA^*$ (Front), $1 \times VGA^*$ (Rear)				
USB Ports	2 x USB 3.0 (Rear), 2 x USB 2.0 (Front), 1 x USB 3.0 (Internal)				
Other Ports	Serial				
Keyboard & Mouse	Included				
Sliding Rail Kit	Included, with Cable Management Arm				

#### MECHANICAL / ELECTRICAL / ENVIRONMENTAL


	Form Factor	2U rack mount chassis		
Mechanical	Color / Material	Black / Metal		
	Dimensions (WxDxH)	17.6" (448mm) x 31.9" (810mm) x 3.4" (86.8mm), "Not including handles, latches or bezel		
	Weight	Up to 88.2 lbs (40 kg)		
Electrical	Power Supply	2 x Redundant 1100W		
	Power Input	115/230 VAC		
	Power Consumption	Maximum 1100W each PSU		
	Operating Temperature	Standard: $50^{\circ}\text{F} \sim 95^{\circ}\text{F}$ ) ( $10^{\circ}\text{C} \sim 35^{\circ}\text{C}$ ) at $10\%$ to $80\%$ RH with $84.2^{\circ}\text{F}$ maximum dew point. Refer to manual for operating temperature derating. Extended: $40^{\circ}\text{F} \sim 104^{\circ}\text{F}$ ( $5^{\circ}\text{C} \sim 40^{\circ}\text{C}$ ) at $5\%$ to $85\%$ RH with $84.2^{\circ}\text{F}$ dew point.		
Environmental	Storage Temperature	-40°F ~ 149°F (-40°C ~ 65°C)		
	Operating Humidity	10% to 80% RH with 84.2°F maximum dew point.		
Certification		UL, cUL, CB, FCC		

\*The latest product information / specification can be found at www.hanwhasecurity.com

\* Bandwidth performance figures based on performance testing by Hanwha Techwin using Wisenet WAVE

 $*\,VGA\ outputs\ are\ for\ system\ configuration\ only.\ Not\ optimized\ for\ camera\ viewing.\ Use\ NVIDIA\ MiniDP\ outputs\ for\ camera$ viewing.

#### **Dimensions** Unit: inch (mm)

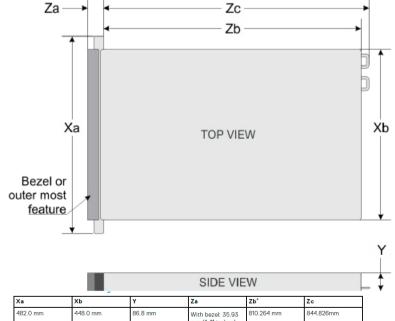

# **WRR-P-S206S**

Wisenet WAVE Network Video Recorder





\*Pre-configured for RAID 6, Supports RAID 0, 1, 5, 6, 10 configurations.



## **EFFECTIVE STORAGE CAPACITY\***

MODEL	RAW STORAGE	RAID EFFECT	RAID6
WRR-P-S206S-256TB	256TB	218TB	203TB
WRR-P-S206S-288TB	288TB	247TB	232TB
WRR-P-S206S-320TB	320TB	276TB	262TB
WRR-P-S206S-352TB	352TB	305TB	291TB
WRR-P-S206S-384TB	384TB	334TB	320TB
WRR-P-S206S-416TB	416TB	364TB	349TB

\* Actual usable space is dependent on file system format and allocation size. Size shown is after formatting with default Windows options.