




**Avid Configuration Guidelines
HP ZCentral 4R workstation
6 to 18 Core CPU System**

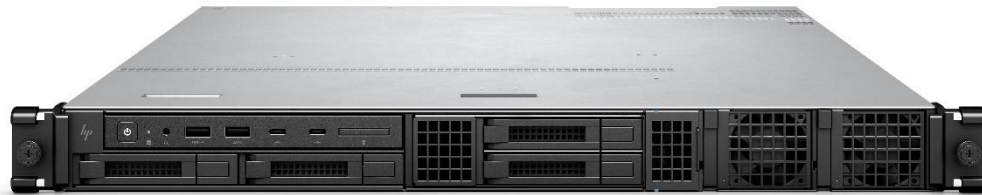

1.) HP Z4R AVID Qualified System Specification:

Z4R Hardware Configuration

Intel Xeon W-series (Cascade lake – Q4 '19)

- Xeon W-2235 3.8 Ghz, turbo up to 4.6 Ghz 6-core
 - Xeon W-2245 3.9 Ghz, turbo up to 4.5 Ghz 8-core
 - Xeon W-2255 3.7 Ghz, turbo up to 4.5 Ghz 10-core
 - Xeon W-2275 3.3 Ghz, turbo up to 4.6 Ghz 14-core
 - Xeon W-2295 3.0 Ghz, turbo up to 4.6 Ghz 18-core (Best performance)
- Note – Higher CPU speeds are preferred over CPU core count for MC application (as turbo speeds are similar, higher core count will give better performance).

Single power supply 675W – dual redundant power supply option or 2 x 675 W (1350 W) option

Supported Video Cards

- 1.) NVIDIA P1000 4GB PCI-e video board
- 2.) NVIDIA P2200 5GB PCI-e video board
- 3.) NVIDIA RTX4000 8GB PCI-e video board - (Best price/performance)
- 4.) NVIDIA RTX5000 16GB PCI-e video board
- 5.) NVIDIA RTX6000 24GB PCI-e video board - (Best performance)

RTX 5000 & 6000 requires addition of Dual Slot Riser and High End Chassis with 1350W PSU

System Disk Drive – 500 GB NVMe or SATA SSD (recommended). HP offers higher performing solid-state, NVMe, and SAS boot drive options which are acceptable. Recommend a HP qualified drive be selected.

Standard AVID memory configuration:

- Systems with Xeon W Cascade lake CPUs use DDR4-2933MHz ECC memory (up to 4 DIMMs per system)
 - Each CPU has 4 memory lanes - optimal bandwidth when all 4 memory lanes filled
 - 32GB (4 x 8GB) DDR4 2933 MHz memory – (Requires four 8GB DIMMs)
- Memory modules must be installed according to manufacturer's requirements

Optional AVID memory configuration:

- 64GB (4 x 16GB) DDR4 2933 memory – (Requires four 16GB DIMMs)
- 128GB (4 x 32GB) DDR4 2933 memory – (Requires four 32GB DIMMs)

Memory configuration constraints

- No other memory configurations are formally supported in AVID environments.
- Un-balanced memory configurations which mix and match memory module sizes and locations will result in a poor performing, non-optimal operating environment.

2.) Qualified Operating Systems, Avid Client Editing Applications, Hardware and Shared-Storage support for the HP Z4R:

HP Supports:

- **Microsoft® Windows 10 Pro / Enterprise 64-bit Edition Version 2004 or later**

See microsoft win 10 lifecycle fact sheet for supported Win 10 versions:

<https://support.microsoft.com/en-us/help/13853/windows-lifecycle-fact-sheet>

Not Supported –

- **Microsoft® Windows 7, 8, or 8.1 – any version**

| Media Composer Application | Minimum Rev |
|-----------------------------------|------------------------|
| Media Composer 2019.12.x, 2020.x | Min 2019.12.x required |
| Media Composer 2018.x, 2019.1-11 | Not supported |
| Media Composer 7.x, 8.x | Not supported |
| NewsCutter 11.x | Not Supported |

3.) Qualified O.S., Hardware and shared storage supported:

| | Qualified / Supported |
|--|--|
| Nitris DX/Mojo DX | NOT SUPPORTED End of support 3/31/2020 |
| Artist DNxIO/ DNxIQ | Yes – PCIe only |
| Artist DNxIV/DNxIP/DNxID | NOT SUPPORTED - No thunderbolt option on the Z4R |
| 3 rd Party Qualified Hardware | See release notes and Avid website for information regarding supported 3 rd party hardware (vendor qualified) |
| NEXIS / ISIS Single 1Gb Ethernet Client NEXIS Dual 1Gb Ethernet Client Intel i350 T2V2, i219 | ISIS 5500 / 5000 , 7500 / 7000 Avid NEXIS Pro, E2, E2 SSD, E4, E5, E5 NL V20.5 |
| NEXIS / ISIS Ultra Hi-res (10Gbit) client Myricom Single or dual Port 10Gbit Atto FFRM-NS11,NS12 NT11, NT12 Intel X550-T2, X722 | ISIS 5500 / 5000 , 7500 / 7000 Avid NEXIS Pro, E2, E2 SSD, E4, E5, E5 NL V20.5 |
| NEXIS 40Gigabit Atto FFRM-NQ 41/42 | Avid NEXIS Pro, E2, E2 SSD, E4, E5, E5 NL V20.5 |

4.) AVID qualified HBA info

| AVID qualified HBA | AVID Part Number | Slot Location | Function |
|--|---|---------------|---|
| Avid Artist DNxIO HBA Avid Artist DNxIQ HBA | Avid part # 7030-30048-02 BMD PCIe cable kit | #2 | Avid Artist DnxIO interface HBA Avid Artist DNxIQ interface HBA |
| Atto R680, H680 | Not stocked by AVID | #3 | Local SAS Storage |
| LSI 9200-8e SAS controller | 7030-30036-01 | #3 | Local SAS Storage: |
| Vendor qualified 3 rd party hardware x8 PCI-E | Not stocked by AVID | #2 | Vendor qualified 3 rd party hardware interface. See release notes and Avid website for information regarding supported 3 rd party hardware |
| Atto FFRM-NS11,NS12, NT11, NT12 10 Gb single or dual port | Not stocked by AVID | #3 | Shared Storage: NEXIS Optical Gb-Ethernet |
| Intel i350-T2 – Dual Gb NIC | Not stocked by AVID | #3 | Shared Storage: NEXIS Copper 1 Gb-Ethernet Dual Gb NEXIS Connectivity |
| Intel X550, X722 single or dual port 10Gb | Not stocked by AVID | #3 | Shared Storage: NEXIS Optical 10 Gb-Ethernet |
| Myricom 10G-PCIE-8B-S 10G-PCIE-8B2-2S, 10G-PCIE-8C2-2T | 7030-30041-01 | #3 | Shared Storage: NEXIS 10Gb-Ethernet |
| Atto FFRM-NQ 41/42 40 Gb single or dual port | Not stocked by AVID | #3 | Shared Storage: NEXIS Optical 40Gb-Ethernet |

Notes:

- Avid HIB part # 7030-30048-01 is no longer supported with DNxIO (use # 7030-30048-02 only)
- Avid artist DnxIQ requires BMD cable kit and PCIe card – Avid HIB card is NOT supported with DNxIQ
- Intel X710-DA2 only supported by HP on Win 10 – driver on HP web site

5.) Slot Configuration:

| Slot Configuration Information | | | |
|---------------------------------|----------------------------------|------------|--|
| Slot # | Electrical | Mechanical | |
| 1 - Single slot riser | x16 PCI-E Gen 3 | X16 | Graphics Card: Nvidia P1000, P2200, RTX 4000, RTX 5000** , RTX 6000** |
| 2 - Dual slot riser top slot | X8 PCI-E Gen 3 | X16 | Avid/BMD HIB card for DNxIO, DNxIQ Or 3 rd party PCIe OpenIO card Dual slot Graphics |
| 3 - Dual slot riser bottom slot | X8 PCI-E Gen 3 | X8 | Shared Storage Controllers Nexis/ISIS Or Local SAS storage Dual slot Graphics |
| M1 | M.2 slot 1 PCI-E Gen 3 | M.2 x4 | HP M.2 nVMe storage cards |
| M2 | M.2 slot 2 PCI-E Gen 3 | M.2 x4 | HP M.2 nVMe storage cards |
| | Embedded Intel I219 1 GbE NIC | PCI-E x1 | Qualified for Avid Nexis/ISIS |
| | Embedded Marvell AQC-107 10GbE | PCI-E x4 | Qualified for Avid Nexis/ISIS |

**** NOTE:** Dual graphics configuration requires Dual Slot Riser and High End Chassis with 1350 W PSU

6.) Use of embedded NIC ports for Nexis/ISIS connectivity **Important Information**

The Z4R has two embedded NIC ports (Intel 1GbE and Marvell 10GbE).. Both ports are qualified for Nexis

For proper operation and connectivity of the Intel network interface with NEXIS the following settings are required:

1. For the Intel NIC driver, under the performance settings, change the following parameters:
 - Receive Buffers to 1024
 - Transmit Buffers to 1024
2. Disable the windows firewall.

7.) **Required system BIOS settings for AVID environments:**

Use latest version from Vendor website

Please Note: CPU Hyper-threading should be enabled in all configurations. It is currently enabled by default by HP for shipping Z4R systems

Z4R Required system BIOS changes:

1. Verify CPU Processors are set to Hyper-Threading

Set Z4R Required system BIOS changes:

- During boot up press F10 at the HP splash screen to invoke Set Up.
- Select the Performance tab
- Select Hyper-Threading
- Verify setting is Enabled (or enable if currently set to disable)

8.) Graphics Qualified Drivers:


| AVID Software | Version(s) | GPU | Driver Required |
|----------------|------------------|------------|-----------------|
| Media Composer | 2020.5 and later | All Nvidia | Nvidia 442.50 |
| Media Composer | 2019.12.x | All Nvidia | Nvidia 441.28 |

After installation of the AVID software the supported Nvidia driver can be found in the following directory:
Program Files / Avid / Utilities / Nvidia.

****** The AMD graphics driver is NOT included with MC release builds. You can find this driver on the AMD web page
<http://support.amd.com/en-us/download>


Set optimized Nvidia driver settings for Avid editing environments:

1. See picture below
2. Right-Click on the desktop and select Nvidia Control Panel
3. Select the “Desktop” menu selection in the control panel menu bar.
4. Enable “Desktop -> Video Editing Mode

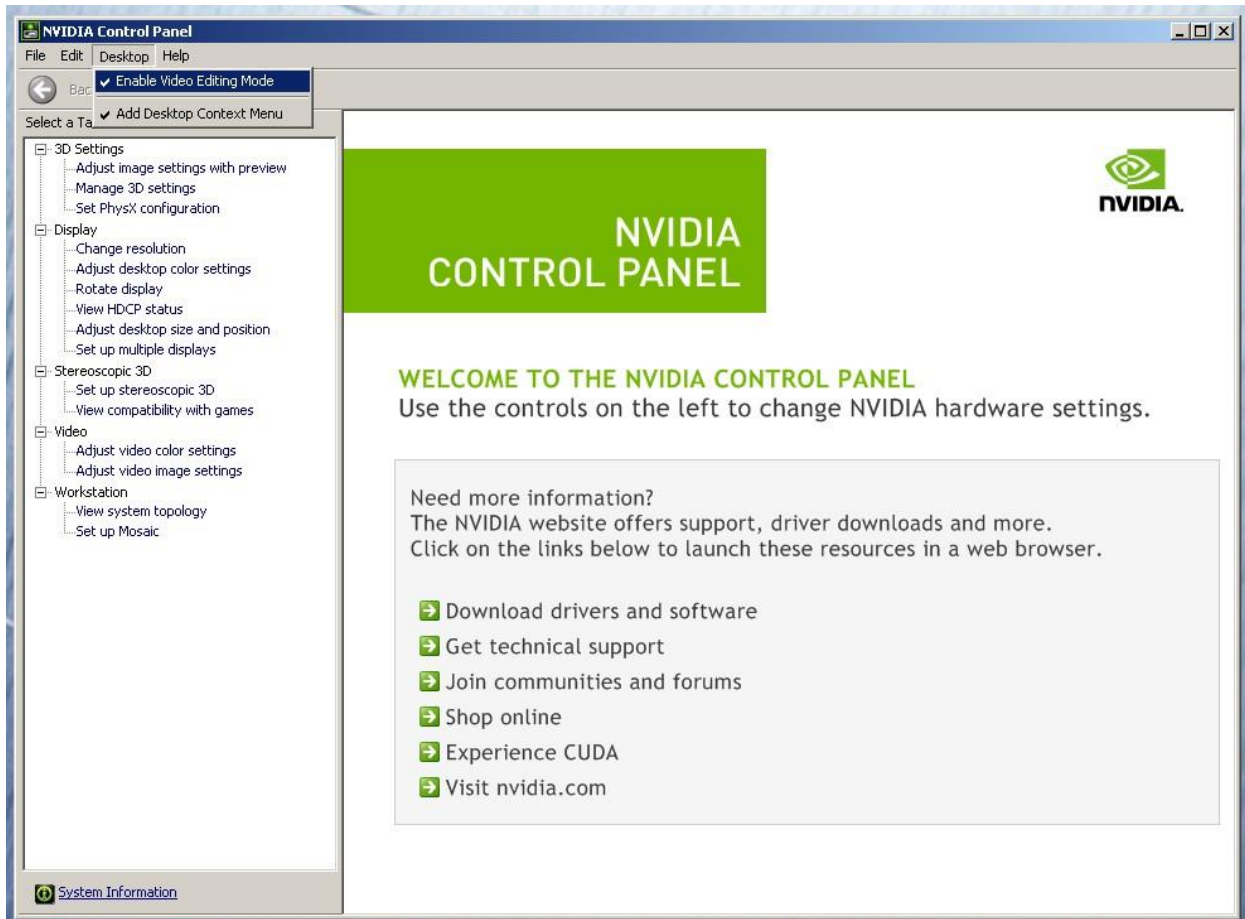

5. Select Manage 3D Settings
6. Select “Global Settings” Tab
7. Under the “Global Settings” tab select “3D App – Default Global Settings” (Same as Base Profile)
8. Scroll down and locate the “Power Management Mode” feature. The default setting is “Adaptive”

9. For the “Power management mode” feature, select “Prefer maximum performance” as shown in the picture below.

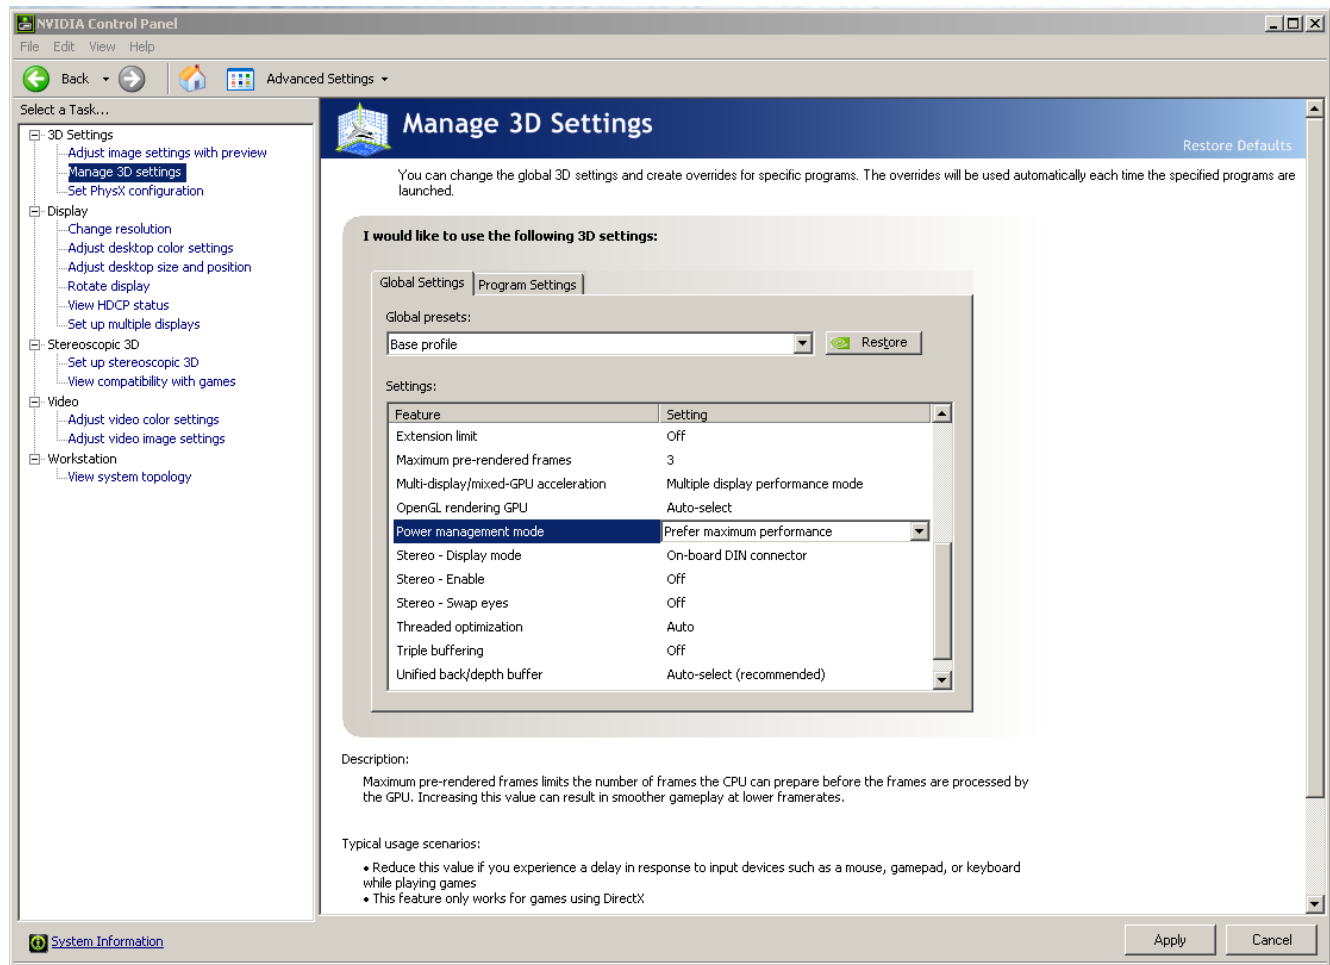

10. Depress the “Apply” button.

11. Nvidia driver optimization settings for Avid environments are complete.

9.) **GPU monitor connectivity:**

The Nvidia Quadro P4000, P2200 graphics cards have four Display-Port ports. The P1000 has 4 mini-display ports. The RTX 4000 has 3 Display Ports. The RTX5000 & RTX6000 have 4 Display Ports

*(Important: Display-ports **are not** HDMI ports; at first glance they do look very similar to HDMI ports)*

10.) **Serial Port Deck Control**

The HP Z4R workstation does NOT have an embedded serial port. Primary or secondary / additional serial port deck control can be established using USB to serial port adapters. See the Avid KB for more info.

11.) **O.S. setting recommendations for optimum performance with Avid Editing applications:**

The following links provide O.S. setting suggestions for ensuring optimum performance when working with your Avid editing application with a Windows operating system.

- Optimizations for Video Editors - windows 10

http://avid.force.com/pkb/articles/en_US/Troubleshooting/Media-Composer-Windows-10-Optimizations-and-Troubleshooting

Revision Update

| Revision | Date | Name | Update |
|----------|--------------|-----------|---|
| Rev A | Nov 17, 2020 | Dave Pimm | Initial release of the HP Z4R configuration guide |